Oracle Fusion Cloud Customer Experience

SOAP Web Services for Sales and Fusion Service

Oracle Fusion Cloud Customer Experience
SOAP Web Services for Sales and Fusion Service

F77849-21

Copyright © 2011, 2026, Oracle and/or its affiliates.

Author: Ankita Biswas

Contents

Get Help i

3 Overview 3
About SOAP Web Services in Oracle Applications Cloud 3

4 Business Object Service Structure 7
Business Object Components 7

5 Resources for Discovering Web Services 41
Overview 41

6 Business Object Service Advanced Examples 51
Standard CRUD Operations Additional Configuration 51

7 SOAP Web Services Initiation 61
Clients for Initiating SOAP Web Services 61

8 Business Object Services 87
Action Plan Service 87
Activity Service 125
Activity Task Service (Deprecated) 234
Appointment Service (Deprecated) 336
Assignment Service 459
Bulk Export (Deprecated) 484
Bulk Export Version 2 575
Business Plan Service 666
Case Service 717
Company and User Registration 744
Contract Service (Deprecated) 963
Contract Service Version 2 1075
Custom Business Object 1213
Custom Common Business Object (Deprecated) 1220

Customer Custom Business Object (Deprecated) 1233
Customer Interaction (Deprecated) 1246
Deal Registration Service 1350
Duplicate Resolution Service 1472
Entitlements Service 1481
File Import Activity Service 1489
Incentive Compensation Calendar Period Status 1503
Incentive Compensation Credit Rule 1507
Incentive Compensation Dispute Request 1535
Incentive Compensation Estimated Compensation 1554
Incentive Compensation Participant Export Web Service 1576
Incentive Compensation Participant Goal 1582
Incentive Compensation Participant Plan 1589
Incentive Compensation Participant Version 2 1597
Incentive Compensation Payment Acknowledgment 1615
Incentive Compensation Payment Export 1618
Incentive Compensation Paysheet Approval 1627
Incentive Compensation Rate Table 1634
Incentive Compensation Real Time Credit 1641
Incentive Compensation Transaction 1648
Loyalty Member Service 1674
Loyalty Transaction 1720
MDF Service 1739
Manage Process Submission 1816
Marketing Budget Service (Deprecated) 1838
Marketing Campaign Service 1908
Marketing Custom Business Object (Deprecated) 1928
Marketing List Service 1941
Marketing Response Service 1958
Marketing Source Code Service 2066
Marketing Treatment Service 2079
Name 2099
Opportunity Configuration 2153
Opportunity Service 2184
Partner Program Enrollment Service 2302
Partner Public Profile Attachment 2441
Partner Public Profile Search 2452

Partner Service 2464
Price Books 2690
Sales Account Resource Service 2690
Sales Account Service 2702
Sales Account Territory Service 2902
Sales Campaign 2911
Sales Catalog 2914
Sales Cloud Account 2948
Sales Cloud Address 2988
Sales Cloud Contact 3013
Sales Cloud Customer Classification 3051
Sales Cloud Household 3061
Sales Cloud Relationship 3090
Sales Competitor Service 3101
Sales Custom Business Object (Deprecated) 3148
Sales Forecast 3161
Sales Lead Custom Business Object (Deprecated) 3176
Sales Lead Service Version 1 (Deprecated) 3189
Sales Lead Service Version 2 3278
Sales Lead Service Version 3 3380
Sales Lookup 3486
Sales Method 3524
Sales Objective 3570
Sales Order Service 3616
Sales Party 3639
Sales Party Resource Service 3865
Sales Party Territory service 4034
Sales Person Setup 4205
Sales Person Setup 4215
Sales Reference Customer 4224
Sales Status Category Mapping 4284
Sales Territory Custom Business Object (Deprecated) 4319
Sales Territory Dimension Service 4332
Sales Territory Proposal Service 4342
Sales Territory Service 4362
Search Marketing Campaign Data Upload 4386
Service Custom Business Object (Deprecated) 4416

Service Request Service 4428
Social Post 4523
Source Information Technology System 4536
Source Information Technology System Reference 4559
Subscription 4571
Trading Community Classification 4620
Trading Community Customer Account 4643
Trading Community Group 4693
Trading Community Information Format for Name and Address 4803
Trading Community Information Format for Phone 4830
Trading Community Location 4850
Trading Community Member Name and Identifier 4898
Trading Community Member Usage 4917
Trading Community Organization 4947
Trading Community Party Information 5083
Trading Community Party Usage Assignment Service (Deprecated) 5135
Trading Community Person Information 5186
Trading Community Real Time Data Quality 5344
Trading Community Relationship Type Service 5368
Trading Community Resolution Request 5385
Trading Community Resource 5394
Trading Community Resource 5418
Trading Community Resource Organization 5442
Trading Community Resource Organization 5453
Trading Community Resource Role 5464
Trading Community Resource Role 5493
Trading Community Resource Team 5523
Trading Community Resource Team 5541
Work Order Service 5559

9 Process Services 5575

Check Product Eligibility Service (Deprecated) 5575
Check Product Group Eligibility Service (Deprecated) 5575
Convert Marketing Response to Lead Service 5576
Convert Marketing Response to Opportunity Service 5577

10 Sample Payloads 5579

Perform Batch SOAP Operations 5579
Upload an attachment using Activity Service 5580
Contract Web Service Sample Payloads 5581
Organization Web Service Sample Payloads 6488
Person Web Services Sample Payloads 6576
Customer Account Web Service Sample Payloads 6598
Location Web Service Sample Payloads 6724
Trading Community Customer Account Web Service Sample Payloads 6731
Opportunity Web Service Sample Payloads 6735

Index 6743

Get Help

There are a number of ways to learn more about your product and interact with Oracle and other users.

Get Help in the Applications

Some application pages have help icons to give you access to contextual help. If you don't see any help icons on your page, click your user image or name in the global header and select Show Help Icons. If the page has contextual help, help icons will appear.

Get Training

Increase your knowledge of Oracle Cloud by taking courses at *Oracle University*.

Join Our Community

Use *Cloud Customer Connect* to get information from industry experts at Oracle and in the partner community. You can join forums to connect with other customers, post questions, suggest *ideas* for product enhancements, and watch events.

Share Your Feedback

We welcome your feedback about Oracle Applications user assistance. If you need clarification, find an error, or just want to tell us what you found helpful, we'd like to hear from you.

You can email your feedback to *oracle_fusion_applications_help_ww_grp@oracle.com*.

Thanks for helping us improve our user assistance!

3 Overview

About SOAP Web Services in Oracle Applications Cloud

Use Simple Object Access Protocol (SOAP) web services to integrate different applications within the enterprise or expose business functions to Oracle Cloud partners and customers.

Here are the two categories of SOAP web services in Oracle Applications Cloud.

Categories	What You Use It For
Business Object Services	Work with business objects, such as an opportunity or a marketing campaign. You can perform the standard CRUD operations to create or modify the exposed business objects. These services are implemented using the Application Development Framework (ADF).
Process Services	Manage business processes that are not centered around any particular business object. These services are typically implemented using Service-Oriented Architecture (SOA) composites.

SOAP web services are based on these industry standards.

- Extensible Markup Language (XML): A data format that allows uniform communication between web services consumers and web services providers.
- XML Schema: A framework that describes XML vocabulary used in business transactions.
- Simple Object Access Protocol: A protocol for exchanging structured information in the implementation of web services.
- Web Services Description Language (WSDL): An XML-based language that provides a model for describing SOAP-based web services.
- WS-Policy: A flexible and extensible grammar framework that describes the capabilities, requirements, and general characteristics of web services using the policies.

Access to Web Services

Topics containing details about the web services and supported operations might provide additional information about the privileges required to run them. Make sure that the users are assigned a custom role, optionally based on a predefined role, and that the custom role contains the appropriate privileges.

> **CAUTION:** While creating custom roles, make sure only the required privileges are assigned. Before proceeding further, see *Guidance for Assigning Predefined Roles*.

For details about roles and privileges that are common across Oracle Fusion Cloud Applications, see *Security Reference for Common Features*. For details about roles and privileges specific to your product area, see your product-specific Security Reference guide.

Related Topics

Web Service Life Cycle

You will find three phases of a business object web service in its life cycle. Oracle Applications Cloud supports public external SOAP services throughout their life cycle, until the services are obsolete.

1. Active: When a service is delivered the first time, until it's deprecated.
2. Deprecated: When a service is superseded by a newer version, or if there's a planned obsolescence in a future release. A service in this state is still supported and becomes obsolete in a later release.

   > **Note:** You must use the active version of the service. If you were previously using a service that's now deprecated, then migrate to the new, active version.

3. Obsolete: When a service is no longer shipped or supported.

Backward Compatibility for Web Services

You can update web services as part of an upgrade to a major release or as part of a bundle patch. Make sure the changes made to a service are backward compatible and must not break the existing code. Here are a few examples of backward compatible changes:

- Adding new operations
- Adding new optional attributes for service data object

Don't make backward incompatible changes to any public external service as it breaks the existing code that initiates the service. Here are a few examples of backward incompatible changes

- Removing an operation
- Removing a parameter in an operation
- Changing the parameter type of an existing operation
- Renaming an attribute of a service data object
- Adding a mandatory attribute to a service data object
- Changing the functional behavior of an operation (for example, the service returns a different output when the same values are passed in)

Web Service Versioning

When a service needs a backward incompatible change, don't make the change to the service directly. Keep the existing service as it is, and update its life cycle to deprecated phase. Get a new version of the service, which is a copy of existing one and apply the incompatible changes to it. Mark this new version as Active with its own endpoint and WSDL. Add the new version number to the service namespace.

This diagram shows the life cycle of a service and the coexistence of multiple service versions. Both versions of the service are supported until the deprecated service is finally obsolete. At this point, only the active service is supported.

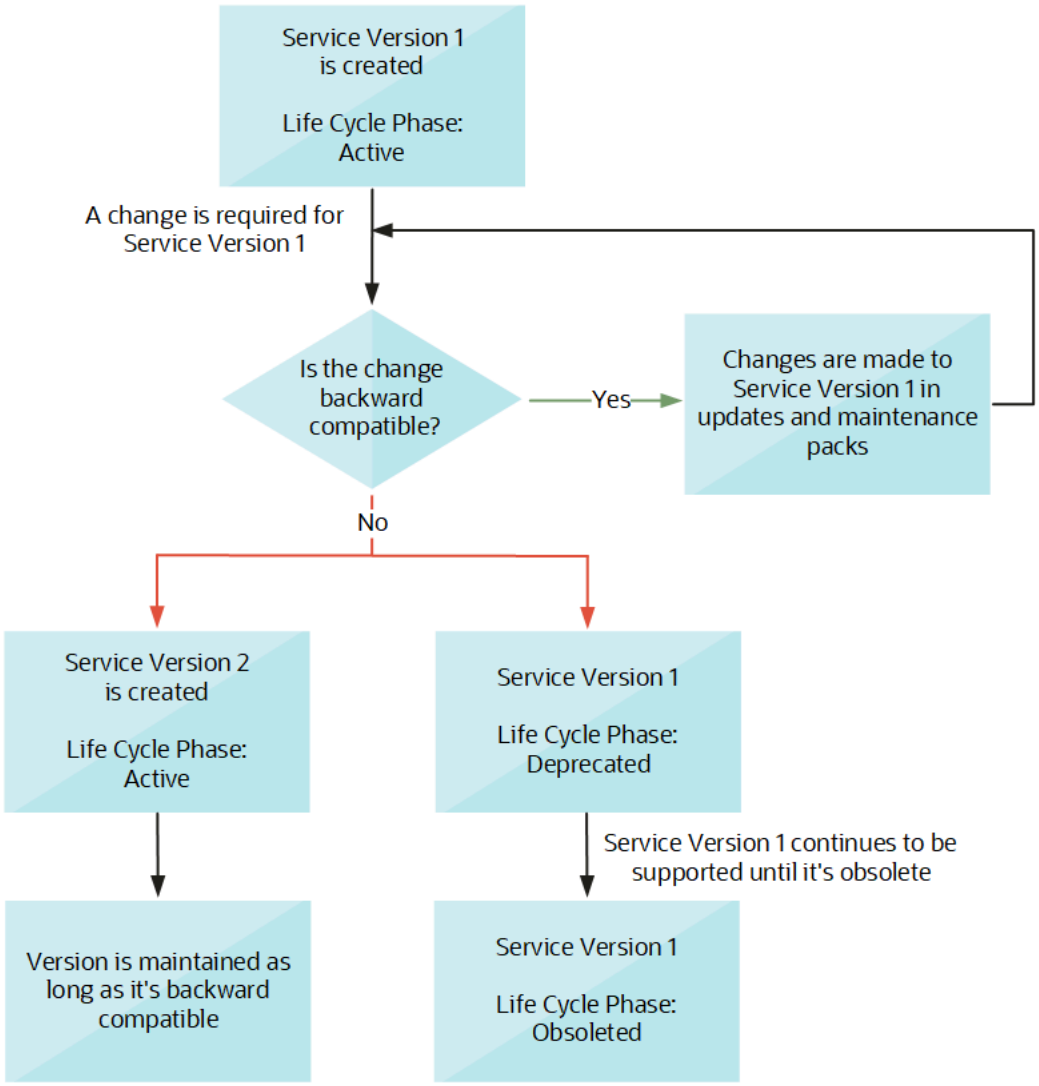

Related Topics

Web Service Management

This table lists some general tasks for web services, and indicates where to find more information about each task.

Task	More Information
Browse the web services in Oracle Applications Cloud.	See the SOAP Web Services guides for Oracle Applications Cloud services. To browse the web services provisioned on your cloud instance, see *Using Service Catalog Service*.
Identify the web services provisioned on my cloud instance.	See *Using Service Catalog Service*.

Task	More Information
Find out about operations defined on a particular service and the shape of the request and response payloads.	Find information about the web service in the SOAP Web Services guide for the appropriate Oracle Applications Cloud service at *Oracle Help Center*.
Learn about using create, get, update, merge, delete, find, and process (CRUD) operations, along with example payloads for the CRUD operations.	The standard CRUD operations are typically defined on business object services. See *Standard CRUD Operations*.
Get the service end point URL for a particular web service deployed to my cloud instance.	See *Using Service Catalog Service*. Find the web service in the SOAP Web Services guide for the appropriate Oracle Applications Cloud service at *Oracle Help Center*.
Learn what it means when a web service is marked as Deprecated.	See *Web Service Life Cycle*.
Understand the changes to a service interface when a cloud instance is upgraded to a new release.	See *Backward Compatibility for Web Services*.

Related Topics

4 Business Object Service Structure

Business Object Components

A business object, which a service implements, is a hierarchy of service data objects. Each service data object is a logical entity that consists of attributes, referred to as service data object attributes. This structure encompasses the required contextual and dependent information, so it's not necessary to invoke multiple services.

For example, a Sales Lead service is defined on the Sales Lead business object, which consists of service data objects such as Sales Lead contacts, Sales Lead products, and the Sales Lead data object itself. Each service data object contains attributes that define the object. `Name`, `DealAmount`, and `Score` are example attributes that define the Sales Lead service data object. These attributes may have a built-in data type such as long and string, or may have a complex data type that corresponds to another service data object. For more information, see *Business Object Service Data Types*.

The following diagram shows the service data objects as rectangles and the relationship between the data objects as lines. The Sales Lead service data object is the top-level entity, and Note, Sales Lead Contacts, Sales Lead Products, and Sales Lead Resources are the child entities. The Note child entity has Note Descriptive Flexfields as the grandchild entity.

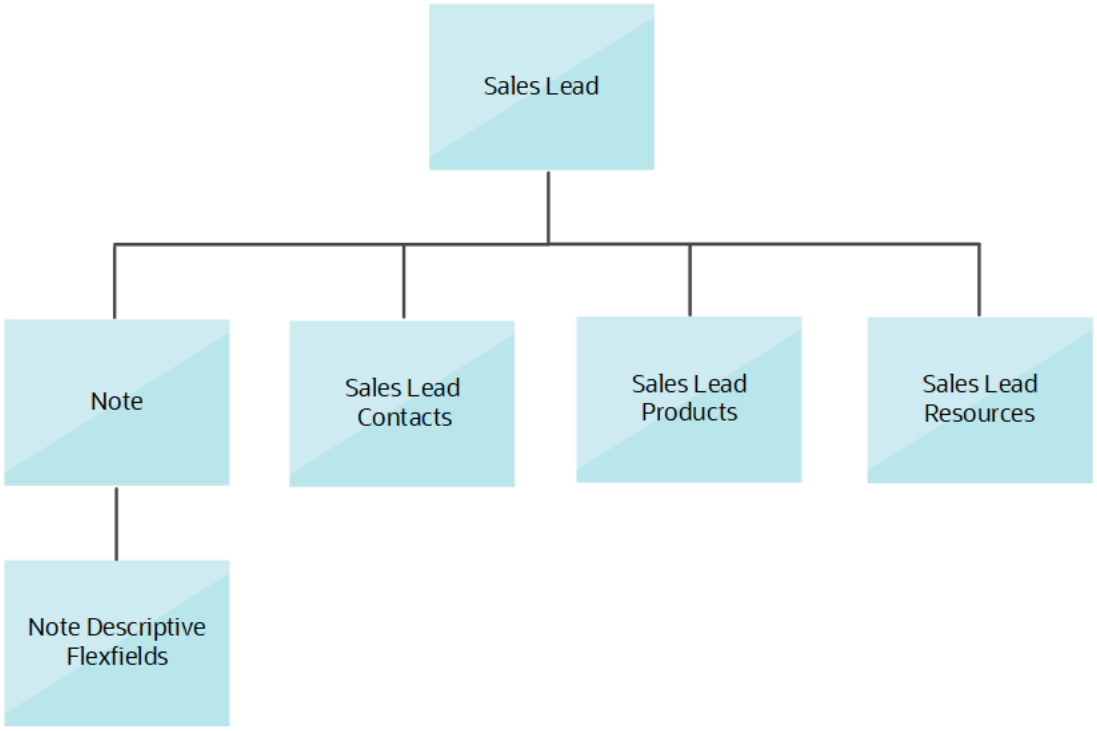

Related Topics

Service Interface Artifacts

A service interface is defined by three artifacts.

- *Service WSDL*: Contains standard WSDL elements and annotations that describe the service metadata, display name and service, operation and operation payload elements.
- *Service XSD*: Defines request and response payload types in a separate XSD, which has the same name as the WSDL.
- *Service Data Object XSDs:* Defines the service data object as a complex type and the attributes as the elements in the complex type. An XSD also includes annotations for the entity display name as well as entity and attribute descriptions.

Related Topics

Service WSDL

A service WSDL follows the standard structure of a WSDL document.

- Namespace declarations
- WSDL documentation, which includes the display name, description, operation name, description, and descriptions of request and response payload elements
- Partner link definition
- Security policy definition
- Type definition through imports of XSDs
- Message definition
- Port type and operation definition
- Binding definition
- Service definition

For example, the Sales Lead service interface is defined in the `SalesLeadService.wsdl`. For more information about WSDL specification, see *http://www.w3.org/TR/wsdl*.

Related Topics

Service XSD

A service XSD schema has the following basic structure:

- Namespace declarations
- Imports and includes the specifications of XSDs on which this schema definition has dependencies
- Definition of the elements of the request and response payloads for synchronous and asynchronous versions of all the service operations

> **Note:** The element names start with the operation names. The suffix determines whether the payload is a request or a response, and whether the payload elements are synchronous or asynchronous.

The following is an excerpt from the `SalesLeadService.xsd`.

```
<?xml version="1.0" encoding="UTF-8" ?>
<schema elementFormDefault="qualified"
targetNamespace="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
 xmlns:ns0="http://xmlns.oracle.com/apps/sales/leadMgmt/leads/leadService/"
xmlns:ns1="http://xmlns.oracle.com/apps/apps/marketing/leadMgmt/leads/leadService/"
 xmlns:ns2="http://xmlns.oracle.com/adf/svc/types/"
xmlns:tns="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns="http://www.w3.org/2001/XMLSchema"
 <import namespace="http://xmlns.oracle.com/adf/svc/types/"
schemaLocation="https://crm-your-cloud-hostname:port/mklLeads/SalesLeadService?XSD=/META-INF/wsdl/
BC4JService.xsd"/>
 <import namespace="http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/leadService/"
schemaLocation="https://crm-your-cloud-hostname:port/mklLeads/SalesLeadService?XSD=/oracle/apps/marketing/
leadMgmt/leads/leadService/MklLead.xsd"/>
 <import namespace="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/"
schemaLocation="https://crm-your-cloud-hostname:port/mklLeads/SalesLeadService?XSD=/oracle/apps/marketing/
leadMgmt/leads/leadService/MklLeadResources.xsd"/>
 <import namespace="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/"
schemaLocation="https://crm-your-cloud-hostname:port/mklLeads/SalesLeadService?XSD=/oracle/apps/marketing/
leadMgmt/leads/leadService/MklProdAssoc.xsd"/>
 <import namespace="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/"
schemaLocation="https://crm-your-cloud-hostname:port/mklLeads/SalesLeadService?XSD=/oracle/apps/marketing/
leadMgmt/leads/leadService/MklLeadTcMembers.xsd"/>
 ...
 <element name="getSalesLead">
 <complexType>
 <sequence>
 <element name="leadId" type="long"/>
 </sequence>
 </complexType>
 </element>
 <element name="getSalesLeadResponse">
 <complexType>
 <sequence>
 <element name="result" type="ns1:MlkLead"/>
 </sequence>
 </complexType>
 </element>
 ...
 <element name="getSalesLeadAsync">
 <complexType>
 <sequence>
 <element name="LeadId" type="long"/>
 </sequence>
 </complexType>
 </element>
 <element name="getSalesLeadAsyncResponse">
 <complexType>
 <sequence>
 <element name="result" type="ns1:MklLead"/>
 </sequence>
 </complexType>
 </element>
 ...
</schema>
```

For more information about XML Schema specification, refer to *http://www.w3.org/XML/Schema.html*.

Related Topics

Service Data Object XSDs

Each service data object has one XSD that describes the object and its attributes. For example, the Sales Lead object is defined in `MklLead.xsd`, the Sales Lead products are defined in `MklProdAssoc.xsd`, and the Sales Lead contacts are defined in `MklLeadTcMembers.xsd`. A service data object is uniquely defined by a QName, which is the qualified name of the corresponding XSD.

An XSD schema corresponding to a service data object has the following basic structure:

- Namespace declarations
- Imports and includes the specifications of XSDs on which this schema definition has dependencies
- Schema documentation, which includes display name and description, as well as the name and description of the service data object attributes.
- Definition of the derived types. For example, when you enable service warnings in the service implementation, you need to define a wrapper type.
- Definition of the service data object, which is a complex type. The service data object attributes are defined as elements in the complex type.
- Definition of the element, with the type set to complex

The following is an excerpt from `MklLead.xsd`, which corresponds to the Sales Lead object:

```
<?xml version="1.0" encoding="UTF-8" ?>
<xsd:schema elementFormDefault="qualified"
targetNamespace="http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/leadService/"
 sdoJava:package="oracle.apps.marketing.leadMgmt.leads.leadService"
xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/"
xmlns:ns2="http://xmlns.oracle.com/apps/crmCommon/notes/noteService"
 xmlns:sdo="commonj.sdo" xmlns:sdoJava="commonj.sdo/java"
xmlns="http://xmlns.oracle.com/apps/sales/marketing/leadMgmt/leads/leadService/"
 xmlns:xsd="http://www.w3.org/2001/XMLSchema"
 <xsd:annotation>
 <xsd:documentation xmlns:oer="http://xmlns.oracle.com/oer">
 <name>SalesLead</name>
 <description>A lead is a transaction record created when
 a party has expressed an interest in a product or service.
 It represents a selling opportunity.
 </description>
 <oer:attributes>
 <oer:attribute description="Lead Name used for identifying the lead." name="Name"/>
 <oer:attribute description="User friendly unique identifier for a lead."
 name="LeadNumber""/>
 <oer:attribute description="Name associated with the owner of this sales lead."
 name="OwnerPartyName"/>
 <oer:attribute description="Pre-defined code used to indicate the status of a lead."
 name="StatusCode"/>
 <oer:attribute description="Rank associated with this sales lead."
 name="Rank"/>
 ...
 </oer:attributes>
 </xsd:documentation>
 </xsd:annotation>
 <xsd:import namespace="http://xmlns.oracle.com/adf/svc/types/"
 schemaLocation="https://crm-your-cloud-hostname:port/mklLeads/
 SalesLeadService?XSD=/META-INF/wsdl/BC4JService.xsd"/>
 <xsd:import namespace="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/"
 schemaLocation="https://crm-your-cloud-hostname:port/mklLeads/
```

```
SalesLeadService?XSD=/oracle/apps/marketing/leadMgmt/leads/leadService/MklLeadResources.xsd"/>
<xsd:import namespace="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/"
schemaLocation="https://crm-your-cloud-hostname:port/mklLeads/
SalesLeadService?XSD=/oracle/apps/marketing/leadMgmt/leads/leadService/MklLeadTcMembers.xsd"/>
<xsd:import namespace="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/"
schemaLocation="https://crm-your-cloud-hostname:port/mklLeads/
SalesLeadService?XSD=/oracle/apps/marketing/leadMgmt/leads/leadService/MklProdAssoc.xsd"/>
<xsd:import namespace="http://xmlns.oracle.com/apps/crmCommon/notes/noteService"
schemaLocation="https://crm-your-cloud-hostname:port/mklLeads/
SalesLeadService?XSD=/oracle/apps/crmCommon/notes/noteService/Note.xsd"/>
<xsd:import namespace="commonj.sdo/java"
schemaLocation="https://crm-your-cloud-hostname:port/mklLeads/
SalesLeadService?XSD=/xml/sdoJava.xsd"/>
<xsd:import namespace="commonj.sdo/xml"
schemaLocation="https://crm-your-cloud-hostname:port/mklLeads/
SalesLeadService?XSD=/xml/sdoXML.xsd"/>
<xsd:complexType name="MklLead">
<xsd:annotation>
<xsd:appinfo source="http://xmlns.oracle.com/adf/svc/metadata/">
<key xmlns="http://xmlns.oracle.com/adf/svc/metadata/">
<attribute>LeadId</attribute>
</key>
</xsd:appinfo>
</xsd:annotation>
<xsd:sequence>
<xsd:element minOccurs="0" name="Name" nillable="true" type="xsd:string"/>
<xsd:element minOccurs="0" name="LeadNumber" type="xsd:string"/>
<xsd:element minOccurs="0" name="OwnerPartyName" type="xsd:string"/>
<xsd:element minOccurs="0" name="StatusCode" nillable="true" type="xsd:string"/>
<xsd:element minOccurs="0" name="Rank" nillable="true" type="xsd:string"/>
<xsd:element minOccurs="0" name="SourceCode" nillable="true" type="xsd:string"/>
...
</xsd:sequence>
</xsd:complexType>
<xsd:element name="mklLead" type="MlkLead"/>
</xsd:schema>
```

Related Topics

Business Object Service Data Types

A service operation payload element and service data object attribute can be one of the following data types:

- Built-in data types
- Complex data types defined by Application Development Framework (ADF)
- Complex data types defined by Oracle Applications Cloud, which are effectively the service data objects

Built-in Data Types

The built-in data types are defined in the *XML Schema* namespace. For more information, refer to *World Wide Web Consortium (W3C)*.

The built-in data types of service operation payload elements and service data object attributes as they are represented in the service XSD and service data object XSDs are:

- anyType: Service operation payload elements and service data object attributes are strongly typed. There are a few exceptions. anyType is used as the service operation parameter type for custom business object services

such as the Marketing Custom Business Object service, which processes custom business objects defined in Application Composer.

- boolean
- byte
- decimal
- double
- float
- int
- integer
- long
- short
- string

The hexBinary, dateTime, time, and date built-in data types are not used in the business object interface. Instead, complex data types defined by ADF are used.

Complex Data Types Defined by Application Development Framework

The complex data types defined by ADF are used as data types for service operation payload elements and service data object attributes. The exceptions are AmountType and MeasureType data types, which are used only for service data object attributes.

These complex data types are defined in two XML schema files:

- BC4JService.xsd: For BC4JService.xsd schema, see *Sample BC4JService.xsd*
- BC4JServiceCS.xsd

To view these schema files on a cloud instance, follow the instructions in *Business Object Service Operations* and replace the tokens in the following URLs:

- For all complex type definitions, except ProcessData, reference: `https://(FADomain,FSCMServices)/fscmService/ServiceCatalogService?XSD=/META-INF/wsdl/BC4JService.xsd`
- For ProcessData type definition only, reference: `https://(FADomain,FSCMServices)/fscmService/ServiceCatalogService?XSD=/META-INF/wsdl/BC4JServiceCS.xsd`

This table lists some commonly used complex data types defined by ADF. This is not an exhaustive list.

Complex Data Type QName	Description
`{http://xmlns.oracle.com/adf/svc/types/}AmountType`	Data type for service data object attributes that specify an amount or price in a particular currency. Attributes of this type capture both the currency and the amount in that currency. Names for this type typically end with **Amount** or **Price**.
`{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler`	Data type for Binary Large OBjects (BLOBs) and Character Large OBjects (CLOBs).
`{http://xmlns.oracle.com/adf/svc/types/}date-Date`	Data type for dates.

Complex Data Type QName	Description
`{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp`	Data type for timestamps.
`{http://xmlns.oracle.com/adf/svc/types/}FindControl`	Data type for a parameter of the *find* operation. This is not being used in the current release and is intended for future use.
`{http://xmlns.oracle.com/adf/svc/types/}FindCriteria`	Data type for a parameter of the *find* operation. This parameter controls the fetch start, fetch size, search criteria, sort order, and attribute inclusion or exclusion.
`{http://xmlns.oracle.com/adf/svc/types/}MeasureType`	Data type for service data object attributes that contain a quantity in a specified unit of measure. Attributes of this type capture both the quantity and the unit of measure. Names for this type typically end with **Measure** or **Quantity**.
`{http://xmlns.oracle.com/adf/svc/types/}MethodResult`	Data type to store service warning messages. If you enable service warnings in an underlying service data object implementation, this is the return object type of the *delete* operation.
`{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints`	Data type for the return value of the *getDfltObjAttrHints* operation. The return value contains a name-value pair: • Name, plural name, and description of the service data object • UI hints for the service data object attributes
`{http://xmlns.oracle.com/adf/svc/types/}ProcessControl`	Data type for a parameter of the *process* and processCS operation. This parameter controls the level of detail for the return data in the response payload and whether to allow partial failure.
`{http://xmlns.oracle.com/adf/svc/types/}ProcessData`	Data type for a parameter of the processCS operation.
`{http://xmlns.oracle.com/adf/svc/types/}StringResult`	Data type for the return parameter of custom service operations that return multiple string values and warning messages. This type is used only if you enable service warnings.

Complex Data Types Defined by Oracle Applications

The complex data types defined by Oracle Applications Cloud are:

- Service data objects: Defined as an element that is a complex type composed of a sequence of elements. The service data object attributes are defined as the elements in the complex type. Sales lead, sales lead contacts, and sales lead products are examples of service data objects defined on the sales lead service. For more information, see *Service Data Object XSDs*.
- Complex types related to the service data objects that extend the `{http://xmlns.oracle.com/adf/svc/types/}MethodResult` type: Defined for service data objects which are designed with service warnings enabled, and can contain both service data object and warning messages. For more information, see the *example in create Operation*.

Related Topics

Business Object Service Operations

A service may be exposed to standard operations and also to custom operations that have signatures and behaviors unique to that service.

Message Pattern

All operations exposed on a business object service have both synchronous and asynchronous versions defined. For conciseness, the service documentation includes the definition for the synchronous message pattern. Both synchronous and asynchronous operations have the same functional behavior and request and response payloads.

Naming convention for asynchronous operations are:

- Operation name: Synchronous operation name appended with **Async**
- Callback name: Synchronous operation name appended with **AsyncResponse**

Using the *Sales Lead service* as an example, if the name of the synchronous operation is `createSalesLead`, the asynchronous operation name and callback name would be `createSalesLeadAsync` and `createSalesLeadAsyncResponse`.

Related Topics

Standard CRUD Operations

This table lists the standard create, read, update, and delete (CRUD) operations for a business object service.

Operation	Method Name	Description
create Operation	`create`***ServiceDataObjectName***	Creates a service data object and its descendants.
delete Operation	`delete`***ServiceDataObjectName***	Deletes a business object.
get Operation	`get`***ServiceDataObjectName***	Retrieves a single business object by the primary key.
find Operation	`find`***ServiceDataObjectName***	Finds and returns a list of business objects that meet the specified search criteria.
find by additional predefined search criteria Operation	`find`***ServiceDataObjectNameSearchStandardName***	Finds and returns a list of business objects that meet the specified search criteria and the additional predefined search criteria.
update Operation	`update`***ServiceDataObjectName***	Updates a business object.
merge Operation	`merge`***ServiceDataObjectName***	Updates a business object, if it exists. Otherwise creates a new business object.
process Operation	`process`***ServiceDataObjectName***	Performs create, update, delete, or merge operation on a list of business objects. The specified operation is applied to all the objects in a given list.

Operation	Method Name	Description
process change summary Operation	`processCS`*`ServiceDataObjectName`*	Performs create, update, or delete operations on a list of business objects. Allows you to specify different operations for different objects.

Related Topics

create Operation

The `create` operation validates and then creates the business object that a request payload passes. The business object includes the top-level object entity as well as the descendant object entities.

Operation Signature

Using the *Sales Lead service* as an example, the following is the signature of the `create` operation that accepts a business object to be defined. Here, `createSalesLead` is the request payload, and the business object it defines is a Sales Lead object of `MklLead` type.

```
<element name="createSalesLead">
 <complexType>
 <sequence>
 <element name="salesLead" type="ns1:MklLead"/>
 </sequence>
 </complexType>
</element>
```

The `create` operation returns the newly defined business object in the response payload.

```
<element name="createSalesLeadResponse">
 <complexType>
 <sequence>
 <element name="result" type="ns1:MklLead"/>/>
 </sequence>
 </complexType>
</element>
```

Example

This example creates a Sales Lead object for **Issaquah Imaging Innovations - Tablets** with a deal amount estimated at **$100,000 USD**.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:createSalesLead
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/">
 <ns1:salesLead
xmlns:ns2="http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/leadService/">
 <ns2:Name>Issaquah Imaging Innovations - Tablets</ns2:Name>
 <ns2:DealAmount currencyCode="USD">100000</ns2:DealAmount>
 </ns1:salesLead>
 </ns1:createSalesLead>
 </soap:Body>
</soap:Envelope>
```

The response payload returns the newly created Sales Lead object after the operation completes successfully.

```
<ns0:createSalesLeadResponse xmlns="" xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ns0="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:wsa="http://www.w3.org/2005/08/addressing" xmlns:wsu="http://docs.oasis-open.org/
wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">
 <ns2:result xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
```

```
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/"
xmlns:ns2="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:ns3="http://xmlns.oracle.com/apps/crmCommon/notes/noteService"
xmlns:ns4="http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/leadService/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns4:MklLead">
 <ns4:Name>Issaquah Imaging Innovations - Tablets</ns4:Name>
 <ns4:LeadNumber>CDRM_80328</ns4:LeadNumber>
 <ns4:OwnerPartyName>Gabrielle Lee</ns4:OwnerPartyName>
 <ns4:StatusCode>UNQUALIFIED</ns4:StatusCode>
 <ns4:Rank xsi:nil="true"/>
 <ns4:LeadId>300100041938883</ns4:LeadId>
 ...
 <ns4:DealAmount currencyCode="USD"
xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/">100000</ns4:DealAmount>
 ...
 </ns2:result>
</ns0:createSalesLeadResponse>
```

Related Operations

To create a child object on an existing business object, you cannot use the `create` operation. Instead, use the `merge` operation.

To create multiple business objects with a single request, use the `process` operation. This operation allows you to control whether the response returns no value, only the primary keys, or the entire object. You can also use the `process` operation to create large business objects for which response payload values are not required.

Related Topics

delete Operation

The `delete` operation deletes the existing rows of the top-level service data object that a request payload passes. Depending on the requirements of the business object, you may delete the child and descendant entities.

This operation allows:

- Hard delete, for example, delete a row from the database
- Soft delete, for example, update the row status to indicate that it is deleted

A service may expose additional `delete` operations on child or descendant objects, which don't depend on the top-level entity, if it is a functional requirement. For example, the *Sales Lead service* exposes a `deleteSalesLead` operation as well as a `deleteSalesLeadProduct`, `deleteSalesLeadResource`, and other delete operations on the child objects.

Operation Signature

For the Sales Lead service, the following is the signature of the `deleteSalesLead` operation that accepts the Sales Lead business object to be deleted. This operation accepts a `MklLead` object as the input parameter. The primary key or the alternate key attributes are required. You need not populate all the other attributes of the object.

```
<element name="deleteSalesLead">
 <complexType>
 <sequence>
 <element name="saleLead" type="ns1:MklLead"/>
 </sequence>
 </complexType>
</element>
```

The `deleteSalesLead` operation returns an empty response payload.

```
<element name="deleteSalesLeadResponse">
 <complexType>
```

```
 <sequence/>
 </complexType>
</element>
```

Example

This example deletes the Sales Lead service object with **300100041938883** as the internal identifier.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:deleteSalesLead
 xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leads/leadService/types/">
 <ns1:salesLead
xmlns:ns2="http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/leadService/">
 <ns2:LeadId>300100054316102</ns2:LeadId>
 </ns1:salesLead>
 </ns1:deleteSalesLead>
 </soap:Body>
</soap:Envelope>
```

The `deleteSalesLead` operation performs a hard delete of the Sales Lead object and all the descendant objects, and returns an empty response payload.

```
<ns0:deleteSalesLeadResponse xmlns="" xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ns0="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:wsa="http://www.w3.org/2005/08/addressing" xmlns:wsu="http://docs.oasis-open.org/
wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd"/>
```

Related Operations

To delete a list of business objects passed in the request payload, you can use the `process` operation.

Related Topics

get Operation

The `get` operation accepts the primary key of a business object in the request payload and returns the entire corresponding business object in the response payload. If the business object is a composite business object, then the operation returns all the attributes of the service data objects and its child and descendant objects.

If the internal ID of the business object is not known, use the `find` operation to query based on alternate key or other search criteria.

Operation Signature

The following is the definition of the `get` operation for the Sales Lead service. The operation accepts the Sales Lead internal identifier, which is of `long` type.

```
<element name="getSalesLead">
 <complexType>
 <sequence>
 <element name="leadId" type="long"/>
 </sequence>
 </complexType>
</element>
```

The operation returns information for the corresponding Sales Lead business object, which is of `MklLead` type.

```
<element name="getSalesLeadResponse">
 <complexType>
 <sequence>
 <element name="result" type="ns1:MklLead"/>
 </sequence>
 </complexType>
```

```
</element>
```

Example

This example retrieves the Sales Lead object with **300100041938883** as the internal identifier.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:getSalesLead
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/">
 <ns1:leadId>300100041938883</ns1:leadId>
 </ns1:getSalesLead>
 </soap:Body>
</soap:Envelope>
```

The response payload includes all the attributes of the Sales Lead business object.

```
<ns0:getSalesLeadResponse xmlns="" xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ns0="http://xmlns.oracle.com/apps/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:wsa="http://www.w3.org/2005/08/addressing"
xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">
 <ns2:result xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/"
xmlns:ns2="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:ns3="http://xmlns.oracle.com/apps/crmCommon/notes/noteService"
xmlns:ns4="http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/leadService/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns4:MklLead">
 <ns4:Name>Issaquah Imaging Innovations - Tablets</ns4:Name>
 <ns4:LeadNumber>CDRM_80328</ns4:LeadNumber>
 <ns4:OwnerPartyName>Gabrielle Lee</ns4:OwnerPartyName>
 <ns4:StatusCode>UNQUALIFIED</ns4:StatusCode>
 <ns4:Rank xsi:nil="true"/>
 ...
 <ns4:leadId>300100041938883</ns1:leadId>
 <ns4:DealAmount currencyCode="USD"
xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/">100000</ns4:DealAmount>
 ...
 <ns4:MklLeadResources>
 <ns1:LeadResourceId>300100041938884</ns1:LeadResourceId>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:CreationDate>2015-04-01T05:02:38.426-07:00</ns1:CreationDate>
 <ns1:LastUpdateDate>2015-04-01T05:02:39.87-07:00</ns1:LastUpdateDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:PrimaryFlag>true</ns1:PrimaryFlag>
 <ns1:FunctionalRole xsi:nil="true"/>
 <ns1:ResourceId>100010025532672</ns1:ResourceId>
 <ns1:LeadId>300100041938883</ns1:LeadId>
 <ns1:OrgTreeCode/>
 <ns1:OrgTreeStructureCode/>
 <ns1:OrgTreeVersionId/>
 <ns1:ResourceOrgId/>
 <ns1:EmailAddress>sendmail-test-discard@oracle.com</ns1:EmailAddress>
 <ns1:PartyName>Gabrielle Lee</ns1:PartyName>
 <ns1:PrimaryPhonePurpose>BUSINESS</ns1:PrimaryPhonePurpose>
 <ns1:RoleName/>
 <ns1:ManagerName/>
 <ns1:FormattedPhoneNumber>+1 (650) 506-6601</ns1:FormattedPhoneNumber>
 <ns1:Name/>
 <ns1:ManagerPartyId xsi:nil="true"/>
 <ns1:StartDateActive>2009-05-20</ns1:StartDateActive>
 <ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
 </ns4:MklLeadResources>
 </ns2:result>
</ns0:getSalesLeadResponse><ns0:getLocationResponse xmlns=""
```

Related Operations

To retrieve only a subset of attributes of a large business object or a service data object with descendants more than the default fetch size of 500, use the `find` operation. This operation allows you to specify fetch start, fetch size, complex search criteria, business object attributes to include or exclude, and sort order.

Related Topics

find Operation

The `find` operation retrieves the service data objects that meet the specified search criteria in the request payload. Use this operation to retrieve a subset of attributes for business objects that consist of entities with many attributes or many service data objects.

You can control the following for the top-level entity and the descendant service data objects:

- Fetch start and size
- Filter criteria
- Sort order
- List of attributes to include or exclude

Operation Signature

The request payload for the `find` operation accepts two parameters that control the behavior of the operation. For the definition of the `FindCriteria` and `FindControl` types, see *Sample BC4JService.xsd*.

```
<element name="findSalesLead">
 <complexType>
 <sequence>
 <element name="findCriteria" type="ns0:FindCriteria"/>
 <element name="findControl" type="ns0:FindControl"/>
 </sequence>
 </complexType>
</element>
```

Request Payload Parameters

The parameters of the `find` request payload give extensive control over the search criteria. This figure shows the parameters of the `find` operation.

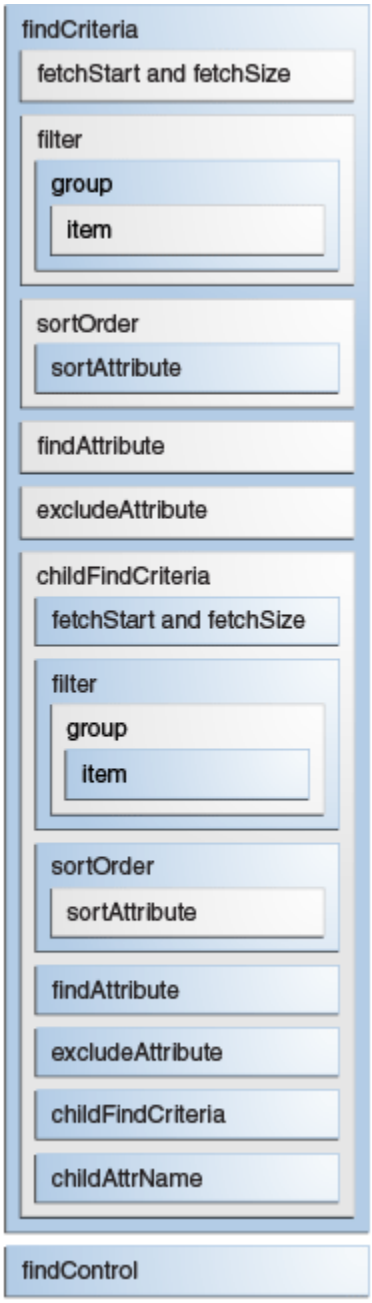

This table lists the elements of the request payload and provides a brief description for each element.

Parameter	Description
`attribute`	Holds the case sensitive name of the object attribute to filter. All the attributes can be queried.
`childFindCriteria`	Specifies the fetch start, fetch size, filter, sort, and selection criteria for a child service data object that is specified in `childAttrName`. The `childFindCriteria` can be nested within another `childFindCriteria` in order to apply a fetch start, fetch size, and filter, sort and selection criteria to the child and descendants of the top-level object.

Parameter	Description
`conjunction`	Defines how the search conditions are evaluated in relation to each other. Valid values are `And`, `Or`, `Not`, `AndNot`, and `orNot`. These values are case sensitive.
`excludeAttribute`	Indicates whether the attributes specified by `findAttribute` elements are not included in the response payload. The default option is `false`. To reduce the size of the find operation response payload, use `excludeAttribute` in combination with `findAttribute` to return only the required elements.
`fetchStart`	Indicates which objects to fetch and which index to fetch from. This is a zero-based index, and the default value is 0. If the value is set to 0, the result set begins with the first row of the data set. If the value is set to 99, the result set begins with the 100th row of the data set.
`fetchSize`	Specifies the maximum number of top-level objects to retrieve. A `fetchSize` of -1, which is the default value, retrieves all rows up to the maximum `fetchSize` that meet the search criteria starting from `fetchStart`. Valid maximum value for `fetchSize` is 500 rows unless overridden in the service implementation. If `fetchSize` value is greater than the number of remaining rows, only the remaining rows are returned.
`filter`	Contains the search criteria, which includes the conjunction, group and nested elements. If a filter is not specified, all the rows are retrieved. **Note:** Don't use a formular type field in the filter criteria.
`findAttribute`	Specifies the subset of attributes to be retrieved for which the `filter` criteria are satisfied. If the subset is not specified, all the attributes are fetched. If you want to include the child object in the result set, you must include it in the subset.
`findControl`	Not used in the current release.
`findCriteria`	Contains fetch size, search criteria, sort criteria, and content inclusion or exclusion information for all the service data object levels.
`group`	Contains a set of runtime search conditions for one or more attributes. The group element includes the conjunction, `upperCaseCompare`, and item elements.
`item`	Contains one run time search condition for an attribute. The item element includes the conjunction, `upperCaseCompare`, attribute, operator, value, and nested elements.
`nested`	Defines search criteria for child and descendant entities to determine whether the top-level entity must be included in the result. For example, return a parent object if it contains child entities that meet the criteria.
`operator`	Holds the case-sensitive operation to apply to attributes and values. See *list of operators*.
`sortOrder`	Specifies the sorting order of the result set by setting zero or more `sortAttribute` child elements. If more than one `sortAttribute` elements are specified, the sort is based on the order of these elements.
`sortAttribute`	Contains an attribute name and a boolean value to indicate whether the attribute value must be sorted in a descending order. The default sort order is ascending.
`upperCaseCompare`	Indicates whether this is a case insensitive search. The default option is false.
`value`	Holds the attribute filter criteria that can include:

Parameter	Description
	• An asterisk (*) to match zero or more characters • A question mark (?) to match a a single character To minimize performance impact, ensure that the values don't start with a wildcard; for example, use **Foo*** instead of ***Foo**.

Note: The default maximum value for fetch size is 500, unless specified otherwise in the documentation for a specific web service. A single query returns a maximum of 500 rows (objects) regardless of whether the `fetchSize` parameter in the find operation is set to -1 or a value greater than 500. If you need to fetch more than 500 objects, call the `find` operation multiple times with different `fetchStart` values, for example, 0, 500, 1000. This retrieves the results in batches of 500 objects, assuming that the fetch size is 500.You must specify the `childFindCriteria` parameter to control the fetch size of a child attribute rowset.

This table lists the operators that can be specified for the `operator` parameter. Some of these operators may be disabled for specific service data object attributes. For such attributes, you can't use the disabled operators with the `findCriteria` parameter.

Operator	Use for String	Yes	Use for Dates
=	Yes	Yes	Yes
&amp	Yes		
>	Yes		
>=	Yes	Yes	
<	Yes	Yes	
<=	Yes	Yes	
<>	Yes	Yes	Yes
AFTER			Yes
BEFORE			Yes
BETWEEN	Yes	Yes	Yes
CONTAINS	Yes		
DOESNOTCONTAIN	Yes		
ENDSWITH	Yes		
ISBLANK	Yes	Yes	Yes
ISNOTBLANK	Yes	Yes	Yes
NOTBETWEEN	Yes	Yes	Yes
ONORAFTER			Yes
ONORBEFORE			Yes
STARTSWITH	Yes		

Example

This example shows a response payload declaration for the `find` operation.

```
<element name="findSalesLeadResponse">
 <complexType>
 <sequence>
 <element maxOccurs="unbounded" minOccurs="0" name="result" type="ns1:MklLead"/>
 </sequence>
 </complexType>
</element>
```

This example finds the Sales Lead object with `LeadId` equal to **300100041938883** and returns only a subset of attributes of the object.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:findSalesLead
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/">
 <ns1:findCriteria xmlns:ns2="http://xmlns.oracle.com/adf/svc/types/">
 <ns2:filter>
 <ns2:group>
 <ns2:item>
 <ns2:attribute>LeadId</ns2:attribute>
 <ns2:operator>=</ns2:operator>
 <ns2:value>300100041938883</ns2:value>
 </ns2:item>
 </ns2:group>
 </ns2:filter>
 <ns2:findAttribute>Name</ns2:findAttribute>
 <ns2:findAttribute>LeadId</ns2:findAttribute>
 <ns2:findAttribute>DealAmount</ns2:findAttribute>
 </ns1:findCriteria>
 </ns1:findLocation>
 </soap:Body>
</soap:Envelope>
```

The response payload returns only the `Name`, `LeadId`, and `DealAmount` attributes of the Sales Lead object.

```
<ns0:findSalesLeadResponse xmlns=""
xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ns0="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:wsa="http://www.w3.org/2005/08/addressing"
xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">
 <ns2:result xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/"
xmlns:ns2="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:ns3="http://xmlns.oracle.com/apps/crmCommon/notes/noteService"
xmlns:ns4="http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/leadService/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns4:MklLead">
 <ns4:Name>Issaquah Imaging Innovations - Tablets</ns4:Name>
 <ns4:LeadId>300100041938883</ns4:LeadId>
 <ns1:Value>
 <ns4:DealAmount currencyCode="USD"
xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/">100000</ns4:DealAmount>
 </ns2:result>>
</ns0:findSalesLeadResponse><ns0:findLocationResponse xmlns=""
```

Related Operations

To retrieve all the attributes of a service data object, use the `get` operation. This operation is useful when you don't have complex query requirements.

Related Topics

find by additional predefined search criteria Operation

The `find by additional predefined search criteria` operations are similar to the `find` operation, but they also have additional predefined criteria applied to the find criteria specified by the caller.

The `find by view criteria` operations are typically exposed on the service interface for frequently performed searches. Instead of constructing complex payloads for the `find` operation, you can call these operations. The predefined criteria may refer to multiple bind variables or no bind variables. If the criteria reference a bind variable, the bind variable is exposed as a parameter in the request payload, and you can pass an appropriate value to this parameter.

For information about the predefined criteria and the bind variables exposed as parameters, see operation and parameter descriptions in Business Object Services chapter in this guide.

Examples of the `find by view` criteria operations include:

- `getLocationByOriginalSystemReference` operation defined on `LocationService`, searches for locations based on the source system where the location definition originated.
- `findExportBatchesByJobId` operation, defined on `BulkExportService`, finds batch information corresponding to a job ID.

Operation Signature

The signature for the find by additional predefined search criteria operation is similar to the `find` operation and includes additional parameters that correspond to bind variables in the view criteria.

Example

This example defines the `getLocationByOriginalSystemReference` operation on the `LocationService` object. Although the name of the operation starts with `get`, it is a `find` operation with additional predefined search criteria based on the implementation. In addition to the `findCriteria` and `findControl` parameters, the operation takes `bindOrigSystem` and `bindOrigSystemReference` parameters, which correspond to unique original system code and system reference identifiers.

```
<element name="getLocationByOriginalSystemReference">
 <complexType>
 <sequence>
 <element name="findCriteria" type="ns0:FindCriteria"/>
 <element name="bindOrigSystem" type="string"/>
 <element name="bindOrigSystemReference" type="string"/>
 <element name="findControl" type="ns0:FindControl"/>
 </sequence>
 </complexType>
</element>
```

Related Topics

update Operation

The `update` operation updates the existing rows in the top-level service data object as well as the child and descendant entities. The operation throws an exception if the rows do not exist.

If you are updating a subset of the service data object attributes, the request payload must contain:

- Primary key or alternate key: If the primary key is not known, use the `find` operation to retrieve the primary key of the relevant row.

- Values to update: In the request payload, you don't need to pass all the attribute values of the service data object.

Operation Signature

For the Sales Lead service, the following is the `updateSalesLead` operation that accepts the object to be updated.

```
<element name="updateSalesLead">
 <complexType>
 <sequence>
 <element name="salesLead" type="ns1:MklLead"/>
 </sequence>
 </complexType>
</element>
```

The response payload returns the updated object after the operation completes successfully.

```
<element name="updateSalesLeadResponse">
 <complexType>
 <sequence>
 <element name="location" type="ns1:MklLead"/>
 </sequence>
 </complexType>
</element>
```

Example

This example sets the status of the Sales Lead business object with **300100041938883** internal identifier, to **QUALIFIED**.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:updateSalesLead
 xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/">
 <ns1:salesLead
xmlns:ns2="http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/leadService/">
 <ns2:StatusCode>QUALIFIED</ns2:StatusCode>
 <ns2:LeadId>300100041938883</ns2:LeadId>
 </ns1:salesLead>
 </ns1:updateSalesLead>
 </soap:Body>
</soap:Envelope>
```

The response payload reflects the updated attribute in the Sales Lead business object.

Related Operations

To update large business objects or to update objects for which the response payload is not required, use the `process` operation. This operation allows you to specify if the response payload is empty, contains only the primary key, or contains the entire payload.

Use the `merge` operation to:

- Update existing objects
- Create new objects
- Create new child or descendant objects on an existing object

To delete a row at the appropriate service data object level, use the `delete` operation.

Related Topics

merge Operation

The `merge` operation performs an upsert, which means that the operation updates a service data object if it exists, or creates a new service data object if it doesn't exist.

The upsert behavior of the operation applies to all levels of the service data object. For example, to add a new child entity to an existing top-level entity, you must use the `merge` operation. You can't use the `create` and `update` operations defined at the top-level entity because the `create` operation creates only an entire new object, and the `update` operation updates only existing rows in an object.

Operation Signature

For the Sales Lead service, the following is the `mergeSalesLead` operation that accepts the object to be created or updated.

```
<element name="mergeSalesLead">
 <complexType>
 <sequence>
 <element name="salesLead" type="ns1:MklLead"/>
 </sequence>
 </complexType>
</element>
```

The response payload returns the newly created or updated object after the operation completes successfully.

```
<element name="mergeSalesLeadResponse">
 <complexType>
 <sequence>
 <element name="result" type="ns1:MklLead"/>
 </sequence>
 </complexType>
</element>
```

Example

This example request payload updates the status of the Sales Lead business object by changing the `StatusCode` attribute to **QUALIFIED**. The internal identifier of the object is **300100041938883**.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:mergeSalesLead
 xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/">
 <ns1:salesLead
xmlns:ns2="http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/leadService/">
 <ns2:StatusCode>QUALIFIED</ns2:StatusCode>
 <ns2:LeadId>300100041938883</ns2:LeadId>
 </ns1:salesLead>
 </ns1:mergeSalesLead>
 </soap:Body>
</soap:Envelope>
```

The response payload contains information about the updated Sales Lead object.

Related Operations

To merge large business objects or to merge objects for which the response payload is not required, use the `process` operation. This operation performs the merge and controls whether the response payload is empty, contains only the primary key, or contains the entire payload.

Depending on the scenario, use `create` and `delete` operations instead of the `merge` operation.

Related Topics

process Operation

The `process` operation performs create, update, delete, or merge operation on a list of business objects of the same type specified in a request payload.

This operation is typically used for bulk processing and can perform the same operation on all the business objects. It can't perform a create operation for one object and delete operation on another object in the same call. The `processControl` parameter controls the following behavior of the operation:

- Level of detail in the response payload: Controls whether the response payload returns an empty payload, a payload of primary keys, or a payload with the complete definitions of the service data object. Use the first two options to improve performance. The first option eliminates the fetch, and both options reduce the size of the response payload.
- Level of detail in the error message: Controls whether the error message contains no information, only the primary key, or all the attributes of the service data object that failed. The first option doesn't provide any information about the object.
- Partial failure control: Controls how the changes to the list of service data objects are committed. Suppose the partial failure feature is enabled for a service and a request utilizes this feature. If an error occurs for a specific object, the operation skips this object and continues processing the other objects. After the processing is complete, objects with successful changes are committed and objects with errors are not. If a processing error affects all the objects, then none of the objects are committed.

  > **Note:** If you define any transaction-level validations during the design phase, then at run time these validations override any partial failure control feature defined at the entity-level. This means that if the transaction-level validation fails at runtime, even if the partial failure control is enabled, none of the service data objects in the transaction are committed.

Operation Signature

For the Sales Lead Service, the signature of the `processSalesLead` operation consists of:

- Name of the operation to be performed on the business objects in the request payload. The `changeOperation` parameter holds this name, and valid values are `Create`, `Update`, `Merge`, and `Delete`. This value is case sensitive.
- List of business objects on which to perform the operation specified in the `changeOperation` parameter.
- Parameters to control the details of response payload and error messages. Set the `returnMode` and `exceptionReturnMode` elements to `Full` to return the entire object, `Key` to return only the primary key, or `None` to return no information.
- Parameter for partial failure mode. Set this parameter to `true` to enable partial failure mode. The default value is `false`.

The request payload has the following signature. For the definition of `ProcessControl` type, see *Sample BC4JService.xsd*.

```
<element name="processSalesLead">
 <complexType>
 <sequence>
 <element name="changeOperation" type="string"/>
 <element maxOccurs="unbounded" minOccurs="0" name="salesLead" type="ns1:MklLead"/>
 <element name="processControl" type="ns2:ProcessControl"/>
 </sequence>
 </complexType>
</element>
```

The response payload returns values based on the `ProcessControl` settings after the operation completes successfully.

```
<element name="processSalesLeadResponse">
 <complexType>
 <sequence>
 <element maxOccurs="unbounded" minOccurs="0" name="result" type="ns1:MklLead"/>
 </sequence>
 </complexType>
</element>
```

Example

This example creates two new Sales Lead objects for **Sammamish Technologies** and **Snoqualmie Software** with deal amounts set to **$1,500,000 USD** and **$450,000 USD** respectively.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:processSalesLead
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/">
 <ns1:changeOperation>Create</ns1:changeOperation>
 <ns1:salesLead
xmlns:ns2="http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/leadService/">
 <ns2:Name>Sammamish Technoloiges</ns2:Name>
 <ns2:DealAmount currencyCode="USD">1500000</ns2:DealAmount>
 </ns1:salesLead>
 <ns1:salesLead
 <ns2:Name>Snoqualmie Software</ns2:Name>
 <ns2:DealAmount currencyCode="USD">450000</ns2:DealAmount>
 </ns1:salesLead>
 <ns1:processControl xmlns:ns2="http://xmlns.oracle.com/adf/svc/types/">
 <ns2:returnMode>Key</ns2:returnMode>
 <ns2:exceptionReturnMode>Key</ns2:exceptionReturnMode>
 <ns2:partialFailureAllowed>false</ns2:partialFailureAllowed>
 </ns1:processControl>
 </ns1:processSalesLead>
 </soap:Body>
</soap:Envelope>
```

The response payload contains only the primary keys of the newly created Sales Lead objects.

```
<ns0:processSalesLeadResponse xmlns="" xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ns0="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:wsa="http://www.w3.org/2005/08/addressing"
xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">
 <ns2:result xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/"
xmlns:ns2="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:ns3="http://xmlns.oracle.com/apps/crmCommon/notes/noteService"
xmlns:ns4="http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/leadService/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns4:MklLead">
 <ns4:LeadId>300100055477603</ns4:LeadId>
 </ns2:result>
 <ns2:result xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/"
xmlns:ns2="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:ns3="http://xmlns.oracle.com/apps/crmCommon/notes/noteService"
xmlns:ns4="http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/leadService/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns4:MklLead">
 <ns4:LeadId>300100055477605</ns4:LeadId>
 </ns2:result>
</ns0:processSalesLeadResponse>
```

This example shows a response payload when the `ReturnMode` of the `ProcessSalesLead` parameter is set to `None`.

```
<ns0:processSalesLeadResponse xmlns="" xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
```

```
xmlns:ns0="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:wsa="http://www.w3.org/2005/08/addressing"
xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">
 <ns2:result xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/"
xmlns:ns2="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:ns3="http://xmlns.oracle.com/apps/crmCommon/notes/noteService"
xmlns:ns4="http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/leadService/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns4:MklLead"/>
 <ns2:result xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/"
xmlns:ns2="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:ns3="http://xmlns.oracle.com/apps/crmCommon/notes/noteService"
xmlns:ns4="http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/leadService/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns4:MklLead"/>
</ns0:processSalesLeadResponse>
```

Related Operations

To perform different operations on different objects in a request payload, use the `processCs` operation.

To control the values in the payload for performance optimizations, use the `process` operation instead of `create`, `update`, `merge`, and `delete` operations on individual business objects.

Related Topics

Standard Metadata Operations

A business object service may be exposed to standard metadata operations.

This table lists basic information about the standard metadata operations.

Operation	Description
getServiceLastUpdateTime	Returns the date and time when the service was last updated.
getEntityList	Returns the list of service data objects defined on the service interface.
getDfltObjAttrHints	Returns the UI hints for a given service data object and its attributes.

Related Topics

getServiceLastUpdateTime Operation

This operation returns the date and time of the last update to a service WSDL, service XSD, or business object XSDs. The format of the last update time is ISO 8601.

Schema updates occur, whether there is an actual change in the WSDL or XSD, when you:

- Perform customizations at run time using Application Composer and flexfields
- Redeploy an enterprise application as part of an upgrade to a major release or a patch bundle

This operation may be useful if you generate service factory or JAX-WS proxy clients and want to determine whether to regenerate the client because of a change in the service interface.

Operation Signature

The following is the signature of the `getServiceLastUpdateTime` operation, which doesn't accept any parameters.

```
<element name="getServiceLastUpdateTime">
 <complexType>
 <sequence/>
 </complexType>
</element>
```

The response payload contains the last update time. For the definition of `dateTime-Timestamp` type, see *Sample BC4JService.xsd*.

```
<element name="getServiceLastUpdateTimeResponse">
 <complexType>
 <sequence>
 <element name="result" type="ns0:dateTime-Timestamp"/>
 </sequence>
 </complexType>
</element>
```

Example

This request payload determines when the Sales Lead service definition was last updated.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:getServiceLastUpdateTime
 xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/
 types/"></ns1:getServiceLastUpdateTime>
 </soap:Body>
</soap:Envelope>
```

The response payload returns February 19, 2015 at 12:35:35 AM PT as the time the Sales Lead service was last updated.

```
<ns0:getServiceLastUpdateTimeResponse xmlns=""
xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ns0="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:wsa="http://www.w3.org/2005/08/addressing"
xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">
 <result xmlns="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/
 ">2015-02-19T00:35:35.101-08:00</result>
</ns0:getServiceLastUpdateTimeResponse>
```

Related Topics

getEntityList Operation

This operation retrieves the list of service data objects defined on a business object service.

If the business object service implements a generic service interface, this operation retrieves information about custom objects defined in the Application Composer. For example, invoking the `getEntityList` operation on the Sales Custom Business Object service returns the custom objects defined in the Sales application in the Application Composer. Other business object services which implement a generic service interface include Custom Common Business Object, Customer Custom Business Object, Marketing Custom Business Object, Sales Custom Business Object, Sales Lead Custom Business Object, and Sales Territory Custom Business Object.

For each service data object, the response payload includes:

- QName: A fully qualified name of the corresponding XML Schema complex type representing the service data object.

- Service view usage name for the service data object: An internal value in the application module that defines the service. This value can be passed as a parameter to the `getDfltObjAttrHints` operation to get UI hints for attributes in the service data object.
- Object name for custom objects defined in Application Composer: This information is returned only when the operation is invoked on a business object service that implements a generic service interface.
- Boolean values: These values indicate whether `create`, `update`, `merge`, and `delete` operations can be performed directly on the service data object. The default value is `false`.

Operation Signature

The following is the signature of the `getEntityList` operation, which doesn't accept any input parameters.

```
<element name="getEntityList">
 <complexType>
 <sequence/>
 </complexType>
</element>
```

The response payload contains information about the service data objects in this service definition. For the definition of `ServiceViewInfo`, see *Sample BC4JService.xsd*.

```
<element name="getEntityListResponse">
 <complexType>
 <sequence>
 <element maxOccurs="unbounded" minOccurs="0"
 name="result" type="ns2:ServiceViewInfo"/>
 </sequence>
 </complexType>
</element>
```

Example

This example shows a request payload for the `getEntityList` operation defined on the Sales Lead service.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:getEntityList
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/
types/"></ns1:getEntityList>
 </soap:Body>
</soap:Envelope>
```

The sample response payload contains information for all the service data objects referenced in the Sales Lead service. For a given result, the `typeName` can be mapped to a service data object. If `canCreate`, `canUpdate`, `canMerge` or `canDelete` is set to **true**, the corresponding standard CRUD operation is exposed on the service interface of the service data object. This example shows only the first two elements of the response payload.

```
<ns0:getEntityListResponse xmlns=""
xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ns0="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:wsa="http://www.w3.org/2005/08/addressing"
xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">
 <ns1:result xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns0:ServiceViewInfo">
 ...
 <ns1:result xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns0:ServiceViewInfo">
 <ns0:name>SalesLead</ns0:name>
```

```
 <ns0:typeName>{http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/
 leadService/}MklLead</ns0:typeName>
 <ns0:canCreate>true</ns0:canCreate>
 <ns0:canUpdate>true</ns0:canUpdate>
 <ns0:canMerge>true</ns0:canMerge>
 <ns0:canDelete>true</ns0:canDelete>
 </ns1:result>
 <ns1:result xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns0:ServiceViewInfo">
 <ns0:name>SalesLeadContact</ns0:name>
 <ns0:typeName>{http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/
 leadService/}MklLeadTcMembers</ns0:typeName>
 <ns0:canCreate>true</ns0:canCreate>
 <ns0:canUpdate>true</ns0:canUpdate>
 <ns0:canDelete>true</ns0:canDelete>
 </ns1:result>
</ns0:getEntityListResponse>
```

Related Operations

To get UI hints for the service data objects in a service definition, pass the name element in the `getEntityList` response payload to the `getDfltObjAttrHints` request payload.

Related Topics

getDfltObjAttrHints Operation

This operation returns the labels for the service data objects and the label and UI hints for a given locale for the business object attributes, which are part of the service definition.

This table lists information about the return values of the `getDfltObjAttrHints` operation.

Level	Key	Value
Service data object	LABEL	Name of object (singular)
Service data object	LABEL_PLURAL	Name of object (plural)
Service data object attribute	LABEL_ResId	Expression to retrieve the key from the resource bundle

You must pass the internal names of the service data objects as parameters. To retrieve these internal names, invoke the `getEntityList` operation defined on this service.

Operation Signature

The `getDfltObjAttrHints` operation accepts two parameters:

- `viewName`: Corresponds to the service view usage name, which is an internal name for the service data object. Specify the value of the `<name>` element from the `getEntityList` response payload.
- `localeName`: Evaluates locale-based UI hints. The format of this value is ISO 639-1.

The following is the signature of the `getDfltObjAttrHints` operation:

```
<element name="getDfltObjAttrHints">
 <complexType>
 <sequence>
 <element name="viewName" type="string"/>
 <element name="localeName" type="string"/>
```

```
 </sequence>
 </complexType>
</element>
```

The response payload contains the label and UI hints for the object and the object attributes in a name-value pair format. For the definition of `ObjAttrHints` type, see *Sample BC4JService.xsd*.

```
<element name="getDfltObjAttrHintsResponse">
 <complexType>
 <sequence>
 <element name="result" type="ns0:ObjAttrHints"/>
 </sequence>
 </complexType>
</element>
```

Example

This example shows a request payload that specifies the usage name and `en` locale of the Sales Lead object, and requests for the label and UI hints.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:getDfltObjAttrHints
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/">
 <ns1:viewName>SalesLead</ns1:viewName>
 <ns1:localeName>en</ns1:localeName>
 </ns1:getDfltObjAttrHints>
 </soap:Body>
</soap:Envelope>
```

The response payload contains information about the service data object attribute. The example payload shows only the object entity level and three of the attribute level hints.

```
<ns0:getDfltObjAttrHintsResponse xmlns="" xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ns0="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:wsa="http://www.w3.org/2005/08/addressing"
xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">
 <ns1:result xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
xmlns:ns1="http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/types/"
xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns0:ObjAttrHints">
 <ns0:objHint>
 <ns0:key>LABEL</ns0:key>
 <ns0:value>Sales Lead</ns0:value>
 </ns0:objHint>
 <ns0:objHint>
 <ns0:key>TOOLTIP</ns0:key>
 <ns0:value>The interest or the potential interest of prospects or existing customers in
 a product or service being sold.</ns0:value>
 </ns0:objHint>
 <ns0:objHint>
 <ns0:key>LABEL_PLURAL</ns0:key>
 <ns0:value>Sales Lead</ns0:value>
 </ns0:objHint>
 <ns0:attrHints>
 <ns0:attrName>LeadId</ns0:attrName>
 <ns0:ctrlHint>
 <ns0:key>fnd:GLOBALLY_UNIQUE</ns0:key>
 <ns0:value>true</ns0:value>
 </ns0:ctrlHint>
 <ns0:ctrlHint>
 <ns0:key>LABEL_ResId</ns0:key>
 <ns0:value>${adfBundle['oracle.apps.marketing.leadMgmt.leads.resource.
 MklLeadsAttrBundle']['ColAttr.Identifier.LeadIdentifier.MKLLMLEADS.LEADID']}
 </ns0:value>
```

```
</ns0:ctrlHint>
<ns0:ctrlHint>
<ns0:key>ExtnEventActionProperty</ns0:key>
<ns0:value>UpdateInFieldUpdate</ns0:value>
</ns0:ctrlHint>
<ns0:ctrlHint>
<ns0:key>fnd:OSN_OBJECT_KEY</ns0:key>
<ns0:value>true</ns0:value>
</ns0:ctrlHint>
</ns0:attrHints>
<ns0:attrHints>
<ns0:attrName>DealAmount</ns0:attrName>
<ns0:ctrlHint>
<ns0:key>LABEL_ResId</ns0:key>
<ns0:value>${adfBundle['oracle.apps.marketing.leadMgmt.leads.resource.
MklLeadsAttrBundle']['ColAttr.DealSize.LeadDealSize.MKLLMLEADS.DEALSIZE']}
</ns0:value>
</ns0:ctrlHint>
<ns0:ctrlHint>
<ns0:key>ExtnEventActionProperty</ns0:key>
<ns0:value>UpdateInFieldUpdate</ns0:value>
</ns0:ctrlHint>
<ns0:ctrlHint>
<ns0:key>fnd:OSN_ENABLED_ATTR</ns0:key>
<ns0:value>true</ns0:value>
</ns0:ctrlHint>
<ns0:ctrlHint>
<ns0:key>fnd:FND_AUDIT_ATTR_ENABLED</ns0:key>
<ns0:value>true</ns0:value>
</ns0:ctrlHint>
<ns0:ctrlHint>
<ns0:key>fnd:APPLCORE_SETID_LOOKUP_TYPE</ns0:key>
<ns0:value>LEAD_TIMELINE</ns0:value>
</ns0:ctrlHint>
</ns0:attrHints>
...
</ns1:result>
</ns0:getDfltObjAttrHintsResponse>
```

Related Operations

To get the list of entities and their names, use the `getEntityList` operation and then pass the name as a request parameter to the `getDfltObjAttrHints` operation.

Related Topics

Custom Operations

In addition to the standard CRUD operations, a business object service may be exposed to custom operations that are specific to the service and map to a related business operation. For more information about the descriptions of the operation and payload elements, see Business Object Services chapter in this guide.

Examples of custom operations include:

- The `ConvertLeadToOpportunity` operation converts a lead to an opportunity. This operation:
  - Is defined on the Sales Lead service
  - Accepts the internal identifier of a Sales Lead object
  - Returns the opportunity ID, which is a string value

  > **Note:** If the lead ID is null, the operation returns null. If an error occurs, the operation returns an error message.

- The `ConvertToPartner` operation converts an organization to a partner. This operation:
  - Is defined on the Partner service
  - Accepts the internal identifier of a party organization object
  - Returns the newly converted partner object
- The `renewProgramEnrollment` operation renews an existing program enrollment. This operation:
  - Is defined on the Partner Program Enrollment service
  - Accepts the internal identifier of an enrollment
  - Returns the internal identifier of the renewed enrollment

Related Topics

Sample BC4JService.xsd

To access BC4JService.xsd for the common service operations and the XSDs that it references for a cloud instance, replace the external virtual host and port in the URL:

```
https://(FADomain,FSCMServices)/fscmService/ServiceCatalogService?XSD=/META-INF/wsdl/BC4JService.xsd
```

The following is a sample BC4JService.xsd:

```
<xsd:schema xmlns:errors="http://xmlns.oracle.com/adf/svc/errors/"
xmlns:sdo="commonj.sdo" xmlns:sdoJava="commonj.sdo/java"
xmlns:sdoXML="commonj.sdo/xml" xmlns="http://xmlns.oracle.com/adf/svc/types/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"elementFormDefault="qualified" targetNamespace=
"http://xmlns.oracle.com/adf/svc/types/" sdoJava:package="oracle.jbo.common.service.types">
 <xsd:import namespace="http://xmlns.oracle.com/adf/svc/errors/"
 schemaLocation="https://fs-your-cloud-hostname:port/
 fscmService/ServiceCatalogService?XSD=/META-INF/wsdl/ServiceException.xsd"/>
 <xsd:import namespace="commonj.sdo" schemaLocation="https://fs-your-cloud-hostname:port/
 fscmService/ServiceCatalogService?XSD=/xml/sdoModel.xsd"/>
 <xsd:import namespace="commonj.sdo/java" schemaLocation="https://fs-your-cloud-hostname:port/
 fscmService/ServiceCatalogService?XSD=/xml/sdoJava.xsd"/>
 <xsd:import namespace="commonj.sdo/xml" schemaLocation="https://fs-your-cloud-hostname:port/
 fscmService/ServiceCatalogService>?XSD=/xml/sdoXML.xsd"/
 <xsd:element name="findCriteria" type="FindCriteria"/>
 <xsd:complexType name="FindCriteria">
 <xsd:sequence>
 <xsd:element default="0" name="fetchStart" type="xsd:int"/>
 <xsd:element default="-1" name="fetchSize" type="xsd:int"/>
 <xsd:element minOccurs="0" name="filter" type="ViewCriteria"/>
 <xsd:element minOccurs="0" name="sortOrder" type="SortOrder"/>
```

```
<xsd:element maxOccurs="unbounded" minOccurs="0" name="findAttribute"
type="xsd:string"/>
<xsd:element default="false" name="excludeAttribute" type="xsd:boolean"/>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="childFindCriteria"
type="ChildFindCriteria"/>
</xsd:sequence>
</xsd:complexType>
<xsd:complexType name="ViewCriteria">
<xsd:sequence>
<xsd:element minOccurs="0" name="conjunction" type="Conjunction"/>
<xsd:element maxOccurs="unbounded" name="group" type="ViewCriteriaRow"/>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="nested" type="ViewCriteria"/>
</xsd:sequence>
</xsd:complexType>
<xsd:complexType name="ViewCriteriaRow">
<xsd:sequence>
<xsd:element minOccurs="0" name="conjunction" type="Conjunction"/>
<xsd:element default="false" name="upperCaseCompare" type="xsd:boolean"/>
<xsd:element maxOccurs="unbounded" name="item" type="ViewCriteriaItem"/>
/xsd:sequence>
</xsd:complexType>
<xsd:complexType name="ViewCriteriaItem">
<xsd:sequence>
<xsd:element minOccurs="0" name="conjunction" type="Conjunction"/>
<xsd:element default="false" name="upperCaseCompare" type="xsd:boolean"/>
<xsd:element name="attribute" type="xsd:string"/>
<xsd:element name="operator" type="xsd:string"/>
<xsd:choice>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="value"
type="xsd:anySimpleType"/>
<xsd:element name="nested" type="ViewCriteria"/>
</xsd:choice>
</xsd:sequence>
</xsd:complexType>
<xsd:simpleType name="Conjunction" sdoJava:instanceClass="java.lang.String">
<xsd:restriction base="xsd:string">
<xsd:enumeration value="And"/>
<xsd:enumeration value="Or"/>
<xsd:enumeration value="Not"/>
<xsd:enumeration value="AndNot"/>
<xsd:enumeration value="OrNot"/>
</xsd:restriction>
</xsd:simpleType>
<xsd:complexType name="SortOrder">
<xsd:sequence>
<xsd:element maxOccurs="unbounded" name="sortAttribute" type="SortAttribute"/>
</xsd:sequence>
</xsd:complexType>
<xsd:complexType name="SortAttribute">
<xsd:sequence>
<xsd:element name="name" type="xsd:string"/>
<xsd:element default="false" name="descending" type="xsd:boolean"/>
</xsd:sequence>
</xsd:complexType>
<xsd:complexType name="ChildFindCriteria">
<xsd:complexContent>
<xsd:extension base="FindCriteria">
<xsd:sequence>
<xsd:element name="childAttrName" type="xsd:string"/>
</xsd:sequence>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>
<xsd:simpleType name="ChangeOperation" sdoJava:instanceClass="java.lang.String">
<xsd:restriction base="xsd:string">
<xsd:enumeration value="Create"/>
```

```
<xsd:enumeration value="Update"/>
<xsd:enumeration value="Merge"/>
<xsd:enumeration value="Delete"/>
</xsd:restriction>
</xsd:simpleType>
<xsd:element name="findControl" type="FindControl"/>
<xsd:complexType name="FindControl">
<xsd:sequence>
<xsd:element default="false" name="retrieveAllTranslations" type="xsd:boolean"/>
</xsd:sequence>
</xsd:complexType>
<xsd:element name="processControl" type="ProcessControl"/>
<xsd:complexType name="ProcessControl">
<xsd:sequence>
<xsd:element minOccurs="0" name="returnMode" type="ReturnMode"/>
<xsd:element minOccurs="0" name="exceptionReturnMode" type="ReturnMode"/>
<xsd:element default="false" name="partialFailureAllowed" type="xsd:boolean"/>
</xsd:sequence>
</xsd:complexType>
<xsd:simpleType name="ReturnMode" sdoJava:instanceClass="java.lang.String">
<xsd:restriction base="xsd:string">
<xsd:enumeration value="Full"/>
<xsd:enumeration value="Key"/>
<xsd:enumeration value="None"/>
</xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="base64Binary-DataHandler"
sdoJava:instanceClass="javax.activation.DataHandler">
<xsd:restriction base="xsd:base64Binary"/>
</xsd:simpleType>
<xsd:simpleType name="dateTime-Timestamp" sdoJava:instanceClass="java.sql.Timestamp">
<xsd:restriction base="xsd:dateTime"/>
</xsd:simpleType>
<xsd:simpleType name="time-Time" sdoJava:instanceClass="java.sql.Time">
<xsd:restriction base="xsd:time"/>
</xsd:simpleType>
<xsd:simpleType name="date-Date" sdoJava:instanceClass="java.sql.Date">
<xsd:restriction base="xsd:date"/>
</xsd:simpleType>
<xsd:complexType name="AmountType">
<xsd:simpleContent>
<xsd:extension base="xsd:decimal">
<xsd:attribute name="currencyCode" type="xsd:normalizedString" use="optional"/>
</xsd:extension>
</xsd:simpleContent>
</xsd:complexType>
<xsd:complexType name="MeasureType">
<xsd:simpleContent>
<xsd:extension base="xsd:decimal">
<xsd:attribute name="unitCode" type="xsd:normalizedString" use="optional"/>
</xsd:extension>
</xsd:simpleContent>
</xsd:complexType>
<xsd:complexType name="MethodResult">
<xsd:sequence>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="Message"
type="errors:ServiceMessage"/>
</xsd:sequence>
</xsd:complexType>
<xsd:complexType name="BigDecimalResult">
<xsd:complexContent>
<xsd:extension base="MethodResult">
<xsd:sequence>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="Value"
type="xsd:decimal"/>
</xsd:sequence>
```

```
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="BigIntegerResult">
<xsd:complexContent>
<xsd:extension base="MethodResult">
<xsd:sequence>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="Value"
type="xsd:integer"/>
</xsd:sequence>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="BooleanResult">
<xsd:complexContent>
<xsd:extension base="MethodResult">
<xsd:sequence>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="Value"
type="xsd:boolean"/>
</xsd:sequence>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ByteResult">
<xsd:complexContent>
<xsd:extension base="MethodResult">
<xsd:sequence>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="Value"
type="xsd:byte"/>
</xsd:sequence>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="BytesResult">
<xsd:complexContent>
<xsd:extension base="MethodResult">
<xsd:sequence>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="Value"
type="xsd:hexBinary"/>
</xsd:sequence>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="TimestampResult">
<xsd:complexContent>
<xsd:extension base="MethodResult">
<xsd:sequence>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="Value"
type="xsd:dateTime" sdoXML:dataType="dateTime-Timestamp"/>
</xsd:sequence>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="TimeResult">
<xsd:complexContent>
<xsd:extension base="MethodResult">
<xsd:sequence>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="Value"
type="xsd:time" sdoXML:dataType="time-Time"/>
</xsd:sequence>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="DateResult">
<xsd:complexContent>
<xsd:extension base="MethodResult">
```

```
<xsd:sequence>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="Value"
type="xsd:date" sdoXML:dataType="date-Date"/>
</xsd:sequence>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="DoubleResult">
<xsd:complexContent>
<xsd:extension base="MethodResult">
<xsd:sequence>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="Value"
type="xsd:double"/>
</xsd:sequence>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="FloatResult">
<xsd:complexContent>
<xsd:extension base="MethodResult">
<xsd:sequence>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="Value"
type="xsd:float"/>
</xsd:sequence>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="IntegerResult">
<xsd:complexContent>
<xsd:extension base="MethodResult">
<xsd:sequence>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="Value"
type="xsd:int"/>
</xsd:sequence>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="LongResult">
<xsd:complexContent>
<xsd:extension base="MethodResult">
<xsd:sequence>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="Value"
type="xsd:long"/>
</xsd:sequence>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ShortResult">
<xsd:complexContent>
<xsd:extension base="MethodResult">
<xsd:sequence>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="Value"
type="xsd:short"/>
</xsd:sequence>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="StringResult">
<xsd:complexContent>
<xsd:extension base="MethodResult">
<xsd:sequence>
<xsd:element maxOccurs="unbounded" minOccurs="0" name="Value"
type="xsd:string"/>
</xsd:sequence>
</xsd:extension>
</xsd:complexContent>
```

```
 </xsd:complexType>
 <xsd:complexType name="DataHandlerResult">
 <xsd:complexContent>
 <xsd:extension base="MethodResult">
 <xsd:sequence>
 <xsd:element maxOccurs="unbounded" minOccurs="0" name="Value"
 type="base64Binary-DataHandler"/>
 </xsd:sequence>
 </xsd:extension>
 </xsd:complexContent>
 </xsd:complexType>
 <xsd:complexType name="DataObjectResult">
 <xsd:complexContent>
 <xsd:extension base="MethodResult">
 <xsd:sequence>
 <xsd:element maxOccurs="unbounded" minOccurs="0" name="Value"
 type="xsd:anyType" sdoXML:dataType="sdo:DataObject"/>
 </xsd:sequence>
 </xsd:extension>
 </xsd:complexContent>
 </xsd:complexType>
 <xsd:complexType name="ObjAttrHints">
 <xsd:sequence>
 <xsd:element maxOccurs="unbounded" minOccurs="0" name="objHint" type="CtrlHint"/>
 <xsd:element maxOccurs="unbounded" name="attrHints" type="AttrCtrlHints"/>
 </xsd:sequence>
 </xsd:complexType>
 <xsd:complexType name="AttrCtrlHints">
 <xsd:sequence>
 <xsd:element name="attrName" type="xsd:string"/>
 <xsd:element maxOccurs="unbounded" name="ctrlHint" type="CtrlHint"/>
 </xsd:sequence>
 </xsd:complexType>
 <xsd:complexType name="CtrlHint">
 <xsd:sequence>
 <xsd:element name="key" type="xsd:string"/>
 <xsd:element name="value" type="xsd:anySimpleType"/>
 </xsd:sequence>
 </xsd:complexType>
 <xsd:complexType name="ServiceViewInfo">
 <xsd:sequence>
 <xsd:element name="name" type="xsd:string"/>
 <xsd:element name="typeName" type="xsd:string"/>
 <xsd:element default="false" minOccurs="0" name="canCreate" type="xsd:boolean"/>
 <xsd:element default="false" minOccurs="0" name="canUpdate" type="xsd:boolean"/>
 <xsd:element default="false" minOccurs="0" name="canMerge" type="xsd:boolean"/>
 <xsd:element default="false" minOccurs="0" name="canDelete" type="xsd:boolean"/>
 </xsd:sequence>
 </xsd:complexType>
</xsd:schema>
```

5 Resources for Discovering Web Services

Overview

To discover the public external SOAP web services in Oracle Applications Cloud, you can use the SOAP Web Services guides for the appropriate Oracle Applications Cloud service, Developer Connect, or the Service Catalog Service. Information includes public external services for a specific cloud instance and new services that are introduced in patches and customizations.

- SOAP Web Services guide: You can find these guides on the **Books** page for the cloud service at *Oracle Help Center*. This document is one of the SOAP Web Services guide.
- Developer Connect:
  - Provisioned on the cloud instance
  - Provides a user interface
  - Allows developers to discover the web services on a specific cloud instance
  - Applicable for business object services only
- Service Catalog Service:
  - Provisioned on the cloud instance
  - Provides an Application Programming Interface (API) to discover the web services programmatically
  - Applicable for business object services only

Related Topics

Web Services in This Guide

This SOAP web services guide provides details about the business object services, service data objects, and process services.

Business Object Services Information

This table lists the information provided for the business object services in the Business Object Services chapter within this guide.

Information	Description
Description	Provides an overview of the service and may contain details about service usage and related services.
Life Cycle Status	Indicates whether the service is active or deprecated. The status is never indicated as obsolete because obsolete services are not shipped or documented. See *Web Service Life Cycle*.
QName	Holds a unique identifier for the service.

Information	Description
Service WSDL URL	Contains the tokenized URL for the concrete service WSDL from your cloud instance. For example, **`https://(FADomain,CRMServices)/crmService/OpportunityService?WSDL`**.
Logical Business Objects	Contains the business object that the service defines. The service data object may define the business object itself or only a part of it. The logical business objects are grouped into related objects that are in turn grouped into higher-level related objects. For example, **`CRM : Opportunity Management : Opportunity`**. The service operates on the Opportunity object, which is grouped into a related set of objects called Opportunity Management, which in turn is grouped into a larger set of related objects called CRM. Some assets may have a separate entry for the higher-level grouping, which can be ignored because they are redundant. For example, **`CRM`** **`CRM:Marketing`** **`CRM:Marketing:Marketing Campaign`**
Relationships	Describes how the service is related to service data objects and other business object services. The relationship type and their relationship target object type include: • **`Handles`** a service data object. All the service data objects referenced by the service are included. • **`Next version is`** a business object service. This service is superseded by the service described in the relationship target. For example, the next version of the Marketing Budget Service is Marketing Budget Service Version 2. • **`Previous service is`** a business object service. This service supersedes another service. For example, the previous version of the Sales Lead Service Version 2 is Sales Lead Service. To derive the hierarchy of the service data objects, refer to the corresponding service and traverse the **`Contains`** relationship type defined on the entity. See *Service Data Objects Information*.
Operations	Contains information about the operations exposed in the service interface on the business object. Information includes the name of the operation, a brief description, life cycle status, and the name, type, and description of elements in request and response payloads.
Security	Includes information about the privileges, also known as entitlements, required to perform the service operations. It also provides the mapping of duty roles to the privileges that are granted to them. **Note:** You might get an access denied exception when trying to perform a SOAP call. This happens when there is a change in the roles and privileges. To ensure that the latest roles are available before performing a SOAP call, you must run the ESS job Import User and Role Application Security Data.

Service Data Objects Information

This table lists the information provided for the service data objects in the Service Data Objects chapter within this guide.

Information	Description
Description	Provides an overview of the service data object.
QName	Holds a unique identifier for the service data object.
Logical Business Objects	Contains the business object that the service data object defines. The service data object may define the functional business object itself or only a part of it. The logical business objects are grouped into related objects that are in turn grouped into higher-level related objects.
Relationships	Describes how the service data object is related to other service data objects and business object services. The list of relationship types and their relationship target object type include: • **`Contained by`** a service data object. This relationship is the reverse of the **`Contains`** type. • **`Contains`** a service data object. This service data object includes a direct reference to the service data object described in the relationship target. The entity has an attribute which has a type based on the service data object in the relationship target. For example, the Opportunity entity contains the Opportunity Contact. • **`Extended by`** a service data object. This relationship is the reverse of the **`Extends`** type. • **`Extends`** a service data object. This service data object is a subclass of the entity defined in the relationship target. For example, Expertise extends Partner Generic List of Values by adding two additional attributes, namely Expertise Code and Expertise Name. • **`Handled by`** a business object service. This relationship is the reverse of the **`Handles`** type. See *Business Object Services Information*.
Attributes	Provides the name, type, and description of the attributes that define the service data object. The attribute type is represented as a Java class. See *Complex Data Types Defined by Application Development Framework*.

Process Services Information

This table lists the information provided for the process services in the Process Services chapter within this guide.

Information	Description
Description	Provides an overview of the process service.
Life Cycle Status	Indicates whether the service is **`Active`** or **`Deprecated`**. The status is never indicated as **`Obsolete`** because obsolete services are not shipped or documented. See *Web Service Life Cycle*.
Previous version	Specifies the process service that was superseded by this service. This is applicable only if the service supersedes another service.
Next Version	Specifies the process service that supersedes this service. This is applicable only if the service is superseded by another service.
Logical Business Objects	Contains the business object that the service defines. The logical process objects are grouped into related objects that are in turn grouped into higher-level related objects.
Operations	Contains information about the operations exposed on the business object. Information includes the name of the operation, a brief description, callback operation name, and service type. It also includes description and type for the input and output payloads.

Related Topics

Developer Connect Portal

Use the Developer Connect portal to discover business object services, to look up service endpoints, and to view service data object metadata and customizations.

This portal runs on your cloud instance, and contains information about the specific set of services deployed to your cloud instance. It reflects the current service interface, and includes patches and service data object customizations, if any.

To use the Developer Connect portal, your job role must have the `FND_INTEGRATION_SPECIALIST_JOB`, `FND_APPLICATION_DEVELOPER_JOB`, or `ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB` privilege. Alternately, you can grant the `ATK_WEB_SERVICE_INFO_ACCESS_PRIV` entitlement to your custom role, and then grant the custom role to users who require access. For more information, see the security guide for the appropriate cloud service at *Oracle Help Center*.

To open the Developer Connect portal, from the **Navigator** menu, select **Tools** - **Developer Connect**. To synchronize the service information in the Developer Connect portal, click **Synchronize** and all the web services deployed to your cloud instance are listed. Information includes summary of the service, operations defined in the service interface, hierarchy of the service data objects, and privileges required to perform the service operations.

> **Note:** From Release 13 onwards, the context root values in the URL paths are changed. Ensure that you have synchronized the Developer Connect portal since Release 13 so that the service information is displayed correctly.

Summary

This table lists the information provided in the **Summary** panel of the Developer Connect portal.

Field	Description
Name	Display name of the service.
Business Object	Business object that the service defines. For example, Opportunity, Partner, and Sales Revenue.
Life Cycle	Status of the service. Valid values are `Active` or `Deprecated`. See *Web Service Life Cycle*. If the life cycle status is deprecated, the service that supersedes this deprecated service is displayed.
QName	Fully qualified name of the service.
End Point URL	Endpoint URL for the service deployed on your Oracle cloud instance.
WSDL File	Concrete WSDL for the service deployed on your Oracle cloud instance.
Security Policy	Oracle Web Services Manager (OWSM) policy used for the service on the server side.
Description	Brief overview of the service.

Operations

This table lists the information provided in the **Operations** panel of the Developer Connect portal.

Field	Description
Name	Name of the operation. Although business object services support both synchronous and asynchronous message patterns for each operation, only the synchronous operation is displayed in this panel. To view the name, data types, and description of the request and response payload elements, click the operation name.
Life Cycle	Status of this operation. Valid values are `Active` or `Deprecated`.
Description	Brief overview of the operation.

Service Data Object

This table lists the information provided in the **Service Data Object** panel of the Developer Connect portal.

Field	Description
Service Data Objects	Display name of the service data object. The object hierarchy is displayed in a tree structure.
QName	Fully qualified name of the service data object.
State	Valid values are: • `Standard`: Object defined by Oracle Applications • `New`: Custom object defined by the user
Description	Brief overview of the services data object.
Attributes	List of attributes that define the service data object. Information includes name, data type, state, required, and description.

Security

The **Security** panel of the Developer Connect portal displays the list service operations, the privileges required to perform each operation, and display name and description of the privilege.

Sample Payloads

The **Sample Payloads** panel of the Developer Connect portal displays the payloads seeded by Oracle Applications or users. You cannot modify or delete payloads seeded by Oracle Applications. Information in the panel includes the operation name, link to download XML format of the sample payload, and a brief description of the sample payload.

Related Topics

Service Catalog Service

To get the endpoint and metadata for public external services, use the Service Catalog Service provisioned on your cloud instance. This service returns information specific to the cloud instance and the new services introduced in the

patches applied to the instance. You can use this service to programmatically discover and retrieve the required data to invoke the SOAP web services.

The tokenized WSDL for the Service Catalog Service is:

```
https://(FADomain,FSCMServices)/fscmService/ServiceCatalogService?WSDL
```

For instructions on how to derive the concrete URL for the service, see *Deriving Business Object Service Endpoint and WSDL*.

To secure the service, use the `oracle/wss11_saml_or_username_token_with_message_protection_service_policy` security policy. Any authenticated user can invoke this service, which exposes two synchronous operations:

- *`getAllServiceEndpoints`*
- *`getServiceEndpoint`*

Related Topics

getAllServiceEndpoints Operation

This operation returns information about all the public external services on your cloud instance.

> **Note:** The only two public external services for which the `getAllServiceEndpoints` operation doesn't return information are public external composite services and public external Fusion Middleware services, such as the Service Catalog Service.

For each public external service, the information includes:

- `QName`: A name that uniquely identifies the service. For example, the QName for the Opportunity service is `{http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opportunityService/}OpportunityService`
- Logical Business Object: The business object that the service implements. If the service doesn't operate on a business object, then this is null. For example, the logical business object for the Opportunity service is `CRM-CRM : MOO-Opportunity Management : MOO_OPPORTUNITY-Opportunity`. The value in this field represents a hierarchy of the logical business objects, where the most general object is to the left and the most specific is to the right. Each node in the hierarchy is separated by a colon. In the example, `Opportunity` is the most specific business object and is grouped in the `Opportunity Management` object, which in turn is grouped in the `CRM` business object. Each node in the hierarchy is represented by two strings separated by a dash (-). The string to the left of the dash is an internal string and the string to the right is a user-friendly string.
- Life cycle: See *Web Service Life Cycle*.
- Service WSDL URL: The concrete WSDL URL for the service. For example, the URL for the Opportunity service is `https://crm-your-cloud-hostname:port/opptyMgmtOpportunities/OpportunityService?WSDL`.
- Service XSD URL: The URL to the service XSD that contains the service operation payload types. See *Service XSD*. For example, the URL for the Opportunity service is `https://crm-your-cloud-hostname:port/opptyMgmtOpportunities/OpportunityService? XSD=/oracle/apps/sales/opptyMgmt/opportunities/opportunityService/OpportunityService.xsd`.

For more information about the service, refer to the `<wsdl:documentation>` tag in the WSDL and XSD.

Operation Signature

The following is the request payload of the `getAllServiceEndPoints` operation:

```
<element name="getAllServiceEndPoints">
 <complexType>
```

```
 <sequence/>
 </complexType>
</element>
```

The following is the response payload of the `getAllServiceEndPoints` operation:

```
<element name="getAllServiceEndPointsResponse">
 <complexType>
 <sequence>
 <element name="result" type="ns1:CatalogService" minOccurs="0
 maxOccurs="unbounded" />
 </sequence>
 </complexType>
</element>
```

Example

This example shows an empty request payload for the `getAllServiceEndpoints` operation.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:getAllServiceEndPoints
 xmlns:ns1="http://xmlns.oracle.com/oracle/apps/fnd/applcore/
 webservices/types/">
 </ns1:getAllServiceEndPoints>
 </soap:Body>
</soap:Envelope>
```

The response payload contains the service information for all the public external services on the cloud instance. This example shows only the first two result elements of the response.

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/">
 <env:Header/>
 <env:Body>
 <ns0:getAllServiceEndPointsResponse
 xmlns:ns0="http://xmlns.oracle.com/oracle/apps/fnd/applcore/webservices/types/">
 <ns0:result xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xsi:type="ns0:CatalogService">
 <ns0:qName>{http://xmlns.oracle.com/apps/crmCommon/activities/}
 activitiesService/ActivityTaskService</ns0:qName>
 <ns0:lbo xsi:nil="true"/>
 <ns0:lifecycle>Deprecated</ns0:lifecycle>
 <ns0:xsdLocation>https://crm-your-cloud-hostname:port/appCmmnCompActivities/
 ActivityTaskService?XSD=/oracle/apps/crmCommon/activities/
 activitiesService/ActivityTaskService.xsd</ns0:xsdLocation>
 <ns0:wsdlAddress>https://crm-your-cloud-hostname:port/appCmmnCompActivities/
 ActivityTaskService?WSDL</ns0:wsdlAddress>
 </ns0:result>
 <ns0:result xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xsi:type="ns0:CatalogService">
 <ns0:qName>{http://xmlns.oracle.com/apps/crmCommon/
 bulkExport/bulkExportServiceV2/}BulkExportService</ns0:qName>
 <ns0:lbo xsi:nil="true"/>
 <ns0:lifecycle>Active</ns0:lifecycle>
 <ns0:xsdLocation>https://crm-your-cloud-hostname:port/crmCommonBulkExport/
 BulkExportService?XSD=/oracle/apps/crmCommon/bulkExport/
 bulkExportServiceV2/BulkExportService.xsd</ns0:xsdLocation>
 <ns0:wsdlAddress>https://crm-your-cloud-hostname:port/
 crmCommonBulkExport/BulkExportService?WSDL</ns0:wsdlAddress>
 </ns0:result>
 ...
 </ns0:getAllServiceEndPointsResponse>
 </env:Body>
</env:Envelope>
```

Related Topics

getServiceEndpoint Operation

This operation returns the endpoint and metadata for a specific public external service.

Operation Signature

The following is the request payload of the `getServiceEndpoint` operation:

```
<element name="getServiceEndPoint">
 <complexType>
 <sequence>
 <element name="qname" type="string"/>
 </sequence>
 </complexType>
</element>
```

The following is the response payload of the `getServiceEndpoint` operation:

```
<element name="getServiceEndPointResponse">
 <complexType>
 <sequence>
 <element name="result" type="ns1:CatalogService"/>
 </sequence>
 </complexType>
</element>
```

Example

This request payload provides the `QName` of the Opportunity Service and requests for the endpoint and metadata.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:getServiceEndPoint
 xmlns:ns1="http://xmlns.oracle.com/oracle/apps/fnd/applcore/
 webservices/types/">
 <ns1:qname>{http://xmlns.oracle.com/apps/sales/opptyMgmt/
 opportunities/opportunityService/}OpportunityService</ns1:qname>
 </ns1:getServiceEndPoint>
 </soap:Body>
</soap:Envelope>
```

The response contains the endpoint and metadata for the Opportunity service provisioned on the cloud instance, which runs the Service Catalog Service.

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/">
 <env:Header/>
 <env:Body>
 <ns0:getServiceEndPointResponse
 xmlns:ns0="http://xmlns.oracle.com/oracle/apps/fnd/applcore/
 webservices/types/">
 <ns1:result
 xmlns:ns1="http://xmlns.oracle.com/oracle/apps/fnd/applcore/
 webservices/types/"
 xmlns:ns0="http://xmlns.oracle.com/oracle/apps/fnd/applcore/webservices/"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xsi:type="ns0:CatalogService">
 <ns0:qName>{http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/
 opportunityService/}OpportunityService</ns0:qName>
 <ns0:lbo>CRM-CRM : MOO-Opportunity Management : MOO_OPPORTUNITY-Opportunity
 </ns0:lbo>
 <ns0:lifecycle>Active</ns0:lifecycle>
```

```
<ns0:xsdLocation>https://crm-your-cloud-hostname:port/opptyMgmtOpportunities/
OpportunityService?XSD=/oracle/apps/sales/opptyMgmt/opportunities/
opportunityService/OpportunityService.xsd</ns0:xsdLocation>
<ns0:wsdlAddress>https://crm-your-cloud-hostname:port/
opptyMgmtOpportunities/OpportunityService?WSDL</ns0:wsdlAddress>
</ns1:result>
</ns0:getServiceEndPointResponse>
</env:Body>
</env:Envelope>
```

Related Topics

Derive Business Object Service Endpoint and WSDL

To derive the external virtual host and port for a tokenized service WSDL, use the **Review Topology** page in the **Setup and Maintenance** work area. This page contains information about the domains and applications that are deployed on your cloud instance.

To access the **Review Topology** page, your job role must have the `ASM_REVIEW_TOPOLOGY_HIERARCHY_PRIV` entitlement. This entitlement is granted to the `ASM_APPLICATION_DEPLOYER_DUTY` duty role, which is inherited by the `ASM_APPLICATION_DEVELOPER_DUTY` and `ASM_APPLICATION_ADMIN_DUTY` duty roles. If your user account doesn't have the required role, you can't access the topology information. Contact your security administrator for assistance.

Example

Using the Service Catalog Service, this example explains how to derive the concrete service WSDL URL from the following tokenized URL:

```
https://(FADomain,FSCMServices)/fscmService/ServiceCatalogService?WSDL
```

1. In the **Setup and Maintenance** work area, click the Tasks panel tab, and select **Review Topology**

   .
2. On the Review Topology page, select the **Detailed** tab.
3. In the **Name** column, expand the **FADomain** node, and then expand the **FSCMServices** subnode. Use the following as example values:
   - The virtual host value is `fs-your-cloud-hostname`.
   - The port value is `443`.
4. Replace the values in parenthesis in the tokenized URL with the identified external virtual host and port values:
   `https://fs-your-cloud-hostname:443/fscmService/ServiceCatalogService?wsdl`
5. Remove `?wsdl` from the URL to derive the Service Catalog Service end point URL. Navigating to this URL in a browser results in a blank page as the service tester page is disabled.

Related Topics

6 Business Object Service Advanced Examples

Standard CRUD Operations Additional Configuration

The standard CRUD operations defined on business object services can be configured to:

- Return warning messages along with the service data objects
- Process nil and non-nil values for the service data object attribute in the request payload element
- Search on parent and child objects based on complex search criteria

Related Topics

Services Warnings

If you enable service warnings on a service, the response payload returns the warning messages generated during operation execution along with the service data object. The data type of the element in the response payload extends the service data object and captures the warning messages.

For example, suppose service warnings are enabled on Location Service. The `create` operation accepts the Location business object to be defined and returns the newly created object along with the service warnings generated during the operation. The `LocationResult` data type acts as a wrapper that allows the result to store both location type and warning messages.

```
<element name="createLocation">
 <complexType>
 <sequence>
 <element name="location" type="ns1:Location"/>
 </sequence>
 </complexType>
</element>

element name="createLocationResponse">
 <complexType>
 <sequence>
 <element name="result" type="ns1:LocationResult"/>
 </sequence>
 </complexType>
</element>
```

The `LocationResult` data type extends the `MethodResult` type. For the definition of the `MethodResult` type, see *Sample BC4JService.xsd*. The `maxOccurs` parameter is set to `unbounded` instead of to `1` because the same data type is used for the `find` and `process` operations, which return multiple objects.

```
<xsd:complexType name="LocationResult">
 <xsd:complexContent>
 <xsd:extension base="ns0:MethodResult">
 <xsd:sequence>
 <xsd:element name="Value" type="Location" minOccurs="0"
 maxOccurs="unbounded"/>
 </xsd:sequence>
 </xsd:extension>
 </xsd:complexContent>
```

```
</xsd:complexType>
```

If you don't enable service warnings on a service, the response payload returns the business object service itself. For example, the `createSalesLead` operation defined on the Sales Lead service has a request and response payload that accepts and returns the Sales Lead object, which is of `MklLead` type.

The following example request payload is for the `createLocation` operation that is defined on `http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/applicationModule/}LocationService`. This XML fragment creates `1 Oracle Parkway, Redwood Shores, CA 94065, US` location object by using the `AMS` module. This module is registered as a lookup code for the `HZ_CREATED_BY_MODULES` lookup type. See *Using Lookups*.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:createLocation
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/
 locationService/applicationModule/types/">
 <ns1:location
 xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/">
 <ns2:Address1>1 Oracle Parkway</ns2:Address1>
 <ns2:City>Redwood Shores</ns2:City>
 <ns2:State>CA</ns2:State>
 <ns2:Country>US</ns2:Country>
 <ns2:PostalCode>94065</ns2:PostalCode>
 <ns2:CreatedByModule>AMS</ns2:CreatedByModule>
 </ns1:location>
 </ns1:createLocation>
 </soap:Body>
</soap:Envelope>
```

The response payload for the `createLocation` operation contains the complete definition of the newly created location business object.

```
<ns0:createLocationResponse xmlns=""
xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/
applicationModule/types/" xmlns:wsa="http://www.w3.org/2005/08/addressing"
xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-
utility-1.0.xsd">
 <ns2:result xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/"
xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/
applicationModule/types/"
xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/location/"
xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:type="ns1:LocationResult">
 <ns1:Value>
 <ns1:LocationId>300100039119119</ns1:LocationId>
 <ns1:LastUpdateDate>2014-04-22T23:43:17.153-07:00</ns1:LastUpdateDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:CreationDate>2014-04-22T23:43:17.001-07:00</ns1:CreationDate>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:LastUpdateLogin>F7B103E144504B3CE0433A90F50A0448
 </ns1:LastUpdateLogin>
 <ns1:RequestId xsi:nil="true"/>
 <ns1:OrigSystem xsi:nil="true"/>
 <ns1:OrigSystemReference>300100039119119</ns1:OrigSystemReference>
 <ns1:Country>US</ns1:Country>
 <ns1:Address1>1 Oracle Parkway</ns1:Address1>
 <ns1:Address2 xsi:nil="true"/>
 <ns1:Address3 xsi:nil="true"/>
 <ns1:Address4 xsi:nil="true"/>
 <ns1:City>Redwood Shores</ns1:City>
```

```
<ns1:PostalCode>94065</ns1:PostalCode>
<ns1:State>CA</ns1:State>
<ns1:Province xsi:nil="true"/>
<ns1:County xsi:nil="true"/>
<ns1:AddressStyle xsi:nil="true"/>
<ns1:ValidatedFlag>false</ns1:ValidatedFlag>
<ns1:AddressLinesPhonetic xsi:nil="true"/>
<ns1:PostalPlus4Code xsi:nil="true"/>
<ns1:Position xsi:nil="true"/>
<ns1:LocationDirections xsi:nil="true"/>
<ns1:AddressEffectiveDate xsi:nil="true"/>
<ns1:AddressExpirationDate xsi:nil="true"/>
<ns1:CliiCode xsi:nil="true"/>
<ns1:Language xsi:nil="true"/>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:Description xsi:nil="true"/>
<ns1:SalesTaxGeocode xsi:nil="true"/>
<ns1:SalesTaxInsideCityLimits>1</ns1:SalesTaxInsideCityLimits>
<ns1:FaLocationId xsi:nil="true"/>
<ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
<ns1:CreatedByModule>AMS</ns1:CreatedByModule>
<ns1:GeometryStatusCode>DIRTY</ns1:GeometryStatusCode>
<ns1:ValidationStatusCode xsi:nil="true"/>
<ns1:DateValidated xsi:nil="true"/>
<ns1:DoNotValidateFlag xsi:nil="true"/>
<ns1:Comments xsi:nil="true"/>
<ns1:HouseType xsi:nil="true"/>
<ns1:EffectiveDate>2014-04-22</ns1:EffectiveDate>
<ns1:AddrElementAttribute1 xsi:nil="true"/>
<ns1:AddrElementAttribute2 xsi:nil="true"/>
<ns1:AddrElementAttribute3 xsi:nil="true"/>
<ns1:AddrElementAttribute4 xsi:nil="true"/>
<ns1:AddrElementAttribute5 xsi:nil="true"/>
<ns1:Building xsi:nil="true"/>
<ns1:FloorNumber xsi:nil="true"/>
<ns1:StatusFlag>true</ns1:StatusFlag>
<ns1:InternalFlag>false</ns1:InternalFlag>
<ns1:TimezoneCode xsi:nil="true"/>
<ns1:Latitude xsi:nil="true"/>
<ns1:Longitude xsi:nil="true"/>
<ns1:Distance xsi:nil="true"/>
</ns1:Value>
</ns2:result>
</ns0:createLocationResponse>
```

Related Topics

Behavior of Service Data Object Attribute in Request Payload

This table lists the service data object attribute values in the request payload and describes how **create** and **update** operations process these values.

Request Payload Element	Behavior In create Operation	Behavior In update Operation
The service data object attribute is not included in the request payload. This is the absent element case.	If a default value is defined, the new row is set to this value.	The attribute value for the service data object is not updated.

Request Payload Element	Behavior In create Operation	Behavior In update Operation
The service data object attribute is included in the payload and has an empty element. For example, `<attributeName/>` and `<attributeName></attributeName>`.	If the attribute is nillable, the value is set to nil. Otherwise it is an invalid input.	If the attribute is nillable, the value is not updated. Otherwise it is an invalid input.
The service data object attribute value is included in the payload and has a nil value. For example, `<attributeName xsi:nil="true">`.	If the attribute is nillable, the value is set to nil. Otherwise it is an invalid input.	If the attribute is nillable, the value is updated to nil. Otherwise it is an invalid input.
The service data object attribute is included in the payload. It is not an empty element and contains a non-nil value.	The service data object attribute is set to the specified value.	The service data object attribute is updated to the specified value.

Related Topics

Examples of Using find Operation

Use the various parameters of the find request payload to specify complex search criteria and retrieve attributes from parent and child objects.

Return a Subset of Attributes in the Child Service Data Object

To include the entire `LocationProfile` child object in the response, add a new `findAttribute` element containing `LocationProfile` as the value in the request payload. This example selects the location for which the internal identifier is set to **958**. The response returns `City`, `State`, `Province`, `Country`, `LocationId`, and all the attributes in the `LocationProfile` child object.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:findLocation
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/
 locationService/applicationModule/types/">
 <ns1:findCriteria xmlns:ns2="http://xmlns.oracle.com/adf/svc/types/">
 <ns2:filter>
 <ns2:group>
 <ns2:item>
 <ns2:attribute>LocationId</ns2:attribute>
 <ns2:operator>=</ns2:operator>
 <ns2:value>958</ns2:value>
 </ns2:item>
 </ns2:group>
 </ns2:filter>
 <ns2:findAttribute>City</ns2:findAttribute>
 <ns2:findAttribute>State</ns2:findAttribute>
 <ns2:findAttribute>Province</ns2:findAttribute>
 <ns2:findAttribute>Country</ns2:findAttribute>
 <ns2:findAttribute>LocationId</ns2:findAttribute>
 <ns2:findAttribute>LocationProfile</ns2:findAttribute>
 </ns1:findCriteria>
 </ns1:findLocation>
 </soap:Body>
</soap:Envelope>
```

To include only a subset of the elements from the `LocationProfile` child object, use the `childFindCriteria` element and specify the elements to be included using the `findAttribute` element.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:findLocation
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/
 applicationModule/types/">
 <ns1:findCriteria xmlns:ns2="http://xmlns.oracle.com/adf/svc/types/">
 <ns2:filter>
 <ns2:group>
 <ns2:item>
 <ns2:attribute>LocationId</ns2:attribute>
 <ns2:operator>=</ns2:operator>
 <ns2:value>958</ns2:value>
 </ns2:item>
 </ns2:group>
 </ns2:filter>
 <ns2:findAttribute>City</ns2:findAttribute>
 <ns2:findAttribute>State</ns2:findAttribute>
 <ns2:findAttribute>Province</ns2:findAttribute>
 <ns2:findAttribute>Country</ns2:findAttribute>
 <ns2:findAttribute>LocationId</ns2:findAttribute>
 <ns2:findAttribute>LocationProfile</ns2:findAttribute>
 <ns2:childFindCriteria>
 <ns2:findAttribute>LocationProfileId</ns2:findAttribute>
 <ns2:findAttribute>EffectiveStartDate</ns2:findAttribute>
 <ns2:findAttribute>EffectiveEndDate</ns2:findAttribute>
 <ns2:childAttrName>LocationProfile</ns2:childAttrName>
 </ns2:childFindCriteria>
 </ns1:findCriteria>
 </ns1:findLocation>
 </soap:Body>
</soap:Envelope>
```

The response payload returns only the `LocationProfileId`, `EffectiveStartDate`, and `EffectiveEndDate` of the `LocationProfile` object, along with the attributes corresponding to the `findAttributes` element.

```
<ns0:findLocationResponse xmlns=""
xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/
applicationModule/types/" xmlns:wsa="http://www.w3.org/2005/08/addressing"
xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">
 <ns2:result xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/"
 xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/
 applicationModule/types/"
 xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/location/"
 xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xsi:type="ns1:LocationResult">
 <ns1:Value>
 <ns1:LocationId>958</ns1:LocationId>
 <ns1:Country>US</ns1:Country>
 <ns1:City>St. Charles</ns1:City>
 <ns1:State>AR</ns1:State>
 <ns1:Province xsi:nil="true"/>
 <ns1:LocationProfile>
 <ns1:LocationProfileId>10035</ns1:LocationProfileId>
 <ns1:EffectiveStartDate>2004-02-23</ns1:EffectiveStartDate>
 <ns1:EffectiveEndDate>4712-12-31</ns1:EffectiveEndDate>
 </ns1:LocationProfile>
 </ns1:Value>
 </ns2:result>
```

```
</ns0:findLocationResponse>
```

Complex Search Criteria at Parent Level

This request payload example searches for locations that have `Country` set to **US** and `State` set to **AK** in the `Location` object.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:findLocation
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/
 locationService/applicationModule/types/">
 <ns1:findCriteria xmlns:ns2="http://xmlns.oracle.com/adf/svc/types/">
 <ns2:fetchStart>0</ns2:fetchStart>
 <ns2:fetchSize>500</ns2:fetchSize>
 <ns2:filter>
 <ns2:group>
 <ns2:item>
 <ns2:conjunction>And</ns2:conjunction>
 <ns2:attribute>Country</ns2:attribute>
 <ns2:operator>=</ns2:operator>
 <ns2:value>US</ns2:value>
 </ns2:item>
 <ns2:item>
 <ns2:conjunction>And</ns2:conjunction>
 <ns2:attribute>State</ns2:attribute>
 <ns2:operator>=</ns2:operator>
 <ns2:value>AK</ns2:value>
 </ns2:item>
 </ns2:group>
 </ns2:filter>
 <ns2:findAttribute>PostalCode</ns2:findAttribute>
 <ns2:findAttribute>City</ns2:findAttribute>
 <ns2:findAttribute>State</ns2:findAttribute>
 <ns2:findAttribute>Province</ns2:findAttribute>
 <ns2:findAttribute>Country</ns2:findAttribute>
 <ns2:findAttribute>LocationId</ns2:findAttribute>
 </ns1:findCriteria>
 </ns1:findLocation>
 </soap:Body>
</soap:Envelope>
```

The response payload contains `PostalCode`, `City`, `State`, `Province`, `Country`, and `LocationId` of the `Location` object.

```
<ns0:findLocationResponse xmlns="" xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/applicationModule/types/"
xmlns:wsa="http://www.w3.org/2005/08/addressing"
xmlns:wsu="http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-wssecurity-utility-1.0.xsd">
 <ns2:result xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/"
 xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/
 applicationModule/types/"
 xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/location/"
 xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns1:LocationResult">
 <ns1:Value>
 <ns1:LocationId>999997516465004</ns1:LocationId>
 <ns1:Country>US</ns1:Country>
 <ns1:City>JUNEAU</ns1:City>
 <ns1:PostalCode>99801-7814</ns1:PostalCode>
 <ns1:State>AK</ns1:State>
 <ns1:Province xsi:nil="true"/>
 </ns1:Value>
 <ns1:Value>
```

```
<ns1:LocationId>999997516000512</ns1:LocationId>
<ns1:Country>US</ns1:Country>
<ns1:City>KOTZEBUE</ns1:City>
<ns1:PostalCode>99752</ns1:PostalCode>
<ns1:State>AK</ns1:State>
<ns1:Province xsi:nil="true"/>
</ns1:Value>
<ns1:Value>
<ns1:LocationId>999997518214847</ns1:LocationId>
<ns1:Country>US</ns1:Country>
<ns1:City>ANCHORAGE</ns1:City>
<ns1:PostalCode>99518-1074</ns1:PostalCode>
<ns1:State>AK</ns1:State>
<ns1:Province xsi:nil="true"/>
</ns1:Value>
...
```

Search Criteria with Dependency on Child Data

This example shows how to select parent objects based on search criteria applied to the child objects. The request payload finds all the locations that are in the state of Alaska in the United States, and have an effective date of 1950-04-12 or later in the `LocationProfile` child object entity. The response payload returns the `LocationId` and `Country` attributes in the `Location` object, and the `EffectiveStartDate` and `LocationId` attributes in the `LocationProfile` child object.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:findLocation
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/
 locationService/applicationModule/types/">
 <ns1:findCriteria xmlns:ns2="http://xmlns.oracle.com/adf/svc/types/">
 <ns2:fetchStart>0</ns2:fetchStart>
 <ns2:fetchSize>500</ns2:fetchSize>
 <ns2:filter>
 <ns2:group>
 <ns2:item>
 <ns2:attribute>Country</ns2:attribute>
 <ns2:operator>=</ns2:operator>
 <ns2:value>US</ns2:value>
 </ns2:item>
 <ns2:item>
 <ns2:conjunction>And</ns2:conjunction>
 <ns2:attribute>State</ns2:attribute>
 <ns2:operator>=</ns2:operator>
 <ns2:value>AK</ns2:value>
 </ns2:item>
 <ns2:item>
 <ns2:conjunction>And</ns2:conjunction>
 <ns2:attribute>LocationProfile</ns2:attribute>
 <ns2:nested>
 <ns2:group>
 <ns2:item>
 <ns2:attribute>EffectiveStartDate</ns2:attribute>
 <ns2:operator>ONORAFTER</ns2:operator>
 <ns2:value>1950-04-12</ns2:value>
 </ns2:item>
 </ns2:group>
 </ns2:nested>
 </ns2:item>
 </ns2:group>
 </ns2:filter>
 <ns2:findAttribute>LocationId</ns2:findAttribute>
 <ns2:findAttribute>Country</ns2:findAttribute>
 <ns2:findAttribute>State</ns2:findAttribute>
```

```
 <ns2:findAttribute>LocationProfile</ns2:findAttribute>
 <ns2:childFindCriteria>
 <ns2:findAttribute>EffectiveStartDate</ns2:findAttribute>
 <ns2:findAttribute>LocationProfileId</ns2:findAttribute>
 <ns2:childAttrName>LocationProfile</ns2:childAttrName>
 </ns2:childFindCriteria>
 </ns1:findCriteria>
 </ns1:findLocation>
 </soap:Body>
</soap:Envelope>
```

Search Criteria at Child Level

This example shows how to apply search criteria at parent and child levels. The request payload selects the first 500 locations in the state of Alaska in the United States. The response payload returns `PostalCode`, `City`, `State`, `Province`, `Country`, and `LocationId` attributes for the `Location` object. It also returns `Country`, `FloorNumber`, `City`, `State`, `Province`, and `EffectiveStartDate` attributes for the `LocationProfile`, if the `EffectiveStartDate` is equal to or later than **1950-04-12**.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:findLocation
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/
 locationService/applicationModule/types/">
 <ns1:findCriteria xmlns:ns2="http://xmlns.oracle.com/adf/svc/types/">
 <ns2:fetchStart>0</ns2:fetchStart>
 <ns2:fetchSize>500</ns2:fetchSize>
 <ns2:filter>
 <ns2:group>
 <ns2:item>
 <ns2:attribute>Country</ns2:attribute>
 <ns2:operator>=</ns2:operator>
 <ns2:value>US</ns2:value>
 </ns2:item>
 <ns2:item>
 <ns2:conjunction>And</ns2:conjunction>
 <ns2:attribute>State</ns2:attribute>
 <ns2:operator>=</ns2:operator>
 <ns2:value>AK</ns2:value>
 </ns2:item>
 </ns2:group>
 </ns2:filter>
 <ns2:findAttribute>PostalCode</ns2:findAttribute>
 <ns2:findAttribute>City</ns2:findAttribute>
 <ns2:findAttribute>State</ns2:findAttribute>
 <ns2:findAttribute>Province</ns2:findAttribute>
 <ns2:findAttribute>Country</ns2:findAttribute>
 <ns2:findAttribute>LocationId</ns2:findAttribute>
 <ns2:findAttribute>LocationProfile</ns2:findAttribute>
 <ns2:childFindCriteria>
 <ns2:filter>
 <ns2:group>
 <ns2:item>
 <ns2:attribute>EffectiveStartDate</ns2:attribute>
 <ns2:operator>ONORAFTER</ns2:operator>
 <ns2:value>1950-04-12</ns2:value>
 </ns2:item>
 </ns2:group>
 </ns2:filter>
 <ns2:findAttribute>Country</ns2:findAttribute>
 <ns2:findAttribute>FloorNumber</ns2:findAttribute>
 <ns2:findAttribute>City</ns2:findAttribute>
 <ns2:findAttribute>State</ns2:findAttribute>
 <ns2:findAttribute>Province</ns2:findAttribute>
 <ns2:findAttribute>EffectiveStartDate</ns2:findAttribute>
```

```
 <ns2:childAttrName>LocationProfile</ns2:childAttrName>
 </ns2:childFindCriteria>
 </ns1:findCriteria>
 </ns1:findLocation>
 </soap:Body>
</soap:Envelope>
```

Sort the Search Results

This example shows how to sort the search results. The request payload finds the `Location` objects in the state of Alaska in the United States, and sorts them by `PostalCode` in ascending order and then by `City` in descending order. The response payload returns `PostalCode`, `City`, `State`, `Province`, `Country`, and `LocationId` attributes in the `Location` object.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:findLocation
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/
 locationService/applicationModule/types/">
 <ns1:findCriteria xmlns:ns2="http://xmlns.oracle.com/adf/svc/types/">
 <ns2:fetchStart>0</ns2:fetchStart>
 <ns2:fetchSize>500</ns2:fetchSize>
 <ns2:filter>
 <ns2:group>
 <ns2:item>
 <ns2:conjunction>And</ns2:conjunction>
 <ns2:attribute>Country</ns2:attribute>
 <ns2:operator>=</ns2:operator>
 <ns2:value>US</ns2:value>
 </ns2:item>
 <ns2:item>
 <ns2:conjunction>And</ns2:conjunction>
 <ns2:attribute>State</ns2:attribute>
 <ns2:operator>=</ns2:operator>
 <ns2:value>AK</ns2:value>
 </ns2:item>
 </ns2:group>
 </ns2:filter>
 <ns2:sortOrder>
 <ns2:sortAttribute>
 <ns2:name>PostalCode</ns2:name>
 </ns2:sortAttribute>
 <ns2:sortAttribute>
 <ns2:name>City</ns2:name>
 <ns2:descending>true</ns2:descending>
 </ns2:sortAttribute>
 </ns2:sortOrder>
 <ns2:findAttribute>PostalCode</ns2:findAttribute>
 <ns2:findAttribute>City</ns2:findAttribute>
 <ns2:findAttribute>State</ns2:findAttribute>
 <ns2:findAttribute>Province</ns2:findAttribute>
 <ns2:findAttribute>Country</ns2:findAttribute>
 <ns2:findAttribute>LocationId</ns2:findAttribute>
 </ns1:findCriteria>
 </ns1:findLocation>
 </soap:Body>
</soap:Envelope>
```

Related Topics

Use Lookups

The attribute description of a service data object may contain references to a lookup type to indicate valid values for that attribute. For example, the `CustomerCategoryCode` attribute of the Trading Community Customer Account Site service data object contains reference to `ADDRESS_CATEGORY` lookup type.

To view the lookup codes:

1. Go to the **Setup and Maintenance** work area, and open the **Manage Standard Lookups** task.
2. Search for the `ADDRESS_CATEGORY` lookup type.
3. Select the lookup type in the search results. The lookup codes displayed for the `ADDRESS_CATEGORY` lookup type are the valid values for the `CustomerCategoryCode` attribute.
4. Select the appropriate value and pass it to the operation request payload for the Trading Community Account Customer service.

Related Topics

7 SOAP Web Services Initiation

Clients for Initiating SOAP Web Services

SOAP web services in Oracle Applications Cloud can be invoked by using various clients.

- *Java Client*
- *Oracle Database*
- *.NET Framework*
- *Php*
- *Perl*
- *Python*
- *Ruby*

Java Client

Use JAVA clients such as HTTP, static proxy, and dynamic proxy to invoke web services.

- HTTP Client: Constructs the HTTP request and handles the HTTP response. This can only use basic authentication over SSL.
- Static Proxy Client: Requires proxy code generation at the client side. So, the client doesn't have to maintain the code, and can use the java objects to handle a request.
- Dynamic Proxy Client: Requires SOAP messages instead of objects.

Related Topics

HTTP Client

You can create a HTTP client, which uses the HTTPS protocol, to invoke a web service.

The following is a sample client code to:

1. Construct an xml payload to invoke the *find* operation on the Expense Item and Expense Report service.
2. Open an `HTTPUrlConnection` to the service.
3. Configure the request content type to `xml` and HTTP method to `POST`.
4. Configure the request to use basic authentication, with a user name and a password to invoke the service.
5. Write the xml payload to the connection as request.
6. Receive the response from the connection, and print the output.

To run this sample code, you must:

- Get the hostname and port for the Expense Item and Expense Report service using the *Developer Connect* portal.

  To use the sample code to invoke a different business object service, replace with the corresponding service endpoint URL. For example, replace `HOST` with **your-host-name:your-port** and `SVC_RELPATH` with **/finExmSharedCommon/ExpenseService**.

- Update the user name and password ("*username*:*password*") with a valid user name and password for your cloud instance.
- Import the certificate from the server into the client trust store using the keytool command.

```
public static void http_client() throws Exception {
System.out.println("Invoke service using direct HTTP call with Basic Auth");
String payload =
"<soap:Envelope xmlns:soap=\"http://schemas.xmlsoap.org/soap/envelope/\">\n" +
" <soap:Header>\n" +
" <fmw-context xmlns=\"http://xmlns.oracle.com/fmw/context/1.0\"/>\n" +
" </soap:Header>\n" +
" <soap:Body>\n" +
" <ns1:findExpense xmlns:ns1=\"http://xmlns.oracle.com/apps/financials/expenses/shared/common/
expenseExternalService/types/\">\n" +
" <ns1:findCriteria xmlns:ns2=\"http://xmlns.oracle.com/adf/svc/types/\">\n" +
" <ns2:fetchStart>0</ns2:fetchStart>\n" +
" <ns2:fetchSize>2</ns2:fetchSize>\n" +
" <ns2:excludeAttribute>true</ns2:excludeAttribute>\n" +
" </ns1:findCriteria>\n" +
" <ns1:findControl xmlns:ns2=\"http://xmlns.oracle.com/adf/svc/types/\">\n" +
" <ns2:retrieveAllTranslations>true</ns2:retrieveAllTranslations>\n" +
" </ns1:findControl>\n" +
" </ns1:findExpense>\n" +
" </soap:Body>\n" +
"</soap:Envelope>";

httpPost("https://" + HOST + SVC_RELPATH + "?invoke=", payload,
"username:password");
}
private static String httpPost(String destUrl, String postData,
String authStr) throws Exception {
URL url = new URL(destUrl);
HttpURLConnection conn = (HttpURLConnection)url.openConnection();
if (conn == null) {
return null;
}
conn.setRequestProperty("Content-Type", "text/xml; charset=UTF-8");
conn.setDoOutput(true);
conn.setDoInput(true);
conn.setUseCaches(false);
conn.setFollowRedirects(true);
conn.setAllowUserInteraction(false);
conn.setRequestMethod("POST");

byte[] authBytes = authStr.getBytes("UTF-8");
String auth = com.sun.org.apache.xml.internal.security.utils.Base64.encode(authBytes);
conn.setRequestProperty("Authorization", "Basic " + auth);


System.out.println("post data size:" + postData.length());


OutputStream out = conn.getOutputStream();
OutputStreamWriter writer = new OutputStreamWriter(out, "UTF-8");
writer.write(postData);
writer.close();
out.close();

System.out.println("connection status: " + conn.getResponseCode() +
"; connection response: " +
conn.getResponseMessage());

InputStream in = conn.getInputStream();
InputStreamReader iReader = new InputStreamReader(in);
```

```
BufferedReader bReader = new BufferedReader(iReader);

String line;
String response = "";
System.out.println("==================Service response: ================ ");
while ((line = bReader.readLine()) != null) {
System.out.println(line);
response += line;
}
iReader.close();
bReader.close();
in.close();
conn.disconnect();


return response;
}
```

Related Topics

Static JAX-WS Proxy Client

Oracle JDeveloper provides design-time support to generate a static JAX-WS proxy client to invoke a web service. In JDeveloper, you can create an application with a project and then create a new **Web Service Proxy** by selecting **Business Tier** > **Web Services** in the **New Gallery** page. Creating the proxy generates client-side proxy classes. You can then write client-side code to invoke the required service.

For more information, see *Creating a Web Service Proxy*.

```
public class SvcInvoker {
 @WebServiceRef
 private static ExpenseService_Service expenseService_Service;


 public static void main(String[] args) throws ServiceException, Exception {
 expenseService_Service = new ExpenseService_Service();
 SecurityPolicyFeature[] features =
 new SecurityPolicyFeature[] { new SecurityPolicyFeature("policy:oracle/
wss_username_token_over_ssl_client_policy") };
 //or any other policy, as required
 ExpenseService expenseService =
 expenseService_Service.getExpenseServiceSoapHttpPort(features);
 ……//security setting code goes here
 //invoke the service
 FindCriteria fc = new FindCriteria();
 fc.setFetchSize(1);
 List<Expense> exps = expenseService.findExpense(fc, null);
 if (exps != null && !exps.isEmpty()) {
 Expense exp = exps.get(0);
 //access the expenses
 } else
 System.out.println("No expenses");
 }
}
```

Client-Side Security Policy

You must configure the security setting based on the client-side security policy used to invoke a service.

- Transport Layer security policies:
  - `oracle/wss_username_token_over_ssl_client_policy`
  - `oracle/wss_http_token_over_ssl_client_policy`
  - `oracle/wss_saml_token_bearer_over_ssl_client_policy`
- Message protection policies:
  - `oracle/wss11_username_token_with_message_protection_client_policy`
  - `oracle/wss11_saml_token_with_message_protection_client_policy`

For the transport layer security policies, the client uses the Secure Socket Layer (SSL) protocol on the server to invoke a web service. In Oracle Applications Cloud, the SSL protocol is enabled on the server by default. To use the message protection policies, the client imports the public key certificate from the server.

If the client side maintains the user identity to invoke a service, the username token policies are easier to use than the SAML token policies. The SAML token policies support identity propagation, but require certificate exchange between the server and the client, unless all of the following are true:

- Client signing certificate is issued from a Certificate Authority (CA)
- CA certificate is in the server trust store
- SAML assertion carry the signing certificate

If the client-side is on the Oracle Applications Cloud, for example, when the client is deployed in Java Cloud Service, and linked to the corresponding Oracle Applications Cloud instance, the certificate exchange is already configured. You need to decide which client-side policy to use, based on the nature of the client and the requirements of each policy.

Security Configuration

The security configuration required for different client-side security policies are as follows:

oracle/wss_username_token_over_ssl_client_policy

For this policy, the service endpoint URL must use HTTPS protocol, and no configuration is required. The static proxy client-side code specifies the user name and password:

```
WSBindingProvider wsbp = (WSBindingProvider)expenseService;
Map<String, Object> requestContext = wsbp.getRequestContext();

requestContext.put(com.sun.xml.ws.developer.WSBindingProvider.USERNAME_PROPERTY,
"user");

requestContext.put(com.sun.xml.ws.developer.WSBindingProvider.PASSWORD_PROPERTY, "password");
```

Though this is the simplest method, the recommended method is to store the user name and password in a credential store, and use a `csf-key` to refer to the entry in the credential store. Use Oracle JDeveloper to create a credential store when you are generating the web service proxy. You can also edit the properties of the proxy object after it is generated by selecting **Override Properties** > **New Key**.

- `cwallet.sso` file: Credential store

- `jps-config.xml` file: Security context of your program. It contains the entry pointing to the `cwallet.sso` credential store.

The client-side code must specify the location of the `jps-config.xml` file and the `csf-key` value.

```
System.setProperty("oracle.security.jps.config", "path_to_jps-config.xml");
expenseService_Service = new ExpenseService_Service();
SecurityPolicyFeature[] features = new SecurityPolicyFeature[] {
 new SecurityPolicyFeature("policy: oracle/wss_username_token_over_ssl_client_policy " };
ExpenseService expenseService =
 expenseService_Service.getExpenseServiceSoapHttpPort(features);
WSBindingProvider wsbp = (WSBindingProvider)expenseService;
Map<String, Object> requestContext = wsbp.getRequestContext();
requestContext.put(SecurityConstants.ClientConstants.WSS_CSF_KEY, "csf-key");
```

oracle/wss_http_token_over_ssl_client_policy

The requirements for this policy are same as the `oracle/wss_username_token_over_ssl_client_policy` policy. While this policy sets the authentication information in the HTTP header, the `oracle/wss_username_token_over_ssl_client_policy` policy sets the authentication information in the SOAP header.

oracle/wss_saml_token_bearer_over_ssl_client_polic

This policy uses SAML token, and requires a keystore in the client that contains the client signing and encryption keys. The server needs to import the public key certificate from the client.

- Generate keystore in the client: Use keytool provided by JDK to generate the keystore, which stores the security certificate. To generate a `.jks` file, which is the keystore:

  ```
  keytool -genkeypair -keyalg RSA -alias mycompkey -keypass password -keystore
  mycompclient-keystore.jks -storepass password -validity 3600
  ```

- Export certificate from the client: Use the following keytool command to export the certificate:

  ```
  keytool -exportcert -alias mycompkey -file clientpubkey.cer -keystore mycompclient-keystore.jks -
  storepass password
  ```

- Import certificate to the server: Use the following keytool command to import the certificate generated by the client to the server keystore as a trusted certificate entry:

  ```
  keytool -importcert -alias clientkey -file clientpubkey.cer -keystore default-keystore.jks -
  storepass password
  ```

- Add keystore to the client security context: The proxy client-side code must provide the keystore, signing key and encryption key that are protected by passwords. Use Oracle JDeveloper to import the keystore, set the password, and set the keystore in the client-side security context.
- Proxy client-side code: The `WSSEC_SIG_KEY_ALIAS` and `WSSEC_ENC_KEY_ALIAS` are used to specify the signing and encrypting private keys on the client side. This private key must be the same as the one used to generate the certificate. This code request uses SAML token, so the user name is passed but not the password. The client-side code can configure the security as:

  ```
  System.setProperty("oracle.security.jps.config", " path_to_jps-config.xml");
  String policy = "oracle/wss_saml_token_bearer_over_ssl_client_policy";
  expenseService_Service = new ExpenseService_Service();
  SecurityPolicyFeature[] features =
   new SecurityPolicyFeature[] { new SecurityPolicyFeature("policy:" + policy) };
  ExpenseService expenseService =
   expenseService_Service.getExpenseServiceSoapHttpPort(features);

  WSBindingProvider wsbp = (WSBindingProvider)expenseService;
  Map<String, Object> requestContext = wsbp.getRequestContext();
  ```

```
//client-side private signing key
requestContext.put(ClientConstants.WSSEC_SIG_KEY_ALIAS, "mycompkey");
//client-side private encryption key
requestContext.put(ClientConstants.WSSEC_ENC_KEY_ALIAS, "mycompkey");
//location of the keystore file
requestContext.put(ClientConstants.WSSEC_KEYSTORE_LOCATION,
 "path_to_ mycompclient-keystore.jks");
requestContext.put(WSBindingProvider.USERNAME_PROPERTY, "username");
```

oracle/wss11_username_token_with_message_protection_client_policy

Using this policy, the web service consumer inserts username and password credentials, and signs and encrypts the outgoing SOAP message. The web service provider decrypts and verifies the message and the signature. This policy requires that the client imports the public key from the server.

- Generate keystore in the client: Use keytool provided by JDK to generate the keystore, which stores the security certificate. To generate a `.jks` file, which is the keystore:

  ```
  keytool -genkeypair -keyalg RSA -alias mycompkey -keypass password -keystore
  mycompclient-keystore.jks -storepass password -validity 3600
  ```

- Generate public key certificate: The client requires the public key from the server. The WSDL file contains the certificate in the `wsdl:service/wsdl:port/wsa:EndpointReference/wsid:Identity/dsig:keyInfo/dsig:X509Data/dsig:X509Certificate` element. Create a text file and enclose the certificate element with ---- BEGIN CERTIFICATE ---- and ---- END CERTIFICATE ---- statements. Save this text file as `pk.cer`.

  ```
  <wsdl:service name="ExpenseService">
   <wsdl:port name="ExpenseServiceSoapHttpPort" binding="tns:ExpenseServiceSoapHttp">
   ....
   <wsa:EndpointReference xmlns:wsa="http://www.w3.org/2005/08/addressing">
   <wsid:Identity xmlns:wsid="http://schemas.xmlsoap.org/ws/2006/02/addressingidentity">
   <dsig:KeyInfo xmlns:dsig="http://www.w3.org/2000/09/xmldsig#">
   <dsig:X509Data>
  <dsig:X509Certificate>MIICHTCCAYagAwIBAgIEUG1GfDANBgkqhkiG9w0BAQUFADBTMR
  MwEQYKCZImiZPyLGQBGRYDY29tMRYwFAYKCZImiZPyLGQBGRYGb3JhY2xlMRIwEA
  YKCZImiZPyLGQBGRYCdXMxEDAOBgNVBAMTB3NlcnZpY2UwHhcNMTIxMDA0MDgx
  OTA4WhcNMTUxMDA0MDgxOTA4WjBTMRMwEQYKCZImiZPyLGQBGRYDY29tMRYw
  FAYKCZImiZPyLGQBGRYGb3JhY2xlMRIwEAYKCZImiZPyLGQBGRYCdXMxEDAOBgN
  VBAMTB3NlcnZpY2UwgZ8wDQYJKoZIhvcNAQEBBQADgY0AMIGJAoGBAMvYgi3PpA9T
  vD6YptxWZDy6nusDfJYrQe5Q3cYjtR54exM8Ju29z2Mtk98HEZXMs2+GqNO7Ms8QZQ2Owl
  nuS0VZNMUQu3MkjM4UKyK+37H32jud3HP5jigpJARgtxfH1Z1RK4VovU1VFPeRULG+7em
  CvdfOks5o6dTPmH1xpsXLAgMBAAEwDQYJKoZIhvcNAQEFBQADgYEAguzjcfLzQUH5d
  O4jER9g4xrmjxZrKo8YC2xxGKzpxuMSg3EUhUPOznzZFv09+sIO2UFGpPV5NqNWlvFqej3
  VBSal2HfGUQgMRe+kPV6ysAWvZ4T1pOxj4NDeWRUMjgjt14OXEOxifPbLhvOmiC8dD9d
  FwcdWh7lMMcwz0VM9F0M=</dsig:X509Certificate>
  </dsig:X509Certificate>
  ......
  ```

- Import certificate to the client: Use the following keytool command to import the certificate to the client keystore:

  ```
  keytool -importcert -alias pubkey -file pk.cer -keystore mycompclient-keystore.jks -storepass password
  ```

- Configure client security context: The proxy client-side code must provide the keystore, signing key and encryption key that are protected by password. Use Oracle JDeveloper to create the `csf-key` that stores the user/password, import the keystore, and then set the password and keystore in the client-side security context.
- Proxy client-side code: The client-side code can now configure the security as:

  ```
  System.setProperty("oracle.security.jps.config", " path_to_jps-config.xml");
  String policy = "oracle/wss11_username_token_with_message_protection_client_policy";
  expenseService_Service = new ExpenseService_Service();

  SecurityPolicyFeature[] features =
  ```

```
 new SecurityPolicyFeature[] { new SecurityPolicyFeature("policy:" + policy) };
ExpenseService expenseService =
 expenseService_Service.getExpenseServiceSoapHttpPort(features);

WSBindingProvider wsbp = (WSBindingProvider)expenseService;
Map<String, Object> requestContext = wsbp.getRequestContext();

//location of the keystore file
requestContext.put(ClientConstants.WSSEC_KEYSTORE_LOCATION,
 "path_to_mycomp-keystore.jks");

requestContext.put(SecurityConstants.ClientConstants.WSS_CSF_KEY, "csf-key");
```

oracle/wss11_saml_token_with_message_protection_client_policy

This policy uses both message protection and SAML token. To configure message protection, the client-side keystore must import the public key certificate from the server. To use SAML token, the server must import the certificate from the client.

- Generate keystore in the client: Use keytool to generate the keystore, which manages the private and public keys:
  `keytool -genkeypair -keyalg RSA -alias mycompkey -keypass password -keystore mycompclient-keystore.jks -storepass password -validity 3600`
- Generate server-side public key certificate: For this policy, the client requires the public key generated on the server side. The WSDL file contains the certificate in the `wsdl:service/wsdl:port/wsa:EndpointReference/wsid:Identity/dsig:keyInfo/dsig:X509Data/dsig:X509Certificate` element. Create a text file and enclose the certificate element with ---- BEGIN CERTIFICATE ---- and ---- END CERTIFICATE ---- statements. Save this text file as `pk.cer`.
- Import certificate to the client: Use the following keytool command to import the certificate generated by the server to the client keystore:`keytool -importcert -alias pubkey -file pk.cer -keystore mycompclient-keystore.jks -storepass password`
- Export certificate from the client: Use the following keytool command to export the certificate:`keytool -exportcert -alias mycompkey -file clientpubkey.cer -keystore mycompclient-keystore.jks -storepass password`
- Import client-side certificate to server: Use the following keytool command to import the certificate generated by the client to the server keystore as a trusted certificate entry:`keytool -importcert -alias clientkey -file clientpubkey.cer -keystore default-keystore.jks -storepass password`
- Configure client security context: The proxy client-side code must provide the keystore, signing key, and encryption key that are protected by password. Use Oracle JDeveloper to import the keystore, and then set the password and keystore in the client-side security context.
- Proxy client-side code: The `WSSEC_SIG_KEY_ALIAS` and `WSSEC_ENC_KEY_ALIAS` are used to specify the signing and encrypting private keys on the client side. This private key must be the same as the one used to generate the certificate. This code request uses SAML token, so the user name is passed but not the password. The client-side code can configure the security as:

  > **Note:** This sample code works only in a JSE environment. In JEE environment, usually the current user is propagated to the server. The client and server need to share identity store, use identity federation, or the client side uses Security Token Service (STS) to map the client credential to the server credential.

```
System.setProperty("oracle.security.jps.config", "path_to_jps-config.xml");
String policy = "oracle/wss11_saml_token_with_message_protection_client_policy";
expenseService_Service = new ExpenseService_Service();
SecurityPolicyFeature[] features =
 new SecurityPolicyFeature[] { new SecurityPolicyFeature("policy:" +policy)};
```

```
ExpenseService expenseService =
 expenseService_Service.getExpenseServiceSoapHttpPort(features);

WSBindingProvider wsbp = (WSBindingProvider)expenseService;
Map<String, Object> requestContext = wsbp.getRequestContext();

requestContext.put(ClientConstants.WSSEC_SIG_KEY_ALIAS, "mycompkey");
requestContext.put(ClientConstants.WSSEC_ENC_KEY_ALIAS, "mycompkey");
//location of the keystore file
requestContext.put(ClientConstants.WSSEC_KEYSTORE_LOCATION,
 " path_to_mycomp-keystore.jks");
requestContext.put(WSBindingProvider.USERNAME_PROPERTY, "username");
```

Related Topics

Dynamic Dispatch Client

To dynamically invoke web services, you can create a Dispatch client and configure:

- Security properties depending on the security policy to be used
- Keystore requirements

The following is an example code:

```
System.setProperty("oracle.security.jps.config", "path_to_jps-config.xml");
 QName qname = new QName(svcns, svcname);
 Service service = Service.create(new URL(endpointURL + WSDL_URL_SUFFIX), qname);
 QName portname = new QName(svcns, portname);
 SecurityPolicyFeature[] features =
 new SecurityPolicyFeature[] { new SecurityPolicyFeature("policy:" + policy) };
 Dispatch<SOAPMessage> dispatcher =
 service.createDispatch(portname, SOAPMessage.class, Service.Mode.MESSAGE, features);

 Map<String, Object> rc = dispatcher.getRequestContext();
 if (!policy.contains("saml"))
 rc.put(SecurityConstants.ClientConstants.WSS_CSF_KEY, "csf-key");
 else
 rc.put(BindingProvider.USERNAME_PROPERTY, username);
 //only these two don't need keystore
 if ("oracle/wss_http_token_over_ssl_client_policy".equals(policy) ||
 "oracle/wss_username_token_over_ssl_client_policy".equals(policy)) {
 } else {
 //location of the keystore file
 rc.put(ClientConstants.WSSEC_KEYSTORE_LOCATION, jksFPath);
 }

 if (policy.contains("saml")) {
 //client side private key, keystore sign alias; without this, invoking service at client side fails
 rc.put(ClientConstants.WSSEC_SIG_KEY_ALIAS, signKey);

 //client side private key; without this, the user cannot be authenticated

 rc.put(ClientConstants.WSSEC_ENC_KEY_ALIAS, encKey);
 }
 }

 // Obtain a preconfigured SAAJ MessageFactory
 MessageFactory factory = ((SOAPBinding)dispatcher.getBinding()).getMessageFactory();

 // Create SOAPMessage Request
 SOAPMessage req = factory.createMessage();
 // Request Body
 SOAPBody body = req.getSOAPBody();
```

```
// Construct request
DocumentBuilder docBuilder = getDocumentBuilder();
ByteArrayInputStream is = new ByteArrayInputStream(requestStr.getBytes());
try {
Document doc = docBuilder.parse(is);
body.addDocument(doc);
} catch (Exception e) {
throw new RuntimeException("Cannot parse " + requestStr, e);
}

//invoke the service
SOAPMessage res = dispatcher.invoke(req);
//get response
if (res != null) {
ByteArrayOutputStream os = new ByteArrayOutputStream();
res.writeTo(os);
}
```

Related Topics

Oracle Database

Use the various functionalities of Oracle database such as APEX_WEB_SERVICE, UTL_HTTP package, and Application Express (Apex) to invoke SOAP web services.

APEX Web Service

Use APEX_WEB_SERVICE to invoke web services on a database with Application Express (APEX) schema.

The following is a sample client code to:

1. Construct an xml payload to invoke the service. This example code passes a hard coded string to the request.
2. Invoke the service using the APEX_WEB_SERVICE API, which in turn uses the UTL_HTTP package.
3. Receive the response and process it. This example code just prints the response.

```
declare
 l_result XMLTYPE;
 l_envelope CLOB;
BEGIN
 -- Construct xml payload to invoke the service. In this example, it is a hard coded string.
 l_envelope := '<?xml version="1.0" encoding="UTF-8"?>
 <soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
 xmlns:xsi="http ://www.w3.org/2001/XMLSchema-instance"
 xmlns:xsd="http://www.w3.org/2001/XMLSchema">
 <soap:Body>
 <findRule
 xmlns="http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/creditRuleService/ty
 pes/">
 <findCriteria>
 <fetchStart xmlns="http://xmlns.oracle.com/adf/svc/types/">0</fetchStart>
 <fetchSize xmlns="http://xmlns.oracle.com/adf/svc/types/">-1</fetchSize>
 <filter xmlns="http://xmlns.oracle.com/adf/svc/types/">
 <group>
 <upperCaseCompare>false</upperCaseCompare>
 <item>
 <upperCaseCompare>false</upperCaseCompare>
 <attribute>RuleId</attribute>
 <operator>=</operator>
 <value>300000000851162</value>
 </item>
```

```
 </group>
 </filter>
 <excludeAttribute xmlns="http://xmlns.oracle.com/adf/svc/types/">false</excludeAttribute>
 </findCriteria>
 <findControl>
 <retrieveAllTranslations
 xmlns="http://xmlns.oracle.com/adf/svc/types/">false</retrieveAllTranslations>
 </findControl>
 </findRule>
 </soap:Body>
 </soap:Envelope>';
 -- Call the web service
 l_result := apex_web_service.make_request(
 p_url => 'https://host:port/icCnSetupCreditRulesPublicService/CreditRuleService?wsdl',
 p_action => 'http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/
creditRuleService/findRule',
 p_envelope => l_envelope,
 p_username => 'username',
 p_password => 'password' );
 dbms_output.put_line(l_result.getClobVal());
END;
```

UTL_HTTP Package

Use UTL_HTTP package over HTTPS to invoke a SOAP web service by constructing and processing the XML payload. Configure the following before using the UTL_HTTP package:

- Access to the database network
- Create wallet containing the certificate if you want to access the web service over SSL

For more information, refer to Fusion Middleware Administrator's Guide available at *Oracle Help Center*. The following is a sample client code to:

1. Construct an xml payload to invoke the service. This example code passes a hard coded string to the request.
2. Set the Oracle Wallet used for the request. This wallet must contain the certificate for the server that hosts the service, and is used to access the service using HTTPS.
3. Create a new HTTP request for the `POST` method.
4. Configure the request to use the authentication information to invoke the service.
5. Configure the request content type to `xml`, HTTP method to `POST`, and set the content length.
6. Set the `SOAPAction` to be invoked. Though the call works without this value, it is a recommended standard.
7. Write the xml payload to the connection as request.
8. Receive the response and process it. This example code only prints the response.

```
DECLARE
 -- Construct xml payload to invoke the service. In this example, it is a hard coded string.
 l_envelope VARCHAR2(32767) := '<soap:Envelope
 xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"

 xmlns:xsd="http://www.w3.org/2001/XMLSchema">
 <soap:Body>
 <findRule
xmlns="http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/creditRuleService/ty
pes/">
 <findCriteria>
 <fetchStart
xmlns="http://xmlns.oracle.com/adf/svc/types/">0</fetchStart>
 <fetchSize xmlns="http://xmlns.oracle.com/adf/svc/types/">-
 1</fetchSize>
 <filter xmlns="http://xmlns.oracle.com/adf/svc/types/">
 <group>
 <upperCaseCompare>false</upperCaseCompare>
 <item>
```

```
 <upperCaseCompare>false</upperCaseCompare>
 <attribute>RuleId</attribute>
 <operator>=</operator>
 <value>300000000851162</value>
 </item>
 </group>
 </filter>
 <excludeAttribute
xmlns="http://xmlns.oracle.com/adf/svc/types/">false</excludeAttribute>
 </findCriteria>
 <findControl>
 <retrieveAllTranslations
xmlns="http://xmlns.oracle.com/adf/svc/types/">false</retrieveAllTranslations>
 </findControl>
 </findRule>
 </soap:Body>
 </soap:Envelope>';
l_result VARCHAR2(32767) := null;
l_http_request UTL_HTTP.req;
l_http_response UTL_HTTP.resp;
l_counter PLS_INTEGER;
l_length PLS_INTEGER;
BEGIN
 -- Sets the Oracle wallet used for request; required for HTTPS
 UTL_HTTP.set_wallet('file:/scratch/oradba/wallet', 'password');

 -- Creates a new HTTP request
 l_http_request :=
 UTL_HTTP.begin_request('https://host:port/icCnSetupCreditRulesPublicService/CreditRuleService',
 'POST','HTTP/1.1');

 -- Configure the authentication details
 UTL_HTTP.SET_AUTHENTICATION(l_http_request, 'username', 'password');

 -- Configure the request content type to be xml and set the content length
 UTL_HTTP.set_header(l_http_request, 'Content-Type', 'text/xml');
 UTL_HTTP.set_header(l_http_request, 'Content-Length', LENGTH(l_envelope));

 -- Set the SOAP action to be invoked; while the call works without this, the value is expected to be set
 based on
 standards
 UTL_HTTP.set_header(l_http_request, 'SOAPAction',
 'http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/creditRuleService/findRule');
 -- Write the xml payload to the request
 UTL_HTTP.write_text(l_http_request, l_envelope);

 -- Get the response and process it. In this example, we simply print out the response
 l_http_response := UTL_HTTP.get_response(l_http_request);
 UTL_HTTP.read_text(l_http_response, l_result);
 UTL_HTTP.end_response(l_http_response);
 l_counter := 1;
 l_length := LENGTH(l_result);
 WHILE (l_counter <= l_length) LOOP
 DBMS_OUTPUT.put_line(SUBSTR(l_result, l_counter, 80));
 l_counter := l_counter + 80;
 END LOOP;
END;
/
```

Oracle Application Express (Apex)

Use Apex to integrate the web services by using the Web Service Reference objects. These objects work with the APEX_WEB_SERVICE API to invoke the web services. To define a reference for a ADF business component service, use values such as:

- URL, for example, `https://(ICDomain,Incentive Compensation)/icCnSetupCreditRulesPublicService/CreditRuleService?WSDL`.
- Action: Defines the service and the operation, including the namespace. For example, `{http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/creditRuleService/}RuleAttribute`.
- Basic Authentication: Enable this to pass credentials to a secured service.
- SOAP Envelope: Defines the content to be passed to the service.
- Store Response in Collection: Temporary structure to hold the response from the web service call. Use this object to parse the response XML to be used in the application.

Related Topics

.NET Framework

Use the various features of .NET framework to integrate with the web services in Oracle Applications Cloud.

HttpWebRequest

Use HttpWebRequest to programmatically construct the SOAP envelope and invoke the web service. This Web Proxy approach hides much of the complexity and provides convenience methods, instead of hand-crafting the XML. Some cases may require direct calls with HttpWebRequest. For such cases, the following is an example of a http request to:

1. Construct an xml payload to invoke the service. This example code passes a hard coded string, which is encoded to UTF-8 byte array, to the request.
2. Construct a Base64-encoded string for the credentials of the service call.
3. Create HttpWebRequest connection to the service.
4. Configure the request content type to be `xml`, HTTP method to `POST`, and set the content length.
5. Configure the request to use basic authentication, with Base64-encoded user name and password, to invoke the service.
6. Set the `SOAPAction` to be invoked. Though the service call works without this value, it is a recommended standard.
7. Write the xml payload to the request.
8. Get the response and process it. This example just prints the response.

```
using System;
using System.Text;
using System.Net;
using System.IO;
using System.Xml.Linq;

namespace HttpWebRequestExample1
{
 class Program
 {
 static void Main(string[] args)
 {
 // Construct xml payload to invoke the service. In this example, it is a hard coded string.
```

```
string envelope = "<soap:Envelope xmlns:soap=\"http://schemas.xmlsoap.org/soap/envelope/\" " +
"xmlns:xsi=\"http ://www.w3.org/2001/XMLSchema-instance\" " +
"xmlns:xsd=\"http://www.w3.org/2001/XMLSchema\">" +
"<soap:Body>" +
"<findRule
xmlns=\"http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/creditRuleService/
types/\">" +
"<findCriteria>" +
"<fetchStart
xmlns=\"http://xmlns.oracle.com/adf/svc/types/\">0</fetchStart>" +
"<fetchSize xmlns=\"http://xmlns.oracle.com/adf/svc/types/\">-1</fetchSize>" +
"<filter xmlns=\"http://xmlns.oracle.com/adf/svc/types/\">" +
"<group>" +
"<upperCaseCompare>false</upperCaseCompare>" +
"<item>" +
"<upperCaseCompare>false</upperCaseCompare>" +
"<attribute>RuleId</attribute>" +
"<operator>=</operator>" +
"<value>300000000851162</value>" +
"</item>" +
"</group>" +
"</filter>" +
"<excludeAttribute
xmlns=\"http://xmlns.oracle.com/adf/svc/types/\">false</excludeAttribute>" +
"</findCriteria>" +
"<findControl>" +
"<retrieveAllTranslations
xmlns=\"http://xmlns.oracle.com/adf/svc/types/\">false</retrieveAllTranslations>" +
"</findControl>" +
"</findRule>" +
"</soap:Body>" +
"</soap:Envelope>";
byte[] byteArray = Encoding.UTF8.GetBytes(envelope);

// Construct the base 64 encoded string used as credentials for the service call
byte[] toEncodeAsBytes = System.Text.ASCIIEncoding.ASCII.GetBytes("username" + ":" + "password");
string credentials = System.Convert.ToBase64String(toEncodeAsBytes);

// Create HttpWebRequest connection to the service
HttpWebRequest request =
(HttpWebRequest)WebRequest.Create("https://host:port/icCnSetupCreditRulesPublicService/CreditRuleService");

// Configure the request content type to be xml, HTTP method to be POST, and set the content length
request.Method = "POST";
request.ContentType = "text/xml;charset=UTF-8";
request.ContentLength = byteArray.Length;

// Configure the request to use basic authentication, with base64 encoded user name and password, to invoke
the service.
request.Headers.Add("Authorization", "Basic " + credentials);

// Set the SOAP action to be invoked; while the call works without this, the value is expected to be set
based as per standards
request.Headers.Add("SOAPAction", "http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/
creditRule/creditRuleService/findRule");

// Write the xml payload to the request
Stream dataStream = request.GetRequestStream();
dataStream.Write(byteArray, 0, byteArray.Length);
dataStream.Close();

// Get the response and process it; In this example, we simply print out the response XDocument doc;
using (WebResponse response = request.GetResponse())
{
using (Stream stream = response.GetResponseStream())
{
```

```
doc = XDocument.Load(stream);
}
}
Console.WriteLine(doc);
}
}
}
```

Service Reference

Use Microsoft Visual Studio to create Service Reference and generate a proxy that can invoke web services.

Note: Create Service Reference, and not Web Reference as it may fail due to cyclic references in the service definition.

To integrate with a service, first *generate a Service Reference* and then use the specified service reference name to access the objects generated in the code. In the following example, **FusionServiceReference** is the service reference name. This example shows how to use a generated reference object to find, create, and delete a rule by calling a web service.

```
using System;
using System.ServiceModel.Channels;
using System.ServiceModel;
using ServiceReferenceExample1Client.FusionServiceReference;

namespace ServiceReferenceExample1Client
{
/// <summary>
/// Custom binding that can be used to invoke Fusion Application services secured with OWSM policy
/// </summary>
/// <remarks>
/// This custom binding can be used to invoke Fusion Application services secured with
/// "oracle/wss_username_token_over_ssl_service_policy" OWSM policy
/// </remarks>
public class UsernameTokenOverSslBinding : CustomBinding
{
public override BindingElementCollection CreateBindingElements()
{
BindingElementCollection bindingElements = new BindingElementCollection();
bindingElements.Add(SecurityBindingElement.CreateUserNameOverTransportBindingElement());
MtomMessageEncodingBindingElement messageEncoding = new MtomMessageEncodingBindingElement();
messageEncoding.MessageVersion = MessageVersion.Soap11;
bindingElements.Add(messageEncoding);
HttpsTransportBindingElement transport = new HttpsTransportBindingElement();
bindingElements.Add(transport);
return bindingElements.Clone();
}
}

class Program
{
static void Main(string[] args)
{

EndpointAddress endpointAddress = new EndpointAddress(new
Uri("https://host:port/icCnSetupCreditRulesPublicService/CreditRuleService"));

// Get instance of the service to be invoked
CreditRuleServiceClient crs = new CreditRuleServiceClient(new UsernameTokenOverSslBinding(),
endpointAddress);

// Set the authentication details to be used for the service call
crs.ClientCredentials.UserName.UserName = "username";
crs.ClientCredentials.UserName.Password = "password";
```

```
// Run the test case which includes queries, creates and deletes a rule
callFindRule(crs);
callCreateRule(crs);
Rule rule = callFindRule(crs);
callDeleteRule(crs, rule);
callFindRule(crs);

}

/// <summary>
/// Logic to find a object using a web service call
/// </summary>
/// <param name="crs">Instance of the credit rule service client</param>
/// <returns>Rule with a given name in this case "JRAUTIAI_TEST_RULE1"</returns>
static Rule callFindRule(CreditRuleServiceClient crs)
{
Rule result = null;
try
{
// Populate the objects to be used as parameter
FindCriteria findCriteria = new FindCriteria();
ViewCriteria viewCriteria = new ViewCriteria();
viewCriteria.conjunction = Conjunction.And;
ViewCriteriaRow viewCriteriaRow = new ViewCriteriaRow();
viewCriteriaRow.conjunction = Conjunction.And;
viewCriteriaRow.upperCaseCompare = false;
ViewCriteriaItem viewCriteriaItem = new ViewCriteriaItem();
viewCriteriaItem.conjunction = Conjunction.And;
viewCriteriaItem.upperCaseCompare = false;
viewCriteriaItem.attribute = "Name";
viewCriteriaItem.@operator = "=";
string[] ruleNames = new string[1] { "JRAUTIAI_TEST_RULE1" };
viewCriteriaItem.Items = ruleNames;

ViewCriteriaItem[] vcis = new ViewCriteriaItem[1] { viewCriteriaItem };
viewCriteriaRow.item = vcis;
ViewCriteriaRow[] vcrs = new ViewCriteriaRow[1] { viewCriteriaRow };
viewCriteria.group = vcrs;
findCriteria.filter = viewCriteria;

findCriteria.fetchStart = 0;
findCriteria.fetchSize = -1;
FindControl findControl = new FindControl();

// Call the service with the appropriate parameters
Rule[] rules = crs.findRule(findCriteria, findControl);
if (null != rules && rules.Length > 0)
{
result = rules[0];
foreach (Rule rule in rules)
{
Console.WriteLine("ruleId: " + rule.RuleId + " - orgId: " + rule.OrgId + " - name: " + rule.Name);
}
}
else
{
Console.WriteLine("Rule JRAUTIAI_TEST_RULE1 not found ");
}
}
catch (Exception e)
{
Console.WriteLine(e);
}
return result;
}
```

```
/// <summary>
/// Logic to create a rule, in this case we have hard coded the content of the new rule to simplify the
example
/// </summary>
/// <param name="crs">Instance of the credit rule service client</param>
static void callCreateRule(CreditRuleServiceClient crs)
{
try
{
// Populate the object to be used as parameter
Rule rule = new Rule();
rule.EnabledFlag = true;
rule.OrgId = 300000000678473;
rule.OrgIdSpecified = true;
rule.UsageId = -1001;
rule.UsageIdSpecified = true;
rule.StartDate = new DateTime(2012, 1, 1);
rule.StartDateSpecified = true;
rule.EndDate = new DateTime(2012, 1, 31);
rule.EndDateSpecified = true;
rule.Name = "JRAUTIAI_TEST_RULE1";

// Call the service with the appropriate parameters
Rule result = crs.createRule(rule);
Console.WriteLine("Rule JRAUTIAI_TEST_RULE1 created ");
}
catch (Exception e)
{
Console.WriteLine(e);
}
}

/// <summary>
/// Logic to delete a specific Rule
/// </summary>
/// <param name="crs">Instance of the credit rule service client</param>
/// <param name="rule">Instance of the Rule to be deleted</param>
static void callDeleteRule(CreditRuleServiceClient crs, Rule rule)
{
try
{
// Call the service with the appropriate parameters
crs.deleteRule(rule);
Console.WriteLine("Rule JRAUTIAI_TEST_RULE1 deleted ");
}
catch (Exception e)
{
Console.WriteLine(e);
}
}
}
}
```

Related Topics

PHP

To use PHP to invoke web services, you must create the development environment and enable:

- Soap extension by removing semi-colon (;), which is the comment character, from the line starting with `extension=php_soap.dll`
- SSL extension by removing semi-colon (;) from the line starting with `extension=php_openssl.dll`

Install and configure any of the available PHP development environments.

The following is an example code to create a simple form to call the *SoapClient*:

1. Simple HTML form that contains a button to submit a request and a text area to display the result.
2. Processing logic that branches based on request type. A POST request calls a web service; any other request clears the value of the text area that contains the result.
3. Processing logic that creates a new instance for the soap client.
4. Construct an array structure that contains the parameters to be passed to the web service.
5. Parse the response as XML and assign to a variable that is displayed in the text area for output.

```
<?php
// Process POST requests
if ($_SERVER['REQUEST_METHOD'] == 'POST'){
 try {
 $username ="username";
 $password ="password";
 // Create new instance for the client
 $client = new SoapClient("https://host:port/icCnSetupCreditRulesPublicService/CreditRuleService?wsdl",
 array('trace' => 1,
 'login' => $username,
 'password' => $password));
 // Construct the payload to be used to invoke the service.
 $params = array(
 'findCriteria' => array(
 'fetchStart' => '0',
 'fetchSize' => '-1',
 'filter' => array(
 'group' => array(
 'upperCaseCompare' => 'false',
 'item' => array(
 'upperCaseCompare' => 'false',
 'attribute' => 'RuleId',
 'operator' => '=',
 'value' => '300000000851162')
 )
 ),
 'excludeAttribute' => 'false'
 ),
 'findControl' => array(
 'retrieveAllTranslations' => 'false')
 );
 // Invoke the service
 $response = $client->FindRule($params);

 // Process the response. In this example, the content is copied to a variable that is displayed as output
 $dom = new DOMDocument;
```

```
$dom->preserveWhiteSpace = FALSE;
$dom->loadXML($client->__getLastResponse());
$dom->formatOutput = TRUE;
$dom->saveXml();
$output = $dom->saveXml();
} catch(Exception $e) {
print "Exception: " . $e->getMessage();
}
} else {
// For GET request, set the variable displayed as output
$output = "";
}
?>
<form name="envelope" method="POST">
<!-- Button used to start the processing -->
<input id="invoke_service" type="submit" value="Invoke Service" />
<!-- Text area to display the result for processing. As the result is XML, it is encoded; otherwise it is
not displayed correctly -->
<textarea name="outputpayload" wrap="off" style="width:100%;height:100%" rows=30><?php echo
htmlentities($output);?></textarea>
</form>
```

Related Topics

Perl

Use Perl to invoke web services using various techniques such as `HTTP::Request` and `SOAP::Lite`.

HTTP::Request

Use `HTTP::Request` to directly construct and process the XML for the SOAP web services.

The following is a sample code to:

1. Construct an xml payload to invoke the service. This example code passes a hard coded string, which is encoded to UTF-8 byte array, to the request.
2. Construct a Base64-encoded string for the credentials of the service call.
3. Create a POST request for the service.
4. Configure the request content type to be `xml`, to use basic authentication with Base64-encoded credentials.
5. Set the `SOAPAction` to be invoked. Though the service call works without this value, it is a recommended standard.
6. Write the xml payload to the request.
7. Call the service.
8. Process the response. This example just prints the response.

```
#!/usr/bin/perl -w

use strict;

use LWP::UserAgent;
use HTTP::Request::Common;
use MIME::Base64;

my $ua = LWP::UserAgent->new(agent => 'perl post');

# Construct xml payload to invoke the service. In the example, it is hard coded.
my $envelope = <<END;
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
```

```
 xmlns:xsd="http://www.w3.org/2001/XMLSchema">
 <soap:Body>
 <findRule
 xmlns="http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/creditRuleService/
types/">
 <findCriteria>
 <fetchStart xmlns="http://xmlns.oracle.com/adf/svc/types/">0</fetchStart>
 <fetchSize xmlns="http://xmlns.oracle.com/adf/svc/types/">-1</fetchSize>
 <filter xmlns="http://xmlns.oracle.com/adf/svc/types/">
 <group>
 <upperCaseCompare>false</upperCaseCompare>
 <item>
 <upperCaseCompare>false</upperCaseCompare>
 <attribute>RuleId</attribute>
 <operator>=</operator>
 <value>300000000851162</value>
 </item>
 </group>
 </filter>
 <excludeAttribute xmlns="http://xmlns.oracle.com/adf/svc/types/">false</excludeAttribute>
 </findCriteria>
 <findControl>
 <retrieveAllTranslations xmlns="http://xmlns.oracle.com/adf/svc/types/">false</retrieveAllTranslations>
 </findControl>
 </findRule>
 </soap:Body>
</soap:Envelope>
END

# Construct the base 64 encoded string used as the credentials for the service call.
my $credentials = encode_base64('username:password');
my $url = 'https://host:port/icCnSetupCreditRulesPublicService/CreditRuleService';

# Create new POST request
my $req=new HTTP::Request 'POST',$url;

# Configure the request to use basic authentication, with base64-encoded user name and password to invoke
 the service.
$req->header('Authorization' => "Basic " . $credentials);

# Set the SOAP action to be invoked; while the call works without this, the value is expected to be set
 based on standards
$req->header('SOAPAction' =>
'http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/creditRuleService/findRule');

# Configure the request content type to be xml, HTTP method to be POST, and set the content length
$req->header('Content-Type' => 'text/xml;charset=UTF-8');

# Write the xml payload to the request.
$req->content($envelope);

# Call the service
my $response=$ua->request($req);

# Process the response. In this example, we simply print the response.
print $response->error_as_HTML unless $response->is_success;
print $response->as_string;
```

SOAP::Lite

The following is a `SOAP:Lite` code example to:

1. Create a new of the SOAP Lite.
2. Register the namespaces for the envelope.

3. Create a SOAP header with security information.
4. Call the service.
5. Process the response. This example just prints the response.

```
#!/usr/bin/perl
use lib '/usr/lib/perl5/5.8.8/';
use MIME::Base64;
use SOAP::Lite;

SOAP::Lite->import(trace => debug);

# Create a new instance for the SOAP Lite
my $soap = SOAP::Lite->new(
 proxy => 'http://host:port/hcmEmploymentCoreWorker/WorkerService',
 service => 'http://host:port/hcmEmploymentCoreWorker/WorkerService?wsdl',
 );

# Register namespace(s) for the envelope
my $serializer = $soap->serializer();
$serializer->register_ns( 'http://xmlns.oracle.com/apps/hcm/employment/core/workerService/types/', 'typ' );

# Create SOAP header with security information
my $auth = SOAP::Header->new( name => "wsse:Security" );
$auth->attr( { "xmlns:wsse" => "http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-
wssecuritysecext-1.0.xsd"});
$auth->mustUnderstand(1);
$auth->value( \SOAP::Data->value(
 SOAP::Data->name("wsse:UsernameToken" => \SOAP::Data->value(
 SOAP::Data->name("wsse:Username" => 'username')->type(""),
 SOAP::Data->name("wsse:Password" => 'password')->type("")
 ->attr( {"Type" => "http://docs.oasis-open.org/wss/2004/01/oasis-200401-wss-usernametoken-
profile-1.0#PasswordText"}),
 SOAP::Data->name("wsse:nonce" => 'jwCzGGijT90Wml6eZe4cxg==')->type("")
 ->attr( {"EncodingType" => "http://docs.oasis-open.org/wss/2004/01/oasis-200401-wsssoap-message-
security-1.0#Base64Binary"}),
 SOAP::Data->name("wsse:created" => '2012-07-04T06:49:48.981Z')->type("")
 )->type("")
 )->attr( {"wsu:Id" => "UsernameToken-2",
 "xmlns:wsu" => "http://docs.oasis-open.org/wss/2004/01/oasis-200401-wsswssecurity-utility-1.0.xsd"
 })
 )->type("")
 );

# Populate parameters to call the service
my $parameters =SOAP::Data->name("typ:personId" => '300000010363707')->type("");

# Call the service
my $result = $soap->call(SOAP::Data->name('typ:getWorker') => $parameters, $auth);

# Process the response. In this example, we simply print the response
die $result->faultstring if ($result->fault);
print $result->result, "\n";
```

Related Topics

Python

Use Python to invoke web services using various techniques such as `urllib2` to create a HTTP request and Suds client.

urllib2 Library

The following code uses *urllib2 library* to create a HTTP request to:

1. Construct an xml payload to invoke the service. This example code passes a hard coded string.
2. Construct a Base64-encoded string for the credentials of the service call.
3. Create and register an opener. If the call is to a server behind a firewall, handle it through proxy.
4. Create a request to call the service.
5. Configure the request content type to be `xml`.
6. Configure the request header with the authentication information.
7. Set the `SOAPAction` to be invoked. Though the service call works without this value, it is a recommended standard.
8. Write the xml payload to the request and execute the request.
9. Get the response and process it. This example just prints the response.

```
import urllib2, base64
username='username'
password='password'

# Construct xml payload to invoke the service. In the example, it is a hard coded string.
envelope = """<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"

 xmlns:xsd="http://www.w3.org/2001/XMLSchema">
 <soap:Body>
 <findRule
 xmlns="http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/creditRuleService/
types/">
 <findCriteria>
 <fetchStart xmlns="http://xmlns.oracle.com/adf/svc/types/">0</fetchStart>
 <fetchSize xmlns="http://xmlns.oracle.com/adf/svc/types/">-1</fetchSize>
 <filter xmlns="http://xmlns.oracle.com/adf/svc/types/">
 <group>
 <upperCaseCompare>false</upperCaseCompare>
 <item>
 <upperCaseCompare>false</upperCaseCompare>
 <attribute>RuleId</attribute>
 <operator>=</operator>
 <value>300000000851162</value>
 </item>
 </group>
 </filter>
 <excludeAttribute
 xmlns="http://xmlns.oracle.com/adf/svc/types/">false</excludeAttribute>
 </findCriteria>
 <findControl>
 <retrieveAllTranslations
 xmlns="http://xmlns.oracle.com/adf/svc/types/">false</retrieveAllTranslations>
 </findControl>
 </findRule>
 </soap:Body>
 </soap:Envelope>"""

# Construct the base 64 encoded string used as credentials for the service call
creadentials = base64.encodestring('%s:%s' % (username, password))[:-1]
authorization = "Basic %s" % creadentials

# Create and register opener. Requires proxy when behind a firewall
opener = urllib2.build_opener(urllib2.HTTPHandler(), urllib2.HTTPSHandler(),
 urllib2.ProxyHandler({'https':'proxyhost:proxyport'}))
urllib2.install_opener(opener)

# Create request for the service call
request = urllib2.Request("https://host:port/icCnSetupCreditRulesPublicService/CreditRuleService")
```

```
# Configure the request content type to be xml
request.add_header("Content-Type", 'text/xml;charset=UTF-8')

# Configure the request authentication in the header with base64-encoded user name and password
request.add_header("Authorization", authorization)

# Set the SOAP action to be invoked; while the call works without this, the value is expected to be set
 based on standards
request.add_header("SOAPAction",
'http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/creditRuleService/findRule')

# Write the xml payload to the request
request.add_data(envelope)

# Execute the request
handle = urllib2.urlopen(request)

# Get the response and process it. This example just prints the response.
content = handle.read()
print content
```

Suds Client

Use Suds, which is based on WSDL, to build SOAP envelope and client for consuming web services. For information about installing suds, see *setup tools*.

The following is a sample code using the suds framework to call a service:

1. Construct a Base64-encoded string for the credentials of the service call.
2. Configure the request header with the content type, SOAP action, and authentication information.
3. Create a new client based on the WSDL.
4. Populate the objects to use as parameters.
5. Call the service.
6. Process the response. This example just prints the response.

```
import base64
from suds.client import Client

username='username'
password='password'

# Construct the base64-encoded string used as the credentials for the service call
credentials = base64.encodestring('%s:%s' % (username, password))[:-1]
authorization = "Basic %s" % credentials

url = 'https://host:port/icCnSetupCreditRulesPublicService/CreditRuleService?wsdl'

# Configure the request content type, SOAP action, and authentication in header
authenticationHeader = {
 "SOAPAction" :"http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/
creditRuleService/findRule",
 "Content-Type" : "text/xml;charset=UTF-8",
 "Authorization" : authorization }

# Create new client
client = Client(url=url, headers=authenticationHeader)

# Populate the objects to be used as parameter
findCriteria = client.factory.create('ns4:FindCriteria')
findControl = client.factory.create('ns4:FindControl')
viewCriteria = client.factory.create('ns4:ViewCriteria')
viewCriteriaRow = client.factory.create('ns4:ViewCriteriaRow')
viewCriteriaItem = client.factory.create('ns4:ViewCriteriaItem')
```

```
viewCriteriaItem.upperCaseCompare = "false";
viewCriteriaItem.attribute = "RuleId";
viewCriteriaItem.operator = "=";
viewCriteriaItem.value = "300000000851162"

viewCriteriaRow.upperCaseCompare = "false"
viewCriteriaRow.item.append([viewCriteriaItem])
viewCriteria.group.append([viewCriteriaRow])

findCriteria.fetchStart = "0"
findCriteria.fetchSize = "-1"
findCriteria.excludeAttribute = "false"
findCriteria.filter = viewCriteria

findControl.retrieveAllTranslations = "false"

# Call the service
rule = client.service.findRule(findCriteria, findControl)

# Process the response. This example just prints the response.
print rule
```

Related Topics

Ruby

Use Ruby to invoke web services using SOAP clients such as Savon.

You must install and configure the development environment and then create the base application:

- Create application, for example rails new `WsTest1`
- Create controller, for example rails generate `WsCallSample WsCall` controller
- Set the root. In this example, delete `public/index.html` and modify the root property in `config/routes.rb` to `WsCallSample#WsCall`
- Add Savon to the application, for example add `gem'savon'` to `app/Gemfile`

For more information, see *Ruby on Rails*.

The following is a sample code to create a HTML form to enter the payload to be passed to the service, and invoke processing for *Savon* and `net/https` call. In this example application, the HTML form is created under `views/ws_call_sample/WsCall.html.erb`.

```
<HTML>
<HEAD>
<title>WsCallSample#WsCall</title>
</HEAD>
<BODY >

<form name="envelope" method="POST">
 <input type="hidden" name="INPUT_PAYLOAD" >
 <input type="hidden" name="OUTPUT_PAYLOAD" >
 <%= submit_tag "Invoke Savon", :name => "invokeSavon" %>
 <%= submit_tag "Invoke HttpRequest", :name => "invokeHttpRequest" %>
 <br>
 <table style="width:100%; font-size: small;" align=center>
 <tr>
 <td align="left"><b>Input Payload</b></td>
 <td align="left"><b>Output Payload</b></td>
```

```
 </tr>
 <tr>
 <td align="center"><textarea name="inputpayload" wrap="off" style="width:100%;height:100%" rows=30 ><%=
 params["inputpayload"] %></textarea></td>
 <td align="center"><textarea name="outputpayload" wrap="off" style="width:100%;height:100%" rows=30 ><%=
 params["xmlbody"] %></textarea></td>
 </tr>
 </table>
 <br>
</form>
</BODY>
</HTML>
```

The following is a sample code to update the controller to handle the submissions from the HTML form. In this example application, the controller is under `controllers/ws_call_sample_controller.rb`. This code processes the envelope in the input, executes using Savon and basic `net/https` call, and displays the response in the output field.

```
require 'rubygems'
require 'nokogiri'
require 'rexml/document'
require "net/https"
require 'uri'

class WsCallSampleController < ApplicationController
 def WsCall
 username ="username";
 password ="password";
 input=params["inputpayload"];

 if params['invokeSavon']
 # Process submission when the invokeSavon button was pressed
 url = "https://host:port/icCnSetupCreditRulesPublicService/CreditRuleService?wsdl";

 # Create new instance of the Savon client using basic authentication
 client = Savon.client(wsdl: url, basic_auth: [username, password], ssl_verify_mode: :none )

 # Call the service with the envelope provided as input
 response = client.call(:on_fault, xml: input)

 # Parse the response to XML
 doc = Nokogiri::XML(response.to_xml ,&:noblanks)
 s = doc.to_xml( indent:2, indent_text:" " )

 # Populate reponse content to a variable to be displayed on the output area
 params["xmlbody"] = s

 elsif params['invokeHttpRequest']
 # Process submission when the invokeHttpRequest button was pressed
 uri = URI.parse("https://host:port/icCnSetupCreditRulesPublicService/CreditRuleService")

 # Create new instance of HTTP object
 http = Net::HTTP.new(uri.host, uri.port)

 # The request uses SSL, certificates are NOT verified
 http.use_ssl = true
 http.verify_mode = OpenSSL::SSL::VERIFY_NONE

 # Create new instance of HTTP POST request
 request = Net::HTTP::Post.new(uri.request_uri)

 # Configure the request content type to be xml and SOAP action
 request.basic_auth(username, password)
 request.add_field("SOAPAction", "http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/
creditRule/creditRuleService/findRule")
 request.add_field("Content-Type", "text/xml;charset=UTF-8")
```

```
 # Set the envelope content obtained from the input to the request
 request.body = input

 # Execute the request and obtain the response
 response = http.request(request)

 # Parse the response to XML
 doc = Nokogiri::XML(response.body ,&:noblanks)
 s = doc.to_xml( indent:2, indent_text:" " )

 # Populate reponse content to a variable to be displayed on the output area
 params["xmlbody"] = s
 else
 # For any other action than invokeSavon / invokeHttpRequest default the input SOAP enveloper
 params["inputpayload"] = ""+
 "<soap:Envelope xmlns:soap=\"http://schemas.xmlsoap.org/soap/envelope/\" xmlns:xsi=\"http://
www.w3.org/2001/XMLSchema-instance\" xmlns:xsd=\"http://www.w3.org/2001/XMLSchema\"> " + "\n"+
 " <soap:Body> " + "\n"+
 " <findRule xmlns=\"http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/
creditRuleService/types/\"> " + "\n"+
 " <findCriteria> " + "\n"+
 " <fetchStart xmlns=\"http://xmlns.oracle.com/adf/svc/types/\">0</fetchStart> " + "\n"+
 " <fetchSize xmlns=\"http://xmlns.oracle.com/adf/svc/types/\">-1</fetchSize> " + "\n"+
 " <filter xmlns=\"http://xmlns.oracle.com/adf/svc/types/\"> " + "\n"+
 " <group> " + "\n"+
 " <upperCaseCompare>false</upperCaseCompare> " + "\n"+
 " <item> " + "\n"+
 " <upperCaseCompare>false</upperCaseCompare> " + "\n"+
 " <attribute>RuleId</attribute> " + "\n"+
 " <operator>=</operator> " + "\n"+
 " <value>300000000851162</value> " + "\n"+
 " </item> " + "\n"+
 " </group> " + "\n"+
 " </filter> " + "\n"+
 " <excludeAttribute xmlns=\"http://xmlns.oracle.com/adf/svc/types/\">false</excludeAttribute> " + "\n"+
 " </findCriteria> " + "\n"+
 " <findControl> " + "\n"+
 " <retrieveAllTranslations xmlns=\"http://xmlns.oracle.com/adf/svc/types/\">false</retrieveAllTranslations>
 " + "\n"+
 " </findControl> " + "\n"+
 " </findRule> " + "\n"+
 " </soap:Body> " + "\n"+
 "</soap:Envelope> " ;
 end
 end
end
```

Related Topics

8 Business Object Services

Action Plan Service

Service to create action plans.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crm/service/actionplan/actionplanService/}ActionPlanService

Service WSDL URL: https://servername/crmService/ActionPlanService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Template Action*
Handles	*Action Attribute*
Handles	*Template*
Handles	*Action Plan Action Relation*
Handles	*Action Condition*
Handles	*Action Plan*
Handles	*Action Plan Action*
Handles	*Action Relation*
Handles	*Action*

Operations

- *addActionPlan*
- *orchestrateActions*
- *initiateActionPlan*

- *addAdhocActionToActionPlan*
- *discardActionPlan*
- *getAction*
- *createAction*
- *updateAction*
- *deleteAction*
- *getActionPlan*
- *createActionPlan*
- *updateActionPlan*
- *deleteActionPlan*
- *findActionPlan*
- *getTemplate*
- *createTemplate*
- *updateTemplate*
- *deleteTemplate*

addActionPlan

Creates a action plan for the given entity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
templateId	long	Identifier for the action plan template from which the action is created.
objectEntityName	string	Name of the parent entity object of the action plan.
objectId	long	Object identifier for the action plan.
actionPlanName	string	Name of the action plan.

Response Payload

Element Name	Type	Description
result	long	Indicates that the action plan is created.

orchestrateActions

This method is invoked through the ESS job to process all the exsiting plans and their actions. This method does the following 1. Compute statuses for all the actions in progress 2. Check if a new action must be initiated 3. Initiate actions and create respective business objects 4. Update action plans accordingly

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	void	None.

initiateActionPlan

Initiates an action plan by starting the root actions in it.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
actionPlanId	long	Action plan identifier.

Response Payload

Element Name	Type	Description
result	boolean	Indicates if an action plan is initiated or not.

addAdhocActionToActionPlan

Add an adhoc action to action plan.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
actionPlanId	long	Indicates an action plan identifier.
actionNumber	string	Indicates an action reference number.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	long	Indicates an action plan action identifier.

discardActionPlan

API to delete an uninitiated Action Plan

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
actionPlanNumber	string	Indicates an action plan reference Number

Response Payload

Element Name	Type	Description
result	boolean	Identifies if an action plan is deleted or not

getAction

Queries and retrieves a single action record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
actionId	long	Action identifier.

Response Payload

Element Name	Type	Description
result	*Action*	An action that matches the inbound parameters.

createAction

Creates a single action record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
action	*Action*	The action to be created.

Response Payload

Element Name	Type	Description
result	*Action*	The action that is created.

updateAction

Updates a single action record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
action	*Action*	The action to be updated.

Response Payload

Element Name	Type	Description
result	*Action*	The updated action.

deleteAction

Deletes a single action record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
action	*Action*	The action record to be deleted.

Response Payload

Element Name	Type	Description
result	void	None.

getActionPlan

Queries and retrieves a single action plan record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
actionPlanId	long	Action plan identifier.

Response Payload

Element Name	Type	Description
result	*Action Plan*	An action plan that matches the inbound parameters.

createActionPlan

Creates a single action plan record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
actionPlan	*Action Plan*	The action plan to be created.

Response Payload

Element Name	Type	Description
result	*Action Plan*	The action plan that is created.

updateActionPlan

Updates a single action plan record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
actionPlan	*Action Plan*	The action plan to be updated.

Response Payload

Element Name	Type	Description
result	*Action Plan*	The updated action plan.

deleteActionPlan

Deletes a single action plan record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
actionPlan	*Action Plan*	The action plan record to be deleted.

Response Payload

Element Name	Type	Description
result	void	None.

findActionPlan

Queries a list of action plans based on a filter criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	Indicates the criteria used to query a list of action plans.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Indicates a criteria to filter out action plans that are not currently used.

Response Payload

Element Name	Type	Description
result	*Action Plan*	Indicates a list of action plans that satisfy the inbound parameters.

getTemplate

Queries a single template record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
templateId	long	The template identifier.

Response Payload

Element Name	Type	Description
result	*Template*	A template that matches the inbound parameters.

createTemplate

Creates a single template record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
template	*Template*	The template to be created.

Response Payload

Element Name	Type	Description
result	*Template*	The template that is created.

updateTemplate

Updates a single template record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
template	*Template*	The template to be updated.

Response Payload

Element Name	Type	Description
result	*Template*	The updated template.

deleteTemplate

Deletes a single template record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
template	*Template*	The template record to be deleted.

Response Payload

Element Name	Type	Description
result	void	None.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getTemplate	SVC_SETUP_ACTION_PLAN_PRIV	Setup Action Plan	Allows action plan setup.
getTemplate	SVC_VIEW_ACTION_PLAN_PRIV	View Action Plan	Allows viewing of an Action Plan.
getTemplate	SVC_EDIT_ACTION_PLAN_PRIV	Edit Action Plan	Allows edit of an Action Plan.
getTemplate	SVC_CREATE_ACTION_PLAN_PRIV	Create Action Plan	Allows creation of an Action Plan.
initiateActionPlan	SVC_EDIT_ACTION_PLAN_PRIV	Edit Action Plan	Allows edit of an Action Plan.
updateAction	SVC_SETUP_ACTION_PLAN_PRIV	Setup Action Plan	Allows action plan setup.
updateAction	SVC_EDIT_ACTION_PLAN_PRIV	Edit Action Plan	Allows edit of an Action Plan.
findActionPlan	SVC_SETUP_ACTION_PLAN_PRIV	Setup Action Plan	Allows action plan setup.
findActionPlan	SVC_VIEW_ACTION_PLAN_PRIV	View Action Plan	Allows viewing of an Action Plan.
findActionPlan	SVC_EDIT_ACTION_PLAN_PRIV	Edit Action Plan	Allows edit of an Action Plan.
findActionPlan	SVC_CREATE_ACTION_PLAN_PRIV	Create Action Plan	Allows creation of an Action Plan.
createTemplate	SVC_SETUP_ACTION_PLAN_PRIV	Setup Action Plan	Allows action plan setup.
createActionPlan	SVC_CREATE_ACTION_PLAN_PRIV	Create Action Plan	Allows creation of an Action Plan.
updateActionPlan	SVC_EDIT_ACTION_PLAN_PRIV	Edit Action Plan	Allows edit of an Action Plan.
discardActionPlan	SVC_EDIT_ACTION_PLAN_PRIV	Edit Action Plan	Allows edit of an Action Plan.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getActionPlan	SVC_VIEW_ACTION_PLAN_PRIV	View Action Plan	Allows viewing of an Action Plan.
getActionPlan	SVC_EDIT_ACTION_PLAN_PRIV	Edit Action Plan	Allows edit of an Action Plan.
getActionPlan	SVC_CREATE_ACTION_PLAN_PRIV	Create Action Plan	Allows creation of an Action Plan.
getAction	SVC_SETUP_ACTION_PLAN_PRIV	Setup Action Plan	Allows action plan setup.
getAction	SVC_VIEW_ACTION_PLAN_PRIV	View Action Plan	Allows viewing of an Action Plan.
getAction	SVC_EDIT_ACTION_PLAN_PRIV	Edit Action Plan	Allows edit of an Action Plan.
getAction	SVC_CREATE_ACTION_PLAN_PRIV	Create Action Plan	Allows creation of an Action Plan.
deleteAction	SVC_SETUP_ACTION_PLAN_PRIV	Setup Action Plan	Allows action plan setup.
deleteAction	SVC_EDIT_ACTION_PLAN_PRIV	Edit Action Plan	Allows edit of an Action Plan.
addActionPlan	SVC_CREATE_ACTION_PLAN_PRIV	Create Action Plan	Allows creation of an Action Plan.
deleteTemplate	SVC_SETUP_ACTION_PLAN_PRIV	Setup Action Plan	Allows action plan setup.
addAdhocActionToActionPlan	SVC_EDIT_ACTION_PLAN_PRIV	Edit Action Plan	Allows edit of an Action Plan.
addAdhocActionToActionPlan	SVC_CREATE_ACTION_PLAN_PRIV	Create Action Plan	Allows creation of an Action Plan.
createAction	SVC_SETUP_ACTION_PLAN_PRIV	Setup Action Plan	Allows action plan setup.
createAction	SVC_EDIT_ACTION_PLAN_PRIV	Edit Action Plan	Allows edit of an Action Plan.
deleteActionPlan	SVC_EDIT_ACTION_PLAN_PRIV	Edit Action Plan	Allows edit of an Action Plan.
updateTemplate	SVC_SETUP_ACTION_PLAN_PRIV	Setup Action Plan	Allows action plan setup.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_CREATE_ACTION_PLAN_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_CREATE_ACTION_PLAN_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_CREATE_ACTION_PLAN_PRIV	ORA_SVC_CASE_ADMINISTRATOR	Case Administrator	Administers all aspects of Case Management.
SVC_CREATE_ACTION_PLAN_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
SVC_CREATE_ACTION_PLAN_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_CREATE_ACTION_PLAN_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
SVC_CREATE_ACTION_PLAN_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
SVC_CREATE_ACTION_PLAN_PRIV	ORA_SVC_CASE_EXECUTION	Case Execution	Assists clients who are applying for benefits, opens cases and manages all tasks associated to the case, processes clients applications, evaluate clients needs for benefits, counsels benefits recipients, performs assessments of clients strengths and needs to develop benefit plans, performs follow-up with clients to ensure they are working on their tasks.
SVC_CREATE_ACTION_PLAN_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_CREATE_ACTION_PLAN_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			resource balancing, critical service requests, service level agreements.
SVC_CREATE_ACTION_PLAN_PRIV	ORA_SVC_CASE_SUPERVISION	Case Supervision	Supervises and manages caseworkers, assists caseworkers with any complex issues, handles case approvals and escalations, coordinates care and benefits with external service providers, assigns or reassigns cases to caseworkers, conducts evaluations of benefits programs and provides feedback.
SVC_CREATE_ACTION_PLAN_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
SVC_CREATE_ACTION_PLAN_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
SVC_CREATE_ACTION_PLAN_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
SVC_CREATE_ACTION_PLAN_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
SVC_SETUP_ACTION_PLAN_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_SETUP_ACTION_PLAN_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
SVC_SETUP_ACTION_PLAN_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
SVC_SETUP_ACTION_PLAN_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			the Internal Help Desk service application, including setup.
SVC_EDIT_ACTION_PLAN_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
SVC_EDIT_ACTION_PLAN_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_EDIT_ACTION_PLAN_PRIV	ORA_SVC_CASE_ADMINISTRATOR	Case Administrator	Administers all aspects of Case Management.
SVC_EDIT_ACTION_PLAN_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
SVC_EDIT_ACTION_PLAN_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_EDIT_ACTION_PLAN_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
SVC_EDIT_ACTION_PLAN_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
SVC_EDIT_ACTION_PLAN_PRIV	ORA_SVC_CASE_EXECUTION	Case Execution	Assists clients who are applying for benefits, opens cases and manages all tasks associated to the case, processes clients applications, evaluate clients needs for benefits, counsels benefits recipients, performs assessments of clients strengths and needs to develop benefit plans, performs follow-up with clients to ensure they are working on their tasks.
SVC_EDIT_ACTION_PLAN_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			critical service requests, service level agreements.
SVC_EDIT_ACTION_PLAN_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_EDIT_ACTION_PLAN_PRIV	ORA_SVC_CASE_SUPERVISION	Case Supervision	Supervises and manages caseworkers, assists caseworkers with any complex issues, handles case approvals and escalations, coordinates care and benefits with external service providers, assigns or reassigns cases to caseworkers, conducts evaluations of benefits programs and provides feedback.
SVC_EDIT_ACTION_PLAN_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
SVC_EDIT_ACTION_PLAN_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
SVC_EDIT_ACTION_PLAN_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
SVC_EDIT_ACTION_PLAN_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
SVC_VIEW_ACTION_PLAN_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
SVC_VIEW_ACTION_PLAN_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_VIEW_ACTION_PLAN_PRIV	ORA_SVC_CASE_ADMINISTRATOR	Case Administrator	Administers all aspects of Case Management.
SVC_VIEW_ACTION_PLAN_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_VIEW_ACTION_PLAN_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_VIEW_ACTION_PLAN_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
SVC_VIEW_ACTION_PLAN_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
SVC_VIEW_ACTION_PLAN_PRIV	ORA_SVC_CASE_EXECUTION	Case Execution	Assists clients who are applying for benefits, opens cases and manages all tasks associated to the case, processes clients applications, evaluate clients needs for benefits, counsels benefits recipients, performs assessments of clients strengths and needs to develop benefit plans, performs follow-up with clients to ensure they are working on their tasks.
SVC_VIEW_ACTION_PLAN_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_VIEW_ACTION_PLAN_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_VIEW_ACTION_PLAN_PRIV	ORA_SVC_CASE_SUPERVISION	Case Supervision	Supervises and manages caseworkers, assists caseworkers with any complex issues, handles case approvals and escalations, coordinates care and benefits with external service providers, assigns or reassigns cases to caseworkers, conducts evaluations of benefits programs and provides feedback.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_VIEW_ACTION_PLAN_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
SVC_VIEW_ACTION_PLAN_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
SVC_VIEW_ACTION_PLAN_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
SVC_VIEW_ACTION_PLAN_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.

Action

Contains the details for all the actions that can be associated to an action plan template in the system.

QName: {http://xmlns.oracle.com/apps/crm/service/actionplan/actionplanService/}Action

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Action Attribute*
Contains	*Action Condition*
Handled by	*Action Plan Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActionCategoryCd	string	Indicates the category of action.
ActionCategoryCdMeaning	string	Indicates the display value corresponding to the action category lookup code for the action.
ActionId	long	Indicates the action identifier. • Primary Key
ActionNumber	string	Indicates the reference number of the action.
BUOrgId	long	The unique ID of the business unit name associated to the action.
BusinessUnitName	string	The name of the business unit associated to the action.
CopyAttachmentsFlag	boolean	Indicates whether attachments are copied from the parent context to the child object this action represents.
CreatedBy	string	Indicates the user who created the action.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the creation of the action.
DeleteFlag	boolean	Flag that indicates if the user has access to delete the record.
DeletedFlag	boolean	Indicates whether the action is deleted.
Description	string	Indicates the description of an action.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the action was last updated.
LastUpdateLogin	string	Indicates the login session of the user who last updated the action.
LastUpdatedBy	string	Indicates the user who last updated the action.
LeadTime	long	Indicates the estimated time to complete the action.
LeadTimeUnit	string	Indicates the unit of measurement of lead time. i.e. minutes, hours, days.

Name	Type	Description
LeadTimeUnitMeaning	string	Indicates the display value corresponding to the lead time unit lookup code for the action.
Name	string	Indicates the name of the action.
ObjectEntityName	string	Indicates the entity name of the object on which the action is based.
ObjectEntityNameMeaning	string	Indicates the display value corresponding to the object entity name lookup code for the action.
ObjectEntitySubtype	string	Indicates the subtype of the object on which the action is based.
ObjectEntityType	string	Indicates the entity type of the object on which the action is based.
ObjectEntityTypeMeaning	string	Indicates the display value corresponding to the object entity type lookup code for the action.
ObjectLinkTypeId	long	Indicates the object link type identifier associated to the action.
OperationCd	string	Indicates the operation code entry for the action.
OperationCdMeaning	string	Indicates the display value corresponding to the operation lookup code for the action.
OriginalSystemReference	string	Indicates the original system reference entry for the action.
ParentEntityName	string	Indicates the entity name of the object on which the action is used.
ParentEntityNameMeaning	string	Indicates the display value corresponding to the parent entity name lookup code for the action.
ProcessConnectionTypeCd	string	Lookup code that indicates if the connection to Process Cloud is basic or integrated.
ProcessMetadataId	long	Indicates the process metadata identifier.
ProcessMetadataNumber	string	Indicates the reference number of the process metadata.

Name	Type	Description
StripeCd	string	Indicates the application context of the action.
StripeCdMeaning	string	Indicates the display value corresponding to the stripe lookup code for the action.
UpdateFlag	boolean	Flag that indicates if the user has access to update the record.
UseDefaultVersionFlag	boolean	Indicates whether the default version of the action should be used. Example: Default version of a process action.
VisibilityCd	string	Indicates the visibility level of the action.
VisibilityCdMeaning	string	Indicates the display value corresponding to the visibility lookup code for the action.
actionAttribute	*Action Attribute*	Contains the attributes to be set while creating or updating the entity object of an action.
actionCondition	*Action Condition*	Indicates the action condition identifier of an action plan.

Action Attribute

Contains the attributes to be set while creating or updating the entity object of an action.

QName: {http://xmlns.oracle.com/apps/crm/service/actionplan/actionplanService/}ActionAttribute

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Action*
Handled by	*Action Plan Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActionAttributeId	long	Indicates the identifier of the action attribute. • Primary Key
ActionId	long	Indicates the unique identifier for the action attribute.
AttributeName	string	Indicates the attribute name of the associated entity object.
AttributeValue	string	Indicates a value to be set on the action attribute.
AttributeValueContextCd	string	Indicates the context within which the attribute value is interpreted.
AttributeValueContextCdMeaning	string	Indicates the display value corresponding to the context lookup code for the action attribute.
ChildAttributeFlag	boolean	Flag which identifies if this attribute belongs to the parent or one of its child objects.
CreatedBy	string	Indicates the user who created the action attribute.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the action attribute was created.
DeleteFlag	boolean	Flag that indicates if the user has access to delete the record.
DeletedFlag	boolean	Indicates whether the action attribute is deleted.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the action attribute was last updated.
LastUpdateLogin	string	Indicates the login session of the user who last updated the action condition.
LastUpdatedBy	string	Indicates the user who last updated the action attribute.
UpdateFlag	boolean	Flag that indicates if the user has access to update the record.
UsageCd	string	Indicates when the attribute is to be used.

Name	Type	Description
UsageCdMeaning	string	Indicates the display value corresponding to the usage lookup code for the action attribute.

Action Condition

Contains the definitions of conditions for the entity object of an action.

QName: {http://xmlns.oracle.com/apps/crm/service/actionplan/actionplanService/}ActionCondition

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Action*
Handled by	*Action Plan Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActionConditionId	long	Indicates the action condition identifier. • Primary Key
ActionId	long	Indicates the action identifier for which the condition is defined.
ActionStatusCd	string	Indicates the action status based on whether the condition is met or not.
ActionStatusCdMeaning	string	Indicates the display value corresponding to the action status lookup code for the action condition.
CompletionFlag	boolean	Indicates the action is completed when the condition is met.

Name	Type	Description
Condition	string	Indicates an expression whether the condition is met or not.
CreatedBy	string	Indicates the user who created the action condition.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the condition was created.
DeleteFlag	boolean	Flag that indicates if the user has access to delete the record.
Description	string	Indicates the description of the action condition.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the action condition was last updated.
LastUpdateLogin	string	Indicates the login session of the user who last updated the action condition.
LastUpdatedBy	string	Indicates the user who last updated the action condition.
Name	string	Indicates the name of the action condition.
UpdateFlag	boolean	Flag that indicates if the user has access to update the record.

Action Plan

Contains details of an action plan instance as created by the agent.

QName: {http://xmlns.oracle.com/apps/crm/service/actionplan/actionplanService/}ActionPlan

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Action Plan Action*

Relationship Type	Object or Service
Handled by	*Action Plan Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActionId	long	Indicates the action identifier.
ActionNumber	string	Indicates the reference number of the action.
ActionObjectEntitySubtype	string	Indicates the object entity subtype of the action.
ActionObjectId	long	Indicates the object identifier associated with the action.
ActionObjectReferenceNumber	string	Indicates the reference number of the object associated with the action.
ActionPlanId	long	Indicates the action plan identifier. • Primary Key
ActionPlanNumber	string	Indicates the action plan reference number.
ActionPlanTypeCd	string	Lookup code that indicates the type of action plan, such as Template based Action Plan, PCS process based Action Plan.
ActionPlanTypeCdMeaning	string	Indicates the display value corresponding to the action plan type lookup code for the action plan.
ActionStatusCd	string	Indicates the status of the action.
ActionStatusCdMeaning	string	Indicates the display value corresponding to the status lookup code for the action.
ActualCompletionDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the actual date of completion of the action plan.
AdditionalInformation	string	Indicates additional information about the action plan record.

Name	Type	Description
CalendarId	long	Indicates the calendar identifier associated with the action plan.
CreatedBy	string	Indicates the user who created the action plan.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the action plan was created.
DeleteFlag	boolean	Flag that controls if the user has access to delete the record.
DeletedFlag	boolean	Indicates whether the action plan is deleted.
ExpectedCompletionDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the projected completion date of the action plan.
InitialCompletionDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the initial date when the action plan was expected to be completed.
LastRefreshedDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date when action plan status was last refreshed
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the action plan was last updated.
LastUpdateLogin	string	Indicates the login session of the user who last updated the action plan.
LastUpdatedBy	string	Indicates the user who last updated the action plan.
Name	string	Indicates the name of the action plan.
ObjectEntityName	string	Indicates the parent entity object name of the action plan.
ObjectEntityNameMeaning	string	Indicates the display value corresponding to the object entity name lookup code for the action plan.
ObjectId	long	Indicates the object identifier of the action plan.
OrderNumber	long	Indicates the order of the action plan in the list of action plans.

Name	Type	Description
ProcessInstanceId	string	Indicates the process instance identifier of an external process.
ProcessStatus	string	Indicates the status of the external process.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the start date of the action plan.
Status	string	Indicates the status of the action plan.
StatusCd	string	Indicates the status of the action plan.
StatusCdMeaning	string	Indicates the display value corresponding to the status lookup code for the action plan.
StatusDetails	string	Indicates the status explanation for the action plan if there is an error.
TemplateId	long	Indicates the action plan template identifier from which the action plan is created.
UpdateFlag	boolean	Flag that controls if the user has access to update the record.
actionPlanAction	*Action Plan Action*	Contains the actions for an action plan instance.

Action Plan Action

Contains the actions for an action plan instance.

QName: {http://xmlns.oracle.com/apps/crm/service/actionplan/actionplanService/}ActionPlanAction

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Action Plan Action Relation*
Contained by	*Action Plan Action Relation*

Relationship Type	Object or Service
Contained by	*Action Plan*
Handled by	*Action Plan Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActionDescription	string	Indicates the description of an action.
ActionId	long	Indicates the action identifier.
ActionName	string	Indicates the name of the action.
ActionNumber	string	Indicates the reference number of the action.
ActionPlanActionId	long	Indicates the action identifier of the action plan. • Primary Key
ActionPlanActionNumber	string	Indicates the action plan reference number.
ActionPlanId	long	Indicates the action plan identifier.
CreatedBy	string	Indicates the user who created the action in an action plan.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the action was created in the action plan.
DelayedFlag	boolean	Indicates whether the action in the action plan is delayed.
DeleteFlag	boolean	Flag to indicate if the user has access to delete the record.
DeletedFlag	boolean	Indicates whether the action in the action plan is deleted.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the end date of an action in the action plan.

Name	Type	Description
EndDateReadOnlyFlag	boolean	Indicates whether the end date should be read only.
ExpectedCompletionDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the expected completion date of the action in the action plan.
ExpectedStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the expected start date of an action in the action plan.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the action was last updated in the action plan.
LastUpdateLogin	string	Indicates the login details of the user who last updated the action in the action plan.
LastUpdatedBy	string	Indicates the user who last updated the action in the action plan.
LeadTime	long	Indicates the estimated time to complete the action.
LeadTimeUnit	string	Indicates the unit of measurement of lead time, such as minutes, hours or days.
LeadTimeUnitMeaning	string	Indicates the display value corresponding to the lead time unit lookup code for the action plan action.
MandatoryFlag	boolean	Indicates whether the action for the action plan is mandatory.
ObjectEntityName	string	Indicates the parent entity object name of the action plan.
ObjectEntityNameMeaning	string	Indicates the display value corresponding to the object entity name lookup code for the action plan action.
ObjectEntitySubtype	string	Indicates the object entity subtype of the action in the action plan.
ObjectEntityType	string	Indicates the type of the entity object on which the action is based.
ObjectEntityTypeMeaning	string	Indicates the display value corresponding to the object entity type lookup code for the action plan action.

Name	Type	Description
ObjectId	long	Indicates the object identifier associated with the action.
ObjectReferenceNumber	string	Indicates the reference number of the object associated with the action.
OrderNumber	long	Indicates the action's order in an action plan.
OwnerName	string	Indicates the name of the owner of the action.
Prerequisites	string	Indicates the prerequisite action steps for the action.
ProcessInstanceId	string	Indicates the process instance identifier of an external process.
ProcessStatus	string	Indicates the status of the external process.
SkipFlag	boolean	Indicates whether the action for the action plan can be skipped.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the start date of an action in the action plan.
StatusCd	string	Indicates the status of the action.
StatusCdMeaning	string	Indicates the display value corresponding to the status lookup code for the action plan action.
StatusDetails	string	Indicates the details of the action status in the action plan.
TemplateId	long	Indicates the action plan template identifier from which the action is created.
UpdateFlag	boolean	Flag to indicate if the user has access to update the record.
VisibilityCd	string	Indicates the visibility level of the action.
VisibilityCdMeaning	string	Indicates the display value corresponding to the visibility lookup code for the action plan action.
actionPlanActionRelation	*Action Plan Action Relation*	Contains the dependencies of actions on other actions in an action plan.

Action Plan Action Relation

Indicates the relation between the actions of an action plan instance.

QName: {http://xmlns.oracle.com/apps/crm/service/actionplan/actionplanService/}ActionPlanActionRelation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Action Plan Action*
Contained by	*Action Plan Action*
Handled by	*Action Plan Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActionPlanActionId	long	Indicates the action plan action identifier.
ActionStatusCd	string	Indicates the status code which describes the dependency condition of this relation record
CreatedBy	string	Indicates the user who created the dependencies of action.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the action dependency record was created.
DeleteFlag	boolean	Flag that indicates if the user has access to delete the record.
DeletedFlag	boolean	Indicates whether the dependency record is logically deleted.
DepActionPlanAction	*Action Plan Action*	Indicates the relation identifier between actionPlanActionVO and actionPlanActionRelationVO.

Name	Type	Description
DepActionPlanActionId	long	Indicates the dependent action identifier of an action plan.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the dependency record was last updated.
LastUpdateLogin	string	Indicates the login session of the user who last updated the dependency record.
LastUpdatedBy	string	Indicates the user who last updated the dependencies of action.
RelationId	long	Indicates the relation identifier between actions in an action plan. • Primary Key
UpdateFlag	boolean	Flag that indicates if the user has access to update the record.

Action Relation

Indicates the relation between the actions of an action plan template.

QName: {http://xmlns.oracle.com/apps/crm/service/actionplan/actionplanService/}ActionRelation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Template Action*
Contained by	*Template Action*
Handled by	*Action Plan Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActionStatusCd	string	Indicates the status code which describes the dependency condition of this relation record
ActionStatusCdMeaning	string	Indicates the display value corresponding to the action status lookup code for the action relation.
CreatedBy	string	Indicates the user who created the dependencies of action.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the action dependency record was created.
DeleteFlag	boolean	Flag that indicates if the user has access to delete the record.
DeletedFlag	boolean	Indicates whether the dependency record is logically deleted.
DepTemplateAction	*Template Action*	Contains the association of an action relation to respective template action.
DepTemplateActionId	long	Indicates the template action identifier of a dependent action.
DepTmpActionOrderNumber	long	Indicates the order of display for an action within an action template.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the dependency record was last updated.
LastUpdateLogin	string	Indicates the login session of the user who last updated the dependency record.
LastUpdatedBy	string	Indicates the user who last updated the dependencies of action.
RelationId	long	Indicates the relation identifier between actions in an action plan template. • Primary Key
TemplateActionId	long	Indicates the identifier of an action in an action plan template.
UpdateFlag	boolean	Flag that indicates if the user has access to update the record.

Template

Contains details for the action plan templates in the system.

QName: {http://xmlns.oracle.com/apps/crm/service/actionplan/actionplanService/}Template

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Template Action*
Handled by	*Action Plan Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActionPlanTypeCd	string	Indicates the category of the action plan template.
ActionPlanTypeCdMeaning	string	Indicates the display value corresponding to the action plan type lookup code for the template.
AutoStartFlag	boolean	Indicates if action plans created using the template are automatically started.
BUOrgId	long	The unique ID of the business unit name associated to the action plan template.
BusinessUnitName	string	The name of the business unit associated to the template.
CalendarId	long	Indicates the identifier of calendar to associate with the action plan template.
CoverageName	string	Indicates the name of the calendar the action plan template refers to.
CoverageTimeId	long	Indicates the unique identifier for the calendar entry.

Name	Type	Description
CreatedBy	string	Indicates the user who created the action plan template.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the creation of the action plan template.
DeleteFlag	boolean	Flag that indicates if the user has access to delete the record.
DeletedFlag	boolean	Indicates whether the action plan template is deleted.
Description	string	Indicates the description of the action plan template.
EnabledFlag	boolean	Indicates whether the action plan template has been published.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the end date of the action plan template.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the action plan template was last updated.
LastUpdateLogin	string	Indicates the session login associated to the user who last updated the action plan template.
LastUpdatedBy	string	Indicates the user who last updated the action plan template.
Name	string	Indicates the name of the action plan template.
ObjectEntityName	string	Indicates the entity name of the object that the template uses to create action plans.
ObjectEntityNameMeaning	string	Indicates the display value corresponding to the object entity name lookup code for the template.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the start date of the action plan template.
StripeCd	string	Indicates the application context of the action plan template.

Name	Type	Description
StripeCdMeaning	string	Indicates the display value corresponding to the stripe lookup code for the template.
TemplateId	long	Indicates the action plan template identifier. • Primary Key
TemplateNumber	string	Indicates the reference number of the action plan template.
UpdateFlag	boolean	Flag that indicates if the user has access to update the record.
templateAction	*Template Action*	Contains the association of actions to action plan templates.

Template Action

Contains the association of actions to action plan templates.

QName: {http://xmlns.oracle.com/apps/crm/service/actionplan/actionplanService/}TemplateAction

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Action Relation*
Contained by	*Action Relation*
Contained by	*Template*
Handled by	*Action Plan Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActionId	long	Indicates the action identifier.
ActionNumber	string	Indicates the reference number of the action.
CreatedBy	string	Indicates the user who created the action template.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the action template was created
DeleteFlag	boolean	Flag that indicates if the user has access to delete the record.
DeletedFlag	boolean	Indicates whether the associated record is deleted.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the action action template was last updated.
LastUpdateLogin	string	Indicates the login session of the user who last updated the action template.
LastUpdatedBy	string	Indicates the user who last updated the action template.
MandatoryFlag	boolean	Indicates whether the action in the action plan is mandatory.
OrderNumber	long	Indicates the order of display for an action within an action template.
Prerequisites	string	Indicates the prerequisite action steps for the action.
TemplateActionId	long	Indicates template action identifier. • Primary Key
TemplateActionNumber	string	Indicates the template action reference number.
TemplateId	long	Indicates the action plan template identifier.
Tier	long	Used in Action Plan diagram view to display the action nodes at appropriate levels.
UpdateFlag	boolean	Flag that indicates if the user has access to update the record.

Name	Type	Description
actionRelation	*Action Relation*	Indicates the relation between the actions of an action plan template.

Activity Service

Service to operate on activity object.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activityManagementService/}ActivityService

Service WSDL URL: https://servername/crmService/ActivityService?WSDL

Logical Business Objects

- CRM : Applications Common Components : Activity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Common Attachment SDO*
Handles	*Activity Assignee*
Handles	*Activity Delete Exception*
Handles	*Note Descriptive Flexfields*
Handles	*Activity Contact*
Handles	*Note*
Handles	*Activity*
Handles	*Activity Objective*

Operations

- *deleteAttachment*
- *getAttachmentsListWithoutContent*
- *getAttachmentContent*
- *copyAttachment*
- *createAttachment*
- *generateActivitiesFromTemplate*
- *getActivity*
- *createActivity*
- *updateActivity*
- *deleteActivity*
- *mergeActivity*
- *findActivity*
- *processActivity*
- *createActivityAssignee*
- *updateActivityAssignee*
- *deleteActivityAssignee*
- *findActivityAssignee*
- *createActivityContact*
- *updateActivityContact*
- *deleteActivityContact*
- *findActivityContact*
- *findActivityDeleteExceptions*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

deleteAttachment

An operation to delete a single or multiple attachments associated to an activity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
deleteParams	*Common Attachment*	The parameter based on which deletion of attachments should trigger.
commitData	string	A flag to indicate whether or not to commit transaction for this operation.

Response Payload

Element Name	Type	Description
result	string	The parameter returns the success or failure status of the operation.

getAttachmentsListWithoutContent

An operation to get list of all the attachment associated with an activity without any file content.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
getParameters	*Common Attachment*	The parameters based on which list of attachments to be fetched is determined.

Response Payload

Element Name	Type	Description
result	*Common Attachment*	The parameter returns the list of all the attachments without any file content.

getAttachmentContent

An operation to get attachment associated with an activity with file content if applicable.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
getParameters	*Common Attachment*	The parameters based on which attachment to be fetched is determined.

Response Payload

Element Name	Type	Description
result	*Common Attachment*	The parameter returns the attachment with file content, if applicable.

Element Name	Type	Description

copyAttachment

An operation to copy a single or multiple attachments associated to an activity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
attachmentRows	*Common Attachment*	The parameter for the list of attachments to be copied.
commitData	string	A flag to indicate whether or not to commit transaction for this operation.

Response Payload

Element Name	Type	Description
result	string	The parameter returns the success or failure status of the operation.

createAttachment

An operation to create a single or multiple attachments associated to an activity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
attachmentRows	*Common Attachment*	The parameter which provides the list of attachments to be created.
commitData	string	A flag to indicate whether or not to commit transaction for this operation.

Response Payload

Element Name	Type	Description
result	string	The parameter returns the success or failure status of the operation.

generateActivitiesFromTemplate

An operation to generate activities from a template. A valid value for templateId should be passed. Only following activity attributes are supported in activityAttributes input parameter as of now: CustomerId, OwnerId, AssesmentId, ActivityContact, ActivityAssignee, ActivityStartDate, LeadId, OpportunityId, and CampaignId.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
templateId	long	The unique identifier of the template-set using which the activities are to be generated.
activityAttributes	*Activity*	The Activity SDO attribute list using which template activities should be generated.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the list of all the generated activities using the template.

getActivity

The out-of-the-box Get operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityId	long	The activity ID for which the activity record is to be fetched.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the activity record based on input activity ID.

createActivity

The out-of-the-box Create operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activity	*Activity*	The activity record to be created for the method createActivity.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the created activity record.

updateActivity

The out-of-the-box Update operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activity	*Activity*	The activity record to be updated for the method createActivity carrying updated attributes.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the updated activity record.

deleteActivity

The out-of-the-box Delete operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activity	*Activity*	The activity record to be deleted for the method deleteActivity.

Response Payload

Element Name	Type	Description
result	void	This operation returns nothing for the method deleteActivity.

mergeActivity

OOTB merge operation on Activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activity	*Activity*	Activities which have to be merged.

Response Payload

Element Name	Type	Description
result	*Activity*	Merged Activity.

findActivity

The out-of-the-box Find operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The FindCriteria object using which the find operation works for the method findActivity.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The FindControl object using which the find operation works for the method findActivity.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the list of activity records based on FindCriteria and FindControl input objects.

processActivity

The out-of-the-box Process operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The name of the operation to be performed like, create, update, and so on.
activity	*Activity*	The list of activity records on which the operation is to be performed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The optional ProcessControl object to be used while performing this operation.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns a list of activity records after the operation is complete.

createActivityAssignee

The out-of-the-box Create operation for the activity assignee SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityAssigneeWebService	*Activity Assignee*	The activity assignee record to be created for the method createActivityAssignee.

Response Payload

Element Name	Type	Description
result	*Activity Assignee*	The parameter returns the created activity assignee record.

updateActivityAssignee

The out-of-the-box Update operation for the activity assignee SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityAssigneeWebService	*Activity Assignee*	The activity assignee record to be updated for the method updateActivityAssignee.

Response Payload

Element Name	Type	Description
result	*Activity Assignee*	The parameter returns the updated activity assignee record.

deleteActivityAssignee

The out-of-the-box Delete operation for the activity assignee SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityAssigneeWebService	*Activity Assignee*	The activity assignee record to be deleted for the method deleteActivityAssignee.

Response Payload

Element Name	Type	Description
result	void	This operation returns nothing for the method deleteActivityAssignee.

findActivityAssignee

The out-of-the-box Find operation for the activity assignee SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The FindCriteria object using which the find operation works for the method findActivityAssignee.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The FindControl object using which the find operation works for the method findActivityAssignee.

Response Payload

Element Name	Type	Description
result	*Activity Assignee*	The parameter returns the list of activity assignee records based on FindCriteria and FindControl input objects.

createActivityContact

The out-of-the-box Create operation for the activity contact SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityContactWebService	*Activity Contact*	The activity contact record to be created for the method createActivityContact.

Response Payload

Element Name	Type	Description
result	*Activity Contact*	The parameter returns the created activity contact record.

updateActivityContact

The out-of-the-box Update operation for the activity contact SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityContactWebService	*Activity Contact*	The activity contact record to be updated for the method updateActivityContact.

Response Payload

Element Name	Type	Description
result	*Activity Contact*	The parameter returns the updated activity contact record.

deleteActivityContact

The out-of-the-box Delete operation for the activity contact SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityContactWebService	*Activity Contact*	The activity contact record to be deleted for the method deleteActivityContact.

Response Payload

Element Name	Type	Description
result	void	This operation returns nothing for the method deleteActivityContact.

findActivityContact

The out-of-the-box Find operation for the activity contact SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The FindCriteria object using which the find operation works for the method findActivityContact.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The FindControl object using which the find operation works for the method findActivityContact.

Response Payload

Element Name	Type	Description
result	*Activity Contact*	The parameter returns the list of activity contact records based on FindCriteria and FindControl input objects.

findActivityDeleteExceptions

The out-of-the-box Find operation on activity delete exception SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The FindCriteria object using which the find operation works for the method findActivityDeleteExceptions.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The FindControl object using which the find operation works for the method findActivityDeleteExceptions.

Response Payload

Element Name	Type	Description
result	*Activity Delete Exception*	The parameter returns the list of activity delete exception records based on FindCriteria and FindControl input objects.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The parameter returns the label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The parameter returns the date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	The parameter returns a list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getActivity	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getActivity	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
createActivity	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
createActivity	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.

Operation Name	Privilege Code	Privilege Name	Privilege Description
createActivity	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
createActivity	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
createActivity	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
deleteActivityContact	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
deleteActivityContact	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
deleteActivityContact	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
generateActivitiesFromTemplate	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
generateActivitiesFromTemplate	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
updateActivityContact	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
updateActivityContact	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
findActivityContact	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
findActivityContact	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
deleteAttachment	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
deleteAttachment	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
deleteAttachment	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
createActivityAssignee	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
createActivityAssignee	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
createActivityAssignee	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.

Operation Name	Privilege Code	Privilege Name	Privilege Description
createActivityAssignee	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
createActivityAssignee	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
createActivityAssignee	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
createActivityAssignee	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
getDfltObjAttrHints	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getDfltObjAttrHints	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
createAttachment	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
createAttachment	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
createAttachment	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
createAttachment	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
createAttachment	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
createAttachment	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
createAttachment	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
findActivity	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
findActivity	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
deleteActivity	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
deleteActivityAssignee	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
deleteActivityAssignee	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.

Operation Name	Privilege Code	Privilege Name	Privilege Description
deleteActivityAssignee	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
createActivityContact	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
createActivityContact	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
createActivityContact	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
createActivityContact	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
createActivityContact	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
createActivityContact	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
createActivityContact	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
findActivityAssignee	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
findActivityAssignee	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
processActivity	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
processActivity	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
processActivity	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
processActivity	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
processActivity	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
processActivity	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
processActivity	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
processActivity	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.

Operation Name	Privilege Code	Privilege Name	Privilege Description
processActivity	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
processActivity	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
findActivityDeleteExceptions	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
findActivityDeleteExceptions	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
getEntityList	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getEntityList	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
updateActivity	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
updateActivity	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
copyAttachment	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
copyAttachment	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
copyAttachment	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
copyAttachment	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
copyAttachment	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
copyAttachment	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
copyAttachment	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
mergeActivity	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
mergeActivity	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
getAttachmentContent	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getAttachmentContent	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getAttachmentsListWithoutContent	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getAttachmentsListWithoutContent	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
getServiceLastUpdateTime	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getServiceLastUpdateTime	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
updateActivityAssignee	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
updateActivityAssignee	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_VP_JOB	Marketing VP	Determines high-level marketing objectives, strategies and budgets. Analyzes marketing activities to measure the effectiveness of marketing programs, reviews real-time marketing intelligence to optimize decisions throughout the marketing and sales cycle, take timely actions to influence business outcomes, and gain competitive advantage.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKT_MARKETING_VP_JOB	Marketing VP	Determines high-level marketing objectives, strategies and budgets. Analyzes marketing activities to measure the effectiveness of marketing programs, reviews real-time marketing intelligence to optimize decisions throughout

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			the marketing and sales cycle, take timely actions to influence business outcomes, and gain competitive advantage.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_VIEW_ONLY_ACTIVITY_PRIV	ORA_CJM_CUSTOMER_CHANNEL_PROGRAM_VIEW_DUTY_CRM	Customer Channel Program Viewing	View customer programs.
ZMM_VIEW_ONLY_ACTIVITY_PRIV	ORA_CJM_CUSTOMER_CHANNEL_PROGRAM_MANAGEMENT_DUTY_CRM	Customer Channel Program Management	Manages customer programs and manual adjustments.
ZMM_VIEW_ONLY_ACTIVITY_PRIV	ORA_CJM_CHANNEL_CLAIMS_VIEW_DUTY_CRM	Channel Claims Viewing	Views customer claims.
ZMM_VIEW_ONLY_ACTIVITY_PRIV	ORA_CJM_CHANNEL_CLAIMS_MANAGEMENT_DUTY_CRM	Channel Claims Management	Manages customer claims.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			management application and foundation model.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			identification, and duplicate resolution.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_VP_JOB	Marketing VP	Determines high-level marketing objectives, strategies and budgets. Analyzes marketing activities to measure the effectiveness of marketing programs, reviews real-time marketing intelligence to optimize decisions throughout the marketing and sales cycle, take timely actions to influence business outcomes, and gain competitive advantage.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_ QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			assign SR to a user or change the status of a SR.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKT_MARKETING_VP_JOB	Marketing VP	Determines high-level marketing objectives, strategies and budgets. Analyzes marketing activities to measure the effectiveness of marketing programs, reviews real-time marketing intelligence to optimize decisions throughout the marketing and sales cycle, take timely actions to influence business outcomes, and gain competitive advantage.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_READ_ONLY_DUTY	Lead Registration Processing Read Only	Read Only role for Lead Registration Processing Duty.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			information from the audience and campaign work areas.
ORA_MKT_MARKETING_VP_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_MKT_MARKETING_VP_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_ MANAGER_JOB	ORA_MKT_MARKETING_ AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_CORPORATE_ MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_ CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_ MANAGER_JOB	ORA_MKT_MARKETING_ CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ EXECUTION_MANAGEMENT_ DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_VP_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_READ_ONLY_DUTY	Personal Campaign Management Read Only	Read Only role for Personal Campaign Management Duty.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_READ_ONLY_DUTY	Product Recommendation Analysis Read Only	Read Only role for Product Recommendation Analysis Duty
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_VP_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZCA_REVIEW_CRM_ APPROVAL_TRANSACTIONS_ ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_ MANAGER_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_ MANAGER_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_READ_ONLY_DUTY	Sales Forecasting Management Read Only	Read Only role for Sales Forecasting Management Duty.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_VP_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_READ_ONLY_DUTY	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_READ_ONLY_DUTY	Territory Management Read Only	Read Only role for Territory Management Duty.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Activity

The task and appointment information.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activityManagementService/}Activity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Activity Assignee*
Contains	*Activity Contact*
Contains	*Activity*
Contains	*Note*
Contains	*Activity Objective*
Contained by	*Activity*
Handled by	*Activity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountId	long	The party ID of the activity account (e.g. Customer - org/person, or Partner).
AccountName	string	The name of the account associated with the activity.
AccountNumber	string	Account Number of account associated with the activity.
ActivityAssignee	*Activity Assignee*	The attribute used to capture the assignees and resources associated with the activity.
ActivityContact	*Activity Contact*	The attribute used to capture the contacts associated to the activity.
ActivityCreatedBy	string	The original activity created by.
ActivityCreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The original activity creation date.
ActivityDescription	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The text field for capturing descriptive information about the activity.

Name	Type	Description
ActivityEndDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The end date and time of an appointment or the completion time of a task.
ActivityFunctionCode	string	The task vs. appointment for system use only.
ActivityId	long	The unique identifier of the activity. • Primary Key
ActivityLastUpdateLogin	string	The original activity last update login.
ActivityMtgMinutes	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The activity meeting minutes.
ActivityNumber	string	The system-generated activity number that can come from an external system (user key).
ActivityObjectives	*Activity Objective*	The activity objectives.
ActivityStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The start date and time of an appointment or a task that defaults to null for an appointment and to creation datetime for a task.
ActivitySubtypeCode	string	Displays a list of subtype values that are dependent on the value of the activity.
ActivityTimezone	string	The time zone that the activity needs to be created in, which may be different from the default logged in user's time zone preference.
ActivityTypeCode	string	The type or category of the activity.
ActivityUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The original activity update date.
ActivityUpdatedBy	string	The original activity updated by.
ActivityUserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The original activity user last update date.
AllDayFlag	boolean	Indicates that an appointment is for the entire day.
ArticleVersionId	string	Knowledge Article Version

Name	Type	Description
AssessmentId	long	The identifier of the assessment to which the activity or the activity template is associated with.
AssetId	long	Id of the Asset associated with the activity.
AssetName	string	Name of the Asset associated with the activity
AssetNumber	string	Asset Number.
AssetSerialNumber	string	Asset Serial Number.
AutoLogSource	string	The source system activities that are auto-generated and used later in sync back logic to avoid double appearances of the same activity.
BpId	long	The related business plan.
BusinessPlanName	string	The business plan name associated with the activity.
BusinessPlanNumber	string	Business Plan Number of the business plan associated with the activity.
CallReportToActivity	*Activity*	The call report to the activity.
CallReportUpcomingYN	string	Indicates Y,N, or M for upcoming appointments.
CallReportYN	string	Indicates to check if the activity has a call report.
CampaignId	long	The unique identifier for the campaign.
CampaignName	string	The name of the campaign associated with the activity.
CampaignNumber	string	Campaign Number of the campaign associated with the activity.
CaseId	long	Case Id
CaseNumber	string	Case Number
CaseTitle	string	Case Title

Name	Type	Description
CheckedInBy	string	Specifies the name of the person who checks-in to a location.
CheckedOutBy	string	Specifies the name of the person who checks-out to a location.
CheckinDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Stores the date and time when a user checks in to an Appointment.
CheckinLatitude	decimal	Stores the latitude of a location where a user checks in to an Appointment.
CheckinLongitude	decimal	Stores the longitude of a location where a user checks in to an Appointment.
CheckoutDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Stores the date and time when a user checks out of an Appointment.
CheckoutLatitude	decimal	Stores the latitude of a location where a user checks out of an Appointment.
CheckoutLongitude	decimal	Stores the longitude of a location where a user checks out of an Appointment.
ClaimId	long	The related claim.
ClaimName	string	The claim name associated with the activity.
ClaimNumber	string	Claim Number of the claim associated with the activity.
ContactNumber	string	Contact Number of primary contact associated with the activity.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.

Name	Type	Description
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomFKAttribute	string	The custom foreign key attribute.
CustomerAccountId	long	The ID of the customer account that the activity relates to.
DealId	long	The related deal.
DealNumber	string	The deal number associated with the activity.
DelegatorId	long	The activity resource that delegated activity ownership to another resource.
DelegatorName	string	The name of activity resource that delegated activity ownership to another resource.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
DirectionCode	string	The inbound/outbound direction code which is optional and defaults to null.
DismissAssignee	string	Flag to dismiss Assignee.Valid values are Y and N.
DismissFlag	boolean	This Flag indicates if this activity is Dismissed
DoNotCallFlag	boolean	Flag to indicate if primary Contact can be called.
DueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date the task activity is due to be completed.
Duration	decimal	The duration of an appointment or task.
EmailSentDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	This field is used to capture the Activity Email Notification shared date for Outlook integration
ExternalContactEmail	string	Indicates the Email address of an external contact.
ExternalContactName	string	Indicates the name of an external contact.

Name	Type	Description
ExternallyOwnedFlag	boolean	Indicates that the activity is not created by an internal resource.
FundRequestId	long	The related fund request.
FundRequestName	string	The fund request name associated with the activity.
FundRequestNumber	string	Fund Request Number of the fund request associated with the activity.
IbAssetId	long	Id of the Installed Base Asset associated with the activity.
IbAssetNumber	string	Number of the Installed Base Asset associated with the activity.
IbAssetSerialNumber	string	Serial Number of the Installed Base Asset associated with the activity.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LeadId	long	The related lead ID.
LeadName	string	The lead name.
LeadNumber	string	Lead Number of lead associated with the activity.
Location	string	The appointment location.
LocationId	long	Location or Address ID of the activity account or primary contact.
MobileActivityCode	string	The unique identifier of an external mobile device.
Note	*Note*	The attribute used to capture note records for an activity.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ObjectiveId	long	The related objective.
OpportunityId	long	The related opportunity.
OpportunityName	string	The name of the opportunity associated with the activity.
OpportunityNumber	string	Opportunity Number of the opportunity Associated with the activity.
OtherPartyPhoneNumber	string	The phone number for inbound phone calls as they apply to the ANI or number being called from. For outbound calls, this applies to the phone number being called.
OutcomeCode	string	The outcome of the activity.
OutlookAutoSyncFlag	boolean	Indicates whether an appointment was automatically generated by the synchronization process from Microsoft 365
OutlookFlag	boolean	Indicates if activity was created from Outlook and synced. A "Y" indicates yes.
OutlookGlobalId	string	The unique identifier of an appointment created from Microsoft 365
OutlookIdentifier	string	The unique identifier from Outlook activity.
OwnerAddress	string	Activity Owner's Address.
OwnerEmailAddress	string	Activity Owner's Email Address.
OwnerId	long	The primary resource on the activity which supports resources only.
OwnerName	string	The name of the primary resource of activity.
OwnerPhoneNumber	string	Activity Owner's Phone Number.

Name	Type	Description
ParentActivity	*Activity*	The parent activity.
ParentActivityId	long	The related activity ID; only applicable if the record is a follow up activity.
PartnerEnrollmentId	long	The related partner enrollment.
PartnerPartyId	long	Party identifier of the partner organization.
PartnerPartyName	string	Party name of the partner organization.
PartnerPartyNumber	string	Partner Party Number of partner associated with the activity.
PartnerProgramId	long	The related partner program.
PartnerProgramName	string	The name of the partner program associated with the activity.
PartnerProgramNumber	string	Partner Program Number of partner program associated with the activity.
PartnerUsageFlag	boolean	The flag to indicate that the activity has been created for an organization account with usage as partner.
PercentageComplete	decimal	Indicates a numeric value 0-100 to reflect the percent complete status of the activity. Free form numeric and % value at end.
PrimaryContactEmailAddress	string	The holder for the email ID of the primary contact.
PrimaryContactId	long	The primary contact of the activity.
PrimaryContactName	string	The name of the primary contact.
PrimaryFormattedAddress	string	Holds Address of the primary contact
PrimaryFormattedPhoneNumber	string	The holder for the phone number of the primary contact.
PriorityCode	string	The priority of the activity which defaults to 2 and has possible values of 1, 2, and 3.

Name	Type	Description
PrivateFlag	boolean	Indicates if the activity is private.
RecurDay	long	Indicates a repeat on a specified day of the month (for monthly appointments).
RecurEndDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the activity ends on a specified date.
RecurEveryOptionFlag	boolean	Indicates if the recurrence occurs for every day, month, or year. For example, a daily recurring appointment can occur every day of the week or weekdays only. If it is everyday of the week, it is set to Y. If it is weekdays only, it is set to N.
RecurExceptionFlag	boolean	Indicates if the appointment instance has been updated outside of a recurring appointment series.
RecurFrequency	decimal	The frequency that the recurring appointment series repeats.
RecurFriFlag	boolean	Indicates an appointment repeat on Friday.
RecurMonFlag	boolean	Indicates an appointment repeat on Monday.
RecurMonth	string	Indicates an appointment repeat on specified month (for yearly appointments).
RecurNumberOfInstances	decimal	The specific number of occurrences for the series to end after.
RecurOrigInstDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The original date of a recurring appointment instance.
RecurPattern	string	The week for an appointment to recur (for monthly and yearly appointments). Possible values: First, Second, Third, Fourth, Last.
RecurRecType	string	The type to be used for internal use only. Either "I" for instance or "S" for series or "N" for non-recurring. Do not populate it if Activity is of type Task.
RecurSatFlag	boolean	Indicates an appointment repeat on Saturday.
RecurSeriesId	long	The series ID that links instances of a series together.

Name	Type	Description
RecurSunFlag	boolean	Indicates an appointment repeat on Sunday.
RecurThuFlag	boolean	Indicates an appointment repeat on Thursday.
RecurTueFlag	boolean	Indicates an appointment repeat on Tuesday.
RecurTypeCode	string	Indicates how often an appointment is repeated. Possible values include Daily, Weekly, Monthly, and Yearly.
RecurWedFlag	boolean	Indicates an appointment repeat on Wednesday.
RecurWeekday	string	The recurrence that works in conjunction with the RecurPattern attribute. Possible values include Monday to Sunday, Weekday, Weekend, and Day.
ReferenceCustomerActTypeCode	string	The activity type for a reference customer activity to be used as an extension only.
ReferenceCustomerId	long	The ID of the reference customer (party) associated with the activity.
ReminderPeriod	string	The reminder period.
ResourceNumber	string	Resource Number of owner associated with the activity.
ResponseCode	string	The response code.
SalesObjectiveName	string	The sales objective name associated with the activity.
SalesObjectiveNumber	string	Sales Objective Number of the sales objective associated with the activity.
ShowTimeAs	string	The show time.
SortDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	This is an internal column which is used to sort the activity based on the due date for task and start date for activity.
SourceObjectCode	string	The object code to which the activity will be related to.

Name	Type	Description
SourceObjectId	long	The identifier of the object to which activity will be related to.
SrId	long	The service request ID.
SrNumber	string	The service request number.
StatusCode	string	The pre-defined code used to indicate the status.
Subject	string	The subject/name/title of the activity.
SubmittedBy	long	The call report submitter.
SubmittedByName	string	The call report submitter.
SubmittedDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The call report submission date.
SwitchCallId	string	The unique identifier of the call on the external phone system.
TaskReminderPeriod	string	Task Reminder Period
TemplateDuration	decimal	The duration (in days) of the template activity. This attribute is used with the start date when generating an activity from a template in order to calculate the due date.
TemplateLeadTime	decimal	The lead time (in days) of the template activity. This attribute is used with the date input parameter when generating an activity from a template in order to calculate the activity start date. Activity start date = date provided as input parameter + lead time.
UpdateFlag	boolean	The flag that controls if the user has access to update the record.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.
WebConferenceDetails	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	Web conference details
WebConferenceId	string	Web conference unique id

Name	Type	Description
WebConferenceURL	string	Web conference join URL

Activity Assignee

The assignee or resource associated with the activity.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activityManagementService/}ActivityAssignee

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Activity*
Handled by	*Activity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityAssigneeId	long	The activity assignee ID which is the surrogate key added for BI and Outlook. This is not a substitute for the primary key.
ActivityId	long	The unique identifier of the activity. • Primary Key
AssigneeId	long	The ID of the assignee associated with the activity. • Primary Key
AssigneeName	string	The assignee's name.
AssigneePartyNumber	string	The attribute that holds the party number of the contact.

Name	Type	Description
AttendeeFlag	boolean	The flag to check if the contact attended the activity.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DismissFlag	boolean	The flag that indicates if the activity is dismissed.
JobName	string	The job name.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
Phone	string	The phone information for the entity.
PrimaryEmail	string	The attribute that holds the email ID of the contact.
PrimaryFormattedAddress	string	The attribute that holds the primary address of the resource.

Name	Type	Description
ReminderDatetime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date/time to send the appointment reminder.
ReminderPeriod	int	Indicates how soon before the appointment to send a reminder.
ResourceNumber	string	Resource Number of the resource associated with the activity.
ResponseCode	string	The flag to indicate whether a reminder is needed.
ShowTimeAsCode	string	Indicates how to display the appointment time on the calendar (e.g. free, busy, tentative).
TaskReminderPeriod	int	Designates how soon before the task due to send a reminder.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Activity Contact

The contact associated with the activity.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activityManagementService/}ActivityContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Activity*
Handled by	*Activity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityContactId	long	The activity contact ID which is a surrogate key added for BI and Outlook. This is not a substitute for the primary key.
ActivityId	long	The unique identifier of the activity. • Primary Key
Affinity	string	The contact affinity.
AttendeeFlag	boolean	The flag to check If the contact attended the activity.
BuyingRole	string	The contact buying role.
ContactAccount	string	The attribute that holds the account name that the contact is associated with.
ContactAccountId	long	The attribute that holds the ID of the account that the contact is associated with.
ContactEmail	string	The attribute that holds the email ID of the contact.
ContactId	long	The ID of the contact associated with the activity. • Primary Key
ContactJobTitle	string	The attribute that holds the job title of the contact.
ContactName	string	The contact name.
ContactPartyNumber	string	The attribute that holds the party number of the contact.
ContactPhone	string	The attribute that holds the phone number of the contact.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DoNotCallFlag	boolean	The flag to check if the contact can be contacted through call.
DoNotContactFlag	boolean	The flag to check if the contact can be contacted.
DoNotEmailFlag	boolean	The flag to check if this contact can be contacted through email.
ExternalContactEmail	string	Indicates the Email address of an external contact.
ExternalContactFlag	boolean	Indicates that the contact does not exist in Oracle Sales Cloud.
ExternalContactName	string	Indicates the name of an external contact.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PrimaryContactFlag	boolean	This used of enable/disable PrimaryContactFlag for a contact.
PrimaryFormattedAddress	string	The attribute that holds the primary address of the contact.
RelationshipId	long	The relationship identifier for the record.

Name	Type	Description
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Activity Delete Exception

The instances of an appointment series that have been deleted.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activityManagementService/}ActivityDeleteException

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Activity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DeleteExceptionSeriesId	long	The unique identifier of the appointment series. • Primary Key
DeleteExceptionStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The start date of the recurring appointment that was deleted. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Activity Objective

The objectives associated with the activity.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activityManagementService/}ActivityObjectives

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Activity*
Handled by	*Activity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityId	long	The unique identifier of the activity.
CompletedFlag	boolean	The completed flag.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.

Name	Type	Description
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ObjectiveCode	string	The objective code.
ObjectiveFreefmtText	string	The objective free format text.
ObjectiveId	long	The objective ID. • Primary Key

Common Attachment

The attachment that can include documents, files, or web site links associated with appointments, interactions or tasks.

QName: {http://xmlns.oracle.com/apps/crmCommon/objects/objectsService/}CommonAttachments

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Appointment Service*
Handled by	*Customer Interaction*
Handled by	*Activity Service*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttachedDocumentId	long	The identifier of the document attachment.
Attachment	string	The title or name of the attachment.
CategoryName	string	The name of the attachment category.
DatatypeCode	string	The code value of the data type.
Description	string	The free text description of the record.
DmFolderPath	string	The folder path of the attachment.
DmNode	decimal	The attachment node.
DmRepository	string	The attachment repository.
DmType	string	The type of attachment.
DmVersionNumber	string	The version number of the attachment.
DocumentAttributes	string	The attributes of the document attachment.
DocumentEntityId	long	The identifier of document entity.

Name	Type	Description
DownloadStatus	string	The download status of attachment.
EntityAttributes	string	The entity attributes of the attachment.
EntityName	string	The name of the entity attachment.
FileName	string	The name of the file attachment.
FileURL	string	The URL of the file attachment.
Pk1Value	string	Value of primary key 1.
Pk2Value	string	Value of primary key 2.
Pk3Value	string	Value of primary key 3.
Pk4Value	string	Value of primary key 4.
Pk5Value	string	Value of primary key 5.
TableName	string	The table name of attachment.
Title	string	The attachment title.
URL	string	The destination URL associated with a specific Google AdWords ad.
UploadedFile	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The uploaded attachment file.
UploadedFileContentType	string	The content type of file attachment.
UploadedFileLength	long	The length of file attachment.
UploadedFileName	string	The name of the file attachment.
UploadedText	string	The attachment text.
UsageType	string	The usage type of the attachment.
VersionControlIcon	string	The attachment version control.

Name	Type	Description

Note

The object that captures comments, information, or instructions for an Oracle Fusion Applications business object.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/noteService}Note

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note Descriptive Flexfields*
Contained by	*Objective*
Contained by	*Opportunity*
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Contained by	*Activity*
Contained by	*Sales Competitor*
Contained by	*Sales Lead*
Contained by	*Business Plan*
Contained by	*Program Enrollments*
Contained by	*Reference*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*

Relationship Type	Object or Service
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreatorPartyId	long	This is the party identifier for the note creator.

Name	Type	Description
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteFlag	boolean	Indicates whether the user has access to delete the note.
Dff	*Note Descriptive Flexfields*	The descriptive flex field segment.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record
NoteAttributeCategory	string	The contextual flex field for development usage.
NoteAttributeUid1	string	The flex field for development usage.
NoteAttributeUid2	string	The flex field for development usage.
NoteAttributeUid3	string	The flex field for development usage.
NoteAttributeUid4	string	The flex field for development usage.
NoteAttributeUid5	string	The flex field for development usage.
NoteId	long	The unique identifier of the note. • Primary Key
NoteNumber	string	The alternate unique identifier of the note. A user key that is system generated or from an external system.
NoteTitle	string	The title of the note entered by the user.
NoteTxt	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	This is the column that stores the actual note text.

Name	Type	Description
NoteTypeCode	string	This is the note type code for categorization of note.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
SourceObjectCode	string	This is the source_object_code for the source object as defined in OBJECTS Metadata.
SourceObjectId	string	This is the source_object_Uid for the source object such as Activities, Opportunities, and so on defined in OBJECTS metadata.
UpdateFlag	boolean	Indicates whether the user can update the note.
VisibilityCode	string	This is the attribute to specify the visibility level of the note.

Note Descriptive Flexfields

The descriptive flex field that captures additional information for notes, such as a priority or status.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/flex/noteDff/}NoteDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Note*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*

Relationship Type	Object or Service
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
NoteId	long	The unique identifier of the note. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Activity Task Service (Deprecated)

Service representing some type of work that the task owner must do, with a priority and a due date. WARNING: This service has been deprecated and is being replaced with ActivityService.

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}ActivityTaskService

Service WSDL URL: https://servername/crmService/ActivityTaskService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Activity Service*
Handles	*Task*
Handles	*Activity Task Assignee*
Handles	*Activity Task Contact*

Operations

- *reassignTaskViaPartyId*
- *createTask*
- *claimTask*
- *completeTask*
- *findTask*
- *generateTasksFromTemplate*
- *getTaskById*
- *reassignTask*
- *releaseTask*
- *resumeTask*
- *suspendTask*
- *updateTask*
- *updateTaskTCAPartyMerge*
- *withdrawTask*
- *createTaskContact*
- *deleteTaskContact*
- *getTaskContact*
- *findTaskContact*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

reassignTaskViaPartyId

Reassigns an activity task using assignee party identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
taskId	string	The identifier of the activity task reassigned using assignee party identifier.
assigneesId	long	The identifiers of the task assignees reassigned using assignee party identifier.

Response Payload

Element Name	Type	Description
result	void	

createTask

Creates an activity task.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
taskRow	*Task*	The identifier of the created activity task.

Response Payload

Element Name	Type	Description
result	*Task*	The created activity task.

claimTask

The claim operation for activity task.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
taskId	string	Identifier of the claimed activity task.

Response Payload

Element Name	Type	Description
result	*Task*	The claimed activity task.

completeTask

The complete operation for activity task.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
taskId	string	Identifier of the completed activity task.

Response Payload

Element Name	Type	Description
result	*Task*	The completed activity task.

findTask

Finds an activity task.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
criteriaAsXML	string	The criteria used to limit your query result, such as the filter (where clause), the fetch size, etc.
findControl	string	Find control. Not currently used.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	*Task*	A list of activity tasks that satisfy the inbound criteria.

generateTasksFromTemplate

Generates task from template.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
templateId	long	Identifier of the template when generating tasks from a template.
sourceObjectId	long	Identifier of the source object of the template when generating tasks from a template.
startDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Start date of the template when generating tasks from a template.
taskAttributes	*Task*	Attributes of the tasks generated from a template.

Response Payload

Element Name	Type	Description
result	*Task*	Tasks generated from a template.

getTaskById

Retrieves activity task using activity task Identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
taskId	string	Identifier of the activity task.

Response Payload

Element Name	Type	Description
result	*Task*	Task that matches the activity task identifier.

reassignTask

Reassigns an activity task.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
taskId	string	Identifier of the reassigned activity task.
assignees	string	Task assignees.

Response Payload

Element Name	Type	Description
result	void	

releaseTask

Release operation for activity task.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
taskId	string	Identifier of the released activity task.

Response Payload

Element Name	Type	Description
result	*Task*	Released activity task.

resumeTask

Resume operation for activity task.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
taskId	string	Identifier of the resumed activity task.

Response Payload

Element Name	Type	Description
result	*Task*	Resumed activity task.

suspendTask

Suspend operation for activity task.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
taskId	string	Identifier of the suspended activity task.

Response Payload

Element Name	Type	Description
result	*Task*	Suspended activity task.

updateTask

Update operation for activity task.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
taskRow	*Task*	Identifier of the updated activity task.

Response Payload

Element Name	Type	Description
result	*Task*	Updated activity task.

updateTaskTCAPartyMerge

Updates activity task following party merge.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
survivorId	string	Identifier of survivor party for activity task update following party merge.
recordId	string	Identifier of party for activity task update following party merge.
objDef	string	Object definition for activity task update following party merge.

Response Payload

Element Name	Type	Description
result	string	Updates activity task following party merge.

withdrawTask

Withdraw operation for activity task.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
taskId	string	Identifier of the withdrawn activity task.

Response Payload

Element Name	Type	Description
result	*Task*	Withdrawn activity task.

createTaskContact

Creates an activity task contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityTaskContact	*Activity Task Contact*	Activity task contact to be created.

Response Payload

Element Name	Type	Description
result	*Activity Task Contact*	Created activity task contact.

deleteTaskContact

Deletes an activity task contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityTaskContact	*Activity Task Contact*	Activity task contact to be deleted.

Response Payload

Element Name	Type	Description
result	void	

getTaskContact

Retrieves an activity task contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityTaskContactId	long	Unique identifier for activity contact record.

Response Payload

Element Name	Type	Description
result	*Activity Task Contact*	Activity task contact that matches the inbound key attributes.

findTaskContact

Finds operation for activity task contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Activity Task Contact*	A list of activity task contact that satisfy the inbound criteria.

getDfltObjAttrHints

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	
localeName	string	

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	

getServiceLastUpdateTime

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	

getEntityList

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	

Element Name	Type	Description

Activity Service

Service to operate on activity object.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activityManagementService/}ActivityService

Service WSDL URL: https://servername/crmService/ActivityService?WSDL

Logical Business Objects

- CRM : Applications Common Components : Activity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Common Attachment SDO*
Handles	*Activity Assignee*
Handles	*Activity Delete Exception*
Handles	*Note Descriptive Flexfields*
Handles	*Activity Contact*
Handles	*Note*
Handles	*Activity*
Handles	*Activity Objective*

Operations

- *deleteAttachment*
- *getAttachmentsListWithoutContent*
- *getAttachmentContent*

- *copyAttachment*
- *createAttachment*
- *generateActivitiesFromTemplate*
- *getActivity*
- *createActivity*
- *updateActivity*
- *deleteActivity*
- *mergeActivity*
- *findActivity*
- *processActivity*
- *createActivityAssignee*
- *updateActivityAssignee*
- *deleteActivityAssignee*
- *findActivityAssignee*
- *createActivityContact*
- *updateActivityContact*
- *deleteActivityContact*
- *findActivityContact*
- *findActivityDeleteExceptions*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

deleteAttachment

An operation to delete a single or multiple attachments associated to an activity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
deleteParams	*Common Attachment*	The parameter based on which deletion of attachments should trigger.
commitData	string	A flag to indicate whether or not to commit transaction for this operation.

Response Payload

Element Name	Type	Description
result	string	The parameter returns the success or failure status of the operation.

getAttachmentsListWithoutContent

An operation to get list of all the attachment associated with an activity without any file content.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
getParameters	*Common Attachment*	The parameters based on which list of attachments to be fetched is determined.

Response Payload

Element Name	Type	Description
result	*Common Attachment*	The parameter returns the list of all the attachments without any file content.

getAttachmentContent

An operation to get attachment associated with an activity with file content if applicable.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
getParameters	*Common Attachment*	The parameters based on which attachment to be fetched is determined.

Response Payload

Element Name	Type	Description
result	*Common Attachment*	The parameter returns the attachment with file content, if applicable.

copyAttachment

An operation to copy a single or multiple attachments associated to an activity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
attachmentRows	*Common Attachment*	The parameter for the list of attachments to be copied.
commitData	string	A flag to indicate whether or not to commit transaction for this operation.

Response Payload

Element Name	Type	Description
result	string	The parameter returns the success or failure status of the operation.

createAttachment

An operation to create a single or multiple attachments associated to an activity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
attachmentRows	*Common Attachment*	The parameter which provides the list of attachments to be created.
commitData	string	A flag to indicate whether or not to commit transaction for this operation.

Response Payload

Element Name	Type	Description
result	string	The parameter returns the success or failure status of the operation.

generateActivitiesFromTemplate

An operation to generate activities from a template. A valid value for templateId should be passed. Only following activity attributes are supported in activityAttributes input parameter as of now: CustomerId, OwnerId, AssesmentId, ActivityContact, ActivityAssignee, ActivityStartDate, LeadId, OpportunityId, and CampaignId.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
templateId	long	The unique identifier of the template-set using which the activities are to be generated.
activityAttributes	*Activity*	The Activity SDO attribute list using which template activities should be generated.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the list of all the generated activities using the template.

getActivity

The out-of-the-box Get operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityId	long	The activity ID for which the activity record is to be fetched.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the activity record based on input activity ID.

createActivity

The out-of-the-box Create operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activity	*Activity*	The activity record to be created for the method createActivity.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the created activity record.

updateActivity

The out-of-the-box Update operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activity	*Activity*	The activity record to be updated for the method createActivity carrying updated attributes.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the updated activity record.

deleteActivity

The out-of-the-box Delete operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activity	*Activity*	The activity record to be deleted for the method deleteActivity.

Response Payload

Element Name	Type	Description
result	void	This operation returns nothing for the method deleteActivity.

mergeActivity

OOTB merge operation on Activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activity	*Activity*	Activities which have to be merged.

Response Payload

Element Name	Type	Description
result	*Activity*	Merged Activity.

findActivity

The out-of-the-box Find operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The FindCriteria object using which the find operation works for the method findActivity.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The FindControl object using which the find operation works for the method findActivity.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the list of activity records based on FindCriteria and FindControl input objects.

processActivity

The out-of-the-box Process operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The name of the operation to be performed like, create, update, and so on.
activity	*Activity*	The list of activity records on which the operation is to be performed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The optional ProcessControl object to be used while performing this operation.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns a list of activity records after the operation is complete.

createActivityAssignee

The out-of-the-box Create operation for the activity assignee SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityAssigneeWebService	*Activity Assignee*	The activity assignee record to be created for the method createActivityAssignee.

Response Payload

Element Name	Type	Description
result	*Activity Assignee*	The parameter returns the created activity assignee record.

updateActivityAssignee

The out-of-the-box Update operation for the activity assignee SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityAssigneeWebService	*Activity Assignee*	The activity assignee record to be updated for the method updateActivityAssignee.

Response Payload

Element Name	Type	Description
result	*Activity Assignee*	The parameter returns the updated activity assignee record.

deleteActivityAssignee

The out-of-the-box Delete operation for the activity assignee SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityAssigneeWebService	*Activity Assignee*	The activity assignee record to be deleted for the method deleteActivityAssignee.

Response Payload

Element Name	Type	Description
result	void	This operation returns nothing for the method deleteActivityAssignee.

findActivityAssignee

The out-of-the-box Find operation for the activity assignee SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The FindCriteria object using which the find operation works for the method findActivityAssignee.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The FindControl object using which the find operation works for the method findActivityAssignee.

Response Payload

Element Name	Type	Description
result	*Activity Assignee*	The parameter returns the list of activity assignee records based on FindCriteria and FindControl input objects.

createActivityContact

The out-of-the-box Create operation for the activity contact SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityContactWebService	*Activity Contact*	The activity contact record to be created for the method createActivityContact.

Response Payload

Element Name	Type	Description
result	*Activity Contact*	The parameter returns the created activity contact record.

updateActivityContact

The out-of-the-box Update operation for the activity contact SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityContactWebService	*Activity Contact*	The activity contact record to be updated for the method updateActivityContact.

Response Payload

Element Name	Type	Description
result	*Activity Contact*	The parameter returns the updated activity contact record.

deleteActivityContact

The out-of-the-box Delete operation for the activity contact SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityContactWebService	*Activity Contact*	The activity contact record to be deleted for the method deleteActivityContact.

Response Payload

Element Name	Type	Description
result	void	This operation returns nothing for the method deleteActivityContact.

findActivityContact

The out-of-the-box Find operation for the activity contact SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The FindCriteria object using which the find operation works for the method findActivityContact.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The FindControl object using which the find operation works for the method findActivityContact.

Response Payload

Element Name	Type	Description
result	*Activity Contact*	The parameter returns the list of activity contact records based on FindCriteria and FindControl input objects.

findActivityDeleteExceptions

The out-of-the-box Find operation on activity delete exception SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The FindCriteria object using which the find operation works for the method findActivityDeleteExceptions.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The FindControl object using which the find operation works for the method findActivityDeleteExceptions.

Response Payload

Element Name	Type	Description
result	*Activity Delete Exception*	The parameter returns the list of activity delete exception records based on FindCriteria and FindControl input objects.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The parameter returns the label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The parameter returns the date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	The parameter returns a list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getActivity	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getActivity	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
createActivity	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
createActivity	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
createActivity	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
createActivity	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.

Operation Name	Privilege Code	Privilege Name	Privilege Description
createActivity	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
deleteActivityContact	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
deleteActivityContact	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
deleteActivityContact	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
generateActivitiesFromTemplate	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
generateActivitiesFromTemplate	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
updateActivityContact	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
updateActivityContact	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
findActivityContact	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
findActivityContact	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
deleteAttachment	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
deleteAttachment	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
deleteAttachment	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
createActivityAssignee	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
createActivityAssignee	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
createActivityAssignee	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
createActivityAssignee	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
createActivityAssignee	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.

Operation Name	Privilege Code	Privilege Name	Privilege Description
createActivityAssignee	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
createActivityAssignee	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
getDfltObjAttrHints	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getDfltObjAttrHints	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
createAttachment	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
createAttachment	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
createAttachment	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
createAttachment	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
createAttachment	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
createAttachment	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
createAttachment	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
findActivity	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
findActivity	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
deleteActivity	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
deleteActivityAssignee	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
deleteActivityAssignee	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
deleteActivityAssignee	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
createActivityContact	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.

Operation Name	Privilege Code	Privilege Name	Privilege Description
createActivityContact	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
createActivityContact	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
createActivityContact	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
createActivityContact	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
createActivityContact	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
createActivityContact	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
findActivityAssignee	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
findActivityAssignee	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
processActivity	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
processActivity	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
processActivity	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
processActivity	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
processActivity	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
processActivity	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
processActivity	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
processActivity	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
processActivity	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
processActivity	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.

Operation Name	Privilege Code	Privilege Name	Privilege Description
findActivityDeleteExceptions	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
findActivityDeleteExceptions	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
getEntityList	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getEntityList	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
updateActivity	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
updateActivity	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
copyAttachment	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
copyAttachment	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
copyAttachment	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
copyAttachment	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
copyAttachment	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
copyAttachment	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
copyAttachment	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
mergeActivity	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
mergeActivity	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
getAttachmentContent	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getAttachmentContent	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
getAttachmentsListWithoutContent	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getAttachmentsListWithoutContent	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getServiceLastUpdateTime	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getServiceLastUpdateTime	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
updateActivityAssignee	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
updateActivityAssignee	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			application users to maintain consistent financial application setup, rules, and access.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			account planning, territory and quota management, and managing sales forecasts for the territory.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_VP_JOB	Marketing VP	Determines high-level marketing objectives, strategies and budgets. Analyzes marketing activities to measure the effectiveness of marketing programs, reviews real-time marketing intelligence to optimize decisions throughout the marketing and sales cycle, take timely actions to influence business outcomes, and gain competitive advantage.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			responses, segments, lists, and treatments.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_ MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKT_MARKETING_VP_JOB	Marketing VP	Determines high-level marketing objectives, strategies and budgets. Analyzes marketing activities to measure the effectiveness of marketing programs, reviews real-time marketing intelligence to optimize decisions throughout the marketing and sales cycle, take timely actions to influence business outcomes, and gain competitive advantage.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_VIEW_ONLY_ACTIVITY_PRIV	ORA_CJM_CUSTOMER_CHANNEL_PROGRAM_VIEW_DUTY_CRM	Customer Channel Program Viewing	View customer programs.
ZMM_VIEW_ONLY_ACTIVITY_PRIV	ORA_CJM_CUSTOMER_CHANNEL_PROGRAM_MANAGEMENT_DUTY_CRM	Customer Channel Program Management	Manages customer programs and manual adjustments.
ZMM_VIEW_ONLY_ACTIVITY_PRIV	ORA_CJM_CHANNEL_CLAIMS_VIEW_DUTY_CRM	Channel Claims Viewing	Views customer claims.
ZMM_VIEW_ONLY_ACTIVITY_PRIV	ORA_CJM_CHANNEL_CLAIMS_MANAGEMENT_DUTY_CRM	Channel Claims Management	Manages customer claims.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_ REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_ REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_ MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_ MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_VP_JOB	Marketing VP	Determines high-level marketing objectives, strategies and budgets. Analyzes marketing activities to measure the effectiveness of marketing programs, reviews real-time marketing intelligence to optimize decisions throughout the marketing and sales cycle, take timely actions to influence business outcomes, and gain competitive advantage.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKT_MARKETING_VP_JOB	Marketing VP	Determines high-level marketing objectives, strategies and budgets. Analyzes marketing activities to measure the effectiveness of marketing programs, reviews real-time marketing intelligence to optimize decisions throughout the marketing and sales cycle, take timely actions to influence business outcomes, and gain competitive advantage.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_READ_ONLY_DUTY	Lead Registration Processing Read Only	Read Only role for Lead Registration Processing Duty.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_MARKETING_VP_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_MKT_MARKETING_VP_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_EXECUTION_MANAGEMENT_DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_CORPORATE_ MARKETING_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKL_SALES_LEAD_ QUALIFIER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_ MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_VP_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_PARTNER_SALES_ MANAGER_JOB	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_ DIRECTOR_JOB	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_ MANAGER_JOB	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_PARTNER_ ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_READ_ONLY_DUTY	Personal Campaign Management Read Only	Read Only role for Personal Campaign Management Duty.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_READ_ONLY_DUTY	Product Recommendation Analysis Read Only	Read Only role for Product Recommendation Analysis Duty
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_VP_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_PARTNER_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_ MANAGER_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ ADMINISTRATION	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_READ_ONLY_DUTY	Sales Forecasting Management Read Only	Read Only role for Sales Forecasting Management Duty.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_VP_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_READ_ONLY_DUTY	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_RESTRICTED_ USER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZPM_PARTNER_SALES_ REPRESENTATIVE_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZPM_PARTNER_SALES_ MANAGER_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZPM_PARTNER_ ADMINISTRATOR_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_SVC_SERVICE_STATUS_ COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_ COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_	ORA_ZCM_SETUP_CUSTOMER_ CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_READ_ONLY_DUTY	Territory Management Read Only	Read Only role for Territory Management Duty.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Activity Task Assignee

An assignee on an activity task such as John Jones or Mary Smith, who is responsible for performing the piece of work.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TaskAssignee

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Task*
Handled by	*Activity Task Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AssigneeGUID	string	The unique identifier of the task assignee. • Primary Key
AssigneeName	string	The name of the task assignee.
PartyIdTransient	long	The owner party identifier used to populate the owner when a task is created from a service.
TaskId	string	The unique identifier of the task. • Primary Key

Activity Task Contact

A contact such as Steve Smith, who is involved with an activity task or for whom the task is being done.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TaskContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Task*
Handled by	*Activity Task Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityTaskContactId	long	The unique identifier for activity contact record. • Primary Key

Name	Type	Description
ContactId	long	The unique identifier of the person contact for the customer.
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).
EmailAddress	string	The email address associated with the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameTransient	string	The transient name of the party.
TaskGUID	string	A unique, system generated number automatically populated by the Activities component.

Task

An activity task data object representing some type of work the task owner must do, with a priority and a due date.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}Task

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Activity Task Contact*
Contains	*Activity Task Assignee*
Handled by	*Activity Task Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountId	long	The account for the customer associated with the task.
AcquireByPartyIdTransient	long	The party identifier corresponding to the AcquiredBy username value.
AcquiredBy	string	The user name corresponding to the 'Claim By' attribute in the WFTASK table.
AssessmentId	long	The identifier of the assessment to which the task relates.
AssociatedObjectCd	string	The code of the object associated with the task.
AssociatedObjectId	long	The identifier of the object associated with the task.
CustomerId	long	The identifier of the customer associated with the task.
DueDt	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date by which the task is due to be completed.
ExtnDateAttribute1	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute10	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute11	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute12	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute13	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute14	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.

Name	Type	Description
ExtnDateAttribute15	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute16	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute17	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute18	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute19	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute2	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute20	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute3	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute4	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute5	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute6	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute7	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute8	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnDateAttribute9	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date extension attribute for the task.
ExtnNumberAttribute1	long	The number extension attribute for the task.
ExtnNumberAttribute10	long	The number extension attribute for the task.

Name	Type	Description
ExtnNumberAttribute11	long	The number extension attribute for the task.
ExtnNumberAttribute12	long	The number extension attribute for the task.
ExtnNumberAttribute13	long	The number extension attribute for the task.
ExtnNumberAttribute14	long	The number extension attribute for the task.
ExtnNumberAttribute15	long	The number extension attribute for the task.
ExtnNumberAttribute16	long	The number extension attribute for the task.
ExtnNumberAttribute17	long	The number extension attribute for the task.
ExtnNumberAttribute18	long	The number extension attribute for the task.
ExtnNumberAttribute19	long	The number extension attribute for the task.
ExtnNumberAttribute2	long	The number extension attribute for the task.
ExtnNumberAttribute20	long	The number extension attribute for the task.
ExtnNumberAttribute3	long	The number extension attribute for the task.
ExtnNumberAttribute4	long	The number extension attribute for the task.
ExtnNumberAttribute5	long	The number extension attribute for the task.
ExtnNumberAttribute6	long	The number extension attribute for the task.
ExtnNumberAttribute7	long	The number extension attribute for the task.
ExtnNumberAttribute8	long	The number extension attribute for the task.
ExtnNumberAttribute9	long	The number extension attribute for the task.
ExtnTextAttribute1	string	The text extension attribute for the task.
ExtnTextAttribute10	string	The text extension attribute for the task.
ExtnTextAttribute11	string	The text extension attribute for the task.

Name	Type	Description
ExtnTextAttribute12	string	The text extension attribute for the task.
ExtnTextAttribute13	string	The text extension attribute for the task.
ExtnTextAttribute14	string	The text extension attribute for the task.
ExtnTextAttribute15	string	The text extension attribute for the task.
ExtnTextAttribute16	string	The text extension attribute for the task.
ExtnTextAttribute17	string	The text extension attribute for the task.
ExtnTextAttribute18	string	The text extension attribute for the task.
ExtnTextAttribute19	string	The text extension attribute for the task.
ExtnTextAttribute2	string	The text extension attribute for the task.
ExtnTextAttribute20	string	The text extension attribute for the task.
ExtnTextAttribute3	string	The text extension attribute for the task.
ExtnTextAttribute4	string	The text extension attribute for the task.
ExtnTextAttribute5	string	The text extension attribute for the task.
ExtnTextAttribute6	string	The text extension attribute for the task.
ExtnTextAttribute7	string	The text extension attribute for the task.
ExtnTextAttribute8	string	The text extension attribute for the task.
ExtnTextAttribute9	string	The text extension attribute for the task.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
ListOfAssigneeGUID	string	The party identifier corresponding to the AcquiredBy username value.
OwnerUser	string	The owner user name associated with the task.

Name	Type	Description
PartyIdTransient	long	The owner party identifier used to populate the owner when a task is created from a service.
PercentageCompleteNumber	long	The percentage completion of the task.
PlannedStartDt	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date of the task.
ReferenceCustomerId	long	The identifier of the reference customer of the task.
ReferenceTypeCd	string	The reference type code of the task.
SiteId	long	The identifier of the site associated with the task.
SourceObjectCd	string	The code of the related object associated with the task.
SourceObjectId	long	The identifier of the related object associated with the task.
TaskActionsList	string	The comma separated list of all task actions for a given task ID.
TaskAssignee	*Activity Task Assignee*	The assignees on the task.
TaskCategoryCd	string	The code for the task category.
TaskContact	*Activity Task Contact*	The contact for the task.
TaskDescription	string	The description of the task.
TaskDisplayURL	string	The relative path of the create or edit task page that is used when a task is edited from the work list.
TaskId	string	The identifier of the task. • Primary Key
TaskName	string	The name of the task.
TaskPriorityCd	string	The priority code of the task.
TaskStateCd	string	The code for the state of the task.

Name	Type	Description
TaskVisibilityCd	string	The code for the task visibility.
TemplateId	long	The identifier of the task template.

Appointment Service (Deprecated)

Service to capture events such as meetings or appointments that occur at a specific time and appear on a user's calendar. WARNING: This service has been deprecated and is being replaced with ActivityService.

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/transient}ActivityAppointmentService

Service WSDL URL: https://servername/crmService/ActivityAppointmentService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Activity Service*
Handles	*Appointment Deletion Exception*
Handles	*Note*
Handles	*Appointment Transient Note SDO*
Handles	*Common Attachment SDO*
Handles	*Appointment Category*
Handles	*Appointment Transient Category SDO*
Handles	*Appointment Transient Contact SDO*
Handles	*Appointment Assignee*

Relationship Type	Object or Service
Handles	*Appointment Contact*
Handles	*Appointment Transient Assignee SDO*
Handles	*Appointment Transient SDO*
Handles	*Note Descriptive Flexfields*

Operations

- *mergeAppointment*
- *copyAttachment*
- *createAttachment*
- *deleteAttachment*
- *getAttachment*
- *getAppointment*
- *createAppointment*
- *createActivityContact*
- *deleteActivityContact*
- *getActivityContact*
- *updateActivityContact*
- *createActivityAssignee*
- *deleteActivityAssignee*
- *getActivityAssignee*
- *updateActivityAssignee*
- *updateAppointment*
- *deleteAppointment*
- *findActivityAssignee*
- *getActivityCategories*
- *createActivityCategories*
- *updateActivityCategories*
- *deleteActivityCategories*
- *findActivityCategories*
- *findActivityContact*
- *getNotes*
- *createNotes*
- *updateNotes*
- *deleteNotes*

- *findNotes*
- *findAppointment*
- *getAppointmentDeleteException*
- *createAppointmentDeleteException*
- *updateAppointmentDeleteException*
- *deleteAppointmentDeleteException*
- *findAppointmentDeleteException*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

mergeAppointment

Merge operation for appointment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
appointmentRow	*Appointment Transient*	Appointment ID to be merged.

Response Payload

Element Name	Type	Description
result	*Appointment Transient*	Merged appointment.

copyAttachment

Copy operation for appointment attachment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
attachmentVORows	*Common Attachment*	The list of attachment objects to be copied or created.
commitData	string	Indicates whether data should be committed to the database.

Response Payload

Element Name	Type	Description
result	string	A list of warnings or informational messages encountered when deleting the appointment attachment.

createAttachment

Creates an appointment attachment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
attachmentVORows	*Common Attachment*	The list of attachment objects to be copied or created.
commitData	string	Indicates whether data should be committed to the database.

Response Payload

Element Name	Type	Description
result	string	A list of warnings or informational messages encountered when deleting the appointment attachment.

deleteAttachment

Deletes an appointment attachment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
deleteParams	*Common Attachment*	Parameters driving the delete operation for appointment attachment.
commitData	string	Indicates whether data should be committed to the database.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	string	A list of warnings or informational messages encountered when deleting the appointment attachment.

getAttachment

Retrieves an appointment attachment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
getParameters	*Common Attachment*	Parameters driving the get operation for appointment attachment.

Response Payload

Element Name	Type	Description
result	*Common Attachment*	The retrieved appointment attachment.

getAppointment

Get operation for appointment transient SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityId	long	Identifier of the appointment to retrieved.

Response Payload

Element Name	Type	Description
result	*Appointment Transient*	Appointment transient SDO that matches the inbound key attributes.

createAppointment

Create operation for appointment transient SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
appointment	*Appointment Transient*	Appointment transient SDO to be created.

Response Payload

Element Name	Type	Description
result	*Appointment Transient*	Created appointment transient SDO.

createActivityContact

Creates an appointment contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityContact	*Appointment Contact*	appointment contact to be created.

Response Payload

Element Name	Type	Description
result	*Appointment Contact*	Created appointment contact.

deleteActivityContact

Deletes an appointment contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityContact	*Appointment Contact*	Appointment contact to be deleted.

Response Payload

Element Name	Type	Description
result	void	

getActivityContact

Retrieves an appointment contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityContactId	long	Unique identifier for activity contact record.

Response Payload

Element Name	Type	Description
result	*Appointment Contact*	Appointment contact that matches the inbound key attributes.

updateActivityContact

Updates appointment contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityContact	*Appointment Contact*	Appointment contact to be updated.

Response Payload

Element Name	Type	Description
result	*Appointment Contact*	Updated appointment contact.

createActivityAssignee

Creates an appointment assignee.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityAssignee	*Appointment Assignee*	Appointment assignee to be created.

Response Payload

Element Name	Type	Description
result	*Appointment Assignee*	Created appointment assignee.

deleteActivityAssignee

Deletes an appointment assignee.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityAssignee	*Appointment Assignee*	Appointment assignee to be deleted.

Response Payload

Element Name	Type	Description
result	void	

getActivityAssignee

Retrieves an appointment assignee.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityAssigneeId	long	Unique identifier for activity assignee record.

Response Payload

Element Name	Type	Description
result	*Appointment Assignee*	Appointment assignee that matches the inbound key attributes.

updateActivityAssignee

Updates an appointment assignee.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityAssignee	*Appointment Assignee*	Appointment assignee to be updated.

Response Payload

Element Name	Type	Description
result	*Appointment Assignee*	Updated appointment assignee.

updateAppointment

Updates an appointment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
appointmentRow	*Appointment Transient*	Identifier of the appointment to be updated.

Response Payload

Element Name	Type	Description
result	*Appointment Transient*	Updated appointment.

deleteAppointment

Deletes an appointment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
appointmentRow	*Appointment Transient*	Identifier of the appointment to be deleted.

Response Payload

Element Name	Type	Description
result	void	

findActivityAssignee

Find operation for appointment assignee.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Appointment Assignee*	A list of appointment assignee that satisfy the inbound criteria.

getActivityCategories

Retrieves an appointment category.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityCategoryId	long	Identifier of the appointment category.

Response Payload

Element Name	Type	Description
result	*Appointment Category*	Appointment category that matches the inbound key attributes.

createActivityCategories

Creates an appointment category.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityCategories	*Appointment Category*	Appointment category to be created.

Response Payload

Element Name	Type	Description
result	*Appointment Category*	Created appointment category.

updateActivityCategories

Updates an appointment category.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityCategories	*Appointment Category*	Appointment category to be updated.

Response Payload

Element Name	Type	Description
result	*Appointment Category*	Updated appointment category.

deleteActivityCategories

Delete an appointment category.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityCategories	*Appointment Category*	Appointment category to be deleted.

Response Payload

Element Name	Type	Description
result	void	

findActivityCategories

Find operation for appointment category.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Appointment Category*	A list of appointment category that satisfy the inbound criteria.

findActivityContact

Find operation for appointment contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Appointment Contact*	A list of appointment contact that satisfy the inbound criteria.

getNotes

Retrieves a note.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
noteId	long	Unique note identifier. This is the primary key of the notes table.

Response Payload

Element Name	Type	Description
result	*Note*	Note that matches the inbound key attributes.

createNotes

Creates a note.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
notes	*Note*	Note to be created.

Response Payload

Element Name	Type	Description
result	*Note*	Created note.

updateNotes

Updates a note.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
notes	*Note*	Note to be updated.

Response Payload

Element Name	Type	Description
result	*Note*	Updated note.

deleteNotes

Deletes a note.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
notes	*Note*	Note to be deleted.

Response Payload

Element Name	Type	Description
result	void	

findNotes

Find operation for note.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used..

Response Payload

Element Name	Type	Description
result	*Note*	A list of notes that satisfy the inbound criteria.

findAppointment

Find operation for appointment transient SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Appointment Transient*	A list of appointment transient SDO that satisfy the inbound criteria.

getAppointmentDeleteException

Retrieves an appointment deletion exception.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityChildId	long	Retrieves an appointment deletion exception given the ID of an appointment child object.

Response Payload

Element Name	Type	Description
result	*Appointment Deletion Exception*	Appointment deletion exception that matches the inbound key attributes.

createAppointmentDeleteException

Creates an appointment deletion exception.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
appointmentDeleteException	*Appointment Deletion Exception*	Appointment deletion exception to be created.

Response Payload

Element Name	Type	Description
result	*Appointment Deletion Exception*	Created Appointment Deletion Exception.

updateAppointmentDeleteException

Updates an appointment deletion exception.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
appointmentDeleteException	*Appointment Deletion Exception*	Appointment deletion exception to be updated.

Response Payload

Element Name	Type	Description
result	*Appointment Deletion Exception*	Updated appointment deletion exception.

deleteAppointmentDeleteException

Deletes an appointment deletion exception.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
appointmentDeleteException	*Appointment Deletion Exception*	Appointment deletion exception to be deleted.

Response Payload

Element Name	Type	Description
result	void	

findAppointmentDeleteException

Find operation for appointment deletion exception.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Appointment Deletion Exception*	A list of appointment deletion exception that satisfy the inbound criteria.

getDfltObjAttrHints

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	
localeName	string	

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	

getServiceLastUpdateTime

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	

getEntityList

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	

Activity Service

Service to operate on activity object.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activityManagementService/}ActivityService

Service WSDL URL: https://servername/crmService/ActivityService?WSDL

Logical Business Objects

- CRM : Applications Common Components : Activity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Common Attachment SDO*
Handles	*Activity Assignee*
Handles	*Activity Delete Exception*
Handles	*Note Descriptive Flexfields*
Handles	*Activity Contact*
Handles	*Note*
Handles	*Activity*
Handles	*Activity Objective*

Operations

- *deleteAttachment*
- *getAttachmentsListWithoutContent*
- *getAttachmentContent*
- *copyAttachment*
- *createAttachment*
- *generateActivitiesFromTemplate*
- *getActivity*
- *createActivity*
- *updateActivity*
- *deleteActivity*
- *mergeActivity*
- *findActivity*
- *processActivity*
- *createActivityAssignee*

- *updateActivityAssignee*
- *deleteActivityAssignee*
- *findActivityAssignee*
- *createActivityContact*
- *updateActivityContact*
- *deleteActivityContact*
- *findActivityContact*
- *findActivityDeleteExceptions*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

deleteAttachment

An operation to delete a single or multiple attachments associated to an activity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
deleteParams	*Common Attachment*	The parameter based on which deletion of attachments should trigger.
commitData	string	A flag to indicate whether or not to commit transaction for this operation.

Response Payload

Element Name	Type	Description
result	string	The parameter returns the success or failure status of the operation.

getAttachmentsListWithoutContent

An operation to get list of all the attachment associated with an activity without any file content.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
getParameters	*Common Attachment*	The parameters based on which list of attachments to be fetched is determined.

Response Payload

Element Name	Type	Description
result	*Common Attachment*	The parameter returns the list of all the attachments without any file content.

getAttachmentContent

An operation to get attachment associated with an activity with file content if applicable.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
getParameters	*Common Attachment*	The parameters based on which attachment to be fetched is determined.

Response Payload

Element Name	Type	Description
result	*Common Attachment*	The parameter returns the attachment with file content, if applicable.

copyAttachment

An operation to copy a single or multiple attachments associated to an activity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
attachmentRows	*Common Attachment*	The parameter for the list of attachments to be copied.
commitData	string	A flag to indicate whether or not to commit transaction for this operation.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	string	The parameter returns the success or failure status of the operation.

createAttachment

An operation to create a single or multiple attachments associated to an activity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
attachmentRows	*Common Attachment*	The parameter which provides the list of attachments to be created.
commitData	string	A flag to indicate whether or not to commit transaction for this operation.

Response Payload

Element Name	Type	Description
result	string	The parameter returns the success or failure status of the operation.

generateActivitiesFromTemplate

An operation to generate activities from a template. A valid value for templateId should be passed. Only following activity attributes are supported in activityAttributes input parameter as of now: CustomerId, OwnerId, AssesmentId, ActivityContact, ActivityAssignee, ActivityStartDate, LeadId, OpportunityId, and CampaignId.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
templateId	long	The unique identifier of the template-set using which the activities are to be generated.

Element Name	Type	Description
activityAttributes	*Activity*	The Activity SDO attribute list using which template activities should be generated.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the list of all the generated activities using the template.

getActivity

The out-of-the-box Get operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityId	long	The activity ID for which the activity record is to be fetched.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the activity record based on input activity ID.

createActivity

The out-of-the-box Create operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activity	*Activity*	The activity record to be created for the method createActivity.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the created activity record.

updateActivity

The out-of-the-box Update operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activity	*Activity*	The activity record to be updated for the method createActivity carrying updated attributes.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the updated activity record.

deleteActivity

The out-of-the-box Delete operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activity	*Activity*	The activity record to be deleted for the method deleteActivity.

Response Payload

Element Name	Type	Description
result	void	This operation returns nothing for the method deleteActivity.

mergeActivity

OOTB merge operation on Activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activity	*Activity*	Activities which have to be merged.

Response Payload

Element Name	Type	Description
result	*Activity*	Merged Activity.

findActivity

The out-of-the-box Find operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The FindCriteria object using which the find operation works for the method findActivity.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The FindControl object using which the find operation works for the method findActivity.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the list of activity records based on FindCriteria and FindControl input objects.

Element Name	Type	Description

processActivity

The out-of-the-box Process operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The name of the operation to be performed like, create, update, and so on.
activity	*Activity*	The list of activity records on which the operation is to be performed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The optional ProcessControl object to be used while performing this operation.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns a list of activity records after the operation is complete.

createActivityAssignee

The out-of-the-box Create operation for the activity assignee SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityAssigneeWebService	*Activity Assignee*	The activity assignee record to be created for the method createActivityAssignee.

Response Payload

Element Name	Type	Description
result	*Activity Assignee*	The parameter returns the created activity assignee record.

updateActivityAssignee

The out-of-the-box Update operation for the activity assignee SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityAssigneeWebService	*Activity Assignee*	The activity assignee record to be updated for the method updateActivityAssignee.

Response Payload

Element Name	Type	Description
result	*Activity Assignee*	The parameter returns the updated activity assignee record.

deleteActivityAssignee

The out-of-the-box Delete operation for the activity assignee SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityAssigneeWebService	*Activity Assignee*	The activity assignee record to be deleted for the method deleteActivityAssignee.

Response Payload

Element Name	Type	Description
result	void	This operation returns nothing for the method deleteActivityAssignee.

findActivityAssignee

The out-of-the-box Find operation for the activity assignee SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The FindCriteria object using which the find operation works for the method findActivityAssignee.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The FindControl object using which the find operation works for the method findActivityAssignee.

Response Payload

Element Name	Type	Description
result	*Activity Assignee*	The parameter returns the list of activity assignee records based on FindCriteria and FindControl input objects.

createActivityContact

The out-of-the-box Create operation for the activity contact SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityContactWebService	*Activity Contact*	The activity contact record to be created for the method createActivityContact.

Response Payload

Element Name	Type	Description
result	*Activity Contact*	The parameter returns the created activity contact record.

updateActivityContact

The out-of-the-box Update operation for the activity contact SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityContactWebService	*Activity Contact*	The activity contact record to be updated for the method updateActivityContact.

Response Payload

Element Name	Type	Description
result	*Activity Contact*	The parameter returns the updated activity contact record.

deleteActivityContact

The out-of-the-box Delete operation for the activity contact SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityContactWebService	*Activity Contact*	The activity contact record to be deleted for the method deleteActivityContact.

Response Payload

Element Name	Type	Description
result	void	This operation returns nothing for the method deleteActivityContact.

findActivityContact

The out-of-the-box Find operation for the activity contact SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The FindCriteria object using which the find operation works for the method findActivityContact.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The FindControl object using which the find operation works for the method findActivityContact.

Response Payload

Element Name	Type	Description
result	*Activity Contact*	The parameter returns the list of activity contact records based on FindCriteria and FindControl input objects.

findActivityDeleteExceptions

The out-of-the-box Find operation on activity delete exception SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The FindCriteria object using which the find operation works for the method findActivityDeleteExceptions.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The FindControl object using which the find operation works for the method findActivityDeleteExceptions.

Response Payload

Element Name	Type	Description
result	*Activity Delete Exception*	The parameter returns the list of activity delete exception records based on FindCriteria and FindControl input objects.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The parameter returns the label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The parameter returns the date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	The parameter returns a list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getActivity	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getActivity	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
createActivity	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
createActivity	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
createActivity	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
createActivity	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
createActivity	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
deleteActivityContact	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
deleteActivityContact	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
deleteActivityContact	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.

Operation Name	Privilege Code	Privilege Name	Privilege Description
generateActivitiesFromTemplate	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
generateActivitiesFromTemplate	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
updateActivityContact	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
updateActivityContact	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
findActivityContact	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
findActivityContact	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
deleteAttachment	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
deleteAttachment	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
deleteAttachment	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
createActivityAssignee	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
createActivityAssignee	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
createActivityAssignee	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
createActivityAssignee	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
createActivityAssignee	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
createActivityAssignee	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
createActivityAssignee	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
getDfltObjAttrHints	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getDfltObjAttrHints	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.

Operation Name	Privilege Code	Privilege Name	Privilege Description
createAttachment	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
createAttachment	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
createAttachment	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
createAttachment	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
createAttachment	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
createAttachment	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
createAttachment	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
findActivity	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
findActivity	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
deleteActivity	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
deleteActivityAssignee	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
deleteActivityAssignee	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
deleteActivityAssignee	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
createActivityContact	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
createActivityContact	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
createActivityContact	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
createActivityContact	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
createActivityContact	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.

Operation Name	Privilege Code	Privilege Name	Privilege Description
createActivityContact	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
createActivityContact	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
findActivityAssignee	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
findActivityAssignee	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
processActivity	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
processActivity	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
processActivity	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
processActivity	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
processActivity	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
processActivity	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
processActivity	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
processActivity	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
processActivity	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
processActivity	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
findActivityDeleteExceptions	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
findActivityDeleteExceptions	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
getEntityList	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getEntityList	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.

Operation Name	Privilege Code	Privilege Name	Privilege Description
updateActivity	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
updateActivity	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
copyAttachment	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
copyAttachment	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
copyAttachment	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
copyAttachment	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
copyAttachment	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
copyAttachment	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
copyAttachment	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
mergeActivity	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
mergeActivity	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
getAttachmentContent	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getAttachmentContent	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
getAttachmentsListWithoutContent	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getAttachmentsListWithoutContent	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
getServiceLastUpdateTime	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getServiceLastUpdateTime	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
updateActivityAssignee	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
updateActivityAssignee	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.

Operation Name	Privilege Code	Privilege Name	Privilege Description

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_VP_JOB	Marketing VP	Determines high-level marketing objectives, strategies and budgets. Analyzes marketing activities to measure the effectiveness of marketing programs, reviews real-time marketing intelligence to optimize decisions throughout

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			the marketing and sales cycle, take timely actions to influence business outcomes, and gain competitive advantage.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			and opportunities. This role is for a partner sales manager.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKT_MARKETING_VP_JOB	Marketing VP	Determines high-level marketing objectives, strategies and budgets. Analyzes marketing activities to measure the effectiveness of marketing programs, reviews real-time marketing intelligence to optimize decisions throughout the marketing and sales cycle, take timely actions to influence business outcomes, and gain competitive advantage.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_ QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			supporting roles include territory development, event and webinar strategies.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			administer the Next Gen HR Help Desk service application, including setup.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			rejecting registrations, and forecasting sales.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_VIEW_ONLY_ACTIVITY_PRIV	ORA_CJM_CUSTOMER_CHANNEL_PROGRAM_VIEW_DUTY_CRM	Customer Channel Program Viewing	View customer programs.
ZMM_VIEW_ONLY_ACTIVITY_PRIV	ORA_CJM_CUSTOMER_CHANNEL_PROGRAM_MANAGEMENT_DUTY_CRM	Customer Channel Program Management	Manages customer programs and manual adjustments.
ZMM_VIEW_ONLY_ACTIVITY_PRIV	ORA_CJM_CHANNEL_CLAIMS_VIEW_DUTY_CRM	Channel Claims Viewing	Views customer claims.
ZMM_VIEW_ONLY_ACTIVITY_PRIV	ORA_CJM_CHANNEL_CLAIMS_MANAGEMENT_DUTY_CRM	Channel Claims Management	Manages customer claims.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			assign SR to a user or change the status of a SR.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_VP_JOB	Marketing VP	Determines high-level marketing objectives, strategies and budgets. Analyzes marketing activities to measure the effectiveness of marketing programs, reviews real-time marketing intelligence to optimize decisions throughout the marketing and sales cycle, take timely actions to influence business outcomes, and gain competitive advantage.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKT_MARKETING_VP_JOB	Marketing VP	Determines high-level marketing objectives, strategies and budgets. Analyzes marketing activities to measure the effectiveness of marketing programs, reviews real-time marketing intelligence to optimize decisions throughout the marketing and sales cycle, take timely actions to influence business outcomes, and gain competitive advantage.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_READ_ONLY_DUTY	Lead Registration Processing Read Only	Read Only role for Lead Registration Processing Duty.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_MARKETING_VP_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_MKT_MARKETING_VP_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			treatments, lists, segments, and content.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_ MANAGER_JOB	ORA_MKT_MARKETING_ CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ EXECUTION_MANAGEMENT_ DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_CORPORATE_ MARKETING_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKL_SALES_LEAD_ QUALIFIER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_ MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_VP_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_MOO_OPPORTUNITY_ CHANNEL_ADMINISTRATION_ DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_ CHANNEL_ADMINISTRATION_ DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			products or events to specific customers.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_READ_ONLY_DUTY	Personal Campaign Management Read Only	Read Only role for Personal Campaign Management Duty.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_READ_ONLY_DUTY	Product Recommendation Analysis Read Only	Read Only role for Product Recommendation Analysis Duty
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_VP_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_READ_ONLY_DUTY	Sales Forecasting Management Read Only	Read Only role for Sales Forecasting Management Duty.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_VP_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_READ_ONLY_DUTY	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_READ_ONLY_DUTY	Territory Management Read Only	Read Only role for Territory Management Duty.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Appointment Assignee

An internal resource participant on an appointment, such as John Jones or Mary Smith.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}ActivityAssignee

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Appointment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityAssigneeId	long	The unique identifier for the activity assignee record. • Primary Key

Name	Type	Description
ActivityId	long	The unique identifier of the activity.
AppointmentResponseCd	string	The user friendly name for the Appointment Response Code.
AssigneeId	long	The unique identifier of the HZ_PARTY record with party_usage as Resource.
AssigneeRsrcOrgId	long	The identifier of the organization to which the resource belongs.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ReminderPeriod	int	Indicates the period in minutes for the reminder notification before the appointment starts.
ShowTimeAsCd	string	The user friendly name for the Show Time As Code.

Appointment Category

The category for an appointment, such as a phone call or demonstration category.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}ActivityCategory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Appointment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityCategoryId	long	The unique identifier for the activity category record. • Primary Key
ActivityId	long	The unique identifier of the activity.
CategoryCd	string	The category of the appointment. Usually the user selects a value from a list of categories.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Appointment Contact

The contact participant on an appointment, such as Steve Smith or Jane Doe.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}ActivityContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Appointment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityContactId	long	The unique identifier for the activity contact record. • Primary Key
ActivityId	long	The unique identifier of the activity.

Name	Type	Description
ContactId	long	The party identifier of party type person who is associated with the appointment.
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Appointment Deletion Exception

An object representing a recurring appointment exception to delete. For example, deleting an instance of a scheduled monthly sales meeting.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}AppointmentDeleteException

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Appointment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityChildId	long	The unique primary key identifier for storing the deleted child exceptions. • Primary Key
ActivityId	long	The unique identifier of the activity.
ChildId	long	The primary key for the child object tables.

Name	Type	Description
ChildObjectCd	string	The child object code that identifies the child object to which the record belongs to.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Appointment Transient Assignee

A participant in an appointment and each instance of a recurring appointment. The participant is an internal resource.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TransientAssignee

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Appointment Transient*

Relationship Type	Object or Service
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityAssigneeId	long	The unique identifier for the appointment resource participant. • Primary Key
ActivityId	long	The unique identifier of the activity.
AppointmentResponseCd	string	The response to an appointment invitation such as Accepted, Rejected, and Tentatively Accepted.
AssigneeId	long	The identifier of the party corresponding to resource participating at the appointment.
AssigneeRsrcOrgId	long	The identifier of the organization to which the resource belongs.
OwnerFlag	boolean	The attribute that indicates that the appointment resource participant is also the appointment owner.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
ShowTimeAsCd	string	The attribute to show a resource time as Busy or Available on a calendar.

Appointment Transient Category

A category that the appointment and its instances belong to, such as a phone call or demonstration.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TransientCategory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Appointment Transient*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityCategoryId	long	The unique identifier for the Appointment Category table. • Primary Key
ActivityId	long	The unique identifier of the activity.
CategoryCd	string	The attribute for lookup code for category.

Appointment Transient Contact

A contact participant in an appointment and each instance of a recurring appointment.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TransientContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Appointment Transient*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityContactId	long	The identifier of the row in the intersection table between Appointment and Contact. • Primary Key
ActivityId	long	The unique identifier of the activity.
ContactId	long	The Party id of the contact.
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_

Name	Type	Description
		PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.

Appointment Transient Note

A note for an appointment and each instance of a recurring appointment.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TransientNote

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Appointment Transient*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
NoteId	long	The unique identifier of the note. • Primary Key

Name	Type	Description
NoteTxt	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The description of the note.
NoteTypeCode	string	The lookup code for the type of the note associated to the appointment, such as, General, Reference, or Special.
PartyId	string	The unique identifier of the contact party.
PartyName	string	The name of the party.
SourceObjectCode	string	Indicates that the object associated to the appointment is a Note.
SourceObjectId	long	The Note id associated to the appointment.
VisibilityCode	string	The Lookup code for note visibility, such as private, internal or external.

Appointment Transient

A individual appointment or an instance of a recurring appointment. For example, monthly lunchtime sales meetings or a client visit.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TransientAppointment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Appointment Transient Category SDO*
Contains	*Appointment Transient Note SDO*
Contains	*Appointment Transient Assignee SDO*
Contains	*Appointment Transient Contact*
Contained by	*Opportunity*

Relationship Type	Object or Service
Contained by	*Reference*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityDescription	string	The description of the appointment.
ActivityId	long	The unique identifier of the activity. • Primary Key
ActivityLocationTxt	string	The location of the appointment.
ActivityName	string	The subject of the appointment.
AlarmFlag	boolean	Indicates whether a reminder alarm should start prior to the appointment.
AllDayFlag	boolean	Indicates the appointment is an all-day appointment.
AppointmentAssignee	*Appointment Transient Assignee*	Not used in V1.0 for appointment.
AppointmentContact	*Appointment Transient Contact*	The contact populated on the appointment using its party id.
AppointmentNote	*Appointment Transient Note*	The appointment note.
ApptAlarmTmMinimumNumber	long	Specifies how long the Alarm Notice Time should be in minutes.
AsgnDenormFlag	boolean	Not used in V1.0 for appointment.
AsgnManualFlag	boolean	Not used in V1.0 for appointment.

Name	Type	Description
AsgnSystemFlag	boolean	Not used in V1.0 for appointment.
CategoryCodeTransient	string	The lookup code corresponding to the category set on the appointment.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CustomerId	long	The identifier of the customer on the appointment.
CustomerName	string	The name of the customer on the appointment.
CustomerPartyType	string	The customer type of the customer assigned to the appointment.
DoNotRouteFlag	boolean	Not used in V1.0 for appointment.
EditMode	string	Not used in V1.0 for appointment.
FuseParticipants	string	Internal Attribute. Do not use.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LockAsgnFlag	boolean	Not used in V1.0 for appointment.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
Owner	string	The name of the appointment owner.

Name	Type	Description
OwnerId	long	The Party Id of the appointment owner.
OwnerRsrcOrgId	long	The identifier corresponding to the organization to which the appointment owner belongs.
PartyId	long	The unique identifier of the contact party.
PartyId1	long	The name of the party.
PartyName	string	The name of the party.
PartyName1	string	The name of the party.
PlannedDurationNumber	decimal	Not used in V1.0 for appointment.
PlannedDurationUOMCd	string	Not used in V1.0 for appointment.
PlannedEndDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The appointment end date and time.
PlannedStartDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The appointment start date and time.
RecurApptId	long	The identifier of the appointment record describing recurrence.
RecurDay	long	The week days the appointment can be recurring on.
RecurEndDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Specifies a specific date when recurrence stops.
RecurExceptionFlag	boolean	Indicates that this is an exception in a recurrence series.
RecurFlag	boolean	Indicates that the appointment is recurring.
RecurFreqNumber	long	Recurrence frequency, such as, Every x Days, Every x Weeks, Every x Months, Every x Years.
RecurFriFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Friday.

Name	Type	Description
RecurMonFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Monday.
RecurMonth	string	In yearly recurrence, indicates the month appointments occur in.
RecurOccursNumber	long	The number of recurrence instances.
RecurOrigInstDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The first date and time an appointment occurs in a recurring series.
RecurPattern	string	Indicates recurrence patterns such as Third Week of Every Month.
RecurReplaceCd	string	Not used in V1.0 for appointment.
RecurSatFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Saturday.
RecurSunFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Sunday.
RecurThuFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Thursday.
RecurTueFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Tuesday.
RecurTypeCd	string	Indicates the type of recurrence such as Daily, Weekly, Monthly, Yearly.
RecurWedFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Wednesday.
RecurWeekDayCd	string	Indicates if the appointment should occur every day including weekends or just on week days, applicable for daily recurring appointments.
ReferenceCustomerId	long	The identifier corresponding to the reference customer set on the appointment.
ReferenceCustomerName	string	The reference customer name set on the appointment.
Response	string	The response of the participant, such as Accepted, Rejected, Tentatively Accepted.

Name	Type	Description
ShowTimeAs	string	Indicates how the time between the appointment start and end date-time shows on a participant's calendar, such as Busy.
SourceObjectCd	string	Indicates the object type the appointment is related to.
SourceObjectCodeMeaningTransient	string	The code indicating the type of business object associated with the appointment, examples: LEAD or OPPORTUNITY.
SourceObjectId	long	The object identifier to which the appointment is related.
TemplateFlag	boolean	Not used in V1.0 for appointment.
TemplateId	long	Not used in V1.0 for appointment.
TransientCategory	*Appointment Transient Category*	The category of an appointment.
VisibilityCd	string	Not used in V1.0 for appointment.

Common Attachment

The attachment that can include documents, files, or web site links associated with appointments, interactions or tasks.

QName: {http://xmlns.oracle.com/apps/crmCommon/objects/objectsService/}CommonAttachments

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Appointment Service*
Handled by	*Customer Interaction*
Handled by	*Activity Service*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttachedDocumentId	long	The identifier of the document attachment.
Attachment	string	The title or name of the attachment.
CategoryName	string	The name of the attachment category.
DatatypeCode	string	The code value of the data type.
Description	string	The free text description of the record.
DmFolderPath	string	The folder path of the attachment.
DmNode	decimal	The attachment node.
DmRepository	string	The attachment repository.
DmType	string	The type of attachment.
DmVersionNumber	string	The version number of the attachment.
DocumentAttributes	string	The attributes of the document attachment.
DocumentEntityId	long	The identifier of document entity.
DownloadStatus	string	The download status of attachment.
EntityAttributes	string	The entity attributes of the attachment.
EntityName	string	The name of the entity attachment.
FileName	string	The name of the file attachment.
FileURL	string	The URL of the file attachment.
Pk1Value	string	Value of primary key 1.
Pk2Value	string	Value of primary key 2.

Name	Type	Description
Pk3Value	string	Value of primary key 3.
Pk4Value	string	Value of primary key 4.
Pk5Value	string	Value of primary key 5.
TableName	string	The table name of attachment.
Title	string	The attachment title.
URL	string	The destination URL associated with a specific Google AdWords ad.
UploadedFile	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The uploaded attachment file.
UploadedFileContentType	string	The content type of file attachment.
UploadedFileLength	long	The length of file attachment.
UploadedFileName	string	The name of the file attachment.
UploadedText	string	The attachment text.
UsageType	string	The usage type of the attachment.
VersionControlIcon	string	The attachment version control.

Note

The object that captures comments, information, or instructions for an Oracle Fusion Applications business object.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/noteService}Note

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note Descriptive Flexfields*

Relationship Type	Object or Service
Contained by	*Objective*
Contained by	*Opportunity*
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Contained by	*Activity*
Contained by	*Sales Competitor*
Contained by	*Sales Lead*
Contained by	*Business Plan*
Contained by	*Program Enrollments*
Contained by	*Reference*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*

Relationship Type	Object or Service
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreatorPartyId	long	This is the party identifier for the note creator.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteFlag	boolean	Indicates whether the user has access to delete the note.
Dff	*Note Descriptive Flexfields*	The descriptive flex field segment.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record

Name	Type	Description
NoteAttributeCategory	string	The contextual flex field for development usage.
NoteAttributeUid1	string	The flex field for development usage.
NoteAttributeUid2	string	The flex field for development usage.
NoteAttributeUid3	string	The flex field for development usage.
NoteAttributeUid4	string	The flex field for development usage.
NoteAttributeUid5	string	The flex field for development usage.
NoteId	long	The unique identifier of the note. • Primary Key
NoteNumber	string	The alternate unique identifier of the note. A user key that is system generated or from an external system.
NoteTitle	string	The title of the note entered by the user.
NoteTxt	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	This is the column that stores the actual note text.
NoteTypeCode	string	This is the note type code for categorization of note.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
SourceObjectCode	string	This is the source_object_code for the source object as defined in OBJECTS Metadata.
SourceObjectId	string	This is the source_object_Uid for the source object such as Activities, Opportunities, and so on defined in OBJECTS metadata.
UpdateFlag	boolean	Indicates whether the user can update the note.
VisibilityCode	string	This is the attribute to specify the visibility level of the note.

Note Descriptive Flexfields

The descriptive flex field that captures additional information for notes, such as a priority or status.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/flex/noteDff/}NoteDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Note*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
NoteId	long	The unique identifier of the note. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Assignment Service

Service to assign sales objects. This service performs territory, rule, classification or scoring assignment processing for a single record.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/workMgmt/assignmentMgr/assignmentService/}AssignmentService

Service WSDL URL: https://servername/crmService/AssignmentService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Assignable Work Objects*
Handles	*Assignment Passed Scores*
Handles	*Assignment Score Request*
Handles	*Assignment Passed Candidates*
Handles	*Rule Set Information*
Handles	*Assignment Request*
Handles	*Assignment Candidate Exclusion List*

Relationship Type	Object or Service
Handles	*Assignment Candidate Information*
Handles	*Assignment Match Request*

Operations

- *getScoreAndAssign*
- *getScore*
- *findMatchAndAssign*
- *findMatch*
- *assignScore*
- *assign*

getScoreAndAssign

Calculates a score for each work object and assigns the score to the work object. This method can be used with rule-based assignment only.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
request	*Assignment Score Request*	Input information for the method.

Response Payload

Element Name	Type	Description
result	void	

getScore

Calculates a score for each work object. This method can be used with rule-based assignment only.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
request	*Assignment Score Request*	Input information for the method.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	*Assignment Passed Scores*	Values returned by the method.

findMatchAndAssign

Identifies the matching candidate or candidates for each work objects being assigned and executes the logic to assign the matches. This method can be used with rule-based assignment, territory-based assignment and territory-based assignment with rule filtering.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
request	*Assignment Match Request*	Input information for the method.

Response Payload

Element Name	Type	Description
result	void	

findMatch

Identifies the matching candidate or candidates for each work object being assigned. This method can be used with rule-based assignment, territory-based assignment and territory-based assignment with rule filtering.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
request	*Assignment Match Request*	Input information for the method.

Response Payload

Element Name	Type	Description
result	*Assignable Work Objects*	Matching values returned by the method.

assignScore

Assigns a score to a work object where the score is already known. This method can be used with rule-based assignment only.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
request	*Assignment Passed Scores*	Input information for the method.

Response Payload

Element Name	Type	Description
result	void	

assign

This is used if the candidate or candidates for a work object are already known. The assignment processing is used to execute its assignment logic, which stores the candidate on the work object or in the work object child table. This method can be used with rule-based assignment and territory-based assignment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
request	*Assignment Request*	Input information for the method.

Response Payload

Element Name	Type	Description
result	void	

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MOW_RUN_BATCH_ASSIGN_PROCESS_PRIV	Run Purge Batch Assignment Information Process	Allows scheduling and monitoring of the process to purge the batch assignment data.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOW_RUN_BATCH_ASSIGN_PROCESS_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MOW_RUN_BATCH_ASSIGN_PROCESS_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
MOW_RUN_BATCH_ASSIGN_PROCESS_PRIV	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
MOW_RUN_BATCH_ASSIGN_PROCESS_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
MOW_RUN_BATCH_ASSIGN_PROCESS_PRIV	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
MOW_RUN_BATCH_ASSIGN_PROCESS_PRIV	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			and relationship information inquiries.
MOW_RUN_BATCH_ASSIGN_PROCESS_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
MOW_RUN_BATCH_ASSIGN_PROCESS_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
MOW_RUN_BATCH_ASSIGN_PROCESS_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_EXECUTION_MANAGEMENT_DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Assignable Work Objects

The work object records that can be assigned.

QName: {http://xmlns.oracle.com/apps/crmCommon/workMgmt/assignmentMgr/assignmentMgrService/}InputWorkObjects

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Assignment Passed Candidates*
Contains	*Assignment Candidate Exclusion List*
Contained by	*Assignment Match Request*
Contained by	*Assignment Score Request*
Contained by	*Assignment Request*
Handled by	*Assignment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CandidateExclusionList	*Assignment Candidate Exclusion List*	The attribute for list of candidates to be excluded from assignment processing.
PassedCandidates	*Assignment Passed Candidates*	The passed candidates of assignment processing.
WorkObject	string	The code of the assignment work object. • Primary Key
WorkObjectPrimaryKey1	string	The first attribute of a work object primary key. • Primary Key

Name	Type	Description
WorkObjectPrimaryKey2	string	The second attribute of a work object primary key. • Primary Key
WorkObjectPrimaryKey3	string	The third attribute of a work object primary key. • Primary Key

Assignment Candidate Exclusion List

The candidates that are excluded when assigning a work object.

QName: {http://xmlns.oracle.com/apps/crmCommon/workMgmt/assignmentMgr/assignmentMgrService/}CandidateExclusionList

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Assignable Work Objects*
Handled by	*Assignment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CandidateObjectPrimaryKey1	string	The first attribute of a candidate object primary key. • Primary Key
CandidateObjectPrimaryKey2	string	The second attribute of a candidate object primary key. • Primary Key
CandidateObjectPrimaryKey3	string	The third attribute of a candidate object primary key. • Primary Key

Name	Type	Description
WorkObject	string	The code of the assignment work object. • Primary Key
WorkObjectPrimaryKey1	string	The first attribute of a work object primary key. • Primary Key
WorkObjectPrimaryKey2	string	The second attribute of a work object primary key. • Primary Key
WorkObjectPrimaryKey3	string	The third attribute of a work object primary key. • Primary Key

Assignment Candidate Information

The information of the candidate to be assigned to a work object.

QName: {http://xmlns.oracle.com/apps/crmCommon/workMgmt/assignmentMgr/assignmentMgrService/}CandidateInfo

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Assignment Passed Candidates*
Handled by	*Assignment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CandidateInformationColumn	string	The name of the column such as territory type that displays additional information about the candidate. • Primary Key

Name	Type	Description
CandidateInformationValue	string	The value of the additional candidate information column.
CandidateObjectPrimaryKey1	string	The first attribute of a candidate object primary key. • Primary Key
CandidateObjectPrimaryKey2	string	The second attribute of a candidate object primary key. • Primary Key
CandidateObjectPrimaryKey3	string	The third attribute of a candidate object primary key. • Primary Key
WorkObject	string	The code of the assignment work object. • Primary Key
WorkObjectPrimaryKey1	string	The first attribute of a work object primary key. • Primary Key
WorkObjectPrimaryKey2	string	The second attribute of a work object primary key. • Primary Key
WorkObjectPrimaryKey3	string	The third attribute of a work object primary key. • Primary Key

Assignment Match Request

The information used to evaluate candidates to assign to a work object by the assignment engine.

QName: {http://xmlns.oracle.com/apps/crmCommon/workMgmt/assignmentMgr/assignmentMgrService/}MatchRequest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Assignable Work Objects*
Handled by	*Assignment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AsgnMode	string	The attribute for mode of assignment processing such as matching or territory.
CandidateObject	string	The code of the assignment candidate object.
CustomData	string	The custom information passed into the assignment processing.
GroupingAttrName	string	The name of the attribute used to group together records for assignment processing.
InputWorkObjects	*Assignable Work Objects*	The identifier of a work object for assignment processing.
JobId	string	The identifier of the batch assignment process.
ReplaceTeamFlag	boolean	The attribute that indicates whether the team is replaced if the assignment result differs during reassignment of an object.
ReturnCandidateInformationFlag	boolean	The attribute that indicates whether additional candidate info should be included in the assignment output.
RuleSetGroupId	string	The identifier of the rule category to use assignment processing.
RuleSetGroupName	string	The name of the rule category to use assignment processing.
WorkObject	string	The code of the assignment work object. • Primary Key

Assignment Passed Candidates

The candidates identified to be assigned to a work object. Optionally, also includes the candidate score.

QName: {http://xmlns.oracle.com/apps/crmCommon/workMgmt/assignmentMgr/assignmentMgrService/}PassedCandidates

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Assignment Candidate Information*
Contained by	*Assignable Work Objects*
Handled by	*Assignment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CandidateInfo	*Assignment Candidate Information*	Additional display columns configured in assignment metadata for the candidate object.
CandidateObject	string	The code of the assignment candidate object.
CandidateObjectPrimaryKey1	string	The first attribute of a candidate object primary key. • Primary Key
CandidateObjectPrimaryKey2	string	The second attribute of a candidate object primary key. • Primary Key
CandidateObjectPrimaryKey3	string	The third attribute of a candidate object primary key. • Primary Key
Score	long	The score calculated in assignment processing.

Name	Type	Description
WorkObject	string	The code of the assignment work object. • Primary Key
WorkObjectPrimaryKey1	string	The first attribute of a work object primary key. • Primary Key
WorkObjectPrimaryKey2	string	The second attribute of a work object primary key. • Primary Key
WorkObjectPrimaryKey3	string	The third attribute of a work object primary key. • Primary Key

Assignment Passed Scores

The scores of the work object returned by assignment processing.

QName: {http://xmlns.oracle.com/apps/crmCommon/workMgmt/assignmentMgr/assignmentMgrService/}PassedScores

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Rule Set Information*
Contained by	*Assignment Score Request*
Handled by	*Assignment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
MaximumScore	long	The attribute for maximum score calculated in assignment processing.

Name	Type	Description
RulesetInfo	*Rule Set Information*	The attribute that encapsulates the score details at Ruleset level.
Score	long	The score calculated in assignment processing.
WorkObject	string	The code of the assignment work object. • Primary Key
WorkObjectPrimaryKey1	string	The first attribute of a work object primary key. • Primary Key
WorkObjectPrimaryKey2	string	The second attribute of a work object primary key. • Primary Key
WorkObjectPrimaryKey3	string	The third attribute of a work object primary key. • Primary Key

Assignment Request

The work object and the assignment processing type to be performed.

QName: {http://xmlns.oracle.com/apps/crmCommon/workMgmt/assignmentMgr/assignmentMgrService/}AssignRequest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Assignable Work Objects*
Handled by	*Assignment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AsgnMode	string	The attribute for mode of assignment processing such as matching or territory.
CustomData	string	The custom information passed into the assignment processing.
GroupingAttrName	string	The name of the attribute used to group together records for assignment processing.
InputWorkObjects	*Assignable Work Objects*	The identifier for a work object for assignment processing.
JobId	string	The identifier of the batch assignment process.
ReplaceTeamFlag	boolean	The attribute that indicates whether the team is replaced if the assignment result differs during reassignment of an object.
WorkObject	string	The assignment records for assignment processing. • Primary Key

Assignment Score Request

The information used by the assignment processing when scoring a work object.

QName: {http://xmlns.oracle.com/apps/crmCommon/workMgmt/assignmentMgr/assignmentMgrService/}ScoreRequest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Assignable Work Objects*
Contains	*Assignment Passed Scores*
Handled by	*Assignment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
InputWorkObjects	*Assignable Work Objects*	The identifier of a work object for assignment processing.
PassedScores	*Assignment Passed Scores*	The attribute that encapsulates the score details calculated in assignment processing.
RuleSetGroupId	string	The identifier of the rule category to use assignment processing.
RuleSetGroupName	string	The name of the rule category to use in assignment processing.
workObject	string	The code of the assignment work object. • Primary Key

Rule Set Information

The rule set and score information for rule sets evaluated during assignment processing.

QName: {http://xmlns.oracle.com/apps/crmCommon/workMgmt/assignmentMgr/assignmentMgrService/}RulesetInfo

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Assignment Passed Scores*
Handled by	*Assignment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
EvaluatedScore	long	The calculated score for a rule set when the use score option is enabled.
MaximumScore	long	The attribute for maximum score calculated in assignment processing.
RuleSetName	string	The name of the rule set to use in assignment processing.
WorkObject	string	The code of the assignment work object. • Primary Key
WorkObjectPrimaryKey1	string	The first attribute of a work object primary key. • Primary Key
WorkObjectPrimaryKey2	string	The second attribute of a work object primary key. • Primary Key
WorkObjectPrimaryKey3	string	The third attribute of a work object primary key. • Primary Key

Bulk Export (Deprecated)

A web service used to extract data in a batch process. This service is deprecated and is replaced with Bulk Export V 2 (oracle.apps.crmCommon.bulkExport.bulkExportServiceV2.BulkExportService).

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/publicModel/}CrmCommonBulkExportService

Service WSDL URL: https://servername/crmService/CrmCommonBulkExportService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Bulk Export Version 2*
Handles	*File Export Output*

Relationship Type	Object or Service
Handles	*Object Code*
Handles	*Description*
Handles	*Name*
Handles	*File Export Job*
Handles	*View Criteria Name*
Handles	*File Export Batch*

Operations

- *runExportJob*
- *getAttachmentsForBatch*
- *createAndRunExportJob*
- *RunExportJobWithVC*
- *getJob*
- *findJobs*
- *getBatch*
- *deleteBatch*
- *findBatches*
- *findExportBatchesByJobId*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

runExportJob

The operation that runs the specified export job with an optionally specified timestamp range. If beginTm is specified, the records exported by the bulk export job will only contain those records whose LastUpdateDate is on or after the specified beginTm parameter. If endTm is specified, the records exported by the bulk export job will only contain those whose LastUpdateDate is on or before the specified endTm parameter. If the view being exported does not contain a column named LastUpdateDate, all records will be exported.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
jobId	long	The name is an identifier for the bulk export job.
beginTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The time when the bulk export job begins. It can be on or after the filter time, and can be null.
endTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The time when the bulk export job ends. It can be on or before the filter time, and can be null.

Response Payload

Element Name	Type	Description
result	long	The batch identifier created for the job run will be returned, or null will be returned if a batch wasn't created.

getAttachmentsForBatch

The operation returns a list of attachments for a specific batch identifier.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
batchId	long	The operation identifies the times when the export of a job runs.

Response Payload

Element Name	Type	Description
result	*File Export Output*	A list of attachments associated with the provided batch identifier. The attachments correspond to data in the view object(s) that were selected in the job that was executed.

createAndRunExportJob

The operation for bulk export.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
jobRequest	*Description*	The input details of the job request.

Response Payload

Element Name	Type	Description
result	long	The operation returns batch identifier for corresponding job.

RunExportJobWithVC

The operation that runs the export job specified by the job number.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
jobNumber	string	The operation that runs the export job specified by the job number.
zipFileName	string	The operation that runs the export job specified by the job number.
viewCriteria	string	The return value of the createEntity web service method. Includes the full set of attributes and child entities of the record.
bindVar	*Export Job Bind Value*	The operation that runs the export job specified by the job number.

Response Payload

Element Name	Type	Description
result	long	The operation that runs the export job specified by the job number.

getJob

The get operation for file export job.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
exportJobId	long	The get operation for bulk export job identifier.

Response Payload

Element Name	Type	Description
result	*File Export Job*	The file export job that matches the inbound key attributes.

findJobs

The find operation for file export job.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*File Export Job*	A list of file export job that satisfy the inbound criteria.

getBatch

The get operation for file export batch.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
exportBatchId	long	The export batch identifier identifies each time the export of a job is run.

Response Payload

Element Name	Type	Description
result	*File Export Batch*	The file export batch that matches the inbound key attributes.

deleteBatch

The operation to delete file export batch.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
crmCommonExportBatches2	*File Export Batch*	The file export batch to be deleted.

Response Payload

Element Name	Type	Description
result	void	The operation to delete file export batch.

findBatches

The find operation for file export batch.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*File Export Batch*	A list of file export batch that satisfy the inbound criteria.

findExportBatchesByJobId

The find operation for file export batch using the job identifier.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
jobId	long	The find operation for bulk export job identifier.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*File Export Batch*	A list of file export batch that satisfy the inbound criteria.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The return value of the findEntity web service method. Includes the full set of attributes and child entities of the records.
localeName	string	An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	An operation that returns the date and time when the schema files referenced in the service definition last changed.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	An operation to get the list of service data objects defined on this service.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	Run CRM Export Process	This privilege would grant a user the ability to schedule CRM object to export to a file

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	Incentive Compensation Plan Administrator	Configure and manage incentive plans, plan components, and classification rules
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	Customer Contract Team Member	
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_EXPORT_IMPORT_DUTY	Territory Management Export Import	Manages sales territory export and import. Provides users with the ability to export territory data, modify it offline and import.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	Customer Contract Manager	Manages a team of customer contract administrators.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	Supplier Contract Administrator	Works with internal buyers and legal to negotiate and author supplier contracts and agreements. Tracks critical contract milestones, monitors supplier performance, and assists buyers during contract renewals, closeout, and amendments.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	Supplier Contract Team Member	
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	Incentive Compensation Manager	Manage processes and workloads, assignments, and payments
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY_CRM	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_QSC_SALES_CATALOG_ADMINISTRATOR_JOB	Sales Catalog Administrator	Sets up and maintains sales catalogs for leads, opportunities, quotes and orders. Sets up and maintains rollup catalog for the purpose of forecasting, territory management, and other purposes. Also associates products, promotions, and competitor products to catalogs, and defines eligibility rules. Also manages the bulk export and import of all product group-related objects.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_QUOTA_EXPORT_MANAGEMENT_DUTY	Quota Export Management	Manages bulk export of all sales territory quota related objects.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_EXPORT_IMPORT_READ_ONLY_DUTY	Territory Management Export Import Read Only	Read Only role for Territory Management Export Import Duty.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	Enterprise Contract Manager	Manages a team of enterprise contract administrators.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	Enterprise Contract Administrator	Performs the duties of both customer contract administrator and supplier contract administrator.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ADMINISTRATOR_JOB	Incentive Compensation Application Administrator	Set up incentive compensation application
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	Enterprise Contract Team Member	
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_PJF_GRANTS_ADMINISTRATOR_JOB	Grants Administrator	Assists the principal investigator with the administrative functions of an award and its related projects, particularly with data collection and data entry tasks.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	Customer Contract Administrator	Works with sales account teams and legal to negotiate and author customer contracts. Tracks critical contract milestones, service level agreements, and assists account teams during contract renewals and amendments.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	Grants Department Administrator	Assists the principal investigator with the administrative functions of an award and its related projects, particularly with data collection and data entry tasks for one or more departments within the enterprise.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_LOY_ADMINISTRATOR_DUTY	Loyalty Administrator	Manages the provisioning , setup and configuration of Loyalty Application.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	Supplier Contract Manager	Manages a team of supplier contract administrators.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_POZ_DATAFOX_INTEL_ADMINISTRATION_DUTY_CRM	DataFox Administration for Supplier Intelligence	Manages setup for Power Supplier Intelligence with Oracle DataFox Smart Data feature. Not applicable outside of this feature and should be granted only to a user responsible for configuring this setup. This duty role has been obsoleted as part of the deprecation of the feature Manage Supplier Risk with DataFox Supplier Intelligence feature.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_T2P_MIGRATION_DUTY	Territory Management T2P Migration	Manages sales territory export and import. Provides users with the ability to export territory data from a test environment and import into production.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_PJF_PRINCIPAL_INVESTIGATOR_JOB	Principal Investigator	Controls and monitors the technical direction and academic quality of research projects such as laboratory studies or clinical trials. Ensures that projects comply with the terms, conditions, and policies defined by the sponsor and the institution. Owns ultimate responsibility for the management of the sponsored research award, especially in cases where funding is obtained from federal agencies such as the NIH or NSF.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			their related objects, such as appointments, assessments, interactions, notes and tasks.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_CUSTOMER_ CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_ MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_ MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZPM_CHANNEL_MANAGER_ DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_ DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_ DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_ DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_ EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_OKC_SUPPLIER_CONTRACT_ MANAGER_JOB	ORA_OKC_CONTRACT_ AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_ CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_ AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_ CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_ AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_PJF_PRINCIPAL_INVESTIGATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_PJF_GRANTS_ ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_ AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_ AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_SUPPLIER_CONTRACT_ ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_ AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_ CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_ AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_ENTERPRISE_ CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_ AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_SUPPLIER_CONTRACT_ MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_ REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_ENTERPRISE_ CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_ REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_CUSTOMER_ CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_ REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_SUPPLIER_CONTRACT_ MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_ VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_ CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_ VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_ CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_ VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_OKC_CONTRACT_SEARCH_ VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_PJF_GRANTS_ ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_ VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_PJF_PRINCIPAL_INVESTIGATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	ORA_OKC_GRANT_CONTRACT_SEARCH_VIEW_DUTY_CRM	Grant Contract Search and View Access	Searches and views grant contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY_CRM	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.
ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY_CRM	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.
ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY_CRM	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY_CRM	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_PLAN_MANAGEMENT_DUTY_CRM	Incentive Compensation Participant Snapshot Management	Assign and maintain incentive plans and transactions for participants
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_QSC_SALES_CATALOG_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.
ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			submit deal registrations and view updates.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_PJF_GRANTS_ ADMINISTRATOR_JOB	ORA_PJF_PROJECT_ ADMINISTRATOR_JOB	Project Administrator	Assists the project manager with the administrative functions of a project, particularly the functions related to collecting and entering information into the project application.
ORA_MOT_TERRITORY_ MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_EXPORT_ MANAGEMENT_DUTY	Quota Export Management	Manages bulk export of all sales territory quota related objects.
ORA_MOT_TERRITORY_ MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_ MANAGEMENT_SETUP_DUTY	Quota Management Setup	Manages sales territory quota setup, quota plans, prediction and spread formula parameters, and seasonality groups. Runs sales territory quota synchronization and sales quota plan activation and completion processes. Additional duties include party information inquiry.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HR_SR_ ADMINISTRATION	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_TERRITORY_MANAGEMENT_T2P_MIGRATION_DUTY	Territory Management T2P Migration	Manages sales territory export and import. Provides users with the ability to export territory data from a test environment and import into production.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Bulk Export Version 2

A web service used to extract data in a batch process.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/bulkExportServiceV2/}BulkExportService

Service WSDL URL: https://servername/crmService/BulkExportService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Previous version is	*Bulk Export*
Handles	*Export Parameters View Object*
Handles	*File Export Batch Version 2*
Handles	*File Export Job Version 2*
Handles	*Bulk Hierarchy Export Job Input View Object*
Handles	*Bulk Hierarchy Export Job Output Parameters View Object*
Handles	*File Export Output Version 2*
Handles	*Bulk Hierarchy Child Export Input View Object*
Handles	*Export Object Filter Criteria Details View Object*
Handles	*View Name*

Operations

- *runExportJob*
- *getAttachmentsForBatch*
- *runHierachicalExportJob*
- *runHierachicalExport*
- *createAndActivateBulkExportJob*
- *getJob*

- *findJobs*
- *getBatch*
- *deleteBatch*
- *findBatches*
- *findExportBatchesByJobId*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

runExportJob

Runs the specified export job with an optionally specified timestamp range. If beginTm is specified the records exported by the bulk export job will only contain those whose LastUpdateDate is on or after the specified beginTm parameter. If endTm is specified the records exported by the bulk export job will only contain those whose LastUpdateDate is on or before the specified endTm parameter. If the view being exported does not contain a column named LastUpdateDate all records will be exported regardless.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
jobId	long	The unique identifier of the bulk export job.
beginTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The time after the filter time when the export job was run.
endTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The endTm on or before filter time, may be null.

Response Payload

Element Name	Type	Description
result	long	The batch ID created for the run is returned, or null if a batch wasn't created.

getAttachmentsForBatch

Returns a list of attachments for a specific batch ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
batchId	long	The unique identifier of the batch for the import job.

Response Payload

Element Name	Type	Description
result	*File Export Output Version 2*	A list of attachments associated with the provided batch ID. The attachments correspond to data in the view objects that were selected in the job that was executed.

runHierachicalExportJob

The export job with the hierarchical object structure.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
jobNumber	string	The number identifying the export job.
zipFileName	string	The string type of the name of the zip file.
viewCriteria	string	The string type of the view criteria name.
bindVar	*View Name*	The type ExportBindValue contains bindName of the string type, bindValue of the string type, and isdateFlag of boolean type.

Response Payload

Element Name	Type	Description
result	long	Returns the ESS request ID of export job submitted.

runHierachicalExport

Runs the hierarchical export.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
jobId	long	The unique identifier of the bulk export job.
zipFileName	string	The string type of the name of the zip file.
viewCriteria	string	The string type of the view criteria name.

Response Payload

Element Name	Type	Description
result	long	Returns the batch ID.

createAndActivateBulkExportJob

Creates a new export job with parent and child objects with the corresponding filter criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
jobParams	*Export Parameters View Object*	The parameters of the bulk hierarchy export job.
objectParams	*Bulk Hierarchy Export Job Input View Object*	The details of the bulk hierarchy export object.

Response Payload

Element Name	Type	Description
result	*Bulk Hierarchy Export Job Output Parameters View Object*	Returns Export Job ID, batch ID and error information if any.

getJob

The Get operation for the file export job.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
exportJobId	long	The identifier of the bulk export job.

Response Payload

Element Name	Type	Description
result	*File Export Job Version 2*	File Export Job that matches the inbound key attributes.

findJobs

The Find operation for the file export job.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*File Export Job Version 2*	A list of File Export Job that satisfy the inbound criteria.

getBatch

The Get operation for the file export batch.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
exportBatchId	long	The unique identifier of the export batch. It identifies a batch each time the export is run.

Response Payload

Element Name	Type	Description
result	*File Export Batch Version 2*	File Export Batch that matches the inbound key attributes.

deleteBatch

The Delete operation for the file export batch.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
bulkExportBatches1	*File Export Batch Version 2*	The bulk export batch to be deleted.

Response Payload

Element Name	Type	Description
result	void	The Delete operation for the file export batch.

findBatches

The Find operation for the file export batch.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*File Export Batch Version 2*	The list of file export batches that satisfy the inbound criteria.

findExportBatchesByJobId

The find operation for job identifier to find file export batches.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
jobId	long	The find operation for bulk export job identifier.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*File Export Batch Version 2*	A list of file export batch that satisfy the inbound criteria.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The return value of the getEntity web service method. Includes the full set of attributes and child entities of the record.

Element Name	Type	Description
localeName	string	The locale to use when evaluating locale-based user interface hints. The locale name is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	Run CRM Export Process	This privilege would grant a user the ability to schedule CRM object to export to a file

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	Incentive Compensation Plan Administrator	Configure and manage incentive plans, plan components, and classification rules
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	Customer Contract Team Member	
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_EXPORT_IMPORT_DUTY	Territory Management Export Import	Manages sales territory export and import. Provides users with the ability to export territory data, modify it offline and import.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	Customer Contract Manager	Manages a team of customer contract administrators.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	Supplier Contract Administrator	Works with internal buyers and legal to negotiate and author

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			supplier contracts and agreements. Tracks critical contract milestones, monitors supplier performance, and assists buyers during contract renewals, closeout, and amendments.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	Supplier Contract Team Member	
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	Incentive Compensation Manager	Manage processes and workloads, assignments, and payments
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY_CRM	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_QSC_SALES_CATALOG_ADMINISTRATOR_JOB	Sales Catalog Administrator	Sets up and maintains sales catalogs for leads, opportunities, quotes and orders. Sets up and maintains rollup catalog for the purpose of forecasting, territory management, and other purposes. Also associates products, promotions, and competitor products to catalogs, and defines

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			eligibility rules. Also manages the bulk export and import of all product group-related objects.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_QUOTA_EXPORT_MANAGEMENT_DUTY	Quota Export Management	Manages bulk export of all sales territory quota related objects.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_EXPORT_IMPORT_READ_ONLY_DUTY	Territory Management Export Import Read Only	Read Only role for Territory Management Export Import Duty.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	Enterprise Contract Manager	Manages a team of enterprise contract administrators.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	Enterprise Contract Administrator	Performs the duties of both customer contract administrator and supplier contract administrator.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ADMINISTRATOR_JOB	Incentive Compensation Application Administrator	Set up incentive compensation application
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	Enterprise Contract Team Member	

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_PJF_GRANTS_ADMINISTRATOR_JOB	Grants Administrator	Assists the principal investigator with the administrative functions of an award and its related projects, particularly with data collection and data entry tasks.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	Customer Contract Administrator	Works with sales account teams and legal to negotiate and author customer contracts. Tracks critical contract milestones, service level agreements, and assists account teams during contract renewals and amendments.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	Grants Department Administrator	Assists the principal investigator with the administrative functions of an award and its related projects, particularly with data collection and data entry tasks for one or more departments within the enterprise.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_LOY_ADMINISTRATOR_DUTY	Loyalty Administrator	Manages the provisioning , setup and configuration of Loyalty Application.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	Supplier Contract Manager	Manages a team of supplier contract administrators.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_POZ_DATAFOX_INTEL_ADMINISTRATION_DUTY_CRM	DataFox Administration for Supplier Intelligence	Manages setup for Power Supplier Intelligence with Oracle DataFox Smart Data feature. Not applicable outside of this feature and should be granted only to a user responsible for configuring this setup. This duty role has been obsoleted as part of the deprecation of the feature Manage Supplier Risk with DataFox Supplier Intelligence feature.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_T2P_MIGRATION_DUTY	Territory Management T2P Migration	Manages sales territory export and import. Provides users with the ability to export territory data from a test environment and import into production.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_PJF_PRINCIPAL_INVESTIGATOR_JOB	Principal Investigator	Controls and monitors the technical direction and academic quality of research projects such as laboratory studies or clinical trials. Ensures that projects comply with the terms, conditions, and policies defined by the sponsor and the institution. Owns ultimate responsibility for the management of the sponsored research award, especially in cases where funding is obtained from federal agencies such as the NIH or NSF.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			all allowable attributes, and submitting the amendment for approval.
ORA_PJF_GRANTS_ ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_ AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_ AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_ ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_ AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_ CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_ AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_ CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_ AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_ CONTRACT_TEAM_MEMBER_ ABSTRACT	ORA_OKC_CONTRACT_ AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_ TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_ AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_PJF_PRINCIPAL_INVESTIGATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_PJF_PRINCIPAL_INVESTIGATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	ORA_OKC_GRANT_CONTRACT_SEARCH_VIEW_DUTY_CRM	Grant Contract Search and View Access	Searches and views grant contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_CN_INCENTIVE_ COMPENSATION_PLAN_ ADMINISTRATOR_JOB	ORA_CN_INCENTIVE_ COMPENSATION_CREDITS_ EARNINGS_MANAGEMENT_ DUTY_CRM	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.
ORA_CN_INCENTIVE_ COMPENSATION_MANAGER_JOB	ORA_CN_INCENTIVE_ COMPENSATION_CREDITS_ EARNINGS_MANAGEMENT_ DUTY_CRM	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.
ORA_CN_INCENTIVE_ COMPENSATION_PLAN_ ADMINISTRATOR_JOB	ORA_CN_INCENTIVE_ COMPENSATION_ASSIGNMENT_ ADMISTRATION_DUTY_CRM	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
ORA_CN_INCENTIVE_ COMPENSATION_MANAGER_JOB	ORA_CN_INCENTIVE_ COMPENSATION_ASSIGNMENT_ ADMISTRATION_DUTY_CRM	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
ORA_CN_INCENTIVE_ COMPENSATION_MANAGER_JOB	ORA_CN_INCENTIVE_ COMPENSATION_PARTICIPANT_ PLAN_MANAGEMENT_DUTY_CRM	Incentive Compensation Participant Snapshot Management	Assign and maintain incentive plans and transactions for participants
ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	ORA_SVC_INTERNAL_HELP_ DESK_ENGAGEMENT_CHANNEL_ ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_OIA_INTERVIEW_ AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_ AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_OIA_INTERVIEW_ MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_QSC_SALES_CATALOG_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.
ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_PJF_PROJECT_ADMINISTRATOR_JOB	Project Administrator	Assists the project manager with the administrative functions of a project, particularly the functions related to collecting and entering information into the project application.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_EXPORT_MANAGEMENT_DUTY	Quota Export Management	Manages bulk export of all sales territory quota related objects.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_MANAGEMENT_SETUP_DUTY	Quota Management Setup	Manages sales territory quota setup, quota plans, prediction and

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			spread formula parameters, and seasonality groups. Runs sales territory quota synchronization and sales quota plan activation and completion processes. Additional duties include party information inquiry.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ ADMINISTRATION	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_	ORA_ZCA_REVIEW_CRM_ APPROVAL_TRANSACTIONS_ ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_ REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_SVC_SERVICE_ AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_TERRITORY_MANAGEMENT_T2P_MIGRATION_DUTY	Territory Management T2P Migration	Manages sales territory export and import. Provides users with the ability to export territory data from a test environment and import into production.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Description

The details of export job object.

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/publicModel/}ExportJobAndMap

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Object Code*
Handled by	*Bulk Export*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
DescText	string	WARNING: This service has been deprecated and is being replaced with Bulk Export Version 2.
ExportMapObjectAndView	*Object Code*	WARNING: This service has been deprecated and is being replaced with Bulk Export Version 2.
Name	string	WARNING: This service has been deprecated and is being replaced with Bulk Export Version 2.
ObjectCode	string	WARNING: This service has been deprecated and is being replaced with Bulk Export Version 2. • Primary Key

File Export Batch

The export jobs set to run as a batch at a scheduled time. WARNING: This SDO has been deprecated and is being replaced with File Export Batch V 2 (oracle.apps.crmCommon.bulkExport.bulkExportServiceV2.BulkExportBatches).

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/publicModel/}CrmCommonExportBatchesSDO

Logical Business Objects

- CRM : Common CRM : Bulk Export

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*File Export Batch Version 2*
Handled by	*Bulk Export*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttachmentEntityName	string	This is a required column as part of attachments uptake and is used in the view link between the batches VO and the attachments VO. It is a hard coded value that will never change.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndFilterTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The end time filter. If the filter isn't null, any retrieved results will have a LastModifiedDate on or before this time.
EndTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The end time for schedule.
ExportBatchId	long	The primary key for the batch record. • Primary Key
ExportJobId	long	The export job for which the batch is being run.
InitialExtractFilterTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	WARNING: This SDO has been deprecated and is being replaced with File Export Batch Version 2.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MassUpdateDtlId	long	WARNING: This SDO has been deprecated and is being replaced with File Export Batch Version 2.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
StartFilterTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The start time filter. If the filter isn't null, any retrieved results will have a LastModifiedDate on or after this time.
StartTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The start date for schedule.
Status	string	The status of the record.

File Export Job

The jobs that define what object and mapping will be exported. WARNING: This SDO has been deprecated and is being replaced with File Export Job V 2 (oracle.apps.crmCommon.bulkExport.bulkExportServiceV2.BulkExportJobs).

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/publicModel/}CrmCommonExportJobsSvcSDO

Logical Business Objects

- CRM : Common CRM : Bulk Export

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*File Export Job Version 2*
Handled by	*Bulk Export*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	Indicates whether the task is active (registered within ESS).

Name	Type	Description
Compression	string	The compression options available. G=gzip individual files, Z=create single zip of all files, J=create single zip of all files.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateFormat	string	The date format to be used in job record.
DecimalSeparator	string	The decimal separator.
Delimiter	string	The delimiter to use. For example, comma, tab.
DescText	string	The job description.
EndDateTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The end date time.
EndOfLine	string	The End of Line character to use. Lookup to be CR, LF, or CRLF. Default: LF.
ErrorThreshold	int	The number of errors to allow before aborting. A value of Null indicates that there is no limit.
ExportJobId	long	The primary key for the export job. • Primary Key
ExportJobNumber	string	The unique number to identify a job.
ExportMapId	long	Identifies the export mapping used for field mappings.
FileCharset	string	The charset to use. For example, UTF-8, UTF-16, etc. Lookup to FND_LOOKUPS.
FileType	string	The file export type such as CSV (for future use XML).
HeaderRowIncluded	string	Indicates whether to include the header row in the output.
InitialExtractFilterTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Saves the initial date time of the interval between which the data export has to happen.

Name	Type	Description
LastBatchId	long	The most recently run batch.
LastBatchStartTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The last time a batch for this job was started.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MassUpdateDtlId	long	Contains the mass update detail ID.
Name	string	The export job name.
NextScheduleTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The next scheduled date.
NullValue	string	The value used to represent a null value. If null itself no value is output. Default: null.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ParentRequestId	long	The parent scheduler request in case of repeating exports.
QuoteChar	string	The character(s) to use to encapsulate value if it contains the delimiter (e.g. double quote, single quote, null for nothing).
RepeatFrequency	long	The number of repeat frequency.
RepeatUnitCd	string	The repeat unit code. Options are hours, days, weeks, and months.
RequestId	long	A system-generated read-only attribute used by the application framework.
ScheduleModeCd	string	The schedule mode. The options are repeating, one time (manually), and one time (scheduled).

Name	Type	Description
ScheduleStatusCd	string	The schedule status. The options are scheduled, not scheduled, running, complete, and error.
StartTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The start date for schedule.
TimestampFormat	string	The timestamp format to be used in job record.

File Export Output

The comma-separated variable output files for service data objects that are exported for a given batch. WARNING: This SDO has been deprecated and is being replaced with File Export Output V 2 (oracle.apps.crmCommon.bulkExport.bulkExportServiceV2.BulkExportAttachment).

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/publicModel/}CrmCommonExportAttachmentSDO

Logical Business Objects

- CRM : Common CRM : Bulk Export

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*File Export Output Version 2*
Handled by	*Bulk Export*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Filename	string	The name of the file where data will be exported.
Size	long	The size of the file.

Name	Type	Description
URL	string	The destination URL associated with a specific Google AdWords ad.
creationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the file is created.

Export Job Bind Value

The bind names and values.

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/publicModel/}ExportJobBindValue

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Bulk Export*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
bindName	string	
bindValue	anyType	
isDateFlag	boolean	

Object Code

The details of the export object.

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/publicModel/}ExportMapObjectAndView

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*View Criteria Name*
Contained by	*Description*
Handled by	*Bulk Export*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ExportFilterCriteria	*View Criteria Name*	
ObjectCode	string	
ViewCriteriaName	string	
ViewCriteriaType	int	
ViewName	string	
ViewObjectDef	string	

View Criteria Name

The details of view criteria.

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/publicModel/}ExportFilterCriteria

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Object Code*
Handled by	*Bulk Export*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttrName	string	
AttrValue	string	
AttrValue2	string	WARNING: This service has been deprecated and is being replaced with Bulk Export Version 2.
Conjunction	string	
ObjectCode	string	WARNING: This service has been deprecated and is being replaced with Bulk Export Version 2. • Primary Key
Operator1	string	
Operator2	string	
OperatorConjunction	string	
ViewCriteriaName	string	WARNING: This service has been deprecated and is being replaced with Bulk Export Version 2.
ViewName	string	WARNING: This service has been deprecated and is being replaced with Bulk Export Version 2.
isDateFlag	boolean	WARNING: This service has been deprecated and is being replaced with Bulk Export Version 2.

Name	Type	Description
isTimestampFlag	boolean	WARNING: This service has been deprecated and is being replaced with Bulk Export Version 2.

Bulk Export Version 2

A web service used to extract data in a batch process.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/bulkExportServiceV2/}BulkExportService

Service WSDL URL: https://servername/crmService/BulkExportService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Previous version is	*Bulk Export*
Handles	*Export Parameters View Object*
Handles	*File Export Batch Version 2*
Handles	*File Export Job Version 2*
Handles	*Bulk Hierarchy Export Job Input View Object*
Handles	*Bulk Hierarchy Export Job Output Parameters View Object*
Handles	*File Export Output Version 2*
Handles	*Bulk Hierarchy Child Export Input View Object*
Handles	*Export Object Filter Criteria Details View Object*
Handles	*View Name*

Operations

- *runExportJob*
- *getAttachmentsForBatch*
- *runHierachicalExportJob*
- *runHierachicalExport*
- *createAndActivateBulkExportJob*
- *getJob*
- *findJobs*
- *getBatch*
- *deleteBatch*
- *findBatches*
- *findExportBatchesByJobId*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

runExportJob

Runs the specified export job with an optionally specified timestamp range. If beginTm is specified the records exported by the bulk export job will only contain those whose LastUpdateDate is on or after the specified beginTm parameter. If endTm is specified the records exported by the bulk export job will only contain those whose LastUpdateDate is on or before the specified endTm parameter. If the view being exported does not contain a column named LastUpdateDate all records will be exported regardless.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
jobId	long	The unique identifier of the bulk export job.
beginTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The time after the filter time when the export job was run.
endTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The endTm on or before filter time, may be null.

Response Payload

Element Name	Type	Description
result	long	The batch ID created for the run is returned, or null if a batch wasn't created.

getAttachmentsForBatch

Returns a list of attachments for a specific batch ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
batchId	long	The unique identifier of the batch for the import job.

Response Payload

Element Name	Type	Description
result	*File Export Output Version 2*	A list of attachments associated with the provided batch ID. The attachments correspond to data in the view objects that were selected in the job that was executed.

runHierachicalExportJob

The export job with the hierarchical object structure.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
jobNumber	string	The number identifying the export job.
zipFileName	string	The string type of the name of the zip file.
viewCriteria	string	The string type of the view criteria name.
bindVar	*View Name*	The type ExportBindValue contains bindName of the string type, bindValue of the string type, and isdateFlag of boolean type.

Response Payload

Element Name	Type	Description
result	long	Returns the ESS request ID of export job submitted.

runHierachicalExport

Runs the hierarchical export.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
jobId	long	The unique identifier of the bulk export job.
zipFileName	string	The string type of the name of the zip file.
viewCriteria	string	The string type of the view criteria name.

Response Payload

Element Name	Type	Description
result	long	Returns the batch ID.

createAndActivateBulkExportJob

Creates a new export job with parent and child objects with the corresponding filter criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
jobParams	*Export Parameters View Object*	The parameters of the bulk hierarchy export job.
objectParams	*Bulk Hierarchy Export Job Input View Object*	The details of the bulk hierarchy export object.

Response Payload

Element Name	Type	Description
result	*Bulk Hierarchy Export Job Output Parameters View Object*	Returns Export Job ID, batch ID and error information if any.

getJob

The Get operation for the file export job.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
exportJobId	long	The identifier of the bulk export job.

Response Payload

Element Name	Type	Description
result	*File Export Job Version 2*	File Export Job that matches the inbound key attributes.

findJobs

The Find operation for the file export job.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*File Export Job Version 2*	A list of File Export Job that satisfy the inbound criteria.

getBatch

The Get operation for the file export batch.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
exportBatchId	long	The unique identifier of the export batch. It identifies a batch each time the export is run.

Response Payload

Element Name	Type	Description
result	*File Export Batch Version 2*	File Export Batch that matches the inbound key attributes.

deleteBatch

The Delete operation for the file export batch.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
bulkExportBatches1	*File Export Batch Version 2*	The bulk export batch to be deleted.

Response Payload

Element Name	Type	Description
result	void	The Delete operation for the file export batch.

findBatches

The Find operation for the file export batch.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*File Export Batch Version 2*	The list of file export batches that satisfy the inbound criteria.

findExportBatchesByJobId

The find operation for job identifier to find file export batches.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
jobId	long	The find operation for bulk export job identifier.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*File Export Batch Version 2*	A list of file export batch that satisfy the inbound criteria.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The return value of the getEntity web service method. Includes the full set of attributes and child entities of the record.
localeName	string	The locale to use when evaluating locale-based user interface hints. The locale name is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	Run CRM Export Process	This privilege would grant a user the ability to schedule CRM object to export to a file

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	Incentive Compensation Plan Administrator	Configure and manage incentive plans, plan components, and classification rules
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	Customer Contract Team Member	
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_EXPORT_IMPORT_DUTY	Territory Management Export Import	Manages sales territory export and import. Provides users with the ability to export territory data, modify it offline and import.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	Customer Contract Manager	Manages a team of customer contract administrators.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	Supplier Contract Administrator	Works with internal buyers and legal to negotiate and author supplier contracts and agreements. Tracks critical contract milestones, monitors supplier performance, and assists buyers during contract renewals, closeout, and amendments.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	Supplier Contract Team Member	
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	Incentive Compensation Manager	Manage processes and workloads, assignments, and payments
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY_CRM	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			consistent financial application setup, rules, and access.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_QSC_SALES_CATALOG_ADMINISTRATOR_JOB	Sales Catalog Administrator	Sets up and maintains sales catalogs for leads, opportunities, quotes and orders. Sets up and maintains rollup catalog for the purpose of forecasting, territory management, and other purposes. Also associates products, promotions, and competitor products to catalogs, and defines eligibility rules. Also manages the bulk export and import of all product group-related objects.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_QUOTA_EXPORT_MANAGEMENT_DUTY	Quota Export Management	Manages bulk export of all sales territory quota related objects.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_EXPORT_IMPORT_READ_ONLY_DUTY	Territory Management Export Import Read Only	Read Only role for Territory Management Export Import Duty.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	Enterprise Contract Manager	Manages a team of enterprise contract administrators.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	Enterprise Contract Administrator	Performs the duties of both customer contract administrator and supplier contract administrator.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ADMINISTRATOR_JOB	Incentive Compensation Application Administrator	Set up incentive compensation application
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	Enterprise Contract Team Member	
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_PJF_GRANTS_ADMINISTRATOR_JOB	Grants Administrator	Assists the principal investigator with the administrative functions of an award and its related projects, particularly with data collection and data entry tasks.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	Customer Contract Administrator	Works with sales account teams and legal to negotiate and author customer contracts. Tracks critical contract milestones, service level agreements, and assists account teams during contract renewals and amendments.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	Grants Department Administrator	Assists the principal investigator with the administrative functions of an award and its related projects, particularly with data collection and data entry tasks for one or more departments within the enterprise.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_LOY_ADMINISTRATOR_DUTY	Loyalty Administrator	Manages the provisioning , setup and configuration of Loyalty Application.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	Supplier Contract Manager	Manages a team of supplier contract administrators.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_POZ_DATAFOX_INTEL_ADMINISTRATION_DUTY_CRM	DataFox Administration for Supplier Intelligence	Manages setup for Power Supplier Intelligence with Oracle DataFox Smart Data feature. Not applicable outside of this feature and should be granted only to a user responsible for configuring this setup. This duty role has been obsoleted as part of the deprecation of the feature Manage Supplier Risk with DataFox Supplier Intelligence feature.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_T2P_MIGRATION_DUTY	Territory Management T2P Migration	Manages sales territory export and import. Provides users with the ability to export territory data from a test environment and import into production.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_PJF_PRINCIPAL_INVESTIGATOR_JOB	Principal Investigator	Controls and monitors the technical direction and academic quality of research projects such as laboratory studies or clinical trials. Ensures that projects comply with the terms, conditions, and policies defined by the sponsor and the institution. Owns ultimate responsibility for the management of the sponsored research award, especially in cases where funding is obtained from federal agencies such as the NIH or NSF.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_PJF_PRINCIPAL_INVESTIGATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_PJF_PRINCIPAL_INVESTIGATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	ORA_OKC_GRANT_CONTRACT_SEARCH_VIEW_DUTY_CRM	Grant Contract Search and View Access	Searches and views grant contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY_CRM	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.
ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY_CRM	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.
ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY_CRM	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY_CRM	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_PLAN_MANAGEMENT_DUTY_CRM	Incentive Compensation Participant Snapshot Management	Assign and maintain incentive plans and transactions for participants
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_QSC_SALES_CATALOG_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			relationships, and catalog assignments.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			ability to view sales lead details and update internal attributes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.
ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			products or events to specific customers.
ORA_PJF_GRANTS_ ADMINISTRATOR_JOB	ORA_PJF_PROJECT_ ADMINISTRATOR_JOB	Project Administrator	Assists the project manager with the administrative functions of a project, particularly the functions related to collecting and entering information into the project application.
ORA_MOT_TERRITORY_ MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_EXPORT_ MANAGEMENT_DUTY	Quota Export Management	Manages bulk export of all sales territory quota related objects.
ORA_MOT_TERRITORY_ MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_ MANAGEMENT_SETUP_DUTY	Quota Management Setup	Manages sales territory quota setup, quota plans, prediction and spread formula parameters, and seasonality groups. Runs sales territory quota synchronization and sales quota plan activation and completion processes. Additional duties include party information inquiry.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HR_SR_ ADMINISTRATION	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			setups, customer center objects, and relationship information inquiries.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_TERRITORY_MANAGEMENT_T2P_MIGRATION_DUTY	Territory Management T2P Migration	Manages sales territory export and import. Provides users with the ability to export territory data from a test environment and import into production.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Bulk Export

A web service used to extract data in a batch process. This service is deprecated and is replaced with Bulk Export V 2 (oracle.apps.crmCommon.bulkExport.bulkExportServiceV2.BulkExportService).

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/publicModel/}CrmCommonBulkExportService

Service WSDL URL: https://servername/crmService/CrmCommonBulkExportService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Bulk Export Version 2*
Handles	*File Export Output*
Handles	*Object Code*
Handles	*Description*
Handles	*Name*
Handles	*File Export Job*
Handles	*View Criteria Name*
Handles	*File Export Batch*

Operations

- *runExportJob*
- *getAttachmentsForBatch*
- *createAndRunExportJob*
- *RunExportJobWithVC*
- *getJob*
- *findJobs*
- *getBatch*
- *deleteBatch*
- *findBatches*

- *findExportBatchesByJobId*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

runExportJob

The operation that runs the specified export job with an optionally specified timestamp range. If beginTm is specified, the records exported by the bulk export job will only contain those records whose LastUpdateDate is on or after the specified beginTm parameter. If endTm is specified, the records exported by the bulk export job will only contain those whose LastUpdateDate is on or before the specified endTm parameter. If the view being exported does not contain a column named LastUpdateDate, all records will be exported.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
jobId	long	The name is an identifier for the bulk export job.
beginTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The time when the bulk export job begins. It can be on or after the filter time, and can be null.
endTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The time when the bulk export job ends. It can be on or before the filter time, and can be null.

Response Payload

Element Name	Type	Description
result	long	The batch identifier created for the job run will be returned, or null will be returned if a batch wasn't created.

getAttachmentsForBatch

The operation returns a list of attachments for a specific batch identifier.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
batchId	long	The operation identifies the times when the export of a job runs.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	*File Export Output*	A list of attachments associated with the provided batch identifier. The attachments correspond to data in the view object(s) that were selected in the job that was executed.

createAndRunExportJob

The operation for bulk export.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
jobRequest	*Description*	The input details of the job request.

Response Payload

Element Name	Type	Description
result	long	The operation returns batch identifier for corresponding job.

RunExportJobWithVC

The operation that runs the export job specified by the job number.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
jobNumber	string	The operation that runs the export job specified by the job number.
zipFileName	string	The operation that runs the export job specified by the job number.

Element Name	Type	Description
viewCriteria	string	The return value of the createEntity web service method. Includes the full set of attributes and child entities of the record.
bindVar	*Export Job Bind Value*	The operation that runs the export job specified by the job number.

Response Payload

Element Name	Type	Description
result	long	The operation that runs the export job specified by the job number.

getJob

The get operation for file export job.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
exportJobId	long	The get operation for bulk export job identifier.

Response Payload

Element Name	Type	Description
result	*File Export Job*	The file export job that matches the inbound key attributes.

findJobs

The find operation for file export job.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*File Export Job*	A list of file export job that satisfy the inbound criteria.

getBatch

The get operation for file export batch.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
exportBatchId	long	The export batch identifier identifies each time the export of a job is run.

Response Payload

Element Name	Type	Description
result	*File Export Batch*	The file export batch that matches the inbound key attributes.

deleteBatch

The operation to delete file export batch.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
crmCommonExportBatches2	*File Export Batch*	The file export batch to be deleted.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	void	The operation to delete file export batch.

findBatches

The find operation for file export batch.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*File Export Batch*	A list of file export batch that satisfy the inbound criteria.

findExportBatchesByJobId

The find operation for file export batch using the job identifier.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.

Element Name	Type	Description
jobId	long	The find operation for bulk export job identifier.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*File Export Batch*	A list of file export batch that satisfy the inbound criteria.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The return value of the findEntity web service method. Includes the full set of attributes and child entities of the records.
localeName	string	An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	An operation that returns the date and time when the schema files referenced in the service definition last changed.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	An operation to get the list of service data objects defined on this service.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	Run CRM Export Process	This privilege would grant a user the ability to schedule CRM object to export to a file

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	Incentive Compensation Plan Administrator	Configure and manage incentive plans, plan components, and classification rules

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	Customer Contract Team Member	
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_EXPORT_IMPORT_DUTY	Territory Management Export Import	Manages sales territory export and import. Provides users with the ability to export territory data, modify it offline and import.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	Customer Contract Manager	Manages a team of customer contract administrators.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	Supplier Contract Administrator	Works with internal buyers and legal to negotiate and author supplier contracts and agreements. Tracks critical contract milestones, monitors supplier performance, and assists buyers during contract renewals, closeout, and amendments.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			identification, and duplicate resolution.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	Supplier Contract Team Member	
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	Incentive Compensation Manager	Manage processes and workloads, assignments, and payments
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY_CRM	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_QSC_SALES_CATALOG_ADMINISTRATOR_JOB	Sales Catalog Administrator	Sets up and maintains sales catalogs for leads, opportunities, quotes and orders. Sets up and maintains rollup catalog for the purpose of forecasting, territory management, and other purposes. Also associates products, promotions, and competitor products to catalogs, and defines eligibility rules. Also manages the bulk export and import of all product group-related objects.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_QUOTA_EXPORT_MANAGEMENT_DUTY	Quota Export Management	Manages bulk export of all sales territory quota related objects.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_EXPORT_IMPORT_READ_ONLY_DUTY	Territory Management Export Import Read Only	Read Only role for Territory Management Export Import Duty.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	Enterprise Contract Manager	Manages a team of enterprise contract administrators.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	Enterprise Contract Administrator	Performs the duties of both customer contract administrator and supplier contract administrator.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ADMINISTRATOR_JOB	Incentive Compensation Application Administrator	Set up incentive compensation application
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	Enterprise Contract Team Member	
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_PJF_GRANTS_ADMINISTRATOR_JOB	Grants Administrator	Assists the principal investigator with the administrative functions of an award and its related projects, particularly with data collection and data entry tasks.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	Customer Contract Administrator	Works with sales account teams and legal to negotiate and author customer contracts. Tracks critical contract milestones, service level agreements, and assists account teams during contract renewals and amendments.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			service application, including setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	Grants Department Administrator	Assists the principal investigator with the administrative functions of an award and its related projects, particularly with data collection and data entry tasks for one or more departments within the enterprise.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_LOY_ADMINISTRATOR_DUTY	Loyalty Administrator	Manages the provisioning , setup and configuration of Loyalty Application.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	Supplier Contract Manager	Manages a team of supplier contract administrators.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_POZ_DATAFOX_INTEL_ADMINISTRATION_DUTY_CRM	DataFox Administration for Supplier Intelligence	Manages setup for Power Supplier Intelligence with Oracle DataFox Smart Data feature. Not applicable outside of this feature and should be granted only to a user responsible for configuring this setup. This duty role has been obsoleted as part of the deprecation of the feature Manage Supplier Risk with DataFox Supplier Intelligence feature.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_T2P_MIGRATION_DUTY	Territory Management T2P Migration	Manages sales territory export and import. Provides users with the ability to export territory data from a test environment and import into production.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_PJF_PRINCIPAL_INVESTIGATOR_JOB	Principal Investigator	Controls and monitors the technical direction and academic quality of research projects such as laboratory studies or clinical trials. Ensures that projects comply with the terms, conditions, and policies defined by the sponsor and the institution. Owns ultimate

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			responsibility for the management of the sponsored research award, especially in cases where funding is obtained from federal agencies such as the NIH or NSF.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZCA_RUN_CRM_EXPORT_PROCESS_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_PJF_PRINCIPAL_INVESTIGATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_PJF_PRINCIPAL_INVESTIGATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			ready to send status and delete a message.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	ORA_OKC_GRANT_CONTRACT_SEARCH_VIEW_DUTY_CRM	Grant Contract Search and View Access	Searches and views grant contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY_CRM	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.
ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY_CRM	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			incentive compensation for a set of participants.
ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY_CRM	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY_CRM	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
ORA_CN_INCENTIVE_COMPENSATION_MANAGER_JOB	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_PLAN_MANAGEMENT_DUTY_CRM	Incentive Compensation Participant Snapshot Management	Assign and maintain incentive plans and transactions for participants
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_QSC_SALES_CATALOG_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.
ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_PJF_GRANTS_ADMINISTRATOR_JOB	ORA_PJF_PROJECT_ADMINISTRATOR_JOB	Project Administrator	Assists the project manager with the administrative functions of a project, particularly the functions related to collecting and entering information into the project application.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_EXPORT_MANAGEMENT_DUTY	Quota Export Management	Manages bulk export of all sales territory quota related objects.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_MANAGEMENT_SETUP_DUTY	Quota Management Setup	Manages sales territory quota setup, quota plans, prediction and spread formula parameters, and seasonality groups. Runs sales territory quota synchronization and sales quota plan activation and completion processes. Additional duties include party information inquiry.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_ FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_ FOLLOW_UP_MANAGEMENT_ DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_ PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZCM_SALES_PARTY_ ADMINISTRATION_DUTY	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_TERRITORY_MANAGEMENT_T2P_MIGRATION_DUTY	Territory Management T2P Migration	Manages sales territory export and import. Provides users with the ability to export territory data from a test environment and import into production.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Bulk Hierarchy Child Export Input View Object

Holds child object details of a parent export object.

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/bulkExportServiceV2/}BulkExportChildObject

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Bulk Hierarchy Child Export Input View Object*
Contains	*Export Object Filter Criteria Details View Object*
Contained by	*Bulk Hierarchy Child Export Input View Object*
Contained by	*Bulk Hierarchy Export Job Input View Object*
Handled by	*Bulk Export Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributeNameList	string	The list of child export object attribute names delimited by ;(semicolon).
BulkExportFilterCriteria	*Export Object Filter Criteria Details View Object*	The filter criteria for a current Object.
ObjectCode	string	The bulk export child object. • Primary Key
ObjectCodeBulkExportChildObject	*Bulk Hierarchy Child Export Input View Object*	The child object of the current object.
ParentObjectCode	string	The parent export object code.
ViewCriteriaName	string	The view criteria name.

Bulk Hierarchy Export Job Input View Object

Bulk export hierarchy job details.

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/bulkExportServiceV2/}BulkExportHierarchyJob

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Bulk Hierarchy Child Export Input View Object*
Contains	*Export Object Filter Criteria Details View Object*
Handled by	*Bulk Export Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributeNameList	string	The list of parent export object attribute names delimited by ;(semicolon).

Name	Type	Description
BulkExportChildObject	*Bulk Hierarchy Child Export Input View Object*	The child export object.
BulkExportFilterCriteria	*Export Object Filter Criteria Details View Object*	The parent export object filter criteria.
ObjectCode	string	The parent export object code. • Primary Key
ViewCriteriaName	string	The parent export object view criteria name.

Bulk Hierarchy Export Job Output Parameters View Object

The name value pairs containing Export Job Id, Export BatchId, Error Code, and Error Message.

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/bulkExportServiceV2/}BulkExportOutParam

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Bulk Export Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Name	string	Represents output parameter name. • Primary Key
Value	string	Represents output parameter value.

Export Object Filter Criteria Details View Object

Handles export object column filter details.

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/bulkExportServiceV2/}BulkExportFilterCriteria

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Bulk Hierarchy Child Export Input View Object*
Contained by	*Bulk Hierarchy Export Job Input View Object*
Handled by	*Bulk Export Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributeValueFirst	string	The first attribute value.
AttributeValueSecond	string	The second attribute value.
VCOperator	string	The filter operator.
ViewAttributeName	string	The view attribute name. • Primary Key
ViewCriteriaName	string	The view criteria name for a defined object.

Export Parameters View Object

Bulk hierarchy export job parameters.

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/bulkExportServiceV2/}BulkExportHierarchyJobParams

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Bulk Export Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Name	string	The job parameter name. • Primary Key
Value	string	The job param value.

File Export Batch Version 2

The export jobs set to run as a batch at a scheduled time.

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/bulkExportServiceV2/}BulkExportBatches

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Previous version is	*File Export Batch*
Handled by	*Bulk Export Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttachmentEntityName	string	Internally used to create attachment associated with the batch record.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndFilterTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The end time filter. If the filter isn't null, then any retrieved results will have a LastModifiedDate on or before this time.
EndTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The end time for schedule.
ExportBatchId	long	The primary key for the batch record. • Primary Key
ExportJobId	long	The export job for which the batch is being run.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
StartFilterTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The start time filter. If the filter isn't null, then any retrieved results will have a LastModifiedDate on or after this time.
StartTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The start date for schedule.
Status	string	The status of the record.

File Export Job Version 2

The jobs that define what object and mapping will be exported.

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/bulkExportServiceV2/}BulkExportJobs

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Previous version is	*File Export Job*
Handled by	*Bulk Export Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	Indicates whether the task is active (registered within ESS).
Compression	string	The compression options available. G=gzip individual files, Z=create single zip of all files, J=create single zip of all files.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateFormat	string	The date format to be used in job record.
DecimalSeparator	string	The decimal separator used.
Delimiter	string	The delimiter to use such as comma, tab.
DescriptionText	string	The job description.
EmailAddress	string	Email Address to be used for sending notification email on export activity completion.
EndDateTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The end date time.
EndOfLine	string	The End of Line character used. Lookup to be CR, LF, or CRLF. Default: LF.

Name	Type	Description
ErrorThreshold	int	The number of errors to allow before aborting. A value of Null indicates that there is no limit.
ExportJobId	long	The primary key for the export job. • Primary Key
ExportJobNumber	string	This identifies the export job.
ExportMapId	long	Identifies the export mapping used for field mappings.
FileCharset	string	The character set to use. For example, UTF-8, UTF-16, etc. Lookup to FND_LOOKUPS.
FileType	string	The file export type, e.g. CSV (for future use XML).
HeaderRowIncluded	string	Indicates whether or not to include the header row in the output.
LastBatchId	long	The most recently run batch.
LastBatchStartTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The last time a batch for this job was started.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Name	string	The export job name.
NextScheduleTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The next scheduled date.
NullValue	string	The value used to represent a null value. If null itself no value is output. Default: null.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
ParentRequestId	long	The parent scheduler request in case of repeating exports.
QuoteChar	string	The character(s) used to encapsulate value if it contains the delimiter (e.g. double quote, single quote, null for nothing).
RepeatFrequency	long	The number of repeat frequency.
RepeatUnitCd	string	The repeat unit code. Options are hours, days, weeks, and months.
RequestId	long	A system-generated read-only attribute used by the application framework.
ScheduleModeCd	string	The schedule mode. The options are repeating, one time (manually), and one time (scheduled).
ScheduleStatusCd	string	The schedule status. The options are scheduled, not scheduled, running, complete, and error.
ScheduleTypeCd	string	The code defining the type of schedule. Options are Immediate and Scheduled.
StartTm	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The start date for schedule.
TimestampFormat	string	The timestamp format to be used in job record.

File Export Output Version 2

The comma-separated variable output files for service data objects that are exported for a given batch.

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/bulkExportServiceV2/}BulkExportAttachment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Previous version is	*File Export Output*
Handled by	*Bulk Export Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContentId	string	Contains ContentId for where the file is stored in the content repository.
Filename	string	The name of the file where data will be exported.
Size	long	The size of the file.
URL	string	The destination URL associated with a specific Google AdWords ad.
creationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the file is created.

View Name

Maintains View Criteria bind values.

QName: {http://xmlns.oracle.com/apps/crmCommon/bulkExport/bulkExportServiceV2/}BulkExportBindValue

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Bulk Export Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
bindName	string	The bind name. • Primary Key
bindValue	string	The bind value.
isDateFlag	boolean	The date flag.

Business Plan Service

External service to operate on business plans.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/businessPlans/businessPlanService/}BusinessPlanService

Service WSDL URL: https://servername/crmService/BusinessPlanService?WSDL

Logical Business Objects

- CRM : Common CRM : Sales Business Plan

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Note Descriptive Flexfields*
Handles	*Business Plan*
Handles	*Note*
Handles	*Business Plan Team*
Handles	*Business Plan SWOT*

Operations

- *getServiceName*

- *getBusinessPlan*
- *createBusinessPlan*
- *updateBusinessPlan*
- *deleteBusinessPlan*
- *mergeBusinessPlan*
- *findBusinessPlan*
- *processBusinessPlan*
- *processCSBusinessPlan*
- *deleteBusinessPlanResource*
- *deleteBusinessPlanSWOT*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getServiceName

A web service method to retrieve the service name.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}StringResult	The parameter returns the Service Name qualified with NameSpace.

getBusinessPlan

A web service method that queries a single record of Oracle Fusion BusinessPlan Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
businessPlanId	long	A required input parameter of the getBusinessPlan web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/businessPlans/businessPlanService/}BusinessPlanResult	The return value of getBusinessPlan web service method which includes the full set of attributes of the record.

createBusinessPlan

A web service method that creates records of Oracle Fusion BusinessPlan Object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
businessPlan	*Business Plan*	A required input parameter of the createBusinessPlan web service method. The input object includes the attribute values that the BusinessPlan record is created with.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/businessPlans/businessPlanService/}BusinessPlanResult	The return value of the createBusinessPlan web service method which includes the full set of attributes of the record.

updateBusinessPlan

A web service method that updates a record of Oracle Fusion BusinessPlan object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
businessPlan	*Business Plan*	A required parameter of the updateBusinessService web service method. The record matching the ID specified in this input is updated with the corresponding input attribute values.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/businessPlans/businessPlanService/}BusinessPlanResult	The return value of the updateBusinessPlan web service method which includes the full set of attributes of the record.

deleteBusinessPlan

A web service method that deletes an Oracle Fusion BusinessPlan Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
businessPlan	*Business Plan*	A required input parameter of the deleteBusinessPlan web service method. The record matching the input attribute values specified in the BusinessPlan is deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The return value of the deleteBusinessPlan web service method.

mergeBusinessPlan

A web service method that either creates a single record of Oracle Fusion BusinessPlan Object or updates a record with given ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
businessPlan	*Business Plan*	A required parameter of the mergeBusinessPlan web service method. The record matching the ID specified in this input is updated. If no ID is specified, then the record is created instead.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/businessPlans/businessPlanService/}BusinessPlanResult	The return value of the mergeBusinessPlan web service method. Includes the full set of attributes of the record.

findBusinessPlan

A web service method that queries by criteria, a single record or set of records of Oracle Fusion Business Plan Object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBusinessPlan web service method. The filter criteria is the cumulative set of attribute criteria that will identify records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findBusinessPlan.

Response Payload

Element Name	Type	Description
result	*Business Plan*	The return value of the findBusinessPlan web service method. Includes the full set of attributes of records queried.

processBusinessPlan

A web service method that creates or updates records of Oracle Fusion BusinessPlan object in bulk.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Either of create, merge or update needs to be passed as input parameter value.
businessPlan	*Business Plan*	A required parameter of the processBusinessPlan web service method. The list of BusinessPlan input records to be created or merged or updated.

Element Name	Type	Description
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	It has three parts. For the first parameter, value can be full which means full set of BusinessPlan attributes to be returned, value of key means only BusinessPlanId values to be returned, value of none means non value returned. For the second parameter, similar to first parameter but related to exceptions. For the third mandatory parameter, indicates true or false for partial failure allowed or not.

Response Payload

Element Name	Type	Description
result	*Business Plan*	The return value of the processBusinessPlan web service method. It can be none or a list of only the BusinessPlan IDs or a list of full set of BusinessPlan records.

processCSBusinessPlan

A web service operation that processes the BusinessPlans.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	A required input parameter to pass the data to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	It has three parts. For the first parameter, value can be Full which means full set of BusinessPlan attributes to be returned, value of Key means only BusinessPlanId values to be returned, value of None means non value returned. For the second parameter, similar to first parameter but related to Exceptions. For the third mandatory parameter, indicates True or False for partial failure allowed or not.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The return value of the processCSBusinessPlan web service method. It can be none or a list of

Element Name	Type	Description
		only the BusinessPlan IDs or a list of full set of BusinessPlan records.

deleteBusinessPlanResource

A web service method that deletes a record of Oracle Fusion Business Plan Resource Object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
businessPlanResource	*Business Plan Team*	A required input parameter of the deleteBusinessPlanResource web service method. The record matching the input attribute values specified in the Business Plan Resource is deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The return value of the deleteBusinessPlanResource web service method.

deleteBusinessPlanSWOT

A web service method that deletes an Oracle Fusion Business Plan SWOT Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
businessPlanSWOT	*Business Plan SWOT*	A required input parameter of the deleteBusinessPlanSWOT web service method. The record matching the input attribute values specified in the BusinessPlan SWOT is deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The return value of the deleteBusinessPlanSWOT web service method.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The return value of the label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The parameter returns the date and time when the service definition last changed in ISO 8601 format.

Element Name	Type	Description

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	The parameter returns a list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getBusinessPlan	ZCA_VIEW_SALES_BUS_PLN_PRIV	View Sales Business Plan	Allows viewing sales business plans.
updateBusinessPlan	ZCA_UPDATE_SALES_BUS_PLN_PRIV	Update Sales Business Plan	Allows updating sales business plans.
mergeBusinessPlan	ZCA_UPDATE_SALES_BUS_PLN_PRIV	Update Sales Business Plan	Allows updating sales business plans.
createBusinessPlan	ZCA_CREATE_SALES_BUS_PLN_PRIV	Create Sales Business Plan	Allows creating sales business plans.
deleteBusinessPlan	ZCA_DELETE_SALES_BUS_PLN_PRIV	Delete Sales Business Plan	Allows deleting sales business plans.
deleteBusinessPlanSWOT	ZCA_UPDATE_SALES_BUS_PLN_PRIV	Update Sales Business Plan	Allows updating sales business plans.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getEntityList	ZCA_VIEW_SALES_BUS_PLN_PRIV	View Sales Business Plan	Allows viewing sales business plans.
deleteBusinessPlanResource	ZCA_UPDATE_SALES_BUS_PLN_PRIV	Update Sales Business Plan	Allows updating sales business plans.
getDfltObjAttrHints	ZCA_VIEW_SALES_BUS_PLN_PRIV	View Sales Business Plan	Allows viewing sales business plans.
processCSBusinessPlan	ZCA_UPDATE_SALES_BUS_PLN_PRIV	Update Sales Business Plan	Allows updating sales business plans.
findBusinessPlan	ZCA_VIEW_SALES_BUS_PLN_PRIV	View Sales Business Plan	Allows viewing sales business plans.
processBusinessPlan	ZCA_UPDATE_SALES_BUS_PLN_PRIV	Update Sales Business Plan	Allows updating sales business plans.
getServiceLastUpdateTime	ZCA_VIEW_SALES_BUS_PLN_PRIV	View Sales Business Plan	Allows viewing sales business plans.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_UPDATE_SALES_BUS_PLN_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZCA_UPDATE_SALES_BUS_PLN_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZCA_UPDATE_SALES_BUS_PLN_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZCA_UPDATE_SALES_BUS_PLN_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZCA_UPDATE_SALES_BUS_PLN_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZCA_UPDATE_SALES_BUS_PLN_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZCA_UPDATE_SALES_BUS_PLN_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZCA_UPDATE_SALES_BUS_PLN_PRIV	ORA_LOY_MANAGEMENT_DUTY	Loyalty Management	Manages all aspects of a Loyalty Program
ZCA_UPDATE_SALES_BUS_PLN_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZCA_UPDATE_SALES_BUS_PLN_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZCA_UPDATE_SALES_BUS_PLN_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZCA_DELETE_SALES_BUS_PLN_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_DELETE_SALES_BUS_PLN_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZCA_DELETE_SALES_BUS_PLN_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZCA_DELETE_SALES_BUS_PLN_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZCA_DELETE_SALES_BUS_PLN_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZCA_DELETE_SALES_BUS_PLN_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZCA_DELETE_SALES_BUS_PLN_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZCA_DELETE_SALES_BUS_PLN_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZCA_CREATE_SALES_BUS_PLN_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_CREATE_SALES_BUS_PLN_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZCA_CREATE_SALES_BUS_PLN_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZCA_CREATE_SALES_BUS_PLN_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZCA_CREATE_SALES_BUS_PLN_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZCA_CREATE_SALES_BUS_PLN_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZCA_CREATE_SALES_BUS_PLN_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZCA_CREATE_SALES_BUS_PLN_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZCA_VIEW_SALES_BUS_PLN_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_VIEW_SALES_BUS_PLN_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZCA_VIEW_SALES_BUS_PLN_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZCA_VIEW_SALES_BUS_PLN_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZCA_VIEW_SALES_BUS_PLN_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZCA_VIEW_SALES_BUS_PLN_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZCA_VIEW_SALES_BUS_PLN_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZCA_VIEW_SALES_BUS_PLN_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZCA_VIEW_SALES_BUS_PLN_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZCA_VIEW_SALES_BUS_PLN_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			and the ability to work with leads and opportunities. This role is for a partner sales manager.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_LOY_MANAGEMENT_DUTY	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_LOY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZPM_PARTNER_ ADMINISTRATOR_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZPM_PARTNER_SALES_ MANAGER_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_ COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_SVC_SERVICE_STATUS_ COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_ CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZCM_SETUP_CUSTOMER_ CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_PARTNER_ ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_ PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_PARTNER_SALES_ MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_ PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_ MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_ PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Business Plan

The business plan information.

QName: {http://xmlns.oracle.com/apps/crmCommon/businessPlans/businessPlanService/}BusinessPlan

Logical Business Objects

- CRM : Common CRM : Sales Business Plan

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note*
Contains	*Business Plan Team*
Contains	*Business Plan SWOT*
Handled by	*Business Plan Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BusinessPlanClassCode	string	The business plan class code.
BusinessPlanId	long	The system-generated business plan identifier. • Primary Key
BusinessPlanNumber	string	The unique identifier of the business plan.
BusinessPlanOwnerId	long	The business plan class code.
BusinessPlanOwnerNumber	string	Alternate key corresponding to BusinessPlanOwnerId.
BusinessPlanResource	*Business Plan Team*	The business plan resource records.
BusinessPlanTypeCode	string	The business plan type code.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CustomerId	long	Identifier of the Account for which a business plan is created.

Name	Type	Description
CustomerNumber	string	Alternate Key corresponding to CustomerId.
CustomerPartyType	string	Indicates the Account party type.
CustomerPartyUniqueName	string	Indicates the Account unique name.
DeleteFlag	boolean	Shows whether current user can delete Business Plan
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Name	string	The business plan name.
Note	*Note*	Note associated with Sales Business Plan.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigCreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The original creation date of the record that is used during import and migration.
OwnerResourceName	string	The business plan owner.
PartnerId	long	The unique identifier of the partner.
PartnerName	string	The partner name.
PartnerNumber	string	Alternate Key corresponding to PartnerId.
PeriodEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the period end date.
PeriodEndDisplayName	string	The end period display name.

Name	Type	Description
PeriodEndName	string	The end values for the appropriate period type that are based on the entries in GL calendar.
PeriodRangeDisplayName	string	The concatenated display names of start and end periods.
PeriodSetName	string	The period set name of the business plan.
PeriodStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the period start date.
PeriodStartDisplayName	string	The start period display name.
PeriodStartName	string	The start values for the appropriate period type that are based on the entries in GL calendar.
PeriodTypeCode	string	The period type such as year, quarter, or period.
SourceType	string	Source Object Code for Business Plans Notes.
StatusCode	string	The pre-defined code used to indicate the status.
Swot	*Business Plan SWOT*	The business plan SWOT records.
UpdateFlag	boolean	Shows whether current user can update Business Plan

Business Plan SWOT

The SWOT information about the business plan.

QName: {http://xmlns.oracle.com/apps/crmCommon/businessPlans/businessPlanService/}Swot

Logical Business Objects

- CRM : Common CRM : Sales Business Plan

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Business Plan*
Handled by	*Business Plan Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BusinessPlanId	long	The identifier of the business plan that is a parent of the SWOT.
BusinessPlanNumber	string	Parent puid.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
SWOTId	long	The SWOT identifier. • Primary Key
SWOTNumber	string	PUID/surrogate key for the Business Plan SWOT.
SWOTTypeCode	string	The SWOT type code.

Business Plan Team

The team that will work on the business plan.

QName: {http://xmlns.oracle.com/apps/crmCommon/businessPlans/businessPlanService/}BusinessPlanResource

Logical Business Objects

- CRM : Common CRM : Sales Business Plan

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Business Plan*
Handled by	*Business Plan Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	Access level determines the type of access granted to the Business Plan team member.
BusinessPlanId	long	The identifier of the business plan that is a parent of the BusinessPlanResource.
BusinessPlanNumber	string	Parent puid.
BusinessPlanResourceId	long	The unique identifier of the BusinessPlanResource record. • Primary Key
BusinessPlanResourceNumber	string	The public unique identifier of the BusinessPlanResource.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DenormMgrId	long	The ID of the manager.
EmailAddress	string	Email address of the resource.
FormattedPhoneNumber	string	The formatted phone number.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ManagerName	string	The name of the manager.
MemberFunctionCode	string	The BusinessPlan team member's function.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationName	string	The name of the party when the party type is Organization.
OwnerFlag	boolean	Indicates if the resource is the owner of the business plan.
ResourceId	long	The unique identifier of the resource.
ResourceName	string	The name of business plan team member.
ResourceNumber	string	Alternate key corresponding to ResourceId.
RoleName	string	The role name of the resource.

Note

The object that captures comments, information, or instructions for an Oracle Fusion Applications business object.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/noteService}Note

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note Descriptive Flexfields*
Contained by	*Objective*
Contained by	*Opportunity*
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Contained by	*Activity*
Contained by	*Sales Competitor*
Contained by	*Sales Lead*
Contained by	*Business Plan*
Contained by	*Program Enrollments*
Contained by	*Reference*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*

Relationship Type	Object or Service
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreatorPartyId	long	This is the party identifier for the note creator.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.

Name	Type	Description
DeleteFlag	boolean	Indicates whether the user has access to delete the note.
Dff	*Note Descriptive Flexfields*	The descriptive flex field segment.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record
NoteAttributeCategory	string	The contextual flex field for development usage.
NoteAttributeUid1	string	The flex field for development usage.
NoteAttributeUid2	string	The flex field for development usage.
NoteAttributeUid3	string	The flex field for development usage.
NoteAttributeUid4	string	The flex field for development usage.
NoteAttributeUid5	string	The flex field for development usage.
NoteId	long	The unique identifier of the note. • Primary Key
NoteNumber	string	The alternate unique identifier of the note. A user key that is system generated or from an external system.
NoteTitle	string	The title of the note entered by the user.
NoteTxt	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	This is the column that stores the actual note text.
NoteTypeCode	string	This is the note type code for categorization of note.
PartyId	long	The unique identifier of the contact party.

Name	Type	Description
PartyName	string	The name of the party.
SourceObjectCode	string	This is the source_object_code for the source object as defined in OBJECTS Metadata.
SourceObjectId	string	This is the source_object_Uid for the source object such as Activities, Opportunities, and so on defined in OBJECTS metadata.
UpdateFlag	boolean	Indicates whether the user can update the note.
VisibilityCode	string	This is the attribute to specify the visibility level of the note.

Note Descriptive Flexfields

The descriptive flex field that captures additional information for notes, such as a priority or status.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/flex/noteDff/}NoteDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Note*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*

Relationship Type	Object or Service
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
NoteId	long	The unique identifier of the note. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Case Service

Service to create cases.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crm/service/caseMgmt/caseMgmtService/}CaseService

Service WSDL URL: https://servername/crmService/CaseService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Case Resource*
Handles	*Case Contact*
Handles	*Case Opportunity*
Handles	*Case Message*
Handles	*Case*
Handles	*Case Household*

Operations

- *getCase*
- *createCase*
- *updateCase*
- *deleteCase*
- *mergeCase*
- *findCase*
- *getCaseContacts*
- *deleteCaseContacts*
- *getCaseHouseholds*
- *deleteCaseHouseholds*
- *getCaseMessages*
- *deleteCaseMessages*
- *getCaseResources*
- *deleteCaseResources*
- *getCaseOpportunities*
- *deleteCaseOpportunities*

getCase

Queries and retrieves a single case record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
caseId	long	Case identifier.

Response Payload

Element Name	Type	Description
result	*Case*	A case that matches the inbound parameters.

createCase

Creates a single case record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
caseInstance	*Case*	The case to be created.

Response Payload

Element Name	Type	Description
result	*Case*	The case that is created.

updateCase

Updates a singlecase record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
caseInstance	*Case*	The case to be updated.

Response Payload

Element Name	Type	Description
result	*Case*	The updated case.

deleteCase

Deletes a single case record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
caseInstance	*Case*	The case record to be deleted.

Response Payload

Element Name	Type	Description
result	void	None.

mergeCase

Updates a single case record if one exists; otherwise, creates a new case record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
caseInstance	*Case*	The case record to be updated.

Response Payload

Element Name	Type	Description
result	*Case*	The updated case record.

findCase

Queries a list of cases based on a filter criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	Indicates the criteria used to query a list of cases.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Indicates a criteria to filter out cases that are not currently used.

Response Payload

Element Name	Type	Description
result	*Case*	Indicates a list of cases that satisfy the inbound parameters.

getCaseContacts

Queries a single case contact record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
caseContactId	long	The case contact ID.

Response Payload

Element Name	Type	Description
result	*Case Contact*	The case contact that matches the inbound parameter.

deleteCaseContacts

Deletes a case contact record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
caseContacts	*Case Contact*	The case contact to be deleted.

Response Payload

Element Name	Type	Description
result	void	None.

getCaseHouseholds

Queries a single case household record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
caseHouseholdId	long	The case household ID.

Response Payload

Element Name	Type	Description
result	*Case Household*	The case household that matches the inbound parameter.

deleteCaseHouseholds

Deletes a case household record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
caseHouseholds	*Case Household*	The case household to be deleted.

Response Payload

Element Name	Type	Description
result	void	None.

getCaseMessages

Queries a single case message record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
messageId	long	The case message ID.

Response Payload

Element Name	Type	Description
result	*Case Message*	The case message that matches the inbound parameter.

deleteCaseMessages

Deletes a case message record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
caseMessages	*Case Message*	The case message to be deleted.

Response Payload

Element Name	Type	Description
result	void	None.

getCaseResources

Queries a single case resource record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
caseResourceId	long	The case resource ID.

Response Payload

Element Name	Type	Description
result	*Case Resource*	The case resource that matches the inbound parameter.

deleteCaseResources

Deletes a case resource record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
caseResources	*Case Resource*	The case resource to be deleted.

Response Payload

Element Name	Type	Description
result	void	None.

getCaseOpportunities

Queries and retrieves a single case opportunity record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
caseOpportunityId	long	Case opportunity identifier.

Response Payload

Element Name	Type	Description
result	*Case Opportunity*	A case opportunity that matches the inbound parameters.

deleteCaseOpportunities

Deletes a single case opportunity record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
caseOpportunities	*Case Opportunity*	The case opportunity record to be deleted.

Response Payload

Element Name	Type	Description
result	void	None.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getCaseResources	SVC_CREATE_CASE_PRIV	Create Case	Allows user to create case records
getCaseResources	SVC_DELETE_CASE_PRIV	Delete Case	Allows user to delete a case record
getCaseResources	SVC_VIEW_CASE_PRIV	View Case	Allows user to view case records
getCaseResources	SVC_EDIT_CASE_PRIV	Edit Case	Allows user to edit case attributes
deleteCaseContacts	SVC_DELETE_CASE_PRIV	Delete Case	Allows user to delete a case record

Operation Name	Privilege Code	Privilege Name	Privilege Description
createCase	SVC_CREATE_CASE_PRIV	Create Case	Allows user to create case records
getCase	SVC_CREATE_CASE_PRIV	Create Case	Allows user to create case records
getCase	SVC_DELETE_CASE_PRIV	Delete Case	Allows user to delete a case record
getCase	SVC_VIEW_CASE_PRIV	View Case	Allows user to view case records
getCase	SVC_EDIT_CASE_PRIV	Edit Case	Allows user to edit case attributes
getCaseContacts	SVC_CREATE_CASE_PRIV	Create Case	Allows user to create case records
getCaseContacts	SVC_DELETE_CASE_PRIV	Delete Case	Allows user to delete a case record
getCaseContacts	SVC_VIEW_CASE_PRIV	View Case	Allows user to view case records
getCaseContacts	SVC_EDIT_CASE_PRIV	Edit Case	Allows user to edit case attributes
getCaseMessages	SVC_CREATE_CASE_PRIV	Create Case	Allows user to create case records
getCaseMessages	SVC_DELETE_CASE_PRIV	Delete Case	Allows user to delete a case record
getCaseMessages	SVC_VIEW_CASE_PRIV	View Case	Allows user to view case records
getCaseMessages	SVC_EDIT_CASE_PRIV	Edit Case	Allows user to edit case attributes
deleteCaseMessages	SVC_DELETE_CASE_PRIV	Delete Case	Allows user to delete a case record
deleteCaseHouseholds	SVC_DELETE_CASE_PRIV	Delete Case	Allows user to delete a case record
deleteCase	SVC_DELETE_CASE_PRIV	Delete Case	Allows user to delete a case record
findCase	SVC_CREATE_CASE_PRIV	Create Case	Allows user to create case records
findCase	SVC_DELETE_CASE_PRIV	Delete Case	Allows user to delete a case record
findCase	SVC_VIEW_CASE_PRIV	View Case	Allows user to view case records
findCase	SVC_EDIT_CASE_PRIV	Edit Case	Allows user to edit case attributes
updateCase	SVC_EDIT_CASE_PRIV	Edit Case	Allows user to edit case attributes

Operation Name	Privilege Code	Privilege Name	Privilege Description
getCaseHouseholds	SVC_CREATE_CASE_PRIV	Create Case	Allows user to create case records
getCaseHouseholds	SVC_DELETE_CASE_PRIV	Delete Case	Allows user to delete a case record
getCaseHouseholds	SVC_VIEW_CASE_PRIV	View Case	Allows user to view case records
getCaseHouseholds	SVC_EDIT_CASE_PRIV	Edit Case	Allows user to edit case attributes
deleteCaseResources	SVC_DELETE_CASE_PRIV	Delete Case	Allows user to delete a case record
mergeCase	SVC_CREATE_CASE_PRIV	Create Case	Allows user to create case records
mergeCase	SVC_EDIT_CASE_PRIV	Edit Case	Allows user to edit case attributes
deleteCaseOpportunities	SVC_DELETE_CASE_PRIV	Delete Case	Allows user to delete a case record
getCaseOpportunities	SVC_CREATE_CASE_PRIV	Create Case	Allows user to create case records
getCaseOpportunities	SVC_DELETE_CASE_PRIV	Delete Case	Allows user to delete a case record
getCaseOpportunities	SVC_VIEW_CASE_PRIV	View Case	Allows user to view case records
getCaseOpportunities	SVC_EDIT_CASE_PRIV	Edit Case	Allows user to edit case attributes

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_EDIT_CASE_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_EDIT_CASE_PRIV	ORA_SVC_CASE_SUPERVISION	Case Supervision	Supervises and manages caseworkers, assists caseworkers with any complex issues, handles case approvals and escalations, coordinates care and benefits with external service providers, assigns or reassigns cases to caseworkers, conducts evaluations of benefits programs and provides feedback.
SVC_EDIT_CASE_PRIV	ORA_SVC_CASE_ADMINISTRATOR	Case Administrator	Administers all aspects of Case Management.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_EDIT_CASE_PRIV	ORA_SVC_CASE_EXECUTION	Case Execution	Assists clients who are applying for benefits, opens cases and manages all tasks associated to the case, processes clients applications, evaluate clients needs for benefits, counsels benefits recipients, performs assessments of clients strengths and needs to develop benefit plans, performs follow-up with clients to ensure they are working on their tasks.
SVC_DELETE_CASE_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_DELETE_CASE_PRIV	ORA_SVC_CASE_SUPERVISION	Case Supervision	Supervises and manages caseworkers, assists caseworkers with any complex issues, handles case approvals and escalations, coordinates care and benefits with external service providers, assigns or reassigns cases to caseworkers, conducts evaluations of benefits programs and provides feedback.
SVC_DELETE_CASE_PRIV	ORA_SVC_CASE_ADMINISTRATOR	Case Administrator	Administers all aspects of Case Management.
SVC_VIEW_CASE_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_VIEW_CASE_PRIV	ORA_SVC_CASE_SUPERVISION	Case Supervision	Supervises and manages caseworkers, assists caseworkers with any complex issues, handles case approvals and escalations, coordinates care and benefits with external service providers, assigns or reassigns cases to caseworkers, conducts evaluations of benefits programs and provides feedback.
SVC_VIEW_CASE_PRIV	ORA_SVC_CASE_ADMINISTRATOR	Case Administrator	Administers all aspects of Case Management.
SVC_VIEW_CASE_PRIV	ORA_SVC_CASE_EXECUTION	Case Execution	Assists clients who are applying for benefits, opens cases and manages all tasks associated to the case, processes clients applications, evaluate clients needs for benefits, counsels benefits recipients, performs assessments of clients strengths and needs to develop benefit plans, performs follow-

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			up with clients to ensure they are working on their tasks.
SVC_CREATE_CASE_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_CREATE_CASE_PRIV	ORA_SVC_CASE_SUPERVISION	Case Supervision	Supervises and manages caseworkers, assists caseworkers with any complex issues, handles case approvals and escalations, coordinates care and benefits with external service providers, assigns or reassigns cases to caseworkers, conducts evaluations of benefits programs and provides feedback.
SVC_CREATE_CASE_PRIV	ORA_SVC_CASE_ADMINISTRATOR	Case Administrator	Administers all aspects of Case Management.
SVC_CREATE_CASE_PRIV	ORA_SVC_CASE_EXECUTION	Case Execution	Assists clients who are applying for benefits, opens cases and manages all tasks associated to the case, processes clients applications, evaluate clients needs for benefits, counsels benefits recipients, performs assessments of clients strengths and needs to develop benefit plans, performs follow-up with clients to ensure they are working on their tasks.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.

Case

Contains the details and related information across case life cycle.

QName: {http://xmlns.oracle.com/apps/crm/service/caseMgmt/caseMgmtService/}Case

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Case Resource*
Contains	*Case Contact*
Contains	*Case Opportunity*
Contains	*Case Message*
Contains	*Case Household*
Handled by	*Case Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AllegationCd	string	
AllegationCdMeaning	string	
ArbitrationRequiredFlag	boolean	
AssigneePartyName	string	Indicates the party name of the case assignee.
AssigneeResourceId	long	The ID of the resource (for example, a support engineer) assigned to the case.
BUOrgId	long	The unique ID of the business unit name associated to the case.
BusinessUnitName	string	Indicates the Business Unit Name of the case.
CaseCategoryId	long	Indicates the category of case.
CaseCreatedBy	string	Migration Who Column: set to the user who created the row.
CaseCreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Migration Who Column: set to the case creation date.
CaseId	long	Indicates the case identifier. • Primary Key
CaseLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Migration Who Column: set to the date and time of the last update of the case.
CaseLastUpdateLogin	string	Migration Who Column: set to the session login associated to the user who last updated the case.
CaseLastUpdatedBy	string	Migration Who Column: set to the user who last updated the case.
CaseNumber	string	Indicates the reference number of the case.
CaseTypeCd	string	Lookup code that indicates the type of case.
CaseTypeCdMeaning	string	Indicates the display value corresponding to the case type lookup code for the case.

Name	Type	Description
CategoryName	string	Indicates the name of the category associated to the case.
ClosedDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the closed date for case.
ComplaintTypeCd	string	
ComplaintTypeCdMeaning	string	
ContributingFactorsCd	string	
ContributingFactorsCdMeanings	string	
CorpCurrencyCode	string	Indicates the corporate currency code.
CreatedBy	string	Indicates the user who created the case.
CreatedByPartyId	long	The user who created the case in the system.
CreatedByPartyName	string	The name of the user who created the case in the system.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the creation of the case.
CurcyConvRateType	string	The corporate currency conversion rate type.
CurrencyCode	string	The currency code.
DeleteFlag	boolean	Indicates if the record can be deleted by the current user.
Description	string	Indicates description/statement of the case.
FiledByTypeCd	string	
FiledByTypeCdMeaning	string	
IncidentOccurrenceDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	
IncidentTypeCd	string	

Name	Type	Description
IncidentTypeCdMeaning	string	
IsolatedIncidentFlag	boolean	
LastClosedDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates last closed date for case, if the case was closed and then reopened.
LastReopenDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates last reopen date for case, if the case was reopened.
LastResolvedDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the case was last updated.
LastUpdateLogin	string	Indicates the login session of the user who last updated the case.
LastUpdatedBy	string	Indicates the user who last updated the case.
LastUpdatedByPartyId	long	Indicates the party id of the user who last updated the case.
LastUpdatedByPartyName	string	The name of the user who last updated the case.
MeasuresTakenCd	string	
MeasuresTakenCdMeanings	string	
OpenDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the opened date for case, in case the case is approved.
PolicyViolatedFlag	boolean	
PrimaryContactPartyId	long	Indicates the primary contact for the case.
PrimaryContactPartyName	string	Indicates the name of the case primary contact.
PrimaryHouseholdPartyId	long	Indicates the primary household for the case.
PrimaryHouseholdPartyName	string	Indicates the name of the case primary household.

Name	Type	Description
PriorityCd	string	Indicates the priority of the case.
PriorityCdMeaning	string	Indicates the display value corresponding to the priority lookup code for the case.
QueueId	long	Indicates the queue ID the case is assigned to.
QueueName	string	The name of the queue associated to the case.
ReportedByPartyId	long	Indicates the person who reported the case.
ReportedByPartyName	string	Indicates Reported By Party Name.
ResolutionCd	string	
ResolutionCdMeaning	string	
ResolveDescription	string	
ResolveOutcomeCd	string	
ResolveOutcomeCdMeaning	string	
ResolvedBy	string	
ResolvedByPartyId	long	
ReviewedByCd	string	
ReviewedByCdMeanings	string	
SensitivityCd	string	Indicates the sensitivity of the case.
SensitivityCdMeaning	string	Indicates the display value corresponding to the sensitivity lookup code for the case.
SettlementAmount	decimal	
SettlementRequiredFlag	boolean	
SettlementSummary	string	

Name	Type	Description
SourceCd	string	Indicates how the case was entered into the system.
SourceCdMeaning	string	Indicates the display value corresponding to the source lookup code for the case.
SpecialistRequiredFlag	boolean	
StatusCd	string	Indicates the status of the case.
StatusCdMeaning	string	Indicates the display value corresponding to the status lookup code for the case.
StatusTypeCd	string	Indicates the status type of the case.
StatusTypeCdMeaning	string	Indicates the display value corresponding to the status type lookup code for the case.
StripeCd	string	Indicates the stripe code for the case.
Title	string	Indicates the title of the case.
UpdateFlag	boolean	Indicates if the record can be updated by the current user.
caseContacts	*Case Contact*	Contains many-to-many relationships of case and associated contacts.
caseHouseholds	*Case Household*	Contains many-to-many relationships of case and associated households.
caseMessages	*Case Message*	Contains information about every communication update to the case.
caseOpportunities	*Case Opportunity*	Contains many-to-many relationships of case and associated case opportunities.
caseResources	*Case Resource*	Contains many-to-many relationships of case and associated resources.

Case Contact

Contains many-to-many relationships of case and associated contacts.

QName: {http://xmlns.oracle.com/apps/crm/service/caseMgmt/caseMgmtService/}CaseContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Case*
Handled by	*Case Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CaseContactId	long	Indicates the case contact identifier. • Primary Key
CaseId	long	Indicates the case to which this contact is associated.
CorpCurrencyCode	string	Indicates the corporate currency code.
CreatedBy	string	Indicates the user who created the contact for the case.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the creation of the contact for the case.
CurcyConvRateType	string	The corporate currency conversion rate type.
CurrencyCode	string	The currency code.
DeleteFlag	boolean	Indicates if the record can be deleted by the current user.

Name	Type	Description
EmailAddress	string	Indicates the email address of the party associated with the contact.
FormattedPhoneNumber	string	Indicates the formatted phone number of the party associated with the contact.
JobTitle	string	Indicates the job title of the party associated with the contact.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the contact for the case was last updated.
LastUpdateLogin	string	Indicates the login session of the user who last updated the contact for the case.
LastUpdatedBy	string	Indicates the user who last updated the contact for the case.
PartyId	long	Indicates the party id of the contact.
PartyName	string	Indicates the party id of the contact.
PersonId	long	The unique identification of a person that's an employee on a case.
PrimaryFlag	boolean	Indicates if the contact is the primary contact for the case.
RelationshipCd	string	Lookup code that indicates the relation of contact to the case.
RelationshipCdMeaning	string	Indicates the display value corresponding to the relationship lookup code for the case contact.
UpdateFlag	boolean	Indicates if the record can be updated by the current user.

Case Household

Contains many-to-many relationships of case and associated households.

QName: {http://xmlns.oracle.com/apps/crm/service/caseMgmt/caseMgmtService/}CaseHousehold

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Case*
Handled by	*Case Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CaseHouseholdId	long	Indicates the case household identifier. • Primary Key
CaseId	long	Indicates the case to which this household is associated.
CorpCurrencyCode	string	Indicates the corporate currency code.
CreatedBy	string	Indicates the user who created the household for the case.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the creation of the household for the case.
CurcyConvRateType	string	The corporate currency conversion rate type.
CurrencyCode	string	The currency code.
DeleteFlag	boolean	Indicates if the record can be deleted by the current user.
HouseholdName	string	Indicates the name of the household.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the household for the case was last updated.
LastUpdateLogin	string	Indicates the login session of the user who last updated the household for the case.

Name	Type	Description
LastUpdatedBy	string	Indicates the user who last updated the household for the case.
PartyId	long	Indicates the party id of the household.
PrimaryFlag	boolean	Indicates if the household is the primary household for the case.
UpdateFlag	boolean	Indicates if the record can be updated by the current user.

Case Message

Contains information about every communication update to the case.

QName: {http://xmlns.oracle.com/apps/crm/service/caseMgmt/caseMgmtService/}CaseMessage

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Case*
Handled by	*Case Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CaseId	long	Indicates the case to which this message is associated.
Content	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	Indicates content of the message that is not an attachment.
CorpCurrencyCode	string	Indicates the corporate currency code.

Name	Type	Description
CreatedBy	string	Indicates the user who created the message for the case.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the creation of the message for the case.
CurcyConvRateType	string	The corporate currency conversion rate type.
CurrencyCode	string	The currency code.
DeleteFlag	boolean	Indicates if the record can be deleted by the current user.
LastEditedDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the last edited date of the message for the case.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the message for the case was last updated.
LastUpdateLogin	string	Indicates the login session of the user who last updated the message for the case.
LastUpdatedBy	string	Indicates the user who last updated the message for the case.
MessageCreatedBy	string	Migration Who Column: set to the user who created the row.
MessageCreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Migration Who Column: set to the message creation date.
MessageId	long	Indicates the case message identifier. • Primary Key
MessageLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Migration Who Column: set to the date and time of the last update of the row.
MessageLastUpdateLogin	string	Migration Who Column: set to the session login associated to the user who last updated the row.
MessageLastUpdatedBy	string	Migration Who Column: set to the user who last updated the row.
MessageNumber	string	Indicates the reference number of the message ID.

Name	Type	Description
MessageTypeCd	string	Lookup code that indicates the type of message
MessageTypeCdMeaning	string	Indicates the display value corresponding to the message type lookup code for the case message.
OriginationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date on which the message was originated/posted.
ParentMessageId	long	Indicates the parent message for this record.
PostedByPartyId	long	Indicates the party id of user who posted the message.
PostedByPartyName	string	Indicates the party name of the user who posted the message.
RichTextFlag	boolean	Indicates whether the message content is in rich text format (Y or N).
SourceCd	string	Lookup code that indicates how the message was entered into the system.
SourceCdMeaning	string	Indicates the display value corresponding to the source lookup code for the case message.
StatusCd	string	Lookup code that indicates the status of the message, such as COMMITTED.
StatusCdMeaning	string	Indicates the display value corresponding to the status lookup code for the case message.
UpdateFlag	boolean	Indicates if the record can be updated by the current user.
VisibilityCd	string	Lookup code that indicates visibility of a message.
VisibilityCdMeaning	string	Indicates the display value corresponding to the visibility lookup code for the case message.

Case Opportunity

Indicates the one-to-many relationships between the case and associated opportunities.

QName: {http://xmlns.oracle.com/apps/crm/service/caseMgmt/caseMgmtService/}CaseOpportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Case*
Handled by	*Case Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CaseId	long	Indicates the case to which this case opportunity is associated.
CaseOpportunityId	long	Indicates the case opportunity identifier. • Primary Key
CreatedBy	string	Indicates the user who created the case opportunity for the case.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the creation of the case opportunity for the case.
DeleteFlag	boolean	Indicates if the record can be deleted by the current user.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the case opportunity for the case was last updated.
LastUpdateLogin	string	Indicates the login session of the user who last updated the case opportunity for the case.

Name	Type	Description
LastUpdatedBy	string	Indicates the user who last updated the case opportunity for the case.
ObjectVersionNumber	int	Indicates object version number.
OptyId	long	Indicates the opportunity associated with the case.
UpdateFlag	boolean	Indicates if the record can be updated by the current user.

Case Resource

Contains many-to-many relationships of case and associated resources.

QName: {http://xmlns.oracle.com/apps/crm/service/caseMgmt/caseMgmtService/}CaseResource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Case*
Handled by	*Case Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CaseId	long	Indicates the case to which this resource is associated.
CaseResourceId	long	Indicates the case resource identifier. • Primary Key
CorpCurrencyCode	string	Indicates the corporate currency code.

Name	Type	Description
CreatedBy	string	Indicates the user who created the resource for the case.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the creation of the resource for the case.
CurcyConvRateType	string	The corporate currency conversion rate type.
CurrencyCode	string	The currency code.
DeleteFlag	boolean	Indicates if the record can be deleted by the current user.
EmailAddress	string	Indicates the email address of the case resource.
FormattedPhoneNumber	string	Indicates the formatted phone number of the case resource.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the resource for the case was last updated.
LastUpdateLogin	string	Indicates the login session of the user who last updated the resource for the case.
LastUpdatedBy	string	Indicates the user who last updated the resource for the case.
OwnerFlag	boolean	Indicates if the resource is the owner of the case.
PartyId	long	Indicates the party id of the resource.
ResourceName	string	Indicates the name of the resource.
UpdateFlag	boolean	Indicates if the record can be updated by the current user.

Company and User Registration

Service to register a company and its users. Users can belong to partner or B2B companies, or could be B2C users in the future.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmSelfService/common/customer/publicModel/registration/}RegistrationService

Service WSDL URL: https://servername/crmService/RegistrationService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Organization Contact Additional Information*
Handles	*Partner Email*
Handles	*Work Class*
Handles	*Partner Members*
Handles	*Trading Community Original System Mapping Identifier Additional Information*
Handles	*Customer Contact Profile*
Handles	*Contact Interest*
Handles	*Customer Contact Responsibility*
Handles	*Education*
Handles	*Telex*
Handles	*Partner Focus Area*
Handles	*Financial Report*
Handles	*Source System Reference*
Handles	*Trading Community Address Additional Information*
Handles	*Contact Address*
Handles	*Partner Type*

Relationship Type	Object or Service
Handles	*Additional Account Name*
Handles	*Location Profile*
Handles	*Address*
Handles	*Location Locale*
Handles	*Web*
Handles	*Usage Assignment*
Handles	*Partner Generic List of Values*
Handles	*Trading Community Person Details*
Handles	*Additional Contact Name*
Handles	*Trading Community Location Profile Additional Information*
Handles	*Partner Certification*
Handles	*Trading Community Person Profile Additional Information*
Handles	*Trading Community Relationship Additional Information*
Handles	*Financial Number*
Handles	*Partner Phone*
Handles	*Partner*
Handles	*Partner Geography Served*
Handles	*Instant Messaging*
Handles	*Contact Language*
Handles	*Partner Dimension Member*
Handles	*Classification Assignment*

Relationship Type	Object or Service
Handles	*Partner Account Resource*
Handles	*Financial Profile*
Handles	*Location Details*
Handles	*Contact*
Handles	*Trading Community Organization Profile Additional Information*
Handles	*Account*
Handles	*Contact Preference*
Handles	*Electronic Data Interchange*
Handles	*Certification*
Handles	*Trading Community Organization Details*
Handles	*Credit Rating*
Handles	*Citizenship*
Handles	*Trading Community Address Purpose*
Handles	*Employment History*
Handles	*Partner Public Contact*
Handles	*Relationship*
Handles	*Expertise*
Handles	*Industry Served*
Handles	*Phone*
Handles	*Email Domain*
Handles	*Additional Identifier*

Relationship Type	Object or Service
Handles	*Trading Community Contact Point Additional Information*
Handles	*Email*
Handles	*Preference*
Handles	*Electronic File Transfer*

Operations

- *isUserNameAvailable*
- *createPartnerCompanyAndAdministrator*
- *createPartnerWithUserProvisioning*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

isUserNameAvailable

Checks the availability of a username. This operation takes username as a parameter and returns a boolean value indicating whether the username is duplicate.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
userName	string	The username that needs to be validated for existence in the enterprise.

Response Payload

Element Name	Type	Description
result	string	If the return value is true, then the username already exists in the enterprise.

createPartnerCompanyAndAdministrator

Creates partner company and admin records. This operation takes organization party, person party, location and partner profile objects as parameters and returns the party id of newly created partner company.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
organizationParty	*Trading Community Organization Details*	Organization SDO containing organization details of the registering partner company.
personParty	*Trading Community Person Details*	Person SDO containing administrator details who is registering the partner company.
location	*Location Details*	Location SDO containing address of the registering partner company.
partnerProfile	*Partner*	Partner SDO containing partner specific information of the registering partner company.
userLanguage	string	The string containing language information for the method createPartnerCompanyAndAdministrator.

Response Payload

Element Name	Type	Description
result	long	The Organization PARTY_ID created for the registering partner company is returned.

createPartnerWithUserProvisioning

Creates partner company and admin records along with user provisioning. This operation takes organization party, person party, location and partner profile objects as parameters and returns the party id of newly created partner company.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
organizationParty	*Trading Community Organization Details*	Organization SDO containing organization details of the registering partner company.
personParty	*Trading Community Person Details*	Person SDO containing administrator details who is registering the partner company.

Element Name	Type	Description
location	*Location Details*	Location SDO containing address of the registering partner company.
partnerProfile	*Partner*	Partner SDO containing partner specific information of the registering partner company.
userLanguage	string	The string containing language information for the method createPartnerWithUserProvisioning.

Response Payload

Element Name	Type	Description
result	long	The Organization PARTY_ID created for the registering partner company is returned.

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service displays an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated. The parameter is present in ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
isUserNameAvailable	CRM_ANONYMOUS_SELFREGISTER_PRIV_PRIV	Create Self Service Partner Registration	Allows access to register Partner Company and also request for username
isUserNameAvailable	ZPM_CREATE_PARTNER_USER_PRIV	Create Partner User	Allows provisioning of partner members to sign into the vendor partner network.

Operation Name	Privilege Code	Privilege Name	Privilege Description
createPartnerCompanyAndAdminis	CRM_ANONYMOUS_ SELFREGISTER_PRIV_PRIV	Create Self Service Partner Registration	Allows access to register Partner Company and also request for username
createPartnerCompanyAndAdminis	ZPM_CREATE_PARTNER_USER_ PRIV	Create Partner User	Allows provisioning of partner members to sign into the vendor partner network.
createPartnerWithUserProvisioning	CRM_ANONYMOUS_ SELFREGISTER_PRIV_PRIV	Create Self Service Partner Registration	Allows access to register Partner Company and also request for username
createPartnerWithUserProvisioning	ZPM_CREATE_PARTNER_USER_ PRIV	Create Partner User	Allows provisioning of partner members to sign into the vendor partner network.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZPM_CREATE_PARTNER_USER_ PRIV	ORA_ZPM_PARTNER_ACCOUNT_ MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ZPM_CREATE_PARTNER_USER_ PRIV	ORA_ZPM_PARTNER_ACCOUNT_ ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ZPM_CREATE_PARTNER_USER_ PRIV	ORA_ZPM_PARTNER_ MANAGMENT_AS_PARTNER_ DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
CRM_ANONYMOUS_ SELFREGISTER_PRIV_PRIV	ORA_FND_ANONYMOUS_USER_ ABSTRACT	Anonymous User	Maps to OPSS system Anonymous Role

Account

An organization account and its profile information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Organization Profile Additional Information*
Contained by	*Sales Account*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Alias	string	The organization alias name.
AnalysisFy	string	The fiscal year that the financial information is based on.
BankCode	string	Identifies the bank in several countries, typically for regulatory purposes.
BankOrBranchNumber	string	Stores bank number for banks and branch number for bank branches. Primarily stores ABA number for US bank branches.

Name	Type	Description
BranchCode	string	Identifies the bank branch in several countries, typically for regulatory purposes.
BranchFlag	boolean	Indicates if this is a branch location. If the value is True, then this is a branch location.
BusinessReport	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	Dun and Bradstreet business information report.
BusinessScope	string	The physical class of business in which a business participates. For example, local, national, or international.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CeoTitle	string	The formal title of the chief executive officer.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Comments	string	The comments for the record.
CongDistCode	string	The U.S. Congressional district code for the account.
ContentSourceNumber	string	The content source number is not used.
ControlYr	decimal	The year when current ownership gained control of the organization.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CorporationClass	string	The taxation classification for corporation entities such as Chapter S in the US.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CurrentFiscalYearPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its current fiscal year.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DataCloudStatus	string	Specifies the enrichment status of the person.
DbRating	string	The Dun & Bradstreet credit rating.
Disadv8aInd	string	Indicates whether the organization is considered disadvantaged by the US government under Title 8A. If the value is Yes, the organization is considered disadvantaged under Title 8A. The default value is No.
DisplayedDUNSPartyIdentifier	long	Dun and Bradstreet does not maintain data for the branch offices of companies that are located beyond North America. Data is only maintained for the company headquarters. If the data pertains only to company headquarters, the headquarters PARTY_ID is stored. If the data pertains to a branch office, the branch PARTY_ID is stored.
DoNotConfuseWith	string	Indicates existence of similarly named businesses.
DomesticUltimateDUNSNumberC	string	DUNS Number for the Domestic Ultimate, which is the highest family member in the same country as the business entity. A subject can be its own Domestic Ultimate.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	The effective latest change is not used.

Name	Type	Description
EffectiveSequence	int	The effective sequence is not used.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EmployeesAtPrimaryAddress	string	The number of employees at the referenced address.
EmployeesAtPrimaryAddressEstimation	string	Indicates the calculation of employees at the primary address as estimated.
EmployeesAtPrimaryAddressMinimum	string	Indicates the calculation of employees at the primary address as minimum.
EmployeesAtPrimaryAddressText	string	The number of employees at the referenced address that cannot be mapped to a number.
EmployeesTotal	decimal	The total number of employees.
EnquiryDUNS	string	The identifier used to query the Dun and Bradstreet data. If a location is a branch, then in some countries the headquarters DUNS number is used to do the query. Otherwise it is the same as the DUNS number.
ExportInd	string	Indicates whether the organization is an exporter. If the value is Y, then the organization is an exporter. The default value is N.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
GlobalUltimateDUNSNumberC	string	DUNS Number for the Global Ultimate, which is the highest family member in the same country as the business entity as you proceed further on this branch of the tree. A case can be its own ultimate.
GrowthStrategyDescription	string	The description of the growth strategy.

Name	Type	Description
HQBranchIndicator	string	The status of this site, such as HQ, a branch, or a single location. A list of accepted values are defined in the lookup type HQ_BRANCH_IND.
HomeCountry	string	The home country associated with the party.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
ImportInd	string	Indicates whether the organization is an importer. If the value is Y, then the organization is an importer. The default value is N.
IncorpYear	int	The year that the business was formally incorporated.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LaborSurplusInd	string	Indicates whether the organization operates in an area with a labor surplus. If the value is Y, then the organization operates in an area with a labor surplus. The default value is N.
LastEnrichmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was last enriched in DaaS.
LastSourceUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated by the source system.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdateSourceSystem	string	The source system that last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
LegalStatus	string	The legal structure of the organization such as partnership, corporation, and so on.
LineOfBusiness	string	The type of business activities performed at this site.
LocalActivityCode	string	The local activity classification code.
LocalActivityCodeType	string	The local activity classification code type identifier.
LocalBusIdenType	string	The most common business identifiers in a country such as Chamber of Commerce Number in Italy, Government Registration Number in Taiwan. A list of accepted values are defined in the lookup type LOCAL_BUS_IDEN_TYPE.
LocalBusIdentifier	string	The primary identifier assigned to a businesses by a government agency such as Chamber of Commerce, or other authority. It is often used by countries other than USA.
MinorityOwnedInd	string	Indicates whether the organization is primarily owned by ethnic or racial minorities. If the value is Y, then the organization is owned by ethnic or racial minorities. The default value is N.
MinorityOwnedType	string	The type of minority-owned firm.
MissionStatement	string	The corporate charter of organization in user-defined text format.
NextFyPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its next fiscal year.
OobInd	string	Indicates whether the organization is out of business. If the value is Y, then the organization is out of business. The default value is N.
OrgInformation	*Trading Community Organization Profile Additional Information*	The information of the organization.
OrganizationName	string	The name of the party when the party type is Organization.
OrganizationProfileId	long	The unique identifier of the organization profile.

Name	Type	Description
		• Primary Key
OrganizationSize	string	Size of an organization based on revenue, number of employees, and so on.
OrganizationType	string	Not used in Fusion V1.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
ParentDUNSNumberC	string	Parent is a corporation that owns more than 50 percent capital stock of another corporation. The parent company can also be a subsidiary of another corporation. If the parent also has branches, then it is headquarters and also parent company. Headquarters is a business establishment that has branches or divisions reporting to it, and is financially responsible for those branches or divisions. If the headquarters has more than 50 percent of capital stock owned by another corporation, then it is also a subsidiary. If it owns more than 50 percent of capital stock of another corporation, then it is also a parent.
ParentSubInd	string	Indicates whether the organization is a parent or subsidiary.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PreferredContactEmailAddress	string	The e-mail address of the primary contact person of the organization.
PreferredContactFormattedPhoneNumber	string	The formatted phone number of the primary contact person of the organization.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.

Name	Type	Description
PreferredContactName	string	The name of the primary contact person of the organization.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the identifying address.
PrimaryAddressCountry	string	The country listed in the TERRITORY_CODE column of the FND_TERRITORY table for the identifying address.
PrimaryAddressCounty	string	The county of the Identifying address.
PrimaryAddressLine1	string	The first line of the identifying address.
PrimaryAddressLine2	string	The second line of the Identifying address.
PrimaryAddressLine3	string	The third line of the Identifying address.
PrimaryAddressLine4	string	The fourth line of the Identifying address.
PrimaryAddressPostalCode	string	The postal code of the identifying address.
PrimaryAddressProvince	string	The province of the identifying address.
PrimaryAddressState	string	The state of the Identifying address.
PrimaryEmailAddress	string	The e-mail address of the organization.

Name	Type	Description
PrimaryEmailId	long	The primary e-mail contact point ID of the organization.
PrimaryFormattedPhoneNumber	string	The primary telephone number formatted in the local format of the organization.
PrimaryLanguage	string	The standard name for a language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The primary contact point phone ID of the organization.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	The primary uniform resource locator.
PrimaryWebId	long	The unique identifier of the primary uniform resource locator.
PrincipalName	string	The Name of the highest ranking person in the company.
PrincipalTitle	string	The title of the highest ranking person in the organization.
Pronunciation	string	The pronunciation of the organization.
PublicPrivateOwnershipFlag	boolean	Indicator to specify if the organization is privately owned. Y stands for a privately owned organization and N stands for a publicly owned organization.

Name	Type	Description
RegistrationType	string	Indicates the registration type of the organization.
RentOwnInd	string	Indicates if this account owns or rents the place of business. A list of valid values for rent, own, and lease are defined in the lookup OWN_RENT_IND.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The standard industry classification (SIC) code.
SICCodeType	string	The version of the standard industry classification (SIC) code.
SeblUserKeyLoc	string	The location of the account, optional part of the user primary key.
SmallBusInd	string	Indicates whether the organization is considered as a small business. If the value is Y, then the organization is considered as a small business. The default value is N.
Status	string	The status of the record.
StockSymbol	string	The corporate stock symbol such as ORCL.
SuffixOverriddenFlag	boolean	Indicator to specify that the attribute has Y if the suffix is overridden by user and N otherwise. Default value is N.
ThirdPartyFlag	boolean	Indicator that tracks if a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. Y stands for a third party relationship, N stands for a direct relationship. If Oracle Service is installed, the third party field in the Customers window is required.
TotalEmployeesEstimatedIndicator	string	Indicates if the employee total is estimated. The accepted values are defined in the lookup type TOTAL_EMP_EST_IND.
TotalEmployeesInd	string	Indicates if subsidiaries are included in the calculation of total employees. The accepted values are defined in the lookup type TOTAL_EMPLOYEES_INDICATOR.

Name	Type	Description
TotalEmployeesMinimumIndicator	string	Indicates if the number is a minimum, maximum, or average number of total employees. The accepted values are defined in the lookup type TOTAL_EMP_MIN_IND.
TotalEmployeesText	string	The total number of employees in text format.
TotalPaymentAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total number of payment experiences.
TradingPartnerIdentifier	string	One column to store the FSIO related trading partner codes. It stores alpha numeric values and also addresses the Fed vs. Non-Fed attribute requirement.
UniqueNameAlias	string	The name as identified by the users to internally recognize the organization.
UniqueNameSuffix	string	Identifies system generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
WomanOwnedInd	string	Indicates whether the organization is primarily owned by women. If the value is Y, then the organization is primarily owned by women. The default value is N.
YearEstablished	int	The year when the organization began doing business.

Additional Account Name

An additional name of an organization, such as a legal name or a DBA name.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}AdditionalOrganizationName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*

Relationship Type	Object or Service
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OrigSystem	string	The source system name.

Name	Type	Description
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Indicator to specify the preferred additional name for the organization.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameId	long	The unique identifier of the party name. It is primary Key and system generated. • Primary Key
PartyNameType	string	The type of the name. It is a value defined by the additional party name and identifier type entity. The party type must be consistent with the party type that the PARTY_NAME_TYPE can be applied to.
PreferredFlag	boolean	Indicator to specify the name as preferred name for this party within the name type. Possible values are Y and N. Default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TransliterationLang	string	Used to identify the language for the name. It is validated against FND_LANGUAGES.LANGUAGE_CODE. Default value is the Session Language.

Additional Contact Name

An additional name of a person, such as the maiden name or alias.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}AdditionalPersonName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Indicator to specify the preferred additional name of a person.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameId	long	The unique identifier of the party name ID. It is primary key and system generated. • Primary Key
PartyNameType	string	The type of the name. It is a value defined by the additional party name and identifier type entity. The party type must be consistent with the party type that the PARTY_NAME_TYPE can be applied to.
PersonAcademicTitle	string	Used to specify the academic title for a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field degree in HL7.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	Used to specify the last name prefix such as fon, van, and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_PREFIX in HZ_PERSON_PROFILES is used. It corresponds to the field Last Name Prefix in HL7.

Name	Type	Description
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	Used to specify the name suffix such as junior, senior, the third, and so on for a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Suffix in HL7.
PersonPreNameAdjunct	string	Used to specify the name prefix such as Mr., Ms, Dr, and so on for a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Prefix in HL7. It is validated against lookup CONTACT_TITLE.
PersonPreviousLastName	string	Used to specify the previous last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It has no mapping in HL7.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PreferredFlag	boolean	Indicator to specify the name as preferred name for the party within the name type. Possible values are Y and N. Default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TransliterationLang	string	Used to specify the language used for the name. It is validated against FND_LANGUAGES.LANGUAGE_CODE. Default value is the Session Language.

Additional Identifier

An additional identifier of a trading community member, such as driver's license number or passport number.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}AdditionalPartyId

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
ExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expiration date for the identifier. It may be NULL, and does not apply to all types of identifiers.
IssueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date in which the Identifier was issued. It may be NULL and does not apply to all types of identifiers.
IssuingAuthorityName	string	The issuing authority name.
IssuingAuthorityPartyId	long	The unique identifier of the issuing authority.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyIdentifierId	long	The unique identifier of the party identifier. • Primary Key
PartyIdentifierType	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.

Name	Type	Description
PartyIdentifierType1	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.
PartyIdentifierValue	string	The value of the party identifier.
PartyName	string	The name of the party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StateProvince	string	The province of the address.
StatusCode	string	The pre-defined code used to indicate the status.

Address

An address of a trading community member, such as Oracle Corporation is located at 500 Oracle Parkway, Redwood Shores, CA.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Telex*
Contains	*Source System Reference*

Relationship Type	Object or Service
Contains	*Contact Preference*
Contains	*Trading Community Address Additional Information*
Contains	*Email*
Contains	*Electronic File Transfer*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AddressExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the location is no longer valid.
AddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines that are used in Japan.
AddressStyle	string	Style of the address.
Addressee	string	The information of the addressee.
City	string	The name of the city.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
ContactPreferenceExistFlag	boolean	Indicator to specify if the contact is primary contact for the party.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	The name of the country.
Country1	string	The attribute country1 is not used.

Name	Type	Description
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
DoNotValidateFlag	boolean	Indicator to specify that a particular location is not eligible for address validation irrespective of the current validation.
Eft	*Electronic File Transfer*	The electronic file transfer information for the party.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedAddress	string	The formatted read-only address.
FormattedLocaleAddress	string	The formatted read-only local address.
FormattedMultilineAddress	string	The formatted multi line address of the party site.

Name	Type	Description
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
HouseType	string	Indicates the building type.
IdentifyingAddressFlag	boolean	Indicator to specify the identifying address for the party. Y stands for the indentifying site and N stands for sites that are not the indentifying site.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
Language	string	The operating language for the party site.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	The latitude of the party address.
LocationDirections	string	Directions to the location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
LocationLanguage	string	The operating language for the locations.
Longitude	decimal	The longitude of the party address.
Mailstop	string	A user-defined code to indicate a mail drop point within the organization.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction

Name	Type	Description
		to detect whether another session has updated the row since it was last queried.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary address of the contact irrespective of the context. Y stands for primary address and N stands for all others.
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	Stores the doing-business_as (DBA) party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameDivision	string	Stores the division party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameLegal	string	Stores the legal party name for a party site. This column is used to store FSIO related legal party name attribute.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteInformation	*Trading Community Address Additional Information*	The party address information.
PartySiteName	string	The user-defined name for the site.
PartySiteNumber	string	The party site number of the address.
PartySiteType	string	Stores the party site type and is based on the lookup. Currently this is either null or one-time.
PartySiteUse	*Trading Community Address Purpose*	The information of the party address usage.
PartyUsageCode	string	The usage context of a party's contact point.

Name	Type	Description
Phone	*Phone*	The phone information for the entity.
Position	string	The primary direction such as north or east that is used to access the location.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four digit extension to the United States postal ZIP code.
Province	string	The name of the province.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The Telex information associated with the party.
UsageCode	string	The usage code is not used.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	The standardized status code describing the results of the validation.
Web	*Web*	The web information related to the record.

Certification

The certification information of a trading community member, such as a full ISO 9001 registered firm.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}Certification

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CertificationId	long	The unique identifier for certification. • Primary Key
CertificationName	string	The name of the certification such as ISO9000 and GMP001.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrentStatus	string	The name for the status of the certification. For example, applied for, granted, or expired.
ExpiresOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification expires.
Grade	string	The level or grade of certification provided by the ISSUED_BY_AUTHORITY. For example, founding member, gold, fully certified, and partially certified.
IssuedByAuthority	string	The name of the certifying authority.
IssuedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification was issued.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Citizenship

The citizenship information about a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Citizenship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BirthOrSelected	string	Indicates if the citizenship was granted by being born in the country or by naturalization.
CitizenshipId	long	The unique citizenship identifier of a person. • Primary Key
CountryCode	string	The ISO code of the country from which a person claims citizenship.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
DateDisowned	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when an individual renounced citizenship. This is usually a self-declared date that might not match a legal effective date.
DateRecognized	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the country granted citizenship to the individual. For a native-born person, this date is typically the person's date of birth.
DocumentReference	string	The unique reference number such as passport number or naturalization reference number associated with DOCUMENT_TYPE.
DocumentType	string	The class of document that confirms citizenship. For example, a passport, or naturalization papers.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Classification Assignment

The classification code assigned to a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CodeAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Sales Competitor*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Reference*
Handled by	*Sales Reference Customer*
Handled by	*Company and User Registration*
Handled by	*Sales Party*
Handled by	*Sales Competitor Service*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party Territory service*
Handled by	*Sales Party Resource Service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassCategory	string	The name of the classification category.
ClassCode	string	The code of the classification.
CodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an object. It is primary key and system generated. • Primary Key
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableKey1	string	The first column of the alphanumeric or multi-part foreign key.

Name	Type	Description
OwnerTableKey2	string	The second column of the alphanumeric or multi-part foreign key.
OwnerTableKey3	string	The third column of the alphanumeric or multi-part foreign key.
OwnerTableKey4	string	The fourth column of the alphanumeric or multi-part foreign key.
OwnerTableKey5	string	The fifth column of the alphanumeric or multi-part foreign key.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PrimaryFlag	boolean	Indicator that specifies if this is the primary class code of a class category for the organization. Y stands for the primary class code and N stands for all others.
Rank	decimal	Ranks classes if multiple classes are assigned to a party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Contact

The profile information of the trading community person. The profile includes information such as marital status and additional name.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Person Profile Additional Information*
Contained by	*Trading Community Person Details*
Contained by	*Sales Account*
Contained by	*Loyalty Member*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Loyalty Member Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Alias	string	Person alias name.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DataCloudStatus	string	The enrichment status of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
DateOfDeath	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person died.
DeceasedFlag	boolean	Y or N indicates whether the person is deceased or not.
DeclaredEthnicity	string	The declared ethnicity of the person.
Department	string	The free form text used to name the department.
DepartmentCode	string	The list of values for possible department codes.
Distance	decimal	The distance from the input location.
DoNotCallFlag	boolean	Indicator to specify if the user can send mail to the person or not.
DoNotContactFlag	boolean	Indicator to specify if the user can contact the person through phone, e-mail, or mail or not.
DoNotEmailFlag	boolean	Indicator to specify if the user can send e-mail to the person or not.

Name	Type	Description
DoNotMailFlag	boolean	Indicator to specify if the user can send mail to the person or not.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	The date effective entity. Y indicates that this row represents the latest change in the day.
EffectiveSequence	int	The date effective entity. Indicates the order of different changes made during a day. The lowest value represents the earliest change in the day.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
FavoriteContactFlag	boolean	Indicator to specify if the person is key contact.
Gender	string	The gender details such as male, female, or unknown of the person.
HeadOfHouseholdFlag	boolean	The head of household indicator is not used.
HouseholdIncomeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The household income amount is not used.
HouseholdSize	decimal	The household size is not used.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
JobTitle	string	The free form text for the job title.
JobTitleCode	string	The code given to the job title.
LastContactDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the contact was last contacted.
LastEnrichmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was last enriched in DaaS.

Name	Type	Description
LastKnownGPS	string	The geophysical location that is, GPS point last reported for the person.
LastSourceUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated by the source application.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdateSourceSystem	string	The source application that last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person.
MaritalStatusEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marital status of the person changed.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PersonAcademicTitle	string	The academic title that is part of the name of a person such as Dr. Jane Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonInformation	*Trading Community Person Profile Additional Information*	The information of the person.

Name	Type	Description
PersonInitials	string	The Initials of the name.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	Used to identify the Last name prefix such as fon, van and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_PREFIX in HZ_PERSON_PROFILES is used. Corresponds to the field, Last Name Prefix in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonName	string	The combination of title, first, middle, last, and suffix names.
PersonNameSuffix	string	Indicates the place in a family structure. For example, III in Tom Jones III.
PersonPreNameAdjunct	string	Salutary introduction such as Mr., Herr, and so on.
PersonPreviousLastName	string	The previous last or surname of the person.
PersonProfileId	long	The unique identifier of the person profile. • Primary Key
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PersonalIncomeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated gross annual income of the person.
PlaceOfBirth	string	The place where the person was born, including city and country.

Name	Type	Description
PreferredContactEmail	string	The preferred contact e-mail of the person.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactName	string	The preferred contact name of the person.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredContactPhone	string	The preferred contact phone of the person.
PreferredContactURL	string	The preferred contact uniform resource locator of the person.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the identifying address.
PrimaryAddressCountry	string	The country listed in the TERRITORY_CODE column of the FND_TERRITORY table for the identifying address.
PrimaryAddressCounty	string	The county of the identifying address.
PrimaryAddressLatitude	decimal	The primary address latitude information for the location for spatial proximity and containment purposes.
PrimaryAddressLine1	string	The first line of the identifying address.
PrimaryAddressLine2	string	The second line of the identifying address.

Name	Type	Description
PrimaryAddressLine3	string	The third line of the identifying address.
PrimaryAddressLine4	string	The fourth line of the identifying address.
PrimaryAddressLocationId	long	The primary address location ID.
PrimaryAddressLongitude	decimal	The primary address longitude information for the location for spatial proximity and containment purposes.
PrimaryAddressPostalCode	string	The postal code of the identifying address.
PrimaryAddressProvince	string	The province of the identifying address.
PrimaryAddressState	string	The state of the identifying address.
PrimaryCustomerId	long	The customer party identifier of a primary customer for a given person. There should be a valid relationship between the person and the customer.
PrimaryCustomerName	string	The customer party name of a primary customer for a given person. There should be a valid relationship between the person and the customer.
PrimaryCustomerRelationshipId	long	The unique identifier of the primary customer relationship.
PrimaryEmailAddress	string	The e-mail address of the person.
PrimaryEmailId	long	The primary contact point e-mail ID of the person.
PrimaryFormattedAddress	string	The primary formatted address of the person.
PrimaryFormattedPhoneNumber	string	The primary telephone number formatted in the local format of the person.
PrimaryLanguage	string	The standard name for a language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.

Name	Type	Description
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The primary contact point phone ID of the person.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	The uniform resource locator.
PrimaryWebId	long	The unique identifier of the primary uniform resource locator.
Pronunciation	string	The person pronunciation.
RentOwnInd	string	Indicates if the person rents or owns his or her residence. Lookup values include rent, own, lease, and so on.
RequestId	long	A system-generated read-only attribute used by the application framework.
SalesAffinityCode	string	The affinity of a person towards the deploying organization.
SalesBuyingRoleCode	string	The role of a person in the buying process.
Salutation	string	The phrase used to address a party in any correspondence.
Status	string	The status of the record.
SuffixOverriddenFlag	boolean	This attribute has Y if the suffix is overridden by user and N if not. Default value is N.
UniqueNameSuffix	string	Identifies system generated or manually overridden suffix.

Name	Type	Description
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.

Contact Address

The address of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PersonPartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Contact Preference*
Contains	*Source System Reference*
Contains	*Trading Community Address Additional Information*
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Addressee	string	The information of the addressee in the contact address.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
IdentifyingAddressFlag	boolean	Indicates whether this is the identifying address for the party. If the value is Y, then this is the identifying address for the party.
Language	string	The language used in the contact's location.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.

Name	Type	Description
Mailstop	string	A user-defined code to indicate a mail drop point within their organization.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary address of the associated object. If the value is True, then this is the primary address. The default value is False.
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	The doing-business_as (DBA) party name for a party site.
PartyNameDivision	string	The division of the party name for a party site.
PartyNameLegal	string	The legal party name for a party site.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteName	string	The address associated with the party site.
PartySiteNumber	string	The alternate identifier of the party site.
PartySiteType	string	The type of the party site.
PartySiteUse	*Trading Community Address Purpose*	Indicates the use of the party site.
PartyUsageCode	string	The usage context of a party's contact point.
PersonPartySiteInformation	*Trading Community Address Additional Information*	The party site information of the person.

Name	Type	Description
Phone	*Phone*	The phone information for the entity.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Contact Interest

The interests of the trading community member, such as baseball, sports car, or painting.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonInterest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
InterestName	string	A text field that lets you assign a descriptive name to an interest. For example, pets, dogs, baseball, or sports car racing.
InterestTypeCode	string	A code to classify interests for evaluation.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LevelOfInterest	string	The user-defined level number or name to rate the amount of interest in the activity. For example, high, medium, or low.
LevelOfParticipation	string	The user-defined level number or name to indicate if the person participates and to what extent.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PersonInterestId	long	The unique identifier of interests of the person. • Primary Key

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
Since	{http://xmlns.oracle.com/adf/svc/types/}date-Date	An approximate date from which the person was involved with the activity.
SportIndicator	string	Indicates if the activity is a sport. Y stands for sports and N stands for non-sport activities.
Status	string	The status of the record.
SubInterestTypeCode	string	A code to classify subinterests of the interest type code.
Team	string	Any team the person likes to watch or play for.

Contact Language

The languages known information of a trading community member. For example, Mary Smith can speak both Spanish and English but can only read and write English.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PersonLanguage

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Handled by	*Trading Community Group*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*

Relationship Type	Object or Service
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LanguageName	string	The standard name for a language. For example, Spanish, Mandarin, or American English. Foreign key to the FND_LANGUAGES table.
LanguageUseReferenceId	long	The unique identifier of the language use reference. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
NativeLanguageFlag	boolean	Indicator to specify if the language is the declared native language of a person. Y stands for a declared native language and N stands for all other languages.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
PartyId	long	The unique identifier of the contact party.
PrimaryLanguageIndicator	string	Indicates if this is the primary language used by a person in day-to-day transactions. Y stands for the primary language and N stands for other languages.
ReadsLevel	string	The user-defined level number or name to indicate the ability to read a language.
RequestId	long	A system-generated read-only attribute used by the application framework.
SpeaksLevel	string	The user-defined level number or name to indicate the ability to speak a language.
SpokenComprehensionLevel	string	The code to indicate comprehension of a spoken language.
Status	string	The status of the record.
WritesLevel	string	The user-defined level number or name to indicate the ability to write in a language.

Contact Preference

The contact preference of the trading community member. For example, do not call Joe Smith between 10 a.m. and 12 noon on weekdays.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}ContactPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Electronic Data Interchange*

Relationship Type	Object or Service
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Household*
Contained by	*Phone*
Contained by	*Telex*
Contained by	*Web*
Contained by	*Contact Address*
Contained by	*Electronic File Transfer*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactLevelTable	string	The table that stores the contact level of the contact preference, and uses the SUBJECT_TABLE lookup. The list of accepted values are HZ_PARTIES, HZ_PARTIES_SITES, or HZ_CONTACT_POINTS.
ContactLevelTableId	long	The foreign key to the table specified in CONTACT_LEVEL_TABLE column. The list of accepted values are PARTY_ID from HZ_PARTIES table, CONTACT_POINT_ID from HZ_CONTACT_POINTS table, or PARTY_SITE_ID from HZ_PARTY_SITES table.
ContactPreferenceId	long	The unique identifier for the contact preference. • Primary Key
ContactType	string	The contact party type that defines whether the contact is a sales account, a prospect, a contact, or any other user-defined party type. The default value is CUSTOMER. A list of accepted values is defined in the lookup CONTACT_TYPE.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
MaximumNoOfInteractUOMCode	string	The period of time during which the maximum number of interactions applies. Uses the MAX_NO_OF_INTERACT_UOM_CODE lookup.
MaximumNoOfInteractions	decimal	The number of times you can use this contact point. The period of time that this number applies is stored in the MAX_NO_OF_INTERACT_UOM_CODE column.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PreferenceCode	string	Indicates whether to use a particular contact method. The list of accepted values are defined in the PREFERENCE_CODE lookup.
PreferenceEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes inactive.
PreferenceEndTimeHR	int	The hour part of time when the contact preference becomes inactive. The time is recorded in the 24 hour format.
PreferenceEndTimeMi	int	The minutes part of the time when the contact preference becomes inactive.
PreferenceStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes active.
PreferenceStartTimeHR	int	The hour part of time when the contact preference becomes active. The time is recorded in the 24 hour format.
PreferenceStartTimeMi	int	The minutes part of the time when the contact preference becomes active.
PreferenceTopicType	string	The appropriate subjects to send the party that the preference is created for. The list of accepted values are defined in the PREFERENCE_TOPIC_TYPE lookup.
PreferenceTopicTypeCode	string	The code of the preference topic type.

Name	Type	Description
PreferenceTopicTypeId	long	The unique identifier of the preference topic type.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
RequestedBy	string	Indicates if the permission or restriction was created internally or requested by the party. The list of accepted values are defined in the REQUESTED_BY lookup.
Status	string	The status of the record.

Credit Rating

The trading community member's credit rating information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CreditRating

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AverageHighCredit	decimal	The average of all the high credit experiences.
BankruptcyInd	string	Indicates if open bankruptcy exists. Y stands for any open bankruptcy that exists and N stands for no open bankruptcy.
BusinessDiscontinued	string	The business discontinued at the listed location. Prompts reader to contact D and B customer service center if any business is operating.
ClaimsInd	string	Indicates if open claims, legal claims, liens, protested bills, or any equivalent information exists. Y stands for availability of information and N stands for no information.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRatingId	long	The unique identifier of the credit rating. • Primary Key
CreditRiskScoreExplain	string	Explains numeric credit risk score that estimates the risk of delinquent payment over the next 12 months.

Name	Type	Description
CreditScore	string	Indicates the risk of delinquent payments.
CreditScoreAge	decimal	Indicates the age of the credit score expressed in months.
CreditScoreClass	decimal	The date when the credit score was calculated.
CreditScoreCommentary	string	The lookup for explanation codes in the CREDIT_SCORE column.
CreditScoreCommentary10	string	Indicates comments about the credit score.
CreditScoreCommentary2	string	Indicates comments about the credit score.
CreditScoreCommentary3	string	Indicates comments about the credit score.
CreditScoreCommentary4	string	Indicates comments about the credit score.
CreditScoreCommentary5	string	Indicates comments about the credit score.
CreditScoreCommentary6	string	Indicates comments about the credit score.
CreditScoreCommentary7	string	Indicates comments about the credit score.
CreditScoreCommentary8	string	Indicates comments about the credit score.
CreditScoreCommentary9	string	Indicates comments about the credit score.
CreditScoreDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the credit score was calculated.
CreditScoreIncdDefault	decimal	Indicates the probability expressed as a percentage of delinquency for a score range or class.
CreditScoreNatlPercentile	decimal	Indicates the relative credit rating of a business compared to all businesses whose credit ratings are included in the local country database.
CreditScoreOverrideCode	string	Indicates why no score was calculated or why score is equal to zero in the US.

Name	Type	Description
CriminalProceedingInd	string	Indicates if criminal proceedings exist. Y stands for availability of information and N stands for no information.
DebarmentInd	string	Indicates whether the company is debarred from doing business with government agencies. Y stands for company debarred and N stands for not debarred.
DebarmentsCount	decimal	The count of filings by government agencies in the United States that prohibit the party from entering into contracts or transactions with those agencies.
DebarmentsDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date of the most recent filing to prohibit the party from entering into contracts or transactions with a government agency in the United States.
DelqPmtPctgForAllFirms	decimal	Specifies a delinquency percentage for all firms.
DelqPmtRngPrcnt	decimal	Specifies a delinquency percentage for credit score range.
Description	string	The free text description of the record.
DetHistoryInd	string	The code that indicates if detrimental information exists for the party and whether complete details exist on management and party. Y stands for availability of information and N stands for no information.
DisasterInd	string	Indicates if information exists about disasters such as fires, hurricanes, and so on. Y stands for availability of information and N stands for no information.
FailureScore	string	For US, the failure risk class, 1 through 5. For Canada , the stability score that indicates risk of business closure, 1 through 10. For Australia, the percentile failure score.
FailureScoreAge	decimal	The failure score age in months.
FailureScoreClass	decimal	1 through 5 to indicate risk of financial stress for a customer account. 1 for a business with greatest risk and 5 for a business with least risk.
FailureScoreCommentary	string	The comments related to failure score.

Name	Type	Description
FailureScoreCommentary10	string	The comments related to failure score.
FailureScoreCommentary2	string	The comments related to failure score.
FailureScoreCommentary3	string	The comments related to failure score.
FailureScoreCommentary4	string	The comments related to failure score.
FailureScoreCommentary5	string	The comments related to failure score.
FailureScoreCommentary6	string	The comments related to failure score.
FailureScoreCommentary7	string	The comments related to failure score.
FailureScoreCommentary8	string	The comments related to failure score.
FailureScoreCommentary9	string	The comments related to failure score.
FailureScoreDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the failure score was calculated.
FailureScoreIncdDefault	decimal	Probability, in percentage, of failure for score range of class.
FailureScoreNatnlPercentile	decimal	The national percentile that reflects the relative ranking of a company among all scored companies in the local country database.
FailureScoreOverrideCode	string	In Europe, code for the reason for variance between the D and B rating and the failure score. In the US, code for the reason why no score was calculated, or why the score is zero.
FinclEmbtInd	string	Indicates if open bankruptcy, receivership liquidation, or any equivalent information exists. Y stands for availability of information and N stands for no information.
FinclLglEventInd	string	Indicates if special events such as financial embarrassment and legal filings exist. Y stands for availability of information and N stands for no information.
GlobalFailureScore	string	The global score for the risk of business default.

Name	Type	Description
HighCredit	decimal	Maximum credit ever extended to the organization.
HighRngDelqScr	decimal	Specifies the high end of the range of the commercial credit score.
JudgementInd	string	Indicates if open judgments exist. Y stands for any open judgment that exists and N stands for no open judgments.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LienInd	string	Indicates if open liens exist. Y stands for any open lien that exists and N stands for no open liens.
LowRngDelqScr	decimal	Specifies the low end of the range of the commercial credit score.
MaximumCreditCurrencyCode	string	The currency used to denominate the MAXIMUM_CREDIT_RECOMMENDATION column.
MaximumCreditRecommendationAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Maximum credit limit recommended for the currency specified in the MAXIMUM_CREDIT_CURRENCY_CODE column.
NegvPmtExpl	string	The conditional comment generated when negative payments are present.
NoTradeInd	string	Indicates that no trade experiences exist. Y stands for any trade experience that exists and N stands for no trade experience.
NumberParentBankruptcyConversions	decimal	The number of bankruptcy conversions by the parent.
NumberParentBankruptcyFiling	decimal	The number of bankruptcies filed by the parent.
NumberSpecialEvent	decimal	The number of occurrences of the special events.

Name	Type	Description
NumberTradeExperiences	decimal	The number of trade experiences.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OprgSpecificationEvntInd	string	Indicates if information exists about operational changes such as name changes, management changes, change of control, moves, and so on. Y stands for availability of information and N stands for no information.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OtherSpecificationEvntInd	string	Indicates if special events exist that are not otherwise specified.
ParentHQBankruptcyInd	string	Indicates if parent (P) or headquarters (H) are entered into bankruptcy.
PartyId	long	The unique identifier of the contact party.
PaydexComment	string	Additional paydex information.
PaydexFirmComment	string	Comment on the paydex score for the organization.
PaydexFirmDays	string	The number of days used in the paydex score.
PaydexIndustryComment	string	Comment on the paydex score for the industry.
PaydexIndustryDays	string	The number of days used in the paydex score for the industry.
PaydexNorm	string	Median or average Paydex score for the industry.
PaydexScore	string	Paydex score for the previous 12 months payment history.
PaydexThreeMonthsAgo	string	Paydex score three months ago.
PrntBkcyChapterConv	string	The change of bankruptcy type.

Name	Type	Description
PrntBkcyConvDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the bankruptcy converted from one type to another.
PrntBkcyFilgChapter	decimal	The chapter number of the bankruptcy filed by the parent under the US uniform commercial code.
PrntBkcyFilgDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The bankruptcy filing date of the parent.
PrntBkcyFilgType	string	The type of bankruptcy filed by the parent.
PubRecExpl	string	The conditional comment generated if suits, liens, and judgments exist.
RatedAsOfDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the rating was acquired.
Rating	string	The rating number or code of the rating company.
RatingOrganization	string	The name of the credit rating organization.
RequestId	long	A system-generated read-only attribute used by the application framework.
SecuredFlngInd	string	Indicates if open secured filings such as UCC filings, secured charges or mortgages pledging, or any equivalent information exists. Y stands for availability of information and N stands for no information.
SlowTradeExpl	string	The conditional comment generated when paydex score indicates that slow trade experiences are present.
SpecialEventComment	string	The comment generated if special event section exists.
SpecialEventText	string	The narrative of the special event.
SpecialEventUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the special event was updated.
Status	string	The status of the record.

Name	Type	Description
SuitInd	string	Indicates if open suits exist. Y stands for any open suit that exists and N stands for no open suits.

Customer Contact Profile

The person who functions as a contact for an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Organization Contact Additional Information*
Contains	*Customer Contact Responsibility*
Contains	*Source System Reference*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
ContactFormattedAddress	string	The formatted version of the contact address.
ContactFormattedMultilineAddress	string	The formatted multiline version of the contact address.
ContactName	string	The name of the contact.
ContactNumber	string	The user-defined identification number for this contact.
ContactPartyId	long	The unique identifier of the contact.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerEmailAddress	string	The e-mail address of the customer this contact person belongs to.
CustomerName	string	The name of the customer.

Name	Type	Description
CustomerPartyId	long	The unique identifier of the customer this contact person belongs to.
CustomerPartyNumber	string	The alternate unique identifier of the customer this contact person belongs to.
CustomerUniqueName	string	The unique name of the customer. For an Organization, the value is a concatenation of unique_name_alias and suffix. For a Person, the value is a concatenation of person_name and suffix.
DecisionMakerFlag	boolean	Indicates if this contact is a decision maker. If the value is True, then the contact is a decision maker.
Department	string	The free form text used to name the department for the contact.
DepartmentCode	string	The department code for the contact. A list of accepted values is defined in the lookup DEPARTMENT_TYPE.
EmailAddress	string	The email address associated with the record.
FormattedAddress	string	The formatted address information.
FormattedPhoneNumber	string	The formatted phone number.
JobTitle	string	The free form text for job title.
JobTitleCode	string	The code given to the job title.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OrgContactId	long	The unique identifier of the organization contact. • Primary Key
OrgContactInformation	*Trading Community Organization Contact Additional Information*	The information of the organization contact.
OrganizationContactRole	*Customer Contact Responsibility*	The role of the contact in the organization.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyRelationshipId	long	The unique identifier of the relationship of the party.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteName	string	The address associated with the party site.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonCertReasonCode	string	The reason for the organization's current certification level assignment. A list of accepted values is defined using the lookup HZ_PARTY_CERT_REASON.
PersonCertificationLevel	string	The certification level of a organization. A list of accepted values is defined in the lookup HZ_PARTY_CERT_LEVEL.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLanguageName	string	The language name associated with the person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.

Name	Type	Description
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.
PersonPreviousLastName	string	The previous last name of a person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.
Rank	string	The rank associated with this customer contact.
ReferenceUseFlag	boolean	Indicates if this contact can be used as a reference. If the value is Y, then the contact can be used as a reference.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
SalesAffinityCode	string	The affinity of a contact to the deploying organization. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_AFFINITY_CODE.
SalesAffinityComments	string	The comments about the contact's affinity to the deploying organization.
SalesBuyingRoleCode	string	The roles played by a contact in the buying process, for example, decision maker or supporting role. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_BUY_ROLE_CODE.
SalesInfluenceLevelCode	string	The influence of the contact has on the deploying organization. A list of accepted values are defined in the lookup HZ_SLS_CNTCT_INFLUENCE_LVL_CD.
Salutation	string	The size of the household this person is a part of.
WebUrl	string	The web URL of contact point.

Customer Contact Responsibility

The role or responsibility of an organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContactRole

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Customer Contact Profile*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The organization contact identifier. Foreign key to the HZ_ORG_CONTACTS table.

Name	Type	Description
OrgContactRoleId	long	The unique contact role identifier. It is primary key and system generated. • Primary Key
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PrimaryContactPerRoleType	string	Indicates if the contact is the primary contact for the role. Y stands for primary contact and N stands for a contact that is not the primary contact for the role type. The default value is N.
PrimaryFlag	boolean	Indicator that specifies if this is the primary role for the contact. Y stands for primary role and N stands for a non-primary role for the contact. The default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
RoleLevel	string	The role level of the contact. For example, executive, department head, or middle manager.
RoleType	string	The role performed by a contact.
Status	string	The status of the record.

Education

The trading community person's education information. For example, a person may have attended the University of California from 1995 to 1999 and received an undergraduate degree in Computer Science with a GPA of 4.0.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Education

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CourseMajor	string	The primary area of study.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DegreeReceived	string	The abbreviation for the degree. For example, BA, BSc, MBA, MSc, PhD, and Gd (graduate diploma).
EducationId	long	The unique identifier of the education record. • Primary Key
LastDateAttended	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The year and month when a person last attended the educational institution.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
SchoolAttendedName	string	The name of the school.
SchoolPartyId	long	The party identifier of the school.
StartDateAttended	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the attendance of a person starts.
Status	string	The status of the record.
TypeOfSchool	string	The classification of the educational organization. For example, high school, college, university, or professional school. Note that the classification of schools varies among different cultures.

Electronic Data Interchange

The electronic data interchange information associated with a trading community member. For example, the details of standard codes and payment methods that are to be used for data interchange.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Edi

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EDIEceTpLocationCode	string	The trading partner location code for EDI Gateway.

Name	Type	Description
EDIIdNumber	string	The EDI trading partner number for the supplier site.
EDIPaymentFormat	string	Indicates type of information being transmitted with the funds if using EDI_PAYMENT_ METHOD ACH. The list of accepted values are CCD, CCP, CHZ, CTX, PPD, and PPP.
EDIPaymentMethod	string	Indicates how a payment is to be made through EDI. The list of accepted values are ACH and BOP.
EDIRemittanceInstruction	string	Indicates who will send the remittance advice. The list of accepted values are Banks or Payables systems.
EDIRemittanceMethod	string	Indicates how remittance advice are sent to the supplier.
EDITpHeaderId	long	The unique identifier of the EDI transaction header.
EDITransactionHandling	string	The ANSI standard code for EDI transaction type.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/ types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary EDI of the associated object. If the value is True, then this is the primary EDI. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Electronic File Transfer

The electronic funds transfer information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Eft

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EFTPrintingProgramId	long	The printing program identifier.
EFTSWIFTCode	string	The EFT swift code information.
EFTTransmissionProgramId	long	The transmission program identifier.
EFTUserNumber	string	The number that identifies you as a user of electronic funds transfer service for your bank or clearing organization.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

E-Mail

The e-mail address associated with a trading community member. For example, john.doe@oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Email

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The preferred format for e-mail addressed to this address such as HTML or ASCII. A list of accepted values is defined using the lookup EMAIL_FORMAT.

Name	Type	Description
EmailInformation	*Trading Community Contact Point Additional Information*	The additional information about the e-mail.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary e-mail of the associated object. If the value is True, then this is the primary e-mail. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact

Name	Type	Description
		point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

E-Mail Domain

The domain of the e-mail address associated with a trading community member. For example, ABC Corporation has CORP and BUSINESS e-mail domains.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}EmailDomain

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DomainName	string	The actual or non-reversed domain name of the organization for display purpose.
EmailDomainId	long	The sequence generated unique identifier. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
PartyId	long	The unique identifier of the contact party.
Status	string	The status of the record.
TransposedDomain	string	The reversed domain name for the purposes of searching.

Employment History

The employment history information of a trading community member. For example, John Doe was a Vice President at Business World from 2001 to 2007 and President at World of Business from 2007 to 2009.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}EmploymentHistory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Work Class*
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the employment officially began.
Branch	string	The military branch code.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmployedAsTitle	string	Job position title assigned by an employer.
EmployedAsTitleCode	string	The code for the job title. If title cannot be represented by a code, then the EMPLOYED_AS_TITLE column must be used.
EmployedByDivisionName	string	The common name of a division or an organization at which the person was employed.
EmployedByNameCompany	string	The name of the organization at which the person was employed. Note that the name must not include the division name.
EmployedByPartyId	long	The party identifier of the employer for situations in which the employer is represented as a party.
EmploymentHistoryId	long	The unique employment history identifier. • Primary Key
EmploymentTypeCode	string	Indicates whether the employment is part-time or full-time.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FacultyPositionFlag	boolean	Indicator Y or N to specify whether the position is a faculty position or not.
FractionOfTenure	decimal	The fraction of tenure.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MilitaryRank	string	The rank of the person in the branch.
PartyId	long	The unique identifier of the contact party.
ReasonForLeaving	string	The free format text that describes the reason for leaving.
RequestId	long	A system-generated read-only attribute used by the application framework.
Responsibility	string	Job responsibility of the person.
Served	string	Indicates where the person performed military service.
Station	string	Indicates the station name.
Status	string	The status of the record.
SupervisorName	string	The full name of the manager of the person.
TenureCode	string	The type of tenure for faculty positions.
WeeklyWorkHours	decimal	The usual number of hours worked per week.
WorkClass	*Work Class*	The custom-defined classification information about job title and work experience of a person.

Expertise

The expertise of a partner.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerExpertise

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Partner Generic List of Values*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ExpertiseCode	string	The expertise code of the partner expertise.
ExpertiseName	string	The expertise name of the partner expertise.

Partner Generic List of Values

The generic list of multiple values used for certifications and expertise.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerProfileMultivalueLov

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Partner Certification*
Extended by	*Expertise*

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
LookupCode	string	The value from a multi-value list of values category that applies to the profile.
LookupType	string	The list of values code that defines the category to which the list of values belong. This value indicates the profile field to which the value belongs.
PartnerMultivalLovId	long	The unique identifier of the list of values code selected for a specific multi-value field in the partner profile. • Primary Key

Name	Type	Description
PartyId	long	The unique identifier of the contact party.

Financial Number

The financial report numbers of a trading community member, such as assets, liabilities, and cash balance.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}FinancialNumber

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Financial Report*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FinancialNumber	decimal	The value for the financial number. For example, the FINANCIAL_NUMBER_NAME column could have a numerical value of 3,000,000,000 for annual sales.
FinancialNumberCurrency	string	The ISO currency code for the financial number.
FinancialNumberId	long	The unique identifier of the financial number. • Primary Key
FinancialNumberName	string	A text field that lets you assign a descriptive name to a financial report item. For example, gross annual sales, profit, and net annual sales. A user-defined lookup.
FinancialReportId	long	The unique identifier of the financial report.
FinancialUnitsApplied	decimal	The order of magnitude (tens, hundreds, thousands, and so on) used for the FINANCIAL_NUMBER column.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ProjectedActualCode	string	Indicates if the projected amount is projected or actual. The list of accepted values are P and A. The default value is A.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Financial Profile

The financial details of a trading community member, such as bank account information that was obtained as part of a credit evaluation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}FinancialProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessAuthorityDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when access to the information in the account was granted.
AccessAuthorityGranted	string	Indicates whether access to information in a financial account was granted. If the value is True, then the access has been granted.
BalanceAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The reported balance on an account. The balance can be a positive number, negative number, or zero.
BalanceVerifiedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the account balance was verified.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FinancialAccountNumber	string	The alternate unique identifier of the financial account.
FinancialAccountType	string	The short name that classifies the financial accounts. For example, savings, checking, home loan, personal loan, trading, and so on.
FinancialOrgType	string	The classification of financial organizations. For example, bank, savings and loan, private lender, building society and so on.
FinancialOrganizationName	string	The name of the financial organization that holds the account.
FinancialProfileId	long	The unique identifier of the party's financial profile. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the

Name	Type	Description
		start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Financial Report

The financial report information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}FinancialReport

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Financial Number*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*

Relationship Type	Object or Service
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AuditInd	string	Indicates if the financial reports are audited. If the value is True, then the financial reports have been audited.
ConsolidatedInd	string	Indicates if the financial reports are consolidated. If the value is C, then the reports are consolidated.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateReportIssued	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the financial report was published.
DocumentReference	string	The unique reference number such as passport number or naturalization reference number associated with DOCUMENT_TYPE.
EstimatedInd	string	Indicates whether the financial reports provide estimated data. If the value is True, then the financial reports provide the data.
FinalInd	string	Indicates whether the financial reports are the final closing statements for a business that has ceased operations. If the value is True, then the reports are final closing statements.
FinancialNumber	*Financial Number*	The number that indicates a financial value like annual sales.
FinancialReportId	long	The unique identifier for a financial report. • Primary Key

Name	Type	Description
FiscalInd	string	Indicates whether the financial reports cover a fiscal twelve-month accounting period. If the value is Y, then the financial report covers a twelve-month fiscal period.
ForecastInd	string	Indicates whether the financial reports display forecasts or future projections. If the value is Y, then the financial report displays forecasts.
IssuedPeriod	string	The period covered by the financial report. For example, fiscal year 1999, 1998, and so on.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OpeningInd	string	Indicates whether the financial reports are the opening statements for a business. If the value is Y, then the financial statements are opening statements.
PartyId	long	The unique identifier of the contact party.
ProformaInd	string	Indicates if the financial reports are pro forma numbers. If the value is Y, then the financial reports are pro forma numbers.
QualifiedInd	string	Indicates whether the financial reports include qualifying remarks from auditors about the fairness and accuracy of the numbers. If the value is Y, then the report is qualified by auditors.
ReportEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date of the report, used instead of Issued Period.
ReportStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date of the report, used instead of Issued Period.
RequestId	long	A system-generated read-only attribute used by the application framework.
RequiringAuthority	string	The name of the primary organization that requires this financial report. For example,

Name	Type	Description
		auditors, the Federal Trade Commission, or the Internal Revenue Service.
RestatedInd	string	Indicates whether the financial reports include data that was corrected after the original financial reports. If the value is Y, then the report has been corrected.
SignedByPrincipalsInd	string	Indicates whether the financial reports were signed by the principals of the organization. If the value is Y, then the reports are signed.
Status	string	The status of the record.
TrialBalanceInd	string	Indicates whether the financial reports include trial balance numbers. If the value is Y, then the financial report includes trial balance numbers.
TypeOfFinancialReport	string	A name for the financial report. For example, 10K report, Annual Report, or Shareholder's Special Report.
UnbalancedInd	string	Indicates whether the financial reports include balance sheet accounts that do not balance. If the value is Y, then report includes unbalanced balance sheet accounts.
WhUdpateId	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the record was entered or changed in a data warehouse.

Industries Served

The industries in which a partner operates.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerIndustryServed

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Partner Dimension Member*
Contained by	*Partner*

Relationship Type	Object or Service
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassificationCategory	string	The classification category of the industry served.
ClassificationCode	string	The classification code of the industry served.
ClassificationName	string	The classification name of the industry served.

Partner Dimension Member

A generic list of multiple values used for territory dimensions.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Industries Served*
Extended by	*Focus Areas*
Contained by	*Partner*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK1 column.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	A specific type of item within the dimension code. For example, for the products dimension, product items and product categories are there.
DimensionCode	string	The dimension of the item being stored. For example, geography.
DimensionMemberName	string	The name of the dimension member.
DimensionMemberNameBackup	string	The name of the dimension member to which this record refers to. This is stored in case the dimension member was removed and the user still requires the name of the item that was removed.
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.

Name	Type	Description
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerId	long	The unique identifier of the entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of the table. • Primary Key
TerrDimMemberId	long	The key data for the territory dimension.
TerrDimPartitionId	long	The primary key.
TypeCode	string	The type of the partition.

Instant Messaging

The instant messaging information of a trading community member, such as the AOL identifier or Yahoo Messenger information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}InstantMessaging

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessagingAddress	string	The instant messaging information address.
InstantMessagingInformation	*Trading Community Contact Point Additional Information*	The instant messaging information related to the record.
InstantMessengerType	string	The type of the instant messenger type.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary instant messaging Id of the associated object. If the value is True, then this is the primary instant messaging Id. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Location Details

The details about a geographical or physical location. For example, 500 Oracle Parkway, Redwood Shores, CA 94065.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/}Location

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Location Profile Additional Information*
Contains	*Location Locale*
Contains	*Source System Reference*
Contains	*Location Profile*
Handled by	*Trading Community Location*
Handled by	*Company and User Registration*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddrElementAttribute1	string	The additional address element to support flexible address format.
AddrElementAttribute2	string	The additional address element to support flexible address format.
AddrElementAttribute3	string	The additional address element to support flexible address format.
AddrElementAttribute4	string	The additional address element to support flexible address format.

Name	Type	Description
AddrElementAttribute5	string	The additional address element to support flexible address format.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AddressEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address becomes effective.
AddressExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address is no longer active.
AddressLinesPhonetic	string	The phonetic or kana representation of the Kanji address lines (used in Japan).
AddressStyle	string	The context value for Flexible Address Format descriptive flex field. Do not use this column, join to the FND_TERRITORIES table via COUNTRY = TERRITORY_CODE to retrieve the address style for the country.
Building	string	The specific building name or number at a given address.
City	string	The name of the city.
CliiCode	string	Common Language Location Identifier (CLLI) code.
Comments	string	The comments for the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
Description	string	The free text description of the record.
Distance	decimal	The distance from the input location.
DoNotValidateFlag	boolean	Indicates that a particular location should not validated, regardless of the current validation status code. If the value is Yes, then the location is not validated. The default is No.
EffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the location becomes valid.
FaLocationId	long	Foreign key to the FA_LOCATIONS table.
FloorNumber	string	The floor number of the address.
GeometryStatusCode	string	The spatial data integration status for given location.
HouseType	string	Indicates the building type for the building in the address. A list of valid values are defined in the lookup HZ_HOUSE_TYPE.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
Language	string	The language used in the location.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	The latitude information for the address. The latitude information for the location is used for spatial proximity and containment purposes.

Name	Type	Description
LocationDirections	string	The directions to the address location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table. • Primary Key
LocationInformation	*Trading Community Location Profile Additional Information*	The detailed information about the location.
LocationLocale	*Location Locale*	The location or address information in the local language.
LocationProfile	*Location Profile*	The profile information of the location.
Longitude	decimal	The longitude information for the address. The longitude information for the location is used for spatial proximity and containment purposes.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
Position	string	The primary direction such as North or East that is used to access the location.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four-digit extension to the United States Postal ZIP code for the address.
Province	string	The name of the province.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
SalesTaxGeocode	string	The US Sales Tax Jurisdiction code. This provides a Jurisdiction Code (also called as Geocode) defined by either Vertex or Taxware. This value is passed as a ship-to location jurisdiction code to the tax partner API.
SalesTaxInsideCityLimits	string	Indicates if the location is inside the boundary of a city. Used to calculate state and local taxes in the United States. If the value is 1, then the location is within city limits.
ShortDescription	string	The short description of the location.
State	string	The name of the state.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TimezoneCode	string	The code of the time zone for the location.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	A standardized status code describing the results of the validation. The value is internally set by system during address cleansing.

Location Locale

The details about a location or address in the local language.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/}LocationLocale

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Location Details*
Handled by	*Trading Community Location*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddrElementAttribute1	string	The additional address element to support flexible address format.
AddrElementAttribute2	string	The additional address element to support flexible address format.
AddrElementAttribute3	string	The additional address element to support flexible address format.
AddrElementAttribute4	string	The additional address element to support flexible address format.
AddrElementAttribute5	string	The additional address element to support flexible address format.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
Building	string	The specific building name or number at a given address in the local language.
City	string	The name of the city.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
FloorNumber	string	The floor number of the address in the local language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four-digit extension to the United States Postal ZIP code for the address.
Province	string	The name of the province.
State	string	The name of the state.
TransliterationLang	string	The language used to define the address elements of the location. The list of accepted values are defined in the FND_LANGUAGES.LANGUAGE_COD lookup.

Location Profile

The profile information of a location.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/}LocationProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Location Details*
Handled by	*Trading Community Location*
Handled by	*Company and User Registration*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddrElementAttribute1	string	The additional address element to support flexible address format.
AddrElementAttribute2	string	The additional address element to support flexible address format.
AddrElementAttribute3	string	The additional address element to support flexible address format.
AddrElementAttribute4	string	The additional address element to support flexible address format.
AddrElementAttribute5	string	The additional address element to support flexible address format.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
Building	string	The specific building name or number at a given address.
City	string	The name of the city.
Country	string	The name of the country.

Name	Type	Description
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	Indicates whether the row has the latest change in the day. If the value is True, then this row has the latest change in the day.
EffectiveSequence	int	The order of the different changes made during the day. The lowest value represents the earliest change in the day.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
FloorNumber	string	The floor number of the address.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
LocationProfileId	long	The unique Identifier for a location profile. • Primary Key
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
PostalCode	string	The postal code element of the address.
Province	string	The name of the province.
RequestId	long	A system-generated read-only attribute used by the application framework.
State	string	The name of the state.
ValidationSstFlag	boolean	Indicates if the location information has been validated. If the value is Y, then the location has been validated.
ValidationStatusCode	string	A standardized status code describing the results of the validation. The value is internally set by system during address cleansing.

Partner

The set of partner profile attributes used to provide values while creating or changing a partner account.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}Partner

Logical Business Objects

- CRM : Partner Management : Partner

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Partner E-Mail*
Contains	*Partner Geography Served*
Contains	*Address*
Contains	*Partner Members*
Contains	*Web*

Relationship Type	Object or Service
Contains	*Partner Dimension Member*
Contains	*Classification Assignment*
Contains	*Partner Public Contact*
Contains	*Partner Account Resource*
Contains	*Partner Generic List of Values*
Contains	*Expertise*
Contains	*Industry Served*
Contains	*Partner Certification*
Contains	*Phone*
Contains	*Focus Areas*
Contains	*Partner Phone*
Contains	*Partner Type*
Contains	*Email*
Contained by	*Deal Registration*
Contained by	*Program Enrollments*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountDirectorId	long	The unique identifier of a valid employee resource who owns and manages the partner sales account.
Address1	string	The first line of the address.
AnalysisFy	string	The fiscal year that the financial information is based on.
AnnualRevenue	decimal	The partner's annual revenue. This field is maintained by the channel manager and partner administrator.
Auxiliary1ClassCode	string	The auxiliary Class Code 1 for a classification.
Auxiliary1CodeAssignmentId	long	The unique identifier of the assignment of the auxiliary Class Code 1.
Auxiliary1EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 1 is no longer active.
Auxiliary1StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 1 becomes effective.
Auxiliary2ClassCode	string	The auxiliary Class Code 2 for a classification.
Auxiliary2CodeAssignmentId	long	The unique identifier of the assignment of the auxiliary Class Code 2.
Auxiliary2EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 2 is no longer active.
Auxiliary2StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 2 becomes effective.
Auxiliary3ClassCode	string	The auxiliary Class Code 3 for a classification.
Auxiliary3CodeAssignmentId	long	The unique identifier of the assignment of the auxiliary Class Code 3.
Auxiliary3EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 3 is no longer active.

Name	Type	Description
Auxiliary3StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 3 becomes effective.
BusinessScope	string	The physical class of business in which a business participates. For example, local, national, or international.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CeoTitle	string	The formal title of the chief executive officer.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
City	string	The name of the city.
ClassificationTypes	*Classification Assignment*	The classification type of a partner.
CompanyNumber	string	The partner's company number that is an alternate unique identifier of the partner. This value is maintained by the channel manager and partner administrator.
ComplianceReviewedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the compliance review for the partner was last completed.
ComplianceStatus	string	Indicates whether the partner is compliant with vendor's criteria such as certifications, training, and so on. If the value is True, then the partner is compliant.
ControlYr	decimal	The year when current ownership gained control of the organization.
CorpCurrencyCode	string	Corporate currency
Country	string	The name of the country.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	Currency
CurrentFyPotentialRevenue	decimal	The estimated revenues that can be earned by the organization during its current fiscal year.
DUNSNumber	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DbRating	string	The Dun & Bradstreet credit rating.
Description	string	The free text description of the record.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EligibleForPublicProfile	string	Indicates whether the partner is eligible to publish their public profile. If the value is True, then the partner can publish their public profile.
Email	*E-Mail*	The email address associated with the record.
EmployeesTotal	decimal	The total number of employees.
ExportInd	string	Indicates whether the organization is an exporter. If the value is Y, then the organization is an exporter. The default value is N.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
FormattedAddress	string	The formatted address information.
FormattedPhoneNumber	string	The formatted phone number.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an

Name	Type	Description
		account, then the value of this attribute is set to null.
GeoNameReferenceId	long	The unique name reference identifier.
GeographyId	long	The geography ID for the geography served by the partner.
HomeCountry	string	The home country associated with the party.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
IncorpYear	int	The year that the business was formally incorporated.
IndustryClassCode	string	The Industry classification code. The classification codes are defined for every classification category as specified in IndustryCodeType attribute.
IndustryCodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code.
IndustryCodeEndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the industry class code is no longer valid.
IndustryCodeStartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the industry class code applies to the industry.
IsSelfRegisteredPartner	string	Indicates whether the partner registered through the self-service user interface.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LastTerritoryAssignedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the territory was last assigned.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
LegalStatus	string	The legal structure of the organization such as partnership, corporation, and so on.
LineOfBusiness	string	The type of business activities performed at this site.
Location	string	The location information of the partner.
LockTerritoryAssignment	string	Indicates if the automatic territory assignment can be set. If the value is True, then the automatic territory assignment cannot remove the sales account team resource. The default value is False.
MinorityOwnedInd	string	Indicates whether the organization is primarily owned by ethnic or racial minorities. If the value is Y, then the organization is owned by ethnic or racial minorities. The default value is N.
MinorityOwnedType	string	The type of minority-owned firm.
NextFyPotentialRevenue	decimal	The estimated revenues that can be earned by the organization during its next fiscal year.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OpportunitiesWonPriorYear	decimal	Opportunities that the partner sales representatives closed and won in the prior fiscal year.
OpportunitiesWonYTD	decimal	Opportunities that the partner sales representatives closed and won in the current fiscal year-to-date.
OrgTypeClassCode	string	The classification code for the organization type.
OrgTypeCodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an organization type.
OrgTypeCodeEndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the organization type class code is no longer valid.

Name	Type	Description
OrgTypeCodeStartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the class code applies to the organization type.
OrganizationName	string	The name of the party when the party type is Organization.
OrganizationProfileId	long	The unique identifier of the organization profile.
OrganizationSize	string	The size of the organization based on its revenue, number of employees, and so on.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference.
OwnerName	string	The name of a valid employee resource that owns and manages the partner account.
OwnerPersonPartyId	long	The unique identifier of a valid employee resource who owns and manages the partner account.
ParentPartnerPartyId	long	A foreign key reference to the TCA party records that represents the Partner's parent company.
ParentPartnerPartyNumber	string	Candidate for public surrogate key field and serves as a user-entered identifier for the Partner's Parent company.
ParentPk1Value	string	Attribute Deprecated, use Attribute ParentPartnerPartyId instead
PartnerAccountId	long	The unique identifier of the partner account resource team member.
PartnerAccountResourceToAccountP	*Partner Account Team*	The list of account resources for the partner account.
PartnerCertificationP	*Partner Certification*	The list of certifications for partner.
PartnerDimensionMemberPVO	*Partner Dimension Member*	The list of dimension members for the partner.

Name	Type	Description
PartnerEmailPVO	*Partner E-Mail*	The list of e-mails for the partner.
PartnerExpertise	*Expertise*	The list of expertise for the partner.
PartnerFaxPVO	*Partner Phone*	The list of fax for the partner.
PartnerGeography	*Geographies Served*	The list of geographies served by the partner.
PartnerIndustry	*Industries Served*	The list of industries served by the partner.
PartnerLevel	string	The relative tier of the partner.
PartnerMember	*Partner Members*	The list of members for a partner.
PartnerMemberPVO	*Partner Public Contact*	The public contact information of the partner.
PartnerPhonePVO	*Partner Phone*	The list of phones of the partner.
PartnerProductSpeciality	*Focus Areas*	The list of product specialties of the partner.
PartnerProfileMultivalueLovP	*Partner Generic List of Values*	The list of partner profile values for the partner.
PartnerSummary	string	The description of the partner company.
PartnerTypeDimensionMemberP	*Partner Type*	The list of partner type dimensions for the partner.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartySite	*Address*	The party site associated with the partner.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.

Name	Type	Description
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PrefferedContactId	long	The unique identifier of the preferred contact person for the partner.
PrefferedContactName	string	The name of the preferred contact person for the partner.
PrimaryPhoneContactPointId	long	The unique identifier of the primary phone contact point.
PrimaryURLContactPointId	long	The unique identifier of the primary URL contact point.
PrincipalName	string	The Name of the highest ranking person in the company.
PrincipalTitle	string	The title of the highest ranking person in the organization.
ProfileObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
Province	string	The name of the province.
PublicAddressId	long	The partner company address displayed in Partner Finder.
PublicContactId	long	The partner contact name displayed in Partner Finder.
PublicEmailId	long	The e-mail displayed in Partner Finder.
PublicFaxId	long	The fax number displayed in in Partner Finder.
PublicPhoneId	long	The phone displayed in Partner Finder.

Name	Type	Description
PublicPrivateOwnershipFlag	boolean	Indicates whether the organization is publically or privately owned. If the value is Y, then the organization is a privately owned organization. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
PublicStatus	string	Status of approval of public profile.
RangeEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date in the import range.
RangeStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date in the import range.
ReassignTerritory	string	Indicates whether this partner needs territory reassignment.
RegistrationType	string	Indicates the registration type of the partner.
SmallBusInd	string	Indicates whether the organization is considered as a small business. If the value is Y, then the organization is considered as a small business. The default value is N.
SolutionOverview	string	The overview description of partner solutions.
State	string	The name of the state.
Status	string	The status of the record.
StockSymbol	string	The corporate stock symbol of the organization as listed in stock exchanges.
Synergy	string	The description of the value of the partnership between the Vendor and Partner.
TierId	long	The unique identifier for a tier to which a partner applies.
TotalEmployeesInd	string	Indicates if subsidiaries are included in the calculation of total employees. The accepted values are defined in the lookup type TOTAL_EMPLOYEES_INDICATOR.
TotalEmployeesText	string	The total number of employees in text format.

Name	Type	Description
TreeCode	string	The unique code of the partner organization tree.
TreeStructureCode	string	The unique code for the partner organization tree structure.
URL	string	The destination URL associated with a specific Google AdWords ad.
UniqueNameSuffix	string	The suffix used to generate the attribute PartyUniqueName. The suffix is concatenated to the Organization Name attribute to generate the PartyUniqueName. The primary address is defaulted as the suffix.
Web	*Web*	The web information related to the record.
YearEstablished	int	The year when the organization began doing business.

Partner Account Team

The person assigned to a partner account team.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerAccountResource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	The type of access granted to the resource as well as managers of the organizations.
AssignmentTypeCode	string	The code indicating how the resource is assigned to the sales account team.
CreatedBy	string	Who column: indicates the date and time of the creation of the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who created the row.
EmailAddress	string	The email address associated with the record.
FormattedPhoneNumber	string	The formatted phone number.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
MemberFunctionCode	string	The code indicating the role of a sales team member in the resource team such as Integrator, Executive Sponsor, and Technical Account Manager. A list of accepted values is defined in the lookup FND_LOOKUPS.
OrganizationName	string	The name of the party when the party type is Organization.
OrganizationRole	string	The role of the partner in the organization.
PartnerAccountId	long	The unique identifier of the partner account resource team.
PartnerAccountResourceId	long	The unique identifier of the member of the partner account resource team. • Primary Key

Name	Type	Description
PartnerPartyId	long	The PartyId of Partner whose Account Team includes this resource.
ResourceId	long	The unique identifier of the resource.
ResourceName	string	The name of the resource associated with the partner account team.
TerritoryName	string	The name of the territory for the partner account.

Partner Certification

The list of certifications that a partner has achieved.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerCertification

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Partner Generic List of Values*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CertificationCode	string	The code for the certification.
CertificationName	string	The name of this certification.
LookupCode1	string	The key information for the certification.
LookupType1	string	The key information for the certification.
Meaning	string	The name of this certification.

Partner Generic List of Values

The generic list of multiple values used for certifications and expertise.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerProfileMultivalueLov

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Partner Certification*
Extended by	*Expertise*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
LookupCode	string	The value from a multi-value list of values category that applies to the profile.
LookupType	string	The list of values code that defines the category to which the list of values belong. This value indicates the profile field to which the value belongs.
PartnerMultivalLovId	long	The unique identifier of the list of values code selected for a specific multi-value field in the partner profile. • Primary Key
PartyId	long	The unique identifier of the contact party.

Partner Dimension Member

A generic list of multiple values used for territory dimensions.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Industries Served*

Relationship Type	Object or Service
Extended by	*Focus Areas*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK1 column.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	A specific type of item within the dimension code. For example, for the products dimension, product items and product categories are there.
DimensionCode	string	The dimension of the item being stored. For example, geography.
DimensionMemberName	string	The name of the dimension member.
DimensionMemberNameBackup	string	The name of the dimension member to which this record refers to. This is stored in case the dimension member was removed and the user still requires the name of the item that was removed.

Name	Type	Description
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerId	long	The unique identifier of the entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of the table. • Primary Key
TerrDimMemberId	long	The key data for the territory dimension.
TerrDimPartitionId	long	The primary key.
TypeCode	string	The type of the partition.

Partner E-Mail

The e-mail address of the partner.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerPublicEmail

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActualContentSource	string	The information regarding the source of the contact point.
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPointValue	string	The key information for the contact point.
CreatedByModule	string	The module that created the record.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The information on how to interpret the e-mail address.

Name	Type	Description
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
OrigSystemReference	string	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
Primary2Flag	boolean	Indicator to specify that the contact point is the primary point of contact.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
RelationshipId	long	The relationship identifier for the record.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Focus Areas

The focus areas or product specialties of the partner.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerProductSpeciality

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Partner Dimension Member*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ProductId	string	The unique identifier of the product for product specialties.
ProductName	string	The name of the product for product specialties.

Partner Dimension Member

A generic list of multiple values used for territory dimensions.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Industries Served*
Extended by	*Focus Areas*
Contained by	*Partner*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK1 column.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	A specific type of item within the dimension code. For example, for the products dimension, product items and product categories are there.
DimensionCode	string	The dimension of the item being stored. For example, geography.
DimensionMemberName	string	The name of the dimension member.
DimensionMemberNameBackup	string	The name of the dimension member to which this record refers to. This is stored in case the dimension member was removed and the user still requires the name of the item that was removed.
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.

Name	Type	Description
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerId	long	The unique identifier of the entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of the table. • Primary Key
TerrDimMemberId	long	The key data for the territory dimension.
TerrDimPartitionId	long	The primary key.
TypeCode	string	The type of the partition.

Partner Generic List of Values

The generic list of multiple values used for certifications and expertise.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerProfileMultivalueLov

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Partner Certification*

Relationship Type	Object or Service
Extended by	*Expertise*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
LookupCode	string	The value from a multi-value list of values category that applies to the profile.
LookupType	string	The list of values code that defines the category to which the list of values belong. This value indicates the profile field to which the value belongs.

Name	Type	Description
PartnerMultivalLovId	long	The unique identifier of the list of values code selected for a specific multi-value field in the partner profile. • Primary Key
PartyId	long	The unique identifier of the contact party.

Geographies Served

The geographies in which a partner operates.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerGeographyServed

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK1 column.
CreatedBy	string	Who column: indicates the user who created the row.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	A specific type of item within the dimension code. For example, for the products dimension there could be product items and product categories.
DimensionCode	string	The dimension of the item being stored. For example, geography.
DimensionMemberName	string	Name of dimension member.
DimensionMemberNameBackup	string	The name of the dimension remember this record refers to. This is stored in case the dimension member was removed and the user still needs to know the name of the item that was removed.
GeographyId	string	The geography ID of the geography served.
GeographyName	string	The geography name of the geography served.
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
OwnerId	long	The identifier of the entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.

Name	Type	Description
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of this table. • Primary Key
TerrDimMemberId	long	Key data for the territory dimension.
TerrDimPartitionId	long	Primary key.
TypeCode	string	Type of the partition.

Partner Members

The partner members for a partner.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Trading Community Person Details*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ObjectId	long	PartyId of Partner Organization to whom this Contact belongs.

Trading Community Person Details

The information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Person

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*
Contains	*Citizenship*
Contains	*Contact Language*
Contains	*Instant Messaging*
Contains	*Employment History*
Contains	*Web*
Contains	*Classification Assignment*
Contains	*Usage Assignment*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Contact Interest*
Contains	*Contact*

Relationship Type	Object or Service
Contains	*Additional Contact Name*
Contains	*Phone*
Contains	*Education*
Contains	*Email Domain*
Contains	*Additional Identifier*
Contains	*Contact Preference*
Contains	*Source System Reference*
Contains	*Certification*
Contains	*Contact Address*
Contains	*Email*
Contains	*Preference*
Extended by	*Partner Members*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*

Relationship Type	Object or Service
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.
AdditionalPersonName	*Additional Contact Name*	The additional name of the person.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information for the person.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Citizenship	*Citizenship*	The citizenship information of a person.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the person.
Comments	string	The comments for the record.

Name	Type	Description
ContactPreference	*Contact Preference*	The contact preference associated with the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
Education	*Education*	The education information of the person.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.
EmploymentHistory	*Employment History*	The employment history information of a person.
FinancialProfile	*Financial Profile*	The financial profile information of a person.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
Gender	string	The gender of the person, such as male, female, and unknown. A list of accepted values is defined in the lookup HZ_GENDER.

Name	Type	Description
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person. A list of accepted values is defined in the lookup MARITAL_STATUS.
MissionStatement	string	The corporate charter of organization in user-defined text format.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.

Name	Type	Description
PartyPreference	*Preference*	The preference mentioned in the person details.
PartySite	*Contact Address*	The party site associated with the person.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the person.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonInterest	*Contact Interest*	The interest information associated with a person.
PersonLanguage	*Contact Language*	The language information associated with a person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.

Name	Type	Description
PersonPreviousLastName	string	The previous last name of a person.
PersonProfile	*Contact*	The profile information of the person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPTId	long	The unique identifier of the primary e-mail.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPTId	long	The unique identifier of the primary phone contact point.

Name	Type	Description
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPTId	long	The unique identifier of the primary URL contact point.
Province	string	The name of the province.
Relationship	*Relationship*	The relationship information of the person.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
Salutation	string	The size of the household this person is a part of.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.

Name	Type	Description
Status	string	The status of the record.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the Third Party field in the Customers window is mandatory.
URL	string	The destination URL associated with a specific Google AdWords ad.
UserGUID	string	The "light weight" user Global Unique Id. Light Weight users defined in the Extended Security (XS) System.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
Web	*Web*	The web information related to the record.

Partner Phone

The phone number for a contact point.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerPublicPhone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActualContentSource	string	The information regarding the source of the contact point.
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPointValue	string	The key information for the contact point.
CreatedByModule	string	The module that created the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FormattedPhoneNumber	string	The formatted phone number.
LastContactDtTime	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The last time when the contact point was contacted.
OrigSystemReference	string	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PagerTypeCode	string	The type of pager for the phone number.
PartyUsageCode	string	The usage context of a party's contact point.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCallingCalendar	string	The information on proper calling times.

Name	Type	Description
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The extension of the phone number.
PhoneLineType	string	The type of phone line.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
RawPhoneNumber	string	The unformatted phone number.
RelationshipId	long	The relationship identifier for the record.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TransposedPhoneNumber	string	The transposed phone number.

Partner Public Contact

The point of contact used for the public profile.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerPublicContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*

Relationship Type	Object or Service
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AnalysisFy	string	The fiscal year that the financial information is based on.
CategoryCode	string	The user-defined category. The lookup type is CUSTOMER_CATEGORY.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
City	string	The name of the city.

Name	Type	Description
Comments1	string	The denormalization of the COMMENTS in HZ_GROUP_PROFILES.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy1	string	The user who created the account record.
CreatedByModule1	string	The module that created the account record.
CreationDate1	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyFyPotentialRevenue	decimal	The potential revenue of the organization in this fiscal year.
DUNSNumber	string	DUNS_NUMBER in VARCHAR format. Column value is not restricted to nine digit DUNS number.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The denormalization of the DATE_OF_BIRTH in HZ_PERSON_PROFILES.
EmailAddress	string	The email address associated with the record.
EmployeesTotal	decimal	The total number of employees.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
FormattedAddress	string	The formatted address of the contact.
FormattedPhoneNumber	string	The formatted phone number.
Gender	string	The denormalization of the GENDER in HZ_PERSON_PROFILES.
GroupType	string	The lookup for the group type.
HQBranchInd	string	The status of the site. Identifies if the location is the headquarters, a branch, or a single location.
HomeCountry	string	The home country associated with the party.

Name	Type	Description
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for a language.
LastUpdateDate1	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin1	string	The login of the user who last updated the record.
LastUpdatedBy1	string	The user who last updated the record.
MaritalStatus	string	The denormalization of the MARITAL_STATUS in HZ_PERSON_PROFILES.
MissionStatement	string	The corporate charter of the organization.
NextFyPotentialRevenue	decimal	The potential revenue of the organization for the next fiscal year.
OrigSystemReference	string	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PersonAcademicTitle	string	An academic title that is part of the name of a person, such as Dr. John Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_

Name	Type	Description
		PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	Used to specify the last name prefix such as fon, van, and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_PREFIX in HZ_PERSON_PROFILES is used. Corresponds to the field Last Name Prefix in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	Indicates the place in a family structure. For example, in Tom Jones III, III is the suffix.
PersonPreNameAdjunct	string	The salutary introduction such as Mr. or Herr.
PersonPreviousLastName	string	The previous last or surname of the person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.

Name	Type	Description
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPTId	long	The key to primary e-mail contact point.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPTId	long	The key to the primary contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPTId	long	The key to the primary URL contact point.
Province	string	The name of the province.
SICCode	string	The standard industry classification (SIC) code.
SICCodeType	string	The version of standard industry classification (SIC) code.
Salutation	string	The phrase used to address a party in any correspondence.
State	string	The name of the state.

Name	Type	Description
Status1	string	The party status indicator.
TradingPartnerIdentifier	string	One column to store the FSIO related trading partner codes. This column stores alpha numeric values. The column also addresses Fed vs. Non-Fed attribute requirement.
URL	string	The destination URL associated with a specific Google AdWords ad.
UserGUID	string	Stores the light weight user Global Unique ID. Light weight users are defined in the Extended Security (XS) system. Foreign key to FND_USER.
YearEstablished	int	The year when the organization began doing business.

Partner Type

The information about the partner type.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerTypeDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK2 column.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	This attribute is not used.
DimensionCode	string	This will contain the string 'SChnl' to indicate Partner Type.
DimensionMemberName	string	Name of dimension member.
DimensionMemberNameBackup	string	The name of the dimension remember this record refers to. This is stored in case the dimension member was removed and the user still needs to know the name of the item that was removed.
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
OwnerId	long	Partner Party Id of the Partner.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.

Name	Type	Description
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of this table. • Primary Key
PartnerTypeCode	string	The partner type code for partner.
PartnerTypeName	string	The name of the partner type, such as Value Added Reseller.
TerrDimMemberId	long	Key data for the territory dimension.
TerrDimPartitionId	long	Primary key.
TypeCode	string	Type of the partition.

Phone

The phone number associated with a trading community member. For example, the phone number for Oracle Corporation is 650-506-6000.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Phone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Marketing Response*

Relationship Type	Object or Service
Contained by	*Partner*
Contained by	*Household*
Contained by	*Contact Address*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FormattedPhoneNumber	string	The formatted phone number.
LastContactDtTime	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time of last contact placed to this contact point.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PagerTypeCode	string	The PAGER_TYPE_CODE column stores the lookup code for the type of pager. The type of pager determines how the page is received. For example, tone, number, alphanumeric or two-way alphanumeric.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCallingCalendar	string	The name or code for a calling calendar used with this telephone number. This attribute is no longer used in Fusion applications.
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The additional number addressed after initial connection to an internal telephone system.
PhoneInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community phone.
PhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound, or outbound.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party

Name	Type	Description
		or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RawPhoneNumber	string	The unformatted telephone number.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TimezoneCode	string	The foreign key to FND_TIMEZONES_B.TIMEZONE_CODE.
TransposedPhoneNumber	string	This column stores the concatenation of PHONE_COUNTRY_CODE, PHONE_AREA_CODE, and PHONE_NUMBER in reverse order. For example, if PHONE_COUNTRY_CODE=1, PHONE_AREA_CODE=650 and PHONE_NUMBER=5065747, this column stores 74756050561. This column is used for building an index to search for any combination of the above three columns.

Preference

The preferences of a trading community member. For example, a member may prefer that the transaction currency is the US dollar.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalValue1	string	The additional preference value.
AdditionalValue2	string	The additional preference value.
AdditionalValue3	string	The additional preference value.
AdditionalValue4	string	The additional preference value.
AdditionalValue5	string	The additional preference value.
Category	string	A preference category is used to logically group one or more preference codes in a

Name	Type	Description
		particular user interface. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Module	string	The program that creates the preference. For example, TCA MOBILE CUSTOMER DIRECTORY.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PartyPreferenceId	long	The unique identifier of the party preference. • Primary Key
PreferenceCode	string	A preference code determines if a preference is a single value or a multiple value preference. The preference code is validated by the HZ_PREFERENCE lookup. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
ValueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The preference value when the data type is DATE.
ValueName	string	A user-defined alias for a preference value.

Name	Type	Description
ValueNumber	decimal	The preference value when the data type is NUMBER.
ValueVarchar2	string	The preference value when the data type is VARCHAR2.

Relationship

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}Relationship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Address*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Usage Assignment*
Contains	*Trading Community Relationship Additional Information*
Contains	*Customer Contact Profile*
Contains	*Source System Reference*
Contains	*Email*
Contained by	*Trading Community Person Details*
Contained by	*Household*

Relationship Type	Object or Service
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalInformation1	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type. For operating unit and legal entity to bank relationships, column stores communication agreement ID, which identifies agreement between payer and bank on type of EDIFACT documents that can be sent for processing payments.
AdditionalInformation10	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation11	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation12	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation13	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation14	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation15	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation16	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation17	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation18	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation19	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation2	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation20	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation21	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation22	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation23	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation24	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation25	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation26	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation27	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation28	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation29	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation3	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation30	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation4	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation5	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation6	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation7	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation8	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation9	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DirectionCode	string	The code of the relationship direction. The list of accepted values are defined in the lookup DIRECTION_CODE.
Email	*E-Mail*	The email address associated with the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
ObjectEmailAddress	string	The e-mail address of the object party in the relationship.
ObjectId	long	The unique identifier of the object party in this relationship.
ObjectPartyName	string	The name of the object party in this relationship.
ObjectTableName	string	The source table name of the object party in this relationship.
ObjectType	string	The object type of the relationship.
ObjectUsageCode	string	The usage code of object party in the relationship.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationContact	*Customer Contact Profile*	The organization contact information.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyName	string	The name of the party.
PartySite	*Address*	The party site associated with the relationship.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the relationship.
PercentageOwnership	decimal	The percentage of the child entity owned by the parent entity.
Phone	*Phone*	The phone information for the entity.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.

Name	Type	Description
RelationshipCode	string	The code for a forward or a backward relationship. A list of accepted relationship values is defined in the lookup PARTY_ RELATIONS_TYPE.
RelationshipId	long	The relationship identifier for the record.
RelationshipInformation	*Trading Community Relationship Additional Information*	The relationship type information.
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key
RelationshipType	string	The relationship type name. For example, CUSTOMER_SUPPLIER. A list of valid relationship types is defined in the lookup HZ_ RELATIONSHIP_TYPE.
RequestId	long	A system-generated read-only attribute used by the application framework.
Role	string	The role between the subject and object party in this relationship.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
SubjectEmailAddress	string	The e-mail address of the subject party in relationship.
SubjectId	long	The unique identifier of the subject in this relationship.
SubjectPartyUsageAssignment	*Usage Assignment*	The usage assignment of the subject party in the relationship.
SubjectTableName	string	The source table of the subject.
SubjectType	string	The subject type of the relationship.
SubjectUsageCode	string	The usage code of subject party in the relationship.

Name	Type	Description
Web	*Web*	The web information related to the record.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*
Contained by	*Location Details*
Contained by	*Household*
Contained by	*Contact Preference*
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*
Contained by	*Trading Community Address Purpose*

Relationship Type	Object or Service
Contained by	*Telex*
Contained by	*Phone*
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*
Contained by	*Trading Community Person Details*
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*
Contained by	*Trading Community Customer Account Site Use*
Contained by	*Relationship*
Contained by	*Electronic Data Interchange*
Contained by	*Trading Community Customer Account or Site Role*
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*

Relationship Type	Object or Service
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Telex

The telex number information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Telex

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.

Name	Type	Description
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary telex of the associated object. If the value is True, then this is the primary telex. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TelexNumber	string	The telex reference number (usually a telephone number) of the organization.

Trading Community Address Additional Information

The address information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/}PartySiteInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Address Purpose

The purpose of an address, such as Business, Home, or Ship To.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySiteUse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Relationship Type	Object or Service
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date at the start of the date range within which the row is active.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
IntegrationKey	string	The integration key is not used.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteUseId	long	The unique identifier of the party site used. • Primary Key
PrimaryPerType	string	Indicates if this is the primary use for the site. Y stands for the primary site and N stands for all other sites.
RequestId	long	A system-generated read-only attribute used by the application framework.
SiteUseType	string	The site use type associated with the address.
Status	string	The status of the record.

Trading Community Contact Point Additional Information

The contact point for a trading community member like phone or e-mail. For example 650-506-6000 is the phone number for Oracle Corporation, john.doe@example.com is the e-mail address for John Doe.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/}ContactPointInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Phone*
Contained by	*Web*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key

Name	Type	Description
ContactPointType	string	The type of the contact point.
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Location Profile Additional Information

The physical location information of a trading community member. For example 300 Oracle Parkway, Redwood Shore, CA.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/location/}LocationInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Location Details*
Handled by	*Trading Community Location*
Handled by	*Company and User Registration*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.

Name	Type	Description
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Organization Contact Additional Information

The additional information about the organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/orgContact/}OrganizationContactInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Customer Contact Profile*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrgContactId	long	The unique identifier of the organization contact. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Organization Details

The information about an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationParty

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*
Contains	*Address*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Classification Assignment*
Contains	*Usage Assignment*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Phone*
Contains	*Email Domain*

Relationship Type	Object or Service
Contains	*Telex*
Contains	*Additional Identifier*
Contains	*Account*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contains	*Financial Report*
Contains	*Certification*
Contains	*Electronic Data Interchange*
Contains	*Email*
Contains	*Preference*
Contains	*Additional Account Name*
Contains	*Electronic File Transfer*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalOrganizationName	*Additional Account Name*	The additional name associated with the organization.
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AnalysisFy	string	The fiscal year that the financial information is based on.
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information associated with the organization.

Name	Type	Description
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the organization.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating for the organization.
CurrentFiscalYearPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its current fiscal year.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
Edi	*Electronic Data Interchange*	The electronic data interchange information for the organization.
Eft	*Electronic File Transfer*	The electronic file transfer information for the organization.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.

Name	Type	Description
EmployeesTotal	decimal	The total number of employees.
FinancialProfile	*Financial Profile*	The financial profile information of the organization.
FinancialReport	*Financial Report*	The financial report information of the organization.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
GroupType	string	The type of the group.
HQBranchIndicator	string	The status of this site, such as HQ, a branch, or a single location. A list of accepted values are defined in the lookup type HQ_BRANCH_IND.
HomeCountry	string	The home country associated with the party.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MissionStatement	string	The corporate charter of organization in user-defined text format.
NextFyPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its next fiscal year.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationProfile	*Account*	The information about the partner organization.
OrganizationSize	string	The size of the organization based on its revenue, number of employees, and so on.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	The preference mentioned in the organization details.
PartySite	*Address*	The party site associated with the organization.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.

Name	Type	Description
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the organization.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPointId	long	The unique identifier of the primary e-mail.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPointId	long	The unique identifier of the primary phone contact point.

Name	Type	Description
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPointId	long	The unique identifier of the primary URL contact point.
PrincipalName	string	The Name of the highest ranking person in the company.
Province	string	The name of the province.
Relationship	*Relationship*	The relationship information of the organization.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.

Name	Type	Description
Status	string	The status of the record.
Telex	*Telex*	The telex information of the organization.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the Third Party field in the Customers window is mandatory.
TradingPartnerIdentifier	string	The FSIO related trading partner codes.
URL	string	The destination URL associated with a specific Google AdWords ad.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
Web	*Web*	The web information related to the record.
YearEstablished	int	The year when the organization began doing business.

Trading Community Organization Profile Additional Information

The additional profile information about an organization, such as the organization type.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/organization/}OrganizationInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Cloud Account*
Contained by	*Account*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrganizationProfileId	long	The unique identifier of the organization profile. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Person Details

The information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Person

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*
Contains	*Citizenship*
Contains	*Contact Language*
Contains	*Instant Messaging*
Contains	*Employment History*
Contains	*Web*
Contains	*Classification Assignment*
Contains	*Usage Assignment*

Relationship Type	Object or Service
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Contact Interest*
Contains	*Contact*
Contains	*Additional Contact Name*
Contains	*Phone*
Contains	*Education*
Contains	*Email Domain*
Contains	*Additional Identifier*
Contains	*Contact Preference*
Contains	*Source System Reference*
Contains	*Certification*
Contains	*Contact Address*
Contains	*Email*
Contains	*Preference*
Extended by	*Partner Members*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.
AdditionalPersonName	*Additional Contact Name*	The additional name of the person.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information for the person.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.

Name	Type	Description
Citizenship	*Citizenship*	The citizenship information of a person.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the person.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
Education	*Education*	The education information of the person.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.
EmploymentHistory	*Employment History*	The employment history information of a person.
FinancialProfile	*Financial Profile*	The financial profile information of a person.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the

Name	Type	Description
		organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
Gender	string	The gender of the person, such as male, female, and unknown. A list of accepted values is defined in the lookup HZ_GENDER.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person. A list of accepted values is defined in the lookup MARITAL_STATUS.
MissionStatement	string	The corporate charter of organization in user-defined text format.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	The preference mentioned in the person details.
PartySite	*Contact Address*	The party site associated with the person.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the person.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonInterest	*Contact Interest*	The interest information associated with a person.
PersonLanguage	*Contact Language*	The language information associated with a person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.

Name	Type	Description
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.
PersonPreviousLastName	string	The previous last name of a person.
PersonProfile	*Contact*	The profile information of the person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the

Name	Type	Description
		Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPTId	long	The unique identifier of the primary e-mail.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPTId	long	The unique identifier of the primary phone contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPTId	long	The unique identifier of the primary URL contact point.
Province	string	The name of the province.
Relationship	*Relationship*	The relationship information of the person.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
Salutation	string	The size of the household this person is a part of.
SourceSystem	string	The source system name where the record originated.

Name	Type	Description
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.
Status	string	The status of the record.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the Third Party field in the Customers window is mandatory.
URL	string	The destination URL associated with a specific Google AdWords ad.
UserGUID	string	The "light weight" user Global Unique Id. Light Weight users defined in the Extended Security (XS) System.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
Web	*Web*	The web information related to the record.

Trading Community Person Profile Additional Information

The additional information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/}PersonInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Loyalty Member Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PersonProfileId	long	The unique identifier of the person profile. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Relationship Additional Information

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/relationship/}RelationshipInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Usage Assignment

The party usage assigned to a trading community member. For example, John Doe is a contact of ABC Corporation and XYZ Corporation is a supplier.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyUsageAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Party Usage Assignment Service*
Handled by	*Trading Community Party Information*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
PartyUsageCode	string	The usage context of a party's contact point.
PartyUsgAssignmentId	long	The unique identifier of the party usage assignment. • Primary Key
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Web

The Web information associated with a trading community member. For example, Oracle's address on the Web is www.oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Web

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N stands for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact

Name	Type	Description
		point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
URL	string	The destination URL associated with a specific Google AdWords ad.
WebInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community Web.
WebType	string	The prefix class to a Web address. Typically, this is either FTP or HTTP.

Work Class

The custom-defined classification of information about a person's job title and work experience.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}WorkClass

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Employment History*
Handled by	*Sales Account Service*

Relationship Type	Object or Service
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmploymentHistoryId	long	The foreign key to the HZ_EMPLOYMENT_HISTORY table.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LevelOfExperience	string	The user-defined rating for the level of experience in the class of work. For example, journeyman, trainee, or exposure.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Name	Type	Description
WorkClassId	long	The unique identifier for the class of work. • Primary Key
WorkClassName	string	The user-determined classification for work. For example, bricklayer, doctor, lawyer, programmer, or minister of health.

Contract Service (Deprecated)

This service is deprecated from Release 11 onwards. Use the version 2 of the service identified by oracle.apps.contracts.coreAuthoring.contractService.ContractService.

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/transaction/transactionService/}ContractService

Service WSDL URL: https://servername/fscmService/ContractServiceV1?WSDL

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Contract Service Version 2*
Handles	*Contract Billing Controls*
Handles	*Contract Header Descriptive Flexfield Attributes*
Handles	*Contract Line*
Handles	*Contract*
Handles	*Contract Party Descriptive Flexfield Attributes*
Handles	*Contract Bill Plan Descriptive Flexfields*

Relationship Type	Object or Service
Handles	*Contract Bill Plans*
Handles	*Contract Party Address*
Handles	*Contract Assigned Billing Extensions*
Handles	*Contract Revenue Plans*
Handles	*Contract Job Assignment Override*
Handles	*Contract Bill Plan Translation*
Handles	*Contract Party*
Handles	*Contract Party Contact*
Handles	*Sales Credit*
Handles	*Job Title Override*
Handles	*Contract Line Descriptive Flexfield Attributes*
Handles	*Person Rate Override*
Handles	*Contract Related Document*
Handles	*Labor Multiplier Override*
Handles	*Nonlabor Rate Override*
Handles	*Contract Job Rate Override*

Operations

- *mergeContractInAllStatus*
- *deleteContract*
- *removeHoldOnContract*
- *reopenContract*
- *reopenContractLine*
- *applyHoldOnContractUsingSetId*

- *closeContractLineUsingSetId*
- *closeContractUsingSetId*
- *cancelContractUsingSetId*
- *updateContractToActive*
- *getContract*
- *getContractByPrimaryKey*
- *createContract*
- *updateContract*
- *mergeContract*
- *findContract*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

mergeContractInAllStatus

The custom merge operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractHeader	*Contract Deprecated*	The contract header SDOs of all the contracts that would be merged.
targetStatusCode	string	The target status code after the merge operation.
closeDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contract was closed.
closeReasonCode	string	The close reason code of the contract.
cancelReasonCode	string	The reason code for canceling a contract.
versionFlag	boolean	The flag that denotes whether a new version of the contract would be created for the merge operation.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the merge operation that also includes the warning or information message.

deleteContract

The custom delete operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
id	long	The identifier of the contract.
majorVersion	long	The major version of the contract.
externalSourceKey	string	The external source key of the contract.
externalReferenceKey	string	The external reference key of the contract.
deleteAllVersions	boolean	The flag that denotes whether all the versions of the contract would be deleted or not.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the delete operation that also includes the warning or information message.

removeHoldOnContract

The custom remove hold operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
lineId	long	The identifier of the line.

Element Name	Type	Description
removeHoldDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the hold on the contract was removed.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the remove hold operation that also includes the warning or information message.

reopenContract

The custom reopen contract operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
externalSourceKey	string	The external source key of the contract.
externalReferenceKey	string	The external reference key of the contract.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the reopen operation that also includes the warning or information message.

reopenContractLine

The custom reopen contract line operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractLineId	long	The contract line identifier.
externalSourceKey	string	The external source key of the contract.
externalReferenceKey	string	The external reference key of the contract.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the reopen operation includes the warning or information message.

applyHoldOnContractUsingSetId

The custom hold operation using the set identifier for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
lineId	long	The identifier of the line.
headerExternalSourceKey	string	The external source key of the header.
headerExternalReferenceKey	string	The external reference key of the header.
lineExternalSourceKey	string	The external source key of the line.
lineExternalReferenceKey	string	The external reference key of the line.
holdUntilDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date until which the contract is on hold.
holdReasonCode	string	The reason code for the contract being on hold.
applyHldRsnSetId	long	The reason set identifier for the contract being on hold.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the apply hold operation that also includes the warning or information message.

closeContractLineUsingSetId

The custom close contract line operation using the set identifier for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractLineId	long	The contract line identifier.
closedDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The date when the contract was closed.
reasonCode	string	The reason code for the line being closed.
externalSourceKey	string	The external source key of the contract.
externalReferenceKey	string	The external reference key of the contract.
trnCodeSetId	long	The transaction code set identifier.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the close operation that also includes the warning or information message.

closeContractUsingSetId

The custom close contract operation using the set identifier for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
closedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contract was closed.
reasonCode	string	The reason code for the contract being closed.
externalSourceKey	string	The external source key of the contract.
externalReferenceKey	string	The external reference key of the contract.
trnCodeSetId	long	The transaction code set identifier.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the close operation that also includes the warning or information message.

cancelContractUsingSetId

The custom cancel contract operation using the set identifier for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
reasonCode	string	The reason code for the contract being canceled.
externalSourceKey	string	The external source key of the contract.
externalReferenceKey	string	The external reference key of the contract.
trnCodeSetId	long	The transaction code set identifier.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the cancel operation that also includes the warning or information message.

updateContractToActive

The custom activate operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
runValidationFlag	boolean	The flag that denotes whether validations are run or not.

Response Payload

Element Name	Type	Description
result	void	The result of the update operation that also includes the successfully activated contract header SDO.

getContract

The get operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
id	long	The identifier of the contract.
majorVersion	long	The major version of the contract.

Response Payload

Element Name	Type	Description
result	*Contract Deprecated*	The result of the get operation that also includes the successfully retrieved contract header SDO.

getContractByPrimaryKey

Get operation for Contract Header SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	Contract Id

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/contracts/coreAuthoring/transaction/transactionService/}ContractHeaderResult	Result of the operation includes the successfully retrieved Contract Header SDO

createContract

The create operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractHeader	*Contract Deprecated*	The contract header SDOs of all the contracts that would be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/contracts/coreAuthoring/transaction/transactionService/}ContractHeaderResult	The result of the create operation includes the successfully created contract header SDO.

updateContract

The update operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractHeader	*Contract Deprecated*	The contract header SDOs of the contract that would be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/contracts/coreAuthoring/transaction/transactionService/}ContractHeaderResult	The result of the update operation that also includes the successfully updated contract header SDO.

mergeContract

The merge operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractHeader	*Contract Deprecated*	The contract header SDOs of all the contracts that would be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/contracts/coreAuthoring/transaction/transactionService/}ContractHeaderResult	The result of the merge operation that also includes the successfully merged contract header SDO.

findContract

The find operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This field is not currently used.

Response Payload

Element Name	Type	Description
result	*Contract Deprecated*	The result of the operation that includes a list of contract header SDO satisfying the inbound criteria and any warnings or information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and the object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, which is an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale that the application would use when evaluating the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and the object's attributes in a name-value pair format.

Element Name	Type	Description

getServiceLastUpdateTime

An operation that returns the date and time when the schema files were referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined for this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for this service. For each service data object, the result includes the name, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
updateContractToActive	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.

Operation Name	Privilege Code	Privilege Name	Privilege Description
updateContractToActive	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
removeHoldOnContract	OKC_HOLD_CONTRACT_PRIV	Hold Contract	Allows the application of a hold on a contract or contract line.
mergeContractInAllStatus	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
mergeContractInAllStatus	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
mergeContractInAllStatus	OKC_CREATE_CONTRACT_PRIV	Create Contract	Provides ability to initiate contract creation.
cancelContractUsingSetId	OKC_CANCEL_CONTRACT_PRIV	Cancel Contract	Allows the cancellation of contracts and contract lines.
cancelContractUsingSetId	OKC_CANCEL_CONTRACT_VIA_WEB_SERVICE_PRIV	Cancel Contract via Web Service	Allows the cancellation of contracts and contract lines from outside the application.
reopenContractLine	OKC_CLOSE_CONTRACT_PRIV	Close Contract	Allows the closing of contracts and contract lines.
reopenContractLine	OKC_CLOSE_CONTRACT_VIA_WEB_SERVICE_PRIV	Close Contract by Web Service	Allows the closing of contracts and contract lines from outside the application..
createContract	OKC_CREATE_CONTRACT_PRIV	Create Contract	Provides ability to initiate contract creation.
applyHoldOnContractUsingSetId	OKC_HOLD_CONTRACT_PRIV	Hold Contract	Allows the application of a hold on a contract or contract line.
updateContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
updateContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
deleteContract	OKC_DELETE_CONTRACT_PRIV	Delete Contract	Allows the deletion of draft or canceled contracts.

Operation Name	Privilege Code	Privilege Name	Privilege Description
reopenContract	OKC_CLOSE_CONTRACT_PRIV	Close Contract	Allows the closing of contracts and contract lines.
reopenContract	OKC_CLOSE_CONTRACT_VIA_WEB_SERVICE_PRIV	Close Contract by Web Service	Allows the closing of contracts and contract lines from outside the application..
closeContractLineUsingSetId	OKC_CLOSE_CONTRACT_PRIV	Close Contract	Allows the closing of contracts and contract lines.
closeContractLineUsingSetId	OKC_CLOSE_CONTRACT_VIA_WEB_SERVICE_PRIV	Close Contract by Web Service	Allows the closing of contracts and contract lines from outside the application..
closeContractUsingSetId	OKC_CLOSE_CONTRACT_PRIV	Close Contract	Allows the closing of contracts and contract lines.
closeContractUsingSetId	OKC_CLOSE_CONTRACT_VIA_WEB_SERVICE_PRIV	Close Contract by Web Service	Allows the closing of contracts and contract lines from outside the application..
getContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
getContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
getContract	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
mergeContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
mergeContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
mergeContract	OKC_CREATE_CONTRACT_PRIV	Create Contract	Provides ability to initiate contract creation.
findContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.

Operation Name	Privilege Code	Privilege Name	Privilege Description
findContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
findContract	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
getContractByPrimaryKey	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
getContractByPrimaryKey	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
getContractByPrimaryKey	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
OKC_CANCEL_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CANCEL_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CANCEL_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_HOLD_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_HOLD_CONTRACT_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	Contract Management Across All Contracts Web Service	Permits an application using the CRM application ID to manage contracts across all business units.
OKC_HOLD_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_HOLD_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AUTHORING_DUTY	Grant Contract Authoring	Authors grant contracts, including terms and conditions, interactions, and customer account information.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract to the previous signed version,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			updating all allowable attributes, and submitting the amendment for approval.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_SEARCH_VIEW_DUTY	Grant Contract Search and View Access	Searches and views grant contracts for the assigned business units.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY	Contract View Access Across All Contracts	Views all contracts across an enterprise.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_FOR_CRM	Contract View Access Across All Contracts for CRM	Views all contracts across an enterprise.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	Business Practices Director	Defines and manages sales or procurement contract policies and standards. Ensures all corporate contracts conform to established guidelines and best practices.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
OKC_VIEW_CONTRACT_PRIV	ORA_CSE_ASSET_ADMINISTRATOR_JOB	Asset Administrator	An experienced functional super user who performs asset-related tasks (setup request, transactions, updates, data audit) as directed. In addition, the Asset Administrator is responsible for general asset application maintenance (for both customer-owned and enterprise-owned assets), such as process monitoring and processing error resolution.
OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	Contract Management Across All Contracts Web Service	Permits an application using the CRM application ID to manage contracts across all business units.
OKC_CLOSE_CONTRACT_VIA_WEB_SERVICE_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	Contract Management Across All Contracts Web Service	Permits an application using the CRM application ID to manage contracts across all business units.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CREATE_CONTRACT_PRIV	ORA_PON_NEGOTIATION_CONTRACT_MANAGEMENT_DUTY	Negotiation Contract Management	Create and manage procurement contracts for awarded suppliers in a negotiation.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AUTHORING_DUTY	Grant Contract Authoring	Authors grant contracts, including terms and conditions, interactions, and customer account information.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	Contract Management Across All Contracts Web Service	Permits an application using the CRM application ID to manage contracts across all business units.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AUTHORING_DUTY	Grant Contract Authoring	Authors grant contracts, including terms and conditions, interactions, and customer account information.
OKC_CANCEL_CONTRACT_VIA_WEB_SERVICE_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	Contract Management Across All Contracts Web Service	Permits an application using the CRM application ID to manage contracts across all business units.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_EDIT_CONTRACT_PRIV	ORA_PON_NEGOTIATION_CONTRACT_MANAGEMENT_DUTY	Negotiation Contract Management	Create and manage procurement contracts for awarded suppliers in a negotiation.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_CONTRACT_ AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_CONTRACT_ AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_CONTRACT_ AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_ AUTHORING_DUTY	Grant Contract Authoring	Authors grant contracts, including terms and conditions, interactions, and customer account information.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_ AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_ENTERPRISE_ CONTRACT_ADMINISTRATOR_JOB	Enterprise Contract Administrator	Performs the duties of both customer contract administrator and supplier contract administrator.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_CUSTOMER_ CONTRACT_TEAM_MEMBER_ ABSTRACT	Customer Contract Team Member	
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_SUPPLIER_CONTRACT_ MANAGER_JOB	Supplier Contract Manager	Manages a team of supplier contract administrators.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_ENTERPRISE_ CONTRACT_TEAM_MEMBER_ ABSTRACT	Enterprise Contract Team Member	
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_CUSTOMER_ CONTRACT_ADMINISTRATOR_JOB	Customer Contract Administrator	Works with sales account teams and legal to negotiate and author customer contracts. Tracks critical contract milestones, service level agreements, and assists account teams during contract renewals and amendments.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	Supplier Contract Administrator	Works with internal buyers and legal to negotiate and author supplier contracts and agreements. Tracks critical contract milestones, monitors supplier performance, and assists buyers during contract renewals, closeout, and amendments.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	Customer Contract Manager	Manages a team of customer contract administrators.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	Enterprise Contract Manager	Manages a team of enterprise contract administrators.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	Supplier Contract Team Member	

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_CSI_ASSET_SERVICE_DUTY	Asset Service Management	Provide access to view and manage service business objects, such as service request, service work order, that are related to an asset.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_CUSTOMER_ CONTRACT_ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_CUSTOMER_ CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_SUPPLIER_CONTRACT_ ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_ENTERPRISE_ CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_ AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_ MANAGER_JOB	ORA_OKC_CONTRACT_ AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_ CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_ AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_ CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_ AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_ CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_ AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_ ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_ AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY	Contract Setup	Contract Setup
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY	Contract Setup	Contract Setup
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY	Contract Setup	Contract Setup
ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	ORA_OKC_CONTRACT_TERMS_LIBRARY_ADMINISTRATION_DUTY	Contract Terms Library Administration	Manages the Contract Terms Library, including defining and maintaining terms templates, clauses, Contract Expert rules, sections, variables, folders, questions, constants, and numbering schemes.
ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	ORA_OKC_CONTRACT_TERMS_LIBRARY_INQUIRY_DUTY	Contract Terms Library Search and View Access	Searches and views Contract Terms Library objects, including terms templates, clauses, Contract Expert rules, sections, variables, folders, questions, constants, and numbering schemes.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_OVERRIDE_DUTY	Contract Terms and Conditions Override Controls	Edits protected clauses, and deletes mandatory clauses and sections in addition to authoring nonstandard terms and conditions.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_FUN_FSCM_LOAD_INTERFACE_ADMIN_DUTY	FSCM Load Interface Administration	Manages load interface file for import

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_CSI_INSTALLED_BASE_WEB_SERVICE_DUTY	Installed Base Web Service	Provide service access to installed base by using the REST services.
ORA_OKC_GRANT_CONTRACT_SEARCH_VIEW_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_FOR_CRM	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_MNT_MAINTENANCE_SETUP_DUTY	Maintenance Management Setup Administration	Provides access to perform maintenance management setup tasks.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_MNT_MAINTENANCE_SERVICE_DUTY	Maintenance Management Web Service	Provides service access to maintenance asset management and work execution by using the REST services.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_CSE_MANAGE_CUSTOMER_ASSETS_DUTY	Manage Customer Assets	Provides access to the Edit and View Customer Assets including the View Pages in the History Tab.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_FOR_CRM	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_RCS_SCM_COMMON_WEB_SERVICE_DUTY	Supply Chain Common Web Service	Provides web service access to supply chain common to perform activities such as viewing inventory organizations, plant parameters, carriers and units of measure list of values.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description

Contract Deprecated

The contract header view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/transaction/transactionService/}ContractHeader

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Contract Billing Control Deprecated*
Contains	*Contract Header Descriptive Flexfield Attributes*
Contains	*Contract Line Deprecated*
Contains	*Contract Party*
Contains	*Sales Credit*
Contains	*Contract Bill Plans*
Contains	*Contract Revenue Plans*
Contains	*Contract Related Document*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdjustmentBasis	string	The adjustment basis for the contract.
AgreedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The agreed amount for the contract.
AgreementAmtLimit	decimal	The agreement amount limit for the contract.
AgreementEnabledFlag	boolean	The flag that denotes whether agreement is enabled for the contract.
AmendmentEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The effective date of the amendment.
ApTermsId	long	The terms identifier for accounts payable.
AutoReleaseInvoice	string	The auto release invoice.
BillPlan	*Contract Bill Plans*	The bill plan of the contract.
BillSequence	long	The sequence in which the bill was generated.
BillToAcctId	long	The unique identifier of the bill-to account.
BillToSiteUseId	long	The identifier of the customer site identifier where the invoices are sent.
BilledAtSource	string	Indicates whether the contract was billed at source.
BillingSalesrepId	long	The unique identifier of the billing sales person.
BilltoLocationId	long	The unique identifier of the bill-to location.
BuyOrSell	string	Indicates the intent of the contract; whether it is a buy or a sell contract.
CarrierId	long	The unique identifier of the carrier.
Cognomen	string	The name of the contract.
CommitmentAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount committed for the contract.
ContractHeaderDFFVL	*Contract Header Descriptive Flexfield Attributes*	The flex field element of the contract header.

Name	Type	Description
ContractId	long	Contract Id • Primary Key
ContractLine	*Contract Line Deprecated*	The contract line element.
ContractNumber	string	The number of the contract.
ContractOwnerId	long	The unique identifier of the contract owner.
ContractParty	*Contract Party Deprecated*	The contract party element.
ContractRelatedDocument	*Contract Related Document Deprecated*	The related document of the contract.
ContractTypeId	long	The unique identifier of the contract type.
ContributionPercent	decimal	The contribution percent of the contract.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustPoNumber	string	The customer PO number.
Description	string	The free text description of the record.
DiscountPercent	decimal	The discount in percentage of the contract applied to the bill rate.
EncumbranceLevel	string	The encumbrance level of the contract.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
EstimatedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated amount of the contract.
ExemptCertificateNumber	string	The exempted certificate number.
ExemptReasonCode	string	The code associated with the exemption reason.

Name	Type	Description
ExternalReferenceKey	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalSourceKey	string	The unique identifier of the source application where the contract was created. Used to identify records created through external web services.
Fob	string	The Free on Board of the Contract.
FreightTerms	string	The freight terms associated with the contract.
HeaderBillingControl	*Contract Billing Control Deprecated*	The billing control element of the contract.
HoldReasonCode	string	The code identifying the hold reason.
HoldReasonCodeSetId	long	The unique identifier of the hold reason code set.
HoldUntilDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date until which the contract is on hold.
Id	long	The unique identifier of the contract.
InvConvRateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the invoice conversion rate was set up.
InvConvRateDateType	string	The type of the invoice conversion rate date.
InvConvRateType	string	The type of the invoice conversion rate.
InvOrganizationId	long	The unique identifier of the item master organization.
InvTrxTypeId	long	The unique identifier of the invoice transaction type.
LastRevRecogDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the revenue was last recognized.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LegalEntityId	long	The unique identifier of the legal entity.

Name	Type	Description
LineAutonumberEnabledFlag	boolean	Indicates whether a contract line can be automatically numbered.
MajorVersion	long	The major version of the record.
MinReleaseAmt	decimal	The minimum release amount.
NetInvoiceFlag	boolean	Indicates whether the invoice is a net invoice.
OrgId	long	The unique identifier of the business unit.
OrigSystemId1	long	The unique identifier of the original system.
OrigSystemReference1	string	The reference of the original system.
OrigSystemSourceCode	string	The code identifying the original system source.
OutputTaxClassificationCode	string	The code identifying the output tax classification.
OverallRiskCode	string	The code identifying the overall risk.
OwningOrgId	long	The unique identifier of the owning organization.
PartyId	long	The unique identifier of the contact party.
PriceList	string	The price list.
RecvInvOrgId	long	The unique identifier of the receiving inventory organization.
RevenuePlan	*Contract Revenue Plan Deprecated*	The revenue plan element.
SalesAcctId	long	The unique identifier of the sales account.
SalesCredit	*Sales Credit Deprecated*	The sales credit element.
ShipInvOrgId	long	The unique identifier of the shipping inventory organization.
ShipToAcctId	long	The unique identifier of the ship-to account.

Name	Type	Description
ShipToSiteUseId	long	The unique identifier of the ship-to site.
ShiptoLocationId	long	The ship-to site use location.
ShortDescription	string	The short description.
SoldToAcctId	long	The unique identifier of the sold-to account.
SoldToSiteId	long	The unique identifier of the sold-to site.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
StsCode	string	The code identifying the status.
SupplierId	long	The unique identifier of the supplier.
SupplierSiteId	long	The unique identifier of the supplier site.
TaxAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The tax amount.
TaxExemptionControl	string	The tax exemption control.
TermsTemplateId	long	The unique identifier of the terms template.
TrnCode	string	The code identifying the cancel or the close reason.
TrnCodeSetId	long	The unique identifier of the cancel or the close reason code set.
VersionDescription	string	The description of the version.
VersionType	string	The type of the version.
WebServiceFlag	boolean	The flag identifying the web service.

Contract Assigned Billing Extension Deprecated

The set of billing extensions, that define custom invoice and revenue processing, assigned to a project contract bill or revenue plan.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractService/}AssignmentDetail

Logical Business Objects

- Projects
- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Revenue Plan Deprecated*
Contained by	*Contract Bill Plans*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	ndicator to check if assigned billing extension is active.
AssignmentDetailId	long	Unique identifier of the assigned billing extension for the bill or revenue plan. • Primary Key
CalculationLevelCode	string	Indicates the level at which the billing event amount is calculated by the billing extension. Values are Contract Line and Associated Project.
CurrencyCode	string	Bill transaction currency of the assigned billing extension amount on the bill or revenue plan.

Name	Type	Description
ExtensionAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	User-entered amount in bill transaction currency used by the billing extension to create an automatic billing event.
ExternalReferenceKey	string	Unique identifier of the assigned billing extension in the source application. Used to identify billing extension assignments to contract bill plans created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the assigned billing extension originates. Used to identify billing extension assignments created through external webservices.
MajorVersion	long	Version of the contract containing this particular set of assigned billing extension details. • Primary Key
Percentage	decimal	User-specified percentage to apply in calculating automatic events by the billing extension.

Contract Bill Plan Descriptive Flexfields

The contract bill plan descriptive flex fields.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/}BilllPlanDff

Logical Business Objects

- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Revenue Plan Deprecated*
Contained by	*Contract Bill Plans*
Contained by	*Contract Bill Plan*

Relationship Type	Object or Service
Contained by	*Contract Revenue Plan*
Handled by	*Contract Service Version 2*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillPlanId	long	The unique identifier of the bill plan. • Primary Key
MajorVersion	long	The major version on which the bill plan was defined. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Contract Bill Plan Translation Deprecated

The complete set of language translations for the multilingual attributes of bill plan and revenue plan.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractService/}BillPlanTranslation

Logical Business Objects

- Projects
- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Revenue Plan Deprecated*
Contained by	*Contract Bill Plans*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillPlanId	long	Unique identifier of the bill plan that contains details on how contract lines are to be invoiced. • Primary Key
BillPlanName	string	Translated name of the bill plan that contains details on how contract lines are to be invoiced.
InvoiceComment	string	User-specified translated text intended for printing on invoices created for this bill plan.
InvoiceInstructions	string	Internal translated billing instructions that will not appear on the customer invoice.
Language	string	Indicates into which language the bill plan is translated. • Primary Key
MajorVersion	long	Version of the contract containing this particular set of bill plan translation details. • Primary Key
SourceLang	string	Indicates which language is the source language of the bill plan.

Contract Bill Plans

The set of instructions, assigned to one or many contract lines, on how to invoice the project contract customer.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractService/}BillPlan

Logical Business Objects

- Projects
- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Contract Bill Plan Descriptive Flexfields*
Contains	*Job Title Override*
Contains	*Person Rate Override*
Contains	*Contract Assigned Billing Extensions*
Contains	*Labor Multiplier Override*
Contains	*Contract Bill Plan Translation*
Contains	*Contract Job Assignment Override*
Contains	*Nonlabor Rate Override*
Contains	*Contract Job Rate Override*
Contained by	*Contract Deprecated*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AssignmentDetail	*Contract Assigned Billing Extension Deprecated*	Section that displays the billing extensions assigned to the bill plan.
BillMethodId	long	Unique identifier of the invoice method used to invoice against this bill plan.

Name	Type	Description
BillPlanDescriptiveFlexField	*Contract Bill Plan Descriptive Flexfields*	A set of configurable fields that captures customer specific business process information on the contract bill plan.
BillPlanId	long	Unique identifier of the contract bill plan. • Primary Key
BillPlanName	string	Name of the bill plan that contains details on how contract lines are to be invoiced.
BillPlanTranslation	*Contract Bill Plan Translation Deprecated*	A complete set of language translations for the multilingual attributes of a bill plan and revenue plan.
BillSetNum	decimal	Indicates which bill plans for the same contract can be invoiced together. Transactions for bill plans with a common bill set number will be invoiced on the same invoice.
BillToContactId	long	Unique identifier of the bill-to customer contact person on a bill plan.
BillToCustAcctId	long	Unique identifier of the bill-to customer account that receives the invoice and pays the invoice amount.
BillToSiteUseId	long	Unique identifier of the bill-to customer site that is responsible for receiving and paying the invoice amount.
BillingCycleId	long	Unique identifier of the frequency at which invoices are created for the bill plan.
BurdenSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the burden schedule.
BurdenSchId	long	Unique identifier of the burden schedule specified in the bill plan.
DocNumber	string	A unique identifier of the letter of credit document issued to the award on the bill plan.
EmpBillRateSchId	long	Unique identifier of the person rate schedule used to derive the bill rate for labor transactions.

Name	Type	Description
EnableLbrBillXtnsnFlag	boolean	Indicator to allow usage of the labor billing extension when deriving the bill rate for labor transactions.
EnableNlBillXtnsnFlag	boolean	Indicator to allow usage of the nonlabor billing extension when deriving the bill rate for nonlabor transactions.
EventsInvoiceFormatId	long	Unique identifier of the invoice format that is used to group events invoiced against the bill plan into invoice lines.
ExternalReferenceKey	string	Unique identifier of the bill plan in the source application. Used to identify contract bill plans created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the bill plan originates. Used to identify contract bill plans created through external webservices.
FirstBillingOffsetDays	decimal	The number of days after the commencement of the project, that the first invoice will be generated.
InvoiceComment	string	User-specified text intended for printing on invoices created for this bill plan.
InvoiceCurrDateType	string	The source of the bill transaction to invoice and revenue currency conversion date for a bill plan, such as transaction date or fixed date.
InvoiceCurrExchgDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on a bill plan from which a conversion rate is used to convert the amount in the bill transaction currency into the invoice and revenue currency.
InvoiceCurrRateType	string	The source of the bill transaction to invoice and revenue currency conversion rate for a bill plan, such as user defined, spot, or corporate.
InvoiceCurrencyCode	string	The name of the currency in which the invoice is issued and revenue is recognized. It is also known as the entered currency in Oracle Fusion General Ledger for invoice and revenue accounting entries.
InvoiceCurrencyOptCode	string	The type of currency that is used to determine the invoice and revenue currency for invoices and revenue that are created for the contract lines associated with the bill plan. The billing

Name	Type	Description
		currency type can be the contract currency, bill transaction currency, or any user-specified currency.
InvoiceInstructions	string	Internal billing instructions that will not appear on the customer invoice.
JobAssignmentOverride	*Contract Job Assignment Override*	Section that displays the job assignment overrides for a bill plan.
JobBillRateSchId	long	Unique identifier of the job rate schedule used to derive the bill rate for labor transactions.
JobRateOverride	*Contract Job Rate Override*	Section that displays the job rate overrides for a bill plan.
JobTitleOverride	*Job Title Override*	Name of the object that stores all the job title overrides for a bill plan or revenue plan.
LaborBillBasisCode	string	Labor cost basis code for cost reimbursable.
LaborDiscountPercentage	decimal	The factor by which all bill rates derived from the person or job rate schedule for this bill plan are to be discounted.
LaborDiscountReasonCode	string	Explains the reason for the discount percentage offered against the person and job rate schedules specified in the bill plan.
LaborInvoiceFormatId	long	Unique identifier of the invoice format that is used to group labor expenditure items invoiced against the bill plan into invoice lines.
LaborMarkupPercentage	decimal	Labor Markup Percentage.
LaborMultiplierOverride	*Labor Multiplier Override*	Section that displays the labor multiplier overrides for a bill plan.
LaborSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the person or job rate schedule.
LaborTpSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the intercompany labor transfer price schedule.
LaborTpScheduleId	long	Unique identifier of the transfer price labor schedule used to derive the bill rate for intercompany labor transactions.

Name	Type	Description
LocFlag	boolean	Indicates the bill plan uses letter of credit for billing.
MajorVersion	long	Version of the contract containing this particular set of bill plan details. • Primary Key
NlBillBasisCode	string	Nonlabor cost basis code for cost reimbursable.
NlBillRateSchId	long	Unique identifier of the nonlabor rate schedule used to derive the bill rate for nonlabor transactions.
NlDiscountPercentage	decimal	The factor by which all bill rates derived from the nonlabor rate schedule for this bill plan are to be discounted.
NlDiscountReasonCode	string	Explains the reason for the discount percentage offered against the nonlabor rate schedule specified in the bill plan.
NlInvoiceFormatId	long	Unique identifier of the invoice format that is used to group nonlabor expenditure items invoiced against the bill plan into invoice lines.
NlMarkupPercentage	decimal	The factor by which the bill amount will be calculated over the nonlabor cost.
NlSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The fixed date used to determine the effective bill rates of the standard non labor bill rate schedule
NlTpSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the nonlabor rate schedule.
NlTpScheduleId	long	Unique identifier of the transfer price labor schedule used to derive the bill rate for intercompany nonlabor transactions.
NonLaborRateOverride	*Non-labor Rate Override Deprecated*	Section that displays the nonlabor rate overrides for a bill plan.
OnHoldFlag	boolean	Indicator to check if bill plan is eligible for invoice generation.
PaymentTermId	long	Terms used to schedule payments and to calculate due dates, discount dates, and discount amounts for each invoice.

Name	Type	Description
PersonRateOverride	*Person Rate Override Deprecated*	Section that displays the person rate overrides for a bill plan.
ReportTypeCode	string	Indicates the federal invoice format that is used for bill presentment.

Contract Billing Control Deprecated

The set of hard and soft limits within a date range, at the contract header and contract line levels, that controls which transactions and the total amount of transactions that can be invoiced or recognized for revenue for a contract and contract line.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractService/}BillingControl

Logical Business Objects

- Projects
- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Deprecated*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	Indicator to check if billing control is active.
BillingControlId	long	Unique identifier of a billing control defined on the contract or contract line. • Primary Key

Name	Type	Description
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which a billing control is no longer available for validating a transaction for billing.
ExternalReferenceKey	string	Unique identifier of the billing control in the source application. Used to identify contract billing controls created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the billing control originates. Used to identify contract billing controls created through external webservices.
HardLimitAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The maximum inception-to-date billed amount for transactions applicable to this billing control at which an error is to be given that the hard limit has been reached. Billing can not continue beyond the hard limit amount.
HardLimitCurrencyCode	string	
MajorVersion	long	Version of the contract containing this particular set of billing control details. • Primary Key
RbsElementId	long	Unique identifier of the resource associated with the billing control on the contract.
SoftLimitAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The inception-to-date billed amount for transactions applicable to this billing control at which a warning is to be given that the soft limit has been reached. Billing can continue beyond the soft limit amount.
SoftLimitCurrencyCode	string	
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date before which a billing control is no longer available for validating a transaction for billing.

Contract Header Descriptive Flexfield Attributes

The contract header flex field view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/header/flex/header/}ContractHeaderFlexfield

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Deprecated*
Contained by	*Contract*
Handled by	*Contract Service Version 2*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContractId	long	Contract Header Flexfield Unique ID • Primary Key
Id	long	The unique identifier of the contract header flex field.
MajorVersion	long	The major version of the record.
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Contract Job Assignment Override

The negotiated job assigned to a specific person on a contract bill or revenue plan, rather than the normal job for that person.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractService/}JobAssignmentOverride

Logical Business Objects

- Projects
- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Revenue Plan Deprecated*
Contained by	*Contract Bill Plans*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillingTitle	string	Name of the override job title being assigned to the person for this bill plan. Used to display on the invoice to the customer.
ContractLineId	long	Unique identifier of the contract line for which the job assignment override is defined.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date to which a job assignment override applies.
ExternalReferenceKey	string	Unique identifier of the job assignment override in the source application. Used to identify job assignment overrides created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the job assignment override originates. Used to identify job assignment overrides created through external webservices.
JobAssignmentOverrideId	long	Unique identifier of the job assignment override on the bill plan that identifies the negotiated job

Name	Type	Description
		assigned to a specific person, rather than the normal job for that person. • Primary Key
JobId	long	Unique identifier of the override job being assigned to the person for this bill or revenue plan.
MajorVersion	long	Version of the contract containing this particular set of job assignment override details. • Primary Key
PersonId	long	Unique identifier of the person for whom the job assignment override is defined.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date from which a job assignment override applies.

Contract Job Rate Override

The job rate overrides for a bill or revenue plan.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractService/}JobRateOverride

Logical Business Objects

- Projects
- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Revenue Plan Deprecated*
Contained by	*Contract Bill Plans*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillRateOverrideId	long	Unique identifier of the job rate override. • Primary Key
ContractLineId	long	Unique identifier of the contract line for which the job rate override is defined.
DiscountPercentage	decimal	The factor by which the bill rate derived for the job and bill or revenue plan is to be discounted.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date to which a job rate override applies.
ExternalReferenceKey	string	Unique identifier of the job rate override in the source application. Used to identify job rate overrides created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the job rate override originates. Used to identify job rate overrides created through external webservices.
JobId	long	Unique identifier of the job for which the job rate override is defined.
MajorVersion	long	Version of the contract containing this particular set of job rate override details. • Primary Key
Rate	decimal	A unit rate override for the job and bill or revenue plan.
RateCurrencyCode	string	Currency of the job rate override on the bill or revenue plan.
RateDiscReasonCode	string	Explains the reason for the discount percentage offered against the job.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date from which a job rate override applies.

Contract Line Deprecated

The contract line view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/transaction/transactionService/}ContractLine

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Contract Line Deprecated*
Contains	*Contract Party*
Contains	*Contract Line Descriptive Flexfield Attributes*
Contained by	*Contract Deprecated*
Contained by	*Contract Line Deprecated*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AgreedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The agreed amount on the contract line.
CleId	long	The unique identifier of the line.
Cognomen	string	The contract line.
Comments	string	The comments for the record.

Name	Type	Description
ContractLineDFFVL	*Contract Line Descriptive Flexfield Attributes Deprecated*	The contract line flex field element.
ContractParty	*Contract Party Deprecated*	The contract party element.
ContractSubLine	*Contract Line Deprecated*	The sub line of the contract.
CustPoNumber	string	The customer PO number.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
Description	string	The free text description of the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
ExemptCertificateNumber	string	The exempted certificate number.
ExemptReasonCode	string	The code associated with the exemption reason.
ExternalItemKey	string	The external item key.
ExternalItemReference1	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalItemReference2	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalItemReference3	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalItemReference4	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalItemReference5	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.

Name	Type	Description
ExternalItemSource	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalReferenceKey	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalSourceKey	string	The unique identifier of the source application where the contract line was created. Used to identify records created through external web services.
HoldReasonCode	string	The code identifying the hold reason.
HoldReasonCodeSetId	long	The unique identifier of the hold reason code set.
HoldUntilDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date until which the contract is on hold.
Id	long	The unique identifier of the contract line.
ItemName	string	The name of the item.
JtotObject1Code	string	The Jtot object code.
LineAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount in the contract line.
LineId	long	Line Id • Primary Key
LineNumber	string	The line number.
LineTypeId	long	The unique identifier of the line type.
MajorVersion	long	The major version of the record.
Name	string	The line name.
NumOfItem	decimal	The number of items.
Object1Id1	long	The unique identifier of the item.

Name	Type	Description
Object1Id2	long	The unique identifier of the item.
OrigSystemId1	decimal	The unique identifier of the originating system.
OrigSystemReference1	string	The reference of the originating system.
OrigSystemSourceCode	string	The code identifying the originating system source.
OutputTaxClassificationCode	string	The code identifying the output tax classification.
PriceUnit	decimal	The price unit.
ShipInvOrgId	long	The unique identifier of the shipping inventory organization.
ShipToAcctId	long	The unique identifier of the ship-to account.
ShipToSiteUseId	long	The unique identifier of the ship-to site.
SourceCodeClass	string	The class of the source code.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
StatusCode	string	The pre-defined code used to indicate the status.
TaxAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The tax amount.
TaxExemptionControl	string	The tax exemption control.
TrnCode	string	The code identifying the close or the cancel reason.
TrnCodeSetId	long	The unique identifier of the close or the cancel reason code set.
UomCode	string	The code identifying the unit of measure.

Contract Line Descriptive Flexfield Attributes Deprecated

The contract line flex field view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/lines/flex/lines/}ContractLineDescFlexfield

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Line Deprecated*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Id	long	The unique identifier of the contract line flex field.
LineId	long	Line Id • Primary Key
MajorVersion	long	The major version of the record.
ObjectVersionNumber	int	Object Version Number
SourceCodeClass	string	The code identifying of the source system.
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Contract Party Deprecated

The contract party view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/transaction/transactionService/}ContractParty

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Contract Party Descriptive Flexfield Attributes*
Contains	*Contract Party Contact*
Contains	*Contract Party Address*
Contained by	*Contract Deprecated*
Contained by	*Contract Line Deprecated*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContractPartyAddress	*Contract Party Address*	The address of the contract party.
ContractPartyContact	*Contract Party Contact Deprecated*	The contact of the contract party.
ContractPartyDFFVL	*Contract Party Descriptive Flexfield Attributes*	The flex field element of the contract party.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.

Name	Type	Description
ExternalReferenceKey	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalSourceKey	string	The unique identifier of the source application where the contract party was created.
Id	long	The unique identifier of the contract party. • Primary Key
JtotObject1Code	string	The Jtot object code.
MajorVersion	long	The major version of the record. • Primary Key
Object1Id1	long	The unique identifier of the party.
RleCode	string	The code identifying the party role.

Contract Party Address

The contract party address view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/transaction/transactionService/}ContractPartyAddress

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Party Deprecated*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddressId	long	The identifier of the contact party address.
AddressSource	string	The address source of the contact party.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
ExternalReferenceKey	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalSourceKey	string	The unique identifier of the source application where the contract party address was created. Used to identify records created through external web services.
Id	long	The unique identifier of the contract party address. • Primary Key
MajorVersion	long	The major version of the record. • Primary Key
SourceObjectCode	string	The code of the source object.
SourceObjectId	long	The unique identifier of the source object.

Contract Party Contact Deprecated

The contract party contact view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/transaction/transactionService/}ContractPartyContact

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Party Deprecated*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevel	string	The level of the access in the hierarchy.
CroCode	string	The role code of the contact.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
ExternalReferenceKey	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalSourceKey	string	The unique identifier of the source application where the contract part contact was created. Used to identify records created through external web services.
Id	long	The unique identifier of the contract party contact. • Primary Key
JtotObject1Code	string	The Jtot object code.
MajorVersion	long	The major version of the record. • Primary Key
Object1Id1	long	The unique identifier of the contract.
Object1Id2	long	The unique identifier of the item.

Name	Type	Description
OwnerYn	string	Indicates whether the contact is the owner of the contract.

Contract Party Descriptive Flexfield Attributes

The contract party flex field view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/}ContractPartyFlexfield

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Party*
Contained by	*Contract Party Deprecated*
Handled by	*Contract Service Version 2*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Id	long	The unique identifier of the contract party flex field. • Primary Key
MajorVersion	long	The major version of the record. • Primary Key

Name	Type	Description
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Contract Related Document Deprecated

The related document view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/transaction/transactionService/}ContractRelatedDocument

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Deprecated*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
ExternalReferenceKey	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalSourceKey	string	The unique identifier of the source application where the contract related document was

Name	Type	Description
		created. Used to identify records created through external web services.
Id	long	The unique identifier of the related document. • Primary Key
JtotObject1Code	string	The Jtot object code.
Object1Id1	long	The unique identifier of the related contract.
RtyCode	string	The code identifying the relationship.

Contract Revenue Plan Deprecated

The set of instructions, assigned to one or many contract lines, on how to recognize project contract revenue.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractService/}RevenuePlan

Logical Business Objects

- Projects
- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Contract Bill Plan Descriptive Flexfields*
Contains	*Person Rate Override*
Contains	*Contract Assigned Billing Extension Deprecated*
Contains	*Labor Multiplier Override*
Contains	*Contract Bill Plan Translation*
Contains	*Contract Job Assignment Override*

Relationship Type	Object or Service
Contains	*Nonlabor Rate Override*
Contains	*Contract Job Rate Override*
Contained by	*Contract Deprecated*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AssignmentDetail	*Contract Assigned Billing Extension Deprecated*	Section that displays the billing extensions assigned to the revenue plan.
BillMethodId	long	Unique identifier of the revenue method used to recognize revenue against this revenue plan.
BillPlanId	long	Unique identifier of the contract revenue plan. • Primary Key
BillPlanName	string	Name of the revenue plan that contains details on how contract lines are to be recognized for revenue.
BurdenSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the burden schedule.
BurdenSchId	long	Unique identifier of the burden schedule specified in the revenue plan.
EmpBillRateSchId	long	Unique identifier of the person rate schedule used to derive the bill rate for labor transactions.
EnableLbrBillXtnsnFlag	boolean	Indicator to allow usage of the labor billing extension when deriving the bill rate for labor transactions.
EnableNlBillXtnsnFlag	boolean	Indicator to allow usage of the nonlabor billing extension when deriving the bill rate for nonlabor transactions.

Name	Type	Description
ExternalReferenceKey	string	Unique identifier of the revenue plan in the source application. Used to identify contract revenue plans created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the revenue plan originates. Used to identify contract revenue plans created through external webservices.
JobAssignmentOverride	*Contract Job Assignment Override*	Section that displays the job assignment overrides for a revenue plan.
JobBillRateSchId	long	Unique identifier of the job rate schedule used to derive the bill rate for labor transactions.
JobRateOverride	*Contract Job Rate Override*	Section that displays the job rate overrides for a revenue plan.
LaborBillBasisCode	string	Labor cost basis code for cost reimbursable
LaborDiscountPercentage	decimal	The factor by which all bill rates derived from the person or job rate schedule for this revenue plan are to be discounted.
LaborDiscountReasonCode	string	Explains the reason for the discount percentage offered against the person and job rate schedules specified in the revenue plan.
LaborMarkupPercentage	decimal	Labor Markup Percentage
LaborMultiplierOverride	*Labor Multiplier Override*	Section that displays the labor multiplier overrides for a revenue plan.
LaborSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the person or job rate schedule.
LaborTpSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the intercompany labor transfer price schedule.
LaborTpScheduleId	long	Unique identifier of the transfer price labor schedule used to derive the bill rate for intercompany labor transactions.
MajorVersion	long	Version of the contract containing this particular set of revenue plan details. • Primary Key

Name	Type	Description
NlBillBasisCode	string	Identifies if applicable nonlabor expenditure items must be billed at raw cost or burdened cost.
NlBillRateSchId	long	Unique identifier of the nonlabor rate schedule used to derive the bill rate for nonlabor transactions.
NlDiscountPercentage	decimal	The factor by which all bill rates derived from the nonlabor rate schedule for this revenue plan are to be discounted.
NlDiscountReasonCode	string	Explains the reason for the discount percentage offered against the nonlabor rate schedule specified in the revenue plan.
NlMarkupPercentage	decimal	
NlSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the nonlabor rate schedule.
NlTpSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the intercompany nonlabor transfer price schedule.
NlTpScheduleId	long	Unique identifier of the transfer price labor schedule used to derive the bill rate for intercompany nonlabor transactions.
NonLaborRateOverride	*Non-labor Rate Override Deprecated*	Section that displays the nonlabor rate overrides for a revenue plan.
OnHoldFlag	boolean	Indicator to check if revenue plan is eligible for revenue generation.
PersonRateOverride	*Person Rate Override Deprecated*	Section that displays the person rate overrides for a revenue plan.
RevenuePlanDescriptiveFlexField	*Contract Bill Plan Descriptive Flexfields*	
RevenuePlanTranslation	*Contract Bill Plan Translation Deprecated*	

Contract Service Version 2

The external service of the contract.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractService

Service WSDL URL: https://servername/fscmService/ContractServiceV2?WSDL

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Contract Party*
Handles	*Contract*
Handles	*Contract Header Descriptive Flexfield Attributes*
Handles	*Contract Party Contact Descriptive Flexfield Attributes*
Handles	*Contract Charge*
Handles	*Contract Line Language Translation*
Handles	*Job Title Override SDO*
Handles	*Contract Document*
Handles	*Nonlabor Rate Override SDO*
Handles	*Contract Question Responses*
Handles	*Contract Related Document*
Handles	*Sales Credit*

Relationship Type	Object or Service
Handles	*Job Assignment Override SDO*
Handles	*Contract Party Descriptive Flexfield Attributes*
Handles	*Contract Header Language Translation*
Handles	*Event Payload*
Handles	*Contract Bill Plan Translations*
Handles	*Contract Covered Asset*
Handles	*Person Rate Override SDO*
Handles	*Contract Bill Plan*
Handles	*Pricing Terms Sales Agreement*
Handles	*Labor Multiplier Override SDO*
Handles	*Contract Renewal Request*
Handles	*Sign Contract Party Details*
Handles	*Event Parameters*
Handles	*Contract Party Language Translation*
Handles	*Sign Contract*
Handles	*Contract Billing Control*
Handles	*Contract Tier Header*
Handles	*Contract Renewal Response*
Handles	*Revert Contract*
Handles	*Contract Party Contact*
Handles	*Contract Charge Component*

Relationship Type	Object or Service
Handles	*Job Rate Override SDO*
Handles	*Contract Variable Values*
Handles	*Get Contract Documents List*
Handles	*Internal Contract Line Attributes SDO*
Handles	*Contract Line Descriptive Flexfield Attributes*
Handles	*Amend Contract*
Handles	*Contract Associated Project*
Handles	*Contract Revenue Plan*
Handles	*Cancel Contract Line*
Handles	*Contract Bill Plan Descriptive Flexfields*
Handles	*Contract Assigned Billing Extension*
Handles	*Contract Tier Line*
Handles	*Close Service Contract*
Handles	*Get Contract Document Content*
Handles	*Contract Line*
Handles	*Contract Manual Price Adjustment*
Handles	*Contract Service Billing Summary*

Operations

- *mergeContractInAllStatus*
- *deleteContract*
- *updateContractToActive*
- *addContractDocuments*
- *applyHoldOnContract*

- *closeContract*
- *cancelContract*
- *removeHoldOnContract*
- *reopenContract*
- *submitContractForApproval*
- *previewContract*
- *previewContractInHTML*
- *previewContractInRTF*
- *runContractExpert*
- *amendContract*
- *revertContract*
- *cancelContractLine*
- *closeServiceContract*
- *getContractDocuments*
- *getContractDocumentFileContents*
- *renewContract*
- *raiseUserTransitionEvent*
- *getContract*
- *signContract*
- *getContractValidDocumentCategories*
- *getContractByPrimaryKey*
- *createContract*
- *updateContract*
- *mergeContract*
- *findContract*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

mergeContractInAllStatus

The custom merge operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractHeader	*Contract*	The contract header SDOs of all the contracts that would be merged.

Element Name	Type	Description
targetStatusCode	string	The target status code after the merge operation.
closeDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contract was closed.
closeReasonCode	string	The reason code for closing a contract.
cancelReasonCode	string	The reason code for canceling a contract.
versionFlag	boolean	The flag that denotes whether a new version of the contract would be created for the merge operation.

Response Payload

Element Name	Type	Description
result	*Contract*	The result of the merge operation that also includes the successfully merged contract header SDO.

deleteContract

The custom delete operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
id	long	The unique identifier of the contract.
majorVersion	long	The major version of the contract.
externalSourceKey	string	The external source key of the contract.
externalReferenceKey	string	The external reference key of the contract.
deleteAllVersions	boolean	The flag that denotes whether all the versions of the contract would be deleted or not.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the delete operation that also includes the warning or information message.

updateContractToActive

The custom active operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The unique identifier of the contract.
runValidationFlag	boolean	The flag that denotes whether validations are run or not.
emptyResponseFlag	boolean	The flag that indicates whether response payload is needed or not

Response Payload

Element Name	Type	Description
result	*Contract*	The result of the update operation that also includes the successfully activated Contract header SDO.

addContractDocuments

The custom operation for adding documents to contracts.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractDocuments	*Contract Document*	The contract document that would be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the add operation that also includes the warning or information message.

applyHoldOnContract

The custom hold operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
lineId	long	The identifier of the line.
headerExternalSourceKey	string	The external source key of the header.
headerExternalReferenceKey	string	The external reference key of the header.
lineExternalSourceKey	string	The external source key of the line.
lineExternalReferenceKey	string	The external reference key of the line.
holdUntilDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date until which the contract is on hold.
holdReasonCode	string	The reason code for the contract being on hold.
applyHldRsnSetId	long	The reason set identifier for the contract being on hold.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the hold operation that also includes the warning or information message.

closeContract

The custom close operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
contractLineId	long	The contract line identifier.
headerExternalSourceKey	string	The external source key of the header.
headerExternalReferenceKey	string	The external reference key of the header.
lineExternalSourceKey	string	The external source key of the line.
lineExternalReferenceKey	string	The external reference key of the line.
closedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contract was closed.
closeReasonCode	string	The close reason code of the contract.
trnCodeSetId	long	The transaction code set identifier.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the close operation that also includes the warning or information message.

cancelContract

The custom cancel operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
reasonCode	string	The reason code for the contract being canceled.

Element Name	Type	Description
externalSourceKey	string	The external source key of the contract.
externalReferenceKey	string	The external reference key of the contract.
trnCodeSetId	long	The transaction code set identifier.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the cancel operation that also includes the warning or information message.

removeHoldOnContract

The custom remove hold operation for the contract header and the contract line SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
lineId	long	The identifier of the line.
headerExternalSourceKey	string	The external source key of the header.
headerExternalReferenceKey	string	The external reference key of the header.
lineExternalSourceKey	string	The external source key of the line.
lineExternalReferenceKey	string	The external reference key of the line.
removeHoldDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the hold on the contract was removed.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the remove hold operation that also includes the warning or information message.

reopenContract

The custom reopen operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
contractLineId	long	The contract line identifier.
headerExternalSourceKey	string	The external source key of the header.
headerExternalReferenceKey	string	The external reference key of the header.
lineExternalSourceKey	string	The external source key of the line.
lineExternalReferenceKey	string	The external reference key of the line.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the reopen operation that also includes the warning or information message.

submitContractForApproval

Custom submit for approval operation for Contract Header SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	Contract ID

Element Name	Type	Description
externalSourceKey	string	Eaternal Source Key
externalReferenceKey	string	Eaternal Reference Key
submitOnWarningsFlag	boolean	Flag that instructs to proceed with submit even there are any validation warnings

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}StringResult	Returns list of strings. First element gives whether contract is submitted or not and batch id used for validation separated by : ex. SUBMITTED:123456789 or NOT_SUBMITTED:123456789. Second element onwards it will have validation messages in the format Severity:Validation Message

previewContract

Custom Preview operation for Contract Header SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	Contract Id
majorVersion	long	Contract Major Version
externalSourceKey	string	External Source Key
externalReferenceKey	string	External Reference Key
language	string	Preview Language

Response Payload

Element Name	Type	Description
result	string	Result of the operation includes the PDF of the contract

previewContractInHTML

Custom HTML Preview operation for Contract Header SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	Contract Id
majorVersion	long	Contract Version Number
externalSourceKey	string	External Source Key
externalReferenceKey	string	External Reference Key
language	string	Preview Language

Response Payload

Element Name	Type	Description
result	string	Result of the operation includes the HTML of the contract

previewContractInRTF

Custom RTF Preview operation for Contract Header SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	Contract Id
majorVersion	long	Contract Version Number

Element Name	Type	Description
externalSourceKey	string	External Source Key
externalReferenceKey	string	External Reference Key
language	string	Preview Language

Response Payload

Element Name	Type	Description
result	string	Result of the operation includes the RTF of the contract

runContractExpert

The custom run Contract Expert operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
externalSourceKey	string	The external source key of the contract.
externalReferenceKey	string	The external reference key of the contract.
variableValues	*Contract Variable Values*	All user defined variables and values used in document clauses.
questionResponses	*Contract Question Responses*	All questions and responses used in Contract Expert rules associated to a document.
runContractExpertYN	string	Indicator to control whether to run Contract Expert.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	Result of the run Contract Expert operation includes the warning or information messages.

amendContract

The amend operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
amendContractParams	*Amend Contract*	Input values for amending a contract

Response Payload

Element Name	Type	Description
result	void	Result of the operation includes the warning or informational message.

revertContract

The revert operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
revertContractParams	*Revert Contract*	Input values for reverting a contract

Response Payload

Element Name	Type	Description
result	void	Result of the operation includes the warning or informational message.

cancelContractLine

The cancel operation for the contract line SDO. This service can be used to cancel contract lines or its covered assets.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
cancelContractLineParams	*Cancel Contract Line*	Input values for canceling a contract line.

Response Payload

Element Name	Type	Description
result	void	Result of the operation includes the warning or informational message.

closeServiceContract

The close operation for the contract header SDO. This service is for service contracts only.This service can be used to close the contract, its lines or its covered assets.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
closeServiceContractParams	*Close Service Contract*	Input values for closing a service contract.

Response Payload

Element Name	Type	Description
result	void	Result of the operation includes the warning or informational message.

getContractDocuments

Custom operation to get contract documents of a contract

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
inputParams	*Get Contract Documents List*	Input values for this operation

Response Payload

Element Name	Type	Description
result	*Contract Document*	Returns list of contract documents of a contract

getContractDocumentFileContents

Custom operation to get file contents along with file name and content type of a contract document

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
inputParams	*Get Contract Document Content*	Input values for this operation

Response Payload

Element Name	Type	Description
result	string	Returns an array of 3 strings - file name (un-encoded), file content type (un-encoded) and file contents (base64 encoded).

renewContract

The amend operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
manualRenewalParams	*Contract Renewal Request*	Input values for renewing a contract

Response Payload

Element Name	Type	Description
result	*Contract Renewal Response*	Result of the operation includes the renewed contract information.

raiseUserTransitionEvent

Custom operation to update the state_transition_flow_state in Contracts.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
inputParams	*Event Payload*	Input values for this operation

Response Payload

Element Name	Type	Description
result	string	Result of the operation includes the warning or informational message.

getContract

The get operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
id	long	The identifier of the contract.
majorVersion	long	The major version of the contract.

Response Payload

Element Name	Type	Description
result	*Contract*	The result of the get operation that also includes the successfully retrieved contract header SDO.

signContract

Service to capture signer details and sign a contract.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
inputParams	*Sign Contract*	Input values for sign contract

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	Result of the operation includes the warning or informational message.

getContractValidDocumentCategories

Custom operation to get valid contract documents of a contract.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	string	Result of this operation includes valid document categories of Contract

getContractByPrimaryKey

Get operation for Contract Header SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	Contract Id

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractHeaderResult	Result of the operation includes the successfully retrieved Contract Header SDO

createContract

The create operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractHeader	*Contract*	The contract header SDOs of all the contracts that would be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractHeaderResult	The result of the create operation that also includes the successfully created contract header SDO.

updateContract

The update operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractHeader	*Contract*	The contract header SDOs of the contract that would be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractHeaderResult	The result of the update operation that also includes the successfully updated contract header SDO.

Element Name	Type	Description

mergeContract

The merge operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractHeader	*Contract*	The contract header SDOs of all the contracts that would be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractHeaderResult	The result of the merge operation includes the successfully merged contract header SDO.

findContract

The find operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This field is not currently used.

Response Payload

Element Name	Type	Description
result	*Contract*	The result of the find operation that also includes a list of the contract header SDO satisfying the inbound criteria and any warnings or information messages.

Element Name	Type	Description

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, which is an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale that the application would use when evaluating the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and the object's attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the Name, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
cancelContract	OKC_CANCEL_CONTRACT_PRIV	Cancel Contract	Allows the cancellation of contracts and contract lines.
cancelContract	OKC_CANCEL_CONTRACT_VIA_WEB_SERVICE_PRIV	Cancel Contract via Web Service	Allows the cancellation of contracts and contract lines from outside the application.
removeHoldOnContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
removeHoldOnContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
getContractDocuments	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
getContractDocuments	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getContractDocuments	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
previewContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
previewContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
previewContract	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
mergeContractInAllStatus	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
mergeContractInAllStatus	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
mergeContractInAllStatus	OKC_CREATE_CONTRACT_PRIV	Create Contract	Provides ability to initiate contract creation.
createContract	OKC_CREATE_CONTRACT_PRIV	Create Contract	Provides ability to initiate contract creation.
updateContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
updateContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
submitContractForApproval	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
submitContractForApproval	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
deleteContract	OKC_DELETE_CONTRACT_PRIV	Delete Contract	Allows the deletion of draft or canceled contracts.

Operation Name	Privilege Code	Privilege Name	Privilege Description
cancelContractLine	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
cancelContractLine	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
cancelContractLine	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
mergeContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
mergeContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
mergeContract	OKC_CREATE_CONTRACT_PRIV	Create Contract	Provides ability to initiate contract creation.
amendContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
amendContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
amendContract	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
getContractByPrimaryKey	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
getContractByPrimaryKey	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
getContractByPrimaryKey	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
getContractDocumentFileContents	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getContractDocumentFileContents	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
getContractDocumentFileContents	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
signContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
signContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
updateContractToActive	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
updateContractToActive	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
applyHoldOnContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
applyHoldOnContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
previewContractInRTF	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
previewContractInRTF	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
previewContractInRTF	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
addContractDocuments	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.

Operation Name	Privilege Code	Privilege Name	Privilege Description
addContractDocuments	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
raiseUserTransitionEvent	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
raiseUserTransitionEvent	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
renewContract	OKC_RENEW_CONTRACT_PRIV	Renew Contract	Allows renewal of a contract
previewContractInHTML	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
previewContractInHTML	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
previewContractInHTML	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
runContractExpert	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
runContractExpert	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
runContractExpert	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
revertContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
revertContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
revertContract	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getContractValidDocumentCategori	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
getContractValidDocumentCategori	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
getContractValidDocumentCategori	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
reopenContract	OKC_CLOSE_CONTRACT_PRIV	Close Contract	Allows the closing of contracts and contract lines.
reopenContract	OKC_CLOSE_CONTRACT_VIA_WEB_SERVICE_PRIV	Close Contract by Web Service	Allows the closing of contracts and contract lines from outside the application..
getContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
getContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
getContract	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
closeServiceContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
closeServiceContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
closeServiceContract	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
closeContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
closeContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.

Operation Name	Privilege Code	Privilege Name	Privilege Description
findContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
findContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
findContract	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
OKC_CANCEL_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CANCEL_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CANCEL_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			submitting the amendment for approval.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AUTHORING_DUTY	Grant Contract Authoring	Authors grant contracts, including terms and conditions, interactions, and customer account information.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_SEARCH_VIEW_DUTY	Grant Contract Search and View Access	Searches and views grant contracts for the assigned business units.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY	Contract View Access Across All Contracts	Views all contracts across an enterprise.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_FOR_CRM	Contract View Access Across All Contracts for CRM	Views all contracts across an enterprise.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	Business Practices Director	Defines and manages sales or procurement contract policies and standards. Ensures all corporate contracts conform to established guidelines and best practices.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
OKC_VIEW_CONTRACT_PRIV	ORA_CSE_ASSET_ ADMINISTRATOR_JOB	Asset Administrator	An experienced functional super user who performs asset-related tasks (setup request, transactions, updates, data audit) as directed. In addition, the Asset Administrator is responsible for general asset application maintenance (for both customer-owned and enterprise-owned assets), such as process monitoring and processing error resolution.
OKC_EDIT_CONTRACT_VIA_WEB_ SERVICE_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_ CONTRACT_MANAGEMENT_DUTY	Contract Management Across All Contracts Web Service	Permits an application using the CRM application ID to manage contracts across all business units.
OKC_CLOSE_CONTRACT_VIA_ WEB_SERVICE_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_ CONTRACT_MANAGEMENT_DUTY	Contract Management Across All Contracts Web Service	Permits an application using the CRM application ID to manage contracts across all business units.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_ AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CREATE_CONTRACT_PRIV	ORA_PON_NEGOTIATION_ CONTRACT_MANAGEMENT_DUTY	Negotiation Contract Management	Create and manage procurement contracts for awarded suppliers in a negotiation.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_CONTRACT_ AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_CONTRACT_ AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_CONTRACT_ AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_CONTRACT_ AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			customer account information honoring team access.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AUTHORING_DUTY	Grant Contract Authoring	Authors grant contracts, including terms and conditions, interactions, and customer account information.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	Contract Management Across All Contracts Web Service	Permits an application using the CRM application ID to manage contracts across all business units.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AUTHORING_DUTY	Grant Contract Authoring	Authors grant contracts, including terms and conditions, interactions, and customer account information.
OKC_CANCEL_CONTRACT_VIA_WEB_SERVICE_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	Contract Management Across All Contracts Web Service	Permits an application using the CRM application ID to manage contracts across all business units.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
OKC_RENEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
OKC_RENEW_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AUTHORING_DUTY	Grant Contract Authoring	Authors grant contracts, including terms and conditions, interactions, and customer account information.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_EDIT_CONTRACT_PRIV	ORA_PON_NEGOTIATION_CONTRACT_MANAGEMENT_DUTY	Negotiation Contract Management	Create and manage procurement contracts for awarded suppliers in a negotiation.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AUTHORING_DUTY	Grant Contract Authoring	Authors grant contracts, including terms and conditions, interactions, and customer account information.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	Enterprise Contract Administrator	Performs the duties of both customer contract administrator and supplier contract administrator.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	Customer Contract Team Member	
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	Supplier Contract Manager	Manages a team of supplier contract administrators.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	Enterprise Contract Team Member	
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	Customer Contract Administrator	Works with sales account teams and legal to negotiate and author customer contracts. Tracks critical contract milestones, service level agreements, and assists account teams during contract renewals and amendments.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	Supplier Contract Administrator	Works with internal buyers and legal to negotiate and author supplier contracts and agreements. Tracks critical contract milestones, monitors supplier performance, and assists buyers during contract renewals, closeout, and amendments.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	Customer Contract Manager	Manages a team of customer contract administrators.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	Enterprise Contract Manager	Manages a team of enterprise contract administrators.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	Supplier Contract Team Member	

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_CSI_ASSET_SERVICE_DUTY	Asset Service Management	Provide access to view and manage service business objects, such as service request, service work order, that are related to an asset.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY	Contract Setup	Contract Setup
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY	Contract Setup	Contract Setup

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY	Contract Setup	Contract Setup
ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	ORA_OKC_CONTRACT_TERMS_LIBRARY_ADMINISTRATION_DUTY	Contract Terms Library Administration	Manages the Contract Terms Library, including defining and maintaining terms templates, clauses, Contract Expert rules, sections, variables, folders, questions, constants, and numbering schemes.
ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	ORA_OKC_CONTRACT_TERMS_LIBRARY_INQUIRY_DUTY	Contract Terms Library Search and View Access	Searches and views Contract Terms Library objects, including terms templates, clauses, Contract Expert rules, sections, variables, folders, questions, constants, and numbering schemes.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_OVERRIDE_DUTY	Contract Terms and Conditions Override Controls	Edits protected clauses, and deletes mandatory clauses and sections in addition to authoring nonstandard terms and conditions.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_FUN_FSCM_LOAD_INTERFACE_ADMIN_DUTY	FSCM Load Interface Administration	Manages load interface file for import
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_CSI_INSTALLED_BASE_WEB_SERVICE_DUTY	Installed Base Web Service	Provide service access to installed base by using the REST services.
ORA_OKC_GRANT_CONTRACT_SEARCH_VIEW_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_FOR_CRM	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_MNT_MAINTENANCE_SETUP_DUTY	Maintenance Management Setup Administration	Provides access to perform maintenance management setup tasks.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_MNT_MAINTENANCE_SERVICE_DUTY	Maintenance Management Web Service	Provides service access to maintenance asset management and work execution by using the REST services.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_CSE_MANAGE_CUSTOMER_ASSETS_DUTY	Manage Customer Assets	Provides access to the Edit and View Customer Assets including the View Pages in the History Tab.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_FOR_CRM	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			sections, and removing contract terms.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_RCS_SCM_COMMON_WEB_SERVICE_DUTY	Supply Chain Common Web Service	Provides web service access to supply chain common to perform activities such as viewing inventory organizations, plant parameters, carriers and units of measure list of values.

Job Title Override

The job title assigned to a specific person on a contract bill or revenue plan, rather than the normal job title for that person.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractService/}JobTitleOverride

Logical Business Objects

- Projects
- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Bill Plans*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillingTitle	string	Name of the override job title being assigned to the job for this bill plan. Used to display on the invoice to the customer.
ContractLineId	long	Unique identifier of the contract line for which the job title override is defined.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date to which a job title override applies.
ExternalReferenceKey	string	Unique identifier of the job title override in the source application. Used to identify job title overrides created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the job title override originates. Used to identify job title overrides created through external webservices.
JobId	long	Unique identifier of the job for which the job title override is defined.
JobTitleOverrideId	long	Unique identifier of the job titile override on the bill plan that identifies the negotiated job title assigned to a specific person, rather than the normal title for that person. • Primary Key
MajorVersion	long	Version of the contract containing this particular set of job title override details. • Primary Key
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date from which a job title override applies.

Labor Multiplier Override

The negotiated value to be multiplied by the cost rate for labor on a contract bill or revenue plan.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractService/}LaborMultiplierOverride

Logical Business Objects

- Projects
- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Revenue Plan Deprecated*
Contained by	*Contract Bill Plans*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContractLineId	long	Version of the contract containing this particular set of labor multiplier override details.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date to which a labor multiplier override applies.
ExternalReferenceKey	string	Unique identifier of the labor multiplier override in the source application. Used to identify labor multiplier overrides created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the labor multiplier override originates. Used to identify labor multiplier overrides created through external webservices.

Name	Type	Description
LaborMultiplier	decimal	Name of the object that stores all the labor multipliers for a bill plan or revenue plan.
LaborMultiplierId	long	Unique identifier of the labor multiplier override on the bill plan that identifies the negotiated value to be multiplied by the cost rate for labor. • Primary Key
MajorVersion	long	Version of the contract containing this particular set of labor multiplier override details. • Primary Key
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date from which a labor multiplier override applies.

Non-labor Rate Override Deprecated

The negotiated rate, discount, or markup for non-labor on a contract bill or revenue plan.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractService/}NonLaborRateOverride

Logical Business Objects

- Projects
- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Revenue Plan Deprecated*
Contained by	*Contract Bill Plans*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillRateOverrideId	long	Unique identifier of the nonlabor rate override. • Primary Key
ContractLineId	long	Unique identifier of the contract line for which the nonlabor rate override is defined.
DiscountPercentage	decimal	The factor by which the bill rate derived for the nonlabor expenditure type, resource, and organization and bill or revenue plan is to be discounted.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date to which a nonlabor rate override applies.
ExpenditureTypeId	long	Unique identifier of the expenditure type for which the bill rate is being overridden.
ExternalReferenceKey	string	Unique identifier of the nonlabor rate override in the source application. Used to identify nonlabor rate overrides created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the nonlabor rate override originates. Used to identify nonlabor rate overrides created through external webservices.
MajorVersion	long	Version of the contract containing this particular set of nonlabor rate override details. • Primary Key
MarkupPercentage	decimal	Identifies the factor by which the bill amount will be calculated over the cost for this nonlabor rate override.
NonLaborResourceId	long	Unique identifier of the nonlabor resource for which the nonlabor rate override applies.
OrganizationId	long	Unique identifier of the nonlabor resource organization for which the nonlabor rate override applies.
Rate	decimal	A unit rate override for the nonlabor expenditure type, resource, and organization and bill or revenue plan.
RateCurrencyCode	string	Currency of the nonlabor rate override on the bill or revenue plan.

Name	Type	Description
RateDiscReasonCode	string	Explains the reason for the discount percentage offered against the nonlabor expenditure type, oranization, and resource.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date from which a nonlabor rate override applies.

Person Rate Override Deprecated

The person rate overrides for a bill or revenue plan.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractService/}PersonRateOverride

Logical Business Objects

- Projects
- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Revenue Plan Deprecated*
Contained by	*Contract Bill Plans*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillRateOverrideId	long	Unique identifier of the person rate override. • Primary Key
ContractLineId	long	Version of the contract containing this particular set of person rate override details.

Name	Type	Description
DiscountPercentage	decimal	The factor by which the bill rate derived for the person and bill or revenue plan is to be discounted.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date to which a person rate override applies.
ExternalReferenceKey	string	Unique identifier of the person rate override in the source application. Used to identify person rate overrides created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the person rate override originates. Used to identify person rate overrides created through external webservices.
MajorVersion	long	Version of the contract containing this particular set of person rate override details. • Primary Key
PersonId	long	Unique identifier of the person for which the person rate override is defined.
Rate	decimal	A unit rate override for the person and bill or revenue plan.
RateCurrencyCode	string	Currency of the person rate override on the bill or revenue plan.
RateDiscReasonCode	string	Explains the reason for the discount percentage offered against the person.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date from which a person rate override applies.

Sales Credit Deprecated

The sales credit view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/transaction/transactionService/}SalesCredit

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Deprecated*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveYn	string	The flag to activate sales credit.
Id	long	The unique identifier of the sales credit. • Primary Key
MajorVersion	long	The major version of the record. • Primary Key
Percent	decimal	The sales credit percentage.
SalesCreditTypeId	long	The unique identifier of the sales credit type.
SalesrepId	long	The unique identifier of the salesperson.

Contract Service Version 2

The external service of the contract.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractService

Service WSDL URL: https://servername/fscmService/ContractServiceV2?WSDL

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Contract Party*
Handles	*Contract*
Handles	*Contract Header Descriptive Flexfield Attributes*
Handles	*Contract Party Contact Descriptive Flexfield Attributes*
Handles	*Contract Charge*
Handles	*Contract Line Language Translation*
Handles	*Job Title Override SDO*
Handles	*Contract Document*
Handles	*Nonlabor Rate Override SDO*
Handles	*Contract Question Responses*
Handles	*Contract Related Document*
Handles	*Sales Credit*
Handles	*Job Assignment Override SDO*
Handles	*Contract Party Descriptive Flexfield Attributes*
Handles	*Contract Header Language Translation*
Handles	*Event Payload*
Handles	*Contract Bill Plan Translations*

Relationship Type	Object or Service
Handles	*Contract Covered Asset*
Handles	*Person Rate Override SDO*
Handles	*Contract Bill Plan*
Handles	*Pricing Terms Sales Agreement*
Handles	*Labor Multiplier Override SDO*
Handles	*Contract Renewal Request*
Handles	*Sign Contract Party Details*
Handles	*Event Parameters*
Handles	*Contract Party Language Translation*
Handles	*Sign Contract*
Handles	*Contract Billing Control*
Handles	*Contract Tier Header*
Handles	*Contract Renewal Response*
Handles	*Revert Contract*
Handles	*Contract Party Contact*
Handles	*Contract Charge Component*
Handles	*Job Rate Override SDO*
Handles	*Contract Variable Values*
Handles	*Get Contract Documents List*
Handles	*Internal Contract Line Attributes SDO*
Handles	*Contract Line Descriptive Flexfield Attributes*

Relationship Type	Object or Service
Handles	*Amend Contract*
Handles	*Contract Associated Project*
Handles	*Contract Revenue Plan*
Handles	*Cancel Contract Line*
Handles	*Contract Bill Plan Descriptive Flexfields*
Handles	*Contract Assigned Billing Extension*
Handles	*Contract Tier Line*
Handles	*Close Service Contract*
Handles	*Get Contract Document Content*
Handles	*Contract Line*
Handles	*Contract Manual Price Adjustment*
Handles	*Contract Service Billing Summary*

Operations

- *mergeContractInAllStatus*
- *deleteContract*
- *updateContractToActive*
- *addContractDocuments*
- *applyHoldOnContract*
- *closeContract*
- *cancelContract*
- *removeHoldOnContract*
- *reopenContract*
- *submitContractForApproval*
- *previewContract*
- *previewContractInHTML*

- *previewContractInRTF*
- *runContractExpert*
- *amendContract*
- *revertContract*
- *cancelContractLine*
- *closeServiceContract*
- *getContractDocuments*
- *getContractDocumentFileContents*
- *renewContract*
- *raiseUserTransitionEvent*
- *getContract*
- *signContract*
- *getContractValidDocumentCategories*
- *getContractByPrimaryKey*
- *createContract*
- *updateContract*
- *mergeContract*
- *findContract*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

mergeContractInAllStatus

The custom merge operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractHeader	*Contract*	The contract header SDOs of all the contracts that would be merged.
targetStatusCode	string	The target status code after the merge operation.
closeDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contract was closed.
closeReasonCode	string	The reason code for closing a contract.
cancelReasonCode	string	The reason code for canceling a contract.

Element Name	Type	Description
versionFlag	boolean	The flag that denotes whether a new version of the contract would be created for the merge operation.

Response Payload

Element Name	Type	Description
result	*Contract*	The result of the merge operation that also includes the successfully merged contract header SDO.

deleteContract

The custom delete operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
id	long	The unique identifier of the contract.
majorVersion	long	The major version of the contract.
externalSourceKey	string	The external source key of the contract.
externalReferenceKey	string	The external reference key of the contract.
deleteAllVersions	boolean	The flag that denotes whether all the versions of the contract would be deleted or not.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the delete operation that also includes the warning or information message.

updateContractToActive

The custom active operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The unique identifier of the contract.
runValidationFlag	boolean	The flag that denotes whether validations are run or not.
emptyResponseFlag	boolean	The flag that indicates whether response payload is needed or not

Response Payload

Element Name	Type	Description
result	*Contract*	The result of the update operation that also includes the successfully activated Contract header SDO.

addContractDocuments

The custom operation for adding documents to contracts.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractDocuments	*Contract Document*	The contract document that would be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the add operation that also includes the warning or information message.

applyHoldOnContract

The custom hold operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
lineId	long	The identifier of the line.
headerExternalSourceKey	string	The external source key of the header.
headerExternalReferenceKey	string	The external reference key of the header.
lineExternalSourceKey	string	The external source key of the line.
lineExternalReferenceKey	string	The external reference key of the line.
holdUntilDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date until which the contract is on hold.
holdReasonCode	string	The reason code for the contract being on hold.
applyHldRsnSetId	long	The reason set identifier for the contract being on hold.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the hold operation that also includes the warning or information message.

closeContract

The custom close operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
contractLineId	long	The contract line identifier.

Element Name	Type	Description
headerExternalSourceKey	string	The external source key of the header.
headerExternalReferenceKey	string	The external reference key of the header.
lineExternalSourceKey	string	The external source key of the line.
lineExternalReferenceKey	string	The external reference key of the line.
closedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contract was closed.
closeReasonCode	string	The close reason code of the contract.
trnCodeSetId	long	The transaction code set identifier.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the close operation that also includes the warning or information message.

cancelContract

The custom cancel operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
reasonCode	string	The reason code for the contract being canceled.
externalSourceKey	string	The external source key of the contract.
externalReferenceKey	string	The external reference key of the contract.
trnCodeSetId	long	The transaction code set identifier.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the cancel operation that also includes the warning or information message.

removeHoldOnContract

The custom remove hold operation for the contract header and the contract line SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
lineId	long	The identifier of the line.
headerExternalSourceKey	string	The external source key of the header.
headerExternalReferenceKey	string	The external reference key of the header.
lineExternalSourceKey	string	The external source key of the line.
lineExternalReferenceKey	string	The external reference key of the line.
removeHoldDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the hold on the contract was removed.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the remove hold operation that also includes the warning or information message.

reopenContract

The custom reopen operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
contractLineId	long	The contract line identifier.
headerExternalSourceKey	string	The external source key of the header.
headerExternalReferenceKey	string	The external reference key of the header.
lineExternalSourceKey	string	The external source key of the line.
lineExternalReferenceKey	string	The external reference key of the line.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the reopen operation that also includes the warning or information message.

submitContractForApproval

Custom submit for approval operation for Contract Header SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	Contract ID
externalSourceKey	string	Eaternal Source Key
externalReferenceKey	string	Eaternal Reference Key
submitOnWarningsFlag	boolean	Flag that instructs to proceed with submit even there are any validation warnings

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}StringResult	Returns list of strings. First element gives whether contract is submitted or not and batch id used for validation separated by : ex. SUBMITTED:123456789 or NOT_SUBMITTED:123456789. Second element onwards it will have validation messages in the format Severity:Validation Message

previewContract

Custom Preview operation for Contract Header SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	Contract Id
majorVersion	long	Contract Major Version
externalSourceKey	string	External Source Key
externalReferenceKey	string	External Reference Key
language	string	Preview Language

Response Payload

Element Name	Type	Description
result	string	Result of the operation includes the PDF of the contract

previewContractInHTML

Custom HTML Preview operation for Contract Header SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	Contract Id
majorVersion	long	Contract Version Number
externalSourceKey	string	External Source Key
externalReferenceKey	string	External Reference Key
language	string	Preview Language

Response Payload

Element Name	Type	Description
result	string	Result of the operation includes the HTML of the contract

previewContractInRTF

Custom RTF Preview operation for Contract Header SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	Contract Id
majorVersion	long	Contract Version Number
externalSourceKey	string	External Source Key
externalReferenceKey	string	External Reference Key
language	string	Preview Language

Response Payload

Element Name	Type	Description
result	string	Result of the operation includes the RTF of the contract

runContractExpert

The custom run Contract Expert operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	The identifier of the contract.
externalSourceKey	string	The external source key of the contract.
externalReferenceKey	string	The external reference key of the contract.
variableValues	*Contract Variable Values*	All user defined variables and values used in document clauses.
questionResponses	*Contract Question Responses*	All questions and responses used in Contract Expert rules associated to a document.
runContractExpertYN	string	Indicator to control whether to run Contract Expert.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	Result of the run Contract Expert operation includes the warning or information messages.

amendContract

The amend operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
amendContractParams	*Amend Contract*	Input values for amending a contract

Response Payload

Element Name	Type	Description
result	void	Result of the operation includes the warning or informational message.

revertContract

The revert operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
revertContractParams	*Revert Contract*	Input values for reverting a contract

Response Payload

Element Name	Type	Description
result	void	Result of the operation includes the warning or informational message.

cancelContractLine

The cancel operation for the contract line SDO. This service can be used to cancel contract lines or its covered assets.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
cancelContractLineParams	*Cancel Contract Line*	Input values for canceling a contract line.

Response Payload

Element Name	Type	Description
result	void	Result of the operation includes the warning or informational message.

closeServiceContract

The close operation for the contract header SDO. This service is for service contracts only.This service can be used to close the contract, its lines or its covered assets.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
closeServiceContractParams	*Close Service Contract*	Input values for closing a service contract.

Response Payload

Element Name	Type	Description
result	void	Result of the operation includes the warning or informational message.

getContractDocuments

Custom operation to get contract documents of a contract

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
inputParams	*Get Contract Documents List*	Input values for this operation

Response Payload

Element Name	Type	Description
result	*Contract Document*	Returns list of contract documents of a contract

getContractDocumentFileContents

Custom operation to get file contents along with file name and content type of a contract document

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
inputParams	*Get Contract Document Content*	Input values for this operation

Response Payload

Element Name	Type	Description
result	string	Returns an array of 3 strings - file name (un-encoded), file content type (un-encoded) and file contents (base64 encoded).

renewContract

The amend operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
manualRenewalParams	*Contract Renewal Request*	Input values for renewing a contract

Response Payload

Element Name	Type	Description
result	*Contract Renewal Response*	Result of the operation includes the renewed contract information.

raiseUserTransitionEvent

Custom operation to update the state_transition_flow_state in Contracts.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
inputParams	*Event Payload*	Input values for this operation

Response Payload

Element Name	Type	Description
result	string	Result of the operation includes the warning or informational message.

getContract

The get operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
id	long	The identifier of the contract.
majorVersion	long	The major version of the contract.

Response Payload

Element Name	Type	Description
result	*Contract*	The result of the get operation that also includes the successfully retrieved contract header SDO.

signContract

Service to capture signer details and sign a contract.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
inputParams	*Sign Contract*	Input values for sign contract

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	Result of the operation includes the warning or informational message.

getContractValidDocumentCategories

Custom operation to get valid contract documents of a contract.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	string	Result of this operation includes valid document categories of Contract

getContractByPrimaryKey

Get operation for Contract Header SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractId	long	Contract Id

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractHeaderResult	Result of the operation includes the successfully retrieved Contract Header SDO

createContract

The create operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractHeader	*Contract*	The contract header SDOs of all the contracts that would be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractHeaderResult	The result of the create operation that also includes the successfully created contract header SDO.

updateContract

The update operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractHeader	*Contract*	The contract header SDOs of the contract that would be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractHeaderResult	The result of the update operation that also includes the successfully updated contract header SDO.

mergeContract

The merge operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contractHeader	*Contract*	The contract header SDOs of all the contracts that would be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractHeaderResult	The result of the merge operation includes the successfully merged contract header SDO.

findContract

The find operation for the contract header SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This field is not currently used.

Response Payload

Element Name	Type	Description
result	*Contract*	The result of the find operation that also includes a list of the contract header SDO satisfying the inbound criteria and any warnings or information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, which is an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale that the application would use when evaluating the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and the object's attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the Name, internal name, and boolean values indicating whether create, update,

Element Name	Type	Description
		merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
cancelContract	OKC_CANCEL_CONTRACT_PRIV	Cancel Contract	Allows the cancellation of contracts and contract lines.
cancelContract	OKC_CANCEL_CONTRACT_VIA_WEB_SERVICE_PRIV	Cancel Contract via Web Service	Allows the cancellation of contracts and contract lines from outside the application.
removeHoldOnContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
removeHoldOnContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
getContractDocuments	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
getContractDocuments	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
getContractDocuments	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
previewContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
previewContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.

Operation Name	Privilege Code	Privilege Name	Privilege Description
previewContract	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
mergeContractInAllStatus	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
mergeContractInAllStatus	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
mergeContractInAllStatus	OKC_CREATE_CONTRACT_PRIV	Create Contract	Provides ability to initiate contract creation.
createContract	OKC_CREATE_CONTRACT_PRIV	Create Contract	Provides ability to initiate contract creation.
updateContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
updateContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
submitContractForApproval	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
submitContractForApproval	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
deleteContract	OKC_DELETE_CONTRACT_PRIV	Delete Contract	Allows the deletion of draft or canceled contracts.
cancelContractLine	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
cancelContractLine	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
cancelContractLine	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.

Operation Name	Privilege Code	Privilege Name	Privilege Description
mergeContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
mergeContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
mergeContract	OKC_CREATE_CONTRACT_PRIV	Create Contract	Provides ability to initiate contract creation.
amendContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
amendContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
amendContract	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
getContractByPrimaryKey	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
getContractByPrimaryKey	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
getContractByPrimaryKey	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
getContractDocumentFileContents	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
getContractDocumentFileContents	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
getContractDocumentFileContents	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
signContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.

Operation Name	Privilege Code	Privilege Name	Privilege Description
signContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
updateContractToActive	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
updateContractToActive	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
applyHoldOnContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
applyHoldOnContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
previewContractInRTF	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
previewContractInRTF	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
previewContractInRTF	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
addContractDocuments	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
addContractDocuments	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
raiseUserTransitionEvent	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
raiseUserTransitionEvent	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
renewContract	OKC_RENEW_CONTRACT_PRIV	Renew Contract	Allows renewal of a contract

Operation Name	Privilege Code	Privilege Name	Privilege Description
previewContractInHTML	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
previewContractInHTML	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
previewContractInHTML	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
runContractExpert	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
runContractExpert	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
runContractExpert	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
revertContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
revertContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
revertContract	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
getContractValidDocumentCategori	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
getContractValidDocumentCategori	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
getContractValidDocumentCategori	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.

Operation Name	Privilege Code	Privilege Name	Privilege Description
reopenContract	OKC_CLOSE_CONTRACT_PRIV	Close Contract	Allows the closing of contracts and contract lines.
reopenContract	OKC_CLOSE_CONTRACT_VIA_WEB_SERVICE_PRIV	Close Contract by Web Service	Allows the closing of contracts and contract lines from outside the application..
getContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
getContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
getContract	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
closeServiceContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
closeServiceContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
closeServiceContract	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.
closeContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
closeContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
findContract	OKC_EDIT_CONTRACT_PRIV	Edit Contract	Allows the editing of contracts, as well as other contract management tasks.
findContract	OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	Edit Contract by Web Service	Allows the editing of contracts and other contract management tasks from outside the application.
findContract	OKC_VIEW_CONTRACT_PRIV	View Contract	Allows viewing and printing of a contract and its history, including the contract's financial summary.

Operation Name	Privilege Code	Privilege Name	Privilege Description

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
OKC_CANCEL_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CANCEL_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CANCEL_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AUTHORING_DUTY	Grant Contract Authoring	Authors grant contracts, including terms and conditions, interactions, and customer account information.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_SEARCH_VIEW_DUTY	Grant Contract Search and View Access	Searches and views grant contracts for the assigned business units.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY	Contract View Access Across All Contracts	Views all contracts across an enterprise.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_FOR_CRM	Contract View Access Across All Contracts for CRM	Views all contracts across an enterprise.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	Business Practices Director	Defines and manages sales or procurement contract policies and standards. Ensures all corporate contracts conform to established guidelines and best practices.
OKC_VIEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
OKC_VIEW_CONTRACT_PRIV	ORA_CSE_ASSET_ADMINISTRATOR_JOB	Asset Administrator	An experienced functional super user who performs asset-related tasks (setup request, transactions, updates, data audit) as directed. In addition, the Asset Administrator is responsible for general asset application maintenance (for both customer-owned and enterprise-owned assets), such as process monitoring and processing error resolution.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
OKC_EDIT_CONTRACT_VIA_WEB_SERVICE_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	Contract Management Across All Contracts Web Service	Permits an application using the CRM application ID to manage contracts across all business units.
OKC_CLOSE_CONTRACT_VIA_WEB_SERVICE_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	Contract Management Across All Contracts Web Service	Permits an application using the CRM application ID to manage contracts across all business units.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CREATE_CONTRACT_PRIV	ORA_PON_NEGOTIATION_CONTRACT_MANAGEMENT_DUTY	Negotiation Contract Management	Create and manage procurement contracts for awarded suppliers in a negotiation.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
OKC_CREATE_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AUTHORING_DUTY	Grant Contract Authoring	Authors grant contracts, including terms and conditions, interactions, and customer account information.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	Contract Management Across All Contracts Web Service	Permits an application using the CRM application ID to manage contracts across all business units.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
OKC_DELETE_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AUTHORING_DUTY	Grant Contract Authoring	Authors grant contracts, including terms and conditions, interactions, and customer account information.
OKC_CANCEL_CONTRACT_VIA_WEB_SERVICE_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	Contract Management Across All Contracts Web Service	Permits an application using the CRM application ID to manage contracts across all business units.
OKC_RENEW_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
OKC_RENEW_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AUTHORING_DUTY	Grant Contract Authoring	Authors grant contracts, including terms and conditions, interactions, and customer account information.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_EDIT_CONTRACT_PRIV	ORA_PON_NEGOTIATION_CONTRACT_MANAGEMENT_DUTY	Negotiation Contract Management	Create and manage procurement contracts for awarded suppliers in a negotiation.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
OKC_EDIT_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AUTHORING_DUTY	Grant Contract Authoring	Authors grant contracts, including terms and conditions, interactions, and customer account information.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_GRANT_CONTRACT_AMENDMENT_DUTY	Grant Contract Amendment	Amends approved grant contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	Enterprise Contract Administrator	Performs the duties of both customer contract administrator and supplier contract administrator.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	Customer Contract Team Member	
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	Supplier Contract Manager	Manages a team of supplier contract administrators.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	Enterprise Contract Team Member	
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	Customer Contract Administrator	Works with sales account teams and legal to negotiate and author customer contracts. Tracks critical contract milestones, service level agreements, and assists account teams during contract renewals and amendments.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	Supplier Contract Administrator	Works with internal buyers and legal to negotiate and author supplier contracts and agreements. Tracks critical contract milestones, monitors supplier performance, and assists buyers during contract renewals, closeout, and amendments.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	Customer Contract Manager	Manages a team of customer contract administrators.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	Enterprise Contract Manager	Manages a team of enterprise contract administrators.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
OKC_CLOSE_CONTRACT_PRIV	ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	Supplier Contract Team Member	

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_CSI_ASSET_SERVICE_DUTY	Asset Service Management	Provide access to view and manage service business objects, such as service request, service work order, that are related to an asset.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_AUTHORING_TEAM_DUTY	Contract Authoring Team	Authors contracts, including terms and conditions, interactions, and customer account information honoring team access.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY	Contract Setup	Contract Setup
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY	Contract Setup	Contract Setup
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY	Contract Setup	Contract Setup
ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	ORA_OKC_CONTRACT_TERMS_LIBRARY_ADMINISTRATION_DUTY	Contract Terms Library Administration	Manages the Contract Terms Library, including defining and maintaining terms templates, clauses, Contract Expert rules, sections, variables, folders,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			questions, constants, and numbering schemes.
ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	ORA_OKC_CONTRACT_TERMS_LIBRARY_INQUIRY_DUTY	Contract Terms Library Search and View Access	Searches and views Contract Terms Library objects, including terms templates, clauses, Contract Expert rules, sections, variables, folders, questions, constants, and numbering schemes.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_OVERRIDE_DUTY	Contract Terms and Conditions Override Controls	Edits protected clauses, and deletes mandatory clauses and sections in addition to authoring nonstandard terms and conditions.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_FUN_FSCM_LOAD_INTERFACE_ADMIN_DUTY	FSCM Load Interface Administration	Manages load interface file for import
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_CSI_INSTALLED_BASE_WEB_SERVICE_DUTY	Installed Base Web Service	Provide service access to installed base by using the REST services.
ORA_OKC_GRANT_CONTRACT_SEARCH_VIEW_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_FOR_CRM	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_MNT_MAINTENANCE_SETUP_DUTY	Maintenance Management Setup Administration	Provides access to perform maintenance management setup tasks.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_MNT_MAINTENANCE_SERVICE_DUTY	Maintenance Management Web Service	Provides service access to maintenance asset management and work execution by using the REST services.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_CSE_MANAGE_CUSTOMER_ASSETS_DUTY	Manage Customer Assets	Provides access to the Edit and View Customer Assets including the View Pages in the History Tab.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_FOR_CRM	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_CUSTOMER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_ENTERPRISE_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_SUPPLIER_CONTRACT_TEAM_MEMBER_ABSTRACT	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			sections, and removing contract terms.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_TERMS_AUTHORING_NON_STANDARD_DUTY	Nonstandard Contract Terms and Conditions Authoring	Authors nonstandard terms and conditions in addition to standard terms and conditions. Nonstandard terms authoring includes editing standard clauses, creating nonstandard clauses, deleting nonstandard clauses and sections, and removing contract terms.
ORA_CSE_ASSET_ADMINISTRATOR_JOB	ORA_RCS_SCM_COMMON_WEB_SERVICE_DUTY	Supply Chain Common Web Service	Provides web service access to supply chain common to perform activities such as viewing inventory organizations, plant parameters, carriers and units of measure list of values.

Amend Contract

The amend contract object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}AmendContractParams

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ExternalReferenceKey	string	Used to identify external records that were imported.

Name	Type	Description
ExternalSourceKey	string	The source application where the contract was created. Used to identify records created through external web services.
Id	long	The unique identifier of the contract.
VersionFlag	boolean	Flag to mention whether new version to be created for amend operation

Cancel Contract Line

The cancel contract line object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}CancelContractLineParams

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CancelReasonCode	string	The reason code for the cancellation of a contract line or a covered asset.
ExternalReferenceKey	string	External reference key to identify a contract line or a covered asset.
ExternalSourceKey	string	External source key to identify a contract line or a covered asset.

Name	Type	Description
Id	long	Identifier of the contract line or covered asset.
RecordType	string	Type indicating which entity is being canceled - contract line or covered asset.
TrnCodeSetId	long	The set id to which the cancellation reason belongs to.

Close Service Contract

The close service contract object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}CloseServiceContractParams

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CloseDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date of closure of a contract, contract line or a covered asset.
CloseReasonCode	string	The reason code for the closure of a contract, contract line or a covered asset.
ExternalReferenceKey	string	External reference key to identify a contract, contract line or a covered asset.

Name	Type	Description
ExternalSourceKey	string	External source key to identify a contract, contract line or a covered asset.
Id	long	Identifier of the contract, contract line or covered asset.
RecordType	string	Type indicating which entity is being closed - contract, contract line or covered asset.
TerminationCreditMethodCode	string	The termination credit method for a contract, contract line or a covered asset.
TrnCodeSetId	long	The set id to which the close reason belongs to.

Contract

The contract header view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractHeader

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Contract Header Language Translation*
Contains	*Contract Billing Control*
Contains	*Contract Party*
Contains	*Sales Credit*
Contains	*Contract Related Document*
Contains	*Contract Header Descriptive Flexfield Attributes*

Relationship Type	Object or Service
Contains	*Contract Line*
Contains	*Contract Revenue Plan*
Contains	*Contract Bill Plan*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevel	string	The level of the access in the hierarchy.
AccountRuleId	long	The unique identifier of the accounting rule used for service revenue recognition.
AccountRuleName	string	The accounting rule used for service revenue recognition.
AdjustmentBasis	string	The adjustment basis for the contract.
AgreedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Agreed Amount
AgreementAmountLimit	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Agreement Amount Limit
AgreementEnabledFlag	boolean	The flag that denotes whether agreement is enabled for the contract.
AllowCurrencyOverrideFlag	boolean	Indicates whether currency can be overridden on a contract.
AllowExternalItemFlag	boolean	The flag that denotes whether external item is allowed on the contract.
AmendmentEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The effective date of the amendment.
ApTermsId	long	The terms identifier for accounts payable.

Name	Type	Description
ArInterfaceYn	string	Indicates whether the billing information has been interfaced.
Assignee	string	The assignee of the contract.
AssigneeId	long	The identifier associated with the assignee of the contract.
AssigneeType	string	The assignee type for the contract.
AuthoringPartyCode	string	The code of the authoring party.
AuthoringPartyMeaning	string	The meaning of the authoring party.
AutoSendForSignature	string	Auto Send For Signature Flag
BaseContractYN	string	Indicates if the contract is Base Contract.
BillPlan	*Contract Bill Plan*	The bill plan of the contract.
BillSequence	long	The sequence in which the bill was generated.
BillToAccount	string	The account to be billed for the contract.
BillToAccountId	long	The unique identifier of the bill-to account.
BillToAccountNumber	string	The account number of the bill-to account.
BillToSiteUseId	long	The identifier of the customer site identifier where the invoices are sent.
BillToSiteUseLocation	string	The user location of the bill-to site.
BillingControl	*Contract Billing Control*	The billing control element of the contract.
BillingDateMethod	string	Billing Date type for Billing Schedule.
BillingFrequency	string	The frequency in which service billing will occur.
BillingSalesrepId	long	Billing Sales Rep ID
BillingSalesrepName	string	Billing Sales Rep Name

Name	Type	Description
BuyOrSell	string	Indicates the intent of the contract; whether it is a buy or a sell contract.
CancelReason	string	The reason for cancellation of the contract.
CancelledAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Cancelled Amount
ChrType	string	The code associated with the type of the contract.
CloseReason	string	The reason for closing the contract.
Cognomen	string	The name of the contract.
Comment	string	The comment for the contract.
CommitmentAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount committed for the contract.
ContractClass	string	The class to which the contract belongs.
ContractCreditedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Contract Credited Amount
ContractHeaderFlexfieldVA	*Contract Header Descriptive Flexfield Attributes*	The contract header flex field element.
ContractHeaderTranslation	*Contract Header Language Translation*	The contract header translation element.
ContractId	long	Contract Unique Id • Primary Key
ContractInvoicedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Contract Invoiced Amount
ContractLine	*Contract Line*	The contract line element.
ContractNumber	string	The number of the contract.
ContractNumberModifier	string	The contract number modifier.
ContractOwnerId	long	The unique identifier of the contract owner.

Name	Type	Description
ContractParty	*Contract Party*	The contract party element.
ContractPuid	string	Contract PUID
ContractTrueValue	decimal	The true value of a contract after considering the terminations.
ContractTypeId	long	The unique identifier of the contract type.
ContractTypeName	string	The type of the contract.
ContributionPercent	decimal	The contribution percent of the contract.
CorpCurrencyCode	string	Corporate Currency Code
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	Currency Conversion Rate
Currency	string	The currency of the contract.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerPONumber	string	The customer PO number.
CustomerPartyId	long	The unique identifier of the customer party.
CustomerPartyName	string	Customer Party Name
CustomerPartySiteId	long	The unique identifier of the customer party site.
CustomerPartySiteName	string	Customer Party Site Name
DateApproved	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contract was approved.
DateSigned	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contract was signed.

Name	Type	Description
DateTerminated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contract was terminated.
DatetimeCancelled	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time when the contract was cancelled.
Description	string	The free text description of the record.
DiscountPercent	decimal	The discount in percentage of the contract applied to the bill rate.
DocumentSubType	string	Document Sub Type
EnableElectronicSignFlag	boolean	Flag to enable electronic signature
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
EsignTemplateId	string	Esignature Template Id
EstimatedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated amount of the contract.
ExemptCertificateNumber	string	The exempted certificate number.
ExemptReasonCode	string	The code associated with the exemption reason.
ExemptionReasonMeaning	string	The meaning of the exemption reason.
ExternalKey	string	Used to identify external records that were imported.
ExternalSource	string	The source application where the contract was created. Used to identify records created through external web services.
FOB	string	The Free on Board (FOB) of the contract.
FreightTerms	string	The freight terms associated with the contract.
GenerateBillingSchedule	string	Flag indicating whether billing schedules should be generated automatically or not.

Name	Type	Description
GeneratedInvoiceStatus	string	Generated Invoice Status
HoldReasonCode	string	The code identifying the hold reason.
HoldReasonCodeSetId	long	The unique identifier of the hold reason code set.
HoldReasonMeaning	string	Hold Reason Meaning
HoldUntilDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date until which the contract is on hold.
Id	long	The unique identifier of the contract.
IgnoreQAWarningsFlag	boolean	Indicator to ignore contract validation warnings.
InterCompanyFlag	boolean	Inter Company Flag
InterProjectFlag	boolean	Inter Project Flag
InvConvRateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the invoice conversion rate was set up.
InvConvRateDateType	string	The type of the invoice conversion rate date.
InvConvRateDateTypeName	string	Inventory Conversion Rate Date Type Name
InvConvRateType	string	The type of the invoice conversion rate.
InvConvRateTypeName	string	Inventory Conversion Rate Type Name
InvConversionRate	decimal	The currency conversion rate applied to the invoice.
InvOrganizationId	long	The unique identifier of the item master organization.
InvPrepayTrxTypeId	long	Invoice Prepayment Transaction Type ID
InvPrepayTrxTypeName	string	Invoice Prepayment Transaction Type Name
InvTrxTypeId	long	The unique identifier of the invoice transaction type.

Name	Type	Description
InvTrxTypeName	string	Invoice Transaction Type Name
InvoiceRuleId	long	The unique identifier of the invoice rule used for service billing.
InvoiceRuleName	string	The invoice rule used for service billing.
ItemSourceCode	string	The code identifying the item source.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LedgerCurrency	string	The currency used in the ledger.
LegalEntityId	long	The unique identifier of the legal entity.
LegalEntityName	string	The name of the legal entity.
LineClassCode	string	Line Class Code
MajorVersion	long	The major version of the record.
NegotiationCommChannel	string	The communication channel used in the negotiation process
NegotiationContractLayoutTemplate	string	The Contract Layout Template of the contract
NegotiationCustomerAcceptance	string	The flag which indicates if customer acceptance is required for contract activation
NegotiationEnableNotification	string	The flag to enable and disable reminder notifications
NegotiationInternalApproval	string	The internal approval criteria for contract activation
NegotiationLanguage	string	The language used in the negotiation process
NegotiationTermsLayoutTemplate	string	The terms layout template of the contract

Name	Type	Description
NetInvoiceFlag	boolean	Indicates whether the invoice is a net invoice.
NonStandardClauseCount	short	Nonstandard Clause Count
OrderNumber	string	The number of the order that created the contract.
OrderSource	string	The source of the order that created the contract.
OrgId	long	The unique identifier of the business unit.
OrgName	string	The name of the business unit.
OrigSystemId	long	The unique identifier of the original system.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemSourceCode	string	The code identifying the original system source.
OutputTaxClassificationCode	string	The code identifying the output tax classification.
OutputTaxSetId	long	The unique identifier of the output tax set.
OverallRiskCode	string	The code identifying the overall risk.
OwningOrgId	long	The unique identifier of the owning organization.
OwningOrgName	string	The name of the owning organization.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyObjectType	string	The type of the party object.
PaymentTermId	long	The unique identifier of the customer payment terms used for service billing.

Name	Type	Description
PaymentTermName	string	The customer payment terms used for service billing.
PeriodStartMeaning	string	Indicates whether service is priced from when it was bought or from calendar month start.
PeriodStartUsed	string	The code that Indicates whether service is priced from when it was bought or from calendar month start.
PeriodTypeMeaning	string	Indicates whether service is priced by fixed days for every month or by actual days of the month.
PeriodTypeUsed	string	The code Indicates whether service is priced by fixed days for every month or by actual days of the month.
PersonId	long	The unique identifier of the person.
PriceApplicationRule	string	Price Application Rule
PriceList	string	The price list.
PriceListName	string	The name of the price list.
PricingCalendarId	long	The unique identifier of the pricing calendar.
PricingCalendarName	string	The name of the pricing calendar.
PricingEffectivityDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The effective start date of pricing.
PricingPeriodType	string	The type of the pricing period.
PricingSegmentCode	string	The code of the pricing segment used to determine the pricing strategy for the contract.
PricingSegmentExplanation	string	Explanation of why a particular pricing segment was used to determine the pricing strategy for the contract.
PricingStrategyExplanation	string	Explanation of why a particular pricing strategy was used for pricing the contract.
PricingStrategyId	long	The unique identifier of the pricing strategy used to price the contract.

Name	Type	Description
PricingStrategyName	string	Pricing Strategy Name
PrimaryLedgerId	long	The unique identifier of the primary ledger.
PrimaryPartyId	long	The unique identifier of the primary party.
PrimarySalesRepresentative	string	The name of the primary sales rep
PrimarySalesrepId	long	The primary sales rep resource identifier
ProjectEnabledFlag	boolean	Indicates whether the project is enabled.
QuoteAccount	string	The organization name of the quote to contact
QuoteAddress	string	The correspondence address of the quote to contact
QuoteEmail	string	The email address of the quote to contact
QuoteFax	string	The fax of the quote to contact
QuoteOrg	string	The organization name of the quote to contact
QuotePhone	string	The phone number of the quote to contact
QuoteToContact	string	The party name of the quote to contact
QuoteToContactId	long	The party identifier of the quote to contact
QuoteToCopyToEmail	string	The copy to email address for customer communications
RecvInvOrg	string	The receiving inventory organization.
RecvInvOrgId	long	The unique identifier of the receiving inventory organization.
RelatedDocument	*Contract Related Document*	The related document element.
RenewalType	string	Renewal Type
RevenuePlan	*Contract Revenue Plan*	The revenue plan element.

Name	Type	Description
RunContractExpertFlag	boolean	Flag to decide whether to run expert after defaulting terms during contract creation or updation
SalesAccountId	long	The unique identifier of the sales account.
SalesAccountName	string	The name of the sales account.
SalesCredit	*Sales Credit*	The sales credit element.
SegmentExplanationMessageName	string	The explanation message name of the pricing segment used to determine the pricing strategy for the contract.
ServiceEnabledFlag	boolean	Indicates whether service is enabled.
ShipInvOrg	string	The shipping inventory organization.
ShipInvOrgId	long	The unique identifier of the shipping inventory organization.
ShipToAccount	string	The ship-to account.
ShipToAccountId	long	The unique identifier of the ship-to account.
ShipToAccountNumber	string	The account number of the ship-to account.
ShipToOrgLocation	string	The ship-to organization location.
ShipToPartyId	long	The unique identifier of the ship-to party location.
ShipToPartyName	string	Ship To Party Name
ShipToPartySiteId	long	The unique identifier of the ship-to party site location.
ShipToPartySiteLocation	string	Ship To Party Site Location
ShipToSiteUseId	long	The unique identifier of the ship-to site.
ShipToSiteUseLocation	string	The ship-to site use location.

Name	Type	Description
ShortDescription	string	The short description.
SkipPDPFlag	boolean	Indicator to Skip PDP call when defaulting Pricing Terms for Sales agreements
SoldToAccount	string	The sold-to account.
SoldToAccountDescription	string	The description of the sold-to account.
SoldToAccountId	long	The unique identifier of the sold-to account.
SoldToAccountNumber	string	The account number of the sold-to account.
SoldToAddress	string	The sold-to address.
SoldToNumber	string	The sold-to number.
SoldToSiteId	long	The unique identifier of the sold-to site.
SourceDocumentId	long	Source Document Id
SourceDocumentSystemCode	string	Source Application Code
SpecificDays	int	The day and offset for Billing Schedule.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
StateTransitionFlowName	string	The name of the state transition flow.
StateTransitionFlowState	string	The state transition flow state.
Status	string	The status of the record.
StsCode	string	The code identifying the status.
Subtotal	decimal	The sub total amount of the contract.
Supplier	string	The supplier of the contract.
SupplierId	long	The unique identifier of the supplier.

Name	Type	Description
SupplierSite	string	The supplier site.
SupplierSiteId	long	The unique identifier of the supplier site.
TaxAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The tax amount.
TaxClassificationMeaning	string	The meaning of the tax classification.
TaxExemptionControl	string	The tax exemption control.
TemplateFlag	boolean	The flag identifying the template.
TerminateCancelSource	string	The source of terminating or canceling the contract.
TermsTemplateId	long	The unique identifier of the terms template.
TermsTemplateName	string	Terms Template Name
TransactionTypeName	string	Transaction type name
TrnCodeSetId	long	The unique identifier of the cancel or the close reason code set.
UnbilledAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Unbilled Amount
UnderAmendVersionFlag	boolean	Under Amend Version Flag
UnderMigrationFlag	boolean	Under Migration Flag
UserStatusCode	string	The code identifying the user status.
UserStatusMeaning	string	The meaning of the user status.
VersionDescription	string	The description of the version.
VersionType	string	Version Type
WebServiceFlag	boolean	The flag identifying the web service.

Contract Assigned Billing Extension

The set of billing extensions, that define custom invoice and revenue processing, assigned to a project contract bill or revenue plan.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractPublicService/}AssignmentDetail

Logical Business Objects

- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Bill Plan*
Contained by	*Contract Revenue Plan*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	Indicator to check if assigned billing extension is active.
AssignmentDetailId	long	Unique identifier of the assigned billing extension for the bill or revenue plan. • Primary Key
CalculationLevel	string	The calculation level of the contract.
CalculationLevelCode	string	Indicates the level at which the billing event amount is calculated by the billing extension. Values are Contract Line and Associated Project.

Name	Type	Description
ExtensionAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	User-entered amount in bill transaction currency used by the billing extension to create an automatic billing event.
ExternalReferenceKey	string	Unique identifier of the assigned billing extension in the source application. Used to identify billing extension assignments to contract bill plans created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the assigned billing extension originates. Used to identify billing extension assignments created through external webservices.
MajorVersion	long	Version of the contract containing this particular set of assigned billing extension details. • Primary Key
Percentage	decimal	User-specified percentage to apply in calculating automatic events by the billing extension.

Contract Associated Project

The association of a contract line that funds project-based work to the projects and tasks that manage the execution of the work.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractPublicService/}AssociatedProject

Logical Business Objects

- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Line*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	Indicator to check if associated project is active.
ExternalReferenceKey	string	Unique identifier of the associated project in the source application. Used to identify project and task associations to contract lines created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the associated project originates. Used to identify project and task associations created through external webservices.
FundingAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The portion of the amount, to be received to fund a contract line, applicable to the associated project.
LinkId	long	Unique identifier of the association of a project and task to a contract line. • Primary Key
MajorVersion	long	Version of the contract containing this particular set of associated project details. • Primary Key
PercentComplete	decimal	For an associated project, a numeric value from 0-100 reflecting the progress it is making towards completion.
ProjElementId	long	Unique identifier of the task associated with the contract line.
ProjectId	long	Unique identifier for the project associated with the contract line.
ProjectNumber	string	The project number of the project on the linkage.
TaskNumber	string	The task number of the task on the linkage.

Contract Bill Plan

The set of instructions, assigned to one or many contract lines, on how to invoice the project contract customer.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractPublicService/}BillPlan

Logical Business Objects

- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Job Title Override SDO*
Contains	*Job Rate Override SDO*
Contains	*Labor Multiplier Override SDO*
Contains	*Contract Bill Plan Descriptive Flexfields*
Contains	*Non-labor Rate Override*
Contains	*Contract Assigned Billing Extension*
Contains	*Contract Bill Plan Translation*
Contains	*Job Assignment Override SDO*
Contains	*Person Rate Override*
Contained by	*Contract*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AssignmentDetail	*Contract Assigned Billing Extension*	Section that displays the billing extensions assigned to the bill plan.
BillMethodId	long	Unique identifier of the invoice method used to invoice against this bill plan.
BillMethodName	string	The name of the bill method.
BillPlanDescriptiveFlexField	*Contract Bill Plan Descriptive Flexfields*	A set of configurable fields that captures customer specific business process information on the contract bill plan.
BillPlanId	long	Unique identifier of the contract bill plan. • Primary Key
BillPlanName	string	Name of the bill plan that contains details on how contract lines are to be invoiced.
BillPlanTranslation	*Contract Bill Plan Translation*	A complete set of language translations for the multilingual attributes of a bill plan and revenue plan.
BillSetNumber	decimal	The billing set number used to group invoices.
BillToAccountNumber	string	The customer to whom invoices are sent to and is responsible for the payment.
BillToContactEmail	string	The email of the contact person from the bill-to customer site.
BillToContactId	long	Unique identifier of the bill-to customer contact person on a bill plan.
BillToContactName	string	The contact person of the bill-to customer.
BillToCustomerAccountId	long	The unique identifier of the account of the bill-to customer.
BillToSite	string	The customer site where the invoices are sent.
BillToSiteUseId	long	Unique identifier of the bill-to customer site that is responsible for receiving and paying the invoice amount.
BillingCurrencyType	string	The currency option of the bill plan.

Name	Type	Description
BillingCycle	string	The billing cycle of the contract bill plan.
BillingCycleId	long	Unique identifier of the frequency at which invoices are created for the bill plan.
BurdenSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the burden schedule.
BurdenSchId	long	Unique identifier of the burden schedule specified in the bill plan.
BurdenSchedule	string	The burden schedule on the revenue plan.
DocumentNumber	string	The document number on the bill plan for the letter of credit.
EnableLbrBillXtnsnFlag	boolean	Indicator to allow usage of the labor billing extension when deriving the bill rate for labor transactions.
EnableNlBillXtnsnFlag	boolean	Indicator to allow usage of the nonlabor billing extension when deriving the bill rate for nonlabor transactions.
EventInvoiceFormat	string	Events invoice identifier which summarizes invoice distributions into invoice lines. This option is applicable for events transactions.
EventsInvoiceFormatId	long	Unique identifier of the invoice format that is used to group events invoiced against the bill plan into invoice lines.
ExternalReferenceKey	string	Unique identifier of the bill plan in the source application. Used to identify contract bill plans created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the bill plan originates. Used to identify contract bill plans created through external webservices.
FederalInvoiceFormat	string	The invoice format of the GMS contract invoices.
FirstBillingOffsetDays	decimal	The number of days after the commencement of the project, that the first invoice will be generated.

Name	Type	Description
InvoiceComment	string	User-specified text intended for printing on invoices created for this bill plan.
InvoiceCurrencyCode	string	The name of the currency in which the invoice is issued and revenue is recognized. It is also known as the entered currency in Oracle Fusion General Ledger for invoice and revenue accounting entries.
InvoiceCurrencyConversionDateType	string	The type of the invoice currency date.
InvoiceCurrencyConversionRateType	string	The code identifying the invoice currency rate type.
InvoiceCurrencyDateType	string	The code identifying the invoice currency date type.
InvoiceCurrencyExchgDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the invoice currency exchange was set up.
InvoiceCurrencyOptCode	string	The type of currency that is used to determine the invoice and revenue currency for invoices and revenue that are created for the contract lines associated with the bill plan. The billing currency type can be the contract currency, bill transaction currency, or any user-specified currency.
InvoiceCurrencyRateType	string	The code signifying the invoice currency rate type.
InvoiceInstructions	string	Internal billing instructions that will not appear on the customer invoice.
JobAssignmentOverride	*Job Assignment Override SDO*	Job assignment override linkage
JobBillRateSchId	long	Unique identifier of the job rate schedule used to derive the bill rate for labor transactions.
JobRateOverride	*Job Rate Override*	Section that displays the job rate overrides for a bill plan.
JobTitleOverride	*Job Title Override SDO*	Job title override linkage
LaborBillBasisCode	string	Nonlabor cost basis code for cost reimbursable.
LaborCostBasis	string	The labor cost basis for cost reimbursable.

Name	Type	Description
LaborDiscountPercentage	decimal	The factor by which all bill rates derived from the person or job rate schedule for this bill plan are to be discounted.
LaborDiscountReasonCode	string	Explains the reason for the discount percentage offered against the person and job rate schedules specified in the bill plan.
LaborInvoiceFormat	string	The labor invoice format that summarizes the invoice distribution in the invoice lines. This option is applicable for labor transactions.
LaborInvoiceFormatId	long	Unique identifier of the invoice format that is used to group labor expenditure items invoiced against the bill plan into invoice lines.
LaborMarkupPercentage	decimal	Labor markup percentage.
LaborMultiplierOverride	*Labor Multiplier Override SDO*	Labor multiplier override linkage
LaborRateChangeReason	string	The reason for the change in the labor rate.
LaborSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the person or job rate schedule.
LaborTpSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the intercompany labor transfer price schedule.
LaborTpScheduleId	long	Unique identifier of the transfer price labor schedule used to derive the bill rate for intercompany labor transactions.
LocFlag	boolean	Indicates the bill plan uses letter of credit for billing.
MajorVersion	long	Version of the contract containing this particular set of bill plan details. • Primary Key
NlBillBasisCode	string	The nonlabor cost basis code of the reimbursable cost.
NlBillRateSchId	long	Unique identifier of the nonlabor rate schedule used to derive the bill rate for nonlabor transactions.

Name	Type	Description
NlDiscountPercentage	decimal	The factor by which all bill rates derived from the nonlabor rate schedule for this bill plan are to be discounted.
NlDiscountReasonCode	string	Explains the reason for the discount percentage offered against the nonlabor rate schedule specified in the bill plan.
NlInvoiceFormatId	long	Unique identifier of the invoice format that is used to group nonlabor expenditure items invoiced against the bill plan into invoice lines.
NlMarkupPercentage	decimal	The factor by which the bill amount will be calculated over the nonlabor cost.
NlSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the nonlabor rate schedule.
NlTpSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the intercompany nonlabor transfer price schedule.
NlTpScheduleId	long	Unique identifier of the transfer price labor schedule used to derive the bill rate for intercompany nonlabor transactions.
NonLaborRateOverride	*Non-labor Rate Override*	Section that displays the nonlabor rate overrides for a bill plan.
NonlaborCostBasis	string	The nonlabor cost basis of the reimbursable cost.
NonlaborInvoiceFormat	string	The nonlabor invoice format that summarizes the invoice distributions in the invoice lines. This option is applicable for nonlabor transactions.
NonlaborRateChangeReason	string	The reason for change in the nonlabor rate.
OnHoldFlag	boolean	Indicator to check if bill plan is eligible for invoice generation.
PaymentTerms	string	The payment term.
PaymentTermsId	long	The unique identifier of the payment term.
PersonBillRateSchId	long	The unique identifier of the employee bill rate schedule.

Name	Type	Description
PersonRateOverride	*Person Rate Override*	Section that displays the person rate overrides for a bill plan.
ProjectRoleBillRateSchId	long	
ReportTypeCode	string	Indicates the federal invoice format that is used for bill presentment.

Contract Bill Plan Descriptive Flexfields

The contract bill plan descriptive flex fields.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/}BilllPlanDff

Logical Business Objects

- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Revenue Plan Deprecated*
Contained by	*Contract Bill Plans*
Contained by	*Contract Bill Plan*
Contained by	*Contract Revenue Plan*
Handled by	*Contract Service Version 2*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillPlanId	long	The unique identifier of the bill plan. • Primary Key
MajorVersion	long	The major version on which the bill plan was defined. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Contract Bill Plan Translation

The complete set of language translations for the multilingual attributes of bill plan and revenue plan.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractPublicService/}BillPlanTranslation

Logical Business Objects

- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Bill Plan*
Contained by	*Contract Revenue Plan*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillPlanId	long	Unique identifier of the bill plan that contains details on how contract lines are to be invoiced. • Primary Key
BillPlanName	string	Translated name of the bill plan that contains details on how contract lines are to be invoiced.
InvoiceComment	string	User-specified translated text intended for printing on invoices created for this bill plan.
InvoiceInstructions	string	Internal translated billing instructions that will not appear on the customer invoice.
Language	string	Indicates into which language the bill plan is translated. • Primary Key
MajorVersion	long	Version of the contract containing this particular set of bill plan translation details. • Primary Key
SourceLang	string	Indicates which language is the source language of the bill plan.

Contract Billing Control

The set of hard and soft limits within a date range, at the contract header and contract line levels, that controls which transactions and the total amount of transactions that can be invoiced or recognized for revenue for a contract and contract line.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractPublicService/}BillingControl

Logical Business Objects

- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Line*

Relationship Type	Object or Service
Contained by	*Contract*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	Indicator to check if billing control is active.
BillingControlId	long	Unique identifier of a billing control defined on the contract or contract line. • Primary Key
BillingResource	string	The resource breakdown structure element of the billing control.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which a billing control is no longer available for validating a transaction for billing.
ExternalReferenceKey	string	Unique identifier of the billing control in the source application. Used to identify contract billing controls created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the billing control originates. Used to identify contract billing controls created through external webservices.
HardLimitAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The maximum inception-to-date billed amount for transactions applicable to this billing control at which an error is to be given that the hard limit has been reached. Billing can't continue beyond the hard limit amount.
MajorVersion	long	Version of the contract containing this particular set of billing control details. • Primary Key
RbsElementId	long	Unique identifier of the resource associated with the billing control on the contract.

Name	Type	Description
SoftLimitAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The inception-to-date billed amount for transactions applicable to this billing control at which a warning is to be given that the soft limit has been reached. Billing can continue beyond the soft limit amount.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date before which a billing control is no longer available for validating a transaction for billing.

Contract Charge

The contract charge view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractCharge

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Contract Charge Component*
Contains	*Contract Manual Price Adjustment*
Contained by	*Contract Line*
Contained by	*Contract Covered Asset*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ChargeAppliesTo	string	Charge Applies To
ChargeCurrencyCode	string	Charge Currency Code
ChargeDefinition	string	The definition of the charge applied to calculate the service price.
ChargeDefinitionCode	string	Charge Definition Code
ChargeSubtypeCode	string	Charge Subtype Code
ChargeTypeCode	string	Charge Type Code
ContractChargeComponent	*Contract Charge Component*	The contract charge component.
ContractManualPriceAdjustment	*Contract Manual Price Adjustment*	Contract Manual Price Adjustment
CoverageExtendedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The extended amount calculated by multiplying the charge price times the service duration.
CoveredItemQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	Covered Item Quantity
CoveredItemUOMCode	string	Covered Item UOM Code
CurrencyCode	string	Currency Code
ExternalReferenceKey	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalSourceKey	string	The unique identifier of the source application where the contract charge was created. Used to identify records created through external web services.
Id	long	The unique identifier of the contract charge. • Primary Key
InvoiceRuleId	long	The unique identifier of the invoice rule used for service billing.
InvoiceRuleMeaning	string	The invoice rule used for service billing.
MajorVersion	long	The major version of the record.

Name	Type	Description
		• Primary Key
ParentEntityCode	string	Parent entity code
PaymentSetId	long	The unique identifier of the prepayment receipt.
PricePeriodicity	string	The applicable unit of duration in which the price is calculated.
PricePeriodicityCode	string	Price Periodicity Code
PriceTypeCode	string	Price Type Code
PricedQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	Priced Quantity
PricedQuantityUOMCode	string	Priced Quantity UOM Code
PrimaryFlag	boolean	Primary Flag
RollupFlag	boolean	Rollup Flag
SourceChargeId	string	Source Charge Id
UnitPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The unit price of the charge.

Contract Charge Component

The contract charge component view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractChargeComponent

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Charge*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ChargeComponentId	long	Charge Component Id
ChargeCurrencyCode	string	Charge Currency Code
ChargeCurrencyExtendedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The extended amount calculated for the charge component in the charge currency.
ChargeCurrencyUnitPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Charge Currency Unit price
ChargeId	long	Charge Id
CoverageExtendedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Coverage Extended Amount
Explanation	string	Charge Component Explantion
ExplanationMessageName	string	Explanation Message Name
ExternalReferenceKey	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalSourceKey	string	The unique identifier of the source application where the contract charge component was created. Used to identify records created through external web services.
HeaderCurrencyCode	string	Header Currency Code
HeaderCurrencyCoverageExtendedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The extended amount calculated for the charge component in the header currency.
HeaderCurrencyExtendedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Header Currency Extended Amount

Name	Type	Description
HeaderCurrencyUnitPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Header Currency Unit Price
Id	long	The unique identifier of the charge component. • Primary Key
MajorVersion	long	The major version of the record. • Primary Key
PercentOfComparisonElement	decimal	Percent Of Comparison Element
PriceElementCode	string	The code of the price element used for the charge component.
PriceElementUsageCode	string	Price Element Usage Code
PricingSourceId	long	Pricing Source Id
PricingSourceTypeCode	string	Pricing Source Type Code
RollupFlag	boolean	Indicates whether the charge component is a roll up of other charge components.
SourceChargeComponentId	string	Source Charge Component Id
SourceChargeId	string	Source Charge Id
SourceParentChargeComponentId	string	Source Parent Charge Component Id
TaxIncludedFlag	boolean	Tax Included Flag

Contract Covered Asset

The contract-covered asset view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractCoveredAsset

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Contract Charge*
Contains	*Contract Service Billing Summary*
Contained by	*Contract Line*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Amount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The covered asset amount.
AssetId	long	The unique identifier of the customer asset.
AssetName	string	The customer asset name referred to in the covered asset.
CancelledAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Cancelled Amount
ContractBillLine	*Contract Service Billing Summary*	Contract Bill Line
ContractCharge	*Contract Charge*	The charge associated with the contract.
CoveragePricingError	string	The error code generated while calculating the price on the covered asset.
CreditedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Credited Amount
DateTerminated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date Terminated

Name	Type	Description
DurationQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	Covered Asset Duration
EndDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The date on which the service ends on the covered asset.
ExternalReferenceKey	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalSourceKey	string	The unique identifier of the source application where the contract covered asset was created. Used to identify records created through external web services.
GenerateBillingSchedule	string	Flag indicating whether billing schedules should be generated automatically or not.
Id	long	The unique identifier of the covered asset. • Primary Key
InvoiceText	string	The text for the invoice line that is interfaced for service billing.
InvoicedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Invoiced Amount
ItemId	long	The unique identifier of the item.
LineNumber	string	The line number.
LineSubTotal	decimal	Line SubTotal
MajorVersion	long	The major version of the record. • Primary Key
Period	string	Covered Asset Period
PriceAsOf	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The date as of which a contract line or asset line is priced.
PriceList	string	Price List
PriceListId	long	Price List Id

Name	Type	Description
PriceUOM	string	The unit of measure in which the service is priced for the covered asset.
PricingActionCode	string	The pricing action used to calculate the price on the covered asset.
Quantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The number of items.
ReasonCodeMeaning	string	Reason Code Meaning
RenewalType	string	Renewal Type
ReturnCreditMethodCode	string	The code of the credit method used to calculate credit.
ReturnCreditMethodMeaning	string	Return Credit Method Meaning
SerialNumber	string	Serial Number
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the service starts on the covered asset.
StatusCode	string	Status Code
StatusMeaning	string	Status Meaning
TaxAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Tax Amount
TaxError	string	Tax Error
TerminatedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Terminated Amount
TransactionCodeSetId	long	The reference set used to filter the termination or cancellation code applied on the covered asset.
UOMCode	string	The code identifying the unit of measure.
UnbilledAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Unbilled Amount
VersionType	string	Version Type

Name	Type	Description

Contract Document

The view object for adding documents to a contract.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractAttachment

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttachedBy	string	Name of the user who created this attachment
AttachedDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Date when this attachment is created
AttachedDocumentId	long	Attched Document Identifier
AttachmentType	string	The attachment type of the contract document.
AttachmentTypeName	string	Attachment Type Name of the Document
Category	string	Category Name of the Document
CategoryCode	string	The category code of the document.
ContractId	long	Contract ID.

Name	Type	Description
Description	string	The free text description of the record.
ExternalKey	string	Used to identify external records that were imported.
ExternalSource	string	The source application where the contract document was created. Used to identify records created through external web services.
MajorVersion	long	Contract Major Version
Title	string	The title of the document.
URL	string	The destination URL associated with a specific Google AdWords ad.
UploadedFile	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The uploaded file.
UploadedFileName	string	The name of the uploaded file.

Contract Header Descriptive Flexfield Attributes

The contract header flex field view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/header/flex/header/}ContractHeaderFlexfield

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Deprecated*
Contained by	*Contract*

Relationship Type	Object or Service
Handled by	*Contract Service Version 2*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContractId	long	Contract Header Flexfield Unique ID • Primary Key
Id	long	The unique identifier of the contract header flex field.
MajorVersion	long	The major version of the record.
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Contract Header Language Translation

The contract header translation view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractHeaderTranslation

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract*

Relationship Type	Object or Service
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Cognomen	string	The translation of the contract header language.
Description	string	The free text description of the record.
Id	long	The unique identifier of the contract translation. • Primary Key
Language	string	Indicates the code of the language in which the contents of the translatable columns are translated. • Primary Key
MajorVersion	long	The major version of the record. • Primary Key
ShortDescription	string	The short description.
SourceLang	string	The language at the source system.
VersionDescription	string	The description of the version.

Contract Line

The contract line view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractLine

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Contract Billing Control*
Contains	*Internal Contract Line Attributes SDO*
Contains	*Sales Credit*
Contains	*Contract Charge*
Contains	*Contract Line Language Translation*
Contains	*Contract Line*
Contains	*Contract Line Descriptive Flexfield Attribute*
Contains	*Contract Covered Asset*
Contains	*Contract Associated Project*
Contains	*Pricing Terms Sales Agreement*
Contains	*Contract Service Billing Summary*
Contained by	*Contract Line*
Contained by	*Contract*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountRuleId	long	The unique identifier of the accounting rule used for service revenue recognition.

Name	Type	Description
AccountRuleMeaning	string	The accounting rule used for service revenue recognition.
AdjustmentAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The adjustment amount on the contract line.
AdjustmentBasisCode	string	The adjustment basis code on the contract line.
AdjustmentBasisId	long	Adjustment Basis Id
AdjustmentType	string	The adjustment type on the contract line.
AdjustmentTypeCode	string	The adjustment type code on the contract line.
AgreedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The agreed amount on the contract line.
AgreedQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The agreed quantity on the contract line.
AgreementAmountLimit	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The agreement amount limit on the contract line.
AgreementPriceLimit	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The agreement price limit on the contract line.
AgreementPriceOverAllwdYn	string	The flag that denotes whether the agreement price can be overridden on the contract.
AgreementQuantityLimit	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The agreement quantity limit on the contract line.
AgreementUnitPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The agreement unit price on the contract line.
AllowCustomAdjustmentsFlag	boolean	The flag that denotes whether custom adjustment is allowed.
AllowPricelistOverrideYn	string	An indicator to denote whether price list can be overridden on the contract.
AllowPromotionsYn	string	The flag that denotes whether promotions are allowed on the contract.
ArInterfaceYn	string	Indicates whether the billing information has been interfaced.

Name	Type	Description
AssociatedProject	*Contract Associated Project*	The associated project on the contract line.
AtRiskYn	string	Indicates whether the contract is at risk.
AutoApplyStrategyPriceAdjustmentFlag	boolean	Auto Apply Strategy Price Adjustment Flag
BillPlan	string	The name of the bill plan.
BillPlanId	long	The unique identifier of the bill plan.
BillToAccount	string	The bill-to account where invoices are sent.
BillToAccountDescription	string	Bill To Account Description
BillToAccountId	long	The unique identifier of the bill-to account.
BillToAccountNumber	string	The number of the bill-to account where invoices are sent.
BillToAddress	string	The bill-to address where invoices are sent.
BillToSiteUseId	long	The unique identifier of the bill-to site where invoices are sent.
BillToSiteUseLocation	string	The bill-to site location where invoices are sent.
BillingControl	*Contract Billing Control*	The billing control element of the contract line.
BillingDateMethod	string	Billing Date type for Billing Schedule.
BillingFrequency	string	The code of the frequency in which service billing occurs.
BillingFrequencyMeaning	string	The frequency in which service billing occurs.
CancelledAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Cancelled Amount
CarrierId	long	The unique identifier of the carrier.
CarrierName	string	The name of the carrier.

Name	Type	Description
CloseReason	string	The reason for closing the contract.
Cognomen	string	The contract line.
Comments	string	The comments for the record.
CommitLevel	string	The commit level for the contract line.
CommitLevelCode	string	The code associated with the commit level.
ContractAllLineDesFlexVA	*Contract Line Descriptive Flexfield Attribute*	The flex field element of the contract line.
ContractAllLine_2	*Contract Line*	The sub-line element of the contract.
ContractBillLine	*Contract Service Billing Summary*	Contract Bill Line
ContractCharge	*Contract Charge*	The charge associated with the contract.
ContractCoveredAsset	*Contract Covered Asset*	The asset covered by the contract.
ContractLineTranslation	*Contract Line Language Translation*	The contract line translation element.
ContractSubscriptionLineRenewalType	string	Contract Renewal Type
CoverageScheduleId	long	Coverage Schedule
CreditedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Credited Amount
CustomerPONumber	string	The customer PO number.
DateTerminated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contract was terminated.
DeliveryDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contract was delivered.
DurationQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	Duration
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.

Name	Type	Description
EstimatedVariableConsiderationAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Estimated Variable Consideration Amount
ExemptCertificateNumber	string	The exempted certificate number.
ExemptReason	string	The reason why the contract was exempted.
ExemptReasonCode	string	The code associated with the exemption reason.
ExternalItemKey	string	The external item key.
ExternalItemReference1	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalItemReference2	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalItemReference3	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalItemReference4	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalItemReference5	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalItemSource	string	The source of the external item.
ExternalKey	string	Used to identify external records that were imported.
ExternalSource	string	The source application where the contract line was created. Used to identify records created through external web services.
FOB	string	The FOB of the contract line.
FOBCode	string	The code identifying the FOB of the contract.
FixedPriceServiceYn	string	Indicates whether the contract supports fixed price service.

Name	Type	Description
FloorPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The floor price of the contract.
FreightTerms	string	The freight terms associated with the contract.
FreightTermsCode	string	The code identifying the freight term.
GenerateBillingSchedule	string	Flag indicating whether billing schedules should be generated automatically or not.
HoldReason	string	The reason signifying why the contract is on hold.
HoldReasonCode	string	The code identifying the hold reason.
HoldReasonCodeSetId	long	The unique identifier of the hold reason code set.
HoldUntilDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date until which the contract is on hold.
Id	long	The unique identifier of the contract line.
InvTrxTypeId	long	The identifier of the invoice transaction type used for service billing.
InvoiceRuleId	long	The unique identifier of the invoice rule.
InvoiceRuleMeaning	string	The invoice rule used for service billing.
InvoiceText	string	The text for the invoice line that is interfaced for service billing.
InvoicedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount as per the invoice.
ItemDescription	string	The description of the item.
ItemName	string	The name of the item.
ItemNameTxt	string	The free form name of the item.
ItemQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The number of items.

Name	Type	Description
LastRevenueRecogDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the revenue was last recognized.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last Update Date
LineAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount in the contract line.
LineId	long	Line Id • Primary Key
LineNumber	string	The line number.
LinePuid	string	Line PUID
LineStatus	string	The status of the line.
LineSubTotal	decimal	Line SubTotal
LineTypeId	long	The unique identifier of the line type.
LineTypeName	string	The name of the line type.
LineValueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount at the contract line.
ListPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The listed price.
MajorVersion	long	The major version of the record.
MinimumReleaseAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The minimum release amount.
MinimumReleaseQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The minimum release quantity.
Object1Id1	long	The unique identifier of the item.
Object1Id2	long	The unique identifier of the item.

Name	Type	Description
OrderId	long	The source system identifier of the order that created the contract line.
OrderLineId	long	The source system line identifier of the order that created the contract line.
OrderLineNumber	string	The source system line number of the order that created the contract line.
OrderNumber	string	The source system number of the order that created the contract line.
OrderSource	string	The source of the order that created the contract line.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemSourceCode	string	The code identifying the originating system source.
OutputTaxClassMeaning	string	The output tax classification.
OutputTaxClassificationCode	string	The code identifying the output tax classification.
PaymentSetId	long	The unique identifier of the prepayment receipt.
PaymentTerms	string	The payment term.
PaymentTermsId	long	The unique identifier of the payment term.
PaymentTermsMeaning	string	The customer payment terms used for service billing.
PercentComplete	decimal	The percentage complete.
PriceApplicationRule	string	Price Application Rule
PriceAsOf	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date as of which a contract line or asset line is priced.
PriceBook	string	Price Book
PriceBookId	long	Price Book Id

Name	Type	Description
PriceDuringBillingYn	string	Flag indicating whether the pricing should be done during the billing time.
PriceItemQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	Price Item Quantity
PriceItemUOM	string	Price Item UOM
PriceList	string	The price list.
PriceListId	long	The unique identifier of the price list.
PriceUOM	string	Price UOM
PricingError	string	Pricing Error
PricingTerm	*Pricing Terms Sales Agreement*	Pricing Term
ProjectContractLineInternalAttributes	*Internal Contract Line Attributes SDO*	Project Contract Line Internal Attributes
PurchasingCategory	string	The purchasing category.
PurchasingCategoryId	long	The unique identifier of the purchasing category.
RecInvOrgName	string	The name of the receiving inventory organization.
RecvInvOrgId	long	The unique identifier of the receiving inventory organization.
RecvLocationId	long	The unique identifier of the receiving location.
ReturnCreditMethodCode	string	The code of the credit method used to calculate credit.
ReturnCreditMethodMeaning	string	The credit method used to calculate credit.
RevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The revenue amount.
RevenuePlan	string	The name of the revenue plan.

Name	Type	Description
RevenuePlanId	long	The unique identifier of the revenue plan.
SalesCredit	*Sales Credit*	Sales Credit
ShipInvOrgId	long	The unique identifier of the ship-to inventory organization.
ShipToAccount	string	The name of the ship-to account.
ShipToAccountId	long	The unique identifier of the ship-to account.
ShipToAccountNumber	string	The account number of the ship-to account.
ShipToOrgLocation	string	The ship-to organization location.
ShipToPartyId	long	The unique identifier of the ship-to party location.
ShipToPartyName	string	Ship To Party Name
ShipToPartySiteId	long	The unique identifier of the ship-to party site location.
ShipToPartySiteLocation	string	Ship To Party Site Location
ShipToSite	string	The ship-to site.
ShipToSiteUseId	long	The unique identifier of the ship-to site.
SourceDocumentId	long	Source Document Id
SourceDocumentLineId	long	Source Document Line Id
SourceDocumentSystemCode	string	Source Application Code
SourceSystemAttributes	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The attributes of the source system.
SpecificDays	int	The day and offset for Billing Schedule.
StandaloneSellingPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Standalone Selling Price

Name	Type	Description
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
StsCode	string	The code identifying the status.
Supplier	string	The name of the supplier.
SupplierId	long	The unique identifier of the supplier.
SupplierSiteId	long	The unique identifier of the supplier site.
SupplierSiteName	string	The name of the supplier site.
TaxAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Tax Amount
TaxClassificationMeaning	string	Tax Classification Meaning
TaxError	string	Tax Error
TaxExemptionControl	string	The tax exemption control.
TaxExemptionControlMeaning	string	The meaning of the tax exemption control.
TerminatedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Terminated Amount
TrnCode	string	The code identifying the close or the cancel reason.
TrnCodeSetId	long	The unique identifier of the close or cancel set.
UOMCode	string	The code identifying the unit of measure.
UnbilledAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Unbilled Amount
UnitOfMeasure	string	The unit Of measure.
UnitPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The unit price.
VendorSiteId	long	The unique identifier of the vendor site.

Name	Type	Description
VersionType	string	Version Type
WareHouse	string	The ware house.

Contract Line Descriptive Flexfield Attribute

The contract line flex field view object.

QName: {http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/}ContractLineDescFlexfield

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Line*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Id	long	The unique identifier of the contract line flex field.
LineId	long	Line Id • Primary Key
MajorVersion	long	The major version of the record.
ObjectVersionNumber	int	Object Version Number

Name	Type	Description
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Contract Line Language Translation

The contract line translation view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractLineTranslation

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Line*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Cognomen	string	The translation of the contract line language.
Comments	string	The comments for the record.
Id	long	The unique identifier of the contract line. • Primary Key
ItemDescription	string	The description of the item.

Name	Type	Description
ItemName	string	The name of the item.
Language	string	Indicates the code of the language into which the contents of the translatable columns are translated. • Primary Key
LineDescription	string	The description of the line.
LineName	string	The name of the line.
LineReference	string	The reference of the line.
MajorVersion	long	The major version of the record. • Primary Key
SourceLanguage	string	The language at the source system.

Contract Manual Price Adjustment

The contract manual price adjustment object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractManualPriceAdj

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Charge*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdjustmentAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The adjustment amount.
AdjustmentCurrencyCode	string	The currency code of the adjustment being applied.
AdjustmentTypeCode	string	The code of the adjustment type.
AdjustmentValue	decimal	The value of the adjustment.
BasisElementCode	string	The code of the adjustment basis element.
ChargeDefinitionCode	string	The code of the charge definition applied to calculate the service price.
ChargeDefinitionId	string	The identifier of the charge definition applied to calculate the service price.
ChargeParentEntityCode	string	The code of the parent entity of the charge being applied.
ChargeParentEntityId	long	The identifier of the parent entity of the charge being applied.
ChargeRollupFlag	boolean	Flag indicating whether the charge should be rolled up.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Id	long	The unique identifier of the manual adjustment applied on a charge for a contract line. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MajorVersion	long	The major version of the record.

Name	Type	Description
		• Primary Key
ManualPricingError	string	The error code generated while applying a manual adjustment on a charge of a contract line.
PeriodFrom	decimal	Charge period from of a manual adjustment.
PeriodUntil	decimal	Charge period to of a manual adjustment.
PricePeriodicityCode	string	The major version of the record.
ReasonCode	string	The code of the manual adjustment reason.
UsageUOMCode	string	The UOM code for usage charge.
ValidFrom	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The start date of the manual adjustment.
ValidUntil	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The end date of the manual adjustment.

Contract Party

The contract party view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractParty

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Contract Party Descriptive Flexfield Attributes*
Contains	*Contract Party Language Translation*

Relationship Type	Object or Service
Contains	*Contract Party Contact*
Contained by	*Contract*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContractPartyContact	*Contract Party Contact*	The contact of the contract party.
ContractPartyFlexfieldVA	*Contract Party Descriptive Flexfield Attributes*	The flex field element of the contract party.
ContractPartyTranslation	*Contract Party Language Translation*	The translation element of the contract party.
DeleteFlag	boolean	Delete Flag
ExternalKey	string	Used to identify external records that were imported.
ExternalSource	string	The source application where the contract party was created. Used to identify records created through external web services.
Id	long	The unique identifier of the contract party. • Primary Key
MajorVersion	long	The major version of the record. • Primary Key
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyRoleCode	string	The code identifying the party role.
PartyRolePuid	string	Party Role PUID
Role	string	The name of the contact role.

Name	Type	Description
SignedBy	string	Signed By
SignedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Signed Date
SignerRole	string	Signer Role

Contract Party Contact

The contract party contact view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractPartyContact

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Contract Party Contact Descriptive Flexfield Attributes*
Contained by	*Contract Party*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevel	string	The level of the access in the hierarchy.
AccessLevelName	string	The name of the access level.
ContactId	long	The unique identifier of the contract.

Name	Type	Description
ContactPuid	string	Contact PUID
ContactRoleCode	string	The code associated with the contact role.
ContractPartyContactFlexfieldVA	*Contract Party Contact Descriptive Flexfield Attributes*	The flex field element of the contract party contact.
ExternalKey	string	Used to identify external records that were imported.
ExternalSource	string	The source application where the contract party contact was created. Used to identify records created through external web services.
Id	long	The unique identifier of the contract party contact. • Primary Key
MajorVersion	long	The major version of the record. • Primary Key
OwnerFlag	boolean	Indicates whether the contact is the owner of the contract.
PartyContactName	string	The name of the contact.
Role	string	The name of the contact role.
RoutingSequence	decimal	Signing Sequence
SignatureRole	string	Signatory Role Code
SignatureRoleMeaning	string	Signatory Role
SignerSequence	int	Singer Sequence
SignerYn	string	Contact who is a DocuSign recipient for electronic signature purposes

Contract Party Contact Descriptive Flexfield Attributes

The contract party contact flex field view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/partyContact/}ContractPartyContactFlexfield

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Party Contact*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Id	long	The unique identifier of the contract party contact flex field. • Primary Key
MajorVersion	long	The major version of the record. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Contract Party Descriptive Flexfield Attributes

The contract party flex field view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/}ContractPartyFlexfield

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Party*
Contained by	*Contract Party Deprecated*
Handled by	*Contract Service Version 2*
Handled by	*Contract Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Id	long	The unique identifier of the contract party flex field. • Primary Key
MajorVersion	long	The major version of the record. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Contract Party Language Translation

The contract party translation view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractPartyTranslation

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Party*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Alias	string	The alias of the contract party.
Cognomen	string	The translation of the contract party language.
Id	long	The unique identifier of the contract party translation. • Primary Key
Language	string	Indicates the code of the language in which the contents of the translatable columns are translated. • Primary Key
MajorVersion	long	The major version of the record. • Primary Key
SourceLang	string	The language at the source system.

Contract Question Responses

Service to capture question responses used in Contract Expert rules associated to a document.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}QuestionResponses

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
QuestionCode	string	The unique code that identifies a question.
QuestionResponse	string	The response value provided for a question.
QuestionResponseId	string	The response value id.

Contract Related Document

The related document view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}RelatedDocument

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContractId	long	Related Document Unique ID
ContractNumber	string	The number of the related contract.
ExternalKey	string	Used to identify external records that were imported.
ExternalSource	string	The source application where the contract related document was created. Used to identify records created through external web services.
Id	long	The unique identifier of the related document. • Primary Key
PartyName	string	Party Name
RelatedContractId	long	The unique identifier of the related contract.
RelatedObjPuid	string	Related Obj PUID
Relationship	string	The name of the relationship.
RelationshipCode	string	The code identifying the relationship.

Contract Renewal Request

The ContractRenewalInParams object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractRenewalInParams

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Duration	long	To Store Duration Value
Period	string	To Store Period Value
SourceContractModifier	string	To Store Source Contract Modifier
SourceContractNumber	string	To Store Source Contract Number • Primary Key
TargetContractModifier	string	To Store Target Contract Modifier
TargetContractNumber	string	To Store Target Contract Number

Contract Renewal Response

The ContractRenewalOutParams object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractRenewalOutParams

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
TargetContractModifier	string	To Store Target Contract Modifier
TargetContractNumber	string	To Store Target Contract Number • Primary Key

Contract Revenue Plan

The set of instructions, assigned to one or many contract lines, on how to recognize project contract revenue.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractPublicService/}RevenuePlan

Logical Business Objects

- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Job Rate Override*
Contains	*Labor Multiplier Override SDO*
Contains	*Contract Bill Plan Descriptive Flexfields*
Contains	*Non-labor Rate Override*

Relationship Type	Object or Service
Contains	*Contract Assigned Billing Extension*
Contains	*Contract Bill Plan Translation*
Contains	*Job Assignment Override SDO*
Contains	*Person Rate Override*
Contained by	*Contract*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AssignmentDetail	*Contract Assigned Billing Extension*	Section that displays the billing extensions assigned to the revenue plan.
BillMethodId	long	The unique identifier of the revenue method.
BillMethodName	string	The name of the revenue method.
BillPlanId	long	Unique identifier of the contract revenue plan. • Primary Key
BillPlanName	string	Name of the revenue plan that contains details on how contract lines are to be recognized for revenue.
BurdenSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the burden schedule.
BurdenSchId	long	Unique identifier of the burden schedule specified in the revenue plan.
BurdenSchedule	string	The burden schedule on the revenue plan.
EnableLbrBillXtnsnFlag	boolean	Indicator to allow usage of the labor billing extension when deriving the bill rate for labor transactions.

Name	Type	Description
EnableNlBillXtnsnFlag	boolean	Indicator to allow usage of the nonlabor billing extension when deriving the bill rate for nonlabor transactions.
ExternalReferenceKey	string	Unique identifier of the revenue plan in the source application. Used to identify contract revenue plans created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the revenue plan originates. Used to identify contract revenue plans created through external webservices.
JobAssignmentOverride	*Job Assignment Override SDO*	Job assignment override linkage
JobBillRateSchId	long	Unique identifier of the job rate schedule used to derive the bill rate for labor transactions.
JobRateOverride	*Job Rate Override*	Section that displays the job rate overrides for a revenue plan.
LaborBillBasisCode	string	Labor cost basis code for cost reimbursable.
LaborCostBasis	string	The labor cost basis for cost reimbursable.
LaborDiscountPercentage	decimal	The factor by which all bill rates derived from the person or job rate schedule for this revenue plan are to be discounted.
LaborDiscountReasonCode	string	Explains the reason for the discount percentage offered against the person and job rate schedules specified in the revenue plan.
LaborMarkupPercentage	decimal	Labor markup percentage.
LaborMultiplierOverride	*Labor Multiplier Override SDO*	Labor multiplier override linkage
LaborRateChangeReason	string	The reason for the change in the labor rate.
LaborSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the person or job rate schedule.
LaborTpSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the intercompany labor transfer price schedule.

Name	Type	Description
LaborTpScheduleId	long	Unique identifier of the transfer price labor schedule used to derive the bill rate for intercompany labor transactions.
MajorVersion	long	Unique identifier of the revenue method used to recognize revenue against this revenue plan. • Primary Key
NlBillBasisCode	string	Identifies if applicable nonlabor expenditure items must be billed at raw cost or burdened cost.
NlBillRateSchId	long	Unique identifier of the nonlabor rate schedule used to derive the bill rate for nonlabor transactions.
NlDiscountPercentage	decimal	The factor by which all bill rates derived from the nonlabor rate schedule for this revenue plan are to be discounted.
NlDiscountReasonCode	string	Explains the reason for the discount percentage offered against the nonlabor rate schedule specified in the revenue plan.
NlMarkupPercentage	decimal	The factor by which the revenue amount will be calculated over the nonlabor cost.
NlSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the nonlabor rate schedule.
NlTpSchFixedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	User-specified date used to derive the bill rate from the intercompany nonlabor transfer price schedule.
NlTpScheduleId	long	Unique identifier of the transfer price labor schedule used to derive the bill rate for intercompany nonlabor transactions.
NonLaborRateOverride	*Non-labor Rate Override*	Section that displays the nonlabor rate overrides for a revenue plan.
NonlaborCostBasis	string	The nonlabor cost basis for the reimbursable cost reimbursable.
NonlaborRateChangeReason	string	The reason for change in the nonlabor rate.
OnHoldFlag	boolean	Indicator to check if revenue plan is eligible for revenue generation.

Name	Type	Description
PersonBillRateSchId	long	The unique identifier of the employee bill rate schedule.
PersonRateOverride	*Person Rate Override*	Section that displays the person rate overrides for a revenue plan.
ProjectRoleBillRateSchId	long	
RevenuePlanDescriptiveFlexField	*Contract Bill Plan Descriptive Flexfields*	The revenue plan of the descriptive flex field linkage.
RevenuePlanTranslation	*Contract Bill Plan Translation*	The revenue plan translation linkage.

Contract Service Billing Summary

Contract Service Billing Summary

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}ContractBillLine

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Line*
Contained by	*Contract Covered Asset*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Amount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount that will be billed for a billing period.

Name	Type	Description
CurrencyCode	string	Currency Code
DateBilledFrom	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date of a billing period.
DateBilledTo	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date of a billing period.
DateToInterface	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the service bill gets interfaced.
Id	long	Contract Bill Line Id • Primary Key
MajorVersion	long	Major Version • Primary Key
SentYnFlag	boolean	Indicates whether the invoice has been sent to the customer.
SequenceNumber	decimal	The number that indicates the sequence in which bills are interfaced for a contract line.
TrxAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The invoice amount.
TrxDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on the invoice.
TrxNumber	string	The invoice number.
UOMCode	string	The code identifying the unit of measure.
UsageCaptureDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date of capture of the usage.
UsageQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The quantity of usage.

Contract Tier Header

Contract Tier Header View Object

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}TierHeader

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Contract Tier Line*
Contained by	*Pricing Terms Sales Agreement*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdjustmentBasisId	long	Adjustment Basis Id
AdjustmentTypeCode	string	Adjustment Type Code
AggregationMethodCode	string	Aggregation Method Code
ApplicationMethodCode	string	Application Method Code
GraduatedCode	string	Graduated Code
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last Update Date
PricingTermTierLine	*Contract Tier Line*	Contract Pricing Term Tier Lines
TierBasisId	long	Tier Basis Id
TierBasisTypeCode	string	Tier Basis Type Code
TieredPricingHeaderId	long	Tiered Pricing Header Id • Primary Key

Contract Tier Line

Contract Tier Line View Object

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}TierLine

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Tier Header*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Adjustment	decimal	Adjustment amount or percent
AdjustmentBasisId	long	Adjustment Basis Id
AdjustmentTypeCode	string	Adjustment Type Code
ApplicationMethodCode	string	Application Method Code
IncrementValue	long	Increment Value
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last Update Date
MaximumValue	decimal	Maximum Value
MinimumValue	decimal	Minimum Value
TierLineNumber	int	Tier Line Number
TieredPricingHeaderId	long	Tiered Pricing Header Id

Name	Type	Description
TieredPricingLineId	long	Tiered Pricing Line Id • Primary Key

Contract Variable Values

Service to capture user defined variable values associated to a document.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}VariableValues

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
VariableCode	string	The unique code that identifies a variable value.
VariableValue	string	The value provided for a variable.
VariableValueId	string	The variable value id.

Event Parameters

The UserTransitionEventParams object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}UserTransitionEventParams

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Event Payload*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
EventParamName	string	To Store EventParamName
EventParamValue	string	To Store EventParamValue

Event Payload

The UserTransitionEvent object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}UserTransitionParams

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Event Parameters*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
EventName	string	User Transition EventName
ExternalKey	string	Used to identify external records that were imported.
ExternalSource	string	The source application where the contract was created. Used to identify records created through external web services.
Id	long	Contract Id • Primary Key
UserTransitionEventParams	*Event Parameters*	ViewLink Object to store User Transition Event params.

Get Contract Document Content

Parameters object of custom operation getContractDocumentFileContents

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}GetContractDocumentFileContentsParams

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttachedDocumentId	long	Attached Document ID
ContractId	long	Contract ID
ExternalKey	string	Used to identify external records that were imported.

Name	Type	Description
ExternalSource	string	The source application where the contract was created. Used to identify records created through external web services.
MajorVersion	long	Contract Major Version

Get Contract Documents List

Parameters object of custom operation getContractDocuments

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}GetContractDocumentsParams

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContractId	long	Contract ID
ExternalKey	string	Used to identify external records that were imported.
ExternalSource	string	The source application where the contract was created. Used to identify records created through external web services.
MajorVersion	long	Contract Major Version

Internal Contract Line Attributes SDO

An object that contains the internal contract line attributes.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractBillingService/}ClinInternalAttribute

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Line*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContractId	long	Unique identifier of the contract. • Primary Key
ContractLineId	long	Unique identifier of the contract line. • Primary Key
ExpOrgSourceFlag	boolean	Indicates whether the expenditure organization populated on the intercompany invoice line sent to payables comes from the task owning organization on the original expenditure item or the expenditure organization on the intercompany contract line.
ExpTypeOrigEiFlag	boolean	Indicates whether the expenditure type populated on the internal invoice line sent to payables comes from the expenditure type on the original expenditure item or the expenditure type on the internal contract line..
ExpenditureTypeId	long	Unique identifier for the expenditure type which is recorded on the internal invoices of the receiver in Oracle Fusion Payables for the contract line.

Name	Type	Description
ExpenditureTypeName	string	Name of the expenditure type that is recorded on the internal invoices of the receiver in Oracle Fusion Payables for the contract line.
MajorVersion	long	Identification of the version of the contract, created by amending the contract, used to generate the revenue distribution. • Primary Key
OrganizationId	long	Unique identifier for the expenditure organization which is recorded on the internal invoices of the receiver in Oracle Fusion Payables for the contract line.
OrganizationName	string	Name of the organization that is recorded on the internal invoices of the receiver in Oracle Fusion Payables for the contract line.
ProviderBusinessUnitId	long	Unique identifier for the business unit that provides goods or services which are charged using the internal contract line.
ProviderBusinessUnitName	string	Name of the business unit that provides goods or services which are charged using the internal contract line.
ReceiverProjectId	long	Unique identifier for the project which is recorded on the internal invoices of the receiver in Oracle Fusion Payables for the contract line.
ReceiverProjectName	string	Name of the project that is recorded on the internal invoices of the receiver in Oracle Fusion Payables for the contract line.
ReceiverTaskId	long	Unique identifier for the task which is recorded on the internal invoices of the receiver in Oracle Fusion Payables for the contract line.
ReceiverTaskName	string	Name of the task that is recorded on the internal invoices of the receiver in Oracle Fusion Payables for the contract line.

Job Assignment Override SDO

Job Assignment Override SDO You must either specify names or internal ID for all payload attributes. If you specify a mix of names and internal ID attributes then the application might ignore one of them (neither validate nor save) and

save it as null. For example, you can either specify JobName or JobId. But, if you specify JobName and JobId, then JobId is ignored.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractBillingService/}JobAssignmentOverride

Logical Business Objects

- Projects
- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Bill Plan*
Contained by	*Contract Revenue Plan*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillingTitle	string	Name of the override job title being assigned to the person for this bill plan. Used to display on the invoice to the customer.
ContractLineId	long	Unique identifier of the contract line for which the job assignment override is defined.
ContractLineNumber	string	The contract line for which the job assignment override is defined.
EmailAddress	string	The email address for whom the job assignment override is defined.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date to which a job assignment override applies.
ExternalReferenceKey	string	Unique identifier of the job assignment override in the source application. Used to identify job assignment overrides created through external webservices.

Name	Type	Description
ExternalSourceKey	string	Unique identifier of the source application from where the job assignment override originates. Used to identify job assignment overrides created through external webservices.
JobAssignmentOverrideId	long	Unique identifier of the job assignment override on the bill plan that identifies the negotiated job assigned to a specific person, rather than the normal job for that person. • Primary Key
JobCode	string	The job code of the override being assigned to the person for this bill or revenue plan.
JobId	long	Unique identifier of the override job being assigned to the person for this bill or revenue plan.
JobName	string	The job name of the override being assigned to the person for this bill or revenue plan.
MajorVersion	long	Version of the contract containing this particular set of job assignment override details. • Primary Key
PersonId	long	Unique identifier of the person for whom the job assignment override is defined.
PersonName	string	The person for whom the job assignment override is defined.
PersonNumber	string	The person number for whom the job assignment override is defined.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date from which a job assignment override applies.

Job Rate Override

The job rate overrides for a bill or revenue plan.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractBillingService/}JobRateOverride

Logical Business Objects

- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Bill Plan*
Contained by	*Contract Revenue Plan*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillRateOverrideId	long	Unique identifier of the job rate override. • Primary Key
ContractLineId	long	Unique identifier of the contract line for which the job rate override is defined.
ContractLineNumber	string	The contract line number for which the bill rate override applies.
DiscountPercentage	decimal	The factor by which the bill rate derived for the job and bill or revenue plan is to be discounted.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date to which a job rate override applies.
ExternalReferenceKey	string	Unique identifier of the job rate override in the source application. Used to identify job rate overrides created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the job rate override originates. Used to identify job rate overrides created through external webservices.

Name	Type	Description
JobCode	string	The code of the job for which the bill rate is being overridden.
JobId	long	Unique identifier of the job for which the job rate override is defined.
JobName	string	The name of the job for which bill rate is being overridden.
MajorVersion	long	Version of the contract containing this particular set of job rate override details. • Primary Key
Rate	decimal	A unit rate override for the job and bill or revenue plan.
RateCurrency	string	The currency of the bill rate override.
RateCurrencyCode	string	Currency of the job rate override on the bill or revenue plan.
RateDiscReasonCode	string	Explains the reason for the discount percentage offered against the job.
RateDiscountReason	string	The reason for applying a discount.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date from which a job rate override applies.

Job Title Override SDO

Job Title Override SDO The job title assigned to a specific person on a contract bill or revenue plan, rather than the normal job title for that person. You must either specify names or internal ID for all payload attributes. If you specify a mix of names and internal ID attributes then the application might ignore one of them (neither validate nor save) and save it as null. For example, you can either specify JobName or JobId. But, if you specify JobName and JobId, then JobId is ignored.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractBillingService/}JobTitleOverride

Logical Business Objects

- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Bill Plan*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillingTitle	string	Name of the override job title being assigned to the job for this bill plan. Used to display on the invoice to the customer.
ContractLineId	long	Unique identifier of the contract line for which the job title override is defined.
ContractLineNumber	string	The contract line number for which the job title override is defined.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date to which a job title override applies.
ExternalReferenceKey	string	Unique identifier of the job title override in the source application. Used to identify job title overrides created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the job title override originates. Used to identify job title overrides created through external webservices.
JobCode	string	Code of the job for which the job title override is defined.
JobId	long	Unique identifier of the job for which the job title override is defined.
JobName	string	Name for the Job for which the job title override is defined.

Name	Type	Description
JobTitleOverrideId	long	Unique identifier of the job title override on the bill plan that identifies the negotiated job title assigned to a specific person, rather than the normal title for that person. • Primary Key
MajorVersion	long	Version of the contract containing this particular set of job title override details. • Primary Key
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date from which a job title override applies.

Labor Multiplier Override SDO

Labor Multiplier Override SDO You must either specify names or internal ID for all payload attributes. If you specify a mix of names and internal ID attributes then the application might ignore one of them (neither validate nor save) and save it as null. For example, you can only specify ContractLineId or ContractLineNumber. But, if you specify ContractLineId and ContractLineNumber, then ContractLineId is ignored.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractBillingService/}LaborMultiplierOverride

Logical Business Objects

- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Bill Plan*
Contained by	*Contract Revenue Plan*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContractLineId	long	Unique identifier of the contract line for which the labor multiplier override applies.
ContractLineNumber	string	Contract line number for which labor mutliplier override applies.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date to which a labor multiplier override applies.
ExternalReferenceKey	string	Unique identifier of the source application where the override is created. Used to identify overrides created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application where the override is created. Used to identify overrides created through external webservices.
LaborMultiplier	decimal	Labor multiplier.
LaborMultiplierId	long	Unique identifier of the labor multiplier override on the bill plan or revenue plan that identifies the negotiated value to be multiplied by the cost rate for labor. • Primary Key
MajorVersion	long	Version of the contract containing this particular set of labor multiplier override details. • Primary Key
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date from which a labor multiplier override applies.

Non-labor Rate Override

The negotiated rate, discount, or markup for nonlabor on a contract bill or revenue plan.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractBillingService/}NonLaborRateOverride

Logical Business Objects

- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Bill Plan*
Contained by	*Contract Revenue Plan*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillRateOverrideId	long	Unique identifier of the nonlabor rate override. • Primary Key
ContractLineId	long	Unique identifier of the contract line for which the nonlabor rate override is defined.
DiscountPercentage	decimal	The factor by which the bill rate derived for the nonlabor expenditure type, resource, and organization and bill or revenue plan is to be discounted.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date to which a nonlabor rate override applies.
ExpenditureTypeId	long	Unique identifier of the expenditure type for which the nonlabor rate override applies.
ExpenditureTypeName	string	The expenditure type name for which the bill rate is being overridden.
ExternalReferenceKey	string	Unique identifier of the nonlabor rate override in the source application. Used to identify nonlabor rate overrides created through external webservices.
ExternalSourceKey	string	Unique identifier of the source application from where the nonlabor rate override originates. Used to identify nonlabor rate overrides created through external webservices.

Name	Type	Description
MajorVersion	long	Version of the contract containing this particular set of nonlabor rate override details. • Primary Key
MarkupPercentage	decimal	Identifies the factor by which the bill amount will be calculated over the cost for this nonlabor rate override.
NonLaborResourceId	long	Unique identifier of the nonlabor resource for which the nonlabor rate override applies.
NonLaborResourceName	string	The nonlabor resource name for which the bill rate is being overridden.
OrganizationId	long	Unique identifier of the nonlabor resource organization for which the nonlabor rate override applies.
OrganizationName	string	The name of the party when the party type is Organization.
Rate	decimal	A unit rate override for the nonlabor expenditure type, resource, and organization and bill or revenue plan.
RateCurrency	string	The currency of the bill rate override.
RateCurrencyCode	string	Currency of the nonlabor rate override on the bill or revenue plan.
RateDiscReasonCode	string	Explains the reason for the discount percentage offered against the nonlabor expenditure type, oranization, and resource.
RateDiscountReason	string	The reason for applying a discount.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date from which a nonlabor rate override applies.

Person Rate Override

The set of instructions, assigned to one or many contract lines, on how to recognize project contract revenue.

QName: {http://xmlns.oracle.com/apps/projects/billing/contracts/contractBillingService/}PersonRateOverride

Logical Business Objects

- Projects : Project Billing

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Bill Plan*
Contained by	*Contract Revenue Plan*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillRateOverrideId	long	The unique identifier of the person rate override element. • Primary Key
ContractLineId	long	The unique identifier of the contract line for which the bill rate override applies.
ContractLineNumber	string	The contract line number for which the bill rate override applies.
DiscountPercentage	decimal	The discount in percentage of the contract applied to the bill rate.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
ExternalReferenceKey	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalSourceKey	string	The unique identifier of the source application where the person rate override was created.

Name	Type	Description
		Used to identify overrides created through external web services.
MajorVersion	long	The current version of the record. • Primary Key
PersonEmail	string	The email of the person whose bill rate is being overridden.
PersonId	long	The unique identifier of the person whose bill rate is being overridden.
PersonName	string	The name of the person whose bill rate is being overridden.
Rate	decimal	The amount billed to the customer for an item.
RateCurrency	string	The currency of the bill rate override.
RateCurrencyCode	string	The code identifying the currency of the bill rate override.
RateDiscReasonCode	string	The code identifying the reason for applying a discount.
RateDiscountReason	string	The reason for applying a discount.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.

Pricing Terms Sales Agreement

Pricing Terms Sales Agreement View Object

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}PricingTermExt

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Contract Tier Header*

Relationship Type	Object or Service
Contained by	*Contract Line*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdjustmentAmount	decimal	Adjustment Amount
AdjustmentBasisId	long	Adjustment Basis Id
AdjustmentTypeCode	string	Adjustment Type Code
AllowCustomAdjustmentsFlag	boolean	Allow Custom Adjustments Flag
AllowPricingDiscountsFlag	string	Allow Pricing Discounts Flag
ChargeSubtypeCode	string	Charge Subtype Code
ChargeTypeCode	string	Charge Type Code
EndDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	End Date
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last Update Date
Name	string	Pricing Term Name
ParentEntityKeyColumn1	string	Parent Entity Key Column 1
ParentEntityKeyColumn2	string	Parent Entity Key Column 2
ParentEntityKeyColumn3	string	Parent Entity Key Column 3
ParentEntityKeyColumn4	string	Parent Entity Key Column 4
ParentEntityKeyColumn5	string	Parent Entity Ke y Column 5

Name	Type	Description
ParentEntityTypeCode	string	Parent Entity Type Code
PricePeriodicityCode	string	Price Periodicity Code
PriceTypeCode	string	Price Type Code
PricingRuleTypeCode	string	Pricing Rule Type Code
PricingTermId	long	Pricing Term Id • Primary Key
PricingTermTierHeader	*Contract Tier Header*	Pricing Term Tier Header
StartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Start Date
TieredPricingHeaderId	long	Tiered Pricing Header Id
UsageUomCode	string	Usage Uom Code

Revert Contract

The revert contract object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}RevertContractParams

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ExternalReferenceKey	string	Used to identify external records that were imported.
ExternalSourceKey	string	The source application where the contract was created. Used to identify records created through external web services.
Id	long	The unique identifier of the contract.

Sales Credit

The sales credit view object.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}SalesCredit

Logical Business Objects

- CRM : Enterprise Contracts : Contract

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contract Line*
Contained by	*Contract*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	The flag to validate whether the sales credit is active.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
ExternalReferenceKey	string	The unique identifier of the override in the source application. Used to identify overrides created through external web services.
ExternalSourceKey	string	The unique identifier of the source application where the sales credit was created. Used to identify records created through external web services.
Id	long	The unique identifier of the sales credit. • Primary Key
MajorVersion	long	The major version of the record. • Primary Key
Percent	decimal	The sales credit percentage.
SalesCreditPuid	string	sales Credit PUID
SalesCreditType	string	Sales Credit Type
SalesCreditTypeId	long	The unique identifier of the sales credit type.
SalesrepId	long	The unique identifier of the salesperson.
SalesrepName	string	Sales Representative Name
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.

Sign Contract

SignContractParams SDO.

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}SignContractParams

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sign Contract Party Details*
Handled by	*Contract Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContractId	long	Contract Id • Primary Key
ExternalKey	string	External Key
ExternalSource	string	External Source
SignContractPartyParams	*Sign Contract Party Details*	ViewLink Object to store Signer Details in Party Object of SignContractPartyPrams SDO.

Sign Contract Party Details

SignContractPartyParams SDO

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/}SignContractPartyParams

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sign Contract*
Handled by	*Contract Service Version 2*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ExternalKey	string	Contract Party External Key
ExternalSource	string	Contract Party External Source
Id	long	Party Id
SignedBy	string	Signed By
SignedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Signed Date
SignerRole	string	Signer Role

Custom Business Object

A service to create, update, delete, or find custom business objects created in the Oracle Fusion CRM application. A custom business object stores extended information for an Oracle Fusion business object.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/custom/extnService/}CustomReferenceService

Service WSDL URL: https://servername/crmService/CustomReferenceService?WSDL

Logical Business Objects

- CRM : CRM Application Composer : CRM Extensible Object

Operations

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*
- *invokeObjectFunction*

- *createEntity*
- *getEntity*
- *updateEntity*
- *deleteEntity*
- *findEntity*
- *mergeEntity*
- *processEntity*

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

invokeObjectFunction

invoke custom object row function.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
row	anyType	DataObject used to invoke the script
viewName	string	Custom Object type name
scriptName	string	row function name
params	anyType	row function parameters

Response Payload

Element Name	Type	Description
result	anyType	DataObject

Element Name	Type	Description

createEntity

Create operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject created for the custom object.

getEntity

Get operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
keyValue	string	A list of key values for identifying the custom object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject identified by the keyValue.

updateEntity

Update operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be updated. The DataObject must include key fields for identifying the updated record, as well as the fields to be updated.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject updated for the custom object.

deleteEntity

Delete operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be deleted. The DataObject must include key fields for identifying the deleted record.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	void	DataObject that is deleted.

findEntity

Find operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	List of DataObjects identified by the findCriteria.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Search control.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObjects found

mergeEntity

merge with existing custom object if exist, create new object if does not exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be merged. The DataObject must include key fields for identifying the record, as well as the fields to be merged.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject result from the merge

processEntity

batch process for custom object operation

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Operation name
object	anyType	DataObjects to be batch processed
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	process control
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject result list

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
processEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea
getEntityList	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
updateEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea

Operation Name	Privilege Code	Privilege Name	Privilege Description
getEntity	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
deleteEntity	ZCX_DELETE_CUSTOM_OBJECT_PRIV	DELETE custom object resources (WorkArea)	PermissionSet to DELETE for custom object WorkArea
findEntity	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
getDfltObjAttrHints	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
createEntity	ZCX_CREATE_CUSTOM_OBJECT_PRIV	CREATE custom object resources (WorkArea)	PermissionSet to CREATE for custom object WorkArea
getServiceLastUpdateTime	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
mergeEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea

Custom Common Business Object (Deprecated)

A service used to create, update, delete, or find custom Oracle Fusion CRM Common business objects. A custom business object stores extended information for an Oracle Fusion business object.

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/cdm/foundation/custextn/extnService/}CrmCommonReferenceService

Service WSDL URL: https://servername/crmService/CrmCommonReferenceService?WSDL

Logical Business Objects

- CRM : CRM Application Composer : CRM Extensible Object

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Custom Business Object*

Operations

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*
- *createEntity*
- *getEntity*
- *updateEntity*
- *deleteEntity*
- *findEntity*
- *mergeEntity*
- *processEntity*

getDfltObjAttrHints

An operation to retrieve the user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name; an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used to evaluate the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files were referenced in the service definition that was last updated.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for the service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

createEntity

The Create operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	The data object to be created. The data object must include key fields for identifying the created record and the required fields.
objectName	string	The name of the custom object type.

Response Payload

Element Name	Type	Description
result	anyType	The data object created for the custom object.

getEntity

The Get operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
keyValue	string	A list of key values to identify the custom object.
objectName	string	The name of the custom object type.

Response Payload

Element Name	Type	Description
result	anyType	The data object identified by the key value.

updateEntity

The Update operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	The data object to be updated. The data object must include key fields for identifying the updated record and the fields to be updated.
objectName	string	The name of the custom object type.

Response Payload

Element Name	Type	Description
result	anyType	The data object created for the custom object.

deleteEntity

The Delete operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	The data object to be deleted. The data object must include key fields for identifying the deleted record.
objectName	string	The name of the custom object type.

Response Payload

Element Name	Type	Description
result	void	The data object deleted for the custom object.

findEntity

The Find operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The list of data objects identified by the findCriteria operation.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The list of data objects identified by the findCriteria operation.
objectName	string	The search criteria for looking up custom object records.

Response Payload

Element Name	Type	Description
result	anyType	The name of the custom object type.

mergeEntity

Updates a row if it exists; otherwise, creates a new one.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	The data object to be merged.
objectName	string	The name of the custom object type.

Response Payload

Element Name	Type	Description
result	anyType	The data object created for the custom object.

processEntity

Performs a Create, Update, Delete, or Merge operation on a list of rows. The specified operation is applied to all rows in the given list.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action to perform, such as create, update, merge, or delete.
object	anyType	The data object to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch,

Element Name	Type	Description
		and whether the outbound contains the key attributes only or the full object.
objectName	string	The name of the custom object type.

Response Payload

Element Name	Type	Description
result	anyType	The custom data object having the processed rows.

Custom Business Object

A service to create, update, delete, or find custom business objects created in the Oracle Fusion CRM application. A custom business object stores extended information for an Oracle Fusion business object.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/custom/extnService/}CustomReferenceService

Service WSDL URL: https://servername/crmService/CustomReferenceService?WSDL

Logical Business Objects

- CRM : CRM Application Composer : CRM Extensible Object

Operations

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*
- *invokeObjectFunction*
- *createEntity*
- *getEntity*
- *updateEntity*
- *deleteEntity*
- *findEntity*
- *mergeEntity*
- *processEntity*

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

invokeObjectFunction

invoke custom object row function.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
row	anyType	DataObject used to invoke the script
viewName	string	Custom Object type name
scriptName	string	row function name
params	anyType	row function parameters

Response Payload

Element Name	Type	Description
result	anyType	DataObject

createEntity

Create operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject created for the custom object.

getEntity

Get operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
keyValue	string	A list of key values for identifying the custom object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject identified by the keyValue.

updateEntity

Update operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be updated. The DataObject must include key fields for identifying the updated record, as well as the fields to be updated.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject updated for the custom object.

deleteEntity

Delete operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be deleted. The DataObject must include key fields for identifying the deleted record.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	void	DataObject that is deleted.

findEntity

Find operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	List of DataObjects identified by the findCriteria.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Search control.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObjects found

mergeEntity

merge with existing custom object if exist, create new object if does not exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be merged. The DataObject must include key fields for identifying the record, as well as the fields to be merged.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject result from the merge

processEntity

batch process for custom object operation

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Operation name
object	anyType	DataObjects to be batch processed
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	process control
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject result list

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
processEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea
getEntityList	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
updateEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea
getEntity	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
deleteEntity	ZCX_DELETE_CUSTOM_OBJECT_PRIV	DELETE custom object resources (WorkArea)	PermissionSet to DELETE for custom object WorkArea
findEntity	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
getDfltObjAttrHints	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea

Operation Name	Privilege Code	Privilege Name	Privilege Description
createEntity	ZCX_CREATE_CUSTOM_OBJECT_PRIV	CREATE custom object resources (WorkArea)	PermissionSet to CREATE for custom object WorkArea
getServiceLastUpdateTime	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
mergeEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea

Customer Custom Business Object (Deprecated)

Service to operate on custom Oracle Fusion Customer Center business objects. The supported operations are create, update, get, and find. Some examples of custom objects could be a customer trouble ticket to track customer complaints or a customer tracking event to keep track of customer participation in marketing events.

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/custExtn/extnService/}CustomerCenterCustomObjectService

Service WSDL URL: https://servername/crmService/CustomerCenterCustomObjectService?WSDL

Logical Business Objects

- CRM : Customer Center : Sales Party

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Custom Business Object*

Operations

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*
- *createEntity*
- *getEntity*

- *updateEntity*
- *deleteEntity*
- *findEntity*
- *mergeEntity*
- *processEntity*

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The locale name is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Retrieves the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

Element Name	Type	Description

getEntityList

Retrieves the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

createEntity

Creates records of an Oracle Fusion Customer custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A required input parameter of the createEntity web service method. Includes the attribute values that the records will be created with.
objectName	string	A required input parameter of the createEntity web service method. Use the API name of the custom object you want to create.

Response Payload

Element Name	Type	Description
result	anyType	The return value of the createEntity web service method. Includes the full set of attributes and child entities of the record.

getEntity

Queries by ID a single record of an Oracle Fusion Customer custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
keyValue	string	A required input parameter of the getEntity Web service method. Includes the row ID of the record you want to query.
objectName	string	A required input parameter of the getEntity web service method. Use the API name of the custom object you want to query for.

Response Payload

Element Name	Type	Description
result	anyType	The return value of the getEntity web service method. Includes the full set of attributes and child entities of the record.

updateEntity

Updates a set of records of an Oracle Fusion Customer custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	The required input parameter of the updateEntity web service method. The object includes only the IDs and the attribute values you want to update. Records with the matching IDs will be updated with the attribute values in the object.
objectName	string	The required input parameter of the updateEntity web service method. Use the API name of the custom object you want to update.

Response Payload

Element Name	Type	Description
result	anyType	

deleteEntity

Deletes a set of records of an Oracle Fusion Customer custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A required input parameter of the deleteEntity web service method. All records matching the input attribute values specified in this input object are deleted.
objectName	string	A required input parameter of the deleteEntity web service method. Use the API name of the custom object you want to delete.

Response Payload

Element Name	Type	Description
result	void	

findEntity

Retrieves a set of records of an Oracle Fusion Customer custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findEntity web service method. Includes optional search criteria, sort filter, and attributes to be excluded when returning the set of records. Also includes the option to return any of the custom object's child entities, as well as the set of search criteria to use on the child entities.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.
objectName	string	A required input parameter of the findEntity web service method. Use the API name of the custom object you want to query for.

Response Payload

Element Name	Type	Description
result	anyType	The return value of the findEntity web service method. Includes the full set of attributes and child entities of the records.

mergeEntity

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	
objectName	string	

Response Payload

Element Name	Type	Description
result	anyType	

processEntity

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	

Element Name	Type	Description
object	anyType	
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	
objectName	string	

Response Payload

Element Name	Type	Description
result	anyType	

Custom Business Object

A service to create, update, delete, or find custom business objects created in the Oracle Fusion CRM application. A custom business object stores extended information for an Oracle Fusion business object.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/custom/extnService/}CustomReferenceService

Service WSDL URL: https://servername/crmService/CustomReferenceService?WSDL

Logical Business Objects

- CRM : CRM Application Composer : CRM Extensible Object

Operations

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*
- *invokeObjectFunction*
- *createEntity*
- *getEntity*
- *updateEntity*
- *deleteEntity*
- *findEntity*
- *mergeEntity*
- *processEntity*

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

invokeObjectFunction

invoke custom object row function.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
row	anyType	DataObject used to invoke the script
viewName	string	Custom Object type name
scriptName	string	row function name
params	anyType	row function parameters

Response Payload

Element Name	Type	Description
result	anyType	DataObject

createEntity

Create operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject created for the custom object.

getEntity

Get operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
keyValue	string	A list of key values for identifying the custom object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject identified by the keyValue.

updateEntity

Update operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be updated. The DataObject must include key fields for identifying the updated record, as well as the fields to be updated.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject updated for the custom object.

deleteEntity

Delete operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be deleted. The DataObject must include key fields for identifying the deleted record.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	void	DataObject that is deleted.

findEntity

Find operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	List of DataObjects identified by the findCriteria.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Search control.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObjects found

mergeEntity

merge with existing custom object if exist, create new object if does not exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be merged. The DataObject must include key fields for identifying the record, as well as the fields to be merged.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject result from the merge

processEntity

batch process for custom object operation

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Operation name
object	anyType	DataObjects to be batch processed
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	process control
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject result list

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
processEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea
getEntityList	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
updateEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea
getEntity	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
deleteEntity	ZCX_DELETE_CUSTOM_OBJECT_PRIV	DELETE custom object resources (WorkArea)	PermissionSet to DELETE for custom object WorkArea
findEntity	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
getDfltObjAttrHints	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea

Operation Name	Privilege Code	Privilege Name	Privilege Description
createEntity	ZCX_CREATE_CUSTOM_OBJECT_PRIV	CREATE custom object resources (WorkArea)	PermissionSet to CREATE for custom object WorkArea
getServiceLastUpdateTime	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
mergeEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea

Customer Interaction (Deprecated)

Service to communicate between an internal resource such as Mary Smith and a customer through email, phone, or any another channel. WARNING: This service has been deprecated and is being replaced with ActivityService.

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/crmCommon/interactions/interactionService/}InteractionService

Service WSDL URL: https://servername/crmService/InteractionService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Activity Service*
Handles	*Common Attachment SDO*
Handles	*Interaction Association*
Handles	*Interaction*
Handles	*Interaction Participant*

Operations

- *getInteractionAttachment*
- *createInteractionAttachment*

- *copyInteractionAttachment*
- *deleteInteractionAttachment*
- *updateInteraction*
- *getInteraction*
- *deleteInteraction*
- *createInteraction*
- *createInteractionParticipant*
- *deleteInteractionParticipant*
- *getInteractionParticipant*
- *updateInteractionParticipant*
- *mergeInteraction*
- *findInteraction*
- *processInteraction*
- *getInteractionAssociation*
- *createInteractionAssociation*
- *updateInteractionAssociation*
- *deleteInteractionAssociation*
- *findInteractionAssociation*
- *processInteractionAssociation*
- *findInteractionParticipant*
- *processInteractionParticipant*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getInteractionAttachment

Get operation for interaction attachment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
getParameters	*Common Attachment*	Parameters driving the get operation for interaction attachment.

Response Payload

Element Name	Type	Description
result	*Common Attachment*	The interaction attachment that satisfy the inbound Get criteria.

createInteractionAttachment

Creates an interaction attachment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
attachmentVORows	*Common Attachment*	The list of attachment objects to be copied or created.

Response Payload

Element Name	Type	Description
result	string	The interaction attachment to be created.

copyInteractionAttachment

Copy operation for interaction attachment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
attachmentVORows	*Common Attachment*	The list of attachment objects to be copied or created.

Response Payload

Element Name	Type	Description
result	string	A list of warnings or informational messages encountered when copying the interaction attachment.

deleteInteractionAttachment

Deletes an interaction attachment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
attachmentVORows	*Common Attachment*	The list of attachment objects to be copied or create.

Response Payload

Element Name	Type	Description
result	string	A list of warnings or informational messages encountered when deleting the appointment attachment.

updateInteraction

Updates an Interaction.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
interaction	*Interaction*	Interaction to be updated.

Response Payload

Element Name	Type	Description
result	*Interaction*	Updated interaction.

getInteraction

Retrieves an interaction.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
interactionId	long	Unique interaction identifier for the interaction.

Response Payload

Element Name	Type	Description
result	*Interaction*	Interaction that matches the inbound key attributes.

deleteInteraction

Deletes an interaction.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
interaction	*Interaction*	Interaction to be deleted.

Response Payload

Element Name	Type	Description
result	void	

createInteraction

Creates an Interaction.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
interaction	*Interaction*	Interaction to be created.

Response Payload

Element Name	Type	Description
result	*Interaction*	Created interaction.

createInteractionParticipant

Creates an interaction participant.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
interactionParticipantWS	*Interaction Participant*	Interaction participant to be created.

Response Payload

Element Name	Type	Description
result	*Interaction Participant*	Created interaction participant.

deleteInteractionParticipant

Deletes an interaction participant.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
interactionParticipantWS	*Interaction Participant*	Interaction participant to be deleted.

Response Payload

Element Name	Type	Description
result	void	

getInteractionParticipant

Retrieves an interaction participant.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
interactionParticipantId	long	Unique identifier for the interaction participant object.

Response Payload

Element Name	Type	Description
result	*Interaction Participant*	Interaction participant that matches the inbound key attributes.

updateInteractionParticipant

Updates an interaction participant.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
interactionParticipantWS	*Interaction Participant*	Interaction participant to be updated.

Response Payload

Element Name	Type	Description
result	*Interaction Participant*	Updated interaction participant.

mergeInteraction

Merge operation for Interaction. It will perform an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
interaction	*Interaction*	Interaction to be merged.

Response Payload

Element Name	Type	Description
result	*Interaction*	Merged interaction.

findInteraction

Find operation for interaction.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Interaction*	A list of Interaction that satisfy the inbound criteria.

processInteraction

Bulk load operation for interaction.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action shall be performed, such as create, update, merge, or delete.

Element Name	Type	Description
interaction	*Interaction*	A list of interaction to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there is other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Interaction*	A list of interaction that are successfully processed.

getInteractionAssociation

Retrieves an interaction association.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
interactionAssociationId	long	Unique identifier for the interaction association.

Response Payload

Element Name	Type	Description
result	*Interaction Association*	Interaction association that matches the inbound key attributes.

createInteractionAssociation

Creates an interaction association.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
interactionAssociationWS	*Interaction Association*	Interaction association to be created.

Response Payload

Element Name	Type	Description
result	*Interaction Association*	Created interaction association.

updateInteractionAssociation

Updates an interaction association.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
interactionAssociationWS	*Interaction Association*	Interaction association to be updated.

Response Payload

Element Name	Type	Description
result	*Interaction Association*	Updated interaction association.

deleteInteractionAssociation

Deletes an interaction association.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
interactionAssociationWS	*Interaction Association*	Interaction association to be deleted.

Response Payload

Element Name	Type	Description
result	void	

findInteractionAssociation

Find operation for interaction association.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Interaction Association*	A list of interaction association that satisfy the inbound criteria.

processInteractionAssociation

Bulk load operation for interaction association.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action shall be performed, such as create, update, merge, or delete.
interactionAssociationWS	*Interaction Association*	A list of interaction association to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there is other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	*Interaction Association*	A list of interaction association that are successfully processed.

findInteractionParticipant

Find operation for interaction participant.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Interaction Participant*	A list of interaction participant that satisfy the inbound criteria.

processInteractionParticipant

Bulk load operation for interaction participant.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action shall be performed, such as create, update, merge, or delete.

Element Name	Type	Description
interactionParticipantWS	*Interaction Participant*	A list of interaction participant to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there is other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Interaction Participant*	A list of interaction participant that are successfully processed.

getDfltObjAttrHints

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	
localeName	string	

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	

getServiceLastUpdateTime

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	

getEntityList

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	

Activity Service

Service to operate on activity object.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activityManagementService/}ActivityService

Service WSDL URL: https://servername/crmService/ActivityService?WSDL

Logical Business Objects

- CRM : Applications Common Components : Activity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Common Attachment SDO*
Handles	*Activity Assignee*
Handles	*Activity Delete Exception*
Handles	*Note Descriptive Flexfields*

Relationship Type	Object or Service
Handles	*Activity Contact*
Handles	*Note*
Handles	*Activity*
Handles	*Activity Objective*

Operations

- *deleteAttachment*
- *getAttachmentsListWithoutContent*
- *getAttachmentContent*
- *copyAttachment*
- *createAttachment*
- *generateActivitiesFromTemplate*
- *getActivity*
- *createActivity*
- *updateActivity*
- *deleteActivity*
- *mergeActivity*
- *findActivity*
- *processActivity*
- *createActivityAssignee*
- *updateActivityAssignee*
- *deleteActivityAssignee*
- *findActivityAssignee*
- *createActivityContact*
- *updateActivityContact*
- *deleteActivityContact*
- *findActivityContact*
- *findActivityDeleteExceptions*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

deleteAttachment

An operation to delete a single or multiple attachments associated to an activity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
deleteParams	*Common Attachment*	The parameter based on which deletion of attachments should trigger.
commitData	string	A flag to indicate whether or not to commit transaction for this operation.

Response Payload

Element Name	Type	Description
result	string	The parameter returns the success or failure status of the operation.

getAttachmentsListWithoutContent

An operation to get list of all the attachment associated with an activity without any file content.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
getParameters	*Common Attachment*	The parameters based on which list of attachments to be fetched is determined.

Response Payload

Element Name	Type	Description
result	*Common Attachment*	The parameter returns the list of all the attachments without any file content.

getAttachmentContent

An operation to get attachment associated with an activity with file content if applicable.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
getParameters	*Common Attachment*	The parameters based on which attachment to be fetched is determined.

Response Payload

Element Name	Type	Description
result	*Common Attachment*	The parameter returns the attachment with file content, if applicable.

copyAttachment

An operation to copy a single or multiple attachments associated to an activity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
attachmentRows	*Common Attachment*	The parameter for the list of attachments to be copied.
commitData	string	A flag to indicate whether or not to commit transaction for this operation.

Response Payload

Element Name	Type	Description
result	string	The parameter returns the success or failure status of the operation.

createAttachment

An operation to create a single or multiple attachments associated to an activity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
attachmentRows	*Common Attachment*	The parameter which provides the list of attachments to be created.

Element Name	Type	Description
commitData	string	A flag to indicate whether or not to commit transaction for this operation.

Response Payload

Element Name	Type	Description
result	string	The parameter returns the success or failure status of the operation.

generateActivitiesFromTemplate

An operation to generate activities from a template. A valid value for templateId should be passed. Only following activity attributes are supported in activityAttributes input parameter as of now: CustomerId, OwnerId, AssesmentId, ActivityContact, ActivityAssignee, ActivityStartDate, LeadId, OpportunityId, and CampaignId.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
templateId	long	The unique identifier of the template-set using which the activities are to be generated.
activityAttributes	*Activity*	The Activity SDO attribute list using which template activities should be generated.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the list of all the generated activities using the template.

getActivity

The out-of-the-box Get operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityId	long	The activity ID for which the activity record is to be fetched.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the activity record based on input activity ID.

createActivity

The out-of-the-box Create operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activity	*Activity*	The activity record to be created for the method createActivity.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the created activity record.

updateActivity

The out-of-the-box Update operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activity	*Activity*	The activity record to be updated for the method createActivity carrying updated attributes.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the updated activity record.

deleteActivity

The out-of-the-box Delete operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activity	*Activity*	The activity record to be deleted for the method deleteActivity.

Response Payload

Element Name	Type	Description
result	void	This operation returns nothing for the method deleteActivity.

mergeActivity

OOTB merge operation on Activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activity	*Activity*	Activities which have to be merged.

Response Payload

Element Name	Type	Description
result	*Activity*	Merged Activity.

findActivity

The out-of-the-box Find operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The FindCriteria object using which the find operation works for the method findActivity.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The FindControl object using which the find operation works for the method findActivity.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns the list of activity records based on FindCriteria and FindControl input objects.

processActivity

The out-of-the-box Process operation for the activity SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The name of the operation to be performed like, create, update, and so on.
activity	*Activity*	The list of activity records on which the operation is to be performed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The optional ProcessControl object to be used while performing this operation.

Response Payload

Element Name	Type	Description
result	*Activity*	The parameter returns a list of activity records after the operation is complete.

createActivityAssignee

The out-of-the-box Create operation for the activity assignee SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityAssigneeWebService	*Activity Assignee*	The activity assignee record to be created for the method createActivityAssignee.

Response Payload

Element Name	Type	Description
result	*Activity Assignee*	The parameter returns the created activity assignee record.

updateActivityAssignee

The out-of-the-box Update operation for the activity assignee SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityAssigneeWebService	*Activity Assignee*	The activity assignee record to be updated for the method updateActivityAssignee.

Response Payload

Element Name	Type	Description
result	*Activity Assignee*	The parameter returns the updated activity assignee record.

deleteActivityAssignee

The out-of-the-box Delete operation for the activity assignee SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityAssigneeWebService	*Activity Assignee*	The activity assignee record to be deleted for the method deleteActivityAssignee.

Response Payload

Element Name	Type	Description
result	void	This operation returns nothing for the method deleteActivityAssignee.

findActivityAssignee

The out-of-the-box Find operation for the activity assignee SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The FindCriteria object using which the find operation works for the method findActivityAssignee.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The FindControl object using which the find operation works for the method findActivityAssignee.

Response Payload

Element Name	Type	Description
result	*Activity Assignee*	The parameter returns the list of activity assignee records based on FindCriteria and FindControl input objects.

createActivityContact

The out-of-the-box Create operation for the activity contact SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityContactWebService	*Activity Contact*	The activity contact record to be created for the method createActivityContact.

Response Payload

Element Name	Type	Description
result	*Activity Contact*	The parameter returns the created activity contact record.

updateActivityContact

The out-of-the-box Update operation for the activity contact SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityContactWebService	*Activity Contact*	The activity contact record to be updated for the method updateActivityContact.

Response Payload

Element Name	Type	Description
result	*Activity Contact*	The parameter returns the updated activity contact record.

deleteActivityContact

The out-of-the-box Delete operation for the activity contact SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
activityContactWebService	*Activity Contact*	The activity contact record to be deleted for the method deleteActivityContact.

Response Payload

Element Name	Type	Description
result	void	This operation returns nothing for the method deleteActivityContact.

findActivityContact

The out-of-the-box Find operation for the activity contact SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The FindCriteria object using which the find operation works for the method findActivityContact.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The FindControl object using which the find operation works for the method findActivityContact.

Response Payload

Element Name	Type	Description
result	*Activity Contact*	The parameter returns the list of activity contact records based on FindCriteria and FindControl input objects.

findActivityDeleteExceptions

The out-of-the-box Find operation on activity delete exception SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The FindCriteria object using which the find operation works for the method findActivityDeleteExceptions.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The FindControl object using which the find operation works for the method findActivityDeleteExceptions.

Response Payload

Element Name	Type	Description
result	*Activity Delete Exception*	The parameter returns the list of activity delete exception records based on FindCriteria and FindControl input objects.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The parameter returns the label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The parameter returns the date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	The parameter returns a list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getActivity	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getActivity	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
createActivity	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.

Operation Name	Privilege Code	Privilege Name	Privilege Description
createActivity	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
createActivity	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
createActivity	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
createActivity	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
deleteActivityContact	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
deleteActivityContact	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
deleteActivityContact	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
generateActivitiesFromTemplate	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
generateActivitiesFromTemplate	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
updateActivityContact	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
updateActivityContact	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
findActivityContact	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
findActivityContact	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
deleteAttachment	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
deleteAttachment	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
deleteAttachment	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
createActivityAssignee	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
createActivityAssignee	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.

Operation Name	Privilege Code	Privilege Name	Privilege Description
createActivityAssignee	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
createActivityAssignee	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
createActivityAssignee	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
createActivityAssignee	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
createActivityAssignee	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
getDfltObjAttrHints	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getDfltObjAttrHints	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
createAttachment	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
createAttachment	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
createAttachment	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
createAttachment	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
createAttachment	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
createAttachment	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
createAttachment	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
findActivity	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
findActivity	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
deleteActivity	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
deleteActivityAssignee	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.

Operation Name	Privilege Code	Privilege Name	Privilege Description
deleteActivityAssignee	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
deleteActivityAssignee	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
createActivityContact	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
createActivityContact	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
createActivityContact	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
createActivityContact	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
createActivityContact	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
createActivityContact	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
createActivityContact	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
findActivityAssignee	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
findActivityAssignee	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
processActivity	ZMM_DELETE_ACTIVITY_PRIV	Delete Activity	Allows deleting activities.
processActivity	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
processActivity	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
processActivity	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
processActivity	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
processActivity	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
processActivity	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.

Operation Name	Privilege Code	Privilege Name	Privilege Description
processActivity	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
processActivity	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
processActivity	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
findActivityDeleteExceptions	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
findActivityDeleteExceptions	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
getEntityList	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getEntityList	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
updateActivity	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
updateActivity	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
copyAttachment	ZMM_LOG_A_CALL_ACTIVITY_PRIV	Log a Call Activity	Allows logging a call for activities.
copyAttachment	ZMM_CREATE_ACTIVITY_PRIV	Create Activity	Allows creating activities.
copyAttachment	ZMM_CREATE_ACTIVITY_APPOINTMENT_PRIV	Create Activity Appointment	Allows creating activities of type appointment.
copyAttachment	ZMM_CREATE_ACTIVITY_CALL_REPORT_PRIV	Create Activity Call Report	Allows creating activities of type call report.
copyAttachment	ZMM_CREATE_ACTIVITY_TASK_PRIV	Create Activity Task	Allows creating activities of type task.
copyAttachment	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
copyAttachment	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.
mergeActivity	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
mergeActivity	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getAttachmentContent	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getAttachmentContent	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
getAttachmentsListWithoutContent	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getAttachmentsListWithoutContent	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
getServiceLastUpdateTime	ZMM_VIEW_ONLY_ACTIVITY_PRIV	View Only Activity	Allows only viewing of activities.
getServiceLastUpdateTime	ZMM_VIEW_ACTIVITY_PRIV	View Activity	Allows viewing activities.
updateActivityAssignee	ZMM_UPDATE_ONLY_ACTIVITY_PRIV	Update Only Activity	Allows only editing of activities.
updateActivityAssignee	ZMM_UPDATE_ACTIVITY_PRIV	Update Activity	Allows editing activities.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			not available to Service Representatives
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_VP_JOB	Marketing VP	Determines high-level marketing objectives, strategies and budgets. Analyzes marketing activities to measure the effectiveness of marketing programs, reviews real-time marketing intelligence to optimize decisions throughout the marketing and sales cycle, take timely actions to influence business outcomes, and gain competitive advantage.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
ZMM_CREATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZMM_CREATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZMM_CREATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			erroneous data, and configures the application according to business needs.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKT_MARKETING_VP_JOB	Marketing VP	Determines high-level marketing objectives, strategies and budgets. Analyzes marketing activities

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			to measure the effectiveness of marketing programs, reviews real-time marketing intelligence to optimize decisions throughout the marketing and sales cycle, take timely actions to influence business outcomes, and gain competitive advantage.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			of registered or expired. This is for the partner administrator.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKT_CORPORATE_ MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_HR_SR_ ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
ZMM_VIEW_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_ DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZMM_VIEW_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZMM_VIEW_ACTIVITY_PRIV	ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
ZMM_LOG_A_CALL_ACTIVITY_ PRIV	ORA_ZPM_PARTNER_SALES_ REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_LOG_A_CALL_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_VIEW_ONLY_ACTIVITY_PRIV	ORA_CJM_CUSTOMER_CHANNEL_PROGRAM_VIEW_DUTY_CRM	Customer Channel Program Viewing	View customer programs.
ZMM_VIEW_ONLY_ACTIVITY_PRIV	ORA_CJM_CUSTOMER_CHANNEL_PROGRAM_MANAGEMENT_DUTY_CRM	Customer Channel Program Management	Manages customer programs and manual adjustments.
ZMM_VIEW_ONLY_ACTIVITY_PRIV	ORA_CJM_CHANNEL_CLAIMS_VIEW_DUTY_CRM	Channel Claims Viewing	Views customer claims.
ZMM_VIEW_ONLY_ACTIVITY_PRIV	ORA_CJM_CHANNEL_CLAIMS_MANAGEMENT_DUTY_CRM	Channel Claims Management	Manages customer claims.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			and opportunities. This role is for a partner sales manager.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_VP_JOB	Marketing VP	Determines high-level marketing objectives, strategies and budgets. Analyzes marketing activities to measure the effectiveness of marketing programs, reviews real-time marketing intelligence to optimize decisions throughout the marketing and sales cycle, take timely actions to influence business outcomes, and gain competitive advantage.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_ QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			supporting roles include territory development, event and webinar strategies.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			administer the Next Gen HR Help Desk service application, including setup.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
ZMM_UPDATE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZMM_UPDATE_ACTIVITY_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			builds pipeline, manages leads and opportunities and performs sales forecasting.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKT_MARKETING_VP_JOB	Marketing VP	Determines high-level marketing objectives, strategies and budgets. Analyzes marketing activities to measure the effectiveness of marketing programs, reviews real-time marketing intelligence to optimize decisions throughout the marketing and sales cycle, take timely actions to influence business outcomes, and gain competitive advantage.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			critical service requests, service level agreements.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
ZMM_DELETE_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZMM_DELETE_ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZMM_DELETE_ACTIVITY_PRIV	ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_SALES_ REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_CORPORATE_ MARKETING_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKL_SALES_LEAD_ QUALIFIER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_SALES_ MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_READ_ONLY_DUTY	Lead Registration Processing Read Only	Read Only role for Lead Registration Processing Duty.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			information from the audience and campaign work areas.
ORA_MKT_MARKETING_VP_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_MKT_MARKETING_VP_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_ MANAGER_JOB	ORA_MKT_MARKETING_ AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_CORPORATE_ MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_ CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_ MANAGER_JOB	ORA_MKT_MARKETING_ CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ EXECUTION_MANAGEMENT_ DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_VP_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_READ_ONLY_DUTY	Personal Campaign Management Read Only	Read Only role for Personal Campaign Management Duty.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_READ_ONLY_DUTY	Product Recommendation Analysis Read Only	Read Only role for Product Recommendation Analysis Duty
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_VP_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZCA_REVIEW_CRM_ APPROVAL_TRANSACTIONS_ ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_ MANAGER_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_ MANAGER_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_READ_ONLY_DUTY	Sales Forecasting Management Read Only	Read Only role for Sales Forecasting Management Duty.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_VP_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_READ_ONLY_DUTY	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_READ_ONLY_DUTY	Territory Management Read Only	Read Only role for Territory Management Duty.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Common Attachment

The attachment that can include documents, files, or web site links associated with appointments, interactions or tasks.

QName: {http://xmlns.oracle.com/apps/crmCommon/objects/objectsService/}CommonAttachments

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Appointment Service*
Handled by	*Customer Interaction*
Handled by	*Activity Service*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttachedDocumentId	long	The identifier of the document attachment.
Attachment	string	The title or name of the attachment.
CategoryName	string	The name of the attachment category.
DatatypeCode	string	The code value of the data type.
Description	string	The free text description of the record.
DmFolderPath	string	The folder path of the attachment.
DmNode	decimal	The attachment node.
DmRepository	string	The attachment repository.
DmType	string	The type of attachment.
DmVersionNumber	string	The version number of the attachment.
DocumentAttributes	string	The attributes of the document attachment.
DocumentEntityId	long	The identifier of document entity.
DownloadStatus	string	The download status of attachment.
EntityAttributes	string	The entity attributes of the attachment.

Name	Type	Description
EntityName	string	The name of the entity attachment.
FileName	string	The name of the file attachment.
FileURL	string	The URL of the file attachment.
Pk1Value	string	Value of primary key 1.
Pk2Value	string	Value of primary key 2.
Pk3Value	string	Value of primary key 3.
Pk4Value	string	Value of primary key 4.
Pk5Value	string	Value of primary key 5.
TableName	string	The table name of attachment.
Title	string	The attachment title.
URL	string	The destination URL associated with a specific Google AdWords ad.
UploadedFile	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The uploaded attachment file.
UploadedFileContentType	string	The content type of file attachment.
UploadedFileLength	long	The length of file attachment.
UploadedFileName	string	The name of the file attachment.
UploadedText	string	The attachment text.
UsageType	string	The usage type of the attachment.
VersionControlIcon	string	The attachment version control.

Interaction

An interaction that represents the communication between an internal resource such as Mary Smith and a customer through e-mail, phone, or another channel.

QName: {http://xmlns.oracle.com/apps/crmCommon/interactions/interactionService/}Interaction

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Interaction Association*
Contains	*Interaction Participant*
Handled by	*Customer Interaction*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerId	long	The identifier of the customer with which the interaction is associated.

Name	Type	Description
DirectionCode	string	Indicates whether the interaction is inbound or outbound.
InteractionAssociation	*Interaction Association*	The view link attribute for the "Related To" child objects.
InteractionDescription	string	The subject or brief description of the interaction.
InteractionEndDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the interaction ended.
InteractionId	long	The unique identifier for the interaction. • Primary Key
InteractionNumber	string	This is a test attribute.
InteractionParticipant	*Interaction Participant*	The name of the interaction participant.
InteractionStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the interaction started.
InteractionSubject	string	The subject of the interaction.
InteractionTypeCode	string	The channel of communication such as email, phone call, chat, and so on.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MediaItemId	long	The media identifier. This attribute is not used in Version 1.
MediaTypeCode	string	The media type code of the interaction.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OtherPartyPhoneNumber	string	The phone number of the person with whom the agent spoke.
OutcomeCode	string	The lookup code of the interaction outcome.
SalesAccountId	long	The sales account identifier for the customer associated with the interaction. It will be used in the future.
SwitchCallId	string	The unique identifier of the call in the CTI system. It is used by the customers and the vendors to tie an interaction in Fusion back to the record in the telephony system.

Interaction Association

An association data object that represents an interaction in the context of an Oracle Fusion Applications business object such as an opportunity or lead.

QName: {http://xmlns.oracle.com/apps/crmCommon/interactions/interactionService/}InteractionAssociation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Interaction*
Handled by	*Customer Interaction*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActionCode	string	The type of action performed on the business object such as created, updated, viewed, re-opened, closed, and so on. The value is obtained through a lookup.

Name	Type	Description
AssociatedObjectCode	string	The identifier of the ZMM Object Type from Objects Metadata. It holds the consuming product table's information, and the corresponding Object Type is retrieved using Objects Metadata.
AssociatedObjectUid	string	The identifier of the ZMM Object from Objects Metadata. It holds the consuming product table's information, and the corresponding ObjectId is retrieved using Objects Metadata.
AssociationSequenceNumber	long	The sequence of business objects for an interaction. For example, sequence can be like create an order, update a service request, create an opportunity, and so on.
ConflictId	decimal	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
InteractionAssociationId	long	The unique identifier for the interaction associations table. • Primary Key
InteractionId	long	The identifier of the interaction that the associated object belongs to. All business objects associated to Interaction are identified by this attribute.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Interaction Participant

An interaction participant representing a contact or resource such as Mary Smith or Jane Doe.

QName: {http://xmlns.oracle.com/apps/crmCommon/interactions/interactionService/}InteractionParticipant

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Interaction*
Handled by	*Customer Interaction*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConflictId	decimal	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
InteractionId	long	The identifier of the interaction that the participant record relates to.
InteractionParticipantId	long	The unique identifier for the interaction participant object. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ParticipantId	long	The party identifier of the TCA Party, Account, or Site. These participants can be internal (resources) or external (contacts, accounts, sites, or employees).
ParticipantTypeCode	string	The type of the participant such as Contact, Resource, and so on.
RelationshipId	long	The relationship identifier for the record.
ResourceOrgId	long	The sales organization identifier for a resource participant.
UserGUID	string	The "light weight" user global unique identifier. It is the foreign key to FND_USER. Light Weight users are defined in the Extended Security (XS) System.

Deal Registration Service

External service to operate on deal registration.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/marketing/dealMgmt/deals/dealService/}DealService

Service WSDL URL: https://servername/crmService/DealService?WSDL

Logical Business Objects

- CRM : Lead Management : Sales Lead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Deal Registration*
Handles	*Address*
Handles	*Partner Account Resource*
Handles	*Instant Messaging*
Handles	*Partner Certification*
Handles	*Email*
Handles	*Partner Members*
Handles	*Partner Geography Served*
Handles	*Partner Phone*
Handles	*Partner Generic List of Values*
Handles	*Source System Reference*
Handles	*Industry Served*
Handles	*Partner*
Handles	*Partner Focus Area*
Handles	*Partner Type*
Handles	*Partner Dimension Member*
Handles	*Trading Community Contact Point Additional Information*
Handles	*Deal Resources*
Handles	*Electronic File Transfer*
Handles	*Partner Email*
Handles	*Classification Assignment*

Relationship Type	Object or Service
Handles	*Trading Community Original System Mapping Identifier Additional Information*
Handles	*Trading Community Address Additional Information*
Handles	*Partner Public Contact*
Handles	*Phone*
Handles	*Trading Community Address Purpose*
Handles	*Expertise*
Handles	*Contact Preference*
Handles	*Deal Products*
Handles	*Telex*
Handles	*Deal Registration Territory Resource*
Handles	*Web*

Operations

- *performDealAssignment*
- *getDeal*
- *createDeal*
- *updateDeal*
- *mergeDeal*
- *findDeal*
- *processDeal*
- *processCSDeal*
- *deleteDealProduct*
- *deleteDealResource*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

performDealAssignment

A web service method which allows user to do the deal assignment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
dealId	long	The input parameter of performDealAssignment operation. The deal identifier is a mandatory input parameter.

Response Payload

Element Name	Type	Description
result	string	The return parameter of performDealAsssignment operation. It returns the result of assignment operation.

getDeal

A web service method which queries a single record of Oracle Fusion Deal Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
dealId	long	A required input parameter of the getDeal web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/dealMgmt/deals/dealService/}DealResult	The return value of getDeal web service method. It includes the full set of attributes of the record.

createDeal

A web service method which creates Oracle Fusion Deal Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
deal	*Deal Registration*	A required input parameter of the createDeal web Service method. The input object includes the attribute values that the deal record is created with.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/dealMgmt/deals/dealService/}DealResult	The return value of the createDeal web Service method. It includes the full set of attributes of the record.

updateDeal

A web service method which updates an Oracle Fusion Deal object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
deal	*Deal Registration*	A required parameter of the updateDeal web Service method. The record matching the ID specified in this input, is updated with the corresponding input attribute values.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/dealMgmt/deals/dealService/}DealResult	The return value of the updateDeal web Service method. It includes the full set of attributes of the record.

mergeDeal

Creates a single record of Oracle Fusion Deal Object or updates a record with given ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
deal	*Deal Registration*	A required parameter of the mergeDeal web service method. The record matching the ID specified in this input is updated. If no ID is specified, then the record is created instead.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/dealMgmt/deals/dealService/}DealResult	The return value of the mergeDeal web service method. It includes the full set of attributes of the record.

findDeal

Queries a single record or set of records of Oracle Fusion Deal Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findDeal web service method. The filter criteria is the cumulative set of attribute criteria that identifies record queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findDeal.

Response Payload

Element Name	Type	Description
result	*Deal Registration*	The return value of the findDeal web service method. It includes the full set of attributes of records queried.

processDeal

Create or update Oracle Fusion Deal object records in bulk.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	As a input parameter value either of create, merge or update needs to be passed.
deal	*Deal Registration*	A required parameter of the process deal web service method. The list of deal input records to be created or merged or updated.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	It has three parts. For the first parameter, value can be full which means full set of deal attributes to be returned, value of key means only deal ID values to be returned, value of none means non value returned. For the second parameter, similar to first parameter but related to exceptions. For the third mandatory parameter, indicates true or false for partial failure allowed or not.

Response Payload

Element Name	Type	Description
result	*Deal Registration*	The return value of the processDeal web service method. It can be none or a list of only the deal IDs or a list of full set of deal records.

processCSDeal

A web service operation that processes the deals.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	A required input parameter to pass the data to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	It has three parts. For the first parameter, value can be full which means full set of deal attributes to be returned, value of key means only deal Id values to be returned, value of none means non value returned. For the second parameter, similar to first parameter but related to exceptions. For the third mandatory

Element Name	Type	Description
		parameter, indicates true or false for partial failure allowed or not.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The return value of the processCSDeal web service method. It can be none or a list of only the deal IDs or a list of full set of deal records.

deleteDealProduct

A web service method which deletes an Oracle Fusion Deal Product Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
dealProduct	*Deal Products*	A required input parameter of the deleteDealProduct web service method. The record matching the input attribute values specified in the deal product is deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteDealProduct.

deleteDealResource

A web service method which deletes an Oracle Fusion Deal Resource Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
dealResource	*Deal Resources*	A required input parameter of the deleteDealResource web service method. The

Element Name	Type	Description
		record matching the input attribute values specified in the Deal Resource is deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteDealResource.

getDfltObjAttrHints

Retrieves user interface hint, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated. The parameter is present in ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getDeal	MKL_VIEW_PARTNER_DEAL_PRIV	Review Partner Deal	Allows view of all tabs in the deal registration UI with the exception of the social tab.
createDeal	MKL_CREATE_PARTNER_DEAL_PRIV	Create Partner Deal	Allows creating a deal registration.
mergeDeal	MKL_UPDATE_PARTNER_DEAL_PRIV	Update Partner Deal Details	Allows updating a deal registration summary details.
getEntityList	MKL_VIEW_PARTNER_DEAL_PRIV	Review Partner Deal	Allows view of all tabs in the deal registration UI with the exception of the social tab.

Operation Name	Privilege Code	Privilege Name	Privilege Description
performDealAssignment	MKL_UPDATE_PARTNER_DEAL_PRIV	Update Partner Deal Details	Allows updating a deal registration summary details.
updateDeal	MKL_UPDATE_PARTNER_DEAL_PRIV	Update Partner Deal Details	Allows updating a deal registration summary details.
getDfltObjAttrHints	MKL_VIEW_PARTNER_DEAL_PRIV	Review Partner Deal	Allows view of all tabs in the deal registration UI with the exception of the social tab.
processCSDeal	MKL_UPDATE_PARTNER_DEAL_PRIV	Update Partner Deal Details	Allows updating a deal registration summary details.
findDeal	MKL_VIEW_PARTNER_DEAL_PRIV	Review Partner Deal	Allows view of all tabs in the deal registration UI with the exception of the social tab.
deleteDealResource	MKL_UPDATE_PARTNER_DEAL_PRIV	Update Partner Deal Details	Allows updating a deal registration summary details.
getServiceLastUpdateTime	MKL_VIEW_PARTNER_DEAL_PRIV	Review Partner Deal	Allows view of all tabs in the deal registration UI with the exception of the social tab.
processDeal	MKL_UPDATE_PARTNER_DEAL_PRIV	Update Partner Deal Details	Allows updating a deal registration summary details.
deleteDealProduct	MKL_UPDATE_PARTNER_DEAL_PRIV	Update Partner Deal Details	Allows updating a deal registration summary details.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKL_CREATE_PARTNER_DEAL_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MKL_CREATE_PARTNER_DEAL_PRIV	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKL_VIEW_PARTNER_DEAL_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MKL_VIEW_PARTNER_DEAL_PRIV	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
MKL_UPDATE_PARTNER_DEAL_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MKL_UPDATE_PARTNER_DEAL_PRIV	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Address

An address of a trading community member, such as Oracle Corporation is located at 500 Oracle Parkway, Redwood Shores, CA.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Telex*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contains	*Trading Community Address Additional Information*
Contains	*Email*
Contains	*Electronic File Transfer*
Contained by	*Marketing Response*
Contained by	*Partner*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.

Name	Type	Description
Address4	string	The fourth line of the address.
AddressExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the location is no longer valid.
AddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines that are used in Japan.
AddressStyle	string	Style of the address.
Addressee	string	The information of the addressee.
City	string	The name of the city.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
ContactPreferenceExistFlag	boolean	Indicator to specify if the contact is primary contact for the party.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	The name of the country.
Country1	string	The attribute country1 is not used.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.

Name	Type	Description
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
DoNotValidateFlag	boolean	Indicator to specify that a particular location is not eligible for address validation irrespective of the current validation.
Eft	*Electronic File Transfer*	The electronic file transfer information for the party.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedAddress	string	The formatted read-only address.
FormattedLocaleAddress	string	The formatted read-only local address.
FormattedMultilineAddress	string	The formatted multi line address of the party site.
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
HouseType	string	Indicates the building type.
IdentifyingAddressFlag	boolean	Indicator to specify the identifying address for the party. Y stands for the indentifying site and N stands for sites that are not the indentifying site.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.

Name	Type	Description
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
Language	string	The operating language for the party site.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	The latitude of the party address.
LocationDirections	string	Directions to the location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
LocationLanguage	string	The operating language for the locations.
Longitude	decimal	The longitude of the party address.
Mailstop	string	A user-defined code to indicate a mail drop point within the organization.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary address of the contact irrespective of the context. Y stands for primary address and N stands for all others.

Name	Type	Description
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	Stores the doing-business_as (DBA) party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameDivision	string	Stores the division party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameLegal	string	Stores the legal party name for a party site. This column is used to store FSIO related legal party name attribute.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteInformation	*Trading Community Address Additional Information*	The party address information.
PartySiteName	string	The user-defined name for the site.
PartySiteNumber	string	The party site number of the address.
PartySiteType	string	Stores the party site type and is based on the lookup. Currently this is either null or one-time.
PartySiteUse	*Trading Community Address Purpose*	The information of the party address usage.
PartyUsageCode	string	The usage context of a party's contact point.
Phone	*Phone*	The phone information for the entity.
Position	string	The primary direction such as north or east that is used to access the location.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four digit extension to the United States postal ZIP code.
Province	string	The name of the province.

Name	Type	Description
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The Telex information associated with the party.
UsageCode	string	The usage code is not used.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	The standardized status code describing the results of the validation.
Web	*Web*	The web information related to the record.

Classification Assignment

The classification code assigned to a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CodeAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*

Relationship Type	Object or Service
Contained by	*Sales Competitor*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Reference*
Handled by	*Sales Reference Customer*
Handled by	*Company and User Registration*
Handled by	*Sales Party*
Handled by	*Sales Competitor Service*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party Territory service*
Handled by	*Sales Party Resource Service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassCategory	string	The name of the classification category.
ClassCode	string	The code of the classification.
CodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an object. It is primary key and system generated. • Primary Key
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableKey1	string	The first column of the alphanumeric or multi-part foreign key.
OwnerTableKey2	string	The second column of the alphanumeric or multi-part foreign key.
OwnerTableKey3	string	The third column of the alphanumeric or multi-part foreign key.

Name	Type	Description
OwnerTableKey4	string	The fourth column of the alphanumeric or multi-part foreign key.
OwnerTableKey5	string	The fifth column of the alphanumeric or multi-part foreign key.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PrimaryFlag	boolean	Indicator that specifies if this is the primary class code of a class category for the organization. Y stands for the primary class code and N stands for all others.
Rank	decimal	Ranks classes if multiple classes are assigned to a party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Contact Preference

The contact preference of the trading community member. For example, do not call Joe Smith between 10 a.m. and 12 noon on weekdays.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}ContactPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*

Relationship Type	Object or Service
Contained by	*Electronic Data Interchange*
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Household*
Contained by	*Phone*
Contained by	*Telex*
Contained by	*Web*
Contained by	*Contact Address*
Contained by	*Electronic File Transfer*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Relationship Type	Object or Service
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactLevelTable	string	The table that stores the contact level of the contact preference, and uses the SUBJECT_TABLE lookup. The list of accepted values are HZ_PARTIES, HZ_PARTIES_SITES, or HZ_CONTACT_POINTS.
ContactLevelTableId	long	The foreign key to the table specified in CONTACT_LEVEL_TABLE column. The list of accepted values are PARTY_ID from HZ_PARTIES table, CONTACT_POINT_ID from HZ_CONTACT_POINTS table, or PARTY_SITE_ID from HZ_PARTY_SITES table.
ContactPreferenceId	long	The unique identifier for the contact preference. • Primary Key
ContactType	string	The contact party type that defines whether the contact is a sales account, a prospect, a contact, or any other user-defined party type. The default value is CUSTOMER. A list of accepted values is defined in the lookup CONTACT_TYPE.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
MaximumNoOfInteractUOMCode	string	The period of time during which the maximum number of interactions applies. Uses the MAX_NO_OF_INTERACT_UOM_CODE lookup.
MaximumNoOfInteractions	decimal	The number of times you can use this contact point. The period of time that this number applies is stored in the MAX_NO_OF_INTERACT_UOM_CODE column.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PreferenceCode	string	Indicates whether to use a particular contact method. The list of accepted values are defined in the PREFERENCE_CODE lookup.
PreferenceEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes inactive.
PreferenceEndTimeHR	int	The hour part of time when the contact preference becomes inactive. The time is recorded in the 24 hour format.
PreferenceEndTimeMi	int	The minutes part of the time when the contact preference becomes inactive.
PreferenceStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes active.
PreferenceStartTimeHR	int	The hour part of time when the contact preference becomes active. The time is recorded in the 24 hour format.
PreferenceStartTimeMi	int	The minutes part of the time when the contact preference becomes active.
PreferenceTopicType	string	The appropriate subjects to send the party that the preference is created for. The list of accepted values are defined in the PREFERENCE_TOPIC_TYPE lookup.
PreferenceTopicTypeCode	string	The code of the preference topic type.

Name	Type	Description
PreferenceTopicTypeId	long	The unique identifier of the preference topic type.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
RequestedBy	string	Indicates if the permission or restriction was created internally or requested by the party. The list of accepted values are defined in the REQUESTED_BY lookup.
Status	string	The status of the record.

Deal Products

The product or product family associated with the deal registration that a customer is interested in.

QName: {http://xmlns.oracle.com/apps/marketing/dealMgmt/deals/dealService/}DealProduct

Logical Business Objects

- CRM : Lead Management : Sales Lead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Deal Registration*
Handled by	*Deal Registration Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Amount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount.
ConvCurrencyCode	string	The conversion currency code.
ConvExchangeRate	decimal	The conversion exchange rate.
ConvRateType	string	The conversion rate type.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DealId	long	The deal identifier to which the product row belongs to.
DealProdId	long	The deal product identifier. It is a primary key. • Primary Key
InvOrgId	long	The inventory organization identifier.
InventoryItemId	long	The inventory item identifier.
ItemDescription	string	The item description.
ItemName	string	The item name.
ItemNumber	string	Public Unique Identifier for Item in Deal Registration
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the

Name	Type	Description
		start and end of a transaction to determine whether another session has updated the row.
ProductGroupDescription	string	The product group description.
ProductGroupId	long	The product group identifier.
ProductGroupName	string	The product group name.
ProductGroupNumber	string	Public Unique Identifier for Product Group in Deal Registration
ProductType	string	The product type.
Quantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The product quantity.
RegisteredPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The product registered price.
UOMCode	string	The product UOM Code.

Deal Registration

The process by which a partner user registers a business opportunity with the brand owner in order to become eligible for benefits, such as exclusive rights to the opportunity, additional rebates, presales support, and so on.

QName: {http://xmlns.oracle.com/apps/marketing/dealMgmt/deals/dealService/}Deal

Logical Business Objects

- CRM : Lead Management : Sales Lead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Partner*
Contains	*Deal Products*

Relationship Type	Object or Service
Contains	*Deal Resources*
Contains	*Deal Registration Territory Resource*
Handled by	*Deal Registration Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountPartyNumber	string	Public Unique Identifier of Account Party on the Deal Registration
ApprovalTaskStatusCode	string	The approval task status code.
ApprovedByPartyName	string	Approved by party name.
ApprovedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the deal is approved.
CloseDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The close date.
ConPrPhoneAreaCode	string	The primary phone area code of the contact.
ConPrPhoneCountryCode	string	The primary phone country code of the contact.
ConPrPhoneNumber	string	The primary phone number of the contact.
ContactEmailAddress	string	The e-mail address of the contact.
ContactId	long	The unique identifier of the contact.
ContactJobTitle	string	The contact job title.
ContactPartyNumber	string	Public Unique Identifier of Contact Party on the Deal Registration
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerId	long	The unique identifier of the customer.
CustomerLocationAddrElementAttribute1	string	The address element 1 for the customer location.
CustomerLocationAddrElementAttribute2	string	The address element 2 for the customer location.
CustomerLocationAddrElementAttribute3	string	The address element 3 for the customer location.
CustomerLocationAddrElementAttribute4	string	The address element 4 for the customer location.
CustomerLocationAddrElementAttribute5	string	The address element 5 for the customer location.
CustomerLocationAddress1	string	The first line of the address associated with the deal.
CustomerLocationAddress2	string	The second line of the address associated with the deal.
CustomerLocationAddress3	string	The third line of the address associated with the deal.
CustomerLocationAddress4	string	The fourth line of the address associated with the deal.
CustomerLocationAddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines used in Japan.
CustomerLocationBuilding	string	The specific building name or number at a given address.
CustomerLocationCity	string	The city in which customer is located.
CustomerLocationCountry	string	The country in which customer is located.
CustomerLocationCounty	string	The county in which customer is located.

Name	Type	Description
CustomerLocationFloorNumber	string	The specific floor number at a given address or in a particular building when the building number is provided.
CustomerLocationPostalCode	string	The postal code of customer location.
CustomerLocationPostalPlus4Code	string	The four digit extension to the United States postal code.
CustomerLocationProvince	string	The province in address associated with the deal.
CustomerLocationState	string	The state in which customer is located.
CustomerPartyType	string	The customer party type.
DealContactName	string	The deal contact name.
DealCustomerName	string	The deal customer name.
DealExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the deal expires.
DealId	long	The unique identifier of the deal. • Primary Key
DealName	string	The deal name.
DealNumber	string	The deal number.
DealProduct	*Deal Products*	The deal product.
DealRejectedComments	string	The deal rejection comments.
DealRejectedReasonCode	string	The deal rejection reason code.
DealResources	*Deal Resources*	The deal resources.
DealReturnComments	string	The deal return comments.
DealReturnReasonCode	string	The deal return reason code.

Name	Type	Description
DealSize	decimal	The deal size.
DealTerritoryResource	*Deal Registration Territory Resource*	The deal territory resource.
DealType	string	The deal type.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LeadNumber	string	Public Unique Identifier of Lead associated to the Deal Registration
MatchedAccountPartyId	long	The unique identifier of the matched account party.
MatchedAccountPartyNumber	string	Public Unique Identifier of Matched Account Party on the Deal Registration
MatchedAccountPartyUniqueName	string	Matched account name.
MatchedContactPartyId	long	The unique identifier of the matched contact party.
MatchedContactPartyName	string	Matched contact name.
MatchedContactPartyNumber	string	Public Unique Identifier of Matched Contact Party on the Deal Registration
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OptyId	long	The unique identifier of the opportunity.
OptyNumber	string	Public Unique Identifier of Opportunity associated to the Deal Registration
OwnerId	long	The unique identifier of the owner.

Name	Type	Description
OwnerPartyName	string	The name of the owner party.
OwnerPartyNumber	string	Public Unique Identifier of Owner Party on the Deal Registration
PartnerCompanyNumber	string	Public Unique Identifier of Partner company associated to the Deal Registration
PartnerId	long	The unique identifier of the partner.
PartnerLevel	string	The partner level.
PartnerOwnerName	string	The partner owner name.
PartnerPartyName	string	The name of the partner party.
PartnerProfileOrgPartyPVO	*Partner*	Partner object associated to the deal.
PartnerType	string	The partner type.
ProgramEnrollmentId	long	The unique identifier of the program enrollment.
ProgramEnrollmentNumber	string	Public Unique Identifier of Partner Program associated to the Deal Registration
RejectedByPartyName	string	Rejected by party name.
RejectedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the deal is rejected.
ReturnedByPartyName	string	Returned by party name.
ReturnedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the deal is returned.
StatusCode	string	The pre-defined code used to indicate the status.
SubmittedByPartyName	string	Submitted by party name.
SubmittedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date of submission.

Name	Type	Description
UpdateFlag	boolean	Indicator to control whether the user has access to update the record.
WithdrawnByPartyName	string	Withdrawn by party name.
WithdrawnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the deal is withdrawn.
isApproverFlag	boolean	Is Approver indicator.

Deal Registration Territory Resource

The territory resource for the deal registration.

QName: {http://xmlns.oracle.com/apps/marketing/dealMgmt/deals/dealService/}DealTerritoryResource

Logical Business Objects

- CRM : Lead Management : Deal Registration

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Deal Registration*
Handled by	*Deal Registration Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
DealId	long	The unique identifier of the deal.
DealTerritoryId	long	The unique identifier of the deal territory. • Primary Key

Name	Type	Description
ResourceId	long	The unique identifier of the resource.
ResourceUserName	string	The territory resource user name.
TerrResourceId	long	The territory resource identifier.
TerritoryVersionId	long	The territory version identifier.
TypeCode	string	The territory type code.

Deal Resources

The resource associated with the deal registration.

QName: {http://xmlns.oracle.com/apps/marketing/dealMgmt/deals/dealService/}DealResource

Logical Business Objects

- CRM : Lead Management : Sales Lead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Deal Registration*
Handled by	*Deal Registration Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	The access level code.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DealId	long	The deal identifier.
DealNumber	string	Public Unique Identifier of Deal Registration on the Deal Resource Team
DealResourceId	long	The deal resource identifier. • Primary Key
EmailAddress	string	The email address associated with the record.
FormattedPhoneNumber	string	The formatted phone number.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MemberFunctionCode	string	The member function code.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerFlag	boolean	Indicator to specify the owner.
ResourceId	long	The unique identifier of the resource.
ResourceName	string	The resource name.
ResourcePartyNumber	string	Public Unique Identifier of Resource Party on the Deal Resource Team
ResourceUsername	string	The resource user name.

Electronic File Transfer

The electronic funds transfer information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Eft

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EFTPrintingProgramId	long	The printing program identifier.
EFTSWIFTCode	string	The EFT swift code information.
EFTTransmissionProgramId	long	The transmission program identifier.
EFTUserNumber	string	The number that identifies you as a user of electronic funds transfer service for your bank or clearing organization.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

E-Mail

The e-mail address associated with a trading community member. For example, john.doe@oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Email

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The preferred format for e-mail addressed to this address such as HTML or ASCII. A list of accepted values is defined using the lookup EMAIL_FORMAT.
EmailInformation	*Trading Community Contact Point Additional Information*	The additional information about the e-mail.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary e-mail of the associated object. If the value is True, then this is the primary e-mail. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.

Name	Type	Description
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Expertise

The expertise of a partner.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerExpertise

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Partner Generic List of Values*

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ExpertiseCode	string	The expertise code of the partner expertise.
ExpertiseName	string	The expertise name of the partner expertise.

Partner Generic List of Values

The generic list of multiple values used for certifications and expertise.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerProfileMultivalueLov

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Partner Certification*
Extended by	*Expertise*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
LookupCode	string	The value from a multi-value list of values category that applies to the profile.
LookupType	string	The list of values code that defines the category to which the list of values belong. This value indicates the profile field to which the value belongs.
PartnerMultivalLovId	long	The unique identifier of the list of values code selected for a specific multi-value field in the partner profile. • Primary Key
PartyId	long	The unique identifier of the contact party.

Industries Served

The industries in which a partner operates.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerIndustryServed

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Partner Dimension Member*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassificationCategory	string	The classification category of the industry served.
ClassificationCode	string	The classification code of the industry served.
ClassificationName	string	The classification name of the industry served.

Partner Dimension Member

A generic list of multiple values used for territory dimensions.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Industries Served*
Extended by	*Focus Areas*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK1 column.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	A specific type of item within the dimension code. For example, for the products dimension, product items and product categories are there.
DimensionCode	string	The dimension of the item being stored. For example, geography.
DimensionMemberName	string	The name of the dimension member.

Name	Type	Description
DimensionMemberNameBackup	string	The name of the dimension member to which this record refers to. This is stored in case the dimension member was removed and the user still requires the name of the item that was removed.
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerId	long	The unique identifier of the entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of the table. • Primary Key
TerrDimMemberId	long	The key data for the territory dimension.
TerrDimPartitionId	long	The primary key.
TypeCode	string	The type of the partition.

Instant Messaging

The instant messaging information of a trading community member, such as the AOL identifier or Yahoo Messenger information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}InstantMessaging

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessagingAddress	string	The instant messaging information address.
InstantMessagingInformation	*Trading Community Contact Point Additional Information*	The instant messaging information related to the record.

Name	Type	Description
InstantMessengerType	string	The type of the instant messenger type.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary instant messaging Id of the associated object. If the value is True, then this is the primary instant messaging Id. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.

Name	Type	Description
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Partner

The set of partner profile attributes used to provide values while creating or changing a partner account.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}Partner

Logical Business Objects

- CRM : Partner Management : Partner

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Partner E-Mail*
Contains	*Partner Geography Served*
Contains	*Address*
Contains	*Partner Members*
Contains	*Web*
Contains	*Partner Dimension Member*

Relationship Type	Object or Service
Contains	*Classification Assignment*
Contains	*Partner Public Contact*
Contains	*Partner Account Resource*
Contains	*Partner Generic List of Values*
Contains	*Expertise*
Contains	*Industry Served*
Contains	*Partner Certification*
Contains	*Phone*
Contains	*Focus Areas*
Contains	*Partner Phone*
Contains	*Partner Type*
Contains	*Email*
Contained by	*Deal Registration*
Contained by	*Program Enrollments*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountDirectorId	long	The unique identifier of a valid employee resource who owns and manages the partner sales account.
Address1	string	The first line of the address.
AnalysisFy	string	The fiscal year that the financial information is based on.
AnnualRevenue	decimal	The partner's annual revenue. This field is maintained by the channel manager and partner administrator.
Auxiliary1ClassCode	string	The auxiliary Class Code 1 for a classification.
Auxiliary1CodeAssignmentId	long	The unique identifier of the assignment of the auxiliary Class Code 1.
Auxiliary1EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 1 is no longer active.
Auxiliary1StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 1 becomes effective.
Auxiliary2ClassCode	string	The auxiliary Class Code 2 for a classification.
Auxiliary2CodeAssignmentId	long	The unique identifier of the assignment of the auxiliary Class Code 2.
Auxiliary2EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 2 is no longer active.
Auxiliary2StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 2 becomes effective.
Auxiliary3ClassCode	string	The auxiliary Class Code 3 for a classification.
Auxiliary3CodeAssignmentId	long	The unique identifier of the assignment of the auxiliary Class Code 3.
Auxiliary3EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 3 is no longer active.
Auxiliary3StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 3 becomes effective.

Name	Type	Description
BusinessScope	string	The physical class of business in which a business participates. For example, local, national, or international.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CeoTitle	string	The formal title of the chief executive officer.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
City	string	The name of the city.
ClassificationTypes	*Classification Assignment*	The classification type of a partner.
CompanyNumber	string	The partner's company number that is an alternate unique identifier of the partner. This value is maintained by the channel manager and partner administrator.
ComplianceReviewedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the compliance review for the partner was last completed.
ComplianceStatus	string	Indicates whether the partner is compliant with vendor's criteria such as certifications, training, and so on. If the value is True, then the partner is compliant.
ControlYr	decimal	The year when current ownership gained control of the organization.
CorpCurrencyCode	string	Corporate currency
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
CurrencyCode	string	Currency
CurrentFyPotentialRevenue	decimal	The estimated revenues that can be earned by the organization during its current fiscal year.
DUNSNumber	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DbRating	string	The Dun & Bradstreet credit rating.
Description	string	The free text description of the record.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EligibleForPublicProfile	string	Indicates whether the partner is eligible to publish their public profile. If the value is True, then the partner can publish their public profile.
Email	*E-Mail*	The email address associated with the record.
EmployeesTotal	decimal	The total number of employees.
ExportInd	string	Indicates whether the organization is an exporter. If the value is Y, then the organization is an exporter. The default value is N.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
FormattedAddress	string	The formatted address information.
FormattedPhoneNumber	string	The formatted phone number.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.

Name	Type	Description
GeoNameReferenceId	long	The unique name reference identifier.
GeographyId	long	The geography ID for the geography served by the partner.
HomeCountry	string	The home country associated with the party.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
IncorpYear	int	The year that the business was formally incorporated.
IndustryClassCode	string	The Industry classification code. The classification codes are defined for every classification category as specified in IndustryCodeType attribute.
IndustryCodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code.
IndustryCodeEndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the industry class code is no longer valid.
IndustryCodeStartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the industry class code applies to the industry.
IsSelfRegisteredPartner	string	Indicates whether the partner registered through the self-service user interface.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LastTerritoryAssignedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the territory was last assigned.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
LegalStatus	string	The legal structure of the organization such as partnership, corporation, and so on.
LineOfBusiness	string	The type of business activities performed at this site.
Location	string	The location information of the partner.
LockTerritoryAssignment	string	Indicates if the automatic territory assignment can be set. If the value is True, then the automatic territory assignment cannot remove the sales account team resource. The default value is False.
MinorityOwnedInd	string	Indicates whether the organization is primarily owned by ethnic or racial minorities. If the value is Y, then the organization is owned by ethnic or racial minorities. The default value is N.
MinorityOwnedType	string	The type of minority-owned firm.
NextFyPotentialRevenue	decimal	The estimated revenues that can be earned by the organization during its next fiscal year.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OpportunitiesWonPriorYear	decimal	Opportunities that the partner sales representatives closed and won in the prior fiscal year.
OpportunitiesWonYTD	decimal	Opportunities that the partner sales representatives closed and won in the current fiscal year-to-date.
OrgTypeClassCode	string	The classification code for the organization type.
OrgTypeCodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an organization type.
OrgTypeCodeEndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the organization type class code is no longer valid.

Name	Type	Description
OrgTypeCodeStartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the class code applies to the organization type.
OrganizationName	string	The name of the party when the party type is Organization.
OrganizationProfileId	long	The unique identifier of the organization profile.
OrganizationSize	string	The size of the organization based on its revenue, number of employees, and so on.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference.
OwnerName	string	The name of a valid employee resource that owns and manages the partner account.
OwnerPersonPartyId	long	The unique identifier of a valid employee resource who owns and manages the partner account.
ParentPartnerPartyId	long	A foreign key reference to the TCA party records that represents the Partner's parent company.
ParentPartnerPartyNumber	string	Candidate for public surrogate key field and serves as a user-entered identifier for the Partner's Parent company.
ParentPk1Value	string	Attribute Deprecated, use Attribute ParentPartnerPartyId instead
PartnerAccountId	long	The unique identifier of the partner account resource team member.
PartnerAccountResourceToAccountP	*Partner Account Team*	The list of account resources for the partner account.
PartnerCertificationP	*Partner Certification*	The list of certifications for partner.
PartnerDimensionMemberPVO	*Partner Dimension Member*	The list of dimension members for the partner.

Name	Type	Description
PartnerEmailPVO	*Partner E-Mail*	The list of e-mails for the partner.
PartnerExpertise	*Expertise*	The list of expertise for the partner.
PartnerFaxPVO	*Partner Phone*	The list of fax for the partner.
PartnerGeography	*Geographies Served*	The list of geographies served by the partner.
PartnerIndustry	*Industries Served*	The list of industries served by the partner.
PartnerLevel	string	The relative tier of the partner.
PartnerMember	*Partner Members*	The list of members for a partner.
PartnerMemberPVO	*Partner Public Contact*	The public contact information of the partner.
PartnerPhonePVO	*Partner Phone*	The list of phones of the partner.
PartnerProductSpeciality	*Focus Areas*	The list of product specialties of the partner.
PartnerProfileMultivalueLovP	*Partner Generic List of Values*	The list of partner profile values for the partner.
PartnerSummary	string	The description of the partner company.
PartnerTypeDimensionMemberP	*Partner Type*	The list of partner type dimensions for the partner.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartySite	*Address*	The party site associated with the partner.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.

Name	Type	Description
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PrefferedContactId	long	The unique identifier of the preferred contact person for the partner.
PrefferedContactName	string	The name of the preferred contact person for the partner.
PrimaryPhoneContactPointId	long	The unique identifier of the primary phone contact point.
PrimaryURLContactPointId	long	The unique identifier of the primary URL contact point.
PrincipalName	string	The Name of the highest ranking person in the company.
PrincipalTitle	string	The title of the highest ranking person in the organization.
ProfileObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
Province	string	The name of the province.
PublicAddressId	long	The partner company address displayed in Partner Finder.
PublicContactId	long	The partner contact name displayed in Partner Finder.
PublicEmailId	long	The e-mail displayed in Partner Finder.
PublicFaxId	long	The fax number displayed in in Partner Finder.
PublicPhoneId	long	The phone displayed in Partner Finder.

Name	Type	Description
PublicPrivateOwnershipFlag	boolean	Indicates whether the organization is publically or privately owned. If the value is Y, then the organization is a privately owned organization. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
PublicStatus	string	Status of approval of public profile.
RangeEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date in the import range.
RangeStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date in the import range.
ReassignTerritory	string	Indicates whether this partner needs territory reassignment.
RegistrationType	string	Indicates the registration type of the partner.
SmallBusInd	string	Indicates whether the organization is considered as a small business. If the value is Y, then the organization is considered as a small business. The default value is N.
SolutionOverview	string	The overview description of partner solutions.
State	string	The name of the state.
Status	string	The status of the record.
StockSymbol	string	The corporate stock symbol of the organization as listed in stock exchanges.
Synergy	string	The description of the value of the partnership between the Vendor and Partner.
TierId	long	The unique identifier for a tier to which a partner applies.
TotalEmployeesInd	string	Indicates if subsidiaries are included in the calculation of total employees. The accepted values are defined in the lookup type TOTAL_EMPLOYEES_INDICATOR.
TotalEmployeesText	string	The total number of employees in text format.

Name	Type	Description
TreeCode	string	The unique code of the partner organization tree.
TreeStructureCode	string	The unique code for the partner organization tree structure.
URL	string	The destination URL associated with a specific Google AdWords ad.
UniqueNameSuffix	string	The suffix used to generate the attribute PartyUniqueName. The suffix is concatenated to the Organization Name attribute to generate the PartyUniqueName. The primary address is defaulted as the suffix.
Web	*Web*	The web information related to the record.
YearEstablished	int	The year when the organization began doing business.

Partner Account Team

The person assigned to a partner account team.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerAccountResource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	The type of access granted to the resource as well as managers of the organizations.
AssignmentTypeCode	string	The code indicating how the resource is assigned to the sales account team.
CreatedBy	string	Who column: indicates the date and time of the creation of the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who created the row.
EmailAddress	string	The email address associated with the record.
FormattedPhoneNumber	string	The formatted phone number.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
MemberFunctionCode	string	The code indicating the role of a sales team member in the resource team such as Integrator, Executive Sponsor, and Technical Account Manager. A list of accepted values is defined in the lookup FND_LOOKUPS.
OrganizationName	string	The name of the party when the party type is Organization.
OrganizationRole	string	The role of the partner in the organization.
PartnerAccountId	long	The unique identifier of the partner account resource team.
PartnerAccountResourceId	long	The unique identifier of the member of the partner account resource team. • Primary Key

Name	Type	Description
PartnerPartyId	long	The PartyId of Partner whose Account Team includes this resource.
ResourceId	long	The unique identifier of the resource.
ResourceName	string	The name of the resource associated with the partner account team.
TerritoryName	string	The name of the territory for the partner account.

Partner Certification

The list of certifications that a partner has achieved.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerCertification

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Partner Generic List of Values*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CertificationCode	string	The code for the certification.
CertificationName	string	The name of this certification.
LookupCode1	string	The key information for the certification.
LookupType1	string	The key information for the certification.
Meaning	string	The name of this certification.

Partner Generic List of Values

The generic list of multiple values used for certifications and expertise.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerProfileMultivalueLov

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Partner Certification*
Extended by	*Expertise*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
LookupCode	string	The value from a multi-value list of values category that applies to the profile.
LookupType	string	The list of values code that defines the category to which the list of values belong. This value indicates the profile field to which the value belongs.
PartnerMultivalLovId	long	The unique identifier of the list of values code selected for a specific multi-value field in the partner profile. • Primary Key
PartyId	long	The unique identifier of the contact party.

Partner Dimension Member

A generic list of multiple values used for territory dimensions.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Industries Served*

Relationship Type	Object or Service
Extended by	*Focus Areas*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK1 column.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	A specific type of item within the dimension code. For example, for the products dimension, product items and product categories are there.
DimensionCode	string	The dimension of the item being stored. For example, geography.
DimensionMemberName	string	The name of the dimension member.
DimensionMemberNameBackup	string	The name of the dimension member to which this record refers to. This is stored in case the dimension member was removed and the user still requires the name of the item that was removed.

Name	Type	Description
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerId	long	The unique identifier of the entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of the table. • Primary Key
TerrDimMemberId	long	The key data for the territory dimension.
TerrDimPartitionId	long	The primary key.
TypeCode	string	The type of the partition.

Partner E-Mail

The e-mail address of the partner.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerPublicEmail

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActualContentSource	string	The information regarding the source of the contact point.
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPointValue	string	The key information for the contact point.
CreatedByModule	string	The module that created the record.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The information on how to interpret the e-mail address.

Name	Type	Description
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
OrigSystemReference	string	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
Primary2Flag	boolean	Indicator to specify that the contact point is the primary point of contact.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
RelationshipId	long	The relationship identifier for the record.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Focus Areas

The focus areas or product specialties of the partner.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerProductSpeciality

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Partner Dimension Member*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ProductId	string	The unique identifier of the product for product specialties.
ProductName	string	The name of the product for product specialties.

Partner Dimension Member

A generic list of multiple values used for territory dimensions.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Industries Served*
Extended by	*Focus Areas*
Contained by	*Partner*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK1 column.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	A specific type of item within the dimension code. For example, for the products dimension, product items and product categories are there.
DimensionCode	string	The dimension of the item being stored. For example, geography.
DimensionMemberName	string	The name of the dimension member.
DimensionMemberNameBackup	string	The name of the dimension member to which this record refers to. This is stored in case the dimension member was removed and the user still requires the name of the item that was removed.
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.

Name	Type	Description
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerId	long	The unique identifier of the entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of the table. • Primary Key
TerrDimMemberId	long	The key data for the territory dimension.
TerrDimPartitionId	long	The primary key.
TypeCode	string	The type of the partition.

Partner Generic List of Values

The generic list of multiple values used for certifications and expertise.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerProfileMultivalueLov

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Partner Certification*

Relationship Type	Object or Service
Extended by	*Expertise*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
LookupCode	string	The value from a multi-value list of values category that applies to the profile.
LookupType	string	The list of values code that defines the category to which the list of values belong. This value indicates the profile field to which the value belongs.

Name	Type	Description
PartnerMultivalLovId	long	The unique identifier of the list of values code selected for a specific multi-value field in the partner profile. • Primary Key
PartyId	long	The unique identifier of the contact party.

Geographies Served

The geographies in which a partner operates.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerGeographyServed

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK1 column.
CreatedBy	string	Who column: indicates the user who created the row.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	A specific type of item within the dimension code. For example, for the products dimension there could be product items and product categories.
DimensionCode	string	The dimension of the item being stored. For example, geography.
DimensionMemberName	string	Name of dimension member.
DimensionMemberNameBackup	string	The name of the dimension remember this record refers to. This is stored in case the dimension member was removed and the user still needs to know the name of the item that was removed.
GeographyId	string	The geography ID of the geography served.
GeographyName	string	The geography name of the geography served.
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
OwnerId	long	The identifier of the entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.

Name	Type	Description
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of this table. • Primary Key
TerrDimMemberId	long	Key data for the territory dimension.
TerrDimPartitionId	long	Primary key.
TypeCode	string	Type of the partition.

Partner Members

The partner members for a partner.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Trading Community Person Details*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ObjectId	long	PartyId of Partner Organization to whom this Contact belongs.

Trading Community Person Details

The information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Person

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*
Contains	*Citizenship*
Contains	*Contact Language*
Contains	*Instant Messaging*
Contains	*Employment History*
Contains	*Web*
Contains	*Classification Assignment*
Contains	*Usage Assignment*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Contact Interest*
Contains	*Contact*

Relationship Type	Object or Service
Contains	*Additional Contact Name*
Contains	*Phone*
Contains	*Education*
Contains	*Email Domain*
Contains	*Additional Identifier*
Contains	*Contact Preference*
Contains	*Source System Reference*
Contains	*Certification*
Contains	*Contact Address*
Contains	*Email*
Contains	*Preference*
Extended by	*Partner Members*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*

Relationship Type	Object or Service
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.
AdditionalPersonName	*Additional Contact Name*	The additional name of the person.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information for the person.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Citizenship	*Citizenship*	The citizenship information of a person.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the person.
Comments	string	The comments for the record.

Name	Type	Description
ContactPreference	*Contact Preference*	The contact preference associated with the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
Education	*Education*	The education information of the person.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.
EmploymentHistory	*Employment History*	The employment history information of a person.
FinancialProfile	*Financial Profile*	The financial profile information of a person.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
Gender	string	The gender of the person, such as male, female, and unknown. A list of accepted values is defined in the lookup HZ_GENDER.

Name	Type	Description
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person. A list of accepted values is defined in the lookup MARITAL_STATUS.
MissionStatement	string	The corporate charter of organization in user-defined text format.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.

Name	Type	Description
PartyPreference	*Preference*	The preference mentioned in the person details.
PartySite	*Contact Address*	The party site associated with the person.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the person.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonInterest	*Contact Interest*	The interest information associated with a person.
PersonLanguage	*Contact Language*	The language information associated with a person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.

Name	Type	Description
PersonPreviousLastName	string	The previous last name of a person.
PersonProfile	*Contact*	The profile information of the person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPTId	long	The unique identifier of the primary e-mail.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPTId	long	The unique identifier of the primary phone contact point.

Name	Type	Description
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPTId	long	The unique identifier of the primary URL contact point.
Province	string	The name of the province.
Relationship	*Relationship*	The relationship information of the person.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
Salutation	string	The size of the household this person is a part of.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.

Name	Type	Description
Status	string	The status of the record.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the Third Party field in the Customers window is mandatory.
URL	string	The destination URL associated with a specific Google AdWords ad.
UserGUID	string	The "light weight" user Global Unique Id. Light Weight users defined in the Extended Security (XS) System.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
Web	*Web*	The web information related to the record.

Partner Phone

The phone number for a contact point.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerPublicPhone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActualContentSource	string	The information regarding the source of the contact point.
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPointValue	string	The key information for the contact point.
CreatedByModule	string	The module that created the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FormattedPhoneNumber	string	The formatted phone number.
LastContactDtTime	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The last time when the contact point was contacted.
OrigSystemReference	string	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PagerTypeCode	string	The type of pager for the phone number.
PartyUsageCode	string	The usage context of a party's contact point.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCallingCalendar	string	The information on proper calling times.

Name	Type	Description
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The extension of the phone number.
PhoneLineType	string	The type of phone line.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
RawPhoneNumber	string	The unformatted phone number.
RelationshipId	long	The relationship identifier for the record.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TransposedPhoneNumber	string	The transposed phone number.

Partner Public Contact

The point of contact used for the public profile.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerPublicContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*

Relationship Type	Object or Service
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AnalysisFy	string	The fiscal year that the financial information is based on.
CategoryCode	string	The user-defined category. The lookup type is CUSTOMER_CATEGORY.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
City	string	The name of the city.

Name	Type	Description
Comments1	string	The denormalization of the COMMENTS in HZ_GROUP_PROFILES.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy1	string	The user who created the account record.
CreatedByModule1	string	The module that created the account record.
CreationDate1	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyFyPotentialRevenue	decimal	The potential revenue of the organization in this fiscal year.
DUNSNumber	string	DUNS_NUMBER in VARCHAR format. Column value is not restricted to nine digit DUNS number.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The denormalization of the DATE_OF_BIRTH in HZ_PERSON_PROFILES.
EmailAddress	string	The email address associated with the record.
EmployeesTotal	decimal	The total number of employees.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
FormattedAddress	string	The formatted address of the contact.
FormattedPhoneNumber	string	The formatted phone number.
Gender	string	The denormalization of the GENDER in HZ_PERSON_PROFILES.
GroupType	string	The lookup for the group type.
HQBranchInd	string	The status of the site. Identifies if the location is the headquarters, a branch, or a single location.
HomeCountry	string	The home country associated with the party.

Name	Type	Description
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for a language.
LastUpdateDate1	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin1	string	The login of the user who last updated the record.
LastUpdatedBy1	string	The user who last updated the record.
MaritalStatus	string	The denormalization of the MARITAL_STATUS in HZ_PERSON_PROFILES.
MissionStatement	string	The corporate charter of the organization.
NextFyPotentialRevenue	decimal	The potential revenue of the organization for the next fiscal year.
OrigSystemReference	string	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PersonAcademicTitle	string	An academic title that is part of the name of a person, such as Dr. John Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_

Name	Type	Description
		PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	Used to specify the last name prefix such as fon, van, and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_PREFIX in HZ_PERSON_PROFILES is used. Corresponds to the field Last Name Prefix in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	Indicates the place in a family structure. For example, in Tom Jones III, III is the suffix.
PersonPreNameAdjunct	string	The salutary introduction such as Mr. or Herr.
PersonPreviousLastName	string	The previous last or surname of the person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.

Name	Type	Description
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPTId	long	The key to primary e-mail contact point.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPTId	long	The key to the primary contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPTId	long	The key to the primary URL contact point.
Province	string	The name of the province.
SICCode	string	The standard industry classification (SIC) code.
SICCodeType	string	The version of standard industry classification (SIC) code.
Salutation	string	The phrase used to address a party in any correspondence.
State	string	The name of the state.

Name	Type	Description
Status1	string	The party status indicator.
TradingPartnerIdentifier	string	One column to store the FSIO related trading partner codes. This column stores alpha numeric values. The column also addresses Fed vs. Non-Fed attribute requirement.
URL	string	The destination URL associated with a specific Google AdWords ad.
UserGUID	string	Stores the light weight user Global Unique ID. Light weight users are defined in the Extended Security (XS) system. Foreign key to FND_USER.
YearEstablished	int	The year when the organization began doing business.

Partner Type

The information about the partner type.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerTypeDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK2 column.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	This attribute is not used.
DimensionCode	string	This will contain the string 'SChnl' to indicate Partner Type.
DimensionMemberName	string	Name of dimension member.
DimensionMemberNameBackup	string	The name of the dimension remember this record refers to. This is stored in case the dimension member was removed and the user still needs to know the name of the item that was removed.
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
OwnerId	long	Partner Party Id of the Partner.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.

Name	Type	Description
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of this table. • Primary Key
PartnerTypeCode	string	The partner type code for partner.
PartnerTypeName	string	The name of the partner type, such as Value Added Reseller.
TerrDimMemberId	long	Key data for the territory dimension.
TerrDimPartitionId	long	Primary key.
TypeCode	string	Type of the partition.

Phone

The phone number associated with a trading community member. For example, the phone number for Oracle Corporation is 650-506-6000.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Phone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Marketing Response*

Relationship Type	Object or Service
Contained by	*Partner*
Contained by	*Household*
Contained by	*Contact Address*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FormattedPhoneNumber	string	The formatted phone number.
LastContactDtTime	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time of last contact placed to this contact point.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PagerTypeCode	string	The PAGER_TYPE_CODE column stores the lookup code for the type of pager. The type of pager determines how the page is received. For example, tone, number, alphanumeric or two-way alphanumeric.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCallingCalendar	string	The name or code for a calling calendar used with this telephone number. This attribute is no longer used in Fusion applications.
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The additional number addressed after initial connection to an internal telephone system.
PhoneInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community phone.
PhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound, or outbound.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party

Name	Type	Description
		or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RawPhoneNumber	string	The unformatted telephone number.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TimezoneCode	string	The foreign key to FND_TIMEZONES_B.TIMEZONE_CODE.
TransposedPhoneNumber	string	This column stores the concatenation of PHONE_COUNTRY_CODE, PHONE_AREA_CODE, and PHONE_NUMBER in reverse order. For example, if PHONE_COUNTRY_CODE=1, PHONE_AREA_CODE=650 and PHONE_NUMBER=5065747, this column stores 74756050561. This column is used for building an index to search for any combination of the above three columns.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*
Contained by	*Location Details*
Contained by	*Household*
Contained by	*Contact Preference*
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*
Contained by	*Trading Community Address Purpose*
Contained by	*Telex*
Contained by	*Phone*
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*
Contained by	*Trading Community Person Details*
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*

Relationship Type	Object or Service
Contained by	*Trading Community Customer Account Site Use*
Contained by	*Relationship*
Contained by	*Electronic Data Interchange*
Contained by	*Trading Community Customer Account or Site Role*
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*

Relationship Type	Object or Service
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Telex

The telex number information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Telex

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*

Relationship Type	Object or Service
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.

Name	Type	Description
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary telex of the associated object. If the value is True, then this is the primary telex. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.

Name	Type	Description
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TelexNumber	string	The telex reference number (usually a telephone number) of the organization.

Trading Community Address Additional Information

The address information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/}PartySiteInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact Address*
Contained by	*Address*

Relationship Type	Object or Service
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Address Purpose

The purpose of an address, such as Business, Home, or Ship To.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySiteUse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date at the start of the date range within which the row is active.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
IntegrationKey	string	The integration key is not used.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteUseId	long	The unique identifier of the party site used. • Primary Key

Name	Type	Description
PrimaryPerType	string	Indicates if this is the primary use for the site. Y stands for the primary site and N stands for all other sites.
RequestId	long	A system-generated read-only attribute used by the application framework.
SiteUseType	string	The site use type associated with the address.
Status	string	The status of the record.

Trading Community Contact Point Additional Information

The contact point for a trading community member like phone or e-mail. For example 650-506-6000 is the phone number for Oracle Corporation, john.doe@example.com is the e-mail address for John Doe.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/}ContactPointInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Phone*
Contained by	*Web*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Relationship Type	Object or Service
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointType	string	The type of the contact point.
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Web

The Web information associated with a trading community member. For example, Oracle's address on the Web is www.oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Web

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*

Relationship Type	Object or Service
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.

Name	Type	Description
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N stands for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.

Name	Type	Description
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
URL	string	The destination URL associated with a specific Google AdWords ad.
WebInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community Web.
WebType	string	The prefix class to a Web address. Typically, this is either FTP or HTTP.

Duplicate Resolution Service

The service to find and merge duplicate parties and the child entities.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/dataStewardship/resolutionService/}DuplicateResolutionService

Service WSDL URL: https://servername/crmService/DuplicateResolutionService?WSDL

Logical Business Objects

- CRM : Trading Community Hub : Trading Community Duplicate Resolution Request

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Duplicate Party Information*
Handles	*Duplicate Entity Reference*
Handles	*Duplicate Resolution Detail*
Handles	*Duplicate Resolution Request*

Operations

- *getResolutionRequest*
- *findResolutionRequest*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getResolutionRequest

A web service method which queries a single record of resolution request based on the primary key identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
requestId	long	Input parameter of the getResolutionRequest web service method. It is the primary key identifier of the request you want to query for.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/dataStewardship/resolutionService/}ResolutionRequestResult	The return value of getResolutionRequest web service method. It includes the key set of attributes for the queried request identifier.

findResolutionRequest

A web service method that queries a single record or set of records of resolution request objects that match the supplied criteria

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findResolutionRequest web service method. The criteria used to limit the query result, such as the filter (where clause).
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Duplicate Resolution Request*	The result of the findResolutionRequest operation that includes the successfully resolved and merged parties and a list of warning or information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	An operation to get the list of service data objects defined on this service.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getResolutionRequest	ZCH_VIEW_TRADING_ COMMUNITY_DUPLICATE_ RESOLUTION_REQUEST_PRIV	View Trading Community Duplicate Resolution Request	Allows viewing of the duplicate resolution request details.
findResolutionRequest	ZCH_VIEW_TRADING_ COMMUNITY_DUPLICATE_ RESOLUTION_REQUEST_PRIV	View Trading Community Duplicate Resolution Request	Allows viewing of the duplicate resolution request details.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCH_VIEW_TRADING_ COMMUNITY_DUPLICATE_ RESOLUTION_REQUEST_PRIV	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ZCH_VIEW_TRADING_ COMMUNITY_DUPLICATE_ RESOLUTION_REQUEST_PRIV	ORA_DUP_RES_INQUIRY_DUTY	Trading Community Duplicate Resolution Request Inquiry	Grants privileges to view duplicate resolution requests
ZCH_VIEW_TRADING_ COMMUNITY_DUPLICATE_ RESOLUTION_REQUEST_PRIV	ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_ DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_ CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_DUP_RES_MANAGE_DUTY	ORA_DUP_RES_INQUIRY_DUTY	Trading Community Duplicate Resolution Request Inquiry	Grants privileges to view duplicate resolution requests
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duplicate Entity Reference

The unique identifier of the duplicate record.

QName: {http://xmlns.oracle.com/apps/cdm/dataStewardship/resolutionService/}SourceSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Duplicate Party Information*
Handled by	*Duplicate Resolution Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
SourceSystem	string	Original System
SourceSystemReferenceId	long	Primary key of the original source system
SourceSystemReferenceValue	string	Original System Reference

Duplicate Party Information

The details of a duplicate party including its name and identifier.

QName: {http://xmlns.oracle.com/apps/cdm/dataStewardship/resolutionService/}DuplicateParty

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Duplicate Entity Reference*
Contained by	*Duplicate Resolution Request*
Handled by	*Duplicate Resolution Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
MasterFlag	boolean	Indicates if the party is master.
PartyId	long	Unique identifier of the party.
PartyName	string	Name of the party.
PartyNumber	string	Unique identification number for this party.
PartyType	string	Type of party such as Organization, Person, or Group

Name	Type	Description
SourceSystemReference	*Duplicate Entity Reference*	Original System Reference for the Party.

Duplicate Resolution Detail

The information used to determine master record and surviving entities during the duplicate resolution.

QName: {http://xmlns.oracle.com/apps/cdm/dataStewardship/resolutionService/}ResolutionDetail

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Duplicate Resolution Request*
Handled by	*Duplicate Resolution Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Action	string	Type of the actions like Transfer, Merge, Remove or Retain
EntityId	long	Primary key of the record.
EntityObject	string	Logical business entity of this record.
MasterFlag	boolean	Indicates if the party is master.
MasterId	long	Refers to the master record of this record.
ParentId	long	Refers to parent record of this record.
ParentMasterId	long	Refers to the master record of the parent record.

Name	Type	Description
ParentObject	string	Logical business entity of the parent record.

Duplicate Resolution Request

The web service call that contains information about consolidating a set of duplicate records.

QName: {http://xmlns.oracle.com/apps/cdm/dataStewardship/resolutionService/}ResolutionRequest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Duplicate Party Information*
Contains	*Duplicate Resolution Detail*
Handled by	*Duplicate Resolution Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the request.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the request was created
DuplicateParty	*Duplicate Party Information*	Duplicate party information
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the request was last updated
LastUpdatedBy	string	The user who last updated the request
ObjectVersionNumber	int	Internal attribute used for optimistic locking.

Name	Type	Description
RequestId	long	Resolution request identifier • Primary Key
RequestName	string	Name of the request.
RequestNumber	string	Unique identification number for this request.
ResolutionDetail	*Duplicate Resolution Detail*	Duplicate resolution detail
ResolutionStatus	string	Status of the request.
ResolutionStatusMessage	string	Reason for ERROR or REJECT status
ResolutionType	string	Type of the request.

Entitlements Service

Contract Entitlements External Service

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/entitlements/service/}ContractsSrvcEntitlementsService

Service WSDL URL: https://servername/fscmService/ContractsSrvcEntitlementsService?WSDL

Logical Business Objects

- CRM
- CRM
- CRM

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Entitlement Matrix Result*
Handles	*Entitlement Output*

Relationship Type	Object or Service
Handles	*Entitlement Input*

Operations

- *getContractEntitlements*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getContractEntitlements

Get Coverage details of a particular asset

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
params	*Entitlement Input*	Entitlement Input Row

Response Payload

Element Name	Type	Description
result	*Entitlement Output*	List of Entitlement Output Rows returned

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.

Element Name	Type	Description
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getContractEntitlements	OKC_VIEW_SERVICE_CONTRACT_ENTITLEMENTS_PRIV	View Service Contract Entitlements	Allows to check service entitlement for a contract.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
OKC_VIEW_SERVICE_CONTRACT_ENTITLEMENTS_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	Contract Management Across All Contracts Web Service	Permits an application using the CRM application ID to manage contracts across all business units.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY	ORA_PON_NEGOTIATION_VIEWING_DUTY	Negotiation Viewing	View the negotiation summary and details pages.

Entitlement Input

Entitlement Input Object

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/entitlements/service/}EntitlementInput

Logical Business Objects

- CRM
- CRM : Enterprise Contracts
- CRM : Enterprise Contracts : Contract Service Coverage

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Entitlements Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AssetId	long	Id of the asset
ChannelCode	string	Channel code of an Entitlement
CustomerPartyId	long	The internal identifier of the customer party (named account/ sales account) who owns the asset.
ServiceRequestReportDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when an SR is reported
SeverityCode	string	Severity COde of an entitlement

Entitlement Matrix Result

Entitlement Result Object

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/entitlements/service/}EntitlementResult

Logical Business Objects

- CRM
- CRM : Enterprise Contracts
- CRM : Enterprise Contracts : Contract Service Coverage

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Entitlement Output*
Handled by	*Entitlements Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CalendarId	decimal	Calendar Id
EntitlementId	long	Id of the Entitlement
EntitlementResultId	long	Entitlement Result Id • Primary Key
ResultName	string	Result Name
ResultThresholdValue	string	Result Threshold Value
ResultValue	string	Result Value

Entitlement Output

Entitlement Output Object

QName: {http://xmlns.oracle.com/apps/contracts/coreAuthoring/entitlements/service/}EntitlementOutput

Logical Business Objects

- CRM
- CRM : Enterprise Contracts
- CRM : Enterprise Contracts : Contract Service Coverage

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Entitlement Matrix Result*
Handled by	*Entitlements Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ChannelCode	string	Channel code
ContractCoverageLineId	long	Contract COverage Line Id
ContractCoverageLineNumber	string	Contract Coverage Line Number
ContractCoverageLineType	string	Contract Coverage Line Type
ContractCoverageProductDescription	string	Contract COverage Product Description
ContractCoverageProductName	string	Contract Coverage Product Name
ContractCoveredAssetCloseDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Contract Covered Asset Close Date
ContractCoveredAssetEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Contract Covered Asset End Date
ContractCoveredAssetId	long	Contract Covered Asset Id
ContractCoveredAssetLineNumber	string	Contract COvered Asset Line Number
ContractCoveredAssetProductDescription	string	Contract Covered Asset Product Description
ContractCoveredAssetProductName	string	Contract Covered Asset Product Name
ContractCoveredAssetStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Contract COvered Asset Start Date
ContractId	long	The internal identifier along with contract version identifies a unique contract.

Name	Type	Description
ContractIntent	string	The Buy or Sell intent of the contract. This will always be Sell.
ContractNumber	string	The alphanumeric key along with contract number modifier, contract type, and contract intent identifies a contract to an end user.
ContractNumberModifier	string	The alphanumeric number that is shown only for a renewal contract.
ContractType	string	The type of the contract.
ContractVersion	long	The version number of the contract.
CoverageDescription	string	Coverage Description
CoverageId	long	Coverage Id
CoverageName	string	Coverage Name
CustomerPartyName	string	Customer Party Name
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	End Date
EntitlementId	long	Entitlement Id • Primary Key
EntitlementResult	*Entitlement Matrix Result*	Entitlement Result Object
EntitlementRuleId	long	Entitlement Rule Id
EntitlementSource	string	Entitlement Source
EntitlementSourceCode	string	Entitlement Source Code
IsContractEntitled	string	If 'Yes' means the contract is entitled, else for 'No', the contract is not entitled as per state model setup for the status of the contract.
MatrixId	long	Matrix Id
Message	string	Additional Message

Name	Type	Description
PriorityCode	string	Priority Code
ServiceRequestId	long	Service Request Id
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Start Date

File Import Activity Service

Service related to file based import activity. This service enables submitting import activity and monitoring the status of the same.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/mktImport/model/}ImportPublicService

Service WSDL URL: https://servername/crmService/ImportPublicService?WSDL

Logical Business Objects

- CRM : Marketing : File Import

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*File Import Activity Status Output Parameters*
Handles	*File Import Activity Log Output Parameters*
Handles	*Import Job Parameters View Object*
Handles	*Name*
Handles	*File Import Activity Output Parameters*
Handles	*Name*
Handles	*Import Job Object Parameters View Object*

Relationship Type	Object or Service
Handles	*Name*
Handles	*File Import Activity Input Parameters*
Handles	*File Import Activity Output Parameters*

Operations

- *getImportActivityLogs*
- *getImportActivityStatus*
- *submitImportActivity*
- *submitSimplifiedImportActivity*
- *getImportActivityLogFiles*
- *submitSimplifiedImportActivityWithParam*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getImportActivityLogs

The method to get the file import activity logs.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
importJobId	long	The unique identifier of the import job.
batchId	long	The unique identifier of the batch for the import job.

Response Payload

Element Name	Type	Description
result	*File Import Activity Log Output Parameters*	The return parameter of the file import activity.

getImportActivityStatus

The method to get the file import activity status.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
importJobId	long	The unique identifier of the import job.

Response Payload

Element Name	Type	Description
result	*File Import Activity Status Output Parameters*	The return parameter of the getImportActivityStatus process.

submitImportActivity

The method to submit the file import activity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
importJobSubmitParam	*File Import Activity Input Parameters*	The input parameters of the file import activity.

Response Payload

Element Name	Type	Description
result	*File Import Activity Output Parameter*	The return parameter of the submitImportActivity process.

submitSimplifiedImportActivity

The method to submit the file import activity with input parameters.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
objectCode	string	The code identifying the object.
inputFileContent	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The content of the input file.

Response Payload

Element Name	Type	Description
result	*Simplified File Import Activity Output Parameter*	The return parameter of the submitSimplifiedImportActivity process.

getImportActivityLogFiles

Process to get the log files. Supports both Zip and non Zip formats.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
importJobId	long	The unique identifier of the import job.
batchId	long	The unique identifier of the batch for the import job.

Response Payload

Element Name	Type	Description
result	*Import Service File*	The return parameter of the getImportActivityLogFiles.

submitSimplifiedImportActivityWithParam

The parameters of the simplified import activity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
inputFileContent	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The content of the input file.
importJobParams	*Import Job Parameters View Object*	The input parameters of the file import activity.
importObjectParams	*Import Job Object Parameters View Object*	The parameters of the import job object.

Response Payload

Element Name	Type	Description
result	*Import Job Parameters View Object*	The return parameter of the submitSimplifiedImportActivityWithParam process.

getDfltObjAttrHints

Service implemented as part of devconnect bug.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	Service implemented as part of devconnect bug.
localeName	string	The locale used when evaluating the locale-based user interface hints. The localeName is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	Service implemented as part of devconnect bug.

getServiceLastUpdateTime

Service implemented as part of devconnect bug.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Service Implemented as part of devconnect bug.

getEntityList

Service implemented as part of devconnect bug.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	Service Implemented as part of devconnect bug.

File Import Activity Input Parameters

Input parameters accepted by the submit import activity process.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/commonMarketing/mktImport/model/}ImportJobSubmitParams

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*File Import Activity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CallListCode	string	The call list code used for file import.

Name	Type	Description
ContentId	string	Stores the UCM File ContentId.
DateFormat	string	The date format used in the records being imported.
Delimiter	string	Indicates the delimiter used in source file.
ErrorThreshold	long	Specifies the error threshold.
FileContent	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The content of the import source file.
FileEcodingMode	string	The file encoding mode used for import source file.
FileFormat	string	The file format used for import source file.
FileName	string	The file name of the import file.
FileTypeCd	string	Stores either xml or csv information.
HeaderRowIncluded	string	Specifies if a header row is included in the source file to be imported.
ImportMode	string	The import mode used for file import.
JobDescription	string	The import job description.
JobName	string	The name of the import job.
LookbackDays	long	The lookback days used for importing records.
MappingNumber	string	The mapping number being used. • Primary Key
Notification	string	Indicates if notification is enabled or not.
TimestampFormat	string	The timestamp format used in the records being imported.

File Import Activity Log Output Parameters

Parameters returned by the get import activity logs process.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/commonMarketing/mktImport/model/}ImportServiceLogs

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*File Import Activity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BatchId	string	The batch Identifier of the import job. • Primary Key
ErrorLogFileContent	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The content of the error log generated by the import process.
ErrorLogFileName	string	The file name of the error log file generated by the import process.
ExceptionLogFileContent	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The content of the exception log generated by the import process.
ExceptionLogFileName	string	The name of the exception log file generated by the import process.
LogFileContent	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The content of the success log generated by the import process.
LogFileName	string	The name of the success log file generated by the import process.

File Import Activity Output Parameter

Parameters returned by the submit import activity process.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/commonMarketing/mktImport/model/}ImportJobReturnParams

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*File Import Activity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
JobId	long	The import job identifier. • Primary Key
Result	string	The result of the import job.

Simplified File Import Activity Output Parameter

Returns response of simplified import web service.

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/mktImport/model/}SimplifiedImportJobReturnParams

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*File Import Activity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
FailureCause	string	The failure cause.
JobId	long	The job identifier of the import activity. • Primary Key
ObjectCode	string	The object code.
Status	string	The status of the record.
SubmitTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The creation time of the import activity.
SubmittedBy	string	The user who created the import activity.

File Import Activity Status Output Parameters

Parameters returned by the get import activity status process.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/commonMarketing/mktImport/model/}ImportServiceReturnParams

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*File Import Activity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BatchId	long	The import batch identifier.

Name	Type	Description
		• Primary Key
FormatErrors	long	The number of formatting errors encountered during the import process.
LoadDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the imported records are loaded.
LoadErrors	long	The number of loading errors encountered during the import process.
RecordReadFromFile	long	The number of records read from the file during import.
Status	string	The status of the record.
SuccessfullyLoaded	long	The number of successfully loaded records during the import process.

Import Job Object Parameters View Object

Contains the object parameters.

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/mktImport/model/}ImportObjectParam

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*File Import Activity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ObjectName	string	The object name.
ParamName	string	The parameter name.

Name	Type	Description
		• Primary Key
ParamType	string	The parameter type.
ParamValue	string	The parameter value.

Import Job Parameters View Object

Contains the name value pairs.

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/mktImport/model/}ImportParam

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*File Import Activity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Name	string	The name of the parameter. • Primary Key
Value	string	The value of the parameter.

Import Service File

The Import Service File view object.

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/mktImport/model/}ImportServiceFiles

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Name*
Handled by	*File Import Activity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Files	*Import Service File Tag*	The files tag view link.

Import Service File Tag

The Import Service File Tag view object.

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/mktImport/model/}ImportServiceFileTag

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Name*
Contained by	*Import Service File*
Handled by	*File Import Activity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
File	*Import Service File Detail*	The file tag.

Import Service File Detail

The Import Service Details view object.

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/mktImport/model/}ImportServiceFileDetails

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Import Service File Tag*
Handled by	*File Import Activity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
FileContent	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The response file content.
FileExtension	string	The response file extension.
FileType	string	The response file type.
Name	string	The response file name.

Incentive Compensation Calendar Period Status

Service to retrieve the current status of an incentive compensation calendar period. You can also use the service to close the calendar period. To close the period, payment batches must be paid and prior periods must not have a status of Not Opened, Future Entry, or Open.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/systemSetup/calendarService/}PeriodStatusService

Service WSDL URL: https://servername/fscmService/IncentivePeriodStatusService?WSDL

Logical Business Objects

- IC : Incentive Compensation : Incentive Compensation Calendar

Operations

- *getPeriodStatus*
- *closePeriod*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getPeriodStatus

Gets the period status for a given calendar period and business unit.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	The business unit to which the calendar belongs. You assign a calendar to your business unit using the Setup and Maintenance, Manage Parameters task.
periodName	string	The calendar period name. You define period names for your calendar using the Setup and Maintenance, Manage Calendars task.

Response Payload

Element Name	Type	Description
result	string	The status of the period.

closePeriod

Closes the calendar period for a business unit.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	The business unit to which the calendar belongs. You assign a calendar to your business unit using the Setup and Maintenance, Manage Parameters task.
periodName	string	The calendar period name. You define period names for your calendar using the Setup and Maintenance, Manage Calendars task.

Response Payload

Element Name	Type	Description
result	string	The request ID of the close period process.

getDfltObjAttrHints

Gets user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.

Element Name	Type	Description
localeName	string	The locale to use when evaluating the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Gets the date and time for when the schema files, referenced in the service definition, last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The payload output date and time for when the schema files, referenced in the service definition, last changed.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	CN_CONFIGURE_INCENTIVE_COMPENSATION_TABLES_AND_COLUMNS_PRIV	Configure Incentive Compensation Tables and Columns	Allows configuration of tables and columns required for incentive compensation processing.
All Operations	CN_REGISTER_INCENTIVE_COMPENSATION_PARTICIPANT_PRIV	Register Incentive Compensation Participant	Allows import of incentive compensation participant, a person or organization. For example, an employee, salesperson, party, supplier contract, partner, or third party resale contractor whose data and payments the incentive compensation application computes and manages.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_CONFIGURE_INCENTIVE_COMPENSATION_TABLES_AND_COLUMNS_PRIV	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
CN_CONFIGURE_INCENTIVE_COMPENSATION_TABLES_AND_COLUMNS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ADMINISTRATOR_JOB	Incentive Compensation Application Administrator	Set up incentive compensation application
CN_REGISTER_INCENTIVE_COMPENSATION_PARTICIPANT_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
CN_REGISTER_INCENTIVE_COMPENSATION_PARTICIPANT_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ADMINISTRATOR_JOB	Incentive Compensation Application Administrator	Set up incentive compensation application

Incentive Compensation Credit Rule

Service to create, retrieve, delete, and update credit rules. This includes credit rule criteria and credit receivers.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/creditRuleService/}CreditRuleService

Service WSDL URL: https://servername/fscmService/CreditRuleService?WSDL

Logical Business Objects

- IC : Incentive Compensation : Incentive Compensation Credit Rule

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Incentive Compensation Credit Rule SDO*
Handles	*Incentive Compensation Credit Rule Attribute SDO*
Handles	*Incentive Compensation Credit Rule Translation SDO*
Handles	*Incentive Compensation Credit Rule Attribute Value SDO*
Handles	*Incentive Compensation Credit Rule Participant SDO*

Operations

- *getRuleStats*
- *getRuleAttribute*
- *createRuleAttribute*
- *updateRuleAttribute*
- *deleteRuleAttribute*
- *findRuleAttribute*
- *processRuleAttribute*
- *getRuleAssignment*

- *createRuleAssignment*
- *updateRuleAssignment*
- *deleteRuleAssignment*
- *findRuleAssignment*
- *processRuleAssignment*
- *getRuleAttributeValue*
- *createRuleAttributeValue*
- *updateRuleAttributeValue*
- *deleteRuleAttributeValue*
- *findRuleAttributeValue*
- *processRuleAttributeValue*
- *getRule*
- *createRule*
- *updateRule*
- *deleteRule*
- *findRule*
- *findRuleByRuleName*
- *processRule*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getRuleStats

Method to analyze and gather the overall statistics of all Rule related data such as, Rule, Rule Attributes, Rule Attribute Values and Rule Assignments

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	void	No return object

getRuleAttribute

Gets a single rule attribute that matches the specified unique rule attribute identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
ruleAttributeId	long	The unique identifier of the rule attribute.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule Attribute*	The rule attribute that matches the specified criteria.

createRuleAttribute

Creates a single rule attribute.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
ruleAttribute	*Incentive Compensation Credit Rule Attribute*	The input payload for the rule attribute to be created.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule Attribute*	The created rule attribute.

updateRuleAttribute

Updates a single rule attribute.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
ruleAttribute	*Incentive Compensation Credit Rule Attribute*	The input payload for the rule attribute to be updated.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule Attribute*	The updated rule attribute.

deleteRuleAttribute

Deletes a single rule attribute.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
ruleAttribute	*Incentive Compensation Credit Rule Attribute*	The input payload for the rule attribute to be deleted.

Response Payload

Element Name	Type	Description
result	void	No return object.

findRuleAttribute

Finds and returns a list of rule attributes based on a query statement.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The input payload criteria used to find the rule attributes.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The control object used as a placeholder for finding credit rules. Not currently used.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule Attribute*	The list of rule attributes that match the specified criteria.

processRuleAttribute

Performs a create, update, delete or merge operation on a list of rule attributes. The specified operation is applied to all objects in the given list.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The create, update, delete, or merge operation to perform.
ruleAttribute	*Incentive Compensation Credit Rule Attribute*	The list of rule attributes for which the specified operation was applied.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The object of type ProcessControl, which provides optional process control.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule Attribute*	The list of rule attributes for which the specified operation was applied.

getRuleAssignment

Gets a single rule assignment that matches the specified unique rule assignment identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
ruleAssignmentId	long	The unique identifier of the rule assignment.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule Participant*	The rule assignment that matches the specified criteria.

createRuleAssignment

Creates a single rule assignment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
ruleAssignment	*Incentive Compensation Credit Rule Participant*	The input payload for the rule assignment to be created.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule Participant*	The created rule assignment.

updateRuleAssignment

Updates a single rule assignment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
ruleAssignment	*Incentive Compensation Credit Rule Participant*	The input payload for the rule assignment to be updated.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule Participant*	The updated rule assignment.

deleteRuleAssignment

Deletes a single rule assignment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
ruleAssignment	*Incentive Compensation Credit Rule Participant*	The input payload for the rule assignment to be deleted.

Response Payload

Element Name	Type	Description
result	void	No return object.

findRuleAssignment

Finds and returns a list of rule assignments based on a query statement.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The input payload criteria used to find the rule assignments.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The control object used as a placeholder for finding credit rules. Not currently used.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule Participant*	The list of rule assignments that match the specified criteria.

processRuleAssignment

Performs a create, update, delete or merge operation on a list of rule assignments. The specified operation is applied to all objects in the given list.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The create, update, delete, or merge operation to perform.
ruleAssignment	*Incentive Compensation Credit Rule Participant*	The list of rule assignments for which the specified operation was applied.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The object of type ProcessControl, which provides optional process control.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule Participant*	The list of rule assignments for which the specified operation was applied.

getRuleAttributeValue

Gets a single rule attribute value that matches the specified unique rule attribute value identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
ruleAttrValueId	long	The unique identifier of the attribute value.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule Attribute Value*	The rule attribute value that matches the specified criteria.

createRuleAttributeValue

Creates a single rule attribute value.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
ruleAttributeValue	*Incentive Compensation Credit Rule Attribute Value*	The input payload for the rule attribute value to be created.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule Attribute Value*	The created rule attribute value.

updateRuleAttributeValue

Updates a single rule attribute value.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
ruleAttributeValue	*Incentive Compensation Credit Rule Attribute Value*	The input payload for the rule attribute value to be updated.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule Attribute Value*	The updated rule attribute value.

deleteRuleAttributeValue

Deletes a single rule attribute value.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
ruleAttributeValue	*Incentive Compensation Credit Rule Attribute Value*	The input payload for the rule attribute value to be deleted.

Response Payload

Element Name	Type	Description
result	void	No return object.

findRuleAttributeValue

Finds and returns a list of rule attribute values based on a query statement.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The input payload criteria used to find the rule attribute values.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The control object used as a placeholder for finding credit rules. Not currently used.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule Attribute Value*	The list of rule attribute values that match the specified criteria.

processRuleAttributeValue

Performs a create, update, delete or merge operation on a list of rule attribute values. The specified operation is applied to all objects in the given list.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The create, update, delete, or merge operation to perform.
ruleAttributeValue	*Incentive Compensation Credit Rule Attribute Value*	The list of rule attribute values for which the specified operation was applied.

Element Name	Type	Description
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The object of type ProcessControl, which provides optional process control.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule Attribute Value*	The list of rule attribute values for which the specified operation was applied.

getRule

Gets a single rule that matches the specified unique rule identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
ruleId	long	The unique identifier of the rule.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule*	The rule that matches the specified criteria.

createRule

Creates a single rule.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
rule	*Incentive Compensation Credit Rule*	The input payload for the rule to be created.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule*	The created rule.

updateRule

Updates a single rule.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
rule	*Incentive Compensation Credit Rule*	The input payload for the rule to be updated.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule*	The updated rule.

deleteRule

Deletes a single rule.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
rule	*Incentive Compensation Credit Rule*	The input payload for the rule to be deleted.

Response Payload

Element Name	Type	Description
result	void	No return object.

findRule

Finds and returns a list of rules based on a query statement.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The input payload criteria used to find the rules.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The control object used as a placeholder for finding credit rules. Not currently used.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule*	The list of rules that match the specified criteria.

findRuleByRuleName

Finds a rule by the rule name.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The input payload criteria used to find a rule by the rule name.
RuleName	string	The rule name.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The control object used as a placeholder for finding credit rules. Not currently used.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule*	The list of rules that match the specified criteria.

processRule

Performs a create, update, delete or merge operations on a list of rules. The specified operation is applied to all objects in the given list.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The create, update, delete, or merge operation to perform.
rule	*Incentive Compensation Credit Rule*	The list of rules for which the specified operation was applied.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The object of type ProcessControl, which provides optional process control.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Credit Rule*	The list of rules for which the specified operation was applied.

getDfltObjAttrHints

Gets user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Gets the date and time for when the schema files, referenced in the service definition, last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	CN_REVIEW_INCENTIVE_COMPENSATION_CLASSIFICATION_RULE_HIERARCHY_PRIV	Review Incentive Compensation Classification Rule Hierarchy	Allows review of rule hierarchy used by incentive compensation to classify sales transactions into user-defined credit categories.
All Operations	CN_MANAGE_INCENTIVE_COMPENSATION_TEAM_PRIV	Manage Incentive Compensation Team	Allows maintenance of incentive compensation teams used in determining incentive compensation credit receivers.
All Operations	CN_MANAGE_INCENTIVE_COMPENSATION_CLASSIFICATION_RULE_HIERARCHY_PRIV	Manage Incentive Compensation Classification Rule Hierarchy	Allows maintenance of rule hierarchy used to classify sales transactions into user-defined credit categories of business revenue.
All Operations	CN_MANAGE_INCENTIVE_COMP_ROLLUP_GROUP_PRIV	Manage Incentive Compensation Rollup Group	Allows maintenance of incentive compensation groups used to determine who receives rollup credits.
All Operations	CN_MANAGE_INCENTIVE_COMPENSATION_CREDIT_RULE_PRIV	Manage Incentive Compensation Credit Rule	Allows maintenance of rule criteria used to determine who receives incentive compensation credit.
All Operations	CN_REVIEW_INCENTIVE_COMPENSATION_ROLLUP_GROUP_PRIV	Review Incentive Compensation Rollup Group	Allows review of rollup group hierarchy used to determine who receives incentive compensation rollup credits.
All Operations	CN_REVIEW_INCENTIVE_COMPENSATION_CREDIT_RULE_PRIV	Review Incentive Compensation Credit Rule	Allows maintenance of assignment to credit rules used to determine who receives incentive compensation credit.
All Operations	CN_CREATE_INCENTIVE_COMPENSATION_TEAM_PRIV	Create Incentive Compensation Team	Allows creation of teams used in determining incentive compensation credit receivers.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_MANAGE_INCENTIVE_COMPENSATION_CLASSIFICATION_RULE_HIERARCHY_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	Incentive Compensation Plan Administrator	Configure and manage incentive plans, plan components, and classification rules
CN_CREATE_INCENTIVE_COMPENSATION_TEAM_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			to compensation and payment plans as well as pay groups
CN_MANAGE_INCENTIVE_COMP_ROLLUP_GROUP_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
CN_MANAGE_INCENTIVE_COMPENSATION_CREDIT_RULE_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
CN_MANAGE_INCENTIVE_COMPENSATION_TEAM_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.
ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups

Incentive Compensation Credit Rule Attribute

The input payload service data object to create and manage credit rule qualifying criteria attributes. The attributes must be enabled for crediting using the Setup and Maintenance, Configure Tables and Columns task. When the attribute is based on a descriptive flex field, define and deploy the flex field and then define the attribute as a custom qualifier using the Setup and Maintenance, Manage Custom Rule Qualifiers task.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/creditRuleService/}RuleAttribute

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Credit Rule*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttrUsageId	long	The unique identifier for the attribute usage record.
Attribute1	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute10	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute11	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute12	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute13	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute14	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute15	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute2	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute3	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute4	string	The user-definable descriptive flex field for a character data type value. Not currently used.

Name	Type	Description
Attribute5	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute6	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute7	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute8	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute9	string	The user-definable descriptive flex field for a character data type value. Not currently used.
AttributeCategory	string	The context segment for the descriptive flex field. Not currently used.
OrgId	long	The unique identifier of the business unit record.
RuleAttributeId	long	The unique identifier for the rule attribute record. • Primary Key
RuleId	long	The unique identifier for the associated rule record.

Incentive Compensation Credit Rule Attribute Value

The input payload service data object to create and manage credit rule qualifying criteria attribute values. For example, the qualifying attributes values equal to Invoice and Chargeback for the attribute Transaction Type.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/creditRuleService/}RuleAttributeValue

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Credit Rule*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Attribute1	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute10	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute11	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute12	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute13	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute14	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute15	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute2	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute3	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute4	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute5	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute6	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute7	string	The user-definable descriptive flex field for a character data type value. Not currently used.

Name	Type	Description
Attribute8	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute9	string	The user-definable descriptive flex field for a character data type value. Not currently used.
AttributeCategory	string	The context segment for the descriptive flex field. Not currently used.
ComparisonOperator	string	The lookup code that represents the comparison operator. The operator indicate how the attribute values are considered for rule evaluation. For example, EQUAL_TO, BETWEEN, and LIKE.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
FirstChar	string	The first character of the minimum alphanumeric value criteria, used for attributes with a character data type. For example, the value "B" for an attribute value of "Brand A".
FirstValueId	long	A unique identifier generated by Oracle for use by the rule processing.
FourthValueId	long	A unique identifier generated by Oracle for use by the rule processing.
HighValueChar	string	The maximum alphanumeric value for the qualifying criteria attribute, used for attributes with a character data type and the BETWEEN operator.
HighValueNumber	long	The maximum numeric value for the qualifying criteria, used for attributes with a number data type and the BETWEEN operator.
LowValueChar	string	The minimum alphanumeric value for the qualifying criteria attribute, used for attributes with a character data type. For example, the value "Brand A" for a product attribute and the LIKE comparison operator.
LowValueCharCode	string	A unique code generated by Oracle for use by the rule processing.
LowValueCharId	long	The unique record identifier for the minimum alphanumeric value for the qualifying criteria

Name	Type	Description
		attribute, used for attributes of type character. For example, the value ID "10003890" for the inventory item Brand A Appliances.
LowValueNumber	long	The minimum numeric value for the qualifying criteria, used for attributes with a number data type.
OrgId	long	The unique identifier of the business unit record.
RuleAttrValueId	long	The unique identifier for the rule attribute value record. • Primary Key
RuleAttributeId	long	The unique identifier for the associated rule attribute record.
SecondValueId	long	A unique identifier generated by Oracle for use by the rule processing.
ThirdValueId	long	A unique identifier generated by Oracle for use by the rule processing.

Incentive Compensation Credit Rule Participant

The input payload service data object to manage rule credit receivers. The credits are generated for the credit receivers when the transaction meets the rule qualifying criteria. For example, the participant, John, is the credit receiver when the transaction product matches the rule qualifying criteria for the product attribute.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/creditRuleService/}RuleAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Credit Rule*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AssignedObjectId	long	The unique identifier of the credit receiver rule assignment record.
AssignedObjectType	string	The lookup code that represents the assigned object type. The code value INDIVIDUAL indicates a participant is specified. The code value PARTICIPANT_ON_TXN indicates the direct participant on the transaction is the credit receiver.
Attribute1	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute10	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute11	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute12	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute13	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute14	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute15	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute2	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute3	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute4	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute5	string	The user-definable descriptive flex field for a character data type value. Not currently used.

Name	Type	Description
Attribute6	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute7	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute8	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute9	string	The user-definable descriptive flex field for a character data type value. Not currently used.
AttributeCategory	string	The context segment for the descriptive flex field. Not currently used.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
GroupMemberCreditFlag	boolean	Indicates whether the participant will receive rollup credit from direct credit receivers in the group or groups lower in the hierarchy. Valid values are: Y,N.
OrgId	long	The unique identifier of the business unit record.
RevenueType	string	Lookup code that represents the revenue type, such as REVENUE or NONREVENUE.
RoleId	long	The unique identifier for the role record.
RollupFlag	boolean	A value that indicates whether to roll up the direct credits of the credit receiver to every individual on the parent rules in the rule hierarchy. Valid values are: Y,N.
RuleAssignmentId	long	The unique identifier for the rule credit receiver assignment record. • Primary Key
RuleId	long	The unique identifier for the associated rule record.
SplitPct	decimal	The percentage applied against the transaction amount to calculate the credit amount.

Name	Type	Description
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
SummaryFlag	boolean	Indicates whether to summarize the direct credits rolled up to an individual. Valid values are: Y,N.

Incentive Compensation Credit Rule

The input payload service data object to create and manage the credit rule and the rule position in the credit rule hierarchy.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/creditRuleService/}Rule

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Incentive Compensation Credit Rule Translation SDO*
Handled by	*Incentive Compensation Credit Rule*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AbsoluteRank	long	The absolute position of this rule in the hierarchy.
AttrRelationProduct	decimal	A field not currently used.
Attribute1	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute10	string	The user-definable descriptive flex field for a character data type value. Not currently used.

Name	Type	Description
Attribute11	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute12	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute13	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute14	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute15	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute2	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute3	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute4	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute5	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute6	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute7	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute8	string	The user-definable descriptive flex field for a character data type value. Not currently used.
Attribute9	string	The user-definable descriptive flex field for a character data type value. Not currently used.
AttributeCategory	string	The context segment for the descriptive flex field. Not currently used.
Description	string	The free text description of the record.
EnabledFlag	boolean	The enable indicator used to determine whether to include this rule, and any child rules, when processing rules.

Name	Type	Description
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
Name	string	The credit rule name, used to identify the rule.
NumberAttr	long	The number of rule attributes.
NumberWinners	long	The number of winners to designate how many credit rules can win when the application evaluates each transaction during the crediting process.
OrgId	long	The unique identifier of the business unit record.
ParentRuleId	long	The unique identifier for the rule parent record.
Rank	long	The rank used to break ties between winning rules. The highest rank (lowest number) wins against lowest rank (highest number).
RelativeRank	long	The rule rank position in relation to another rule.
RuleId	long	The unique identifier for the rule record. • Primary Key
RuleNumber	string	The public unique identifier
RuleTranslationAccessor	*Incentive Compensation Credit Rule Translation*	The view link access to the translation records.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
UsageId	long	The unique identifier of the rule usage record.

Incentive Compensation Credit Rule Translation

The input payload service data object for the translatable attributes of the rule.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/creditSetup/creditRule/creditRuleService/}RuleTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Incentive Compensation Credit Rule*
Handled by	*Incentive Compensation Credit Rule*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Description	string	The free text description of the record.
Language	string	The language into which the rule name and description are translated. The value must exist in the FND_LANGUAGES table. View existing languages using the Setup and Maintenance, Manage ISO Languages task. • Primary Key
Name	string	The credit rule name in the specified language.
RuleId	long	The unique identifier for the associated rule record. • Primary Key
SourceLanguage	string	The source language for the translated name and description. If providing a value, the value must exist in the FND_LANGUAGES table. View existing languages using the Setup and Maintenance, Manage ISO Languages task.

Incentive Compensation Dispute Request

Service to create, retrieve, and update incentive compensation disputes. A dispute can be related to an incentive compensation paysheet, credit, or calculated earning, as well as transactions for which the participant did not receive credit.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/disputeManagement/disputeService/}DisputeService

Service WSDL URL: https://servername/fscmService/DisputeService?WSDL

Logical Business Objects

- IC : Incentive Compensation : Incentive Compensation Dispute

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Incentive Compensation Get Dispute SDO*
Handles	*Incentive Compensation Dispute Request SDO*

Operations

- *getAssigneesList*
- *approveDisputeWithResolutionOnBehalfOf*
- *approveDisputeOnBehalfOf*
- *rejectDisputeWithResolutionOnBehalfOf*
- *rejectDisputeOnBehalfOf*
- *initMOAC*
- *submitRequestedInformation*
- *reassignTasksonBehalfOf*
- *getUserComments*
- *delegateTaskonBehalfOf*
- *createDispute*
- *updateDispute*

- *getDispute*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getAssigneesList

Gets the list of assignees for the tasks related to a single dispute that matches the specified unique dispute identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
disputeId	string	The unique identifier of the dispute human task instance.

Response Payload

Element Name	Type	Description
result	string	The list of assignees for the dispute task that matches the specified criteria. The list is in the <UserId> | <User Name> format.

approveDisputeWithResolutionOnBehalfOf

Approves the task for the specified dispute and user. The task should be in Assigned state and Assigned to the user. The dispute resolution can also be provided using this method.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
disputeId	string	The unique identifier of the dispute human task instance.
user	string	The identifier of the user for whom the approval is on behalf of. The user identifier can be obtained from the getAssigneesList method.
resolution	string	The lookup code that represents the dispute resolution. Valid lookup codes for lookup type CN_DISPUTE_RESLN_TYPE can be reviewed using the Setup and Maintenance, Manage Incentive Compensation Lookups task.

Element Name	Type	Description
comments	string	The comments for the approval.

Response Payload

Element Name	Type	Description
result	string	Returns SUCCESS if the dispute approval is successful.

approveDisputeOnBehalfOf

Approves the task for the specified dispute and user. The task should be in Assigned state and Assigned to the user.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
disputeId	string	The unique identifier of the dispute human task instance.
user	string	The identifier of the user for whom the approval is on behalf of. The user identifier can be obtained from the getAssigneesList method.
comments	string	The comments for the approval.

Response Payload

Element Name	Type	Description
result	string	Returns SUCCESS if the dispute approval is successful.

rejectDisputeWithResolutionOnBehalfOf

Rejects the task for the specified dispute and user. The task should be in Assigned state and Assigned to the user. The dispute resolution can also be provided using this method.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
disputeId	string	The unique identifier of the dispute human task instance.
user	string	The identifier of the user for whom the rejection is on behalf of. The user identifier can be obtained from the getAssigneesList method.
resolution	string	The lookup code that represents the dispute resolution. Valid lookup codes for lookup type CN_DISPUTE_RESLN_TYPE can be reviewed using the Setup and Maintenance, Manage Incentive Compensation Lookups task.
comments	string	The comments for the rejection.

Response Payload

Element Name	Type	Description
result	string	Returns SUCCESS if the dispute rejection is successful.

rejectDisputeOnBehalfOf

Rejects the task for the specified dispute and user. The task should be in Assigned state and Assigned to the user.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
disputeId	string	The unique identifier of the dispute human task instance.
user	string	The identifier of the user for whom the rejection is on behalf of. The user identifier can be obtained from the getAssigneesList method.
comments	string	The comments for the rejection.

Response Payload

Element Name	Type	Description
result	string	Returns SUCCESS if the dispute rejection is successful.

initMOAC

Initializes the business unit context.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
privName	string	Name of the privilege with which to initialize the business unit context.

Response Payload

Element Name	Type	Description
result	void	No return object.

submitRequestedInformation

Submits the request for information for a dispute.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
disputeId	string	The unique identifier of the dispute human task instance.
user	string	The identifier of the user for whom the request for more information is from. The user identifier can be obtained from the getAssigneesList method.
comments	string	The comments for the request for more information.

Response Payload

Element Name	Type	Description
result	string	Returns SUCCESS if the dispute request for more information is successful.

reassignTasksonBehalfOf

Method to reassign a particular task associated with the disputeId (parameter) and assigned to the user (parameter - currentUser). The task should be in ASSIGNED state and assigned to the user. User Type can also be provided using this method.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
disputeId	string	DisputeId which is associated with the Human Tasks
currentUser	string	User obtained from the getAssigneesList method
newUser	string	New User to which the task has to be reassigned.
type	string	The type of new User. The type can be one of the following values 1. user 2. group 3. role

Response Payload

Element Name	Type	Description
result	string	Returns a message if the task for the specific dispute Id is successfully reassigned

getUserComments

Method to get the User Comments for the tasks related to the dispute with the specified disputeId

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
disputeId	string	DisputeId which is associated with the Human Tasks

Response Payload

Element Name	Type	Description
result	string	User Comments List for the tasks related to the dispute with the specified disputeId. This will be a list of strings where each string will be of the format '<Time> | <User Name>|<Comment>'.

delegateTaskonBehalfOf

Method to delegate a particular task associated with the disputeId (parameter) and assigned to the user (parameter - currentUser). The task should be in ASSIGNED state and assigned to the user.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
disputeId	string	DisputeId which is associated with the Human Tasks
currentUser	string	User obtained from the getAssigneesList method
newUser	string	New User to which the task has to be delegated.

Response Payload

Element Name	Type	Description
result	string	Returns a message if the task for the specific dispute Id is successfully reassigned

createDispute

Creates a single dispute.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
disputeP	*Incentive Compensation Dispute Request*	The input payload for the dispute to be created.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Dispute Request*	The created dispute.

updateDispute

Updates a single dispute.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
disputeP	*Incentive Compensation Dispute Request*	The input payload for the dispute to be updated.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Dispute Request*	The updated dispute.

getDispute

Gets a single dispute that matches the specified unique dispute identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
disputeId	long	The unique identifier of the dispute human task instance.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Get Dispute*	The dispute that matches the specified criteria.

getDfltObjAttrHints

Gets user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Gets the date and time for when the schema files, referenced in the service definition, last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	CN_MANAGE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	Manage Incentive Compensation Dispute	Allows analysis of incentive compensation disputes.
All Operations	CN_MAINTAIN_INCENTIVE_COMPENSATION_PARTICIPANT_DETAIL_PRIV	Maintain Incentive Compensation Participant Detail	Allows assignment of participants to analysts, who manage incentive compensation details for a person or organization whose credits, attainment, earnings, disputes, and payments the incentive compensation application computes and manages. A person or organization can be an employee, salesperson, party, supplier contract, partner, or third party resale contractor.
All Operations	CN_CREATE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	Create Incentive Compensation Dispute	Allows creation of dispute over incentive compensation credits,

Operation Name	Privilege Code	Privilege Name	Privilege Description
			earnings, payments, and goals for participant.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_MAINTAIN_INCENTIVE_COMPENSATION_PARTICIPANT_DETAIL_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_PLAN_MANAGEMENT_DUTY	Incentive Compensation Participant Snapshot Management	Assign and maintain incentive plans and transactions for participants
CN_CREATE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_MANAGER_ABSTRACT	Incentive Compensation Participant Manager	Manage participants who receive incentive compensation and review reports
CN_CREATE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_ABSTRACT	Incentive Compensation Participant	Receive incentive compensation computed by the application and review reports
CN_CREATE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
CN_CREATE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
CN_CREATE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
CN_MANAGE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_MANAGER_ABSTRACT	Incentive Compensation Participant Manager	Manage participants who receive incentive compensation and review reports
CN_MANAGE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_PLAN_MANAGEMENT_DUTY	Incentive Compensation Participant Snapshot Management	Assign and maintain incentive plans and transactions for participants
CN_MANAGE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			quota management, and managing sales forecasts for the territory.
CN_MANAGE_INCENTIVE_ COMPENSATION_DISPUTE_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_ AUTHORING_DUTY	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_CN_INCENTIVE_ COMPENSATION_PARTICIPANT_ MANAGER_ABSTRACT	ORA_CN_INCENTIVE_ COMPENSATION_PARTICIPANT_ ABSTRACT	Incentive Compensation Participant	Receive incentive compensation computed by the application and review reports
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY_FSCM	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY_FSCM	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY_FSCM	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY_FSCM	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR_FSCM	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR_FSCM	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR_FSCM	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY_FSCM	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY_FSCM	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY_FSCM	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY_FSCM	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY_FSCM	Territory Management	Manages sales territories, territory proposals, and quotas.

Incentive Compensation Dispute Request

The input payload service data object to create and update a dispute.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/disputeManagement/disputeService/}DisputeP

Logical Business Objects

- IC : Incentive Compensation : Incentive Compensation Dispute

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Dispute Request*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActualValue	decimal	The actual amount.
Attachment	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The attached file stored as binary data.
AttachmentName	string	The name of the file attached to the dispute.
BusinessUnit	string	The business unit name.
ClosedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the dispute is considered closed.
Comment	string	The comments for the dispute update.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Customer	string	The customer name that is relevant to the dispute.
CustomerId	long	The unique identifier for the customer that is relevant to the dispute.

Name	Type	Description
DisputeDescription	string	Text entered to describe the dispute.
DisputeId	long	The unique identifier for the dispute record. • Primary Key
DisputeJustification	string	Text entered to justify the dispute.
DisputeName	string	Text entered to summarize the dispute. Used as the dispute notification abstract.
DisputeType	string	The lookup code that represents the dispute type, such as INCORRECT_PAYMENT or INCORRECT_CREDIT. The value must be a valid lookup code for lookup type CN_DISPUTE_TYPE. You can view lookup CN_DISPUTE_TYPE from the Setup and Maintenance, Manage Incentive Compensation Lookups task.
DisputeTypeMeaning	string	The lookup code meaning that represents the dispute type, such as missing transaction or incorrect payment adjustment. The value must be a valid lookup code meaning for lookup type CN_DISPUTE_TYPE. You can view lookup CN_DISPUTE_TYPE from the Setup and Maintenance, Manage Incentive Compensation Lookups task.
ExpectedValue	decimal	The expected amount.
InventoryItemId	long	The unique identifier for the inventory item or product that is relevant to the dispute.
Item	string	The name for the inventory item or product that is relevant to the dispute.
MeasureType	string	The measure type for the transaction quantity.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgId	long	The unique identifier of the business unit record. You can view the business unit identifier for a business unit from the Setup and Maintenance, Define Business Units task. (In the search results region, click the View menu to add the Business Unit ID column.) The

Name	Type	Description
		Incentive Compensation parameters must be defined for the business unit. You can define the parameters for the business unit scope using the Setup and Maintenance, Manage Parameters task.
ParticipantId	long	The unique record identifier for the participant for whom the dispute is for. You can view the participant identifier from the Participant Snapshot work area, Select Participant search results. You can also use the participant export web service.
ParticipantName	string	The participant name for whom the dispute is for.
PaymentAdjustmentType	string	The lookup code that represents the payment adjustment type for the payment adjustment that is relevant to the dispute. The value must be a valid lookup code for lookup type CN_PAYMENT_ADJUSTMENT_TYPE. You can view lookup CN_PAYMENT_ADJUSTMENT_TYPE from the Setup and Maintenance, Manage Incentive Compensation Lookups task.
PaymentAdjustmentTypeMeaning	string	The lookup code meaning that represents the payment adjustment type for the payment adjustment that is relevant to the dispute. The value must be a valid lookup code meaning for lookup type CN_PAYMENT_ADJUSTMENT_TYPE. You can view lookup CN_PAYMENT_ADJUSTMENT_TYPE from the Setup and Maintenance, Manage Incentive Compensation Lookups task.
PeriodId	long	The unique period number within a calendar, for the period in which the relevant event occurred.
PeriodName	string	The period name within a calendar, for the period in which the relevant event occurred.
PlanComponentName	string	The plan component name that is relevant to the dispute.
PrimaryParticipantId	long	The unique record identifier for the participant identified as the primary participant on the relevant transaction. You can view the participant identifier from the Participant Snapshot work area, Select Participant search results. You can also use the participant export web service.

Name	Type	Description
PrimaryParticipantName	string	The participant name for the participant identified as the primary participant on the relevant transaction.
RequestorParticipantId	long	The unique record identifier for the participant requesting the dispute. You can view the participant identifier from the Participant Snapshot work area, Select Participant search results. You can also use the participant export web service.
SourceEventDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The event date that is relevant to the dispute.
SourceTrxNumber	string	The transaction number for the transaction that is relevant to the dispute.
TaskId	long	The unique identifier for the human task record.
TransactionAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The transaction amount that is relevant to the dispute.
TransactionQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The transaction quantity that is relevant to the dispute.
TransactionType	string	The lookup code that represents the transaction type, such as INVOICE or ORDER, for the transaction that is relevant to the dispute. The value must be a valid lookup code for lookup type CN_TP_TRANSACTION_TYPE. You can view lookup CN_TP_TRANSACTION_TYPE from the Setup and Maintenance, Manage Incentive Compensation Lookups task.
TransactionTypeMeaning	string	The lookup code meaning that represents the transaction type, such as invoice or order, for the transaction that is relevant to the dispute. The value must be a valid lookup code meaning for lookup type CN_TP_TRANSACTION_TYPE. You can view lookup CN_TP_TRANSACTION_TYPE from the Setup and Maintenance, Manage Incentive Compensation Lookups task.

Incentive Compensation Get Dispute

The input payload service data object to retrieve dispute details.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/disputeManagement/disputeService/}GetDisputeP

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Dispute Request*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActualValue	decimal	The actual amount.
Attachment	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The attached file stored as binary data.
AttachmentName	string	The name of the file attached to the dispute.
ClosedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the dispute is considered closed.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerId	long	The unique identifier for the customer that is relevant to the dispute.
DisputeDescription	string	Text entered to describe the dispute.
DisputeId	long	The unique identifier for the dispute record. • Primary Key
DisputeJustification	string	Text entered to justify the dispute.
DisputeName	string	Text entered to summarize the dispute. Used as the dispute notification abstract.
DisputeStatus	string	The lookup code that represents the dispute status, such as new, approved, or rejected.

Name	Type	Description
DisputeType	string	The lookup code that represents the dispute type, such as INCORRECT_PAYMENT or INCORRECT_CREDIT. The value must be a valid lookup code for lookup type CN_DISPUTE_TYPE. You can view lookup CN_DISPUTE_TYPE from the Setup and Maintenance, Manage Incentive Compensation Lookups task.
ExpectedValue	decimal	The expected amount.
InventoryItemId	long	The unique identifier for the inventory item or product that is relevant to the dispute.
MeasureType	string	The measure type for the transaction quantity.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgId	long	The unique identifier of the business unit record.
ParticipantId	long	The unique identifier for the participant record, the participant for whom the dispute is for.
PaymentAdjustmentType	string	The lookup code that represents the payment adjustment type for the payment adjustment that is relevant to the dispute.
PeriodId	long	The unique period number within a calendar, for the period in which the relevant event occurred.
PlanComponentName	string	The plan component name that is relevant to the dispute.
PrimaryParticipantId	long	The unique identifier for the participant record, the participant identified as the primary participant on the relevant transaction.
RequestorParticipantId	long	The unique identifier for the participant requesting the dispute.
ResolutionCode	string	The lookup code that represents the dispute resolution.

Name	Type	Description
SourceEventDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The event date that is relevant to the dispute.
SourceTrxNumber	string	The transaction number for the transaction that is relevant to the dispute.
TaskId	long	The unique identifier for the human task record.
TransactionAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The transaction amount that is relevant to the dispute.
TransactionQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The transaction quantity that is relevant to the dispute.
TransactionType	string	The lookup code that represents the transaction type, such as invoice (INVOICE) or order (ORDER), for the transaction that is relevant to the dispute.

Incentive Compensation Estimated Compensation

Service to estimate compensation. Estimation includes potential earnings and attainment for a participant based on a set of future transactions.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/transactionProcessing/estimatedCompensation/publicService/}EstimatedCompensationServiceService

Service WSDL URL: https://servername/fscmService/EstimatedCompensationServiceService?WSDL

Logical Business Objects

- IC : Incentive Compensation : Incentive Compensation Deal

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Incentive Compensation Estimated Compensation Transactions SDO*

Relationship Type	Object or Service
Handles	*Incentive Compensation Estimated Compensation Participant SDO*
Handles	*Incentive Compensation Estimated Compensation Individual Earnings SDO*
Handles	*Incentive Compensation Estimated Compensation Transaction Response SDO*
Handles	*Incentive Compensation Estimated Compensation Earning Summary SDO*
Handles	*Incentive Compensation Estimated Compensation Transaction Reference SDO*
Handles	*Incentive Compensation Estimated Compensation Transaction Flexfield SDO*
Handles	*Incentive Compensation Estimated Compensation Attainment Summary SDO*

Operations

- *estimateCompensation*
- *createEstimatedTransactions*
- *updateEstimatedTransactions*
- *deleteEstimatedTransactions*
- *getAttainmentSummary*
- *getEarningSummary*
- *getIndividualEarnings*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

estimateCompensation

Estimates compensation for a participant based on a set of transactions.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
personInformation	*Incentive Compensation Estimated Compensation Participant*	The input payload for the participant for which the compensation was estimated. Uses the Incentive Compensation Estimated Compensation Participant service data object for this parameter.

Element Name	Type	Description
transactionList	*Incentive Compensation Est. Compensation Transactions*	The input payload for the transactions to be estimated.

Response Payload

Element Name	Type	Description
result	long	The scenario identifier created after estimation of earnings.

createEstimatedTransactions

Method to create transactions for estimation

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
personInformation	*Incentive Compensation Estimated Compensation Participant*	Personal information object
transactionList	*Incentive Compensation Est. Compensation Transactions*	List of transactions to be created for estimation

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Estimated Compensation Transaction Response SDO*	Status for each record requested via create operation

updateEstimatedTransactions

Method to update transactions for estimation

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
personInformation	*Incentive Compensation Estimated Compensation Participant*	Personal information object

Element Name	Type	Description
transactionList	*Incentive Compensation Est. Compensation Transactions*	List of transactions to be updated for estimation

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Estimated Compensation Transaction Response SDO*	Status for each record requested via update operation

deleteEstimatedTransactions

Method to delete existing transactions from estimation

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
personInformation	*Incentive Compensation Estimated Compensation Participant*	Personal information object
transactionReferenceList	*Incentive Compensation Estimated Compensation Transaction Reference SDO*	Transaction attributes to identify the records to delete, such as transaction name, transaction , line number.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Estimated Compensation Transaction Response SDO*	Status for each record requested via delete operation

getAttainmentSummary

Gets the aggregated attainment for each compensation plan, for each plan component within the plan, for each performance measure within the plan component, and for each interval for the performance measure.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The input payload criteria used to find the attainment summary.
scenarioId	long	The unique identifier of the estimated compensation scenario. The scenario identifier is provided in response to the estimateCompensation operation.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The control object used as a placeholder for finding the attainment summary. Not currently used.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Est. Compensation Attainment Summary*	The attainment summary.

getEarningSummary

Gets the aggregated earnings for each compensation plan, for each plan component within the plan, and for each interval for the plan component. Applicable for plan components that calculate individually and per interval.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The input payload criteria used to find the earning summary.
scenarioId	long	The unique identifier of the estimated compensation scenario. The scenario identifier is provided in response to the estimateCompensation operation.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The control object used as a placeholder for finding the earnings summary. Not currently used.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Est. Compensation Earning Summary*	The earning summary.

getIndividualEarnings

Gets the individual earnings for each transaction and participant. Applicable only for plan components that calculate individually.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The input payload criteria used to find the individual earnings.
scenarioId	string	The unique identifier of the estimated compensation scenario. The scenario identifier is provided in response to the estimateCompensation operation.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The control object used as a placeholder for finding individual earnings. Not currently used.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Est. Compensation Individual Earnings*	The individual earnings.

getDfltObjAttrHints

Gets user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value

Element Name	Type	Description
		of the name element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Gets the date and time for when the schema files, referenced in the service definition, last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Element Name	Type	Description

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	CN_PROJECT_INCENTIVE_COMPENSATION_COMMISSION_LINE_PRIV	Project Incentive Compensation Commission Line	Allows projection of incentive compensation earning.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_PROJECT_INCENTIVE_COMPENSATION_COMMISSION_LINE_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_MANAGER_ABSTRACT	Incentive Compensation Participant Manager	Manage participants who receive incentive compensation and review reports
CN_PROJECT_INCENTIVE_COMPENSATION_COMMISSION_LINE_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
CN_PROJECT_INCENTIVE_COMPENSATION_COMMISSION_LINE_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_ABSTRACT	Incentive Compensation Participant	Receive incentive compensation computed by the application and review reports
CN_PROJECT_INCENTIVE_COMPENSATION_COMMISSION_LINE_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
CN_PROJECT_INCENTIVE_COMPENSATION_COMMISSION_LINE_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_PROJECT_INCENTIVE_COMPENSATION_COMMISSION_LINE_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_MANAGER_ABSTRACT	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_ABSTRACT	Incentive Compensation Participant	Receive incentive compensation computed by the application and review reports
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY_FSCM	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY_FSCM	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY_FSCM	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_READ_ONLY_DUTY_FSCM	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY_FSCM	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR_FSCM	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR_FSCM	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_SVC_SR_CONTRIBUTOR_FSCM	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR_FSCM	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY_FSCM	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY_FSCM	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY_FSCM	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY_FSCM	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY_FSCM	Territory Management	Manages sales territories, territory proposals, and quotas.

Incentive Compensation Est. Compensation Attainment Summary

The output service data object for the aggregated compensation attainment estimation. This includes the aggregated attainment for each compensation plan, for each plan component within the plan, for each performance measure within the plan component, and for each interval within the performance measure.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/transactionProcessing/estimatedCompensation/publicService/}AttainmentSummaryP

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Estimated Compensation*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CompensationPlanId	decimal	The unique identifier for the plan record.
CompensationPlanName	string	The compensation plan name.
CurrentAttainmentAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The current attainment amount.
EarningTypeId	long	The unique identifier for the earning type record. The earning type, selected for the plan component, is used to classify earnings into monetary and nonmonetary categories.

Name	Type	Description
EarningTypeMeaning	string	Earning Type Name
EmailAddress	string	The email address associated with the record.
EstimatedAttainmentAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated attainment amount.
FormulaName	string	The performance measure name. • Primary Key
HomeCurrencyCode	string	The participant home currency code that is in effect as of the source event date.
IntervalGoal	decimal	The performance measure interval goal.
MeasureGoal	decimal	The performance measure goal.
ObjectStatus	string	The attainment record status.
OrgId	long	Business Unit Identifier
ParticipantName	string	The participant name.
PartyId	long	The unique identifier of the contact party.
PayPeriodId	decimal	The calendar period number.
PayoutFrequency	long	The plan component payout frequency..
PayoutFrequencyMeaning	string	Payout Frequency Name
PlanComponentId	decimal	The unique identifier for the plan component record.
PlanComponentName	string	The plan component name.
PlanComponentType	string	The plan component type.
ScenarioId	long	The unique identifier for the calculation estimation scenario.
SourceSystemId	string	The generated identifier for the participant party record in the Trading Community Model.

Name	Type	Description
TotalAttainmentAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total attainment amount.
UnitOfMeasure	string	The goal unit of measure.

Incentive Compensation Est. Compensation Earning Summary

The output service data object for the aggregated incentive earnings estimation. This service data object is used when the related plan component is defined to calculate transactions individually or grouped per interval.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/transactionProcessing/estimatedCompensation/publicService/}EarningSummaryP

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Estimated Compensation*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CompensationPlanId	decimal	The unique identifier for the plan record.
CompensationPlanName	string	The compensation plan name.
CurrentEarningAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The current earnings amount.
EarningTypeId	long	The unique identifier for the earning type record. The earning type, selected for the plan component, is used to classify earnings into monetary and nonmonetary categories.
EarningTypeMeaning	string	Earning Type Name

Name	Type	Description
EmailAddress	string	The email address associated with the record.
EstimatedEarningAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated earnings amount.
HomeCurrencyCode	string	The participant home currency code that is in effect as of the source event date.
ObjectStatus	string	The earning estimation record status. If the status value is CALCULATED, then the earnings amount is from the previous calculation.
OrgId	long	Business Unit Identifier
ParticipantName	string	The participant name.
PartyId	long	The unique identifier of the contact party.
PayPeriodId	decimal	The calendar period number.
PayoutFrequency	long	The plan component payout frequency..
PayoutFrequencyMeaning	string	Payout Frequency Name
PlanComponentId	long	The unique identifier for the plan component record. • Primary Key
PlanComponentName	string	The plan component name.
PlanComponentType	string	The plan component type.
ScenarioId	long	The unique identifier for the calculation estimation scenario.
SourceSystemId	string	The generated identifier for the participant party record in the Trading Community Model.
TotalEarningAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total earnings amount.

Incentive Compensation Est. Compensation Individual Earnings

The output service data object for the incentive earning estimation for each transaction. This service data object is used when the related plan component is defined to calculate transactions individually.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/transactionProcessing/estimatedCompensation/publicService/}IndividualEarningsP

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Estimated Compensation*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CompensationPlanId	long	The unique identifier for the plan record.
CompensationPlanName	string	The compensation plan name.
EarningId	long	The unique identifier for the earning record. • Primary Key
EarningTypeId	long	The unique identifier for the earning type record. The earning type, selected for the plan component, is used to classify earnings into monetary and nonmonetary categories.
EligibleCatId	long	The unique record identifier for the credit category to use when overriding the classification process. The credit category is a user-defined business category used to classify a transaction for compensation purposes.
EmailAddress	string	The email address associated with the record.
EstimatedEarningAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated earning amount.

Name	Type	Description
HomeCurrencyCode	string	The participant home currency code that is in effect as of the source event date.
InventoryItemId	decimal	The unique record identifier for the inventory item.
ObjectStatus	string	The earning estimation record status. If the status value is CALCULATED, then the earnings amount is from the previous calculation.
ParticipantName	string	The participant name.
PartyId	long	The unique identifier of the contact party.
PayPeriodId	decimal	The calendar period number.
PayoutFrequency	long	The plan component payout frequency..
PlanComponentId	long	The unique identifier for the plan component record.
PlanComponentName	string	The plan component name.
PlanComponentType	string	The plan component type.
ScenarioId	long	The plan component type.
SourceSystemId	string	The generated identifier for the participant party record in the Trading Community Model.
TransactionId	long	The unique identifier for the transaction record.
TransactionLineNumber	long	The number for the transaction line in the source application.
TransactionSubLineNumber	long	The number for the transaction sales credit line in the source application.
TransactionType	string	The lookup code that represents the type of transaction, such as INVOICE or ORDER.

Incentive Compensation Estimated Compensation Participant

The input payload service data object for the participant, used to identify the participant for estimating compensation.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/transactionProcessing/estimatedCompensation/publicService/}PersonInfo

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Estimated Compensation*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BusinessUnitName	string	The business unit name to which the participant belongs.
Email	string	The email address associated with the record.
ParticipantName	string	The name of the participant. • Primary Key
PartyNumber	string	The unique identification number for the party.
PersonNumber	string	The generated identifier for the participant person record in Oracle HCM Cloud.

Incentive Compensation Est. Compensation Transaction Flexfield

The input payload service data object for the user-defined details of the transactions to be estimated, such as geographic attributes and sales channels.

QName: {http://xmlns.oracle.com/apps/flex/incentiveCompensation/cn/transactionProcessing/estimatedCompensation/EstimatedCompTransPublicDFF/}EstimatedCompPublicDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Incentive Compensation Est. Compensation Transactions*
Handled by	*Incentive Compensation Estimated Compensation*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AreaCode	string	The geographic transaction attribute for the area code. The area code is a component of a phone number and is usually a 3-digit number that identifies each telephone service area in a country.
BillingAddress	decimal	The unique identifier for the customer billing location.
BillingContact	decimal	The unique identifier for the contact person at the bill-to location.
City	string	The name of the city.
Country	string	The name of the country.
FLEXContext	string	The context segment for the descriptive flex field.
FLEXNumberOfSegments	int	The number of user-definable descriptive flex field segments.
FLEXNumberOfVisibleSegments	int	The number of visible user-definable descriptive flex field segments.
PostalCode	string	The postal code element of the address.
ProductItemId	decimal	The unique record identifier for the inventory item or product.

Name	Type	Description
Province	string	The name of the province.
SalesChannel	string	The sales channel which represents how the transaction was sold. For example, indirect or direct.
ShippingAddress	decimal	The unique identifier for the customer ship-to location.
ShippingContact	decimal	The unique identifier for the contact person at the ship-to location.
SoldToCustomer	decimal	The unique identifier for customer who purchased the items or services listed on the transaction.
SoldToCustomerDisplay	decimal	The name of the customer who purchased the items or services listed on the transaction.
State	string	The name of the state.

Incentive Compensation Estimated Compensation Transaction Reference SDO

Incentive Compensation Estimated Compensation Transaction Reference

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/transactionProcessing/estimatedCompensation/publicService/}EstimatedCompTransactionReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Estimated Compensation*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
TransactionLineNumber	long	Transaction Line Number
TransactionName	string	Transaction Name • Primary Key
TransactionSubLineNumber	long	Transaction Sub Line Number
TransactionType	string	Transaction Type

Incentive Compensation Estimated Compensation Transaction Response SDO

Incentive Compensation Estimated Compensation Transaction Response

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/transactionProcessing/estimatedCompensation/publicService/}EstimatedCompTransactionResponse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Estimated Compensation*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BusinessUnitName	string	Business Unit Name in the requested Payload • Primary Key
ErrorReason	string	Valid reason in case of failure
OperationStatus	string	SUCCESS/FAILURE
ParticipantId	long	Participant Id derived based on Request Payload

Name	Type	Description
ParticipantName	string	Participant Name derived based on Request Payload
TransactionId	long	Transaction ID of the record in IC that was created/updated/deleted. Will be populated only for Success status
TransactionLineNumber	long	Transaction Line Number attribute in requested payload
TransactionName	string	Transaction Name attribute in requested payload
TransactionSubLineNumber	long	Transaction Sub Line attribute in requested payload
TransactionType	string	Transaction Type attribute in requested payload

Incentive Compensation Est. Compensation Transactions

The input payload service data object for the transactions to be estimated, such as opportunities or quotes.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/transactionProcessing/estimatedCompensation/publicService/}EstimatedCompTransaction

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Incentive Compensation Estimated Compensation Transaction Flexfield SDO*
Handled by	*Incentive Compensation Estimated Compensation*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
DiscountPercentage	decimal	The percentage of the transaction amount that depicts the net amount to be paid by the customer.
EligibleCatId	long	The unique record identifier for the credit category to use when overriding the classification process. The credit category is a user-defined business category used to classify a transaction for compensation purposes.
EstimatedCompPublicDFF	*Incentive Compensation Est. Compensation Transaction Flexfield*	The context segment for the descriptive flex field.
MarginPercentage	decimal	The percentage of the transaction amount that depicts the profit of the sale.
RevenueType	string	Revenue Type
SalesStage	long	The opportunity sales stage.
SourceCurrencyCode	string	The currency code that represents the currency of the monetary transaction amount in the source application.
SourceEventDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The incentive event date, such as the estimated close date for the deal. This is a required attribute.
SplitPct	decimal	The percent of the transaction amount that the credit receiver should receive.
TransactionAmountSourceCurrency	decimal	The amount of the transaction in the source application currency. This is a required attribute.
TransactionLineNumber	long	The number for the transaction line in the source application.
TransactionName	string	The transaction name used to identify the transaction. This is a required attribute.
TransactionQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	Transaction Quantity
TransactionSubLineNumber	long	The number for the transaction sales credit line in the source application.

Name	Type	Description
TransactionType	string	The lookup code that represents the type of transaction, such as INVOICE or ORDER. The value must be a valid lookup code for lookup type CN_TP_TRANSACTION_TYPE. You can view lookup CN_TP_TRANSACTION_TYPE from the Setup and Maintenance, Manage Incentive Compensation Lookups task. This is a required attribute.
WinProbabilty	decimal	The probability of winning the deal.

Incentive Compensation Participant Export Web Service

Service to retrieve participant identifiers from the Oracle HCM Cloud person, Oracle Sales Cloud Customer Data Management party, and Oracle Sales Cloud Incentive Compensation participant. For example, you can retrieve the party identifier, person identifier, person number, and business unit. You can also retrieve the participant identifier, which you can add to relevant transaction data for collection and processing.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/participants/participantSetup/participantSetupService/}ParticipantExportService

Service WSDL URL: https://servername/fscmService/ParticipantExportService?WSDL

Logical Business Objects

- IC : Incentive Compensation : Incentive Compensation Participant

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Incentive Compensation Participant Export Service SDO*

Operations

- *recoverParticipantInformation*
- *findParticipantInformation*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*

- *getEntityList*

recoverParticipantInformation

Finds participant records with values that match the specified input criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
businessUnit	string	The name of the business unit.
email	string	The participant email.
name	string	The name of the participant.
partyOriginalSystemId	string	The unique identifier of the participant originating system.
partyOriginalSystem	string	The originating system of the participant.
creationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the participant record was created.
startDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The participant active start date.
partyType	string	The participant type. Valid values are Participant and Analyst.

Response Payload

Element Name	Type	Description
result	string	List of participants that match the specified criteria.

findParticipantInformation

Finds and returns a list of participants that match the specified input criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The input payload criteria used to find the participants.
partyId	long	The unique identifier of the participant party in the Trading Community Model.
personId	string	The unique identifier of the participant in Oracle HCM Cloud.
emailAddress	string	The participant email.
partySystemIdentifier	string	The unique identifier of the participant party originating system.
personNumber	string	The participant person number.
orgId	long	The unique identifier of the business unit to which the participant belongs. You can view the business unit identifier for a business unit from the Setup and Maintenance, Define Business Units task.
creationDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The date when the participant record was created.
originatingSystem	string	The originating system of the participant party.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The control object used as a placeholder for finding participants. Not currently used.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Participant Export Service*	The list of participants that match the specified criteria.

getDfltObjAttrHints

Gets user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Gets the date and time for when the schema files, referenced in the service definition, last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create,

Element Name	Type	Description
		update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	CN_REGISTER_INCENTIVE_COMPENSATION_PARTICIPANT_PRIV	Register Incentive Compensation Participant	Allows import of incentive compensation participant, a person or organization. For example, an employee, salesperson, party, supplier contract, partner, or third party resale contractor whose data and payments the incentive compensation application computes and manages.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_REGISTER_INCENTIVE_COMPENSATION_PARTICIPANT_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
CN_REGISTER_INCENTIVE_COMPENSATION_PARTICIPANT_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ADMINISTRATOR_JOB	Incentive Compensation Application Administrator	Set up incentive compensation application

Incentive Compensation Participant Export Service

The output service data object for participant identifiers.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/participants/participantSetup/publicService/participantService/}ParticipantExport

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Participant Export Web Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
EmailAddress	string	The email address associated with the record.
HRPersonNumberHCM	string	The generated person number for the participant person record in Oracle HCM Cloud.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateDateHCM	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time of the last update of the record in HCM. Used to identify if the already imported participant has been updated in the source system.
OrgId	long	The unique identifier of the business unit record.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system .
ParticipantId	long	The unique identifier for the participant record. • Primary Key
ParticipantName	string	The name of the participant.
PartyId	long	The unique identifier of the contact party.
PersonId	string	The unique identifier for the person record in Oracle HCM Cloud.

Incentive Compensation Participant Goal

Service to update participant performance measure interval goal and period goal values.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/participants/compensationPlanSetup/goalService/}GoalService

Service WSDL URL: https://servername/fscmService/IncentiveGoalService?WSDL

Logical Business Objects

- IC : Incentive Compensation : Incentive Compensation Participant

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Incentive Compensation Participant Interval Goal SDO*
Handles	*Incentive Compensation Participant Period Goal SDO*

Operations

- *updateIntervalGoal*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

updateIntervalGoal

Updates an interval goal and period goal for a participant.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
intervalGoal	*Incentive Compensation Participant Interval Goal*	The input payload of the interval goal, which includes the period goal, to be updated.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Participant Interval Goal*	The updated interval goal.

getDfltObjAttrHints

Gets user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Gets the date and time for when the schema files, referenced in the service definition, last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	CN_MAINTAIN_INCENTIVE_COMPENSATION_PARTICIPANT_DETAIL_PRIV	Maintain Incentive Compensation Participant Detail	Allows assignment of participants to analysts, who manage incentive compensation details for a person or organization whose credits, attainment, earnings, disputes, and payments the incentive compensation application computes and manages. A person or organization can be an employee, salesperson, party, supplier contract, partner, or third party resale contractor.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_MAINTAIN_INCENTIVE_COMPENSATION_PARTICIPANT_DETAIL_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_PLAN_MANAGEMENT_DUTY	Incentive Compensation Participant Snapshot Management	Assign and maintain incentive plans and transactions for participants

Incentive Compensation Participant Interval Goal

The input payload service data object for to update the participant interval goal.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/participants/compensationPlanSetup/publicService/}IntervalGoal

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Incentive Compensation Participant Period Goal SDO*
Handled by	*Incentive Compensation Participant Goal*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AlternateTarget1Interval	decimal	The first of five alternate goal targets for a performance measure interval.
AlternateTarget2Interval	decimal	The second of five alternate goal targets for a performance measure interval.
AlternateTarget3Interval	decimal	The third of five alternate goal targets for a performance measure interval.
AlternateTarget4Interval	decimal	The fourth of five alternate goal targets for a performance measure interval.
AlternateTarget5Interval	decimal	The fifth of five alternate goal targets for a performance measure interval.
BusinessUnitName	string	The business unit name.

Name	Type	Description
EmailAddress	string	The email address associated with the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
HRPersonNumber	string	The generated person number for the participant person record in Oracle HCM Cloud.
IntervalGoalId	long	The unique identifier for the interval goal record.
IntervalNumber	decimal	The interval number, such as 2016004.
MeasureName	string	The performance measure name.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgId	long	The unique identifier of the business unit record.
ParticipantName	string	The name of the participant.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PeriodGoal	*Incentive Compensation Participant Period Goal*	The period goals associated with the interval goal.
PlanComponentName	string	The plan component name.
SrpGoalId	long	The unique identifier for the participant goal record.
SrpIntervalGoalId	long	The unique identifier for the participant interval goal record. • Primary Key
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.

Name	Type	Description
TargetInterval	decimal	The target goal for a performance measure interval.

Incentive Compensation Participant Period Goal

The input payload service data object for to update the participant period goal.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/participants/compensationPlanSetup/publicService/}PeriodGoal

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Incentive Compensation Participant Interval Goal*
Handled by	*Incentive Compensation Participant Goal*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AlternateTarget1ITD	decimal	The first of five alternate interval-to-date period goal targets. The interval-to-date value is the aggregate total of alternate target 1 values since the start of the interval.
AlternateTarget1Period	decimal	The first of five alternate goal targets for a performance measure period.
AlternateTarget2ITD	decimal	The second of five alternate interval-to-date period goal targets. The interval-to-date value is the aggregate total of alternate target 2 values since the start of the interval.
AlternateTarget2Period	decimal	The second of five alternate goal targets for a performance measure period.

Name	Type	Description
AlternateTarget3ITD	decimal	The third of five alternate interval-to-date period goal targets. The interval-to-date value is the aggregate total of alternate target 3 values since the start of the interval.
AlternateTarget3Period	decimal	The third of five alternate goal targets for a performance measure period.
AlternateTarget4ITD	decimal	The fourth of five alternate interval-to-date period goal targets. The interval-to-date value is the aggregate total of alternate target 4 values since the start of the interval.
AlternateTarget4Period	decimal	The forth of five alternate goal targets for a performance measure period.
AlternateTarget5ITD	decimal	The fifth of five alternate interval-to-date period targets. The interval-to-date value is the aggregate total of alternate target 5 values since the start of the interval.
AlternateTarget5Period	decimal	The fifth of five alternate goal targets for a performance measure period.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgId	long	The unique identifier of the business unit record.
PeriodGoalId	long	The unique identifier for the period goal record. Used internally as a reference to the originating plan component performance measure period goal.
PeriodId	long	The unique identifier for the period within the calendar.
SrpIntervalGoalId	long	The unique identifier for the participant interval goal record, to which this period goal belongs.
SrpPeriodGoalId	long	The unique identifier for the participant period goal record.

Name	Type	Description
		• Primary Key
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
TargetITD	decimal	The interval-to-date goal target. The interval-to-date value is the aggregate total of period goal target values since the start of the interval.
TargetPeriod	decimal	The period name.

Incentive Compensation Participant Plan

Service to approve or reject an incentive compensation plan for a participant.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/participants/compensationPlanSetup/srpCompPlanService/}SrpCompensationPlanService

Service WSDL URL: https://servername/fscmService/SrpCompensationPlanService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Incentive Compensation Participant Plan Approval SDO*

Operations

- *rejectSrpCompensationPlan*
- *getAssigneesList*
- *approveSrpCompensationPlan*
- *publishSrpCompensationPlan*

rejectSrpCompensationPlan

Rejects the task for the specified participant incentive compensation plan and user. The task should be in Assigned state and Assigned to the user.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
srpCompensationPlanApprovalId	string	The unique identifier of the participant compensation plan approval human task instance.
onBehalfOfUser	string	The identifier of the user for whom the approval is on behalf of. The user identifier can be obtained from the getAssigneesList method.
comments	string	The comments for the rejection.

Response Payload

Element Name	Type	Description
result	string	Returns SUCCESS if successful.

getAssigneesList

Gets the list of assignees for the task related to a participant incentive compensation plan approval as specified by the approval instance identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
srpCompensationPlanApprovalId	string	The unique identifier of the participant compensation plan approval human task instance.

Response Payload

Element Name	Type	Description
result	string	The list of assignees for the participant incentive compensation plan approval human task that matches the specified criteria. The list is in the <UserId> | <User Name> format.

approveSrpCompensationPlan

Approves the task for the specified participant incentive compensation plan and user. The task should be in Assigned state and Assigned to the user.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
srpCompensationPlanApprovalId	string	The unique identifier of the participant compensation plan approval human task instance.
onBehalfOfUser	string	The identifier of the user for whom the approval is on behalf of. The user identifier can be obtained from the getAssigneesList method.
comments	string	The comments for the approval.

Response Payload

Element Name	Type	Description
result	string	Returns SUCCESS if successful.

publishSrpCompensationPlan

Initiates the publish event for the participant incentive compensation plan approval, as specified by the parameter set.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
participantCompensationPlanApprovalRow	*Incentive Compensation Participant Plan Approval SDO*	The parameters available to invoke the web service method.

Response Payload

Element Name	Type	Description
result	string	Returns a SUCESS message if the business event has been successfully raised along with the SrpApprovalInstanceId. Returns a FAILURE message if business event was not raised.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	CN_VERIFY_PARTICIPANT_EARNINGS_AND_ATTAINMENT_REPORT_PRIV	Verify Participant Earnings and Attainment Report	Allows review of participant earnings and attainment report.
All Operations	CN_CUSTOMIZE_INCENTIVE_COMPENSATION_PARTICIPANT_COMPENSATION_PLAN_PRIV	Individualize Incentive Compensation Participant Compensation Plan	Allows individualization of participant distributed goals for incentive plans, which ties participant earnings to actual production on an individual or group basis.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_VERIFY_PARTICIPANT_EARNINGS_AND_ATTAINMENT_REPORT_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_MANAGER_ABSTRACT	Incentive Compensation Participant Manager	Manage participants who receive incentive compensation and review reports
CN_VERIFY_PARTICIPANT_EARNINGS_AND_ATTAINMENT_REPORT_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
CN_VERIFY_PARTICIPANT_EARNINGS_AND_ATTAINMENT_REPORT_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_ABSTRACT	Incentive Compensation Participant	Receive incentive compensation computed by the application and review reports

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_VERIFY_PARTICIPANT_EARNINGS_AND_ATTAINMENT_REPORT_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
CN_VERIFY_PARTICIPANT_EARNINGS_AND_ATTAINMENT_REPORT_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
CN_VERIFY_PARTICIPANT_EARNINGS_AND_ATTAINMENT_REPORT_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
CN_CUSTOMIZE_INCENTIVE_COMPENSATION_PARTICIPANT_COMPENSATION_PLAN_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
CN_CUSTOMIZE_INCENTIVE_COMPENSATION_PARTICIPANT_COMPENSATION_PLAN_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_PLAN_MANAGEMENT_DUTY	Incentive Compensation Participant Snapshot Management	Assign and maintain incentive plans and transactions for participants

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_MANAGER_ABSTRACT	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_ABSTRACT	Incentive Compensation Participant	Receive incentive compensation computed by the application and review reports
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY_FSCM	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY_FSCM	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY_FSCM	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_READ_ONLY_DUTY_FSCM	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY_FSCM	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR_FSCM	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR_FSCM	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_SVC_SR_CONTRIBUTOR_FSCM	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR_FSCM	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY_FSCM	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY_FSCM	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY_FSCM	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY_FSCM	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY_FSCM	Territory Management	Manages sales territories, territory proposals, and quotas.

Incentive Compensation Participant Plan Approval SDO

The service data object works with the corresponding service to initiate the compensation plan approval for a participant.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/participants/compensationPlanSetup/srpCompPlanService/}SrpCompensationPlanApproval

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Participant Plan*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BusinessUnitId	long	The unique identifier for the business unit of the participant. • Primary Key
BusinessUnitName	string	The business unit name of the participant. It is a case sensitive field. Consuming application should provide either BusinessUnitId or BusinessUnitName. • Primary Key
CompensationPlanId	long	The unique identifier for the compensation plan assigned to the participant.
CompensationPlanName	string	Name of the compensation plan assigned to the participant. It is a case-sensitive field. Consuming applications should provide either the CompensationPlanId or CompensationPlanName.
EmailId	string	E-mail address of the participant. It is a case-sensitive field.
ParticipantId	long	The unique identifier for the participant.
ParticipantName	string	Name of the participant. It is a case-sensitive field. Consuming application should provide either PersonNumber, EmailId, ParticipantId , ParticipantName, or PartyId.
PartyId	long	Party identifier of the participant.
PersonNumber	string	HR PersonNumber of the participant.
PlanAssignmentEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the compensation plan becomes inactive for the participant. The format is 'YYYY-MM-DD'. This field only needs to be passed if the same compensation plan is assigned several times to the participant for different date ranges. In other cases, you need to pass a value '4712-12-31' in place of a 'null' value.
PlanAssignmentStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the compensation plan becomes active for the participant. The format is 'YYYY-MM-DD'. This field only needs to

Name	Type	Description
		be passed if the same compensation plan is assigned several times to the participant for different date ranges. In other cases, you must pass a value '4712-12-31' in place of a 'null' value.
RoleId	long	The unique identifier for the role to which the participant is assigned.
RoleName	string	Name of the role to which the participant is assigned to. It is a case-sensitive field. The consuming application should provide either RoleId or RoleName, if the plan is assigned through a role.

Incentive Compensation Participant Version 2

This service enables you to manage participant events and assignments through the role within the application.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/participants/participantSetup/publicService/participantServiceV2/}ParticipantService

Service WSDL URL: https://servername/fscmService/ParticipantServiceV2?WSDL

Logical Business Objects

- IC : Incentive Compensation : Incentive Compensation Participant

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Incentive Compensation Participant Plan Search SDO*
Handles	*Incentive Compensation Participant Plan Additional Attributes SDO*
Handles	*Incentive Compensation Participant Plan SDO*
Handles	*Incentive Compensation Participant Detail Flexfield SDO*

Relationship Type	Object or Service
Handles	*Incentive Compensation Terminate Participant SDO*
Handles	*Incentive Compensation Participant Detail SDO*
Handles	*Incentive Compensation Participant Role SDO*
Handles	*Incentive Compensation Participant Plan Target SDO*

Operations

- *holdParticipantPayment*
- *terminateParticipant*
- *assignCOMPRoleToParticipant*
- *processParticipantTargetIncentive*
- *automaticTerminateParticipant*
- *assignRoleToParticipant*
- *mergeParticipantDetail*
- *terminateActiveParticipant*
- *findParticipantPlan*
- *updateParticipantPlan*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

holdParticipantPayment

Set the participant's (header) Hold Payment to Y to exclude the participant from the Payment process. This method requires one of the first three parameters; pass 0 for unknow or null values.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
personId	string	Unique identifier for the person
partyId	long	Unique identifier for the party
participantId	long	Unique identifier for the participant
orgId	long	Unique identifier for the business unit

Element Name	Type	Description
holdReason	string	Reason for the payment hold

Response Payload

Element Name	Type	Description
result	int	Number of participants for whom to hold payment

terminateParticipant

End date the participant. The Payment process looks at the compensation end date first. If that value is Null, it uses the active end date. Paysheets do not include payments processed after the participant's end date. This method requires one of the first three parameters; pass 0 for unknown or null values.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
personId	string	Unique identifier for the person
partyId	long	Unique identifier for the party
participantId	long	Unique identifier for the participant
orgId	long	Unique identifier for the business unit
activeEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Format for dates is YYYY-MM-DD
compensationEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Format for dates is YYYY-MM-DD

Response Payload

Element Name	Type	Description
result	int	List of participants who were end dated

assignCOMPRoleToParticipant

Assigns a compensation role to a participant. If the role is assigned to a compensation plan, payment plan, or pay group, assign the participant to these entities through the role. This method requires one of the first three parameters; pass 0 for unknown or null values.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
personId	string	Unique identifier for the person
partyId	long	Unique identifier for the party
participantId	long	Unique identifier for the participant
orgId	long	Unique identifier for the business unit
roleId	long	Unique identifier for the role
assignmentStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Format for dates is YYYY-MM-DD
assignmentEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Format for dates is YYYY-MM-DD

Response Payload

Element Name	Type	Description
result	int	Number of compensation role assignment records created for given participant.

processParticipantTargetIncentive

Modify the target incentive amount of participant to comp plan assingment. Business Unit Name,Participant Name,Plan Name and Target Incentive Amount are mandatory.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
participantTargetIncentive	*Incentive Compensation Participant Plan Target SDO*	Input List of Service data object for Participant Target Incentive

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Participant Plan Target SDO*	Returns List of Service data object for Participant Target Incentive modified

automaticTerminateParticipant

This process automatically terminates participant along with, terminating Participants Compensation Plan and Payment Plan, with respect to the system parameters.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
terminateParticipant	*Incentive Compensation Terminate Participant*	The Input List of Service data objects for Automatic Terminate Participant.

Response Payload

Element Name	Type	Description
result	string	Returns a list of errors, if any, in the Automated participant termination function.

assignRoleToParticipant

Assigns Role to a Participant

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
participantRole	*Incentive Compensation Participant Role SDO*	Input Service data object for Participant Role assignment

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Participant Role SDO*	Output Service data object for Participant Role assigned

mergeParticipantDetail

Merge a new Participant Detail Record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
participantDetail	*Incentive Compensation Participant Detail*	Input Service data object for Participant Detail

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Participant Detail*	Returns Service data object for Participant Detail merged

terminateActiveParticipant

Terminate an active Participant.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
terminateParticipant	*Incentive Compensation Terminate Participant*	Input Service data object for Terminate Participant

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Terminate Participant*	Returns Service data object for Terminated Participant

findParticipantPlan

Operation used to search participant comp plan.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	Criteria to find Participant Plan
BusinessUnitName	string	Business Unit Name
PlanName	string	Compensation Plan Name
ParticipantName	string	Participant Name
PartyNumber	string	Party Number
PartyId	long	Party Identifier
ParticipantEmail	string	Participant Email Address
PersonNumber	string	Person Number
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Common Data Object to retrieve all translations in response

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Participant Plan Search SDO*	List of Participant plans matching the criteria

updateParticipantPlan

Operation used to update the Participant comp plan details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
srpCompensationPlanDetail	*Incentive Compensation Participant Plan SDO*	The service data object for updating the participant plan.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Participant Plan SDO*	Returns updated participant plan

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	CN_MAINTAIN_INCENTIVE_COMPENSATION_PARTICIPANT_DETAIL_PRIV	Maintain Incentive Compensation Participant Detail	Allows assignment of participants to analysts, who manage incentive compensation details for a person or organization whose credits, attainment, earnings, disputes, and payments the incentive compensation application computes and manages. A person or organization can be an employee, salesperson, party, supplier contract, partner, or third party resale contractor.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_MAINTAIN_INCENTIVE_COMPENSATION_PARTICIPANT_DETAIL_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_PLAN_MANAGEMENT_DUTY	Incentive Compensation Participant Snapshot Management	Assign and maintain incentive plans and transactions for participants

Incentive Compensation Participant Detail Flexfield

The Flex Context field for SDO .

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/participants/participantSetup/model/flex/}IcSrpDetailDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Incentive Compensation Participant Detail*
Handled by	*Incentive Compensation Participant Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ParticipantDetailId	long	The unique identifier for the participant detail record. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Incentive Compensation Participant Detail

The service data object for Participant Detail.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/participants/participantSetup/publicService/participantService/}ParticipantDetail

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Incentive Compensation Participant Detail Flexfield*
Handled by	*Incentive Compensation Participant Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BusinessUnitName	string	The business unit name to which the participant belongs.
CostCenter	string	The participant cost center as of the effective date range of the detail record.
CountryCode	string	The code representing the country where the participant works as of the effective date range of the detail record.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
EmailAddress	string	The email address associated with the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
HRPersonNumber	string	The generated person number for the participant person record in Oracle HCM Cloud.
IcSrpDetailDFFVL	*Incentive Compensation Participant Detail Flexfield*	The user-definable descriptive flex field value.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the

Name	Type	Description
		start and end of a transaction to determine whether another session has updated the row.
OrgId	long	The unique identifier of the business unit record to which the participant belongs.
ParticipantDetailId	long	The unique identifier for the participant detail record. • Primary Key
ParticipantId	long	The unique identifier for the participant record.
ParticipantName	string	The name of the participant.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.

Incentive Compensation Participant Plan Additional Attributes SDO

The service data object for the additional attributes of the incentive compensation participant plan.

QName: {http://xmlns.oracle.com/apps/flex/incentiveCompensation/cn/participants/compensationPlanSetup/srpCompPlanDFF/}SrpCompPlanDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Incentive Compensation Participant Plan SDO*
Handled by	*Incentive Compensation Participant Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
SrpCompPlanId	long	Participant Compensation Plan identifier • Primary Key
_FLEX_NumOfSegments	int	Number of additional attributes
__FLEX_Context	string	Context segment code
__FLEX_Context_DisplayValue	string	Context segment name

Incentive Compensation Participant Plan SDO

The service data object for updating the participant plan.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/participants/compensationPlanSetup/model/}SrpCompPlanDetail

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Incentive Compensation Participant Plan Additional Attributes SDO*
Handled by	*Incentive Compensation Participant Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BusinessUnitName	string	Business Unit Name
CustomizedFlag	boolean	Customize target incentive

Name	Type	Description
ParticipantEmailAddress	string	Participant Email Address
ParticipantName	string	Participant Name
PartyId	long	Party Identifier
PartyNumber	string	Party Number
PersonNumber	string	Party Number
PlanName	string	Compensation Plan Name
SrpCompPlanDFF	*Incentive Compensation Participant Plan Additional Attributes SDO*	Participant plan DFF View Link
SrpCompensationPlanId	long	Participant Compensation Plan identifier • Primary Key
TargetIncentive	decimal	Target Incentive Amount

Incentive Compensation Participant Plan Search SDO

The service data object for searching a participant plan.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/participants/compensationPlanSetup/model/}SrpCompPlanSearch

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Participant Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Businessunitname	string	Business Unit Name
CompensationPlanId	long	Compensation Plan identifier
CompensationPlanName	string	Compensation Plan Name
CustomizedFlag	boolean	Customize target incentive
EmailAddress	string	Participant Email Address
OrgId	long	Compensation Plan business unit identifier
ParticipantId	long	Participant identifier
ParticipantName	string	Participant Name
PartyId	long	Party Identifier
PartyNumber	string	Party Number
PersonNumber	string	Person Number
SrpCompensationPlanId	long	Participant Compensation Plan identifier • Primary Key
TargetIncentive	decimal	Target Incentive Amount

Incentive Compensation Participant Plan Target SDO

Service data object for Participant Target Incentive

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/participants/participantSetup/publicService/participantService/}ParticipantTargetIncentive

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Participant Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BusinessUnitName	string	Business Unit Name • Primary Key
ParticipantEmailAddress	string	Participants's Email Address
ParticipantName	string	Participant Name • Primary Key
ParticipantPlanEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Compensation Plan to Participant Assignment End Date
ParticipantPlanStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Compensation Plan to Participant Assignment Start Date
PartyId	long	Party Identifier
PartyNumber	string	Party Number
PersonNumber	string	Person Number
PlanName	string	Compensation Plan Name • Primary Key
TargetIncentiveAmount	decimal	Target Incentive Amount

Incentive Compensation Participant Role SDO

Service data object for Participant Role assignment

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/participants/participantSetup/publicService/participantService/}ParticipantRole

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Participant Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AssignmentEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	End Date of Role Assignment
AssignmentStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Start Date of Role Assignment
BusinessUnitName	string	Business Unit Name • Primary Key
EMailAddress	string	Email Address • Primary Key
HRPersonNumber	string	HR Person Number • Primary Key
ParticipantName	string	Participant Name • Primary Key
PartyId	long	Party Identifier • Primary Key
PartyNumber	string	Party Number • Primary Key
RoleName	string	Role Name • Primary Key

Incentive Compensation Terminate Participant

The service data object for Terminate Participant.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/participants/participantSetup/publicService/participantService/}TerminateParticipant

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Participant Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the participant is no longer active.
BusinessUnitName	string	The business unit name. • Primary Key
CompensationEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The compensation end date, after which paysheets are no longer generated for the participant.
EmailAddress	string	The email address associated with the record. • Primary Key
HRPersonNumber	string	The generated person number for the participant person record in Oracle HCM Cloud. • Primary Key
ParticipantName	string	Name of the participant. • Primary Key
PartyId	long	The unique identifier of the contact party. • Primary Key

Name	Type	Description
PartyNumber	string	The unique identification number for the party. • Primary Key

Incentive Compensation Payment Acknowledgment

Service to update incentive compensation paysheet payment acknowledgement details.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/paymentSetup/paysheets/paysheetService/}PaymentAcknowledgementService

Service WSDL URL: https://servername/fscmService/PaymentAcknowledgementService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Incentive Compensation Payment Acknowledgment SDO*

Operations

- *updatePaymentDetails*

updatePaymentDetails

Updates the payment details for a paid pay sheet.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
paymentDetails	*Incentive Compensation Payment Acknowledgment*	The input payload of the participant and payment batch attributes used to identify the pay sheet.

Response Payload

Element Name	Type	Description
result	boolean	Returns true if the operation was successful.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	CN_MANAGE_INCENTIVE_COMPENSATION_PAYSHEET_PRIV	Manage Incentive Compensation Paysheet	Allows maintenance of incentive compensation paysheets that contain the payable commission, draw and recovery, and payment adjustments for a single eligible participant.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_MANAGE_INCENTIVE_COMPENSATION_PAYSHEET_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PAYMENT_DUTY	Incentive Compensation Payments	Create and maintain payment batches. Adjust incentive compensation paysheets and payment transactions. Submit paysheets for approval.

Incentive Compensation Payment Acknowledgment

The input payload service data object for participant and payment batch attributes used to uniquely identify the paysheet. It is also used to include the payment acknowledgment attributes from the paying system, such as payables or payroll.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/paymentSetup/paysheets/paysheetService/}PaymentAcknowledgement

Logical Business Objects

- IC : Incentive Compensation : Incentive Compensation Paysheet

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Payment Acknowledgment*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BusinessUnitId	long	The unique identifier of the business unit record. You can view the business unit identifier for a business unit from the Setup and Maintenance, Define Business Units task. (In the search results region, click the View menu to add the Business Unit ID column.)
BusinessUnitName	string	The business unit name.
Email	string	The email address associated with the record.
ParticipantId	long	The unique identifier for the participant record. You can view the participant identifier from the Participant Snapshot work area, Select Participant search results. You can also use the participant export web service or the payment export web service.
ParticipantName	string	The participant name.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PaymentBatchId	long	The unique identifier for the payment batch record. You can view the payment batch identifier using the payment export web service.
PaymentBatchName	string	The payment batch name.
PaymentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The acknowledged paysheet payment date from a paying system, such as payables or payroll.

Name	Type	Description
PaymentMethod	string	The acknowledged method of payment, such as electronic funds transfer or a check, from a paying system, such as payables or payroll.
PaymentReferenceNumber	string	The acknowledged payment reference number, such as an electronic funds transfer number or a check number, from a paying system, such as payables or payroll.
PersonNumber	string	The generated identifier for the participant person record in Oracle HCM Cloud. You can view the participant person number from the Participant Snapshot work area, Select Participant search results. You can also use the participant export web service or the payment export web service.

Incentive Compensation Payment Export

Service to export paysheet and related payment batch and participant information. This service is typically used to retrieve incentive compensation payment information for your internal or external payment system.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/paymentSetup/paysheets/paymentTransactionService/}PaymentExportService

Service WSDL URL: https://servername/fscmService/PaymentExportService?WSDL

Logical Business Objects

- IC : Incentive Compensation : Incentive Compensation Payment Transaction

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Incentive Compensation Payment Export SDO*

Operations

- *exportPaymentTransactionByPeriodName*
- *exportPaymentTransactionByPaymentDateRange*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

exportPaymentTransactionByPeriodName

Exports payment transactions for a period and business unit.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
pdName	string	The calendar period name. You define period names for your calendar using the Setup and Maintenance, Manage Calendars task.
orgId	long	The unique identifier of the business unit to which the pay sheet belongs. You can view the business unit identifier for a business unit from the Setup and Maintenance, Define Business Units task.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Payment Export*	The list of payment transactions.

exportPaymentTransactionByPaymentDateRange

Exports paid payment transactions for a payment date range and business unit.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
startDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start of the date range used to select pay sheet payment transactions. Use the format YYYY-MM-DD. For example, 2016-12-01.

Element Name	Type	Description
endDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The last date, of the date range, used to select pay sheet payment transactions. Use the format YYYY-MM-DD. For example, 2016-12-31.
orgId	long	The unique identifier of the business unit to which the pay sheet belongs. You can view the business unit identifier for a business unit from the Setup and Maintenance, Define Business Units task.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Payment Export*	The list of payment transactions.

getDfltObjAttrHints

Gets user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Gets the date and time for when the schema files, referenced in the service definition, last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	CN_MANAGE_INCENTIVE_COMPENSATION_PAYSHEET_PRIV	Manage Incentive Compensation Paysheet	Allows maintenance of incentive compensation paysheets that contain the payable commission, draw and recovery, and payment adjustments for a single eligible participant.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_MANAGE_INCENTIVE_COMPENSATION_PAYSHEET_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PAYMENT_DUTY	Incentive Compensation Payments	Create and maintain payment batches. Adjust incentive compensation paysheets and payment transactions. Submit paysheets for approval.

Incentive Compensation Payment Export

The output service data object for the paysheet payment transaction details.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/paymentSetup/paysheets/paymentTransactionService/}PaymentTransactionExp

Logical Business Objects

- IC : Incentive Compensation : Incentive Compensation Payment Transaction

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Payment Export*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	The current active value, which indicates whether the participant is marked as active or inactive.
AdjustComments	string	A field for commentary entered (for a payment transaction or manual paysheet adjustment).
AdjustStatus	string	The adjustment status. Not currently used.
ApExpId	long	The plan component payable expense account. Not currently used.

Name	Type	Description
ApLiabId	long	The plan component payable liability account. Not currently used.
CalculationCurrencyCommAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The payment transaction amount in the calculation currency.
CommissionValue	decimal	The incentive rate table amount or rate used to calculate the earning.
CompensationEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The compensation end date, after which paysheets are no longer generated for the participant.
CostCenter	string	The participant cost center that is in effect as of the source event date for the payment of earnings, or the payment batch period for the payment of manual paysheet adjustments.
CountryCode	string	The participant country code that is in effect as of the source event date for the payment of earnings, or the payment batch period for the payment of manual paysheet adjustments.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditTypeId	long	The unique identifier for the earning type record. The earning type, selected for the plan component, is used to classify earnings into monetary and nonmonetary categories.
CreditedEmployeeNumber	string	The worker (employee) number for the participant who received credit for the earning source transaction.
CreditedParticipantId	long	The unique participant record identifier for the participant who received credit from the source transaction.
EarningId	long	The unique identifier for the earning record.
EarningTypeId	long	The unique identifier for the earning type record. The earning type, selected for the plan component, is used to classify earnings into monetary and nonmonetary categories.

Name	Type	Description
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
ExpenseCcid	long	The payment payable expense code. Not currently used.
FuncCurrencyPayAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The payment (payment transaction or manual paysheet adjustment) amount in the operating currency.
HRPrimaryWorkerNumber	string	The participant worker (employee) number.
HoldFlag	boolean	A flag that indicates whether to keep from paying a payment transaction until the hold is explicitly released.
HoldPaymentFlag	boolean	The current hold payment value, which indicates whether participant payments should be held or not.
HomeCurrencyCode	string	The participant home currency code that is in effect as of the source event date for the payment of earnings, or the payment batch period for the payment of manual paysheet adjustments.
HomeCurrencyPayAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The payment (payment transaction or manual paysheet adjustment) amount in the participant home currency.
IncentiveTypeCode	string	The incentive type (for earnings) is the lookup code that represents whether to calculate earnings per event or per interval. The calculate incentive type is selected when defining the plan component. Where the calculated amount is based on the payment plan minimum and recoverable amounts, the incentive type value is PMTPLN or PMTPLN_REC. For paysheet manual adjustments, the incentive type value is MANUAL_PAY_ADJ.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
LiabilityCcid	long	The payment payable liability code. Not currently used.
ObjectStatus	string	The code indicating whether the paysheet status has a value of paid.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgId	long	The unique identifier of the business unit record.
ParticipantPayId	long	The unique identifier of the payment (payment transaction or paysheet manual adjustment) record. • Primary Key
ParticipantType	string	The code that represents the participant type as either a participant or compensation administrator.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PayCurrencyCode	string	The processing currency code for the payment (payment transaction or manual paysheet adjustment) amount.
PayCurrencyPayAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The payment (payment transaction or manual paysheet adjustment) amount in the processing currency.
PayDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The payment batch pay date.
PayElementTypeId	long	The payment element type. Not currently used.
PayPeriodId	long	The period number representing the period of the payment transaction earning event date or the payment batch period for the manual paysheet adjustment.

Name	Type	Description
PayToFuncCurrencyCnvrt	decimal	The rate used to convert the payment amount from the calculation currency to operating currency.
PayToHomeCurrencyCnvrt	decimal	The rate used to convert the payment amount from the calculation currency to participant's home currency.
PayeeEmployeeNumber	string	The worker (employee number) for the payee participant.
PayeeOnly	string	The current payee-only value, which indicates whether the participant is marked as a payee only.
PayeeParticipantId	long	The unique identifier for the participant record, for the participant payee.
PaymentGroupCode	string	The plan component payment plan category used to apply payment plan adjustments.
PayrunId	long	The unique identifier for the payment batch record.
PersonNumber	string	The generated identifier for the participant person record in Oracle HCM Cloud.
PlanComponentId	long	The unique identifier for the plan component record.
PlanComponentName	string	The plan component name.
RecoverableFlag	boolean	A flag that Indicates whether the payment adjustment (payment transaction adjustment or manual paysheet adjustment) is recoverable.
ReportGroup	string	The lookup code that represents the incentive type, such as bonus or commission. The incentive type is selected when defining the plan component.
RoleId	long	The unique identifier for the role record. Not currently used.
SourceEarningId	long	The unique identifier for the source earning record, from which this earning originated from.

Name	Type	Description
SourceEventDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The earning source transaction event date.
SourceOrgId	long	The unique identifier of the source business unit for the earning source transaction.
SourceSystem	string	The source system name where the record originated.
SourceSystemId	string	The generated identifier for the participant party record in the Trading Community Model.
SourceTrxNumber	string	The earning source transaction number.
SourceType	string	The lookup code that represents whether the earning source transaction was collected or entered manually. Not currently used.
SrpPlanAssignId	long	The unique identifier for the participant plan assignment record.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
TransactionType	string	The lookup code that represents the earning's source transaction type. For example, INVOICE (Invoice) or GRP (Grouped by calculation).
WaiveFlag	boolean	A paysheet indicator for whether to waive payment recovery.

Incentive Compensation Paysheet Approval

Service to manage the paysheet request for approval notification and response from eligible approvers.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/paymentSetup/paysheets/paysheetApprovalService/}PaysheetApprovalService

Service WSDL URL: https://servername/fscmService/PaysheetApprovalService?WSDL

Operations

- *approvePaysheet*
- *getAssigneesList*
- *rejectPaysheet*

approvePaysheet

Approves the task for the specified pay sheet and user. The task should be in Assigned state and Assigned to the user.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
paysheetId	string	The unique identifier of the pay sheet approval human task instance .
onBehalfOfUser	string	The identifier of the user for whom the approval is on behalf of. The user identifier can be obtained from the getAssigneesList method.
comments	string	The comments for the approval.

Response Payload

Element Name	Type	Description
result	string	Returns SUCCESS if successful.

getAssigneesList

Gets the list of assignees for the task related to a pay sheet approval as specified by the pay sheet approval instance identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
paysheetId	string	The unique identifier of the pay sheet approval human task instance .

Response Payload

Element Name	Type	Description
result	string	The list of assignees for the pay sheet approval task that matches the specified criteria. The list is in the <UserId> | <User Name> format.

rejectPaysheet

Rejects the task for the specified pay sheet and user. The task should be in Assigned state and Assigned to the user.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
paysheetId	string	The unique identifier of the pay sheet approval human task instance .
onBehalfOfUser	string	The identifier of the user for whom the approval is on behalf of. The user identifier can be obtained from the getAssigneesList method.
comments	string	The comments for the rejection.

Response Payload

Element Name	Type	Description
result	string	Returns SUCCESS if successful.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	CN_MANAGE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	Manage Incentive Compensation Dispute	Allows analysis of incentive compensation disputes.
All Operations	CN_APPROVE_INCENTIVE_COMPENSATION_PAYSHEET_PRIV	Approve Incentive Compensation Paysheet	Allows approval of worksheets that contain the payable commission, draw and recovery, and payment

Operation Name	Privilege Code	Privilege Name	Privilege Description
			adjustments for participants for a period.
All Operations	CN_CREATE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	Create Incentive Compensation Dispute	Allows creation of dispute over incentive compensation credits, earnings, payments, and goals for participant.
All Operations	CN_REVIEW_INCENTIVE_COMPENSATION_DISPUTE_PRIV	Review Incentive Compensation Dispute	Allows review and closure of incentive compensation disputes.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_REVIEW_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_MANAGER_ABSTRACT	Incentive Compensation Participant Manager	Manage participants who receive incentive compensation and review reports
CN_REVIEW_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
CN_REVIEW_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_ABSTRACT	Incentive Compensation Participant	Receive incentive compensation computed by the application and review reports
CN_REVIEW_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
CN_REVIEW_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
CN_REVIEW_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_CREATE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_MANAGER_ABSTRACT	Incentive Compensation Participant Manager	Manage participants who receive incentive compensation and review reports
CN_CREATE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_ABSTRACT	Incentive Compensation Participant	Receive incentive compensation computed by the application and review reports
CN_CREATE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
CN_CREATE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
CN_CREATE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
CN_APPROVE_INCENTIVE_COMPENSATION_PAYSHEET_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PAYMENT_CONTROL_DUTY	Incentive Compensation Payment Control	Review payment batches, paysheets, payment transactions, payment plans, and payment groups. Approve paysheets. Pay incentive compensation payment batches.
CN_MANAGE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_MANAGER_ABSTRACT	Incentive Compensation Participant Manager	Manage participants who receive incentive compensation and review reports
CN_MANAGE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_PLAN_MANAGEMENT_DUTY	Incentive Compensation Participant Snapshot Management	Assign and maintain incentive plans and transactions for participants
CN_MANAGE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
CN_MANAGE_INCENTIVE_COMPENSATION_DISPUTE_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			assists salespersons in closing deals.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_ AUTHORING_DUTY	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_CN_INCENTIVE_ COMPENSATION_PARTICIPANT_ MANAGER_ABSTRACT	ORA_CN_INCENTIVE_ COMPENSATION_PARTICIPANT_ ABSTRACT	Incentive Compensation Participant	Receive incentive compensation computed by the application and review reports
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY_FSCM	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY_FSCM	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY_FSCM	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_RESTRICTED_ USER_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_READ_ONLY_ DUTY_FSCM	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_ REVIEW_DUTY_FSCM	Sales Party Review	Allows resources read-only access to sales parties information such as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR_FSCM	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR_FSCM	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_SVC_SR_CONTRIBUTOR_FSCM	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR_FSCM	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY_FSCM	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY_FSCM	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY_FSCM	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY_FSCM	Territory Management	Manages sales territories, territory proposals, and quotas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY_FSCM	Territory Management	Manages sales territories, territory proposals, and quotas.

Incentive Compensation Rate Table

This is a service to create/Update Rate Table Value. This service can be used to update either Compensation Plan - Rate Table Value or Participant - Rate Table Value

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/compensationPlanSetup/rateTables/rateTableService/}RateTableServiceService

Service WSDL URL: https://servername/fscmService/RateTableServiceService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Incentive Compensation Rate List*

Operations

- *createUpdateRate*
- *createUpdatePlanComponentRate*
- *createUpdatePerformanceMeasureRate*

createUpdateRate

Method used to Create/Update Rate Table Value. The user who has Plan Adminstrator Role can update the base rate table value The user who has Compensation Manager/Analyst role can update the rate table value for a participant

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
buName	string	Business Unit Name. The parameter is case sensitive. Exact name as per as the UI has to be given
participantId	long	Participant Id It is mandatory for updating the Participant - Rate Table Value by the user with Compensation Manager/Analyst role. The Participant Id is not mandatory for update the Compensation Plan - Rate Table Value by the user with Plan Administator role. It should be -9999 in case 'null' has to be passed
rateTableName	string	Rate Table Name. The parameter is case sensitive. Exact name as per as the UI has to be given
rateList	*Incentive Compensation Rate List*	List Containing 1) Rate Dimension Name 2) Rate Tier Value The parameters are case sensitive. Exact name as per as the UI has to be given Rate Tier Value Example Type: Amount 0-200 Type: String Test Type: Percent 0-25 Type: Expression Exp1-/$Exp2 (Note : -/$ is being used as the delimiter as the expression name could itself contain a hyphen)
value	decimal	The Commission Value to be updated.

Response Payload

Element Name	Type	Description
result	string	Returns a message if the rate table value is created/updated successfully

createUpdatePlanComponentRate

Updates the individualized rate table values for a participant. This covers rate tables associated with plan components only.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
buName	string	The unique identifier of the business unit. It is a mandatory parameter and is case sensitive.

Element Name	Type	Description
participantId	long	The unique identifier of the participant. It is mandatory for updating the participant rate table value.
compensationPlanName	string	The name of the compensation plan which defines the participant earnings based on performance. It is a mandatory parameter and is case sensitive.
planAssignmentStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the compensation plan becomes active. The format is 'YYYY-MM-DD'. You need to pass the value only if the same compensation plan is assigned multiple times to the participant for different date ranges. In other cases, you need to pass the value as '4712-12-31'.
planAssignmentEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the compensation plan becomes inactive. The format is 'YYYY-MM-DD'. You need to pass the value only if the same compensation plan is assigned multiple times to the participant for different date ranges. In other cases, you need to pass the value as '4712-12-31'.
planComponentName	string	The name of the plan component which defines the earnings of a participant based on performance. It is a mandatory parameter and is case sensitive.
rateTableName	string	The name of a rate table which is used to establish compensation percentage rates or fixed amounts for different performance levels. It is a mandatory parameter and is case sensitive.
rateAssignmentStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the rate table becomes active for the plan component. The format is 'YYYY-MM-DD'. You need to pass the value only if the same rate table is assigned multiple times to the plan component for different date ranges. In other cases, you need to pass the value as '4712-12-31'.
rateAssignmentEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the rate table becomes inactive for that plan component. The format is 'YYYY-MM-DD'. You need to pass the value only if the same rate table is assigned multiple times to the plan component for different date ranges. In other cases, you need to pass the value as '4712-12-31'.
rateList	*Incentive Compensation Rate List*	The list containing the rate dimension name and the rate tier value. It is a mandatory parameter and is case sensitive. Examples

Element Name	Type	Description
		of the rate tier value for different types are: Type: Amount, "0-200" Type: String, "Test" Type: Percent, "0-25" Type: Expression, "Exp1-/$Exp2" Note - In Type: Expression, "-/$" is being used as the delimiter for hyphen to distinguish between the from/to values. This is done because the expression could itself contain a hyphen.
value	decimal	The commission value to be updated.

Response Payload

Element Name	Type	Description
result	string	A message if the rate table value is created/updated successfully.

createUpdatePerformanceMeasureRate

Updates the individualized rate table values for a participant. This covers rate tables associated with performance measures only.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
buName	string	The unique identifier of the business unit. It is a mandatory parameter and is case sensitive.
participantId	long	The unique identifier of the participant. It is mandatory for updating the participant rate table value.
compensationPlanName	string	The name of the compensation plan which defines the participant earnings based on performance. It is a mandatory parameter and is case sensitive.
planAssignmentStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the compensation plan becomes active. The format is 'YYYY-MM-DD'. You need to pass the value only if the same compensation plan is assigned multiple times to the participant for different date ranges. In other cases, you need to pass the value as '4712-12-31'.

Element Name	Type	Description
planAssignmentEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the compensation plan becomes inactive. The format is 'YYYY-MM-DD'. You need to pass the value only if the same compensation plan is assigned multiple times to the participant for different date ranges. In other cases, you need to pass the value as '4712-12-31'.
planComponentName	string	The name of the plan component which defines the earnings of a participant based on performance. It is a mandatory parameter and is case sensitive.
measureName	string	The name of a performance measure which defines the performance or accomplishment of a participant. It is a mandatory parameter and is case sensitive.
rateTableName	string	The name of a rate table which is used to establish compensation percentage rates or fixed amounts for different performance levels. It is a mandatory parameter and is case sensitive.
rateAssignmentStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the rate table becomes active for the performance measure. The format is 'YYYY-MM-DD'. You need to pass the value only if the same rate table is assigned multiple times to the performance measure for different date ranges. In other cases, you need to pass the value as '4712-12-31'.
rateAssignmentEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the rate table becomes inactive for that performance measure. The format is 'YYYY-MM-DD'. You need to pass the value only if the same rate table is assigned multiple times to the performance measure for different date ranges. In other cases, you need to pass the value as '4712-12-31'.
rateList	*Incentive Compensation Rate List*	The list containing the rate dimension name and the rate tier value. It is a mandatory parameter and is case sensitive. Examples of the rate tier value for different types are: Type: Amount, "0-200" Type: String, "Test" Type: Percent, "0-25" Type: Expression, "Exp1-/$Exp2" Note - In Type: Expression, "-/$" is being used as the delimiter for hyphen to distinguish between the from and to values. This is done because the expression could itself contain a hyphen.
value	decimal	The commission value to be updated.

Response Payload

Element Name	Type	Description
result	string	A message if the rate table value is created/ updated successfully.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	CN_REVIEW_INCENTIVE_ COMPENSATION_RATE_TABLE_ PRIV	Review Incentive Compensation Rate Table	Allows review of incentive compensation rate table, which enables establishment of compensation percentage rates or fixed amounts for different performance levels.
All Operations	CN_MANAGE_INCENTIVE_ COMPENSATION_RATE_TABLE_ PRIV	Manage Incentive Compensation Rate Table	Allows maintenance of incentive compensation rate table, which enables establishment of compensation percentage rates or fixed amounts for different performance levels.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_REVIEW_INCENTIVE_ COMPENSATION_RATE_TABLE_ PRIV	ORA_CN_INCENTIVE_ COMPENSATION_ASSIGNMENT_ ADMISTRATION_DUTY	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
CN_REVIEW_INCENTIVE_ COMPENSATION_RATE_TABLE_ PRIV	ORA_CN_INCENTIVE_ COMPENSATION_PARTICIPANT_ PLAN_MANAGEMENT_DUTY	Incentive Compensation Participant Snapshot Management	Assign and maintain incentive plans and transactions for participants
CN_MANAGE_INCENTIVE_ COMPENSATION_RATE_TABLE_ PRIV	ORA_CN_INCENTIVE_ COMPENSATION_PLAN_ ADMINISTRATOR_JOB	Incentive Compensation Plan Administrator	Configure and manage incentive plans, plan components, and classification rules

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.
ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups

Incentive Compensation Rate List

List to get the Rate Dimension Name, Rate Tier Value Pair

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/compensationPlanSetup/rateTables/rateTableService/}RateList

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Rate Table*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
RateDimensionName	string	Rate Dimension Name • Primary Key
RateTierValue	string	Rate Tier Value

Incentive Compensation Real Time Credit

This service enables you to credit transactions based on the credit rules setup in the application.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/transactionProcessing/transactionManagement/rtimeCreditService/}RtimeCreditTransactionsService

Service WSDL URL: https://servername/fscmService/RtimeCreditTransactionsService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Incentive Compensation Real Time Credit Transactions SDO*
Handles	*Incentive Compensation Real Time Credit Winners SDO*
Handles	*Incentive Compensation Real Time Credit Transaction Flexfield SDO*

Operations

- *creditTransactions*
- *getRtimeAttributeCattegoryServicePropertyPath*
- *getRtimeServiceNamespaceAndName*
- *getRtimeServicePropertyPaths*
- *createRtimeCreditTransactions*
- *findRtimeCreditTransactions*

creditTransactions

Method to get the participants that will receive credit

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
transactionList	*Incentive Compensation Real Time Credit Transactions SDO*	List of transactions to be credited

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Real Time Credit Winners SDO*	The list of participants that will receive credit

getRtimeAttributeCattegoryServicePropertyPath

Method to get the property path for "Attribute Category"

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	string	Property path for "Attribute Category"

getRtimeServiceNamespaceAndName

Method to get the namespace and name of the service data object for a given context value

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contextValue	string	Context value

Response Payload

Element Name	Type	Description
result	string	List of namespace and name of the service data object

getRtimeServicePropertyPaths

Method to get the property paths for a list of segments specific to an attribute category

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contextValue	string	Context value
segmentCodes	string	List of segment codes

Response Payload

Element Name	Type	Description
result	string	List of property paths for the given list of segments

createRtimeCreditTransactions

Method to create a new real time transaction

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
rtimeCreditTransactions	*Incentive Compensation Real Time Credit Transactions SDO*	Real time transaction information

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Real Time Credit Transactions SDO*	The transaction created

findRtimeCreditTransactions

Method to find an already created transaction

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	Find criteria
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find control

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Real Time Credit Transactions SDO*	List of transactions that matched the find criteria

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	CN_MAINTAIN_INCENTIVE_COMPENSATION_TRANSACTION_PRIV	Maintain Incentive Compensation Transaction	Allows verification of earning transaction detail for which the application calculated incentive compensation commission, bonus, or nonmonetary incentive.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_MAINTAIN_INCENTIVE_COMPENSATION_TRANSACTION_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_PLAN_MANAGEMENT_DUTY	Incentive Compensation Participant Snapshot Management	Assign and maintain incentive plans and transactions for participants
CN_MAINTAIN_INCENTIVE_COMPENSATION_TRANSACTION_PRIV	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.

Incentive Compensation Real Time Credit Transaction Flexfield SDO

User-defined detail of the transaction, such as state, sales channel, or any descriptive flexfields.

QName: {http://xmlns.oracle.com/apps/flex/incentiveCompensation/cn/transactionProcessing/transactionManagement/RtimeCreditTransDFF/}RtimeTransDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Incentive Compensation Real Time Credit Transactions SDO*
Handled by	*Incentive Compensation Real Time Credit*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AreaCode	string	Area code
BillingAddress	decimal	Billing address
BillingContact	decimal	Billing contact
City	string	City name
Country	string	Country name
FLEXContext	string	Flex context
PostalCode	string	Postal code
ProductItemId	decimal	Product item identifier
Province	string	Province name
SalesChannel	string	Sales channel

Name	Type	Description
ShippingAddress	decimal	Shipping address
ShippingContact	decimal	Shipping contact
SoldToCustomer	decimal	Sold to customer
State	string	State name
_FLEX_NumOfSegments	int	Number of flex segments

Incentive Compensation Real Time Credit Transactions SDO

The list of transactions for crediting, and that contains details such as transaction identifier, customer name, and product name.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/transactionProcessing/transactionManagement/rtimeCreditService/}RtimeCreditTransactions

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Incentive Compensation Real Time Credit Transaction Flexfield SDO*
Handled by	*Incentive Compensation Real Time Credit*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BusinessUnitName	string	Business Unit Name
ClsfnRuleName	string	Classification Rule Name
DiscountPercentage	decimal	Discount Percentage

Name	Type	Description
EligibleCatName	string	Eligible Category Name
MarginPercentage	decimal	Margin Percentage
ParticipantEmail	string	Participant Email
ParticipantName	string	Participant Name
RoleName	string	Role Name
RtimeCreditTransDFFVL	*Incentive Compensation Real Time Credit Transaction Flexfield SDO*	Flexfield context
SourceBusinessUnitName	string	Source Business Unit Name
SourceCurrencyCode	string	Source Currency Code
SourceEventDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Source Event Date
SourceTrxId	long	Source Transaction Id
SourceTrxLineId	long	Source Transaction Line Id
SourceTrxNumber	string	Source Transaction Number
TransactionAmountSourceCurrency	decimal	Transaction Amount
TransactionSubType	string	Transaction Sub Type
TransactionType	string	Transaction Type
UOMCode	string	Unit Of Measure

Incentive Compensation Real Time Credit Winners SDO

The list of participants who will receive credit, and that contains details such as participant name, rule name, revenue type, and split percentage.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/transactionProcessing/transactionManagement/rtimeCreditService/}RtimeCreditWinners

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Real Time Credit*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreditedParticipantId	long	Credited Participant ID
CreditedParticipantName	string	Credited Participant Name
ProcessAuditId	long	Process Audit ID
RevenueType	string	Revenue Type
SplitPct	decimal	Split Percentage
WinnerRuleId	decimal	Winner Rule ID
WinnerRuleName	string	Winner Rule Name

Incentive Compensation Transaction

Service to create, retrieve, delete, and update staging table transactions. You can also use this service to place and release holds for uncredited transactions.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/transactionProcessing/transactionManagement/publicService/}TransactionService

Service WSDL URL: https://servername/fscmService/IncentiveTransactionService?WSDL

Logical Business Objects

- IC : Incentive Compensation : Incentive Compensation Transaction

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Incentive Compensation Staging Transaction SDO*

Operations

- *holdTransaction*
- *getIncentiveTransactionStaging*
- *createIncentiveTransactionStaging*
- *updateIncentiveTransactionStaging*
- *deleteIncentiveTransactionStaging*
- *mergeIncentiveTransactionStaging*
- *findIncentiveTransactionStaging*
- *processIncentiveTransactionStaging*
- *processCSIncentiveTransactionStaging*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

holdTransaction

Holds the transaction. Applicable to transactions that are not credited.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
sourceTrxNumber	string	The transaction number.
transactionType	string	The lookup code that represents the transaction type. For example, Invoice and Order. The value must be a valid lookup code for lookup type CN_TP_TRANSACTION_TYPE. You can view the CN_TP_TRANSACTION_TYPE

Element Name	Type	Description
		lookup using the Setup and Maintenance, Manage Incentive Compensation Lookups task.

Response Payload

Element Name	Type	Description
result	boolean	Indicates if the transaction was held successfully.

getIncentiveTransactionStaging

Gets a single staging transaction that matches the transaction number, transaction type and credited participant identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
creditedParticipantId	long	The unique identifier of the credited participant.
sourceTrxNumber	string	The transaction number for the staging transaction.
transactionType	string	The transaction type code for the staging transaction. For example, Invoice or Order.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Staging Transaction*	The staging transaction that matches the specified criteria.

createIncentiveTransactionStaging

Creates a single transaction in the staging table.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
incentiveTransactionStaging	*Incentive Compensation Staging Transaction*	The input payload for the staging transaction to be created.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Staging Transaction*	The created staging transaction.

updateIncentiveTransactionStaging

Updates a single transaction in the staging table.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
incentiveTransactionStaging	*Incentive Compensation Staging Transaction*	The input payload for the staging transaction to be updated.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Staging Transaction*	The updated staging transaction.

deleteIncentiveTransactionStaging

Deletes a single transaction in the staging table.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
incentiveTransactionStaging	*Incentive Compensation Staging Transaction*	The input payload for the staging transaction to be deleted.

Response Payload

Element Name	Type	Description
result	void	No return object.

mergeIncentiveTransactionStaging

Updates a transaction in the staging table if it exists, otherwise it creates a new one.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
incentiveTransactionStaging	*Incentive Compensation Staging Transaction*	The input payload for the staging transactions to be merged.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Staging Transaction*	The updated or created staging transaction.

findIncentiveTransactionStaging

Finds and returns a list of transactions in the staging table.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria to find the staging transactions.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The control object used as a placeholder for finding staging transactions. Not currently used.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Staging Transaction*	The list of staging transactions that match the specified criteria.

processIncentiveTransactionStaging

Performs a create, update, delete or merge operation on a list of transactions in the staging table. The specified operation is applied to all objects in the given list.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The create, update, delete, or merge operation to perform.
incentiveTransactionStaging	*Incentive Compensation Staging Transaction*	The input payload for the staging transactions to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The object of type ProcessControl, which provides optional process control.

Response Payload

Element Name	Type	Description
result	*Incentive Compensation Staging Transaction*	The staging transactions for which the specified operation was applied.

processCSIncentiveTransactionStaging

Performs a create, update, delete or merge operation on a list of transactions in the staging table. Different options may be applied to different objects depending on what is specified in the Change Summary object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The input payload for the staging transactions.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The object of type ProcessControl, which provides optional process control.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The staging transactions for which the specified operation was applied.

getDfltObjAttrHints

Gets user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Gets the date and time for when the schema files, referenced in the service definition, last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	CN_MAINTAIN_INCENTIVE_COMPENSATION_TRANSACTION_PRIV	Maintain Incentive Compensation Transaction	Allows verification of earning transaction detail for which the application calculated incentive compensation commission, bonus, or nonmonetary incentive.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_MAINTAIN_INCENTIVE_COMPENSATION_TRANSACTION_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_PLAN_MANAGEMENT_DUTY	Incentive Compensation Participant Snapshot Management	Assign and maintain incentive plans and transactions for participants
CN_MAINTAIN_INCENTIVE_COMPENSATION_TRANSACTION_PRIV	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.

Incentive Compensation Staging Transaction

The input payload service data object to create and manage transactions and credits in the staging table.

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/transactionProcessing/transactionManagement/publicService/}TransactionStaging

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Incentive Compensation Transaction*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdjustmentComments	string	The commentary for an adjustment to the transaction.
AdjustmentStatus	string	The lookup code that represents the adjustment state of the transaction.
AreaCode	string	The geographic transaction attribute for the area code. The area code is a component of a phone number and is usually a 3-digit number that identifies each telephone service area in a country.
Attribute1	string	The user-definable descriptive flex field for a character data type value.
Attribute10	string	The user-definable descriptive flex field for a character data type value.
Attribute100	string	The user-definable descriptive flex field for a character data type value.
Attribute101	string	The user-definable descriptive flex field for a character data type value.
Attribute102	string	The user-definable descriptive flex field for a character data type value.

Name	Type	Description
Attribute103	string	The user-definable descriptive flex field for a character data type value.
Attribute104	string	The user-definable descriptive flex field for a character data type value.
Attribute105	string	The user-definable descriptive flex field for a character data type value.
Attribute106	string	The user-definable descriptive flex field for a character data type value.
Attribute107	string	The user-definable descriptive flex field for a character data type value.
Attribute108	string	The user-definable descriptive flex field for a character data type value.
Attribute109	string	The user-definable descriptive flex field for a character data type value.
Attribute11	string	The user-definable descriptive flex field for a character data type value.
Attribute110	string	The user-definable descriptive flex field for a character data type value.
Attribute111	string	The user-definable descriptive flex field for a character data type value.
Attribute112	string	The user-definable descriptive flex field for a character data type value.
Attribute113	string	The user-definable descriptive flex field for a character data type value.
Attribute114	string	The user-definable descriptive flex field for a character data type value.
Attribute115	string	The user-definable descriptive flex field for a character data type value.
Attribute116	string	The user-definable descriptive flex field for a character data type value.

Name	Type	Description
Attribute117	string	The user-definable descriptive flex field for a character data type value.
Attribute118	string	The user-definable descriptive flex field for a character data type value.
Attribute119	string	The user-definable descriptive flex field for a character data type value.
Attribute12	string	The user-definable descriptive flex field for a character data type value.
Attribute120	string	The user-definable descriptive flex field for a character data type value.
Attribute121	string	The user-definable descriptive flex field for a character data type value.
Attribute122	string	The user-definable descriptive flex field for a character data type value.
Attribute123	string	The user-definable descriptive flex field for a character data type value.
Attribute124	string	The user-definable descriptive flex field for a character data type value.
Attribute125	string	The user-definable descriptive flex field for a character data type value.
Attribute126	string	The user-definable descriptive flex field for a character data type value.
Attribute127	string	The user-definable descriptive flex field for a character data type value.
Attribute128	string	The user-definable descriptive flex field for a character data type value.
Attribute129	string	The user-definable descriptive flex field for a character data type value.
Attribute13	string	The user-definable descriptive flex field for a character data type value.
Attribute130	string	The user-definable descriptive flex field for a character data type value.

Name	Type	Description
Attribute131	string	The user-definable descriptive flex field for a character data type value.
Attribute132	string	The user-definable descriptive flex field for a character data type value.
Attribute133	string	The user-definable descriptive flex field for a character data type value.
Attribute134	string	The user-definable descriptive flex field for a character data type value.
Attribute135	string	The user-definable descriptive flex field for a character data type value.
Attribute136	string	The user-definable descriptive flex field for a character data type value.
Attribute137	string	The user-definable descriptive flex field for a character data type value.
Attribute138	string	The user-definable descriptive flex field for a character data type value.
Attribute139	string	The user-definable descriptive flex field for a character data type value.
Attribute14	string	The user-definable descriptive flex field for a character data type value.
Attribute140	string	The user-definable descriptive flex field for a character data type value.
Attribute141	string	The user-definable descriptive flex field for a character data type value.
Attribute142	string	The user-definable descriptive flex field for a character data type value.
Attribute143	string	The user-definable descriptive flex field for a character data type value.
Attribute144	string	The user-definable descriptive flex field for a character data type value.

Name	Type	Description
Attribute145	string	The user-definable descriptive flex field for a character data type value.
Attribute146	string	The user-definable descriptive flex field for a character data type value.
Attribute147	string	The user-definable descriptive flex field for a character data type value.
Attribute148	string	The user-definable descriptive flex field for a character data type value.
Attribute149	string	The user-definable descriptive flex field for a character data type value.
Attribute15	string	The user-definable descriptive flex field for a character data type value.
Attribute150	string	The user-definable descriptive flex field for a character data type value.
Attribute16	string	The user-definable descriptive flex field for a character data type value.
Attribute17	string	The user-definable descriptive flex field for a character data type value.
Attribute18	string	The user-definable descriptive flex field for a character data type value.
Attribute19	string	The user-definable descriptive flex field for a character data type value.
Attribute2	string	The user-definable descriptive flex field for a character data type value.
Attribute20	string	The user-definable descriptive flex field for a character data type value.
Attribute21	string	The user-definable descriptive flex field for a character data type value.
Attribute22	string	The user-definable descriptive flex field for a character data type value.
Attribute23	string	The user-definable descriptive flex field for a character data type value.

Name	Type	Description
Attribute24	string	The user-definable descriptive flex field for a character data type value.
Attribute25	string	The user-definable descriptive flex field for a character data type value.
Attribute26	string	The user-definable descriptive flex field for a character data type value.
Attribute27	string	The user-definable descriptive flex field for a character data type value.
Attribute28	string	The user-definable descriptive flex field for a character data type value.
Attribute29	string	The user-definable descriptive flex field for a character data type value.
Attribute3	string	The user-definable descriptive flex field for a character data type value.
Attribute30	string	The user-definable descriptive flex field for a character data type value.
Attribute31	string	The user-definable descriptive flex field for a character data type value.
Attribute32	string	The user-definable descriptive flex field for a character data type value.
Attribute33	string	The user-definable descriptive flex field for a character data type value.
Attribute34	string	The user-definable descriptive flex field for a character data type value.
Attribute35	string	The user-definable descriptive flex field for a character data type value.
Attribute36	string	The user-definable descriptive flex field for a character data type value.
Attribute37	string	The user-definable descriptive flex field for a character data type value.

Name	Type	Description
Attribute38	string	The user-definable descriptive flex field for a character data type value.
Attribute39	string	The user-definable descriptive flex field for a character data type value.
Attribute4	string	The user-definable descriptive flex field for a character data type value.
Attribute40	string	The user-definable descriptive flex field for a character data type value.
Attribute41	string	The user-definable descriptive flex field for a character data type value.
Attribute42	string	The user-definable descriptive flex field for a character data type value.
Attribute43	string	The user-definable descriptive flex field for a character data type value.
Attribute44	string	The user-definable descriptive flex field for a character data type value.
Attribute45	string	The user-definable descriptive flex field for a character data type value.
Attribute46	string	The user-definable descriptive flex field for a character data type value.
Attribute47	string	The user-definable descriptive flex field for a character data type value.
Attribute48	string	The user-definable descriptive flex field for a character data type value.
Attribute49	string	The user-definable descriptive flex field for a character data type value.
Attribute5	string	The user-definable descriptive flex field for a character data type value.
Attribute50	string	The user-definable descriptive flex field for a character data type value.
Attribute51	string	The user-definable descriptive flex field for a character data type value.

Name	Type	Description
Attribute52	string	The user-definable descriptive flex field for a character data type value.
Attribute53	string	The user-definable descriptive flex field for a character data type value.
Attribute54	string	The user-definable descriptive flex field for a character data type value.
Attribute55	string	The user-definable descriptive flex field for a character data type value.
Attribute56	string	The user-definable descriptive flex field for a character data type value.
Attribute57	string	The user-definable descriptive flex field for a character data type value.
Attribute58	string	The user-definable descriptive flex field for a character data type value.
Attribute59	string	The user-definable descriptive flex field for a character data type value.
Attribute6	string	The user-definable descriptive flex field for a character data type value.
Attribute60	string	The user-definable descriptive flex field for a character data type value.
Attribute61	string	The user-definable descriptive flex field for a character data type value.
Attribute62	string	The user-definable descriptive flex field for a character data type value.
Attribute63	string	The user-definable descriptive flex field for a character data type value.
Attribute64	string	The user-definable descriptive flex field for a character data type value.
Attribute65	string	The user-definable descriptive flex field for a character data type value.

Name	Type	Description
Attribute66	string	The user-definable descriptive flex field for a character data type value.
Attribute67	string	The user-definable descriptive flex field for a character data type value.
Attribute68	string	The user-definable descriptive flex field for a character data type value.
Attribute69	string	The user-definable descriptive flex field for a character data type value.
Attribute7	string	The user-definable descriptive flex field for a character data type value.
Attribute70	string	The user-definable descriptive flex field for a character data type value.
Attribute71	string	The user-definable descriptive flex field for a character data type value.
Attribute72	string	The user-definable descriptive flex field for a character data type value.
Attribute73	string	The user-definable descriptive flex field for a character data type value.
Attribute74	string	The user-definable descriptive flex field for a character data type value.
Attribute75	string	The user-definable descriptive flex field for a character data type value.
Attribute76	string	The user-definable descriptive flex field for a character data type value.
Attribute77	string	The user-definable descriptive flex field for a character data type value.
Attribute78	string	The user-definable descriptive flex field for a character data type value.
Attribute79	string	The user-definable descriptive flex field for a character data type value.
Attribute8	string	The user-definable descriptive flex field for a character data type value.

Name	Type	Description
Attribute80	string	The user-definable descriptive flex field for a character data type value.
Attribute81	string	The user-definable descriptive flex field for a character data type value.
Attribute82	string	The user-definable descriptive flex field for a character data type value.
Attribute83	string	The user-definable descriptive flex field for a character data type value.
Attribute84	string	The user-definable descriptive flex field for a character data type value.
Attribute85	string	The user-definable descriptive flex field for a character data type value.
Attribute86	string	The user-definable descriptive flex field for a character data type value.
Attribute87	string	The user-definable descriptive flex field for a character data type value.
Attribute88	string	The user-definable descriptive flex field for a character data type value.
Attribute89	string	The user-definable descriptive flex field for a character data type value.
Attribute9	string	The user-definable descriptive flex field for a character data type value.
Attribute90	string	The user-definable descriptive flex field for a character data type value.
Attribute91	string	The user-definable descriptive flex field for a character data type value.
Attribute92	string	The user-definable descriptive flex field for a character data type value.
Attribute93	string	The user-definable descriptive flex field for a character data type value.

Name	Type	Description
Attribute94	string	The user-definable descriptive flex field for a character data type value.
Attribute95	string	The user-definable descriptive flex field for a character data type value.
Attribute96	string	The user-definable descriptive flex field for a character data type value.
Attribute97	string	The user-definable descriptive flex field for a character data type value.
Attribute98	string	The user-definable descriptive flex field for a character data type value.
Attribute99	string	The user-definable descriptive flex field for a character data type value.
AttributeCategory	string	The context segment for the descriptive flex field.
AttributeNumber1	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber10	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber11	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber12	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber13	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber14	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber15	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber16	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber17	decimal	The user-definable descriptive flex field for a numeric data type value.

Name	Type	Description
AttributeNumber18	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber19	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber2	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber20	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber21	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber22	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber23	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber24	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber25	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber26	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber27	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber28	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber29	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber3	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber30	decimal	The user-definable descriptive flex field for a numeric data type value.

Name	Type	Description
AttributeNumber31	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber32	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber33	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber34	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber35	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber36	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber37	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber38	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber39	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber4	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber40	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber41	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber42	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber43	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber44	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber45	decimal	The user-definable descriptive flex field for a numeric data type value.

Name	Type	Description
AttributeNumber46	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber47	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber48	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber49	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber5	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber50	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber6	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber7	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber8	decimal	The user-definable descriptive flex field for a numeric data type value.
AttributeNumber9	decimal	The user-definable descriptive flex field for a numeric data type value.
BillToAddressId	long	The unique identifier for the customer billing location.
BillToContactId	long	The unique identifier for the contact person at the bill-to location.
BookedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the sales order was booked in the order management application.
BusinessUnitId	long	The unique identifier of the business unit record. You can view the business unit identifier for a business unit from the Setup and Maintenance, Define Business Units task. (In the search results region, click the View menu to add the Business Unit ID column.) The Incentive Compensation parameters must be defined for the business unit. You can define the parameters for the business unit scope

Name	Type	Description
		using the Setup and Maintenance, Manage Parameters task.
ChangedTrxFlag	boolean	A flag that indicates if the transaction is a new transaction or modified.
City	string	The name of the city.
ClsfnRuleId	long	The unique record identifier for the classification rule to use when classifying the transaction or credit.
CollectionStatus	string	The lookup code that represents the reason for a collection error.
Country	string	The name of the country.
CreditDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date the credit receiver received credit. The date is used to determine the credit receivers when processing the credit rules against transactions.
CreditHoldFlag	boolean	Indicates whether the application must exclude the credit from processing further
CreditRuleId	long	The unique identifier for the credit rule record.
CreditedParticipantId	long	The unique record identifier of the active participant receiving credit. You can view the participant identifier from the Participant Snapshot work area, Select Participant search results. Select the participant to navigate to the Manage Participant Details page to view the Active indicator. You can also use the participant export web service. If you are importing credits, this is a required attribute. • Primary Key
CustomerId	long	The unique identifier for customer who purchased the items or services listed on the transaction.
DiscountPercentage	decimal	The percentage of the transaction amount that depicts the net amount to be paid by the buyer.
EligibleCatId	long	The unique record identifier for the credit category to use when overriding the classification process. The credit category is a user-defined business category used to classify a transaction for compensation purposes.

Name	Type	Description
HoldFlag	boolean	The transaction hold indicator. The hold excludes an uncredited transaction from processing. If providing a value, valid values are: Y, N.
InventoryItemId	long	The unique record identifier for the inventory item.
InvoiceDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The invoice date for the transaction in the source application.
InvoiceNumber	string	The invoice number entered in the source application.
MarginPercentage	decimal	The percentage of the transaction amount that depicts the profit of the sale.
ObjectStatus	string	The lookup code that represents the current state of the transaction such as New, Obsolete, or Collection Error.
OrderNumber	string	The sales order number entered in the source application.
ParticipantId	long	The unique record identifier for the active direct participant. You can view the participant identifier from the Participant Snapshot work area, Select Participant search results. Select the participant to navigate to the Manage Participant Details page to view the Active indicator. You can also use the participant export web service.
PostalCode	string	The postal code element of the address.
ProcessCode	string	The process code is a five letter code that determines the combination of Override Classification, Preserve Credits, Do Not Roll Up, and Do Not Calculate values for the transaction. For example, the process code CCREC indicates that the Override Classification, Preserve Credits, and Do Not Roll Up check boxes are not checked and the normal calculation processing will occur. Override Classification - The first letter determines the Override Classification setting. Valid values are N and C. Enter a code starting with N to check the Override Classification checkbox. You must also provide a credit category to avoid the collection error status. For regular classification processing, enter a code starting with C. Preserve Credits - The second letter determines the Preserve

Name	Type	Description
		Credits setting. Valid values are N and C. Enter a code with N as the second letter to check the Preserve Credits checkbox. For regular credit processing, enter C. Do Not Rollup - The third letter determines the Do Not Rollup setting. Valid values are N and R. Enter a code with N as the third letter to check the Do Not Rollup checkbox. To allow rollup credit processing, enter R. Eligibility and Calculation - The last two letters indicate earnings edibility and calculation. Valid values are EC, EN,NN, and NC. Enter a code with the value of N in either or both of the fourth and fifth position to exclude the credit from calculation. For regular calculation processing, enter EC.
Province	string	The name of the province.
ReasonCode	string	The lookup code that represents the reason for adjusting a transaction. If providing a value, then the value must be a valid lookup code for lookup type CN_TP_ADJUSTMENT_REASON. You can view the CN_TP_ADJUSTMENT_REASON lookup from the Setup and Maintenance, Manage Incentive Compensation Lookups task.
RevenueType	string	The lookup code that represents the revenue type, such as REVENUE or NONREVENUE. If you are importing credits, this is a required attribute.
RoleId	long	The unique record identifier for the compensation role assigned to incentive compensation participants. Not currently used.
RollupDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date used to determine the roll up credit receivers when processing the roll up rules against transactions.
SalesChannel	string	The sales channel represents how the transaction was sold. For example, indirect or direct.
ShipToAddressId	long	The unique identifier for the customer ship-to location.
ShipToContactId	long	The unique identifier for the contact person at the ship-to location.
SourceBusinessUnitId	long	The unique identifier of the source transaction business unit record. You can view business unit identifier for a business unit from the Setup and Maintenance, Define Business Units task.

Name	Type	Description
		(In the search results region, click the View menu to add the Business Unit ID column.)
SourceCurrencyCode	string	The currency code that represents the currency of the monetary transaction amount in the source application.
SourceCurrencyCreditAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount of the credit in the source application currency. If you are importing credits, this is a required attribute.
SourceCurrencyTransactionAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount of the transaction in the source application currency. This is a required attribute.
SourceEventDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The incentive event date. The event date is used to determine the effective currency conversion rate when the participant's home currency is used as the processing currency. The date must be within a defined Incentive Compensation calendar period where the period has an Open status and the calendar is defined for the same business unit as the transaction's business unit. If the value does not meet these requirements, the transaction process status is updated to a value of Collection Error. This is a required attribute.
SourceTrxId	long	The unique number for the transaction in the source application.
SourceTrxLineId	long	The number for the transaction line in the source application.
SourceTrxNumber	string	The transaction number. Use an identifier that participants recognize and can search with, for example, an invoice number or order number. If adjusting a transaction, the combination of the business unit, transaction number, and the transaction type uniquely identify an existing transaction. This is a required attribute. • Primary Key
SourceTrxSalesLineId	long	The number for the transaction sales credit line in the source application.
SplitPct	decimal	The percent of the transaction amount that the credit receiver received. If you are importing credits, this is a required attribute.
State	string	The name of the state.

Name	Type	Description
TerrId	long	The unique identifier for the territory in the source application.
TerrName	string	The territory name in the source application.
TransactionId	long	The unique identifier for the transaction record.
TransactionQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The quantity for the transaction line item.
TransactionSubType	string	The lookup code that represents the additional categorization of the transaction type. If providing a value, then the value must be a valid lookup code for lookup type CN_TP_TRANSACTION_SUB_TYPE. You can view lookup CN_TP_TRANSACTION_SUB_TYPE from the Setup and Maintenance, Manage Incentive Compensation Lookups task.
TransactionType	string	The lookup code that represents the type of transaction, such as INVOICE or ORDER. If adjusting a transaction, the combination of the business unit, transaction number, and the transaction type uniquely identify an existing transaction. The value must be a valid lookup code for lookup type CN_TP_TRANSACTION_TYPE. You can view lookup CN_TP_TRANSACTION_TYPE from the Setup and Maintenance, Manage Incentive Compensation Lookups task. This is a required attribute. • Primary Key
UOMCode	string	The unit of measure for the transaction line item.
WorkerId	long	The worker used internally to group transactions into batches.

Loyalty Member Service

An member integration web service

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/sales/loyalty/member/service/memberService/}MemberIntegrationService

Service WSDL URL: https://servername/crmService/MemberIntegrationService?WSDL

Logical Business Objects

- CRM : Loyalty : Loyalty Member

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Card*
Handles	*Trading Community Person Profile Additional Information*
Handles	*Member Promotion Enrollment*
Handles	*Voucher*
Handles	*Loyalty Member*
Handles	*Loyalty Bucket*
Handles	*Loyalty Transaction*
Handles	*Point Type*
Handles	*Contact*
Handles	*Loyalty Member Tier*

Operations

- *getMemberAttribute*
- *getPromotionEnrollment*
- *getMember*
- *getMemberTier*
- *getMemberVoucher*
- *getMemberCard*

getMemberAttribute

A web service method that queries by Keys, a single record of Member Attribute Object

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
memberAttributeId	long	A required input parameter of the getMemberAttribute web servcie method. It is the primary key of member attribute
previousAttributeValue	string	The old value of member attribute

Response Payload

Element Name	Type	Description
result	*Point Type*	The return value of getMemberAttribute web service method. Includes the full set of attributes of the member attribute record

getPromotionEnrollment

A web service method that queries by Keys, a single record of Promotion enrollment object

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
promotionEnrollmentId	long	A required input parameter of the getPromotionEnrollment web servcie method. It is the primary key of promotion enrollment

Response Payload

Element Name	Type	Description
result	*Member Promotion Enrollment*	The return value of getPromotionEnrollment web service method. Includes the full set of attributes of the promotion record

getMember

A web service method that queries by Keys, a single record of Loyalty Member Object

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
loyMemberId	long	A required input parameter of the getMember web servcie method. It is the primary key of member

Response Payload

Element Name	Type	Description
result	*Loyalty Member*	The return value of getMember web service method. Includes the full set of attributes of the member record

getMemberTier

A web service method that queries by ID, a single record of Loyalty Member Tier Object

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
memTierId	long	A required input parameter of the getMemberTier web servcie method. It is the primary key of member tier

Response Payload

Element Name	Type	Description
result	*Loyalty Member Tier*	The return value of getMemberTier web service method. Includes the full set of attributes of the member tier record

getMemberVoucher

A web service method that queries by ID, a single record of Loyalty Member Voucher Object

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
loyMemVchrId	long	A required input parameter of the getMemberVoucher web servcie method. It is the primary key of member voucher

Response Payload

Element Name	Type	Description
result	*Voucher*	The return value of getMemberVoucher web service method. Includes the full set of attributes of the member voucher record

getMemberCard

A web service method that queries by Keys, a single record of Loyalty Member Card Object

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
loyCardId	long	A required input parameter of the getMemberCard web servcie method. It is the primary key of member card

Response Payload

Element Name	Type	Description
result	*Card*	The return value of getMemberCard web service method. Includes the full set of attributes of the member card record

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getPromotionEnrollment	LOY_MANAGE_MEMBER_PRIV	Manage Member	Allow User to view, Create, Edit, Delete Member

Operation Name	Privilege Code	Privilege Name	Privilege Description
getMember	LOY_MANAGE_MEMBER_PRIV	Manage Member	Allow User to view, Create, Edit, Delete Member
getMemberCard	LOY_MANAGE_MEMBER_PRIV	Manage Member	Allow User to view, Create, Edit, Delete Member
getMemberVoucher	LOY_MANAGE_MEMBER_PRIV	Manage Member	Allow User to view, Create, Edit, Delete Member
getMemberTier	LOY_MANAGE_MEMBER_PRIV	Manage Member	Allow User to view, Create, Edit, Delete Member
getMemberAttribute	LOY_MANAGE_MEMBER_PRIV	Manage Member	Allow User to view, Create, Edit, Delete Member

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
LOY_MANAGE_MEMBER_PRIV	ORA_LOY_MANAGEMENT_DUTY	Loyalty Management	Manages all aspects of a Loyalty Program
LOY_MANAGE_MEMBER_PRIV	ORA_LOY_MEMBER_SERVICES_DUTY	Loyalty Member Services	Manages all aspects of a Loyalty Member and Transaction

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_LOY_MANAGEMENT_DUTY	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_LOY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Card

Member Card Data Object for Loyalty Member Service

QName: {http://xmlns.oracle.com/apps/sales/loyalty/member/service/memberService/}Card

Logical Business Objects

- CRM : Loyalty : Loyalty Member

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Loyalty Member*
Handled by	*Loyalty Member Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CardNumber	string	Member card number
CardStatus	string	Card status
CardType	string	Card type
CardTypeCode	string	Member card type code
ConflictId	long	COnflict Id
CreatedBy	string	Who created the member card
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	When the member card is created
ExpiryDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Member card expiration date

Name	Type	Description
ExpiryDateOnCard	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Expiration date on card
ExpiryStampedOnCard	string	Expiration date stamped on card
IssueDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Member card issue date
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Member card last update date
LastUpdateLogin	string	Member card last update login
LastUpdatedBy	string	Member card last updated by who
LoyMemberId	long	Loyalty member Id
LoyTierId	long	Loyalty tier Id
MemberId	long	Member identifier associated with member card
MemberName	string	Member name
MemberNumber	string	Member number
MemberStatus	string	Member status
MemberStatusMeaning	string	Member status meaning
MemberTier	string	Member tier
MemberTierMeaning	string	Member tier meaning
NameOnCard	string	Name on card
PersonFirstName	string	Person first name
PersonLastName	string	Person last name
PersonName	string	Person name
PersonProfileId	long	Person profile Id

Name	Type	Description
PrConId	long	Primary contact Id
ProgramName	string	Program name
RequestDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Member card request date
StartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Member card start date
StatusCode	string	Member card status code
TierId	long	Member card tier Id
TierIdAttr	string	Tier Id attribute
TierName	string	Tier name
UpdateFlag	boolean	It indicates whehter the record can be updated

Contact

The profile information of the trading community person. The profile includes information such as marital status and additional name.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Person Profile Additional Information*
Contained by	*Trading Community Person Details*
Contained by	*Sales Account*
Contained by	*Loyalty Member*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Loyalty Member Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Alias	string	Person alias name.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DataCloudStatus	string	The enrichment status of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
DateOfDeath	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person died.
DeceasedFlag	boolean	Y or N indicates whether the person is deceased or not.
DeclaredEthnicity	string	The declared ethnicity of the person.
Department	string	The free form text used to name the department.
DepartmentCode	string	The list of values for possible department codes.
Distance	decimal	The distance from the input location.
DoNotCallFlag	boolean	Indicator to specify if the user can send mail to the person or not.
DoNotContactFlag	boolean	Indicator to specify if the user can contact the person through phone, e-mail, or mail or not.
DoNotEmailFlag	boolean	Indicator to specify if the user can send e-mail to the person or not.
DoNotMailFlag	boolean	Indicator to specify if the user can send mail to the person or not.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	The date effective entity. Y indicates that this row represents the latest change in the day.

Name	Type	Description
EffectiveSequence	int	The date effective entity. Indicates the order of different changes made during a day. The lowest value represents the earliest change in the day.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
FavoriteContactFlag	boolean	Indicator to specify if the person is key contact.
Gender	string	The gender details such as male, female, or unknown of the person.
HeadOfHouseholdFlag	boolean	The head of household indicator is not used.
HouseholdIncomeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The household income amount is not used.
HouseholdSize	decimal	The household size is not used.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
JobTitle	string	The free form text for the job title.
JobTitleCode	string	The code given to the job title.
LastContactDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the contact was last contacted.
LastEnrichmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was last enriched in DaaS.
LastKnownGPS	string	The geophysical location that is, GPS point last reported for the person.
LastSourceUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated by the source application.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdateSourceSystem	string	The source application that last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person.
MaritalStatusEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marital status of the person changed.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PersonAcademicTitle	string	The academic title that is part of the name of a person such as Dr. Jane Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonInformation	*Trading Community Person Profile Additional Information*	The information of the person.
PersonInitials	string	The Initials of the name.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.

Name	Type	Description
PersonLastNamePrefix	string	Used to identify the Last name prefix such as fon, van and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_PREFIX in HZ_PERSON_PROFILES is used. Corresponds to the field, Last Name Prefix in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonName	string	The combination of title, first, middle, last, and suffix names.
PersonNameSuffix	string	Indicates the place in a family structure. For example, III in Tom Jones III.
PersonPreNameAdjunct	string	Salutary introduction such as Mr., Herr, and so on.
PersonPreviousLastName	string	The previous last or surname of the person.
PersonProfileId	long	The unique identifier of the person profile. • Primary Key
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PersonalIncomeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated gross annual income of the person.
PlaceOfBirth	string	The place where the person was born, including city and country.
PreferredContactEmail	string	The preferred contact e-mail of the person.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactName	string	The preferred contact name of the person.

Name	Type	Description
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredContactPhone	string	The preferred contact phone of the person.
PreferredContactURL	string	The preferred contact uniform resource locator of the person.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the identifying address.
PrimaryAddressCountry	string	The country listed in the TERRITORY_CODE column of the FND_TERRITORY table for the identifying address.
PrimaryAddressCounty	string	The county of the identifying address.
PrimaryAddressLatitude	decimal	The primary address latitude information for the location for spatial proximity and containment purposes.
PrimaryAddressLine1	string	The first line of the identifying address.
PrimaryAddressLine2	string	The second line of the identifying address.
PrimaryAddressLine3	string	The third line of the identifying address.
PrimaryAddressLine4	string	The fourth line of the identifying address.
PrimaryAddressLocationId	long	The primary address location ID.

Name	Type	Description
PrimaryAddressLongitude	decimal	The primary address longitude information for the location for spatial proximity and containment purposes.
PrimaryAddressPostalCode	string	The postal code of the identifying address.
PrimaryAddressProvince	string	The province of the identifying address.
PrimaryAddressState	string	The state of the identifying address.
PrimaryCustomerId	long	The customer party identifier of a primary customer for a given person. There should be a valid relationship between the person and the customer.
PrimaryCustomerName	string	The customer party name of a primary customer for a given person. There should be a valid relationship between the person and the customer.
PrimaryCustomerRelationshipId	long	The unique identifier of the primary customer relationship.
PrimaryEmailAddress	string	The e-mail address of the person.
PrimaryEmailId	long	The primary contact point e-mail ID of the person.
PrimaryFormattedAddress	string	The primary formatted address of the person.
PrimaryFormattedPhoneNumber	string	The primary telephone number formatted in the local format of the person.
PrimaryLanguage	string	The standard name for a language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The primary contact point phone ID of the person.

Name	Type	Description
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	The uniform resource locator.
PrimaryWebId	long	The unique identifier of the primary uniform resource locator.
Pronunciation	string	The person pronunciation.
RentOwnInd	string	Indicates if the person rents or owns his or her residence. Lookup values include rent, own, lease, and so on.
RequestId	long	A system-generated read-only attribute used by the application framework.
SalesAffinityCode	string	The affinity of a person towards the deploying organization.
SalesBuyingRoleCode	string	The role of a person in the buying process.
Salutation	string	The phrase used to address a party in any correspondence.
Status	string	The status of the record.
SuffixOverriddenFlag	boolean	This attribute has Y if the suffix is overridden by user and N if not. Default value is N.
UniqueNameSuffix	string	Identifies system generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.

Loyalty Bucket

Promotion attribute data object for Loyalty Transaction Service

QName: {http://xmlns.oracle.com/apps/sales/loyalty/transaction/transactionService/}Bucket

Logical Business Objects

- CRM : Loyalty : Loyalty Transaction

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Loyalty Transaction*
Handled by	*Loyalty Member Service*
Handled by	*Loyalty Transaction*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributeDisplayName	string	Promotion attribute display name
AttributePreviousValue	string	Promotion attribute original value
AttributeValue	string	Promotion attribute current value
MemberNumber	string	Member number
PrimaryContactId	long	Primary contact Id
PromotionName	string	Promotion name
Status	string	List of Value Meaning for StatusCode

Loyalty Member

Member Data Object for Loyalty Member Service

QName: {http://xmlns.oracle.com/apps/sales/loyalty/member/service/memberService/}Member

Logical Business Objects

- CRM : Loyalty : Loyalty Member

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Card*
Contains	*Member Promotion Enrollment*
Contains	*Voucher*
Contains	*Loyalty Member*
Contains	*Loyalty Transaction*
Contains	*Point Type*
Contains	*Contact*
Contains	*Loyalty Member Tier*
Contained by	*Loyalty Member*
Handled by	*Loyalty Member Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccntId	long	Account Id

Name	Type	Description
AccountFullName	string	Account full name
AccountName	string	Account name
AccountPartyNumber	string	Account party number
AccrualLookupCode	string	Accrual lookup code
AccrualLookupType	string	Accrual lookup type
AccrualMeaning	string	Accrual meaning
AccrualStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when member starts to accrue the points
AccrualToHouseholdFlg	string	Accrual to household flag
AccrualToMemId	long	Member that any new transaction will accrual points to
AccrualType	string	Used to store the Accrual type
AccrualTypeCode	string	Accrual type code
AttributeCategory	string	Structure definition of the user descriptive flexfield
ClassLookupCode	string	Class lookup code
ClassLookupType	string	Class lookup type
ClassMeaning	string	Class meaning
ContactDateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date the contact person was born
ContactFirstName	string	Contact first name
ContactId	long	Contact Id
ContactLastName	string	Contact last name

Name	Type	Description
ContactName	string	Contact name
CorpCurrencyCode	string	Corporate currency code for extensibility
CorpMemberNumber	string	Used to store the corporate membership number reference
CreatedBy	string	Created By
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Creation Date
CreationSource	string	Creation source
CurcyConvRateType	string	Currency conversion rate type for extensibility
CurrencyCode	string	Currency code
CurrencyDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Currency date
CurrentDateTimeAttr	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Current date time attribute
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date the person was born
EditTransactionUI	*Loyalty Transaction*	Transaction object associated with Member
EmailAddress	string	Email address
FormattedPhoneNumber	string	Formatted phone number
GroupLookupCode	string	Group lookup code
GroupLookupType	string	Group lookup type
GroupMeaning	string	Group meaning
HouseholdFullName	string	Household full name
HouseholdMemIsChanged	string	Indicates whether the household member is changed

Name	Type	Description
HouseholdMember	string	Household member
HouseholdMemberId	long	Household member Id
HouseholdName	string	Household name
LastAccrTransactionDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	LLast accural transaction date
LastRdmTransactionDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the members last redemption transaction date
LastTransactionProcedDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last transaction proceed date
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last Update Date
LastUpdateLogin	string	Last Update Login
LastUpdatedBy	string	Last Updated By
LftmPointTypeAVal	decimal	Lifetime payment type A value
LftmPointTypeBVal	decimal	Lifetime payment type B value
LftmPointTypeCVal	decimal	Lifetime payment type C value
LftmPointTypeDVal	decimal	Lifetime payment type D value
LftmPointTypeEVal	decimal	Lifetime payment type E value
LftmPointTypeFVal	decimal	Lifetime payment type F value
LftmPointTypeGVal	decimal	Lifetime payment type G value
LftmPointTypeHVal	decimal	Lifetime payment type H value
LookupCode	string	Status lookup code
LookupType	string	Status lookup type
LoyAccountName	string	Name of an Account

Name	Type	Description
LoyHouseholdName	string	Name of a Household
LoyProgramName	string	Name of the Loyalty Program.
LoyaltyProgramName	string	Name of the loyalty program
LstTierChangeDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Date of member's last tier change
MemberAttributes	*Point Type*	Attributes associated with Member
MemberCard	*Card*	Member card object associated with Member
MemberClassCode	string	Member class code
MemberClassMeaning	string	Member class meaning
MemberEmailAddress	string	Email address of the member
MemberGrpCode	string	Member group code
MemberId	long	Member unique identifier
MemberName	string	Name of the member
MemberNumber	string	Member number
MemberPhaseCode	string	Member phase code
MemberPhaseMeaning	string	Member phase meaning
MemberPromotionsEnrolled	*Member Promotion Enrollment*	Member Enrollments into Enrollable Promotions.
MemberTier	*Loyalty Member Tier*	Member tier object associated to the Member
MemberTransactions	*Loyalty Transaction*	Transaction Object Associated with Member
MemberTypeCode	string	Member type code
MemberTypeMeaning	string	Member type meaning

Name	Type	Description
MemberVoucher	*Voucher*	Member voucher object associated to the Member
MembershipSchemeId	long	Refers to the product id(enrollment product)
MobileNumber	string	Mobile number
ObjectVersionNumber	int	It is used to imiplement optimistic lock
OrgGroupId	long	Orgnization group Id
OrgGroupPartyNumber	string	Organization group party number
ParentMember	string	Parent member flag
PartyId	long	Party identifier
PartyName	string	Party Name
PartyNumber	string	The Party Number of the contact associated to the Loyalty Member
PersonD	*Contact*	Person object associated to the Member
PersonFirstName	string	Person first name
PersonLastName	string	Person last name
PersonName	string	Person name
PersonProfileId	long	Person profile identifier
PhaseLookupCode	string	Phase lookup code
PhaseLookupType	string	Phase lookup type
PhaseMeaning	string	Phase meaning
PhoneNumber	string	Phone number
PointTypeAVal	decimal	Point type A value

Name	Type	Description
PointTypeBVal	decimal	Point type B value
PointTypeCVal	decimal	Point type C value
PointTypeDVal	decimal	Point type D value
PointTypeEVal	decimal	Point type E value
PointTypeFVal	decimal	Point type F value
PointTypeGVal	decimal	Point type G value
PointTypeHVal	decimal	Point type H value
Points	string	Points balance
PrConId	long	Primary contact Id
PreviousTierName	string	Previous tier name
ProgId	long	Program identification number
ProgName	string	Loyalty program name
ProgramName	string	Name of the Program
ProgramNumber	string	Program number
RealTimeBonusFlag	boolean	Real Time Bonus Flag
ReferConId	long	Primary contact Id of referral member
ReferredById	long	Referred by identification reference
ReferredByIdMember	*Loyalty Member*	Referred by member object associated to the Member
ReferredByName	string	Referred by member name
ReferredByNumber	string	Referred by member number

Name	Type	Description
RelationshipId	long	To store relationship between members
RelationshipRecId	long	Relationship record Id
RelationshipType	string	Relationship type
StartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Start date
Status	string	Member status
StatusCode	string	Status code
SuppressCall	string	Suppress call
SuppressCallFlag	boolean	Block Member Call Contact
SuppressEmail	string	Suppress email
SuppressEmailFlag	boolean	Block Member Email Contact
SuppressFax	string	Suppress fax
SuppressFaxFlag	boolean	Block Member Fax Contact
SuppressMail	string	Suppress mail
SuppressMailFlag	boolean	Block Member Mail Contact
SuppressSMS	string	Suppress SMS
SuppressSMSFlag	boolean	Block Member SMS Contact
SurvMemNumber	string	Surviving member number
TierName	string	Tier name
ValLifeScore	string	Holds the life time values score of the member
WorkPhoneNumber	string	Work phone number
cards	*Card*	Member card object associated to the Member

Name	Type	Description
promotions	*Member Promotion Enrollment*	Member Enrollments into Enrollable Promotions.
reltype	string	Relationship type
vouchers	*Voucher*	Member voucher object associated to the Member

Loyalty Member Tier

Member Tier Data Object for Loyalty Member Service

QName: {http://xmlns.oracle.com/apps/sales/loyalty/member/service/memberService/}MemberTier

Logical Business Objects

- CRM : Loyalty : Loyalty Member

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Loyalty Member*
Handled by	*Loyalty Member Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlg	string	Active flag
Comments	string	Member tier Comments
CreatedBy	string	Tier created by reference

Name	Type	Description
EndDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Member tier end date
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last update date
LookupCode	string	Reason lookup code
LookupType	string	Reason lookup type
LoyTierClsId	long	Loyalty tier class Id
LoyTierId	long	Loyalty tier Id
MemTierId	long	Primary key • Primary Key
MemberId	long	Tier associated member identifier
MemberTierNumber	string	Member tier number
NextTierName	string	Next tier name
ObjectVersionNumber	int	It is used to implement optimistic lock
PresentQualPoints	decimal	Present qualifying points
QualPointsToUpgrade	decimal	Required qualifying points to upgrade to next tier
ReasonValue	string	Reason for change the tier
StartDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Start date
StartQualPd	string	LOV Meaning of the LOV Code 'StaryQualPdCode'
StartQualPdCode	string	Start qualifying period code
TierClassId	long	Member tier identifier
TierClassName	string	Tier class name

Name	Type	Description
TierId	long	Tier identifier
TierName	string	Tier name
TierQualPoints	decimal	Tier qualifying points
TillDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Till date for upgrade to next tier

Loyalty Transaction

Transaction Data Object for Loyalty Transaction Service

QName: {http://xmlns.oracle.com/apps/sales/loyalty/transaction/transactionService/}Transaction

Logical Business Objects

- CRM : Loyalty : Loyalty Transaction

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Voucher*
Contains	*Loyalty Bucket*
Contained by	*Loyalty Member*
Handled by	*Loyalty Member Service*
Handled by	*Loyalty Transaction*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccrRuleId	long	Accrual rule Id
AccrualDisputeStatus	string	List of Value Meaning for Accrual Dispute Status
AccrualDisputeStatusCode	string	Accrual Dispute Status Code
AccrualDisputeType	string	List of Value Meaning for Accrual Dispute Type
AccrualDisputeTypeCode	string	Accrual Dispute Type Code
AccrualDisputedTransactionNumber	string	Accrual Disputed Transaction Number
ActivityDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Activity date
ActivityDay	decimal	Activity day
ActivityHour	decimal	Activity hour
AdjustedListPriceValue	decimal	Adjusted list price value
AmountValue	decimal	Amount value
ApproveDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Approve date
ApproveId	long	Approve Id
AttributeDefnBId	long	Loyalty attribute definition Id
BUId	long	BU Id
BackupInvOrgId	long	Backup InvOrgId
BackupProductNumber	string	Backup Product Number
Balance	decimal	Transaction balance
BookClassCode	string	Book class code
BookingClass	string	List of Value Meaning for Booking Class Code

Name	Type	Description
BookingDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Booking date
Bucket	*Loyalty Bucket*	Bucket object associated with transaction
CancReasonCode	string	Cancel reason code
CancelledTransactionId	long	Cancelled transaction Id
CancelledTransactionNumber	string	Cancelled transaction number
ChildTransactionId	long	Child transaction Id
ChildTransactionNumber	string	Child transaction number
Comments	string	Transaction comments
ConflictId	long	Conflict Id
CorpCurrencyCode	string	Corp currency code
CorpReferenceMemberId	long	Corp reference member Id
CorpReferenceMemberType	string	Corp reference member type
CorpReferenceName	string	Corp reference name
CorporateReferenceNumber	string	Corporate reference number
CreatedBy	string	Indicates who create the transaction
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the creation of the row
CurcyCode	string	Currency code
CurcyConvRateType	string	Currency conv rate type
CurcyExchDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Currency exchange date
Description	string	Transaction description

Name	Type	Description
DestAirport	string	List of Value Meaning for Dest Airport Code
DestAirportCode	string	Destination airport code
DestCityCode	string	Destination city code
DestZone	string	List of Value Meaning for Dest AirlineZone Code
DestZoneCode	string	Destination zone code
DisplayName	string	Point Type Name
DocumentNumber	string	Doucment number
EndDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	End date
EventName	string	Event name
ExpireInDays	decimal	Expire in days
ExternProdLineMeaning	string	Exernal product line meaning
ExternProdTypeMeaning	string	External product type meaning
ExternalProductLine	string	External product line
ExternalProductLineMeaning	string	List of Value Meaning for External Product Line Code
ExternalProductName	string	External product name
ExternalProductTyeMeaning	string	List of Value Meaning for External Product Type Code
ExternalProductType	string	External product type
ExternalReservationNumber	string	External reservation number
ExternalTransaction	string	External Transaction
FareBasis	string	Fare basis

Name	Type	Description
FareBasisCode	string	Fare basis code
FareBasisMeaning	string	List of Value Meaning for Fare Basis Code
FareType	string	List of Value Meaning for Fare Type Code
FareTypeCode	string	Fare type code
FlightNumber	string	Flight number
FltTypeCode	string	Flight type code
GdsRecLocator	string	Gds record locator
IncentivChoice	string	Incentive choice
IntegrationId	string	Integration Id
InternalDest	string	Internal destination
InternalFlightDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Internal flight date
InternalOrigin	string	Internal origin
InvOrgId	long	Inventory organization Id
InventoryItemId	long	Inventory item Id
ItemNumber	string	Item number
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the last update of the row
LastUpdateLogin	string	Indicates the session login associated to the user who last updated the row
LastUpdatedBy	string	Indicates the user who last updated the row
LineItemNumber	long	Line item number
LoanBalance	decimal	Loan balance

Name	Type	Description
LoanRepaymentDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Loan repayment date
LocationCode	long	Location code
LocationName	string	Location name
LoyMemberId	long	Loyalty member Id
LoyProgramId	long	Loyalty program Id
MarketingFlightNumber	string	marketing flight number
MemName	string	Member name
MemTypeCode	string	Member type code
MemberId	long	Member identifier
MemberName	string	Member name
MemberNumber	string	Member number
MemberTypeCode	string	Member type code
ObjectVersionNumber	int	Used to implement optimistic locking
OperCarrierId	long	Oper carrier Id
OperFltNumber	string	Oper flight number
OptyCost	decimal	Opportunity cost
OrderNumber	string	Order number
OrderQuantityValue	decimal	Order quantity value
OrganizationCode	string	Organization Code
OrganizationId	long	Organization Id

Name	Type	Description
OrigAcrlReferenceId	long	Origin accrual reference Id
OrigAirport	string	List of Value Meaning for Org Airport Code
OrigAirportCode	string	Origin airport code
OrigAmountValue	decimal	Original amount value
OrigOrdItmId	long	Origin order item Id
OrigOrderId	long	Origin order Id
OrigPoints	decimal	Origin points
OrigZone	string	List of Value Meaning for Org AirlineZone Code
OrigZoneCode	string	Origin zone code
OriginCityCode	string	Origin city code
OvrDupCheck	string	Ovr dup check flag
OwnerId	long	Owner Id
PackageCode	string	Package code
ParentTransactionId	long	Parent transaction Id
ParentTransactionNumber	string	Parent transaction number
PartitionName	string	Partition name
PartnerCompanyNumber	string	Partner Company Number
PartnerId	long	Partner Id
PartnerNumber	string	Partner Number
PartyId	long	Party Id
PartyName	string	Party name

Name	Type	Description
PartyNumber	string	Party Number
PaymentTypeMeaning	string	List of Value Meaning for Payment Type Code
PeriodDurCode	string	Period dur code
PeriodTypeCode	string	Period type code
PersonId	long	Person Id
PnrName	string	Pnr name
PnrNumber	string	Pnr number
PointTypeId	long	Point type Id
PointTypeName	string	Point type name
Points	decimal	Transaction points
PostDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Post date
PrConId	long	Primary contact Id
PrgName	string	Program name
PriceOverriden	string	Price overriden
ProcessDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Process date
ProcessingComment	string	Processing comment
ProcessingLog	string	Processing log
ProdId	long	Product Id
ProdItemNumber	string	Product Item Number
ProductDescription	string	Product description

Name	Type	Description
ProductNumber	string	Product Number
ProgId	long	Program Id
ProgName	string	Program name
ProgramName	string	Program Name
ProgramNumber	string	Transaction associated program number
Promotions	*Loyalty Bucket*	Promotion object associated with transaction
PtnrProcDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Partener process date
PtnrStatusCode	string	Partener status code
PtnrUserId	long	Partener user Id
PymtTypeCode	string	Payment type code
QualifyingPointUsed	string	Qualifying point used
QueuedProcessingFlag	boolean	Queued Processing Flag
ReasonCode	string	Reason code
RedemptionQuantityUOMCode	string	Redemption quantity UOM code
RedemptionQuantityValue	decimal	Redemption quantity value
ReferredByMemId	long	Referred by member Id
ReferredByMemNumber	string	Referred by member number
RefundPct	decimal	Refund pct
RfndOvrdCmnts	string	Refund overriden comments
RfndOvrdRsnCode	string	Refund overriden rsn code
SmActionMeaning	string	Sm action meaning

Name	Type	Description
SmActionType	string	List of Value Meaning for Social Action Type Code
SmActionTypeCode	string	Sm action type code
SmDataId	long	Sm data Id
Source	string	List of Value Meaning for Transaction Source Code
SourceCode	string	Source code
StartDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Start date
StatusCode	string	Transaction status code
StatusLookupCode	string	Status lookup code
StatusLookupType	string	Status lookup type
StatusLookupTypeValue	string	Status lookup type value
StatusMeaning	string	Transaction status meaning
SubStatus	string	List of Value Meaning for Sub Status Code
SubStatusCode	string	Substatus code
SubTypeCode	string	Transaction sub type code
SubTypeLookupCode	string	Subtype lookup code
SubTypeLookupType	string	Subtype lookup type
SubTypeMeaning	string	Transaction sub type meaning
SubTypeName	string	Sub type name
SubmitDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Submit date

Name	Type	Description
SubmitToId	long	Submit to Id
TaxAmountValue	decimal	Tax amount value
TicketNumber	string	Ticket number
ToMemberNumber	string	To member number
TotalDays	long	Storing number of days stayed in a hotel or car rented or any other service taken on per-day basis
TotalLines	decimal	Total lines
TransactionChannel	string	List of Value Meaning for Transaction Channel Code
TransactionChannelCode	string	Transaction channel code
TransactionDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Transaction date
TransactionId	long	Loyalty transaction identifier
TransactionNumber	string	Transaction number
TransactionSourceCode	string	Transaction source code
TransferMemId	long	Transfer member Id
TransferMemName	string	Transfer member name
TransferMemNumber	string	Transfer Member Number
TransferPoints	decimal	Transfer points
TransferToMember	string	Fransfer to member
TransferTransactionId	long	Transfer transaction Id
TrvClass	string	List of Value Meaning for Travel Class Code
TrvClassCode	string	Travel class code

Name	Type	Description
TrvlDistance	decimal	Travel distance
TypeCode	string	Transaction type code
TypeCodeName	string	Type code name
TypeLookupCode	string	Type lookup code
TypeMeaning	string	Transaction type meaning
UnaccMinor	string	Unacc minor
ValStatusCode	string	Val status code
Voucher	*Voucher*	Voucher object associated with transaction
VoucherId	string	Voucher Id
VoucherNumber	string	Voucher Number
VoucherQuantityValue	decimal	Voucher quantity value
VoucherTypeId	long	Voucher type Id
Vouchers	*Voucher*	Voucher object associated with transaction

Member Promotion Enrollment

Promotion enrollment data object for Loyalty Member Service

QName: {http://xmlns.oracle.com/apps/sales/loyalty/member/service/memberService/}MemberPromotionsEnrolled

Logical Business Objects

- CRM : Loyalty : Loyalty Member

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Loyalty Member*
Handled by	*Loyalty Member Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactFirstName	string	Member contact first name
ContactLastName	string	Member contact last name
EnrollmentStart	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Promotion enrollment start date
IncentiveChoice	string	Incentive choice
MemName	string	Member name
MemTierName	string	Member tier name
MemberName	string	Member name
MemberNumber	string	Member number
MemberStatusCode	string	Member status code
Name	string	Name of promotion
PrimaryContactId	long	Primary contact Id
PromoMemNumber	string	Public unique identifier of Member promotion enrolled object
PromotionName	string	Name of the promotion
PromotionNumber	string	
SubType	string	Sub type of the promotion

Name	Type	Description
SubTypeCode	string	Sub type code of the promotion
SubTypeCodeMeaning	string	Sub type meaning of the promotion
TierName	string	Tier name
TypeCode	string	Promotion type code
TypeCodeMeaning	string	Type meaning of the promotion

Point Type

Member Attributes data object for Member attributes service

QName: {http://xmlns.oracle.com/apps/sales/loyalty/member/service/memberService/}MemberAttributes

Logical Business Objects

- CRM : Loyalty : Loyalty Member

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Loyalty Member*
Handled by	*Loyalty Member Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
DisplayName	string	Member attribute display name
MemberNumber	string	Member number

Name	Type	Description
PreviousValue	string	Old member attribute value
PrimaryContactId	long	Primary contact Id
Value	string	Member attribute value

Trading Community Person Profile Additional Information

The additional information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/}PersonInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Loyalty Member Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PersonProfileId	long	The unique identifier of the person profile. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Voucher

Voucher Data Object for Loyalty Member Service

QName: {http://xmlns.oracle.com/apps/sales/loyalty/member/service/memberService/}Voucher

Logical Business Objects

- CRM : Loyalty : Loyalty Member

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Loyalty Transaction*
Contained by	*Loyalty Member*
Handled by	*Loyalty Member Service*
Handled by	*Loyalty Transaction*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActionNote	string	Action note

Name	Type	Description
ActivityDate	string	Activity date
Basis	string	List of Value Meaning for Basis Code
BasisCode	string	Voucher Basis -Tier Reward / Redemption
ConsumedTransactionId	long	Consumed transaction Id
ConsumedTransactionNumber	string	Consumed Transaction Number
CreatedBy	string	Created By
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Creation Date
CurcyExchDt	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Currency Exchange Date
CurrencyAmountValue	decimal	Currency amount value
CurrencyCode	string	Currency Code
Description	string	Voucher description
DiscountValue	string	This field signifies the discount percentage associated to the voucher
ExpirationDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Voucher expiration date
InvOrgId	long	Inventory organization Id is required for identifying the product name
InventoryItemId	long	Inventory item Id
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last Update Date
LastUpdatedBy	string	Last Updated By
LoyMemberId	long	Loyalty member Id
LoyPromoId	long	Loyalty promotion Id

Name	Type	Description
MemNumber	string	Member number
MemberId	long	Member associated member Id
MemberNumber	string	Voucher associated member number
MemberVoucherId	long	Member voucher Id
Name	string	Promotion name
ObjectVersionNumber	int	It is used to implement optimistic lock
OrganizationCode	string	Organization Code
OrganizationId	long	Organization Id
OriginalVoucherNumber	string	Original Voucher Number
PrConId	long	Member primary contact Id
ProdId	long	Product Id
ProductId	long	Product Id
ProductNumber	string	Product Number
Productdescriptionvalue	string	Product description value
PromotionNumber	string	Promotion Number
QuantityValue	decimal	Quantity value
StatusCode	string	Status code
StatusLookupCode	string	Voucher status lookup code
StatusLookupType	string	Voucher status lookup type
StatusMeaning	string	Voucher status meaning
TransactionId	long	Transaction Id

Name	Type	Description
TransactionItemId	long	Transaction item Id
TransactionNumber	string	Transaction number
UsedDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Voucher used date
VchrBasis	string	List of Value Meaning for Voucher Basis Code
VchrBasisCode	string	Voucher basis code
VoucherDiscountValue	decimal	Voucher discount value
VoucherEffectiveStartDt	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Voucher effective start date
VoucherNumber	string	Voucher number
validFlag	boolean	Voucher valid flag
voucherStatus	string	Voucher status

Loyalty Transaction

An integration web service for loyalty transaction

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/sales/loyalty/transaction/transactionService/}TransactionIntegrationService

Service WSDL URL: https://servername/crmService/TransactionIntegrationService?WSDL

Logical Business Objects

- CRM : Loyalty : Loyalty Transaction

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Voucher*
Handles	*Loyalty Bucket*
Handles	*Loyalty Transaction*

Operations

- *getPromotionAttribute*
- *getTransaction*

getPromotionAttribute

A web service method that queries by Keys, a single record of Bucket Object

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
bucketId	long	A required input parameter of the getPromotionAttribute web servcie method. It is the primary key of bucket
originalTextValues	string	Original text attribute values
originalNumberValues	string	Original number attribute values
orignialDateValues	string	Original date attribute values

Response Payload

Element Name	Type	Description
result	*Loyalty Bucket*	The return value of getPromotionAttribute web service method. Includes the full set of attributes of the bucket record

getTransaction

A web service method that queries by Keys, a single record of Loyalty Transaction Object

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
loyTransactionId	long	A required input parameter of the getTransaction web servcie method. It is the primary key of transaction

Response Payload

Element Name	Type	Description
result	*Loyalty Transaction*	The return value of getTransaction web service method. Includes the full set of attributes of the transaction record

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getPromotionAttribute	LOY_MANAGE_TRANSACTION_PRIV	Manage Transaction	Allows View, create, update and delete of Transactions
getTransaction	LOY_MANAGE_TRANSACTION_PRIV	Manage Transaction	Allows View, create, update and delete of Transactions

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
LOY_MANAGE_TRANSACTION_PRIV	ORA_LOY_MANAGEMENT_DUTY	Loyalty Management	Manages all aspects of a Loyalty Program
LOY_MANAGE_TRANSACTION_PRIV	ORA_LOY_MEMBER_SERVICES_DUTY	Loyalty Member Services	Manages all aspects of a Loyalty Member and Transaction

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_LOY_MANAGEMENT_DUTY	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_LOY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Loyalty Bucket

Promotion attribute data object for Loyalty Transaction Service

QName: {http://xmlns.oracle.com/apps/sales/loyalty/transaction/transactionService/}Bucket

Logical Business Objects

- CRM : Loyalty : Loyalty Transaction

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Loyalty Transaction*
Handled by	*Loyalty Member Service*
Handled by	*Loyalty Transaction*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributeDisplayName	string	Promotion attribute display name
AttributePreviousValue	string	Promotion attribute original value
AttributeValue	string	Promotion attribute current value
MemberNumber	string	Member number
PrimaryContactId	long	Primary contact Id
PromotionName	string	Promotion name
Status	string	List of Value Meaning for StatusCode

Loyalty Transaction

Transaction Data Object for Loyalty Transaction Service

QName: {http://xmlns.oracle.com/apps/sales/loyalty/transaction/transactionService/}Transaction

Logical Business Objects

- CRM : Loyalty : Loyalty Transaction

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Voucher*
Contains	*Loyalty Bucket*
Contained by	*Loyalty Member*
Handled by	*Loyalty Member Service*
Handled by	*Loyalty Transaction*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccrRuleId	long	Accrual rule Id
AccrualDisputeStatus	string	List of Value Meaning for Accrual Dispute Status
AccrualDisputeStatusCode	string	Accrual Dispute Status Code
AccrualDisputeType	string	List of Value Meaning for Accrual Dispute Type
AccrualDisputeTypeCode	string	Accrual Dispute Type Code
AccrualDisputedTransactionNumber	string	Accrual Disputed Transaction Number
ActivityDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Activity date
ActivityDay	decimal	Activity day
ActivityHour	decimal	Activity hour
AdjustedListPriceValue	decimal	Adjusted list price value
AmountValue	decimal	Amount value
ApproveDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Approve date
ApproveId	long	Approve Id
AttributeDefnBId	long	Loyalty attribute definition Id
BUId	long	BU Id
BackupInvOrgId	long	Backup InvOrgId
BackupProductNumber	string	Backup Product Number
Balance	decimal	Transaction balance

Name	Type	Description
BookClassCode	string	Book class code
BookingClass	string	List of Value Meaning for Booking Class Code
BookingDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Booking date
Bucket	*Loyalty Bucket*	Bucket object associated with transaction
CancReasonCode	string	Cancel reason code
CancelledTransactionId	long	Cancelled transaction Id
CancelledTransactionNumber	string	Cancelled transaction number
ChildTransactionId	long	Child transaction Id
ChildTransactionNumber	string	Child transaction number
Comments	string	Transaction comments
ConflictId	long	Conflict Id
CorpCurrencyCode	string	Corp currency code
CorpReferenceMemberId	long	Corp reference member Id
CorpReferenceMemberType	string	Corp reference member type
CorpReferenceName	string	Corp reference name
CorporateReferenceNumber	string	Corporate reference number
CreatedBy	string	Indicates who create the transaction
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the creation of the row
CurcyCode	string	Currency code
CurcyConvRateType	string	Currency conv rate type

Name	Type	Description
CurcyExchDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Currency exchange date
Description	string	Transaction description
DestAirport	string	List of Value Meaning for Dest Airport Code
DestAirportCode	string	Destination airport code
DestCityCode	string	Destination city code
DestZone	string	List of Value Meaning for Dest AirlineZone Code
DestZoneCode	string	Destination zone code
DisplayName	string	Point Type Name
DocumentNumber	string	Doucment number
EndDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	End date
EventName	string	Event name
ExpireInDays	decimal	Expire in days
ExternProdLineMeaning	string	Exernal product line meaning
ExternProdTypeMeaning	string	External product type meaning
ExternalProductLine	string	External product line
ExternalProductLineMeaning	string	List of Value Meaning for External Product Line Code
ExternalProductName	string	External product name
ExternalProductTyeMeaning	string	List of Value Meaning for External Product Type Code
ExternalProductType	string	External product type

Name	Type	Description
ExternalReservationNumber	string	External reservation number
ExternalTransaction	string	External Transaction
FareBasis	string	Fare basis
FareBasisCode	string	Fare basis code
FareBasisMeaning	string	List of Value Meaning for Fare Basis Code
FareType	string	List of Value Meaning for Fare Type Code
FareTypeCode	string	Fare type code
FlightNumber	string	Flight number
FltTypeCode	string	Flight type code
GdsRecLocator	string	Gds record locator
IncentivChoice	string	Incentive choice
IntegrationId	string	Integration Id
InternalDest	string	Internal destination
InternalFlightDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Internal flight date
InternalOrigin	string	Internal origin
InvOrgId	long	Inventory organization Id
InventoryItemId	long	Inventory item Id
ItemNumber	string	Item number
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the last update of the row
LastUpdateLogin	string	Indicates the session login associated to the user who last updated the row

Name	Type	Description
LastUpdatedBy	string	Indicates the user who last updated the row
LineItemNumber	long	Line item number
LoanBalance	decimal	Loan balance
LoanRepaymentDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Loan repayment date
LocationCode	long	Location code
LocationName	string	Location name
LoyMemberId	long	Loyalty member Id
LoyProgramId	long	Loyalty program Id
MarketingFlightNumber	string	marketing flight number
MemName	string	Member name
MemTypeCode	string	Member type code
MemberId	long	Member identifier
MemberName	string	Member name
MemberNumber	string	Member number
MemberTypeCode	string	Member type code
ObjectVersionNumber	int	Used to implement optimistic locking
OperCarrierId	long	Oper carrier Id
OperFltNumber	string	Oper flight number
OptyCost	decimal	Opportunity cost
OrderNumber	string	Order number
OrderQuantityValue	decimal	Order quantity value

Name	Type	Description
OrganizationCode	string	Organization Code
OrganizationId	long	Organization Id
OrigAcrlReferenceId	long	Origin accrual reference Id
OrigAirport	string	List of Value Meaning for Org Airport Code
OrigAirportCode	string	Origin airport code
OrigAmountValue	decimal	Original amount value
OrigOrdItmId	long	Origin order item Id
OrigOrderId	long	Origin order Id
OrigPoints	decimal	Origin points
OrigZone	string	List of Value Meaning for Org AirlineZone Code
OrigZoneCode	string	Origin zone code
OriginCityCode	string	Origin city code
OvrDupCheck	string	Ovr dup check flag
OwnerId	long	Owner Id
PackageCode	string	Package code
ParentTransactionId	long	Parent transaction Id
ParentTransactionNumber	string	Parent transaction number
PartitionName	string	Partition name
PartnerCompanyNumber	string	Partner Company Number
PartnerId	long	Partner Id
PartnerNumber	string	Partner Number

Name	Type	Description
PartyId	long	Party Id
PartyName	string	Party name
PartyNumber	string	Party Number
PaymentTypeMeaning	string	List of Value Meaning for Payment Type Code
PeriodDurCode	string	Period dur code
PeriodTypeCode	string	Period type code
PersonId	long	Person Id
PnrName	string	Pnr name
PnrNumber	string	Pnr number
PointTypeId	long	Point type Id
PointTypeName	string	Point type name
Points	decimal	Transaction points
PostDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Post date
PrConId	long	Primary contact Id
PrgName	string	Program name
PriceOverriden	string	Price overriden
ProcessDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Process date
ProcessingComment	string	Processing comment
ProcessingLog	string	Processing log
ProdId	long	Product Id

Name	Type	Description
ProdItemNumber	string	Product Item Number
ProductDescription	string	Product description
ProductNumber	string	Product Number
ProgId	long	Program Id
ProgName	string	Program name
ProgramName	string	Program Name
ProgramNumber	string	Transaction associated program number
Promotions	*Loyalty Bucket*	Promotion object associated with transaction
PtnrProcDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Partener process date
PtnrStatusCode	string	Partener status code
PtnrUserId	long	Partener user Id
PymtTypeCode	string	Payment type code
QualifyingPointUsed	string	Qualifying point used
QueuedProcessingFlag	boolean	Queued Processing Flag
ReasonCode	string	Reason code
RedemptionQuantityUOMCode	string	Redemption quantity UOM code
RedemptionQuantityValue	decimal	Redemption quantity value
ReferredByMemId	long	Referred by member Id
ReferredByMemNumber	string	Referred by member number
RefundPct	decimal	Refund pct

Name	Type	Description
RfndOvrdCmnts	string	Refund overriden comments
RfndOvrdRsnCode	string	Refund overriden rsn code
SmActionMeaning	string	Sm action meaning
SmActionType	string	List of Value Meaning for Social Action Type Code
SmActionTypeCode	string	Sm action type code
SmDataId	long	Sm data Id
Source	string	List of Value Meaning for Transaction Source Code
SourceCode	string	Source code
StartDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Start date
StatusCode	string	Transaction status code
StatusLookupCode	string	Status lookup code
StatusLookupType	string	Status lookup type
StatusLookupTypeValue	string	Status lookup type value
StatusMeaning	string	Transaction status meaning
SubStatus	string	List of Value Meaning for Sub Status Code
SubStatusCode	string	Substatus code
SubTypeCode	string	Transaction sub type code
SubTypeLookupCode	string	Subtype lookup code
SubTypeLookupType	string	Subtype lookup type
SubTypeMeaning	string	Transaction sub type meaning

Name	Type	Description
SubTypeName	string	Sub type name
SubmitDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Submit date
SubmitToId	long	Submit to Id
TaxAmountValue	decimal	Tax amount value
TicketNumber	string	Ticket number
ToMemberNumber	string	To member number
TotalDays	long	Storing number of days stayed in a hotel or car rented or any other service taken on per-day basis
TotalLines	decimal	Total lines
TransactionChannel	string	List of Value Meaning for Transaction Channel Code
TransactionChannelCode	string	Transaction channel code
TransactionDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Transaction date
TransactionId	long	Loyalty transaction identifier
TransactionNumber	string	Transaction number
TransactionSourceCode	string	Transaction source code
TransferMemId	long	Transfer member Id
TransferMemName	string	Transfer member name
TransferMemNumber	string	Transfer Member Number
TransferPoints	decimal	Transfer points
TransferToMember	string	Fransfer to member

Name	Type	Description
TransferTransactionId	long	Transfer transaction Id
TrvClass	string	List of Value Meaning for Travel Class Code
TrvClassCode	string	Travel class code
TrvlDistance	decimal	Travel distance
TypeCode	string	Transaction type code
TypeCodeName	string	Type code name
TypeLookupCode	string	Type lookup code
TypeMeaning	string	Transaction type meaning
UnaccMinor	string	Unacc minor
ValStatusCode	string	Val status code
Voucher	*Voucher*	Voucher object associated with transaction
VoucherId	string	Voucher Id
VoucherNumber	string	Voucher Number
VoucherQuantityValue	decimal	Voucher quantity value
VoucherTypeId	long	Voucher type Id
Vouchers	*Voucher*	Voucher object associated with transaction

Voucher

Voucher Data Object for Loyalty Member Service

QName: {http://xmlns.oracle.com/apps/sales/loyalty/member/service/memberService/}Voucher

Logical Business Objects

- CRM : Loyalty : Loyalty Member

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Loyalty Transaction*
Contained by	*Loyalty Member*
Handled by	*Loyalty Member Service*
Handled by	*Loyalty Transaction*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActionNote	string	Action note
ActivityDate	string	Activity date
Basis	string	List of Value Meaning for Basis Code
BasisCode	string	Voucher Basis -Tier Reward / Redemption
ConsumedTransactionId	long	Consumed transaction Id
ConsumedTransactionNumber	string	Consumed Transaction Number
CreatedBy	string	Created By
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Creation Date
CurcyExchDt	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Currency Exchange Date

Name	Type	Description
CurrencyAmountValue	decimal	Currency amount value
CurrencyCode	string	Currency Code
Description	string	Voucher description
DiscountValue	string	This field signifies the discount percentage associated to the voucher
ExpirationDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Voucher expiration date
InvOrgId	long	Inventory organization Id is required for identifying the product name
InventoryItemId	long	Inventory item Id
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last Update Date
LastUpdatedBy	string	Last Updated By
LoyMemberId	long	Loyalty member Id
LoyPromoId	long	Loyalty promotion Id
MemNumber	string	Member number
MemberId	long	Member associated member Id
MemberNumber	string	Voucher associated member number
MemberVoucherId	long	Member voucher Id
Name	string	Promotion name
ObjectVersionNumber	int	It is used to implement optimistic lock
OrganizationCode	string	Organization Code
OrganizationId	long	Organization Id
OriginalVoucherNumber	string	Original Voucher Number

Name	Type	Description
PrConId	long	Member primary contact Id
ProdId	long	Product Id
ProductId	long	Product Id
ProductNumber	string	Product Number
Productdescriptionvalue	string	Product description value
PromotionNumber	string	Promotion Number
QuantityValue	decimal	Quantity value
StatusCode	string	Status code
StatusLookupCode	string	Voucher status lookup code
StatusLookupType	string	Voucher status lookup type
StatusMeaning	string	Voucher status meaning
TransactionId	long	Transaction Id
TransactionItemId	long	Transaction item Id
TransactionNumber	string	Transaction number
UsedDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Voucher used date
VchrBasis	string	List of Value Meaning for Voucher Basis Code
VchrBasisCode	string	Voucher basis code
VoucherDiscountValue	decimal	Voucher discount value
VoucherEffectiveStartDt	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Voucher effective start date
VoucherNumber	string	Voucher number

Name	Type	Description
validFlag	boolean	Voucher valid flag
voucherStatus	string	Voucher status

MDF Service

Service to operate on marketing budgets including market development funds. The supported operations are create, update, delete, and search.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/marketingBudgetService/}MarketingBudgetService

Service WSDL URL: https://servername/crmService/MarketingBudgetService?WSDL

Logical Business Objects

- CRM : Marketing : Marketing Budget

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Previous version is	*Marketing Budget Service*
Handles	*MDF Claim*
Handles	*MDF Budget Team*
Handles	*Marketing Budget Entry Version 2*
Handles	*MDF Budget*
Handles	*MDF Request Team*
Handles	*MDF Request*

Relationship Type	Object or Service
Handles	*MDF Claim Settlement*
Handles	*Marketing Budget Translation Version 2*
Handles	*MDF Claim Team*

Operations

- *getBudget*
- *createBudget*
- *updateBudget*
- *deleteBudget*
- *findBudget*
- *getBudgetEntry*
- *createBudgetEntry*
- *updateBudgetEntry*
- *findBudgetEntry*
- *getClaim*
- *createClaim*
- *updateClaim*
- *deleteClaim*
- *findClaim*
- *getClaimSettlements*
- *createClaimSettlements*
- *updateClaimSettlements*
- *findClaimSettlements*
- *getFundRequest*
- *createFundRequest*
- *updateFundRequest*
- *deleteFundRequest*
- *findFundRequest*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getBudget

A web service method for Get operation of the Marketing Budget.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budgetId	long	The unique identifier of the Marketing Budget.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}BudgetResult	The service returns a Marketing Budget that matches the inbound key attributes.

createBudget

A web service method for Create operation of the Marketing Budget.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budget	*MDF Budget*	The service for the Marketing Budget to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}BudgetResult	The service returns the created Marketing Budget.

updateBudget

A web service method for Update operation of the Marketing Budget.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budget	*MDF Budget*	The service for the Marketing Budget to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}BudgetResult	The service returns the updated Marketing Budget.

deleteBudget

A web service method for Delete operation of the Marketing Budget.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budget	*MDF Budget*	The service for the Marketing Budget to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The parameter is not applicable for the method deleteBudget.

findBudget

A web service method that queries a single record of Marketing Budget by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBudgetEntry web service method. The filter criteria is a cumulative set of attribute criteria that identifies the Marketing Budget records.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findBudget.

Response Payload

Element Name	Type	Description
result	*MDF Budget*	The return value of the findBudget web service method. It includes the full set of attributes of the record.

getBudgetEntry

A web service method for Get operation of the Marketing Budget Entry.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budgetEntryId	long	Returns a uniquely identified budget entry associated to a marketing budget.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}BudgetEntryResult	The service returns the Marketing Budget Entry that matches the inbound key attributes.

createBudgetEntry

A web service method for Create operation of the Marketing Budget Entry.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budgetEntry	*Marketing Budget Entry Version 2*	The service for the Marketing Budget Entry to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}BudgetEntryResult	The service returns the created Marketing Budget Entry.

updateBudgetEntry

A web service method for Update operation of the Marketing Budget Entry.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budgetEntry	*Marketing Budget Entry Version 2*	The service for the Marketing Budget Entry to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}BudgetEntryResult	The service returns the updated Marketing Budget Entry.

findBudgetEntry

A web service method that queries a single record of Marketing Budget Entry by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBudgetEntry web service method. The filter

Element Name	Type	Description
		criteria is a cumulative set of attribute criteria that identifies Marketing Budget Entry records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findBudgetEntry.

Response Payload

Element Name	Type	Description
result	*Marketing Budget Entry Version 2*	The return value of the findBudgetEntry web service method. It includes the full set of attributes of the record.

getClaim

A web service method for Get operation of the Marketing Claim.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claimId	long	Returns a uniquely identified claim associated to a marketing budget or fund request.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}ClaimResult	Marketing Claim that matches the inbound key attributes.

createClaim

A web service method for Create operation of the Marketing Claim.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claim	*MDF Claim*	The service for the Marketing Claim to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}ClaimResult	The service returns the created Marketing Claim.

updateClaim

A web service method for Update operation of the Marketing Claim.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claim	*MDF Claim*	The service for the Marketing Claim to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}ClaimResult	The service returns the updated Marketing Claim.

deleteClaim

A web service method for Delete operation of the Marketing Claim.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claim	*MDF Claim*	The service for the Marketing Claim to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The parameter is not applicable for the method deleteClaim.

findClaim

A web service method that queries a single record of Marketing Claim by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBudgetEntry web service method. The filter criteria is a cumulative set of attribute criteria that will identify Marketing Claim records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findClaim.

Response Payload

Element Name	Type	Description
result	*MDF Claim*	The return value of the findClaim web service method. It includes the full set of attributes of the record.

getClaimSettlements

A web service method for Get operation of the Marketing Claim Settlements.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claimSettlementId	long	Returns a uniquely identified claim settlement associated to a marketing claim.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}ClaimSettlementsResult	The service returns a Marketing Claim Settlement that matches the inbound key attributes.

createClaimSettlements

A web service method for Create operation of the Marketing Claim Settlement.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claimSettlements	*MDF Claim Settlement*	The service for the Marketing Claim Settlement to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}ClaimSettlementsResult	The service returns the created Marketing Claim Settlement.

updateClaimSettlements

A web service method for Update operation of the Marketing Claim Settlement.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claimSettlements	*MDF Claim Settlement*	The service for the Marketing Claim Settlement to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}ClaimSettlementsResult	The service returns the updated Marketing Claim Settlement.

findClaimSettlements

A web service method that queries a single record of Marketing Claim Settlement by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBudgetEntry web service method. The filter criteria is a cumulative set of attribute criteria that identifies marketing claim settlement records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findClaimSettlements.

Response Payload

Element Name	Type	Description
result	*MDF Claim Settlement*	The return value of the findClaimSettlement web service method. It includes the full set of attributes of the record.

getFundRequest

A web service method for Get operation of the Marketing Fund Request.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fundRequestId	long	Returns a uniquely identified fund request associated to a marketing budget.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}FundRequestResult	The service returns Marketing Fund Request that matches the inbound key attributes.

createFundRequest

A web service method for Create operation of the Marketing Fund Request.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fundRequest	*MDF Request*	The service for the Marketing Fund Request to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}FundRequestResult	The service returns the created Marketing Fund Request.

updateFundRequest

A web service method for Update operation of the Marketing Fund Request.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fundRequest	*MDF Request*	The service for the Marketing Fund Request to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}FundRequestResult	The service returns the updated Marketing Fund Request.

Element Name	Type	Description

deleteFundRequest

A web service method for Delete operation of the Marketing Fund Request.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fundRequest	*MDF Request*	The service for the Marketing Fund Request to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The parameter is not applicable for the method deleteFundRequest.

findFundRequest

A web service method that queries a single record of Marketing Fund Request by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findFundRequest web service method. The filter criteria is a cumulative set of attribute criteria that identifies marketing fund request records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findFundRequest.

Response Payload

Element Name	Type	Description
result	*MDF Request*	The return value of the findFundRequest web service method. It includes the full set of attributes of the record.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated. The parameter is present in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKT_VIEW_MARKETING_CLAIM_PRIV	View Marketing Claim	
All Operations	MKT_UPDATE_MARKETING_FUND_REQUEST_PRIV	Update Marketing Fund Request	Allows updating requests to allocate marketing budget funds for anticipated marketing expenses.
All Operations	MKT_UPDATE_MARKETING_CLAIM_SETTLEMENT_PRIV	Update Marketing Claim Settlement	Allows updating settlements of marketing claims after reimbursement of actual expenses.
All Operations	MKT_UPDATE_MARKETING_FUND_REQUEST_APPROVAL_DETAILS_PRIV	Update Marketing Fund Request Approval Details	Allows updating the MDF request approval details

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKT_VIEW_MARKETING_FUND_REQUEST_PRIV	View Marketing Fund Request	
All Operations	MKT_CREATE_MARKETING_BUDGET_PRIV	Create Marketing Budget	
All Operations	MKT_UPDATE_COMPLETED_MARKETING_CLAIM_SETTLEMENT_PRIV	Update Completed Marketing Claim Settlement	Allows updating the attributes of MDF Marketing Claim Settlements in Complete status
All Operations	MKT_CREATE_MARKETING_CLAIM_SETTLEMENT_PRIV	Create Marketing Claim Settlement	Allows creating settlements of marketing claims after reimbursement of actual expenses.
All Operations	MKT_UPDATE_MARKETING_CLAIM_SETTLEMENT_DETAILS_PRIV	Update Marketing Claim Settlement Details	Allows updating the attributes of MDF Marketing Claim Settlements
All Operations	MKT_CREATE_MARKETING_CLAIM_PRIV	Create Marketing Claim	
All Operations	MKT_VIEW_MARKETING_BUDGET_ANALYTICS_PRIV	View Marketing Budget Analytics	Allows viewing marketing budget analytics. A marketing budget is used to track budgeted funds for marketing activities and requests and claims for those funds.
All Operations	MKT_UPDATE_MARKETING_CLAIM_PRIV	Update Marketing Claim	Allows updating claims to marketing budgets for reimbursement of actual expenses.
All Operations	MKT_UPDATE_MARKETING_BUDGET_PRIV	Update Marketing Budget	Allows updating a marketing budget used to track budgeted funds for marketing activities and requests for those funds.
All Operations	MKT_VIEW_MARKETING_BUDGET_ENTRY_PRIV	View Marketing Budget Entry	
All Operations	MKT_UPDATE_MARKETING_CLAIM_APPROVAL_DETAILS_PRIV	Update Marketing Claim Approval Details	Allows updating the MDF claim approval details
All Operations	MKT_VIEW_MARKETING_CLAIM_SETTLEMENT_PRIV	View Marketing Claim Settlement	Allows viewing settlements of marketing claims after reimbursement of actual expenses.
All Operations	MKT_CREATE_MARKETING_BUDGET_ENTRY_PRIV	Create Marketing Budget Entry	

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKT_VIEW_MARKETING_BUDGET_PRIV	View Marketing Budget	Allows viewing a marketing budget used to track budgeted funds for marketing activities and requests for those funds.
All Operations	MKT_VIEW_MARKETING_BUDGET_CHECKBOOK_PRIV	View Marketing Budget Checkbook	Allows viewing a marketing budget checkbook used to track budgeted funds for marketing activities and request and claims for those funds.
All Operations	MKT_UPDATE_MARKETING_BUDGET_ENTRY_PRIV	Update Marketing Budget Entry	Allows updating entries for a marketing budget that establish the budget amount.
All Operations	MKT_UPDATE_MARKETING_FUND_REQUEST_BUDGET_DETAILS_PRIV	Update Marketing Fund Request Budget Details	Allows updating the MDF request budget details
All Operations	MKT_CREATE_MARKETING_FUND_REQUEST_PRIV	Create Marketing Fund Request	

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_UPDATE_MARKETING_FUND_REQUEST_PRIV	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
MKT_UPDATE_MARKETING_CLAIM_APPROVAL_DETAILS_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
MKT_UPDATE_MARKETING_CLAIM_APPROVAL_DETAILS_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
MKT_UPDATE_MARKETING_CLAIM_APPROVAL_DETAILS_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_UPDATE_MARKETING_CLAIM_APPROVAL_DETAILS_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
MKT_UPDATE_MARKETING_CLAIM_SETTLEMENT_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_UPDATE_MARKETING_BUDGET_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_CLAIM_SETTLEMENT_PRIV	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
MKT_VIEW_MARKETING_CLAIM_SETTLEMENT_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_CLAIM_SETTLEMENT_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing activities. Includes reviewing and exporting budget information.
MKT_UPDATE_MARKETING_FUND_REQUEST_BUDGET_DETAILS_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
MKT_CREATE_MARKETING_CLAIM_SETTLEMENT_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_UPDATE_MARKETING_FUND_REQUEST_APPROVAL_DETAILS_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_UPDATE_MARKETING_FUND_REQUEST_APPROVAL_DETAILS_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
MKT_UPDATE_MARKETING_FUND_REQUEST_APPROVAL_DETAILS_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
MKT_UPDATE_MARKETING_FUND_REQUEST_APPROVAL_DETAILS_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
MKT_VIEW_MARKETING_BUDGET_CHECKBOOK_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_BUDGET_CHECKBOOK_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing activities. Includes reviewing and exporting budget information.
MKT_VIEW_MARKETING_FUND_REQUEST_PRIV	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
MKT_VIEW_MARKETING_FUND_REQUEST_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_FUND_REQUEST_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing activities. Includes reviewing and exporting budget information.
MKT_CREATE_MARKETING_CLAIM_PRIV	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
MKT_CREATE_MARKETING_BUDGET_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
	APPLICATION_ADMINISTRATOR_JOB		Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MKT_CREATE_MARKETING_BUDGET_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
MKT_CREATE_MARKETING_BUDGET_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
MKT_CREATE_MARKETING_FUND_REQUEST_PRIV	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
MKT_UPDATE_COMPLETED_MARKETING_CLAIM_SETTLEMENT_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
MKT_UPDATE_MARKETING_CLAIM_SETTLEMENT_DETAILS_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
MKT_UPDATE_MARKETING_CLAIM_SETTLEMENT_DETAILS_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
MKT_UPDATE_MARKETING_CLAIM_SETTLEMENT_DETAILS_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
MKT_UPDATE_MARKETING_CLAIM_SETTLEMENT_DETAILS_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_VIEW_MARKETING_BUDGET_ENTRY_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_BUDGET_ENTRY_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing activities. Includes reviewing and exporting budget information.
MKT_UPDATE_MARKETING_CLAIM_PRIV	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
MKT_VIEW_MARKETING_BUDGET_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_BUDGET_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing activities. Includes reviewing and exporting budget information.
MKT_VIEW_MARKETING_CLAIM_PRIV	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
MKT_VIEW_MARKETING_CLAIM_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_CLAIM_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing activities. Includes reviewing and exporting budget information.
MKT_CREATE_MARKETING_BUDGET_ENTRY_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_UPDATE_MARKETING_BUDGET_ENTRY_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			budgeted funds for marketing activities.
MKT_VIEW_MARKETING_BUDGET_ANALYTICS_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_BUDGET_ANALYTICS_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing activities. Includes reviewing and exporting budget information.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			products or events to specific customers.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			management setup and quota management administration.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

MDF Budget

The budget, and its details, of monetary incentives for partners to execute marketing activities.

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}Budget

Logical Business Objects

- CRM : Marketing : Marketing Budget

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*MDF Budget Team*
Contains	*Marketing Budget Translation Version 2*
Handled by	*MDF Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivatedBy	string	The user who activated the marketing budget.
ActivatedById	long	The ID of the person who activated the marketing budget.
ActivationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The marketing budget activation date.
AdditionalReferenceId	long	The additional reference identifier associated to the marketing budget, that identifies a particular partner program or marketing source.
AdditionalReferenceSourceCode	string	Display label for two attributes, reference type and reference value. It provides a secondary reference in addition to the primary reference. When the additional reference type is marketing source code, the reference value containing the source code is stored in this attribute.

Name	Type	Description
AdditionalReferenceType	string	The type of the additional reference associated to the marketing budget, that is, partner program or marketing source.
AllowNegativeBalanceFlag	boolean	The check box that enables fund requests and claims submission which may cause the marketing budget to go negative upon approval.
BudgetCode	string	The user-defined, unique marketing budget label.
BudgetId	long	The unique identifier for the marketing budget. • Primary Key
BudgetName	string	The display name for the marketing budget.
BudgetSource	string	The parent budget that is the source of the marketing budget.
BudgetTeam	*MDF Budget Team*	The Resources/Team associated to the Budget.
BudgetTranslation	*Marketing Budget Translation Version 2*	The reference to the budget translation service data object with translation information.
BudgetType	string	The type of marketing budget such as internal only or partner.
CategoryCode	string	The attribute used to enter and categorize marketing budgets.
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Description	string	The free text description of the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.

Name	Type	Description
ExchangeRate	decimal	The conversion rate of a marketing budget.
FundingToleranceAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total marketing budget amount multiplied by the funding tolerance percent.
GeneralLedgerAccount	string	The reference to the general ledger account where marketing budgeted funds are reserved or accounted.
InactivatedBy	string	The user who inactivated the marketing budget.
InactivatedById	long	The ID of the person who inactivated the marketing budget.
InactivationDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The date when the marketing budget was inactivated.
InitialBudgetAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The original or starting marketing budget amount.
LastCalculatedDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The last calculation date of the marketing budget check book that factors in fund requests, claims, and marketing budget entries.
LastUpdatedBy	string	The user who last updated the record.
NumberClaimsPendingApproval	decimal	The number of claims pending approval.
NumberFundRequestPendingApproval	decimal	The number of fund requests pending approval.
OverdraftThreshold	decimal	The amount in percentage that a fund request can exceed above the available marketing budget amount. By default, the value is 10%.
OwnerId	long	The internal resource responsible for the management of the marketing budget.
OwnerPartyNumber	string	Public Unique Identifier for the Resource.
PartnerCompanyNumber	string	Public Unique Identifier for the Partner.
PartnerId	long	The unique identifier of the partner.

Name	Type	Description
PrimaryReferenceId	long	The primary reference is a display label for two attributes placed side by side that include a reference type and reference value. An additional string provides a hidden label for the second 'value' field.
PrimaryReferenceSourceCode	string	The primary reference for a marketing budget is a display label for two attributes placed side by side that include a reference type and reference value. When the primary reference type is marketing source code, the reference value containing the source code is stored in this attribute.
PrimaryReferenceType	string	The primary reference is a display label for two attributes placed side by side that include a reference type and reference value. An additional string provides a hidden label for the second 'value' field.
Region	string	The regions used to categorize marketing budgets by geographical area.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
StatusCode	string	The pre-defined code used to indicate the status.
SubmitClaimsBy	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The last date a marketing budget claim is accepted for reimbursement.
SubmitFundRequestBy	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The last date a marketing budget fund request is accepted.
TotalApprovedClaimAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of approved claims for expense reimbursements against the marketing budget.
TotalApprovedRequestAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total approved fund requests for a marketing budget.
TotalAvailableBudgetAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The marketing budget amount available for fund requests and claims.
TotalBudgetAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total marketing budget amount based on the initial marketing budget plus any adjustments.

Name	Type	Description
TotalClaimAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of marketing budget claims for reimbursement that are submitted, pending approval, approved, or rejected.
TotalClaimSettledAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of marketing budget claims for reimbursement that are financially settled.
TotalCreditAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount from all marketing budget accounting entries of type credit.
TotalDebitAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount from all marketing budget accounting entries of type debit.
TotalOutstandingClaimLiabilityAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of marketing budget claims for reimbursement that are approved but not settled.
TotalPendingClaimAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of claims that are submitted or pending approval.
TotalPendingFundRequestAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of fund requests that are submitted or pending approval.
TotalRejectedClaimAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of claims for reimbursement that are rejected.
TotalRejectedFundRequestAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of fund requests that are rejected.
TotalRequestedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount from all fund requests that are submitted, pending approval, approved, or rejected.
TotalUnclaimedFundRequestAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total approved fund requests less the total approved claims.

MDF Budget Team

The budget, and its details, of monetary incentives for partners to execute marketing activities.

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}BudgetTeam

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*MDF Budget*
Handled by	*MDF Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	The Access Level Code of the resource within the campaign.
BudgetCode	string	Public Unique Identifier for the marketing Budget.
BudgetId	long	The unique identifier for the marketing budget.
BudgetTeamId	long	The system-generated, unique identifier for the marketing budget team. • Primary Key
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
EmailAddress1	string	The email address associated with the record.
FormattedPhoneNumber	string	The formatted phone number.
MembershipType	string	The type of membership.
Name	string	The name of the resource associated to team.
OwnerFlag	boolean	The owner flag.

Name	Type	Description
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
ResourceId	long	The unique identifier of the resource.
ResourceOrgId	long	The identifier of the resource organization.
ResourcePartyNumber	string	Public Unique Identifier for the Resource.
ResourceType	string	The type of the resource.
UserFunction	string	The user function.
UserFunctionCode	string	The user function code.

MDF Claim

The request for reimbursement of marketing expenses submitted by a partner.

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}Claim

Logical Business Objects

- CRM : Marketing : Marketing Budget

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*MDF Claim Team*
Handled by	*MDF Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityOutcome	string	Partner Activity Out come.
AdditionalReferenceId	long	The additional reference identifier associated to the marketing claim, that identifies a particular partner program or marketing source.
AdditionalReferenceSourceCode	string	Display label for two attributes, reference type and reference value. It provides a secondary reference in addition to the primary reference. When the additional reference type is marketing source code, the reference value containing the source code is stored in this attribute.
AdditionalReferenceType	string	The type of the additional reference associated to the marketing claim, that is, partner program or marketing source.
Age	decimal	The number of days since the creation of the marketing claim.
ApprovedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount approved for the marketing claim.
ApprovedBy	string	The user who approved the marketing claim.
ApprovedById	long	The id of person who approved the marketing claim.
ApprovedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marketing claim was approved.
BudgetId	long	The unique identifier for the marketing budget.
BudgetName	string	The display name of the marketing budget associated to the marketing claim.
ChannelManagerId	long	The resource identifier of the partner owner associated to the claim.
ClaimAging	string	The number of days since the creation of the marketing claim.

Name	Type	Description
ClaimAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount submitted for the marketing claim.
ClaimCode	string	The user-defined, unique label for the marketing claim.
ClaimCreationMethod	string	The method used to create the marketing claim. For example manually, via file import or via web service.
ClaimId	long	The system-generated, unique identifier of the marketing claim. • Primary Key
ClaimName	string	The display name of the marketing claim.
ClaimResource	*MDF Claim Team*	The claim resource.
ClaimStatusCode	string	The status code of the marketing claim.
Comments	string	The comments for the record.
ConversionRateType	string	The currency conversion rate type that is used to derive the exchange rate for converting the user-entered currency to CRM Corporate currency.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Description	string	The free text description of the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
ExpenseCategoryCode	string	The expense category that matches a budget category, used for reporting purposes.
FundRequestCode	string	Public Unique Identifier for the marketing fund request.

Name	Type	Description
FundRequestId	long	The marketing fund request associated to the marketing claim.
LastUpdatedBy	string	The user who last updated the record.
OutstngClaimLiabilityAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The outstanding claim Liability amount.
OwnerId	long	The owner of marketing claim.
OwnerName	string	The name of the owner of the marketing claim.
OwnerPartyNumber	string	Public Unique Identifier for the Resource.
PartnerCompanyNumber	string	Public Unique Identifier for the Partner.
PartnerContactId	long	The partner contact associated to the marketing claim.
PartnerId	long	The unique identifier of the partner.
PartnerName	string	The partner account name associated to the marketing claim.
RejectedBy	string	The user who rejected the marketing claim.
RejectedById	long	The id of person who rejected the marketing claim.
RejectedDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The date when the marketing claim was rejected.
RejectionReasonCode	string	The reason for rejecting the marketing claim.
SubmittedBy	string	The user who submitted the marketing claim.
SubmittedById	long	The id of person who submitted the marketing claim.
SubmittedDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The submission date of the marketing claim.

MDF Claim Settlement

The payments made to partners for reimbursement of marketing expenses incurred by them.

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}ClaimSettlements

Logical Business Objects

- CRM : Marketing : Marketing Budget

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*MDF Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountClassification	string	The account classification for the claim settlement account.
AccountingType	string	The accounting type of the marketing claim settlement, which represents a credit or debit in the back-end financial system.
ActiveFlag	boolean	Indicates the activity status of the marketing claim settlement as Active or Inactive.
AdditionalReferenceCode	string	The additional reference associated to the marketing claim settlement, that identifies a particular partner program or marketing source.
AdditionalReferenceType	string	The type of the additional reference associated to the marketing claim settlement, that is, partner program or marketing source.
BudgetCurrencyExchangeRate	decimal	The exchange rate used to convert from the marketing claim settlement currency to the parent budget currency.

Name	Type	Description
BudgetId	decimal	The unique identifier for the marketing budget.
ClaimCode	string	Public Uinique Identifier for the marketing claim.
ClaimCurrencyExchangeRate	decimal	The exchange rate used to convert from the marketing claim settlement currency to the parent marketing claim currency.
ClaimId	decimal	The system-generated, unique identifier of the parent marketing claim for the marketing claim settlement.
ClaimSettlementAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount settled for the marketing claim settlement.
ClaimSettlementCode	string	The user-defined, unique label for the marketing claim settlement.
ClaimSettlementId	long	The system-generated, unique identifier of the marketing claim settlement. • Primary Key
ClaimSettlementType	string	The type of marketing claim settlement. For example, deduction or payment.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreationMethod	string	The method used to create the marketing claim settlement. For example, manually, file import, or web service.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Description	string	The free text description of the record.
InactivatedBy	string	The user who inactivated the marketing claim settlement.
InactivationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marketing claim was inactivated.

Name	Type	Description
InvoiceReference	string	The reference identifier of the vendor invoice to be settled with the marketing claim settlement.
LastUpdatedBy	string	The user who last updated the record.
PaymentCheckReference	string	The reference identifier of the check that covers the marketing claim settlement, issued by the back-end financial system to the vendor.
PaymentMethod	string	The payment method used to cover the marketing claim settlement.
StatusCode	string	The pre-defined code used to indicate the status.
TransactionDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the claim settlement is processed or turns to Complete status.
TransactionMethod	string	The method through which the claim settlement transaction is processed.

MDF Claim Team

The request for reimbursement of marketing expenses submitted by a partner.

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}ClaimResource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*MDF Claim*
Handled by	*MDF Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	The Access Level Code of the resource within the campaign.
ClaimCode	string	Public Unique Identifier for the marketing claim.
ClaimId	long	The unique identifier of the claim.
ClaimResourceId	long	The system-generated, unique identifier for the marketing claim resource. • Primary Key
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
FormattedPhoneNumber	string	The formatted phone number.
LastUpdatedBy	string	The user who last updated the record.
MemberFunctionCode	string	The code of the member function.
OwnerFlag	boolean	The owner flag.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
ResourceId	long	The unique identifier of the resource.
ResourcePartyNumber	string	Public Unique Identifier for the Resource.
ResourceUsername	string	The user name of the resource.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

MDF Request

The request for a portion of the budget to be allocated towards execution of marketing activities.

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}FundRequest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*MDF Request Team*
Handled by	*MDF Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date of the request.
ActivityStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date of the MDF request.
AdditionalReferenceId	long	The additional reference identifier associated to the marketing budget, that identifies a particular partner program or marketing source.
AdditionalReferenceSourceCode	string	Display label for two attributes, reference type and reference value. It provides a secondary reference in addition to the primary reference. When the additional reference type is marketing source code, the reference value containing the source code is stored in this attribute.
AdditionalReferenceType	string	The type of the additional reference associated to the marketing fund request, that is, partner program or marketing source.
Age	decimal	The number of days since the creation of the marketing fund request.

Name	Type	Description
ApprovedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount approved for the marketing fund request.
ApprovedAmountPercent	decimal	The percentage of the approved amount.
ApprovedBy	string	The user who approved the marketing fund request.
ApprovedById	long	The Id of person who approved the marketing fund request.
ApprovedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marketing fund request was approved.
AvailableFundRequestAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The difference between total approved marketing fund request and total approved claim amounts, which is available to new claims.
BudgetCode	string	Public Unique Identifier for the marketing Budget.
BudgetId	long	The unique identifier for the marketing budget.
ChannelManager	string	The channel manager for the fund request.
ChannelManagerId	long	The identifier of the channel manager.
Comments	string	The comments for the record.
ConversionRateType	string	The currency conversion rate type that is used to derive the exchange rate for converting the user-entered currency to CRM Corporate currency.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Description	string	The free text description of the record.
FundRequestCode	string	The user-defined, unique label for the marketing fund request.

Name	Type	Description
FundRequestId	long	The system-generated, unique identifier for the marketing fund request. • Primary Key
FundRequestName	string	The display name for the marketing fund request.
FundRequestResource	*MDF Request Team*	The fund request resource.
FundRequestStatusCode	string	The status code of the marketing fund request.
FundRequestType	string	The type of the fund request.
Justification	string	The justification for the request.
LastUpdatedBy	string	The user who last updated the record.
OriginalFundRequestId	long	The unique identifier of the initial fund request to allocate marketing budget funds for anticipated marketing expenses.
OwnerId	long	The owner of marketing fund request.
OwnerName	string	The name of the owner of the marketing fund request.
OwnerPartyNumber	string	Public Unique Identifier for the Resource.
PartnerCompanyNumber	string	Public Unique Identifier for the Partner.
PartnerContactId	long	The partner contact identifier associated to the marketing fund request.
PartnerId	long	The unique identifier of the partner.
PartnerName	string	The partner account identifier name associated to the marketing fund request.
RejectedBy	string	The user who rejected the marketing fund request.
RejectedById	long	The id of person who rejected the marketing fund request.

Name	Type	Description
RejectedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marketing fund request was rejected.
RejectionReasonCode	string	The reason for rejecting the marketing fund request.
RequestedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount submitted for the marketing fund request.
SubmittedBy	string	The user who submitted the marketing fund request.
SubmittedById	long	The id of person who submitted the marketing fund request.
SubmittedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The submission date of the marketing fund request.
TotalApprovedClaimAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of all approved claims for the marketing fund request.

MDF Request Team

The request for a portion of the budget to be allocated towards execution of marketing activities.

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}FundRequestResource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*MDF Request*
Handled by	*MDF Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	The Access Level Code of the resource within the campaign.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
FormattedPhoneNumber	string	The formatted phone number.
FundRequestCode	string	Public Unique Identifier for the marketing fund request.
FundRequestId	long	The system-generated, unique identifier for the marketing fund request.
FundRequestResourceId	long	The system-generated, unique identifier for the marketing fund request resource. • Primary Key
LastUpdatedBy	string	The user who last updated the record.
MemberFunctionCode	string	The code of the member function.
OwnerFlag	boolean	The owner flag.
PartyId	long	The unique identifier of the contact party.
ResourceId	long	The unique identifier of the resource.
ResourceName	string	The name of the resource.
ResourcePartyNumber	string	Public Unique Identifier for the Resource.
ResourceUsername	string	The user name of the resource.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Name	Type	Description

Marketing Budget Entry Version 2

The marketing budget entry that includes any changes or adjustments to a marketing budget after the initial budget is created.

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}BudgetEntry

Logical Business Objects

- CRM : Marketing : Marketing Budget

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*MDF Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountTypeCode	string	The accounting type of the marketing budget entry, which can be a credit or a debit to the total budget amount.
ActiveFlag	boolean	Indicates the activity status of the marketing budget entry as Active or Inactive.
AdditionalReference	string	The additional reference identifier associated to the marketing budget entry, that identifies a particular partner program or marketing source.
AdditionalReferenceType	string	The type of the additional reference associated to the marketing budget entry, that is, partner program or marketing source.
BudgetEntryAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount entered for the marketing budget entry.

Name	Type	Description
BudgetEntryCode	string	The user-defined, unique label for the marketing budget entry.
BudgetEntryId	long	The system-generated, unique identifier for the marketing budget entry. • Primary Key
BudgetEntryType	string	The extensible type of marketing budget entry.
BudgetId	long	The unique identifier for the marketing budget.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Description	string	The free text description of the record.
EffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the marketing budget entry becomes effective and accounted for in the budget balance summary.
ExchangeRate	decimal	The exchange rate used to convert from the marketing budget entry currency to the parent budget currency.
InactivatedBy	string	The user who inactivated the marketing budget entry.
InactivationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marketing budget entry was inactivated.
LastUpdatedBy	string	The user who last updated the record.
StatusCode	string	The pre-defined code used to indicate the status.
TargetBudgetEntryId	long	The unique identifier for the marketing target budget entry to track changes or adjustment made (transfer in and transfer out transactions) to a marketing budget after the initial budget is created.

Name	Type	Description
TargetBudgetId	long	The unique identifier for the marketing budget funds that will be transferred from (for Transfer In request) or transferred to (for Transfer Out request).

Marketing Budget Service

Service to operate on marketing budgets including market development funds. The supported operations are create, update, delete, and search. WARNING: This service has been deprecated and is being replaced with Marketing Budget Service Version 2 (oracle.apps.marketing.commonMarketing.budgets.budgetService.MarketingBudgetService).

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/oracle/apps/marketing/commonMarketing/budgets/budgetPublicService/}BudgetPublicService

Service WSDL URL: https://servername/crmService/BudgetPublicService?WSDL

Logical Business Objects

- CRM : Marketing : Marketing Budget

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*MDF Service*
Handles	*Marketing Claim*
Handles	*Marketing Fund Request*
Handles	*Marketing Budget Entry*
Handles	*Marketing Budget*
Handles	*Marketing Claim Settlement*
Handles	*Marketing Budget Translation*

Operations

- *getBudgetEntry*
- *createBudgetEntry*
- *updateBudgetEntry*
- *findBudgetEntry*
- *getClaim*
- *createClaim*
- *updateClaim*
- *deleteClaim*
- *findClaim*
- *getClaimSettlement*
- *createClaimSettlement*
- *updateClaimSettlement*
- *findClaimSettlement*
- *getFundRequest*
- *createFundRequest*
- *updateFundRequest*
- *deleteFundRequest*
- *findFundRequest*
- *getBudget*
- *createBudget*
- *updateBudget*
- *deleteBudget*
- *findBudget*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getBudgetEntry

A web service method for Get operation of the Marketing Budget Entry.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budgetEntryId	long	Returns a uniquely identified budget entry associated to a marketing budget.

Response Payload

Element Name	Type	Description
result	*Marketing Budget Entry*	The service returns the Marketing Budget Entry that matches the inbound key attributes.

createBudgetEntry

A web service method for Create operation of the Marketing Budget Entry.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budgetEntry	*Marketing Budget Entry*	The service for the Marketing Budget Entry to be created.

Response Payload

Element Name	Type	Description
result	*Marketing Budget Entry*	The service returns the created Marketing Budget Entry.

updateBudgetEntry

A web service method for Update operation of the Marketing Budget Entry.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budgetEntry	*Marketing Budget Entry*	The service for the Marketing Budget Entry to be updated.

Response Payload

Element Name	Type	Description
result	*Marketing Budget Entry*	The service returns the updated Marketing Budget Entry.

Element Name	Type	Description

findBudgetEntry

A web service method that queries a single record of Marketing Budget Entry by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBudgetEntry web service method. The filter criteria are a cumulative set of attribute criteria that identifies Marketing Budget Entry records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findBudgetEntry.

Response Payload

Element Name	Type	Description
result	*Marketing Budget Entry*	The return value of the findBudgetEntry web service method. It includes the full set of attributes of the record.

getClaim

A web service method for Get operation of the Marketing Claim.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claimId	long	Returns a uniquely identified claim associated to a marketing budget or fund request.

Response Payload

Element Name	Type	Description
result	*Marketing Claim*	Marketing Claim that matches the inbound key attributes.

createClaim

A web service method for Create operation of the Marketing Claim.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claim	*Marketing Claim*	The service for the Marketing Claim to be created.

Response Payload

Element Name	Type	Description
result	*Marketing Claim*	The service returns the created Marketing Claim.

updateClaim

A web service method for Update operation of the Marketing Claim.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claim	*Marketing Claim*	The service for the Marketing Claim to be updated.

Response Payload

Element Name	Type	Description
result	*Marketing Claim*	The service returns the updated Marketing Claim.

deleteClaim

A web service method for Delete operation of the Marketing Claim.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claim	*Marketing Claim*	The service for the Marketing Claim to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteClaim.

findClaim

A web service method that queries a single record of Marketing Claim by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBudgetEntry web service method. The filter criteria are a cumulative set of attribute criteria that identifies Marketing Claim records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findClaim.

Response Payload

Element Name	Type	Description
result	*Marketing Claim*	The return value of the findClaim web service method. It includes the full set of attributes of the record.

getClaimSettlement

A web service method for Get operation of the Marketing Claim Settlements.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claimSettlementId	long	Returns a uniquely identified claim settlement associated to a marketing claim.

Response Payload

Element Name	Type	Description
result	*Marketing Claim Settlement*	The service returns a Marketing Claim Settlement that matches the inbound key attributes.

createClaimSettlement

A web service method for Create operation of the Marketing Claim Settlement.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claimSettlement	*Marketing Claim Settlement*	The service for the Marketing Claim Settlement to be created.

Response Payload

Element Name	Type	Description
result	*Marketing Claim Settlement*	The service returns the created Marketing Claim Settlement.

updateClaimSettlement

A web service method for Update operation of the Marketing Claim Settlement.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claimSettlement	*Marketing Claim Settlement*	The service for the Marketing Claim Settlement to be updated.

Response Payload

Element Name	Type	Description
result	*Marketing Claim Settlement*	The service returns the updated Marketing Claim Settlement.

findClaimSettlement

A web service method that queries a single record of Marketing Claim Settlement by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBudgetEntry web service method. The filter criteria are a cumulative set of attribute criteria that identifies marketing claim settlement records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findClaimSettlements.

Response Payload

Element Name	Type	Description
result	*Marketing Claim Settlement*	The return value of the findClaimSettlement web service method. It includes the full set of attributes of the record.

getFundRequest

A web service method for Get operation of the Marketing Fund Request.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fundRequestId	long	Returns a uniquely identified fund request associated to a marketing budget.

Response Payload

Element Name	Type	Description
result	*Marketing Fund Request*	The service returns Marketing Fund Request that matches the inbound key attributes.

createFundRequest

A web service method for Create operation of the Marketing Fund Request.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fundRequest	*Marketing Fund Request*	The service for the Marketing Fund Request to be created.

Response Payload

Element Name	Type	Description
result	*Marketing Fund Request*	The service returns the created Marketing Fund Request.

updateFundRequest

A web service method for Update operation of the Marketing Fund Request.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fundRequest	*Marketing Fund Request*	The service for the Marketing Fund Request to be updated.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	*Marketing Fund Request*	The service returns the updated Marketing Fund Request.

deleteFundRequest

A web service method for Delete operation of the Marketing Fund Request.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fundRequest	*Marketing Fund Request*	The service for the Marketing Fund Request to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteFundRequest.

findFundRequest

A web service method that queries a single record of Marketing Fund Request by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findFundRequest web service method. The filter criteria are a cumulative set of attribute criteria that identifies marketing fund request records.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findFundRequest.

Response Payload

Element Name	Type	Description
result	*Marketing Fund Request*	The return value of the findFundRequest web service method. It includes the full set of attributes of the record.

getBudget

A web service method for Get operation of the Marketing Budget.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budgetId	long	The unique identifier of the Marketing Budget.

Response Payload

Element Name	Type	Description
result	*Marketing Budget*	The service returns a Marketing Budget that matches the inbound key attributes.

createBudget

A web service method for Create operation of the Marketing Budget.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budget1	*Marketing Budget*	The service for the Marketing Budget to be created.

Response Payload

Element Name	Type	Description
result	*Marketing Budget*	The service returns the created Marketing Budget.

updateBudget

A web service method for Update operation of the Marketing Budget.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budget1	*Marketing Budget*	The service for the Marketing Budget to be updated.

Response Payload

Element Name	Type	Description
result	*Marketing Budget*	The service returns the updated Marketing Budget.

deleteBudget

A web service method for Delete operation of the Marketing Budget.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budget1	*Marketing Budget*	The service for the Marketing Budget to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteBudget.

findBudget

A web service method that queries a single record of Marketing Budget by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBudgetEntry web service method. The filter criteria are a cumulative set of attribute criteria that identifies the Marketing Budget records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findBudget.

Response Payload

Element Name	Type	Description
result	*Marketing Budget*	The return value of the findBudget web service method. It includes the full set of attributes of the record.

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

A web service method that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated. The parameter is present in ISO 8601 format.

getEntityList

A web service method to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the Object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKT_MANAGE_BUDGETS_WORK_AREA_PRIV	Manage Budgets Work Area	Allows managing marketing budgets from the work area. A work area is a landing page for frequent tasks and reports useful for managing budgets.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_MANAGE_BUDGETS_WORK_AREA_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_MANAGE_BUDGETS_WORK_AREA_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing activities. Includes reviewing and exporting budget information.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.

Marketing Budget Translation Version 2

The marketing budget that includes details of the monetary incentives for partners to execute marketing activities. This service data object includes translatable attributes.

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}BudgetTranslation

Logical Business Objects

- CRM : Marketing : Marketing Budget

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*MDF Budget*
Handled by	*MDF Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BudgetId	long	The unique identifier for the marketing budget. • Primary Key
BudgetName	string	The display name for the marketing budget.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
Language	string	The target translation language for the marketing budget. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
SourceLanguage	string	The source translation language for the marketing budget.

Manage Process Submission

Service to submit incentive compensation processes. Processes include transaction collection, crediting, classification, and calculation. Other processes include participant import, plan deployment, and currency rate import.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/incentiveCompensation/cn/processes/manageProcess/manageProcessSubmissionService/}ManageProcessSubmissionService

Service WSDL URL: https://servername/fscmService/ManageProcessSubmissionService?WSDL

Logical Business Objects

- IC : Incentive Compensation : Incentive Compensation Calculation Batch
- IC : Incentive Compensation : Incentive Compensation Calculation Batch
- IC : Incentive Compensation : Incentive Compensation Calculation Batch
- IC : Incentive Compensation : Incentive Compensation Calculation Batch
- IC : Incentive Compensation : Incentive Compensation Calculation Batch
- IC : Incentive Compensation : Incentive Compensation Calculation Batch

Operations

- *submitTransactionsJob*
- *submitRollupJob*
- *submitRevertTransactionsJob*
- *submitPayPayrunJob*
- *submitParticipantImportJob*
- *submitParticipantDetailImportJob*
- *submitDeployPlansJob*
- *submitDeployCreditRulesJob*
- *submitDeployClassificationRulesJob*
- *submitCreditingJob*
- *submitCreditingAndRollupJob*
- *submitCreatePayrunJob*
- *submitCollectionJob*
- *submitClassificationsJob*
- *submitCalculationJob*
- *submitCalculateAllJob*
- *getICJobStatus*
- *submitCurrencyRateslimportJob*

- *submitDeployIncentivePlansJob*
- *submitCalculateAllPEROrgJob*
- *submitCalculateSpecificParticipants*
- *submitCreditingAndRollupJobWithRuleSet*
- *submitCreditingJobWithRuleSet*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

submitTransactionsJob

Submits the Import Transactions to Staging process to import transactions from a file into the transaction staging table.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fileName	string	The name of the file containing the transactions to be imported into the staging table.
documentId	string	The identifier for the file that resides in Oracle Web Center Content repository. If you do not provide the document identifier, then use the value #NULL to indicate an empty value.
retainFile	string	Indicates whether the method should keep or delete the file after the process successfully completes. The value is Y, then the file is retained.

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

submitRollupJob

Submits the Generate Incentive Rollup Credits process. Indirect credit transactions are created for participants when rollup rules are processed for the rollup hierarchy.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	The incentive compensation business unit name.
startDate	string	The start of the date range used to select credits for indirect crediting. Use the format YYYY-MM-DD. For example, 2016-12-01.
endDate	string	The last date, of the date range, used to select credits for indirect crediting. Use the format YYYY-MM-DD. For example, 2016-12-31.
runFor	string	The run for mode. The mode is either New or All. Use the New option to process transactions that have not been processed before. Use the All option to process all eligible transactions for the date range.

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

submitRevertTransactionsJob

Submits the Revert Incentive Transactions process. The revert process moves obsolete transactions and credits to history tables and creates any adjustment offsets if related earnings were processed through payment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	The incentive compensation business unit name.
type	string	The transaction type.
startDate	string	The start of the date range used to select the obsolete transactions and credits for processing. Use the format YYYY-MM-DD. For example, 2016-12-01.
endDate	string	The last date, of the date range, used to select the obsolete transactions and credits for

Element Name	Type	Description
		processing. Use the format YYYY-MM-DD. For example, 2016-12-31.

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

submitPayPayrunJob

Submits the Pay Incentive Payment Batch process to update the payment batch and pay sheets to paid.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	The incentive compensation business unit name.
payrunName	string	The name of the payment batch.

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

submitParticipantImportJob

Submits the Import Incentive Participants process. The import process collects participants from staging tables or from HCM cloud persons and Sales cloud parties.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
scenarioName	string	The value CN_IMPORT_PARTICIPANTS is provided.
scenarioVersion	string	The value 001 is provided.
runFor	string	The run for mode. The mode is either Oracle Incentive Compensation Participant Import or Staging and Oracle Incentive Compensation Participant Import. Use the Staging and Oracle Incentive Compensation Participant Import if you are using Oracle Sales Cloud. This option collects matching parties and persons for participant import. Use the Oracle Incentive Compensation Participant Import mode for on-premise installations when you populate the participant staging table.
orgName	string	The incentive compensation business unit name.
targetCountry	string	The override participant country. If you do not provide the country, then use the value #NULL to indicate an empty value. A default value is provided.
targetParticipantHomeCurrency	string	The override participant home currency. If you do not provide the currency, then use the value #NULL to indicate an empty value. The default currency is the business unit operating currency defined using the Setup and Maintenance, Manage Parameters task.
activeStartDate	string	The date when the override participant becomes active. If you provide a date, use the format YYYY-MM-DD. For example, 2016-01-21. If you do not provide a date, use the value #NULL and a default value will be derived.
analyst	string	The incentive compensation analyst that is assigned to the participant. For example, Hughes, Ryan. If you do not provide the analyst, use the value #NULL to indicate an empty value.
participantType	string	The participant type. Valid values are Participant and Analyst.
partyUsage	string	The party usage selection criteria. For example, HR Employee.
startDate	string	The start date selection criteria. Use the format YYYY-MM-DD. For example, 2016-12-01. If you

Element Name	Type	Description
		do not provide the date, then use the value #NULL to indicate an empty value.
endDate	string	The end date of the selection criteria. If you provide a date, then use the format YYYY-MM-DD. For example, 2016-12-31. If you do not provide the date, then use the value #NULL to indicate an empty value.
partyName	string	The party name selection criteria. If you do not provide the party name, use the value #NULL to indicate an empty value.
resourceRole	string	The resource role selection criteria. If you do not provide the resource role, use the value #NULL to indicate an empty value.
hcmJob	string	The HCM job selection criteria. If you do not provide the job, then use the value #NULL to indicate an empty value.
roleType	string	The resource role type selection criteria. If you do not provide the resource role type, then use the value #NULL to indicate an empty value.
country	string	The country selection criteria, for example, Canada. If you do not provide the country, use the value #NULL to indicate an empty value.
personNumber	string	The person number selection criteria. If you do not provide the person number, use the value #NULL to indicate an empty value.

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

submitParticipantDetailImportJob

Submits the Incentive Compensation Participant Detail Import process to import participant updates from a source file.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fileName	string	The name of the file containing the participant details to be imported into the staging table.
documentId	string	The identifier for the file that resides in Oracle Web Center Content repository. If you do not provide the document identifier, then use the value #NULL to indicate an empty value.
retainFile	string	Indicates whether the method should keep or delete the file after the process successfully completes. The value is Y, then the file is retained.

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

submitDeployPlansJob

Submits the Deploy Incentive Plans process. The deployment process creates participant assignments to compensation plans, pay groups, and payment plans based on roles.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	The incentive compensation business unit name.

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

submitDeployCreditRulesJob

Submits the Deploy Incentive Credit Rules process. The deployment process flattens credit rules to enhance performance while generating direct and indirect credits.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
startDate	string	The start of the date range used to select the rules to deploy. Use the format YYYY-MM-DD. For example, 2016-12-01.
endDate	string	The last date, of the date range, used to select the rules to deploy. Use the format YYYY-MM-DD. For example, 2016-12-31.

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

submitDeployClassificationRulesJob

Submits the Deploy Incentive Classification Rules process. The deployment process flattens classification rules to enhance performance while identifying credit categories used in calculation.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
startDate	string	The start of the date range used to select the rules to deploy. Use the format YYYY-MM-DD. For example, 2016-12-01.
endDate	string	The last date, of the date range, used to select the rules to deploy. Use the format YYYY-MM-DD. For example, 2016-12-31.

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

submitCreditingJob

Submits the Generate Direct Incentive Credits process. Direct credit transactions are created for participants when credit rules are matched against transaction attributes.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	The incentive compensation business unit name.
startDate	string	The start of the date range used to select transactions for crediting. Use the format YYYY-MM-DD. For example, 2016-12-01.
endDate	string	The last date, of the date range, used to select transactions for crediting. Use the format YYYY-MM-DD. For example, 2016-12-31.
type	string	The run for mode. The mode is either New or All. Use the New option to process transactions that have not been processed before. Use the All option to process all eligible transactions for the date range.

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

submitCreditingAndRollupJob

Submits the Generate Direct and Indirect Incentive Credits process. Direct and indirect credit transactions are created for participants when credit hierarchy rules are processed.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	The incentive compensation business unit name.
startDate	string	The start of the date range used to select transactions can credits for direct and indirect crediting. Use the format YYYY-MM-DD. For example, 2016-12-01.
endDate	string	The last date, of the date range, used to select transactions and credits for direct and indirect crediting. Use the format YYYY-MM-DD. For example, 2016-12-31.
runFor	string	The run for mode. The mode is either New or All. Use the New option to process transactions that have not been processed before. Use the All option to process all eligible transactions for the date range.

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

submitCreatePayrunJob

Submits the Create Incentive Payment Batch process. A payment batch generates the participant pay sheets.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	The incentive compensation business unit name.
payrunName	string	The name of the payment batch.

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

submitCollectionJob

Submits the Collect Transactions process. Transactions are used to credit and calculate incentives. Required input parameters are the collection business unit, the date range for the transactions you are collecting, and the transaction type. You may optionally specify the organization from which the transactions originated.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
scenarioName	string	The value CN_IMPORT_TRANSACTIONS is provided.
scenarioVersion	string	The value 001 is provided.
sourceOrgName	string	The source business unit name.
orgName	string	The incentive compensation business unit name.
startDate	string	The start of the date range used to select transactions for collection from the staging table. Use the format YYYY-MM-DD. For example, 2016-12-01.
endDate	string	The last date, of the date range, used to select transactions for collection from the staging table. Use the format YYYY-MM-DD. For example, 2016-12-31.
transactionType	string	The lookup code that represents the transaction type, such as Invoice and Order.

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

submitClassificationsJob

Submits the Classify Incentive Transactions process. This process classifies incentive compensation transactions or credits using classification rules.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	The incentive compensation business unit name.
startDate	string	The start of the date range used to select transactions or credits for classification. Use the format YYYY-MM-DD. For example, 2016-12-01.
endDate	string	The last date, of the date range, used to select transactions or credits for classification. Use the format YYYY-MM-DD. For example, 2016-12-31.
type	string	The run for mode. The mode is either New or All. Use the New option to classify transactions or credits not classified before. Use the All option to process all eligible transactions or credits for the date range.

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

submitCalculationJob

Submits the Calculate Incentive Earnings process. This process calculates commission and bonus incentive earnings based on incentive plans.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	The business unit for which the process runs.
batchName	string	The name of the calculation process.

Element Name	Type	Description
fromDate	string	The start of the date range used to calculate earnings. Use the format YYYY-MM-DD. For example, 2016-12-01.
toDate	string	The last date, of the date range, used to calculate earnings. Use the format YYYY-MM-DD. For example, 2016-12-31.

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

submitCalculateAllJob

Submits the Calculate Incentive Earnings process synchronously. This process calculates commission and bonus incentive earnings based on incentive plans for all participants in a business unit and date range.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	The business unit for which the process runs.
startDate	string	The start of the date range to calculate earnings. Use the format YYYY-MM-DD. For example, 2016-12-01.
endDate	string	The last date, of the date range, used to calculate earnings. Use the format YYYY-MM-DD. For example, 2016-12-31.
runFor	string	The run for mode. The mode is either Incremental or Total. Use the Incremental mode to consider only new credits and updated plan configurations since the last calculation run. Use the Total mode to consider all transactions in the incentive compensation transaction table.

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

getICJobStatus

Gets the current status for a single incentive compensation process as specified by the request identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
requestId	string	The request identifier is returned by each of the submitted processes and passed to this method to find the current status of the process.

Response Payload

Element Name	Type	Description
result	string	The current process status.

submitCurrencyRateslimportJob

Submits the Import Currency Conversion Rates process to import currency conversion rates from a source file.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fileName	string	The name of the file containing the conversion rate details to be imported into the staging table.
documentId	string	The identifier for the file that resides in Oracle Web Center Content repository. If you do not provide the document identifier, then use the value #NULL to indicate an empty value.
retainFile	string	Indicates whether the method should keep or delete the file after the process successfully completes. The value is Y, then the file is retained.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	string	The request identifier is returned when this process is submitted successfully.

submitDeployIncentivePlansJob

Method to operate on compensation plans and groups. The deployment process creates participant assignments to compensation plans, pay groups, and payment plans based on roles associated to these entities. Call this service to run the plan deployment process in either total or incremental mode.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	Unique identifier for the business unit.
deployOnlySRPCOMPDirectPlanAssgnRqts	string	If this is enabled then the Deploy Incentive Plans process will only complete the processing of direct participant assignment requests to the compensation plan and ignore everything else. Yes and No are acceptable values. This is an optional field with a default of No if not passed.

Response Payload

Element Name	Type	Description
result	string	RequestID of the ESSJob when this job is submitted successfully.

submitCalculateAllPEROrgJob

Calls and runs the globally compatible but domain incompatible process synchronously to calculate incentive compensation attainments and earnings for all participants in a business unit, for a date range.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	Unique identifier for the business unit.
startDate	string	Start of the date range
endDate	string	End of the date range
runFor	string	Either Incremental to consider only new credits and updated plan configurations since the last calculation run or Total to consider all transactions in the incentive copmensation transaction table.

Response Payload

Element Name	Type	Description
result	string	RequestID of the ESSJob when this job is submitted successfully.

submitCalculateSpecificParticipants

This method can be called to run the calculation process for specific participants. Calculation determines commission and bonus incentive earnings based on incentive plan rules.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	Unique identifier for the business unit.
batchName	string	Process Name
fromDate	string	Start of the date range
toDate	string	End of the date range
participantIds	long	List of Participant Identifiers
participantNames	string	List of Participant Names
compPlanIds	long	List of Compensation Plan Identifiers

Element Name	Type	Description
compPlanNames	string	List of Compensation Plan Names
payGroupIds	long	List of Pay Group Identifiers
payGroupNames	string	List of Pay Group Names
onlyWithNewEventsOrCredits	boolean	Only participants with new events or credits.

Response Payload

Element Name	Type	Description
result	string	RequestID of the ESSJob when this job is submitted successfully.

submitCreditingAndRollupJobWithRuleSet

This method can be called to run the crediting and roll up processes with optional parameter Filter Transactions by which will let you choose the filter criteria rule to filter transactions.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	Unique identifier for the business unit.
startDate	string	Start of the date range
endDate	string	End of the date range
runFor	string	You may process New transactions, or All transactions for the date range specified.
ruleSetName	string	Filter Transactions by which will let you choose the filter criteria rule to filter transactions.

Response Payload

Element Name	Type	Description
result	string	RequestID of the ESSJob when this job is submitted successfully.

submitCreditingJobWithRuleSet

This method can be called to run the crediting process with optional parameter filter transactions by which will let you choose the filter criteria rule to filter transactions.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgName	string	Unique identifier for the business unit.
startDate	string	Start of the date range
endDate	string	End of the date range
type	string	You may process New credits or All credits for the date range specified.
ruleSetName	string	Filter Transactions by which will let you choose the filter criteria rule to filter transactions.

Response Payload

Element Name	Type	Description
result	string	RequestID of the ESSJob when this job is submitted successfully.

getDfltObjAttrHints

Gets user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Gets the date and time for when the schema files, referenced in the service definition, last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create,

Element Name	Type	Description
		update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	CN_MANAGE_INCENTIVE_COMPENSATION_IMPORT_JOBS_PRIV	Manage Incentive Compensation File Import Jobs	Allows import of incentive compensation transactions into staging using CRM File Based Data Import.
All Operations	CN_MANAGE_INCENTIVE_COMPENSATION_CLASSIFICATION_RULE_HIERARCHY_PRIV	Manage Incentive Compensation Classification Rule Hierarchy	Allows maintenance of rule hierarchy used to classify sales transactions into user-defined credit categories of business revenue.
All Operations	CN_MANAGE_INCENTIVE_COMP_ROLLUP_GROUP_PRIV	Manage Incentive Compensation Rollup Group	Allows maintenance of incentive compensation groups used to determine who receives rollup credits.
All Operations	CN_MANAGE_INCENTIVE_COMPENSATION_PLAN_ASSIGNMENT_TO_ROLE_PRIV	Manage Incentive Compensation Plan Assignment to Role	Allows maintenance of incentive compensation plan assignment to participants using role, which is the function that a participant plays within a group, team, or an organization.
All Operations	CN_MAINTAIN_INCENTIVE_COMPENSATION_TRANSACTION_PRIV	Maintain Incentive Compensation Transaction	Allows verification of earning transaction detail for which the application calculated incentive compensation commission, bonus, or nonmonetary incentive.
All Operations	CN_REGISTER_INCENTIVE_COMPENSATION_PARTICIPANT_PRIV	Register Incentive Compensation Participant	Allows import of incentive compensation participant, a person or organization. For example, an employee, salesperson, party, supplier contract, partner, or third party resale contractor whose data and payments the incentive compensation application computes and manages.

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	CN_MANAGE_INCENTIVE_COMPENSATION_CREDIT_BATCH_PRIV	Manage Incentive Compensation Credit Batch	Allows flattening of credit rules used by batch processes, which determine who receives direct incentive compensation credit.
All Operations	CN_MANAGE_INCENTIVE_COMPENSATION_TRANSACTION_COLLECTION_BATCH_PRIV	Manage Incentive Compensation Transaction Collection Batch	Allows maintenance of incentive compensation transaction collection batch.
All Operations	CN_SUBMIT_INCENTIVE_COMPENSATION_CALCULATION_BATCH_PRIV	Submit Incentive Compensation Calculation Batch	Allows submission of incentive compensation calculation batch.
All Operations	CN_MANAGE_INCENTIVE_COMPENSATION_CREDIT_ROLLUP_BATCH_PRIV	Manage Incentive Compensation Credit and Rollup Group Batch	Allows maintenance of credit and rollup batch used to generate direct and rollup incentive compensation credits.
All Operations	CN_MANAGE_INCENTIVE_COMPENSATION_CLASSIFICATIO_BATCH_PRIV	Manage Incentive Compensation Calculation Batch	Allows maintenance of incentive compensation calculation batch.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
CN_MANAGE_INCENTIVE_COMPENSATION_CREDIT_ROLLUP_BATCH_PRIV	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.
CN_MANAGE_INCENTIVE_COMPENSATION_CLASSIFICATION_RULE_HIERARCHY_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	Incentive Compensation Plan Administrator	Configure and manage incentive plans, plan components, and classification rules
CN_MANAGE_INCENTIVE_COMPENSATION_IMPORT_JOBS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
CN_MANAGE_INCENTIVE_COMPENSATION_IMPORT_JOBS_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ADMINISTRATOR_JOB	Incentive Compensation Application Administrator	Set up incentive compensation application
CN_MANAGE_INCENTIVE_COMPENSATION_CLASSIFICATIO_BATCH_PRIV	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			manage requests to calculate the incentive compensation for a set of participants.
CN_MANAGE_INCENTIVE_COMPENSATION_PLAN_ASSIGNMENT_TO_ROLE_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
CN_SUBMIT_INCENTIVE_COMPENSATION_CALCULATION_BATCH_PRIV	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.
CN_REGISTER_INCENTIVE_COMPENSATION_PARTICIPANT_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
CN_REGISTER_INCENTIVE_COMPENSATION_PARTICIPANT_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ADMINISTRATOR_JOB	Incentive Compensation Application Administrator	Set up incentive compensation application
CN_MANAGE_INCENTIVE_COMP_ROLLUP_GROUP_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
CN_MANAGE_INCENTIVE_COMPENSATION_CREDIT_BATCH_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
CN_MANAGE_INCENTIVE_COMPENSATION_TRANSACTION_COLLECTION_BATCH_PRIV	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.
CN_MAINTAIN_INCENTIVE_COMPENSATION_TRANSACTION_PRIV	ORA_CN_INCENTIVE_COMPENSATION_PARTICIPANT_PLAN_MANAGEMENT_DUTY	Incentive Compensation Participant Snapshot Management	Assign and maintain incentive plans and transactions for participants
CN_MAINTAIN_INCENTIVE_COMPENSATION_TRANSACTION_PRIV	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			incentive compensation for a set of participants.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.
ORA_CN_INCENTIVE_COMPENSATION_PLAN_ADMINISTRATOR_JOB	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups

Marketing Budget Service (Deprecated)

Service to operate on marketing budgets including market development funds. The supported operations are create, update, delete, and search. WARNING: This service has been deprecated and is being replaced with Marketing Budget Service Version 2 (oracle.apps.marketing.commonMarketing.budgets.budgetService.MarketingBudgetService).

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/oracle/apps/marketing/commonMarketing/budgets/budgetPublicService/}BudgetPublicService

Service WSDL URL: https://servername/crmService/BudgetPublicService?WSDL

Logical Business Objects

- CRM : Marketing : Marketing Budget

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*MDF Service*

Relationship Type	Object or Service
Handles	*Marketing Claim*
Handles	*Marketing Fund Request*
Handles	*Marketing Budget Entry*
Handles	*Marketing Budget*
Handles	*Marketing Claim Settlement*
Handles	*Marketing Budget Translation*

Operations

- *getBudgetEntry*
- *createBudgetEntry*
- *updateBudgetEntry*
- *findBudgetEntry*
- *getClaim*
- *createClaim*
- *updateClaim*
- *deleteClaim*
- *findClaim*
- *getClaimSettlement*
- *createClaimSettlement*
- *updateClaimSettlement*
- *findClaimSettlement*
- *getFundRequest*
- *createFundRequest*
- *updateFundRequest*
- *deleteFundRequest*
- *findFundRequest*
- *getBudget*
- *createBudget*
- *updateBudget*
- *deleteBudget*
- *findBudget*

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getBudgetEntry

A web service method for Get operation of the Marketing Budget Entry.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budgetEntryId	long	Returns a uniquely identified budget entry associated to a marketing budget.

Response Payload

Element Name	Type	Description
result	*Marketing Budget Entry*	The service returns the Marketing Budget Entry that matches the inbound key attributes.

createBudgetEntry

A web service method for Create operation of the Marketing Budget Entry.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budgetEntry	*Marketing Budget Entry*	The service for the Marketing Budget Entry to be created.

Response Payload

Element Name	Type	Description
result	*Marketing Budget Entry*	The service returns the created Marketing Budget Entry.

updateBudgetEntry

A web service method for Update operation of the Marketing Budget Entry.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budgetEntry	*Marketing Budget Entry*	The service for the Marketing Budget Entry to be updated.

Response Payload

Element Name	Type	Description
result	*Marketing Budget Entry*	The service returns the updated Marketing Budget Entry.

findBudgetEntry

A web service method that queries a single record of Marketing Budget Entry by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBudgetEntry web service method. The filter criteria are a cumulative set of attribute criteria that identifies Marketing Budget Entry records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findBudgetEntry.

Response Payload

Element Name	Type	Description
result	*Marketing Budget Entry*	The return value of the findBudgetEntry web service method. It includes the full set of attributes of the record.

getClaim

A web service method for Get operation of the Marketing Claim.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claimId	long	Returns a uniquely identified claim associated to a marketing budget or fund request.

Response Payload

Element Name	Type	Description
result	*Marketing Claim*	Marketing Claim that matches the inbound key attributes.

createClaim

A web service method for Create operation of the Marketing Claim.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claim	*Marketing Claim*	The service for the Marketing Claim to be created.

Response Payload

Element Name	Type	Description
result	*Marketing Claim*	The service returns the created Marketing Claim.

updateClaim

A web service method for Update operation of the Marketing Claim.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claim	*Marketing Claim*	The service for the Marketing Claim to be updated.

Response Payload

Element Name	Type	Description
result	*Marketing Claim*	The service returns the updated Marketing Claim.

deleteClaim

A web service method for Delete operation of the Marketing Claim.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claim	*Marketing Claim*	The service for the Marketing Claim to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteClaim.

findClaim

A web service method that queries a single record of Marketing Claim by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBudgetEntry web service method. The filter

Element Name	Type	Description
		criteria are a cumulative set of attribute criteria that identifies Marketing Claim records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findClaim.

Response Payload

Element Name	Type	Description
result	*Marketing Claim*	The return value of the findClaim web service method. It includes the full set of attributes of the record.

getClaimSettlement

A web service method for Get operation of the Marketing Claim Settlements.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claimSettlementId	long	Returns a uniquely identified claim settlement associated to a marketing claim.

Response Payload

Element Name	Type	Description
result	*Marketing Claim Settlement*	The service returns a Marketing Claim Settlement that matches the inbound key attributes.

createClaimSettlement

A web service method for Create operation of the Marketing Claim Settlement.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claimSettlement	*Marketing Claim Settlement*	The service for the Marketing Claim Settlement to be created.

Response Payload

Element Name	Type	Description
result	*Marketing Claim Settlement*	The service returns the created Marketing Claim Settlement.

updateClaimSettlement

A web service method for Update operation of the Marketing Claim Settlement.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claimSettlement	*Marketing Claim Settlement*	The service for the Marketing Claim Settlement to be updated.

Response Payload

Element Name	Type	Description
result	*Marketing Claim Settlement*	The service returns the updated Marketing Claim Settlement.

findClaimSettlement

A web service method that queries a single record of Marketing Claim Settlement by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBudgetEntry web service method. The filter criteria are a cumulative set of attribute criteria that identifies marketing claim settlement records.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findClaimSettlements.

Response Payload

Element Name	Type	Description
result	*Marketing Claim Settlement*	The return value of the findClaimSettlement web service method. It includes the full set of attributes of the record.

getFundRequest

A web service method for Get operation of the Marketing Fund Request.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fundRequestId	long	Returns a uniquely identified fund request associated to a marketing budget.

Response Payload

Element Name	Type	Description
result	*Marketing Fund Request*	The service returns Marketing Fund Request that matches the inbound key attributes.

createFundRequest

A web service method for Create operation of the Marketing Fund Request.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fundRequest	*Marketing Fund Request*	The service for the Marketing Fund Request to be created.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	*Marketing Fund Request*	The service returns the created Marketing Fund Request.

updateFundRequest

A web service method for Update operation of the Marketing Fund Request.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fundRequest	*Marketing Fund Request*	The service for the Marketing Fund Request to be updated.

Response Payload

Element Name	Type	Description
result	*Marketing Fund Request*	The service returns the updated Marketing Fund Request.

deleteFundRequest

A web service method for Delete operation of the Marketing Fund Request.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fundRequest	*Marketing Fund Request*	The service for the Marketing Fund Request to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteFundRequest.

findFundRequest

A web service method that queries a single record of Marketing Fund Request by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findFundRequest web service method. The filter criteria are a cumulative set of attribute criteria that identifies marketing fund request records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findFundRequest.

Response Payload

Element Name	Type	Description
result	*Marketing Fund Request*	The return value of the findFundRequest web service method. It includes the full set of attributes of the record.

getBudget

A web service method for Get operation of the Marketing Budget.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budgetId	long	The unique identifier of the Marketing Budget.

Response Payload

Element Name	Type	Description
result	*Marketing Budget*	The service returns a Marketing Budget that matches the inbound key attributes.

createBudget

A web service method for Create operation of the Marketing Budget.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budget1	*Marketing Budget*	The service for the Marketing Budget to be created.

Response Payload

Element Name	Type	Description
result	*Marketing Budget*	The service returns the created Marketing Budget.

updateBudget

A web service method for Update operation of the Marketing Budget.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budget1	*Marketing Budget*	The service for the Marketing Budget to be updated.

Response Payload

Element Name	Type	Description
result	*Marketing Budget*	The service returns the updated Marketing Budget.

deleteBudget

A web service method for Delete operation of the Marketing Budget.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budget1	*Marketing Budget*	The service for the Marketing Budget to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteBudget.

findBudget

A web service method that queries a single record of Marketing Budget by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBudgetEntry web service method. The filter criteria are a cumulative set of attribute criteria that identifies the Marketing Budget records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findBudget.

Response Payload

Element Name	Type	Description
result	*Marketing Budget*	The return value of the findBudget web service method. It includes the full set of attributes of the record.

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

A web service method that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated. The parameter is present in ISO 8601 format.

getEntityList

A web service method to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the Object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKT_MANAGE_BUDGETS_WORK_AREA_PRIV	Manage Budgets Work Area	Allows managing marketing budgets from the work area. A work area is a landing page for frequent tasks and reports useful for managing budgets.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_MANAGE_BUDGETS_WORK_AREA_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_MANAGE_BUDGETS_WORK_AREA_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing activities. Includes reviewing and exporting budget information.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.

MDF Service

Service to operate on marketing budgets including market development funds. The supported operations are create, update, delete, and search.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/marketingBudgetService/}MarketingBudgetService

Service WSDL URL: https://servername/crmService/MarketingBudgetService?WSDL

Logical Business Objects

- CRM : Marketing : Marketing Budget

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Previous version is	*Marketing Budget Service*
Handles	*MDF Claim*
Handles	*MDF Budget Team*
Handles	*Marketing Budget Entry Version 2*
Handles	*MDF Budget*
Handles	*MDF Request Team*
Handles	*MDF Request*
Handles	*MDF Claim Settlement*
Handles	*Marketing Budget Translation Version 2*

Relationship Type	Object or Service
Handles	*MDF Claim Team*

Operations

- *getBudget*
- *createBudget*
- *updateBudget*
- *deleteBudget*
- *findBudget*
- *getBudgetEntry*
- *createBudgetEntry*
- *updateBudgetEntry*
- *findBudgetEntry*
- *getClaim*
- *createClaim*
- *updateClaim*
- *deleteClaim*
- *findClaim*
- *getClaimSettlements*
- *createClaimSettlements*
- *updateClaimSettlements*
- *findClaimSettlements*
- *getFundRequest*
- *createFundRequest*
- *updateFundRequest*
- *deleteFundRequest*
- *findFundRequest*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getBudget

A web service method for Get operation of the Marketing Budget.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budgetId	long	The unique identifier of the Marketing Budget.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}BudgetResult	The service returns a Marketing Budget that matches the inbound key attributes.

createBudget

A web service method for Create operation of the Marketing Budget.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budget	*MDF Budget*	The service for the Marketing Budget to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}BudgetResult	The service returns the created Marketing Budget.

updateBudget

A web service method for Update operation of the Marketing Budget.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budget	*MDF Budget*	The service for the Marketing Budget to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}BudgetResult	The service returns the updated Marketing Budget.

deleteBudget

A web service method for Delete operation of the Marketing Budget.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budget	*MDF Budget*	The service for the Marketing Budget to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The parameter is not applicable for the method deleteBudget.

findBudget

A web service method that queries a single record of Marketing Budget by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBudgetEntry web service method. The filter criteria is a cumulative set of attribute criteria that identifies the Marketing Budget records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findBudget.

Response Payload

Element Name	Type	Description
result	*MDF Budget*	The return value of the findBudget web service method. It includes the full set of attributes of the record.

getBudgetEntry

A web service method for Get operation of the Marketing Budget Entry.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budgetEntryId	long	Returns a uniquely identified budget entry associated to a marketing budget.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}BudgetEntryResult	The service returns the Marketing Budget Entry that matches the inbound key attributes.

createBudgetEntry

A web service method for Create operation of the Marketing Budget Entry.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budgetEntry	*Marketing Budget Entry Version 2*	The service for the Marketing Budget Entry to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}BudgetEntryResult	The service returns the created Marketing Budget Entry.

Element Name	Type	Description

updateBudgetEntry

A web service method for Update operation of the Marketing Budget Entry.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
budgetEntry	*Marketing Budget Entry Version 2*	The service for the Marketing Budget Entry to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}BudgetEntryResult	The service returns the updated Marketing Budget Entry.

findBudgetEntry

A web service method that queries a single record of Marketing Budget Entry by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBudgetEntry web service method. The filter criteria is a cumulative set of attribute criteria that identifies Marketing Budget Entry records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findBudgetEntry.

Response Payload

Element Name	Type	Description
result	*Marketing Budget Entry Version 2*	The return value of the findBudgetEntry web service method. It includes the full set of attributes of the record.

getClaim

A web service method for Get operation of the Marketing Claim.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claimId	long	Returns a uniquely identified claim associated to a marketing budget or fund request.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}ClaimResult	Marketing Claim that matches the inbound key attributes.

createClaim

A web service method for Create operation of the Marketing Claim.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claim	*MDF Claim*	The service for the Marketing Claim to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}ClaimResult	The service returns the created Marketing Claim.

Element Name	Type	Description

updateClaim

A web service method for Update operation of the Marketing Claim.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claim	*MDF Claim*	The service for the Marketing Claim to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}ClaimResult	The service returns the updated Marketing Claim.

deleteClaim

A web service method for Delete operation of the Marketing Claim.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claim	*MDF Claim*	The service for the Marketing Claim to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The parameter is not applicable for the method deleteClaim.

findClaim

A web service method that queries a single record of Marketing Claim by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBudgetEntry web service method. The filter criteria is a cumulative set of attribute criteria that will identify Marketing Claim records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findClaim.

Response Payload

Element Name	Type	Description
result	*MDF Claim*	The return value of the findClaim web service method. It includes the full set of attributes of the record.

getClaimSettlements

A web service method for Get operation of the Marketing Claim Settlements.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claimSettlementId	long	Returns a uniquely identified claim settlement associated to a marketing claim.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}ClaimSettlementsResult	The service returns a Marketing Claim Settlement that matches the inbound key attributes.

createClaimSettlements

A web service method for Create operation of the Marketing Claim Settlement.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claimSettlements	*MDF Claim Settlement*	The service for the Marketing Claim Settlement to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}ClaimSettlementsResult	The service returns the created Marketing Claim Settlement.

updateClaimSettlements

A web service method for Update operation of the Marketing Claim Settlement.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
claimSettlements	*MDF Claim Settlement*	The service for the Marketing Claim Settlement to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}ClaimSettlementsResult	The service returns the updated Marketing Claim Settlement.

findClaimSettlements

A web service method that queries a single record of Marketing Claim Settlement by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBudgetEntry web service method. The filter criteria is a cumulative set of attribute criteria that identifies marketing claim settlement records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findClaimSettlements.

Response Payload

Element Name	Type	Description
result	*MDF Claim Settlement*	The return value of the findClaimSettlement web service method. It includes the full set of attributes of the record.

getFundRequest

A web service method for Get operation of the Marketing Fund Request.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fundRequestId	long	Returns a uniquely identified fund request associated to a marketing budget.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}FundRequestResult	The service returns Marketing Fund Request that matches the inbound key attributes.

createFundRequest

A web service method for Create operation of the Marketing Fund Request.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fundRequest	*MDF Request*	The service for the Marketing Fund Request to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}FundRequestResult	The service returns the created Marketing Fund Request.

updateFundRequest

A web service method for Update operation of the Marketing Fund Request.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fundRequest	*MDF Request*	The service for the Marketing Fund Request to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/commonMarketing/budgets/publicModel/}FundRequestResult	The service returns the updated Marketing Fund Request.

deleteFundRequest

A web service method for Delete operation of the Marketing Fund Request.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
fundRequest	*MDF Request*	The service for the Marketing Fund Request to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The parameter is not applicable for the method deleteFundRequest.

findFundRequest

A web service method that queries a single record of Marketing Fund Request by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findFundRequest web service method. The filter criteria is a cumulative set of attribute criteria that identifies marketing fund request records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findFundRequest.

Response Payload

Element Name	Type	Description
result	*MDF Request*	The return value of the findFundRequest web service method. It includes the full set of attributes of the record.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated. The parameter is present in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name,

Element Name	Type	Description
		and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKT_VIEW_MARKETING_CLAIM_PRIV	View Marketing Claim	
All Operations	MKT_UPDATE_MARKETING_FUND_REQUEST_PRIV	Update Marketing Fund Request	Allows updating requests to allocate marketing budget funds for anticipated marketing expenses.
All Operations	MKT_UPDATE_MARKETING_CLAIM_SETTLEMENT_PRIV	Update Marketing Claim Settlement	Allows updating settlements of marketing claims after reimbursement of actual expenses.
All Operations	MKT_UPDATE_MARKETING_FUND_REQUEST_APPROVAL_DETAILS_PRIV	Update Marketing Fund Request Approval Details	Allows updating the MDF request approval details
All Operations	MKT_VIEW_MARKETING_FUND_REQUEST_PRIV	View Marketing Fund Request	
All Operations	MKT_CREATE_MARKETING_BUDGET_PRIV	Create Marketing Budget	
All Operations	MKT_UPDATE_COMPLETED_MARKETING_CLAIM_SETTLEMENT_PRIV	Update Completed Marketing Claim Settlement	Allows updating the attributes of MDF Marketing Claim Settlements in Complete status
All Operations	MKT_CREATE_MARKETING_CLAIM_SETTLEMENT_PRIV	Create Marketing Claim Settlement	Allows creating settlements of marketing claims after reimbursement of actual expenses.
All Operations	MKT_UPDATE_MARKETING_CLAIM_SETTLEMENT_DETAILS_PRIV	Update Marketing Claim Settlement Details	Allows updating the attributes of MDF Marketing Claim Settlements
All Operations	MKT_CREATE_MARKETING_CLAIM_PRIV	Create Marketing Claim	

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKT_VIEW_MARKETING_BUDGET_ANALYTICS_PRIV	View Marketing Budget Analytics	Allows viewing marketing budget analytics. A marketing budget is used to track budgeted funds for marketing activities and requests and claims for those funds.
All Operations	MKT_UPDATE_MARKETING_CLAIM_PRIV	Update Marketing Claim	Allows updating claims to marketing budgets for reimbursement of actual expenses.
All Operations	MKT_UPDATE_MARKETING_BUDGET_PRIV	Update Marketing Budget	Allows updating a marketing budget used to track budgeted funds for marketing activities and requests for those funds.
All Operations	MKT_VIEW_MARKETING_BUDGET_ENTRY_PRIV	View Marketing Budget Entry	
All Operations	MKT_UPDATE_MARKETING_CLAIM_APPROVAL_DETAILS_PRIV	Update Marketing Claim Approval Details	Allows updating the MDF claim approval details
All Operations	MKT_VIEW_MARKETING_CLAIM_SETTLEMENT_PRIV	View Marketing Claim Settlement	Allows viewing settlements of marketing claims after reimbursement of actual expenses.
All Operations	MKT_CREATE_MARKETING_BUDGET_ENTRY_PRIV	Create Marketing Budget Entry	
All Operations	MKT_VIEW_MARKETING_BUDGET_PRIV	View Marketing Budget	Allows viewing a marketing budget used to track budgeted funds for marketing activities and requests for those funds.
All Operations	MKT_VIEW_MARKETING_BUDGET_CHECKBOOK_PRIV	View Marketing Budget Checkbook	Allows viewing a marketing budget checkbook used to track budgeted funds for marketing activities and request and claims for those funds.
All Operations	MKT_UPDATE_MARKETING_BUDGET_ENTRY_PRIV	Update Marketing Budget Entry	Allows updating entries for a marketing budget that establish the budget amount.
All Operations	MKT_UPDATE_MARKETING_FUND_REQUEST_BUDGET_DETAILS_PRIV	Update Marketing Fund Request Budget Details	Allows updating the MDF request budget details
All Operations	MKT_CREATE_MARKETING_FUND_REQUEST_PRIV	Create Marketing Fund Request	

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_UPDATE_MARKETING_FUND_REQUEST_PRIV	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
MKT_UPDATE_MARKETING_CLAIM_APPROVAL_DETAILS_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
MKT_UPDATE_MARKETING_CLAIM_APPROVAL_DETAILS_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
MKT_UPDATE_MARKETING_CLAIM_APPROVAL_DETAILS_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
MKT_UPDATE_MARKETING_CLAIM_APPROVAL_DETAILS_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
MKT_UPDATE_MARKETING_CLAIM_SETTLEMENT_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_UPDATE_MARKETING_BUDGET_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_CLAIM_SETTLEMENT_PRIV	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
MKT_VIEW_MARKETING_CLAIM_SETTLEMENT_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_VIEW_MARKETING_CLAIM_SETTLEMENT_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing activities. Includes reviewing and exporting budget information.
MKT_UPDATE_MARKETING_FUND_REQUEST_BUDGET_DETAILS_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
MKT_CREATE_MARKETING_CLAIM_SETTLEMENT_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_UPDATE_MARKETING_FUND_REQUEST_APPROVAL_DETAILS_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
MKT_UPDATE_MARKETING_FUND_REQUEST_APPROVAL_DETAILS_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
MKT_UPDATE_MARKETING_FUND_REQUEST_APPROVAL_DETAILS_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
MKT_UPDATE_MARKETING_FUND_REQUEST_APPROVAL_DETAILS_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
MKT_VIEW_MARKETING_BUDGET_CHECKBOOK_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_BUDGET_CHECKBOOK_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			activities. Includes reviewing and exporting budget information.
MKT_VIEW_MARKETING_FUND_REQUEST_PRIV	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
MKT_VIEW_MARKETING_FUND_REQUEST_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_FUND_REQUEST_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing activities. Includes reviewing and exporting budget information.
MKT_CREATE_MARKETING_CLAIM_PRIV	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
MKT_CREATE_MARKETING_BUDGET_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MKT_CREATE_MARKETING_BUDGET_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
MKT_CREATE_MARKETING_BUDGET_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
MKT_CREATE_MARKETING_FUND_REQUEST_PRIV	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
MKT_UPDATE_COMPLETED_MARKETING_CLAIM_SETTLEMENT_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_UPDATE_MARKETING_CLAIM_SETTLEMENT_DETAILS_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
MKT_UPDATE_MARKETING_CLAIM_SETTLEMENT_DETAILS_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
MKT_UPDATE_MARKETING_CLAIM_SETTLEMENT_DETAILS_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
MKT_UPDATE_MARKETING_CLAIM_SETTLEMENT_DETAILS_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
MKT_VIEW_MARKETING_BUDGET_ENTRY_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_BUDGET_ENTRY_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing activities. Includes reviewing and exporting budget information.
MKT_UPDATE_MARKETING_CLAIM_PRIV	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
MKT_VIEW_MARKETING_BUDGET_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_BUDGET_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing activities. Includes reviewing and exporting budget information.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_VIEW_MARKETING_CLAIM_PRIV	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
MKT_VIEW_MARKETING_CLAIM_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_CLAIM_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing activities. Includes reviewing and exporting budget information.
MKT_CREATE_MARKETING_BUDGET_ENTRY_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_UPDATE_MARKETING_BUDGET_ENTRY_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_BUDGET_ANALYTICS_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_BUDGET_ANALYTICS_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing activities. Includes reviewing and exporting budget information.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			ready to send status and delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			duties include exporting forecast information and managing subordinates forecasts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and handling billing discrepancies and disputes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Marketing Budget

The marketing budget contains details pertaining to monetary incentives for partners to execute marketing activities.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/commonMarketing/budgets/budgetPublicService/}Budget

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Marketing Budget Translation*
Handled by	*Marketing Budget Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivatedBy	string	The user who activated the marketing budget.

Name	Type	Description
ActivationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The marketing budget activation date.
AdditionalReferenceId	long	The additional reference identifier associated to the marketing budget, that identifies a particular partner program or marketing source.
AdditionalReferenceType	string	The type of the additional reference associated to the marketing budget, that is, partner program or marketing source.
AllowNegativeBalanceFlag	boolean	The check box that enables fund requests and claims submission which may cause the budget to go negative upon approval.
BudgetCode	string	The code used to uniquely identify the marketing budget.
BudgetId	long	The unique identifier for the marketing budget. • Primary Key
BudgetName	string	The display name for the marketing budget.
BudgetSource	string	The parent budget that is the source of the marketing budget.
BudgetTranslation	*Marketing Budget Translation*	The reference to the budget service data object with translation information.
BudgetType	string	The type of budget such as internal only or partner.
CategoryCode	string	The attribute used to enter and categorize marketing budgets.
ConversionCurrencyCode	string	The currency code of the currency being converted to.
ConversionExchangeRate	decimal	The exchange rate of the currency being converted to.
ConversionRateType	string	The currency conversion rate type that is used to derive the exchange rate for converting the user-entered currency to CRM Corporate currency.
Country	string	The name of the country.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Description	string	The free text description of the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
ExchangeRate	decimal	The conversion rate of a marketing budget.
FundingToleranceAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total marketing budget amount multiplied by the funding tolerance percent.
GeneralLedgerAccount	string	The reference to the general ledger account where budgeted funds are reserved or accounted.
InactivatedBy	string	The user who inactivated the budget.
InactivationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marketing budget was inactivated.
InitialBudgetAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The original or starting marketing budget amount.
LastCalculatedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The last calculation date of the budget check book that factors in fund requests, claims, and budget entries.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
NumberClaimsPendingApproval	decimal	The number of claims pending approval.
NumberFundRequestPendingApproval	decimal	The number of fund requests pending approval.

Name	Type	Description
OrgId	long	The internal marketing organization that utilizes the budgeted funds.
OverdraftThreshold	decimal	The amount in percentage that a fund request can exceed above the available marketing budget amount. By default, the value is 10%.
OwnerId	long	The internal resource responsible for the management of the marketing budget.
PartnerId	long	The unique identifier of the partner.
PrimaryReferenceId	long	The primary reference is a display label for two attributes placed side by side that include a reference type and reference value. An additional string provides a hidden label for the second 'value' field.
PrimaryReferenceType	string	The primary reference is a display label for two attributes placed side by side that include a reference type and reference value. An additional string provides a hidden label for the second 'value' field.
Region	string	The regions used to categorize marketing budgets by geographical area.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
StatusCode	string	The pre-defined code used to indicate the status.
SubmitClaimsBy	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The last date a marketing budget claim is accepted for reimbursement.
SubmitFundRequestBy	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The last date a marketing budget fund request is accepted.
TotalApprovedClaimAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of approved claims for expense reimbursements against the marketing budget.
TotalApprovedRequestAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total approved fund requests for a marketing budget.
TotalAvailableBudgetAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The budget amount available for fund requests and claims.

Name	Type	Description
TotalBudgetAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total budget amount based on the initial budget plus any adjustments.
TotalClaimAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of marketing budget claims for reimbursement that are submitted, pending approval, approved, or rejected.
TotalClaimSettledAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of marketing budget claims for reimbursement that are financially settled.
TotalCreditAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount from all budget accounting entries of type credit.
TotalDebitAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount from all budget accounting entries of type debit.
TotalOutstandingClaimLiabilityAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of marketing budget claims for reimbursement that are approved but not settled.
TotalPendingClaimAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of claims that are submitted or pending approval.
TotalPendingFundRequestAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of fund requests that are submitted or pending approval.
TotalRejectedClaimAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of claims for reimbursement that are rejected.
TotalRejectedFundRequestAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of fund requests that are rejected.
TotalRequestedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount from all fund requests that are submitted, pending approval, approved, or rejected.
TotalUnclaimedFundRequestAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total approved fund requests less the total approved claims.

Marketing Budget Entry

The marketing budget entry that includes any changes or adjustments to a marketing budget after the initial budget is created.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/commonMarketing/budgets/budgetPublicService/}BudgetEntry

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Marketing Budget Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountTypeCode	string	The accounting type of the marketing budget entry, which can be a credit or a debit to the total budget amount.
ActivatedBy	string	The user who activated the marketing budget entry.
ActiveFlag	boolean	Indicates the activity status of the marketing budget entry as Active or Inactive.
AdditionalReference	string	The additional reference identifier associated to the marketing budget entry, that identifies a particular partner program or marketing source.
AdditionalReferenceType	string	The type of the additional reference associated to the marketing budget entry, that is, partner program or marketing source.
BudgetEntryAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount entered for the marketing budget entry.
BudgetEntryCode	string	The user-defined, unique label for the marketing budget entry.
BudgetEntryId	long	The system-generated, unique identifier for the marketing budget entry. • Primary Key
BudgetEntryType	string	The extensible type of marketing budget entry.

Name	Type	Description
BudgetId	long	The unique identifier for the marketing budget.
ConversionCurrencyCode	string	The currency code of the currency being converted to.
ConversionExchangeRate	decimal	The exchange rate of the currency being converted to.
ConversionRateType	string	The currency conversion rate type that is used to derive the exchange rate for converting the user-entered currency to CRM Corporate currency.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Description	string	The free text description of the record.
EffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the complete budget entry amounts are considered for budget checkbook calculations.
ExchangeRate	decimal	The ledger currency exchange rate from Budget entry to Budget Currency.
InactivatedBy	string	The user who has inactivated the budget entry.
InactivationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marketing budget entry was inactivated.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
StatusCode	string	The pre-defined code used to indicate the status.

Marketing Budget Translation

The marketing budget that includes details of the monetary incentives for partners to execute marketing activities. This service data object includes translatable attributes.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/commonMarketing/budgets/budgetPublicService/}BudgetTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Marketing Budget*
Handled by	*Marketing Budget Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BudgetId	long	The unique identifier for the marketing budget. • Primary Key
BudgetName	string	The display name for the marketing budget.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
Language	string	The target translation language for the marketing budget. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
SourceLanguage	string	The source translation language for the marketing budget.

Marketing Claim

The request for reimbursement of marketing expenses submitted by a partner.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/commonMarketing/budgets/budgetPublicService/}Claim

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Marketing Budget Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalReferenceId	long	The additional reference identifier associated to the marketing claim, that identifies a particular partner program or marketing source.
AdditionalReferenceType	string	The type of the additional reference associated to the marketing claim, that is, partner program or marketing source.
Age	decimal	The number of days since the creation of the marketing claim.
ApprovedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount approved for the marketing claim.
ApprovedBy	string	The user who approved the marketing claim.

Name	Type	Description
ApprovedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marketing claim was approved.
BudgetId	long	The unique identifier for the marketing budget.
ClaimAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Amount for the Claim. It is used in Budget checkbook calculations based on claim status.
ClaimCode	string	The unique identifier of the claim. User enterable text field.
ClaimCreationMethod	string	The method used to create the marketing claim. For example manually, via file import or via web service.
ClaimId	long	The unique identifier of the claim. • Primary Key
ClaimName	string	The display name of the marketing claim.
ClaimPaidDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the claim was paid.
ClaimSettledAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount settled or paid to the claimant.
ClaimStatusCode	string	The current status of the claim. Possible values are Draft, Submitted, Pending Approval, Approved, or Rejected.
Comments	string	The comments for the record.
ConversionCurrencyCode	string	The currency code of the currency being converted to.
ConversionExchangeRate	decimal	The exchange rate of the currency being converted to.
ConversionRateType	string	The currency conversion rate type that is used to derive the exchange rate for converting the user-entered currency to CRM Corporate currency.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Description	string	The free text description of the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
ExpenseCategoryCode	string	The expense category that matches a budget category, used for reporting purposes.
FundRequestCurrencyExchangeRate	decimal	The exchange rate from Claim to Fund Request.
FundRequestId	long	The marketing fund request associated to the marketing claim.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
OutstandingClaimLiabilityAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The unsettled claim amount. It is the difference between the approved and settled amounts.
PartnerContactId	long	The partner contact associated to the claim.
PartnerId	long	The unique identifier of the partner.
RejectedBy	string	The user who rejected the marketing claim.
RejectedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marketing fund request was rejected.
RejectionReasonCode	string	The reason for rejecting the marketing claim.
SubmittedBy	string	The user who submitted the marketing claim.
SubmittedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The submission date of the marketing claim.

Marketing Claim Settlement

The payments made to partners for reimbursement of marketing expenses incurred by them.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/commonMarketing/budgets/budgetPublicService/}ClaimSettlement

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Marketing Budget Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountClassification	string	The account classification for the claim settlement account.
AccountingType	string	The accounting type of the marketing claim settlement, which represents a credit or debit in the back-end financial system. This is for reference only, as the claim settlements do not have any effect on available budget.
ActiveFlag	boolean	Indicates the activity status of the marketing claim settlement as Active or Inactive.
AdditionalReferenceCode	string	The additional reference associated to the marketing claim settlement, that identifies a particular partner program or marketing source.
AdditionalReferenceType	string	The type of the additional reference associated to the marketing claim settlement, that is, partner program or marketing source.
BudgetCurrencyExchangeRate	decimal	The exchange rate used to convert from the marketing claim settlement currency to the parent budget currency.
BudgetId	decimal	The unique identifier for the marketing budget.

Name	Type	Description
ClaimCurrencyExchangeRate	decimal	The ledger currency exchange rate from claim settlement currency to claim currency.
ClaimId	decimal	The parent claim for the claim settlement.
ClaimSettlementAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount settled in the claim settlement.
ClaimSettlementCode	string	The unique identifier for claim settlements.
ClaimSettlementId	long	The system generated unique identifier of the claim settlement. • Primary Key
ClaimSettlementType	string	The type of transaction for the claim settlement.
ConversionCurrencyCode	string	The currency code of the currency being converted to.
ConversionExchangeRate	decimal	The exchange rate of the currency being converted to.
ConversionRateType	string	The currency conversion rate type that is used to derive the exchange rate for converting the user-entered currency to CRM Corporate currency.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreationMethod	string	The method used to create the marketing claim settlement. For example, manually, file import, or web service.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Description	string	The free text description of the record.
InactivatedBy	string	The user who inactivated the claim settlement.
InactivationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marketing claim was inactivated.

Name	Type	Description
InvoiceReference	string	Free form text to store Invoice reference.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
PaymentCheckReference	string	This is a free form text field. This field can be used by the Finance Users to record the Payment Check Reference for the Claim Settlement of type Payment.
PaymentMethod	string	The payment method used for the claim payment.
StatusCode	string	The pre-defined code used to indicate the status.

Marketing Fund Request

The request for a portion of the budget to be allocated towards execution of marketing activities.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/commonMarketing/budgets/budgetPublicService/}FundRequest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Marketing Budget Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalReferenceId	long	The additional reference identifier associated to the marketing budget, that identifies a particular partner program or marketing source.

Name	Type	Description
AdditionalReferenceType	string	The type of the additional reference associated to the marketing fund request, that is, partner program or marketing source.
Age	decimal	The number of days since the creation of the marketing fund request.
ApprovedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount approved for the marketing fund request.
ApprovedBy	string	The user who approved the marketing fund request.
ApprovedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marketing fund request was approved.
AvailableFundRequestAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The difference between total approved marketing fund request and total approved claim amounts, which is available to new claims.
BudgetCurrencyExchangeRate	decimal	The exchange rate from Fund Request To Budget Currency.
BudgetId	long	The unique identifier for the marketing budget.
Comments	string	The comments for the record.
ConversionCurrencyCode	string	The currency code of the currency being converted to.
ConversionExchangeRate	decimal	The exchange rate of the currency being converted to.
ConversionRateType	string	The currency conversion rate type that is used to derive the exchange rate for converting the user-entered currency to CRM Corporate currency.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.

Name	Type	Description
Description	string	The free text description of the record.
FundRequestCode	string	The unique identifier of the fund request.
FundRequestId	long	The system-generated, unique identifier for the marketing fund request. • Primary Key
FundRequestName	string	The display name for the marketing fund request.
FundRequestStatusCode	string	The status code of the marketing fund request.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
PartnerContactId	long	The partner contact associated to the fund request.
PartnerId	long	The unique identifier of the partner.
RejectedBy	string	The user who rejected the marketing fund request.
RejectedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marketing fund request was rejected.
RejectionReasonCode	string	The reason for rejecting the marketing fund request.
RequestedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount requested for the fund request.
SubmittedBy	string	The user who submitted the marketing fund request.
SubmittedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The submission date of the marketing fund request.
TotalApprovedClaimAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Sum of approved amounts for all claims in Approved status.

Marketing Campaign Service

Service to operate on marketing campaigns. The supported operations are create, update, delete, and search.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/oracle/apps/marketing/coreMarketing/campaigns/campaignPublicService/}CampaignPublicService

Service WSDL URL: https://servername/crmService/CampaignPublicService?WSDL

Logical Business Objects

- CRM
- CRM
- CRM

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Marketing Campaign Lead Distribution Partner*
Handles	*Marketing Campaign Resource*
Handles	*Deprecated - Marketing Campaign*
Handles	*Marketing Source Code*

Operations

- *getCampaign*
- *createCampaign*
- *updateCampaign*
- *deleteCampaign*
- *findCampaignNew*
- *findCampaign*
- *findCampaigns*
- *getDfltObjAttrHints*

- *getServiceLastUpdateTime*
- *getEntityList*

getCampaign

A web service method that queries a single record of an Oracle Fusion Marketing Campaign Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
campaignId	long	A required input parameter of the getCampaign web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Marketing Campaign*	The return value of the getCampaign web service method. It includes the full set of attributes and child entities of the record.

createCampaign

A web service method that creates Oracle Fusion Marketing Campaign Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
campaign	*Marketing Campaign*	A required input parameter of the createCampaign web service method. The input campaign Object includes the attribute values that the record is created with.

Response Payload

Element Name	Type	Description
result	*Marketing Campaign*	The return value of the createCampaign web service method. It includes the full set of attributes and child entities of the record.

updateCampaign

A web service method that updates an Oracle Fusion Marketing Campaign Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
campaign	*Marketing Campaign*	An input parameter of the updateCampaign web service method. The record matching the ID specified in this input campaign Object is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Marketing Campaign*	The return value of the updateCampaign web service method. It includes the full set of attributes and child entities of the record.

deleteCampaign

A web service method that delete an Oracle Fusion Marketing Campaign Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
campaign	*Marketing Campaign*	A required input parameter of the deleteCampaign web service method. The record matching the input Object's attribute values specified in the campaign are deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteCampaign.

findCampaignNew

A web service method that queries list of records of matching Oracle Fusion Marketing Campaign Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findCampaignNew web service method. The filter criteria are a cumulative set of attribute criteria that identifies records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findCampaignNew.

Response Payload

Element Name	Type	Description
result	*Marketing Campaign*	The return value of the findCampaignNew web service method. It includes the full set of attributes of records queried.

findCampaign

A web service method that queries a single record of an Oracle Fusion Marketing Campaign Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findCampaign web service method. The filter criteria are a cumulative set of attribute criteria that identifies records queried for.
BindLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The input parameter of the findCampaign web service method that identifies the last update date on the campaign.
BindCampaignName	string	The input parameter of the findCampaign web service method that identifies the campaign name.

Element Name	Type	Description
BindCampaignStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The input parameter of the findCampaign web service method that identifies the campaign start date.
BindCampaignEndDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The input parameter of the findCampaign web service method that identifies the campaign end date.
BindExecutionStatus	string	The input parameter of the findCampaign web service method that identifies the campaign execution status code.
BindSourceCode	string	The input parameter of the findCampaign web service method that identifies the source code.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findCampaign.

Response Payload

Element Name	Type	Description
result	*Marketing Campaign*	The return value of the findCampaign web service method. It includes the full set of attributes of records queried.

findCampaigns

A web service method that queries records of matching Oracle Fusion Marketing Campaign Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findCampaigns web service method. The filter criteria are a cumulative set of attribute criteria that identifies records queried for.
BindCreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The input parameter of the findCampaigns web service method that identifies the creation date.
BindCampaignName	string	The input parameter of the findCampaigns web service method that identifies the campaign name.

Element Name	Type	Description
BindCampaignType	string	The input parameter of the findCampaigns web service method that identifies the campaign type.
BindCampaignStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The input parameter of the findCampaigns web service method that identifies the campaign start date.
BindCampaignEndDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The input parameter of the findCampaigns web service method that identifies the campaign end date.
BindExecutionStatus	string	The input parameter of the findCampaigns web service method that identifies the campaign execution status code.
BindSourceCode	string	The input parameter of the findCampaigns web service method that identifies the source code.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findCampaigns.

Response Payload

Element Name	Type	Description
result	*Marketing Campaign*	The return value of the findCampaigns web service method. It includes the full set of attributes of records queried.

getDfltObjAttrHints

A web service method to retrieve user interface hints, such as the service data object label and Object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.

Element Name	Type	Description
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

A web service method that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated. The parameter is present in ISO 8601 format.

getEntityList

A web service method to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the Object.

Element Name	Type	Description

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKT_UPDATE_MARKETING_CAMPAIGN_PRIV	Update Marketing Campaign	Allows updating simple campaigns and the plans, design, and execution of complex marketing campaigns.
All Operations	MKT_MANAGE_MARKETING_CAMPAIGN_PRIV	Manage Marketing Campaign	Allows web services management of simple campaigns and the plan, design, and execution of complex marketing campaigns.
All Operations	MKT_MANAGE_SALES_CAMPAIGN_PRIV	Manage Sales Campaign	For internal use only. Allows web services management of sales campaigns.
All Operations	MKT_VIEW_SALES_CAMPAIGN_PRIV	View Sales Campaign	Allows viewing sales campaigns and tracking of customer responses. A sales campaign is an e-mail promoting products or events to specific customers, that can include personalized information and links where the customer can respond.
All Operations	MKT_VIEW_MARKETING_CAMPAIGN_PRIV	View Marketing Campaign	Allows viewing simple campaigns and the plans, design, execution, and results of complex marketing campaigns.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_MANAGE_MARKETING_CAMPAIGN_PRIV	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_UPDATE_MARKETING_CAMPAIGN_PRIV	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
MKT_UPDATE_MARKETING_CAMPAIGN_PRIV	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
MKT_MANAGE_SALES_CAMPAIGN_PRIV	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
MKT_VIEW_SALES_CAMPAIGN_PRIV	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
MKT_VIEW_SALES_CAMPAIGN_PRIV	ORA_MKT_MARKETING_EXECUTION_MANAGEMENT_DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
MKT_VIEW_SALES_CAMPAIGN_PRIV	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_READ_ONLY_DUTY	Personal Campaign Management Read Only	Read Only role for Personal Campaign Management Duty.
MKT_VIEW_MARKETING_CAMPAIGN_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
MKT_VIEW_MARKETING_CAMPAIGN_PRIV	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
MKT_VIEW_MARKETING_CAMPAIGN_PRIV	ORA_MKT_MARKETING_EXECUTION_MANAGEMENT_DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
MKT_VIEW_MARKETING_CAMPAIGN_PRIV	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
MKT_VIEW_MARKETING_CAMPAIGN_PRIV	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.

Marketing Campaign

The medium to convey a marketing message to the targeted audience with the goal of retaining existing customers or generating new selling opportunities.

QName: {http://xmlns.oracle.com/apps/marketing/coreMarketing/campaigns/campaignService/}Campaign

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Marketing Campaign Lead Distribution Partner*
Contains	*Marketing Campaign Resource*
Contains	*Marketing Source Code*

Relationship Type	Object or Service
Handled by	*Marketing Campaign Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	Indicates the activity status of the marketing campaign as Active or Inactive.
ApproverId	long	The identifier of the approver for this campaign.
ApproverNote	string	A note provided by the approver of this campaign.
AttachmentEntityName	string	The name of the attachment associated with this campaign.
BUId	long	The identifier of the business unit associated with this record.
CalculationSubCost	decimal	The calculated sub cost.
CampaignCode	string	The code associated with this campaign.
CampaignEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date of the campaign.
CampaignId	long	The unique identifier for the campaign. • Primary Key
CampaignName	string	The name of the campaign.
CampaignNumber	string	The number associated with this campaign. This attribute acts as a public surrogate key.
CampaignPartners	*Marketing Campaign Lead Distribution Partner*	Reference to marketing campaign partners.
CampaignResources	*Marketing Campaign Resource*	Reference to marketing campaign resources.
CampaignStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date associated with this campaign.

Name	Type	Description
CampaignTypeCode	string	The type of campaign.
CampaignUsage	string	The usage of this campaign.
ClassificationCode	string	The organization's classification code.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Description	string	The free text description of the record.
DesignStatusCode	string	The status of the campaign design for this campaign.
DialogStatusMeaning	string	The meaning associated with the campaign design status for this campaign.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EnforceApprovalFlag	boolean	Indicates whether approval is enforced for this campaign.
ExecutionStatusCode	string	The status of the campaign execution.
LanguageCode	string	The language associated with this campaign.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
LaunchFinishDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date of the campaign launch window.
LaunchStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date of the campaign launch window.

Name	Type	Description
LeadDistributionMode	string	Indicates whether lead assignment is done based on sales territories or rules, or both.
MktgTmplId	long	Identifier of the campaign template used to created this campaign.
Name	string	The name of the organization.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
Objective	string	The objective of this campaign.
Organization	string	The name of the organization.
OrganizationId	long	The organization Id of the campaign.
Owner	string	The owner associated with the treatment.
OwnerId	decimal	The resource identifier associated with the campaign coordinator.
OwnerResourceOrgId	long	The resource organization identifier associated with the campaign coordinator.
OwnerTreeCode	string	The resource organization hierarchy code associated with the resource organization associated with the campaign coordinator.
OwnerTreeStructureCode	string	The resource organization hierarchy structure code associated with the resource organization associated with the campaign coordinator.
OwnerTreeVersionId	string	The resource organization hierarchy version associated with the resource organization associated with the campaign coordinator.

Name	Type	Description
PartnerProgramId	long	The identifier of the partner program for which this campaign is created to generate demand.
PartnerProgramName	string	The name of the partner program for which this campaign is created to generate demand.
PartnerType	string	The partner type recorded on the campaign. This campaign is created to generate demand for this type of partners.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PeriodId	long	The fiscal calendar period associated with this campaign.
PlannedCampaignEndDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The end date of the campaign.
PlannedCampaignStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The start date of the campaign.
PlannedLaunchFinishDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The end date of the campaign launch.
PlannedLaunchStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The start date of the campaign launch.
PrimaryPartnerId	decimal	The identifier of the partner sponsoring this campaign. All leads generated from this campaign are typically routed to this partner.
PriorityCode	string	The priority code associated with the campaign.
PublicSiteURL	string	The public site URL to track the publicly accessible site for collecting responses for the Fusion social campaign.
PurposeCode	string	The purpose of the campaign.
RegionCode	string	The region associated with this campaign.
RegionId	decimal	The identifier of the region associated with this campaign.

Name	Type	Description
SalesChannelType	string	The sales channel recorded on the campaign. This campaign is created to generate demand for this specific sales channel.
SourceCodes	*Marketing Source Code*	The reference to the marketing campaign source codes.
StatusCode	string	The pre-defined code used to indicate the status.
TaskTemplateId	long	The identifier of the task template used to create tasks for this campaign.
TemplateFlag	boolean	Indicates whether this record is a campaign template.

Marketing Campaign Lead Distribution Partner

The sales partners identified during campaign planning who will follow-up on the leads generated by the campaign.

QName: {http://xmlns.oracle.com/apps/marketing/coreMarketing/campaigns/campaignService/}CampaignPartners

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Marketing Campaign*
Handled by	*Marketing Campaign Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CampaignId	long	The unique identifier for the campaign.
CampaignPartnerId	long	The unique identifier of the campaign partner. • Primary Key

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartnerContactName	string	The partner contact name.
PartnerId	long	The unique identifier of the partner.
PartnerName	string	The name of the partner.
PrimaryFlag	boolean	Indicates if the campaign partner is primary.

Marketing Campaign Resource

The individual resources assigned to participate in the marketing campaign plan, design, and execution.

QName: {http://xmlns.oracle.com/apps/marketing/coreMarketing/campaigns/campaignService/}CampaignResources

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Marketing Campaign*

Relationship Type	Object or Service
Handled by	*Marketing Campaign Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	The Access Level Code of the resource within the campaign.
CampaignId	long	The unique identifier for the campaign.
CampaignResourceId	long	The unique identifier of the campaign resource. • Primary Key
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OrganizationTreeCode	string	The organization tree code for the resource organization hierarchy to which the resource belongs.
OrganizationTreeStructureCode	string	The organization tree structure code for the resource organization hierarchy to which the resource belongs.
OrganizationTreeVersionId	string	The organization tree version identifier for the resource organization hierarchy to which the resource belongs.
ResourceId	long	The unique identifier of the resource.
ResourceOrganizationId	long	The identifier of the resource organization.

Marketing Source Code

The unique identifier representing a marketing campaign and the underlying treatment and segment or list used within each execution. The source code is used to track responses and leads generated by each marketing campaign execution, which helps gauge the effectiveness of each initiative.

QName: {http://xmlns.oracle.com/apps/marketing/coreMarketing/sourcecode/sourceService/}SourceCode

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Marketing Campaign*
Handled by	*Marketing Source Code Service*
Handled by	*Marketing Campaign Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	Indicates the activity status of the marketing source code as Active or Inactive.
ActivityChannel	string	The channel associated with the source code.
ActivityEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date of the source code.
ActivityName	string	The name of the marketing activity associated with the source code.
ActivityStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date of the marketing activity associated with this source code.
ActivityStatusCode	string	Indicates the status of the marketing activity associated with this source code.

Name	Type	Description
ActivityType	string	Indicates the type of the marketing activity associated with this source code.
AllocationId	long	Stage allocation identifier identifying the marketing activity associated with this source code.
CallListId	long	The primary identifier of the list or segment associated with this source code.
CallLstName	string	The name of the list or segment associated with this source code.
CampaignId	long	The unique identifier for the campaign.
CampaignName	string	The name of the campaign associated with this source code.
CampaignUsage	string	The campaign usage associated with source code.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EventId	long	The identifier of the event associated with this source code.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
SearchCampaignId	long	The identifier of the search marketing campaign. This is the foreign key to the search marketing campaign represented by this source code.

Name	Type	Description
SourceCode	string	The source code that represents this record.
SourceCodeId	long	The primary key identifier associated with this record. • Primary Key
StageId	long	The identifier of the campaign stage associated with the marketing activity this source code represents.
StageName	string	The name of the campaign stage associated with this source code.
StageTreatmentId	long	The treatment identifier associated with the marketing activity associated with this source code.
TreatmentId	long	The identifier of the treatment associated with this source code.

Marketing Custom Business Object (Deprecated)

Service to operate on custom business objects created in the Oracle Fusion Marketing application. The supported operations are create, update, delete, and search. A custom business object stores extended information for an Oracle Fusion business object, for example, related orders for a marketing campaign.

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/marketing/custExtn/extnService/}MarketingCustomObjectService

Service WSDL URL: https://servername/crmService/MarketingCustomObjectService?WSDL

Logical Business Objects

- CRM : Marketing : Marketing Custom Object

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Custom Business Object*

Relationship Type	Object or Service

Operations

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*
- *createEntity*
- *getEntity*
- *updateEntity*
- *deleteEntity*
- *findEntity*
- *mergeEntity*
- *processEntity*

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Retrieves the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

A web service method to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the Object.

createEntity

Creates records of an Oracle Fusion marketing custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A required input parameter of the createEntity web service method. It includes the attribute values that the records is created with.
objectName	string	A required input parameter of the createEntity web service method. Use the API name of the custom object you want to create.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	anyType	The return value of the createEntity web service method. It includes the full set of attributes and child entities of the record.

getEntity

Queries by ID a single record of an Oracle Fusion marketing custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
keyValue	string	A required input parameter of the getEntity web service method. It includes the row ID of the record you want to query for.
objectName	string	A required input parameter of the getEntity web service method. Use the API name of the custom object you want to query for.

Response Payload

Element Name	Type	Description
result	anyType	The return value of the getEntity web service method. It includes the full set of attributes and child entities of the record.

updateEntity

Updates a set of records of an Oracle Fusion marketing custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A required input parameter of the updateEntity method. All records matching the IDs specified in this input Object are updated with the corresponding input attribute values also specified.
objectName	string	A required input parameter of the updateEntity web service method. Use the API name of the custom object you want to update.

Response Payload

Element Name	Type	Description
result	anyType	

deleteEntity

Deletes a set of records of an Oracle Fusion marketing custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A required input parameter of the deleteEntity web service method. All records matching the input attribute values specified in this input Object are deleted.
objectName	string	A required input parameter of the deleteEntity web service method. Use the API name of the custom object you want to delete.

Response Payload

Element Name	Type	Description
result	void	Not applicable

findEntity

Queries for a set of records of an Oracle Fusion marketing custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findEntity web service method. It includes optional search criteria, sort filter, and attributes to be excluded when returning the set of records. Also includes the option to return any of the custom object's child entities,
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Not applicable
objectName	string	A required input parameter of the findEntity web service method. Use the API name of the custom object you want to query for.

Response Payload

Element Name	Type	Description
result	anyType	The return value of the findEntity web service method. It includes the full set of attributes and child entities of the records.

mergeEntity

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	
objectName	string	

Response Payload

Element Name	Type	Description
result	anyType	

processEntity

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	
object	anyType	
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	
objectName	string	

Response Payload

Element Name	Type	Description
result	anyType	

Custom Business Object

A service to create, update, delete, or find custom business objects created in the Oracle Fusion CRM application. A custom business object stores extended information for an Oracle Fusion business object.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/custom/extnService/}CustomReferenceService

Service WSDL URL: https://servername/crmService/CustomReferenceService?WSDL

Logical Business Objects

- CRM : CRM Application Composer : CRM Extensible Object

Operations

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*
- *invokeObjectFunction*
- *createEntity*
- *getEntity*

- *updateEntity*
- *deleteEntity*
- *findEntity*
- *mergeEntity*
- *processEntity*

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

invokeObjectFunction

invoke custom object row function.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
row	anyType	DataObject used to invoke the script
viewName	string	Custom Object type name
scriptName	string	row function name
params	anyType	row function parameters

Response Payload

Element Name	Type	Description
result	anyType	DataObject

createEntity

Create operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject created for the custom object.

getEntity

Get operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
keyValue	string	A list of key values for identifying the custom object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject identified by the keyValue.

updateEntity

Update operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be updated. The DataObject must include key fields for identifying the updated record, as well as the fields to be updated.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject updated for the custom object.

deleteEntity

Delete operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be deleted. The DataObject must include key fields for identifying the deleted record.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	void	DataObject that is deleted.

findEntity

Find operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	List of DataObjects identified by the findCriteria.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Search control.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObjects found

mergeEntity

merge with existing custom object if exist, create new object if does not exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be merged. The DataObject must include key fields for identifying the record, as well as the fields to be merged.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject result from the merge

processEntity

batch process for custom object operation

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Operation name
object	anyType	DataObjects to be batch processed
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	process control
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject result list

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
processEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea
getEntityList	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
updateEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea
getEntity	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
deleteEntity	ZCX_DELETE_CUSTOM_OBJECT_PRIV	DELETE custom object resources (WorkArea)	PermissionSet to DELETE for custom object WorkArea
findEntity	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
getDfltObjAttrHints	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea

Operation Name	Privilege Code	Privilege Name	Privilege Description
createEntity	ZCX_CREATE_CUSTOM_OBJECT_PRIV	CREATE custom object resources (WorkArea)	PermissionSet to CREATE for custom object WorkArea
getServiceLastUpdateTime	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
mergeEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea

Marketing List Service

Service to operate on marketing lists and underlying members. The supported operations are create, update, delete, and search.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/oracle/apps/marketing/coreMarketing/lists/listPublicService/}MktListPublicService

Service WSDL URL: https://servername/crmService/MktListPublicService?WSDL

Logical Business Objects

- CRM : Marketing : Marketing List

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Marketing List*
Handles	*Marketing List Contact*

Operations

- *getMktList*
- *createMktList*
- *updateMktList*
- *deleteMktList*
- *getMktListMember*

- *createMktListMember*
- *updateMktListMember*
- *deleteMktListMember*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getMktList

A web service method of the Get operation for Marketing List.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
callListId	long	The unique Marketing List identifier for the method getMktList.

Response Payload

Element Name	Type	Description
result	*Marketing List*	The parameter returns the Marketing List that matches the inbound key attributes.

createMktList

A web service method of the Create operation for Marketing List.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
mktList	*Marketing List*	The Marketing List to be created for the method createMktList.

Response Payload

Element Name	Type	Description
result	*Marketing List*	The parameter returns the created Marketing List.

Element Name	Type	Description

updateMktList

A web service method of the Update operation for Marketing List.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
mktList	*Marketing List*	The Marketing List to be updated for the method updateMktList.

Response Payload

Element Name	Type	Description
result	*Marketing List*	The parameter returns the updated Marketing List.

deleteMktList

A web service method of the Delete operation for Marketing List.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
mktList	*Marketing List*	The Marketing List to be deleted for the method deleteMktList.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteMktList.

getMktListMember

A web service method of the Get operation for Marketing List Contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
callListMemberId	long	An input parameter of the getMktListMember web service method. It is the row ID of the list record you want to query for.

Response Payload

Element Name	Type	Description
result	*Marketing List Contact*	The parameter returns the Marketing List Contact that matches the inbound key attributes.

createMktListMember

A web service method of the Create operation for Marketing List Contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
mktListMember	*Marketing List Contact*	The Marketing List Contact to be created for the method createMktListMember.

Response Payload

Element Name	Type	Description
result	*Marketing List Contact*	The parameter returns the created Marketing List Contact.

updateMktListMember

A web service method of the Update operation for Marketing List Contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
mktListMember	*Marketing List Contact*	The Marketing List Contact to be updated for the method updateMktListMember.

Response Payload

Element Name	Type	Description
result	*Marketing List Contact*	The parameter returns the updated Marketing List Contact.

deleteMktListMember

A web service method of the Delete operation for Marketing List Contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
mktListMember	*Marketing List Contact*	The Marketing List Contact to be deleted for the method deleteMktListMember.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteMktListMember.

getDfltObjAttrHints

A web service method to retrieve user interface hints, such as the service data object label and Object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

A web service method that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated. The parameter is present in ISO 8601 format.

getEntityList

A web service method to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the Object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKT_VIEW_MARKETING_SEGMENT_PRIV	View Marketing Segment	Allows viewing marketing segments and segment trees used to identify and group specific members of the customer base.
All Operations	MKT_MANAGE_MARKETING_LIST_PRIV	Manage Marketing List	For internal use only. Allows web services management of marketing lists.
All Operations	MKT_UPDATE_MARKETING_LIST_PRIV	Update Marketing List	Allows updating a list of contacts created for marketing campaigns.
All Operations	MKT_CREATE_MARKETING_LIST_PRIV	Create Marketing List	Allows creating a grouping of contacts for use in marketing campaigns.
All Operations	MKT_VIEW_MARKETING_LIST_PRIV	View Marketing List	Allows viewing a list of contacts created for marketing campaigns.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_VIEW_MARKETING_LIST_PRIV	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
MKT_VIEW_MARKETING_LIST_PRIV	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
MKT_VIEW_MARKETING_LIST_PRIV	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
MKT_CREATE_MARKETING_LIST_PRIV	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
MKT_CREATE_MARKETING_LIST_PRIV	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
MKT_UPDATE_MARKETING_LIST_PRIV	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
MKT_UPDATE_MARKETING_LIST_PRIV	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
MKT_MANAGE_MARKETING_LIST_PRIV	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
MKT_MANAGE_MARKETING_LIST_PRIV	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_VIEW_MARKETING_SEGMENT_PRIV	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
MKT_VIEW_MARKETING_SEGMENT_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
MKT_VIEW_MARKETING_SEGMENT_PRIV	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
MKT_VIEW_MARKETING_SEGMENT_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_EXECUTION_MANAGEMENT_DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_ MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_ RECOMMENDATION_ANALYSIS_ DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_ MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Marketing List

The static list of customer contacts and prospects who can be targeted within a marketing a campaign.

QName: {http://xmlns.oracle.com/apps/marketing/coreMarketing/lists/listService/}MktList

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Marketing List Contact*
Handled by	*Marketing List Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BUId	long	The business unit id stamped on this record.
CallListCode	string	The alternate key associated with this record.
CallListId	long	The primary identifier associated with this record. • Primary Key
CallListName	string	The name associated with this list or segment.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DataSourceType	string	The data source type indicating whether this list holds person parties or organization contacts.
DescriptionText	string	The description text.

Name	Type	Description
DesiredNumberCons	long	The desired number of contacts.
ExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the campaign expires.
FolderPath	string	The folder path.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
ListMember	*Marketing List Contact*	The customer contacts and prospects (marketing list contacts) associated with this list.
LockedFlag	boolean	Indicates whether this treatment is locked. A locked treatment cannot be updated.
MemberCount	long	The number of list members for this list.
NodeIndent	string	Node indent.
NumberOfContacts	long	The number of contacts.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
Owner	string	The party name of the owner of this marketing list.
OwnerId	long	The resource identifier of the owner.
OwnerResourceOrgId	long	The identifier of the owner's resource organization.
OwnerTreeCode	string	The owner's organization tree code.
OwnerTreeStructureCode	string	The owner's organization tree structure code.
ParCallListId	long	The identifier of the parent call list.

Name	Type	Description
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyUsage	string	Indicates the party usage associated with the party record represented by the marketing list member.
PurchaseAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount paid for purchase of this marketing list. This attribute pertains to purchased list only.
PurchaseCurrencyCode	string	The purchase currency code.
PurchaseDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The purchase date.
RegionId	decimal	The region identifier on the list.
SegmentTypeCode	string	The segment type code indicating the type of audience this record holds. For example, list, segment, and segment tree.
SourceOutId	long	The identifier of the source.
StatusCode	string	The pre-defined code used to indicate the status.
SubTypeCode	string	The code indicating the type of the list. For example, imported, internal, subscription list, and seed list.
TargetUsageCount	long	The target usage count.
TeamId	long	The identifier of the resource team.
TeamName	string	The name of the resource team associated with this marketing list.

Marketing List Contact

The individual contacts that are selected in a marketing list.

QName: {http://xmlns.oracle.com/apps/marketing/coreMarketing/lists/listService/}MktListMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Marketing List*
Handled by	*Marketing List Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CallListId	long	The call list contact id.
CallListMemberId	long	The call list contact id. • Primary Key
ContactId	long	The identifier of the contact person.
ContactPointId	long	The unique primary key identifier for the contact point.
ContactPointId1	long	The unique identifier for a contact point.
ContactPointType	string	The type of the contact point.
ContactPointType1	string	The type of the contact point, such as phone or e-mail.
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Customer	string	The identifier of the customer party associated with this list member.

Name	Type	Description
EmailAddress	string	The email address associated with the record.
EmailFormat	string	Indicates the preferred format for e-mail addressed to this address. For example, HTML or ASCII.
EmailRestrictions	string	Indicates whether the email address of the marketing list member has any contact restrictions.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
ObjectId	long	The identifier of the object.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsage	string	The party usage recorded for this party in the customer master.
PartyUsageCode	string	The usage context of a party's contact point.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PhoneAreaCode	string	The area code prefix for the phone number.

Name	Type	Description
PhoneCallingCalendar	string	The name or code for a calling calendar used with this telephone number. This attribute is no longer used.
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The additional number addressed after initial connection to an internal telephone system.
PhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound, or outbound.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PhoneRestrictions	string	Indicates whether there are any contact restrictions on the phone number associated with this list member.
RelationshipId	long	The relationship identifier for the record.
RelationshipId1	long	Relationship identifier for this list member. This identifier represents the relation between the customer and the contact.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Marketing Response Service

Service to operate on marketing responses. The supported operations are create, update, delete, and search.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/oracle/apps/marketing/response/responsePublicService/}ResponsePublicService

Service WSDL URL: https://servername/crmService/ResponsePublicService?WSDL

Logical Business Objects

- CRM : Marketing : Marketing Response

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Source System Reference*
Handles	*Deprecated - Marketing Response*
Handles	*Phone*
Handles	*Marketing Response Product*
Handles	*Contact Preference*
Handles	*Address*
Handles	*Trading Community Contact Point Additional Information*
Handles	*Telex*
Handles	*Trading Community Address Purpose*
Handles	*Web*
Handles	*Marketing Response Survey*
Handles	*Electronic File Transfer*
Handles	*Email*
Handles	*Trading Community Original System Mapping Identifier Additional Information*
Handles	*Trading Community Address Additional Information*
Handles	*Instant Messaging*

Operations

- *getMktRmResponse*
- *createMktRmResponse*

- *updateMktRmResponse*
- *deleteMktRmResponse*
- *findMktRmResponse*
- *processMktRmResponse*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getMktRmResponse

A web service method that queries a single record of Oracle Fusion Marketing Response Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
responseId	long	A required input parameter of the getMktRmResponse web service method. It is the row ID of the response record you want to query for.

Response Payload

Element Name	Type	Description
result	*Marketing Response*	The return value of the getMktRmResponse web service method. It includes the full set of attributes and child entities of the record.

createMktRmResponse

A web service method that creates Oracle Fusion Marketing Response Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
mktRmResponse	*Marketing Response*	A required input parameter of the createMktRmResponse web service method. The input object includes the attribute values that the response record is created with.

Response Payload

Element Name	Type	Description
result	*Marketing Response*	The return value of the createMktRmResponse web service method. It includes the full set of attributes and child entities of the record.

updateMktRmResponse

A web service method that updates an Oracle Fusion Marketing Response Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
mktRmResponse	*Marketing Response*	A required parameter of the updateMktRmResponse web service method. The record matching the ID specified in this input response is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Marketing Response*	The return value of the updateMktRmResponse web service method. It includes the full set of attributes and child entities of the record.

deleteMktRmResponse

A web service method that delete an Oracle Fusion Marketing Response Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
mktRmResponse	*Marketing Response*	A required input parameter of the deleteMktRmResponse web service method. The record matching the input attribute values specified in the response are deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteMktRmResponse.

findMktRmResponse

A web service method that queries a single record or set of records of fusion marketing response by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the find response web service method. The filter criteria are the cumulative set of attribute criteria that identifies records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findMktRmResponse.

Response Payload

Element Name	Type	Description
result	*Marketing Response*	The return value of the find response web service method. It includes the full set of attributes of records queried.

processMktRmResponse

Performs a create, update, delete, or merge operation on a list of Marketing Response rows. The specified operation is applied to all objects in the given list.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The parameter indicates what action shall be performed, such as create, update, merge, or delete.
mktRmResponse	*Marketing Response*	A list of Marketing Responses to be processed.

Element Name	Type	Description
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Marketing Response*	The parameter returns a list of Marketing Responses that are successfully processed.

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and Object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

A web service method that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

A web service method to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKT_MANAGE_DIRECT_MAIL_MARKETING_CAMPAIGN_EXECUTION_PRIV	Manage Direct Mail Marketing Campaign Execution	Privilege to manage Direct Mail Marketing campaign execution
All Operations	MKL_IMPORT_SALES_LEAD_PRIV	Import Sales Lead	Allows importing sales leads. A sales lead is a prospect or existing customer who has interest or the

Operation Name	Privilege Code	Privilege Name	Privilege Description
			potential for interest in a product or service being sold.
All Operations	MKT_MANAGE_MARKETING_TREATMENT_PRIV	Manage Marketing Treatment	For internal use only. Allows web services management of marketing treatments.
All Operations	MKT_MANAGE_SALES_CAMPAIGN_PRIV	Manage Sales Campaign	For internal use only. Allows web services management of sales campaigns.
All Operations	ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	Set Up File Import Activity	Allows creating and maintaining import activities that contain process criteria, file mapping, and schedule to import external files containing business objects, such as customers and contacts, into staging tables.
All Operations	MKL_VIEW_SALES_LEAD_PRIV	View Sales Lead	Allows viewing sales leads. A sales lead is a prospect or existing customer who has interest or the potential for interest in a product or service being sold.
All Operations	MKT_MANAGE_MARKETING_STAGE_EXECUTION_PRIV	Manage Marketing Stage Execution	For internal use only. Allows web services management of marketing campaign stage execution.
All Operations	MKT_MANAGE_MARKETING_IMPORT_PRIV	Manage Marketing Import	For internal use only. Allows web services management of marketing import.
All Operations	MKT_MANAGE_MARKETING_RESPONSE_PRIV	Manage Marketing Response	For internal use only. Allows web services management of marketing responses.
All Operations	MKT_VIEW_MARKETING_CAMPAIGN_PRIV	View Marketing Campaign	Allows viewing simple campaigns and the plans, design, execution, and results of complex marketing campaigns.
All Operations	MKT_CREATE_MARKETING_RESPONSE_PRIV	Create Marketing Response	Allows creating responses to marketing campaigns.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_CREATE_MARKETING_RESPONSE_PRIV	ORA_MKT_MARKETING_EXECUTION_MANAGEMENT_DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
MKT_MANAGE_SALES_CAMPAIGN_PRIV	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			builds pipeline, manages leads and opportunities and performs sales forecasting.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
MKT_MANAGE_MARKETING_TREATMENT_PRIV	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
MKT_MANAGE_DIRECT_MAIL_MARKETING_CAMPAIGN_EXECUTION_PRIV	ORA_MKT_MARKETING_EXECUTION_MANAGEMENT_DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_MANAGE_MARKETING_IMPORT_PRIV	ORA_MKT_MARKETING_EXECUTION_MANAGEMENT_DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
MKT_MANAGE_MARKETING_IMPORT_PRIV	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_EXPORT_IMPORT_DUTY	Territory Management Export Import	Manages sales territory export and import. Provides users with the ability to export territory data, modify it offline and import.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	Customer Contract Manager	Manages a team of customer contract administrators.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	Supplier Contract Administrator	Works with internal buyers and legal to negotiate and author supplier contracts and agreements. Tracks critical contract milestones,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			monitors supplier performance, and assists buyers during contract renewals, closeout, and amendments.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZBS_SALES_ ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_PSC_ADMINISTER_ PROPERTY_SETUP_DUTY_CRM	PSC Property Setup Administration	Allows the agency user to administer property setup.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZCH_TRADING_ COMMUNITY_DATA_STEWARD_ JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_HRC_HUMAN_CAPITAL_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Human Capital Management Application Administrator	Configures the Oracle Fusion Global Human Resources application and has access to all duty roles necessary to implement the Compensation, Workforce Deployment, and Workforce Development offerings.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_CN_INCENTIVE_ COMPENSATION_ASSIGNMENT_ ADMISTRATION_DUTY_CRM	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_ PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_QSC_SALES_CATALOG_ ADMINISTRATOR_JOB	Sales Catalog Administrator	Sets up and maintains sales catalogs for leads, opportunities, quotes and orders. Sets up and maintains rollup catalog for the purpose of forecasting, territory management, and other purposes. Also associates products, promotions, and competitor products to catalogs, and defines eligibility rules. Also manages the bulk export and import of all product group-related objects.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_OKC_ENTERPRISE_ CONTRACT_MANAGER_JOB	Enterprise Contract Manager	Manages a team of enterprise contract administrators.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_OKC_ENTERPRISE_ CONTRACT_ADMINISTRATOR_JOB	Enterprise Contract Administrator	Performs the duties of both customer contract administrator and supplier contract administrator.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_CN_INCENTIVE_ COMPENSATION_ ADMINISTRATOR_JOB	Incentive Compensation Application Administrator	Set up incentive compensation application
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_OKC_CUSTOMER_ CONTRACT_ADMINISTRATOR_JOB	Customer Contract Administrator	Works with sales account teams and legal to negotiate and author customer contracts. Tracks critical contract milestones, service level agreements, and assists account teams during contract renewals and amendments.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_SVC_HELPDESK_ ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_ MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_LOY_ADMINISTRATOR_DUTY	Loyalty Administrator	Manages the provisioning , setup and configuration of Loyalty Application.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_CJM_CHANNEL_ INTEGRATION_SPECIALIST_DUTY_ CRM	Channel Integration Specialist	Manages import of transactional data from external applications into Channel Revenue Management.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_OKC_SUPPLIER_CONTRACT_ MANAGER_JOB	Supplier Contract Manager	Manages a team of supplier contract administrators.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_CPQ_ADMINISTRATOR_JOB	CPQ Administrator	Individual responsible for implementing and managing the CPQ application. Can set up users, quoting processes, product catalog, and product pricing. Can also tailor the application as required by the business.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_POZ_DATAFOX_INTEL_ ADMINISTRATION_DUTY_CRM	DataFox Administration for Supplier Intelligence	Manages setup for Power Supplier Intelligence with Oracle DataFox Smart Data feature. Not applicable outside of this feature and should be granted only to a user responsible for configuring this setup. This duty role has been obsoleted as part of the deprecation of the feature Manage Supplier Risk with DataFox Supplier Intelligence feature.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_MOT_TERRITORY_ MANAGEMENT_T2P_MIGRATION_ DUTY	Territory Management T2P Migration	Manages sales territory export and import. Provides users with the ability to export territory data from a test environment and import into production.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZCM_SALES_PARTY_ ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_SVC_HR_SR_ ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_MOT_QUOTA_ MANAGEMENT_EXPORT_ IMPORT_DUTY	Quota Management Export Import	Manages sales quota export and import. Provides users with the ability to export sales quota data, modify it offline and import.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_ DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_CN_INCENTIVE_ COMPENSATION_CREDITS_ EARNINGS_MANAGEMENT_ DUTY_CRM	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			incentive compensation for a set of participants.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
MKT_MANAGE_MARKETING_ RESPONSE_PRIV	ORA_MKT_MARKETING_ EXECUTION_MANAGEMENT_ DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
MKT_VIEW_MARKETING_ CAMPAIGN_PRIV	ORA_MKL_SALES_LEAD_ QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
MKT_VIEW_MARKETING_ CAMPAIGN_PRIV	ORA_MKT_MARKETING_ APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
MKT_VIEW_MARKETING_ CAMPAIGN_PRIV	ORA_MKT_MARKETING_ EXECUTION_MANAGEMENT_ DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
MKT_VIEW_MARKETING_CAMPAIGN_PRIV	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
MKT_VIEW_MARKETING_CAMPAIGN_PRIV	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
MKL_IMPORT_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
MKT_MANAGE_MARKETING_STAGE_EXECUTION_PRIV	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_CPQ_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_ COMMUNITY_DATA_STEWARD_ JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_CUSTOMER_ CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_ENTERPRISE_ CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_SUPPLIER_CONTRACT_ MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_CUSTOMER_ CONTRACT_ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_SUPPLIER_CONTRACT_ ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_ENTERPRISE_ CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_CUSTOMER_ CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_HRC_HUMAN_CAPITAL_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_BEN_BENEFITS_ IMPLEMENTATION_DUTY_CRM	Benefits Management Implementer	Manages benefits implementation setup using the Oracle Fusion Functional Setup Manager.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_ MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_ MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_ MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_SALES_ MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_ MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_CPQ_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_QSC_SALES_CATALOG_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_PER_USER_NAME_CREATION_AND_LINKING_DUTY_CRM	Link User Name to Person	Creates a new user name or links an existing user name for a person.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_EXECUTION_MANAGEMENT_DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_CPQ_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_CPQ_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_PAY_PAYROLL_IMPLEMENTATION_DUTY_CRM	Payroll Implementation	Manages complete payroll setup and maintenance.
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_PAY_PAYROLL_IMPLEMENTATION_VIEW_DUTY_CRM	Payroll Implementation View	Views complete payroll setup.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			sales lead generation and predictive model learning.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_CPQ_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_HR_SR_ ADMINISTRATION	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_ DIRECTOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			setups, customer center objects, and relationship information inquiries.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_ MANAGER_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_ MANAGER_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_ MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_SALES_ MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZPM_PARTNER_ ADMINISTRATOR_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_SVC_SERVICE_STATUS_ COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_ COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZCM_SETUP_CUSTOMER_ CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_ CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_CPQ_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_CPQ_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Address

An address of a trading community member, such as Oracle Corporation is located at 500 Oracle Parkway, Redwood Shores, CA.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Telex*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contains	*Trading Community Address Additional Information*
Contains	*Email*

Relationship Type	Object or Service
Contains	*Electronic File Transfer*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AddressExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the location is no longer valid.
AddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines that are used in Japan.
AddressStyle	string	Style of the address.
Addressee	string	The information of the addressee.
City	string	The name of the city.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
ContactPreferenceExistFlag	boolean	Indicator to specify if the contact is primary contact for the party.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	The name of the country.
Country1	string	The attribute country1 is not used.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
DoNotValidateFlag	boolean	Indicator to specify that a particular location is not eligible for address validation irrespective of the current validation.
Eft	*Electronic File Transfer*	The electronic file transfer information for the party.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedAddress	string	The formatted read-only address.
FormattedLocaleAddress	string	The formatted read-only local address.
FormattedMultilineAddress	string	The formatted multi line address of the party site.
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
HouseType	string	Indicates the building type.
IdentifyingAddressFlag	boolean	Indicator to specify the identifying address for the party. Y stands for the indentifying site and N stands for sites that are not the indentifying site.

Name	Type	Description
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
Language	string	The operating language for the party site.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	The latitude of the party address.
LocationDirections	string	Directions to the location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
LocationLanguage	string	The operating language for the locations.
Longitude	decimal	The longitude of the party address.
Mailstop	string	A user-defined code to indicate a mail drop point within the organization.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary address of the contact irrespective of the context. Y stands for primary address and N stands for all others.
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	Stores the doing-business_as (DBA) party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameDivision	string	Stores the division party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameLegal	string	Stores the legal party name for a party site. This column is used to store FSIO related legal party name attribute.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteInformation	*Trading Community Address Additional Information*	The party address information.
PartySiteName	string	The user-defined name for the site.
PartySiteNumber	string	The party site number of the address.
PartySiteType	string	Stores the party site type and is based on the lookup. Currently this is either null or one-time.
PartySiteUse	*Trading Community Address Purpose*	The information of the party address usage.
PartyUsageCode	string	The usage context of a party's contact point.
Phone	*Phone*	The phone information for the entity.
Position	string	The primary direction such as north or east that is used to access the location.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four digit extension to the United States postal ZIP code.

Name	Type	Description
Province	string	The name of the province.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The Telex information associated with the party.
UsageCode	string	The usage code is not used.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	The standardized status code describing the results of the validation.
Web	*Web*	The web information related to the record.

Contact Preference

The contact preference of the trading community member. For example, do not call Joe Smith between 10 a.m. and 12 noon on weekdays.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}ContactPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Electronic Data Interchange*
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Household*
Contained by	*Phone*
Contained by	*Telex*
Contained by	*Web*
Contained by	*Contact Address*
Contained by	*Electronic File Transfer*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*

Relationship Type	Object or Service
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactLevelTable	string	The table that stores the contact level of the contact preference, and uses the SUBJECT_TABLE lookup. The list of accepted values are HZ_PARTIES, HZ_PARTIES_SITES, or HZ_CONTACT_POINTS.
ContactLevelTableId	long	The foreign key to the table specified in CONTACT_LEVEL_TABLE column. The list of accepted values are PARTY_ID from HZ_PARTIES table, CONTACT_POINT_ID from HZ_CONTACT_POINTS table, or PARTY_SITE_ID from HZ_PARTY_SITES table.
ContactPreferenceId	long	The unique identifier for the contact preference. • Primary Key
ContactType	string	The contact party type that defines whether the contact is a sales account, a prospect, a contact, or any other user-defined party type. The default value is CUSTOMER. A list of accepted values is defined in the lookup CONTACT_TYPE.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
MaximumNoOfInteractUOMCode	string	The period of time during which the maximum number of interactions applies. Uses the MAX_NO_OF_INTERACT_UOM_CODE lookup.
MaximumNoOfInteractions	decimal	The number of times you can use this contact point. The period of time that this number applies is stored in the MAX_NO_OF_INTERACT_UOM_CODE column.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PreferenceCode	string	Indicates whether to use a particular contact method. The list of accepted values are defined in the PREFERENCE_CODE lookup.
PreferenceEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes inactive.
PreferenceEndTimeHR	int	The hour part of time when the contact preference becomes inactive. The time is recorded in the 24 hour format.
PreferenceEndTimeMi	int	The minutes part of the time when the contact preference becomes inactive.
PreferenceStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes active.
PreferenceStartTimeHR	int	The hour part of time when the contact preference becomes active. The time is recorded in the 24 hour format.
PreferenceStartTimeMi	int	The minutes part of the time when the contact preference becomes active.
PreferenceTopicType	string	The appropriate subjects to send the party that the preference is created for. The list of accepted values are defined in the PREFERENCE_TOPIC_TYPE lookup.

Name	Type	Description
PreferenceTopicTypeCode	string	The code of the preference topic type.
PreferenceTopicTypeId	long	The unique identifier of the preference topic type.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
RequestedBy	string	Indicates if the permission or restriction was created internally or requested by the party. The list of accepted values are defined in the REQUESTED_BY lookup.
Status	string	The status of the record.

Marketing Response

The entity created based on the reaction of the targeted audience to the marketing message and is used to judge the positive or negative outcome of a marketing campaign.

QName: {http://xmlns.oracle.com/apps/marketing/response/responseService/}MktRmResponse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Marketing Response Product*
Contains	*Marketing Response Survey*
Contains	*Address*
Handled by	*Marketing Response Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountId	long	The identifier of the account.
AttachmentEntityName	string	The entity name of the attachment to this response.
BUId	long	The identifier of the business unit.
CallListId	long	The identifier of the associated list.
Campaign	string	The name of the campaign associated with the response.
CampaignId	long	The unique identifier for the campaign.
CampaignMediaId	long	The identifier of the campaign media.
CampaignName	string	The name of the associated campaign.
Channel	string	The response channel.
ContactAddress	string	The address of the contact on this response.
ContactFaxNumber	string	The fax number of the contact on this response.
ContactId	long	The identifier of the contact.
ContactName	string	The contact name of the primary contact on the response.
ContactPhoneNumber	string	The phone number of the contact on this response.
ContactPointId	long	The unique primary key identifier for the contact point.
ContactPointType	string	The type of the contact point.
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerId	long	The unique identifier of the customer.
CustomerName	string	The name of the customer.
DescriptionText	string	The description of+D1061 the marketing response.
DestinationName	string	The name of the destination.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
EventRegistrationId	long	The identifier of the event registration which resulted in this response.
FaxType	string	The type of fax.
FormattedPhoneNumber	string	The formatted phone number.
FwdCntctRelshpId	long	The identifier of the forwarding contact relationship. Reference to the party relationship record of the forwarding contact.
FwdContactId	long	The identifier of the forwarding contact.
HyperlinkName	string	The name of the hyperlink.
HyperlinkURL	string	The URL associated with the response.
HzStatusActive	string	Indicates if the TCA record is active.
IPAddressCode	string	The internal IP address code.
ImportTaskId	long	The identifier of the import task associated with this response, if imported.

Name	Type	Description
InteractionId	long	The identifier of the interaction.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LeadId	long	The identifier of the lead.
LoadNumber	long	The Load Number corresponding to Campaign Load.
MessageActivationNumber	string	Represents one or more device addresses to receive incoming SMS messages.
MessageContent	string	The message content of the SMS message.
MessageIdentifier	string	The unique identifier for the SMS message as assigned by the User Messaging Service module.
MktProdAssoc1	*Marketing Response Product*	The reference to Marketing Product.
MktRmResponseSvyLog1	*Marketing Response Survey*	The reference to Marketing Response Survey log.
Name	string	The name of the response.
ObjectType	string	The object Type on the response.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
Offer	string	The offer associated with the response.
OpportunityId	long	The identifier of the opportunity.
OutcomeCode	string	The Response Outcome code.

Name	Type	Description
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartySite	*Address*	The reference to Party Site.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
Phone	*Phone*	The phone information for the entity.
PhoneType	string	The phone type of the associated contact point.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
ReferDomain	string	The Web domain of the referrer. For example, yahoo.com, facebook.com, and so on.
ReferKeywords	string	The keywords or hash tags tagged to the post that the visitor/referrer is responding to.
ReferSourceCode	string	The originating marketing source code for the referrer.
ReferTabStream	string	The name of the tab or stream in Virtue.
ReferWebOfferId	long	The reference to the web marketing offer pertaining to the referrer.
ReplyDeliveryMethodCode	string	The internal code of the delivery method of the reply.
ReplyEmailAddress	string	The email address on the reply.
ReplyFaxPhoneNumber	string	The Fax number on the reply.
ReplyMailAddress	string	The mailing address on the reply.

Name	Type	Description
ReplyMailCity	string	The city on the mailing address on the reply.
ReplyMailCountry	string	The country on the mailing address on the reply.
ReplyMailCounty	string	The county on the mailing address on the reply.
ReplyMailProvince	string	The province on the mailing address on the reply.
ReplyMailState	string	The state on the mailing address on the reply.
ReplyMailZipCode	string	The Zip code on the mailing address on the reply.
ReplyPhoneNumber	string	The phone number on the reply.
ReplyPriorityCode	string	The response priority recorded on the reply.
ResponseDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The response date.
ResponseId	long	The primary identifier of the response. • Primary Key
ResponseMethod	string	The response method on the response.
ResponseNumber	string	The unique alternate identifier for the marketing response.
ResponseTypeCode	string	The response type code.
ResponseURL	string	The URL of the marketing response.
Score	decimal	The score recorded on the response.
SourceCode	string	The source code recorded on the response.
SourceCodeId	decimal	The identifier of the source code recorded on the response.
StageExecutionId	long	The unique identifier of a specific execution of a marketing campaign stage.

Name	Type	Description
StageMemberId	long	The identifier of the stage member.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
StatusCode	string	The pre-defined code used to indicate the status.
SubjectText	string	The subject text of the response.
SubscribeDirectMailCode	string	The subscription Direct Mail Code.
SubscribeEmailCode	string	The subscription Email Code.
SubscribeFaxCode	string	The subscription Fax Code.
SubscribePhoneCode	string	The subscription Subscribe Phone Code.
Text	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The detailed text of the response.
TreatmentId	long	The identifier of the treatment.
TreatmentName	string	The name of the treatment associated with the response.
TreatmentName1	string	The name of the treatment associated with the response.
URLId	long	The identifier of the URL of the marketing response.

Electronic File Transfer

The electronic funds transfer information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Eft

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key

Name	Type	Description
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EFTPrintingProgramId	long	The printing program identifier.
EFTSWIFTCode	string	The EFT swift code information.
EFTTransmissionProgramId	long	The transmission program identifier.
EFTUserNumber	string	The number that identifies you as a user of electronic funds transfer service for your bank or clearing organization.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

E-Mail

The e-mail address associated with a trading community member. For example, john.doe@oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Email

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Relationship Type	Object or Service
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The preferred format for e-mail addressed to this address such as HTML or ASCII. A list of accepted values is defined using the lookup EMAIL_FORMAT.
EmailInformation	*Trading Community Contact Point Additional Information*	The additional information about the e-mail.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary e-mail of the associated object. If the value is True, then this is the primary e-mail. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Instant Messaging

The instant messaging information of a trading community member, such as the AOL identifier or Yahoo Messenger information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}InstantMessaging

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*

Relationship Type	Object or Service
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessagingAddress	string	The instant messaging information address.
InstantMessagingInformation	*Trading Community Contact Point Additional Information*	The instant messaging information related to the record.
InstantMessengerType	string	The type of the instant messenger type.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary instant messaging Id of the associated object. If the value is True, then this is the primary instant messaging Id. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.

Name	Type	Description
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Marketing Response Product

The product associated with a marketing response.

QName: {http://xmlns.oracle.com/apps/marketing/response/responseService/}MktProdAssoc

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Marketing Response*
Handled by	*Marketing Response Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Amount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of the response product.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Description	string	The free text description of the record.
Detail	string	The detailed text of the response product association.
EstimatedUnitPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated unit price for the product associated with the treatment.
InventoryItemId	long	The inventory item identifier associated with the product associated with this treatment.
InventoryOrgId	long	The identifier of the inventory organization.
ItemDescription	string	The description of the inventory item associated with the product associated with this treatment.
ItemName	string	The name of the inventory item associated with the product associated with this treatment.
ItemProductNumber	string	The product number of the inventory item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationId	long	The identifier of the organization.
PrimaryFlag	boolean	Indicates whether this product is a primary product for this treatment.
ProductAssociationId	long	The identifier of the product association. • Primary Key
ProductDescription	string	Descriptive text about the product associated with the response.
ProductGroup1Id	long	Identifier of the product group. • Primary Key
ProductGroupDescriptionText	string	Descriptive text about the product group associated with the response.
ProductGroupId	long	Identifier of the product group.
ProductGroupName	string	Name of the product group.
ProductName	string	Name of the product if this record represents a product.
ProductType	string	The Product Type associated with the response.
Quantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The product quantity.
ResponseId	long	The identifier of the response this product is associated.
UOMCode	string	The unit of Measure Code for the response product.

Marketing Response Survey

The survey, including questions and answers, associated with a marketing response.

QName: {http://xmlns.oracle.com/apps/marketing/response/responseService/}MktRmResponseSvyLog

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Marketing Response*
Handled by	*Marketing Response Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AnswerText	string	The answer text in the response survey log.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
QuestionText	string	The text of the question in the response survey log.

Name	Type	Description
ResponseId	long	The identifier of the response to which this response log belongs.
ResponseLogId	long	The identifier of the response survey log record. • Primary Key

Phone

The phone number associated with a trading community member. For example, the phone number for Oracle Corporation is 650-506-6000.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Phone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Contact Address*
Contained by	*Trading Community Organization Details*
Contained by	*Address*

Relationship Type	Object or Service
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FormattedPhoneNumber	string	The formatted phone number.
LastContactDtTime	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time of last contact placed to this contact point.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.

Name	Type	Description
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PagerTypeCode	string	The PAGER_TYPE_CODE column stores the lookup code for the type of pager. The type of pager determines how the page is received. For example, tone, number, alphanumeric or two-way alphanumeric.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCallingCalendar	string	The name or code for a calling calendar used with this telephone number. This attribute is no longer used in Fusion applications.
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The additional number addressed after initial connection to an internal telephone system.
PhoneInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community phone.
PhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound, or outbound.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RawPhoneNumber	string	The unformatted telephone number.

Name	Type	Description
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TimezoneCode	string	The foreign key to FND_TIMEZONES_B.TIMEZONE_CODE.
TransposedPhoneNumber	string	This column stores the concatenation of PHONE_COUNTRY_CODE, PHONE_AREA_CODE, and PHONE_NUMBER in reverse order. For example, if PHONE_COUNTRY_CODE=1, PHONE_AREA_CODE=650 and PHONE_NUMBER=5065747, this column stores 74756050561. This column is used for building an index to search for any combination of the above three columns.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*
Contained by	*Location Details*
Contained by	*Household*
Contained by	*Contact Preference*

Relationship Type	Object or Service
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*
Contained by	*Trading Community Address Purpose*
Contained by	*Telex*
Contained by	*Phone*
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*
Contained by	*Trading Community Person Details*
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*
Contained by	*Trading Community Customer Account Site Use*
Contained by	*Relationship*
Contained by	*Electronic Data Interchange*
Contained by	*Trading Community Customer Account or Site Role*

Relationship Type	Object or Service
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.

Name	Type	Description
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Telex

The telex number information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Telex

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary telex of the associated object. If the value is True, then this is the primary telex. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.

Name	Type	Description
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TelexNumber	string	The telex reference number (usually a telephone number) of the organization.

Trading Community Address Additional Information

The address information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/}PartySiteInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Address Purpose

The purpose of an address, such as Business, Home, or Ship To.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySiteUse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date at the start of the date range within which the row is active.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
IntegrationKey	string	The integration key is not used.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteUseId	long	The unique identifier of the party site used. • Primary Key
PrimaryPerType	string	Indicates if this is the primary use for the site. Y stands for the primary site and N stands for all other sites.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
SiteUseType	string	The site use type associated with the address.
Status	string	The status of the record.

Trading Community Contact Point Additional Information

The contact point for a trading community member like phone or e-mail. For example 650-506-6000 is the phone number for Oracle Corporation, john.doe@example.com is the e-mail address for John Doe.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/}ContactPointInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Phone*
Contained by	*Web*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointType	string	The type of the contact point.
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Web

The Web information associated with a trading community member. For example, Oracle's address on the Web is www.oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Web

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*

Relationship Type	Object or Service
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N stands for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.

Name	Type	Description
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
URL	string	The destination URL associated with a specific Google AdWords ad.
WebInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community Web.
WebType	string	The prefix class to a Web address. Typically, this is either FTP or HTTP.

Marketing Source Code Service

Service to operate on marketing source codes. The supported operations are create, update, delete, and search.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/marketing/coreMarketing/sourcecode/sourceService/applicationModule/}SourceCodeService

Service WSDL URL: https://servername/crmService/SourceCodeService?WSDL

Logical Business Objects

- CRM : Marketing : Marketing Source Code

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Marketing Source Code*

Operations

- *computeSourceCode*
- *getSourceCode*
- *createSourceCode*
- *updateSourceCode*
- *findSourceCodeByStageId*
- *findAllSourceCodes*
- *findSourceCodeByAll*
- *findBySourceCode*
- *findSourceCodeByAllocId*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

computeSourceCode

A web service method that queries a single record of Oracle Fusion Marketing Source Code Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
pSourceCodeId	string	A required input parameter of the computeSourceCode web service method. It is the row ID of the record that would be used to compute the source code.

Response Payload

Element Name	Type	Description
result	string	The return value of the computeSourceCode web service method. It includes the full set of attributes of the record.

getSourceCode

A web service method that queries a single record of an Oracle Fusion Marketing Source Code Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
sourceCodeId	long	A required input parameter of the getSourceCode web service method. It is the row ID of the source code record you want to query for.

Response Payload

Element Name	Type	Description
result	*Marketing Source Code*	The return value of the getSourceCode web service method. It includes the full set of attributes and child entities of the record.

createSourceCode

A web service method that creates Oracle Fusion Marketing Source Code Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
sourceCode	*Marketing Source Code*	A required input parameter of the createSourceCode web service method. The input object includes the attribute values that the source code record is created with.

Response Payload

Element Name	Type	Description
result	*Marketing Source Code*	The return value of the createSourceCode web service method. It includes the full set of attributes of the record.

updateSourceCode

A web service method that updates an Oracle Fusion Marketing Source Code Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
sourceCode	*Marketing Source Code*	A required parameter of the updateSourceCode web service method. The records matching the ID specified in this input source code is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Marketing Source Code*	The return value of the updateSourceCode web service method. It includes the full set of attributes of the record.

findSourceCodeByStageId

A web service method that queries a single record or set of records of Oracle Fusion Marketing Source Code Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findSourceCodeByStageId web service method. The filter criteria are a cumulative set of attribute criteria that identifies source code records.
bindStageId	string	An input parameter of the findSourceCodeByStageId web service method.

Element Name	Type	Description
		The stage ID forms part of the filter criteria that identifies source code records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findSourceCodeByStageId.

Response Payload

Element Name	Type	Description
result	*Marketing Source Code*	The return value of the findSourceCodeByStageId web service method. It includes the full set of attributes of the record.

findAllSourceCodes

A web service method that queries all Source code rows that has Active_Flag=Y and Campaign Execution Status Code != NEW in Oracle Fusion Marketing Source Code Object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findAllSourceCodes web service method. The filter criteria are a cumulative set of attribute criteria that identifies source code records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findAllSourceCodes.

Response Payload

Element Name	Type	Description
result	*Marketing Source Code*	The return value of the findSAllourceCodes web service method. It includes the full set of attributes of the record.

findSourceCodeByAll

A web service method that queries a single record or set of records of Oracle Fusion Marketing Source Code Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findSourceCodeByAll web service method. The filter criteria are a cumulative set of attribute criteria that identifies source code records.
bindCampaignId	string	A selectively required input parameter of the findSourceCodeByAll web service method. The campaign ID forms part of the filter criteria that identifies source code records.
bindStageId	string	A selectively required input parameter of the findSourceCodeByAll web service method. The stage ID forms part of the filter criteria that identifies source code records.
bindTreatmentId	string	A selectively required input parameter of the findSourceCodeByAll web service method. The treatment ID forms a part of the filter criteria that identifies source code records.
bindCalllstId	string	A selectively required input parameter of the findSourceCodeByAll web service method. The list ID forms part of the filter criteria that identifies source code records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findSourceCodeByAll.

Response Payload

Element Name	Type	Description
result	*Marketing Source Code*	The return value of the findSourceCodeByAll web service method. It includes the list of records that are queried for.

findBySourceCode

A web service method that queries a single record or set of records of Oracle Fusion Marketing Source Code Object by source codes.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findBySourceCode web service method. The filter criteria are a cumulative set of attribute criteria that identifies records.
bindSourceCode	string	A required input parameter of the findBySourceCode web service method. The source code forms part of the filter criteria that identifies records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findBySourceCode.

Response Payload

Element Name	Type	Description
result	*Marketing Source Code*	The return value of the findBySourceCode web service method. It includes the list of records that are queried for.

findSourceCodeByAllocId

A web service method that queries a single record or set of records of Oracle Fusion Marketing Source Code Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findSourceCodeByAllocId web service method. The filter criteria are a cumulative set of attribute criteria that identifies records.
bindAllocId	long	An input parameter of the findSourceCodeByStageId web service method. The alloc ID forms part of the filter criteria that identifies source code records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not applicable for the method findSourceCodeByAllocId.

Response Payload

Element Name	Type	Description
result	*Marketing Source Code*	The return value of the findSourceCodeByAllocId web service method. It includes the list of records that are queried for.

getDfltObjAttrHints

A web service method to retrieve user interface hints, such as the service data object label and Object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

A web service method that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated. The parameter is present in ISO 8601 format.

getEntityList

A web service method to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the Object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKT_MANAGE_MARKETING_SOURCE_CODE_PRIV	Manage Marketing Source Code	For internal use only. Allows web services management of marketing source codes.
All Operations	MKT_MANAGE_SALES_CAMPAIGN_PRIV	Manage Sales Campaign	For internal use only. Allows web services management of sales campaigns.
All Operations	MKT_VIEW_MARKETING_SOURCE_CODE_PRIV	View Marketing Source Code	Allows viewing marketing source codes that represent a combination of treatment, segment or list, and marketing campaign.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_MANAGE_SALES_CAMPAIGN_PRIV	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
MKT_VIEW_MARKETING_SOURCE_CODE_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
MKT_VIEW_MARKETING_SOURCE_CODE_PRIV	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
MKT_VIEW_MARKETING_SOURCE_CODE_PRIV	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
MKT_VIEW_MARKETING_SOURCE_CODE_PRIV	ORA_MKT_MARKETING_FUND_REQUEST_AND_CLAIM_PROCESSING_DUTY	Marketing Fund Request and Claim Processing	Reviews and approves budget fund requests and claims to use budgeted funds for marketing activities. Includes reviewing and exporting budget information.
MKT_MANAGE_MARKETING_SOURCE_CODE_PRIV	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			ability to view sales lead details and update internal attributes.
ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.

Marketing Source Code

The unique identifier representing a marketing campaign and the underlying treatment and segment or list used within each execution. The source code is used to track responses and leads generated by each marketing campaign execution, which helps gauge the effectiveness of each initiative.

QName: {http://xmlns.oracle.com/apps/marketing/coreMarketing/sourcecode/sourceService/}SourceCode

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Marketing Campaign*
Handled by	*Marketing Source Code Service*

Relationship Type	Object or Service
Handled by	*Marketing Campaign Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	Indicates the activity status of the marketing source code as Active or Inactive.
ActivityChannel	string	The channel associated with the source code.
ActivityEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date of the source code.
ActivityName	string	The name of the marketing activity associated with the source code.
ActivityStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date of the marketing activity associated with this source code.
ActivityStatusCode	string	Indicates the status of the marketing activity associated with this source code.
ActivityType	string	Indicates the type of the marketing activity associated with this source code.
AllocationId	long	Stage allocation identifier identifying the marketing activity associated with this source code.
CallListId	long	The primary identifier of the list or segment associated with this source code.
CallLstName	string	The name of the list or segment associated with this source code.
CampaignId	long	The unique identifier for the campaign.
CampaignName	string	The name of the campaign associated with this source code.
CampaignUsage	string	The campaign usage associated with source code.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EventId	long	The identifier of the event associated with this source code.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
SearchCampaignId	long	The identifier of the search marketing campaign. This is the foreign key to the search marketing campaign represented by this source code.
SourceCode	string	The source code that represents this record.
SourceCodeId	long	The primary key identifier associated with this record. • Primary Key
StageId	long	The identifier of the campaign stage associated with the marketing activity this source code represents.
StageName	string	The name of the campaign stage associated with this source code.
StageTreatmentId	long	The treatment identifier associated with the marketing activity associated with this source code.
TreatmentId	long	The identifier of the treatment associated with this source code.

Marketing Treatment Service

Service to operate on marketing treatments. The supported operations are create, update, delete, and search.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/oracle/apps/marketing/coreMarketing/treatments/treatmentPublicService/}TreatmentPublicService

Service WSDL URL: https://servername/crmService/TreatmentPublicService?WSDL

Logical Business Objects

- CRM : Marketing : Marketing Treatment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Deprecated - Marketing Treatment*
Handles	*Marketing Treatment Product*
Handles	*Delivery Profile of a Marketing Supplier*
Handles	*Delivery Profile Parameter of a Marketing Supplier*

Operations

- *getDlvProfile*
- *createDlvProfile*
- *updateDlvProfile*
- *deleteDlvProfile*
- *getTreatment*
- *createTreatment*
- *updateTreatment*
- *deleteTreatment*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*

- *getEntityList*

getDlvProfile

A web service method that queries a single record of an Oracle Fusion Marketing Delivery Profile Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
supplierProfileId	long	A required input parameter of the getDlvProfile web service method. It is the row ID of the delivery profile record you want to query for.

Response Payload

Element Name	Type	Description
result	*Delivery Profile of a Marketing Supplier*	The return value of the getDlvProfile web service method. It includes the full set of attributes of the record.

createDlvProfile

A web service method that creates Oracle Fusion Marketing Delivery Profile Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
dlvProfile	*Delivery Profile of a Marketing Supplier*	A required input parameter of the createDivProfile web service method. The input Object includes the attribute values that the delivery profile record is created with.

Response Payload

Element Name	Type	Description
result	*Delivery Profile of a Marketing Supplier*	The return value of the createDivProfile web service method. It includes the full set of attributes of the record.

updateDlvProfile

A web service method that updates an Oracle Fusion Marketing Delivery Profile Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
dlvProfile	*Delivery Profile of a Marketing Supplier*	A required parameter of the updateDivProfile web service method. The record matching the ID specified in this input delivery profile is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Delivery Profile of a Marketing Supplier*	The return value of the updateDivProfile web service method. It includes the full set of attributes of the record.

deleteDlvProfile

A web service method that delete an Oracle Fusion Marketing Delivery Profile Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
dlvProfile	*Delivery Profile of a Marketing Supplier*	A required input parameter of the deleteDivProfile web service method. The record matching the input attribute values specified in the delivery profile are deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteDlvProfile.

getTreatment

A web service method that queries a single record of an Oracle Fusion Marketing Treatment Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
treatmentId	long	A required input parameter of the getTreatment web service method. It is the row ID of the treatment record you want to query for.

Response Payload

Element Name	Type	Description
result	*Marketing Treatment*	The return value of the getTreatment web service method. It includes the full set of attributes of the record.

createTreatment

A web service method that creates Oracle Fusion Marketing Treatment Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
treatment	*Marketing Treatment*	A required input parameter of the createTreatment web service method. The input object includes the attribute values that the treatment record is created with.

Response Payload

Element Name	Type	Description
result	*Marketing Treatment*	The return value of the createTreatment web service method. It includes the full set of attributes and child entities of the record.

updateTreatment

A web service method that updates an Oracle Fusion Marketing Treatment Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
treatment	*Marketing Treatment*	An input parameter of the updateTreatment web service method. The record matching the ID specified in this input treatment is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Marketing Treatment*	The return value of the updateTreatment web service method. It includes the full set of attributes of the record.

deleteTreatment

A web service method that delete an Oracle Fusion Marketing Treatment Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
treatment	*Marketing Treatment*	A required input parameter of the deleteTreatment web service method. The record matching the input attribute values specified in the treatment are deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteTreatment.

getDfltObjAttrHints

A web service method to retrieve user interface hints, such as the service data object label and Object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

A web service method that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated. The parameter is present in ISO 8601 format.

getEntityList

A web service method to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the Object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKT_CREATE_MARKETING_TREATMENT_PRIV	Create Marketing Treatment	Allows creating marketing treatments that provide channel specific marketing promotions, message, and fulfillment instructions for campaigns.
All Operations	MKT_MANAGE_MARKETING_TREATMENT_PRIV	Manage Marketing Treatment	For internal use only. Allows web services management of marketing treatments.
All Operations	MKT_VIEW_MARKETING_TREATMENT_PRIV	View Marketing Treatment	Allows viewing marketing treatments that provide channel specific marketing promotions, message, and fulfillment instructions for campaigns.
All Operations	MKT_CREATE_SALES_CAMPAIGN_PRIV	Create Sales Campaign	Allows creating sales campaigns and tracking of customer responses. A sales campaign is an e-mail promoting products or events to specific customers, that can include personalized information and links where the customer can respond.
All Operations	MKT_UPDATE_SALES_CAMPAIGN_PRIV	Update Sales Campaign	Allows updating sales campaigns and tracking of customer responses. A sales campaign is an e-mail promoting products or events to specific customers,

Operation Name	Privilege Code	Privilege Name	Privilege Description
			that can include personalized information and links where the customer can respond.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_VIEW_MARKETING_TREATMENT_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
MKT_VIEW_MARKETING_TREATMENT_PRIV	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
MKT_VIEW_MARKETING_TREATMENT_PRIV	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
MKT_UPDATE_SALES_CAMPAIGN_PRIV	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
MKT_MANAGE_MARKETING_TREATMENT_PRIV	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
MKT_CREATE_MARKETING_TREATMENT_PRIV	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			treatments, lists, segments, and content.
MKT_CREATE_SALES_CAMPAIGN_PRIV	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.

Delivery Profile Parameter of a Marketing Supplier

The attributes pertaining to each distribution channel associated with each third party supplier.

QName: {http://xmlns.oracle.com/apps/marketing/coreMarketing/treatments/model/}DlvPrfParam

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Delivery Profile of a Marketing Supplier*
Handled by	*Marketing Treatment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DelvPrfParamNumber	string	The alternate key associated with this record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ParamId	long	The primary indicator associated with this record. • Primary Key
ParamName	string	The name associated with this parameter.
ParamValue	string	The value associated with this parameter.

Name	Type	Description
SeededFlag	boolean	Indicates whether this record is included out of the box.
SupplierProfileId	long	The primary indicator of the delivery profile.

Delivery Profile of a Marketing Supplier

The distribution preference details for a third party supplier.

QName: {http://xmlns.oracle.com/apps/marketing/coreMarketing/treatments/treatmentService/}DlvProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Delivery Profile Parameter of a Marketing Supplier*
Handled by	*Marketing Treatment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	Indicates the activity status of the record as Active or Inactive.
BatchSize	long	The batch size to be used for packaging the data for this specific marketing supplier.
CapacityRepeatFrequency	long	The repeat frequency specified by marketing supplier to handle marketing fulfillment for a specific channel.
CapacityRepeatUnitCode	string	The unit of measure associated with the repeat frequency specified by marketing supplier to handle marketing fulfillment for a specific channel.

Name	Type	Description
ChannelType	string	The type of channel for which this delivery profile is created.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DlvPrfParam	*Delivery Profile Parameter of a Marketing Supplier*	To be deleted.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FolderPath	string	The location/folder of merge fields in the BI server.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
NextScheduleDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the next date when marketing fulfillment is scheduled with this specific Marketing Support delivery profile.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ProfileName	string	The name of the profile.
RequestId	long	A system-generated read-only attribute used by the application framework.
SeededFlag	boolean	Indicates whether this record is included out of the box.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.

Name	Type	Description
SupplierDescription	string	The description of this record.
SupplierProfileId	long	The primary indicator of the delivery profile. • Primary Key
SupplierProfileNumber	string	The alternate key associated with this record.
SupplierProfileStatus	string	The status associated with this delivery profile.
SupportedChannelType	string	The list of supported channel types associated with this marketing supplier delivery profile.
TotalCapacity	decimal	Indicates the capacity of this marketing supplier to handle marketing fulfillment for a specific channel.
VendorId	long	The identifier of the marketing supplier associated with this delivery profile.

Marketing Treatment

The marketing message that is delivered to the audience targeted within a campaign.

QName: {http://xmlns.oracle.com/apps/marketing/coreMarketing/treatments/model/}Treatment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Marketing Treatment Product*
Handled by	*Marketing Treatment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	Indicates the activity status of the marketing treatment as Active or Inactive.
ActivityDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the treatment was made active.
ApprovalStatusCode	string	Indicates the approval status code associated with this treatment.
AttachmentEntityName	string	The name of the attachment associated with this treatment.
BUId	long	The identifier of the business unit associated with this record.
CampaignUsage	string	The campaign usage associated with this treatment.
ChannelCode	string	The channel associated with this treatment.
ChannelType	string	The channel type of the treatment.
CharacterSet	string	The character set associated with this treatment.
ClickCount	long	The click count for this treatment template record.
ConfirmInTreatmentId	long	The treatment designated to use in an opt-in process flow.
ConfirmOutTreatmentId	long	The treatment designated to use in a double opt-in process flow as a treatment to confirm the opt-in choice.
ContentThumbnailURL	string	The URL associated with the thumbnail image of this treatment.
ConversionCurrencyCode	string	The currency code of the currency being converted to.
ConversionRateType	string	The currency conversion rate type that is used to derive the exchange rate for converting the user-entered currency to CRM Corporate currency.

Name	Type	Description
CreateInteractionFlag	boolean	Indicates whether the interactions must be created for outbound send operation of this treatment.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DelvProfileId	long	The row ID of the delivery profile record.
EmailBcc	string	Blind copy email address value for email treatment.
EmailCc	string	Copy email address value for email treatment.
EmailFrom	string	The from address to include in email treatment.
EmailReplyTo	string	The reply to email address to include in email treatment.
EmailSubject	string	The subject line for the email treatment.
ExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expiration date associated with this treatment.
FolderPath	string	The folder path where the treatment content is placed in Oracle Universal Content Management application.
HTMLContentItemId	string	The identifier of the content item associated with the HTML content for this treatment.
HTMLFooterId	long	Identifier of the HTML version of the footer associated with this treatment.
HTMLHeaderId	long	Identifier of the HTML version of the header associated with this treatment.
HTMLTemplateId	long	Identifier of the HTML version of the template for this treatment.

Name	Type	Description
InboundPriority	string	The inbound priority associated with the treatment.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LastUsedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The most recent date when this treatment was used for a campaign.
Locale	string	The locale associated with this treatment.
LockedFlag	boolean	Indicates whether this treatment is locked. A locked treatment cannot be updated.
LookupCode	string	To be deleted.
LookupType	string	To be deleted.
Meaning	string	To be deleted.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
OpenCount	long	Indicates the number of times this treatment's content was opened by end users.
Owner	string	The owner associated with the treatment.
OwnerId	long	The resource identifier associated with the owner of the treatment.

Name	Type	Description
OwnerResourceOrgId	long	The resource organization identifier associated with the owner of the treatment.
OwnerTreeCode	string	The resource organization hierarchy tree code associated with the resource organization which the owner of the treatment belongs to.
OwnerTreeStructureCode	string	The resource organization hierarchy tree structure code associated with the resource organization to which the owner of the treatment belongs.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PrimaryOrgId	long	The primary organization of the treatment.
Rating	long	The rating associated with this treatment.
ResponseChannel	string	The response channel associated with this treatment. Indicates the channel through which the responses are expected.
SeedListId	long	The identifier of the seed list associated with this treatment. Seed list includes test data.
SubscriberListId	long	The identifier of the subscription list associated with this treatment.
SupplierId	long	The identifier of the delivery profile associated with this treatment.
Team	string	To be deleted.
TeamId	long	The resource team associated with this treatment.
TemplateFlag	boolean	Indicates whether this record is a treatment template.
TemplateName	string	The name of the treatment template used to create this treatment.
TextContentItemId	string	The identifier of the text content item associated with this treatment.

Name	Type	Description
TextFooterId	long	The identifier of the text version of the footer associated with this treatment.
TextHeaderId	long	The identifier of the text version of the header associated with this treatment.
TextTemplateId	long	The identifier of the text version of the template for this treatment.
TrackUrlsFlag	boolean	Indicates whether the tracking of URLs within treatment content is enabled or disabled.
TreatmentCode	string	The code associated with this treatment.
TreatmentDescriptionText	string	The description of this treatment.
TreatmentId	long	The primary identifier of this record. • Primary Key
TreatmentLanguage	string	The language of the treatment.
TreatmentName	string	The name of the treatment.
TreatmentName1	string	The name of the treatment.
TreatmentNumber	string	The number associated with this treatment.
TreatmentType	string	The type of the treatment.
TrmtItemAssoc	*Marketing Treatment Product*	To be deleted.
VendorId	long	The identifier of the marketing supplier associated with this treatment.
VendorName	string	The name of the marketing supplier associated with this treatment.

Marketing Treatment Product

The products associated with a marketing treatment.

QName: {http://xmlns.oracle.com/apps/marketing/coreMarketing/treatments/treatmentService/}TrmtItemAssoc

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Marketing Treatment*
Handled by	*Marketing Treatment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttachmentEntityName	string	The entity name used by attachments that is used to categorize when uploading to stellant.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Description	string	The free text description of the record.
InventoryItemId	long	The identifier of the inventory item associated with the product associated with this treatment.
InventoryOrgId	long	The identifier of the inventory item organization associated with the product associated with this treatment.
ItemId	long	The identifier of the inventory item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
LongDescription	string	A long description of the product associated with the treatment.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationId	long	The identifier of the inventory organization.
PrimaryFlag	boolean	Indicates whether this product is a primary product for this treatment.
PrimaryProduct	string	The name of the primary product for this treatment.
ProdAssocId	long	The primary identifier of the association to the Product. • Primary Key
ProdGroupId	long	The identifier of the product group.
ProdGroupId1	long	The identifier of the product group. • Primary Key
ProdGroupName	string	The name of the product group if this record represents a product group.
Product	string	The name of the product if this record represents a product.
ProductDescription	string	The description of the product if this record represents a product.
ProductGroupDescriptionText	string	The description of the product group.
ProductName	string	The name of product or product group. It is the product name if this record represents a product. It is the product group name if this record represents a product group.
ProductType	string	Indicates if this record represents a product or a product group.

Name	Type	Description
TreatmentId	long	The treatment identifier associated with the product associated with the treatment as a foreign key.
UOMCode	string	The attribute that captures the unit of measure for product.

Name

The service used to return the object metadata information.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/metadata/publicService/}MetadataPublicService

Service WSDL URL: https://servername/crmService/MetadataPublicService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Name*
Handles	*Name*
Handles	*Name*
Handles	*Name*
Handles	*Name*

Operations

- *getObjectDefinitions*

getObjectDefinitions

The method which returns the object description.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
Group	*Object Request*	The list of objects to the MetadataPublic service which contains group name and object names.

Response Payload

Element Name	Type	Description
result	*Object Response*	The operation returns the list of objects requested with description in response.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	Run File Import Scheduler	Allows scheduling and monitoring the process that schedules file import activities.
All Operations	ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	Set Up File Import Object and Mapping	Allows reviewing and registering business objects, such as sales leads and opportunities, intended for import from external files. Also allows creating and maintaining maps of external source file columns to target staging table columns for use in importing those business objects, such as sales leads, customers, contacts, and sales catalogs.
All Operations	ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	Set Up File Import Activity	Allows creating and maintaining import activities that contain process criteria, file mapping, and schedule to import external files containing business objects, such as customers and contacts, into staging tables.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	Customer Contract Manager	Manages a team of customer contract administrators.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_PSC_ADMINISTER_PROPERTY_SETUP_DUTY_CRM	PSC Property Setup Administration	Allows the agency user to administer property setup.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY_CRM	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_QSC_SALES_CATALOG_ADMINISTRATOR_JOB	Sales Catalog Administrator	Sets up and maintains sales catalogs for leads, opportunities, quotes and orders. Sets up and maintains rollup catalog for the purpose of forecasting, territory

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			management, and other purposes. Also associates products, promotions, and competitor products to catalogs, and defines eligibility rules. Also manages the bulk export and import of all product group-related objects.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	Enterprise Contract Manager	Manages a team of enterprise contract administrators.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ADMINISTRATOR_JOB	Incentive Compensation Application Administrator	Set up incentive compensation application
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_LOY_ADMINISTRATOR_DUTY	Loyalty Administrator	Manages the provisioning , setup and configuration of Loyalty Application.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_CJM_CHANNEL_INTEGRATION_SPECIALIST_DUTY_CRM	Channel Integration Specialist	Manages import of transactional data from external applications into Channel Revenue Management.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	Supplier Contract Manager	Manages a team of supplier contract administrators.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_CPQ_ADMINISTRATOR_JOB	CPQ Administrator	Individual responsible for implementing and managing the CPQ application. Can set up users, quoting processes, product catalog, and product pricing. Can also tailor the application as required by the business.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_POZ_DATAFOX_INTEL_ADMINISTRATION_DUTY_CRM	DataFox Administration for Supplier Intelligence	Manages setup for Power Supplier Intelligence with Oracle DataFox Smart Data feature. Not applicable outside of this feature and should be granted only to a user responsible for configuring this setup. This duty role has been obsoleted as part of the deprecation of the feature Manage Supplier Risk with DataFox Supplier Intelligence feature.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			the Internal Help Desk service application, including setup.
ZCA_SET_UP_FILE_IMPORT_OBJECT_AND_MAPPING_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_EXPORT_IMPORT_DUTY	Territory Management Export Import	Manages sales territory export and import. Provides users with the ability to export territory data, modify it offline and import.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	Customer Contract Manager	Manages a team of customer contract administrators.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	Supplier Contract Administrator	Works with internal buyers and legal to negotiate and author supplier contracts and agreements. Tracks critical contract milestones, monitors supplier performance, and assists buyers during contract renewals, closeout, and amendments.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			external, internal, and anonymous pages.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_PSC_ADMINISTER_ PROPERTY_SETUP_DUTY_CRM	PSC Property Setup Administration	Allows the agency user to administer property setup.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZCH_TRADING_ COMMUNITY_DATA_STEWARD_ JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_HRC_HUMAN_CAPITAL_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Human Capital Management Application Administrator	Configures the Oracle Fusion Global Human Resources application and has access to all duty roles necessary to implement the Compensation, Workforce Deployment, and Workforce Development offerings.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_CN_INCENTIVE_ COMPENSATION_ASSIGNMENT_ ADMISTRATION_DUTY_CRM	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_MKL_SALES_LEAD_ PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_QSC_SALES_CATALOG_ ADMINISTRATOR_JOB	Sales Catalog Administrator	Sets up and maintains sales catalogs for leads, opportunities, quotes and orders. Sets up and maintains rollup catalog for the purpose of forecasting, territory management, and other purposes. Also associates products, promotions, and competitor products to catalogs, and defines eligibility rules. Also manages the bulk export and import of all product group-related objects.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_OKC_ENTERPRISE_ CONTRACT_MANAGER_JOB	Enterprise Contract Manager	Manages a team of enterprise contract administrators.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_OKC_ENTERPRISE_ CONTRACT_ADMINISTRATOR_JOB	Enterprise Contract Administrator	Performs the duties of both customer contract administrator and supplier contract administrator.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_CN_INCENTIVE_ COMPENSATION_ ADMINISTRATOR_JOB	Incentive Compensation Application Administrator	Set up incentive compensation application
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_OKC_CUSTOMER_ CONTRACT_ADMINISTRATOR_JOB	Customer Contract Administrator	Works with sales account teams and legal to negotiate and author customer contracts. Tracks critical contract milestones, service level agreements, and assists account teams during contract renewals and amendments.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_SVC_HELPDESK_ ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_ MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_LOY_ADMINISTRATOR_DUTY	Loyalty Administrator	Manages the provisioning , setup and configuration of Loyalty Application.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_CJM_CHANNEL_INTEGRATION_SPECIALIST_DUTY_CRM	Channel Integration Specialist	Manages import of transactional data from external applications into Channel Revenue Management.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	Supplier Contract Manager	Manages a team of supplier contract administrators.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_CPQ_ADMINISTRATOR_JOB	CPQ Administrator	Individual responsible for implementing and managing the CPQ application. Can set up users, quoting processes, product catalog, and product pricing. Can also tailor the application as required by the business.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_POZ_DATAFOX_INTEL_ADMINISTRATION_DUTY_CRM	DataFox Administration for Supplier Intelligence	Manages setup for Power Supplier Intelligence with Oracle DataFox Smart Data feature. Not applicable outside of this feature and should be granted only to a user responsible for configuring this setup. This duty role has been obsoleted as part of the deprecation of the feature Manage Supplier Risk with DataFox Supplier Intelligence feature.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_T2P_MIGRATION_DUTY	Territory Management T2P Migration	Manages sales territory export and import. Provides users with the ability to export territory data from a test environment and import into production.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ZCA_SET_UP_FILE_IMPORT_ACTIVITY_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			administer the Next Gen HR Help Desk service application, including setup.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_MOT_QUOTA_ MANAGEMENT_EXPORT_ IMPORT_DUTY	Quota Management Export Import	Manages sales quota export and import. Provides users with the ability to export sales quota data, modify it offline and import.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZPM_CHANNEL_SALES_ DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_CN_INCENTIVE_ COMPENSATION_CREDITS_ EARNINGS_MANAGEMENT_ DUTY_CRM	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.
ZCA_SET_UP_FILE_IMPORT_ ACTIVITY_PRIV	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCA_RUN_FILE_IMPORT_ SCHEDULER_PRIV	ORA_OSS_SUBSCRIPTION_SETUP_ DUTY	Subscription Setup	Handles the setup required for subscriptions.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_EXPORT_IMPORT_DUTY	Territory Management Export Import	Manages sales territory export and import. Provides users with the ability to export territory data, modify it offline and import.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	Customer Contract Manager	Manages a team of customer contract administrators.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	Supplier Contract Administrator	Works with internal buyers and legal to negotiate and author supplier contracts and agreements. Tracks critical contract milestones, monitors supplier performance, and assists buyers during contract renewals, closeout, and amendments.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_PSC_ADMINISTER_PROPERTY_SETUP_DUTY_CRM	PSC Property Setup Administration	Allows the agency user to administer property setup.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Human Capital Management Application Administrator	Configures the Oracle Fusion Global Human Resources application and has access to all

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			duty roles necessary to implement the Compensation, Workforce Deployment, and Workforce Development offerings.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ASSIGNMENT_ADMISTRATION_DUTY_CRM	Incentive Compensation Participant Assignments	Create and maintain the assignments of analyst to participant, participants and roles to compensation and payment plans as well as pay groups
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_QSC_SALES_CATALOG_ADMINISTRATOR_JOB	Sales Catalog Administrator	Sets up and maintains sales catalogs for leads, opportunities, quotes and orders. Sets up and maintains rollup catalog for the purpose of forecasting, territory management, and other purposes. Also associates products, promotions, and competitor products to catalogs, and defines eligibility rules. Also manages the bulk export and import of all product group-related objects.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	Enterprise Contract Manager	Manages a team of enterprise contract administrators.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	Enterprise Contract Administrator	Performs the duties of both customer contract administrator and supplier contract administrator.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_CN_INCENTIVE_COMPENSATION_ADMINISTRATOR_JOB	Incentive Compensation Application Administrator	Set up incentive compensation application
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	Customer Contract Administrator	Works with sales account teams and legal to negotiate and author customer contracts. Tracks critical contract milestones, service level agreements, and assists account teams during contract renewals and amendments.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_LOY_ADMINISTRATOR_DUTY	Loyalty Administrator	Manages the provisioning , setup and configuration of Loyalty Application.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_CJM_CHANNEL_INTEGRATION_SPECIALIST_DUTY_CRM	Channel Integration Specialist	Manages import of transactional data from external applications into Channel Revenue Management.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	Supplier Contract Manager	Manages a team of supplier contract administrators.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_CPQ_ADMINISTRATOR_JOB	CPQ Administrator	Individual responsible for implementing and managing the CPQ application. Can set up users, quoting processes, product catalog, and product pricing. Can also tailor the application as required by the business.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_POZ_DATAFOX_INTEL_ADMINISTRATION_DUTY_CRM	DataFox Administration for Supplier Intelligence	Manages setup for Power Supplier Intelligence with Oracle DataFox Smart Data feature. Not applicable outside of this feature and should be granted only to a user responsible for configuring this setup. This duty role has been obsoleted as part of the deprecation of the feature Manage Supplier Risk with DataFox Supplier Intelligence feature.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_T2P_MIGRATION_DUTY	Territory Management T2P Migration	Manages sales territory export and import. Provides users with the ability to export territory data from a test environment and import into production.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_MOT_QUOTA_MANAGEMENT_EXPORT_IMPORT_DUTY	Quota Management Export Import	Manages sales quota export and import. Provides users with the ability to export sales quota data, modify it offline and import.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_CN_INCENTIVE_COMPENSATION_CREDITS_EARNINGS_MANAGEMENT_DUTY_CRM	Incentive Compensation Credits and Earnings	Create, review, and adjust incentive compensation transactions, credits and earnings. Create and manage requests to calculate the incentive compensation for a set of participants.
ZCA_RUN_FILE_IMPORT_SCHEDULER_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_CPQ_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_FND_ATTBOCER_DUTY_CRM	AttachmentsWCCintegrato	DUTYroleforAttachmentsWCCintegrator.
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_BEN_BENEFITS_IMPLEMENTATION_DUTY_CRM	Benefits Management Implementer	Manages benefits implementation setup using the Oracle Fusion Functional Setup Manager.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_ AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_SUPPLIER_CONTRACT_ ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_ AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_CUSTOMER_ CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_ AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_ENTERPRISE_ CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_ AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_OKC_ENTERPRISE_ CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_ REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_SUPPLIER_CONTRACT_ MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_ REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_CUSTOMER_ CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_REQUEST_ REVIEW_DUTY_CRM	Contract Request Review	Reviews the contract requests, seeks additional information and creates contract
ORA_OKC_ENTERPRISE_ CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_ VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_SUPPLIER_CONTRACT_ MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_ VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_CUSTOMER_ CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_ VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_OKC_CONTRACT_SEARCH_ VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_ VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_SUPPLIER_CONTRACT_ ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_ VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_OKC_ENTERPRISE_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_SUPPLIER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_SUPPLIER_CONTRACT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_OKC_CUSTOMER_CONTRACT_MANAGER_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			Service, including service requests and service work orders.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_CPQ_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_QSC_SALES_CATALOG_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_PER_USER_NAME_CREATION_AND_LINKING_DUTY_CRM	Link User Name to Person	Creates a new user name or links an existing user name for a person.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_EXECUTION_MANAGEMENT_DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_CPQ_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_CPQ_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_PAY_PAYROLL_IMPLEMENTATION_DUTY_CRM	Payroll Implementation	Manages complete payroll setup and maintenance.
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_PAY_PAYROLL_IMPLEMENTATION_VIEW_DUTY_CRM	Payroll Implementation View	Views complete payroll setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_CPQ_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and relationship information inquiries.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			management setup and quota management administration.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_CPQ_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_CPQ_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Object Request

The Object Request view object.

QName: {http://xmlns.oracle.com/apps/crmCommon/metadata/publicService/}ObjectRequest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Name*
Handled by	*Name*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
GroupCode	string	Refers to object code.

Name	Type	Description
		• Primary Key
Objects	*Object Details Request*	Refers to the list of objects requested.

Object Attributes Response

The Object Attributes Response view object.

QName: {http://xmlns.oracle.com/apps/crmCommon/metadata/publicService/}ObjectAttrsResponse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Object Details Response*
Handled by	*Name*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
APIName	string	Refers to API Name.
DataType	string	Refers to data type of the object.
DisplayLabel	string	Refers to display label of the attribute.
ImportAttributeName	string	Refers to import specific attribute name for the current attribute.
Length	decimal	Refers to length of the object.

Object Details Request

The Object Details Request view object.

QName: {http://xmlns.oracle.com/apps/crmCommon/metadata/publicService/}ObjectDetailsRequest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Object Request*
Handled by	*Name*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ObjectName	string	The name of the object requested. • Primary Key

Object Details Response

The Object Details Response view object.

QName: {http://xmlns.oracle.com/apps/crmCommon/metadata/publicService/}ObjectDetailsResponse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Object Attributes Response*
Contained by	*Object Response*

Relationship Type	Object or Service
Handled by	*Name*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
DisplayLabel	string	Refers to display name of the object.
Field	*Object Attributes Response*	Refers to object field.
ImportFileName	string	Refers to import file name.
Name	string	Refers to object name. • Primary Key
ParentObjectName	string	Refers to parent object name.
ServiceObjectName	string	Refers to the service object name.

Object Response

The Object Response view object.

QName: {http://xmlns.oracle.com/apps/crmCommon/metadata/publicService/}ObjectResponse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Object Details Response*
Handled by	*Name*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
GroupCode	string	Refers to object code. • Primary Key
Object	*Object Details Response*	The objects returned in response.

Opportunity Configuration

Service to define setup data specific to Oracle Fusion Opportunity Management, such as credit allocation templates and configurable defaults.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opptyMgmtSetupService/}OpptyMgmtSetupService

Service WSDL URL: https://servername/crmService/OpptyMgmtSetupService?WSDL

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Credit Allocation Template Version*
Handles	*Credit Allocation Template Details*
Handles	*Credit Allocation Template*
Handles	*Credit Allocation Template Translation SDO*
Handles	*Partner Opportunity Configuration*

Operations

- *getPartnerEngagementTypeMap*
- *createPartnerEngagementTypeMap*
- *updatePartnerEngagementTypeMap*
- *deletePartnerEngagementTypeMap*
- *mergePartnerEngagementTypeMap*
- *findPartnerEngagementTypeMap*
- *processPartnerEngagementTypeMap*
- *processCSPartnerEngagementTypeMap*
- *getRevenueCredTmplSet*
- *createRevenueCredTmplSet*
- *updateRevenueCredTmplSet*
- *deleteRevenueCredTmplSet*
- *mergeRevenueCredTmplSet*
- *findRevenueCredTmplSet*
- *processRevenueCredTmplSet*
- *processCSRevenueCredTmplSet*

getPartnerEngagementTypeMap

An operation to get opportunity defaults for partner-registered lead.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partEngmtTypeMapId	long	The opportunity defaults for partner-registered lead identifier.

Response Payload

Element Name	Type	Description
result	*Partner Opportunity Configuration*	The opportunity default for partner-registered lead that matches the inbound key attributes.

createPartnerEngagementTypeMap

An operation to create opportunity defaults for partner-registered lead.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerEngagementTypeMap	*Partner Opportunity Configuration*	The opportunity defaults for partner-registered lead to be created.

Response Payload

Element Name	Type	Description
result	*Partner Opportunity Configuration*	The created opportunity defaults for partner-registered lead.

updatePartnerEngagementTypeMap

An operation to update opportunity defaults for partner-registered lead.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerEngagementTypeMap	*Partner Opportunity Configuration*	The opportunity for partner-registered lead to be updated.

Response Payload

Element Name	Type	Description
result	*Partner Opportunity Configuration*	The updated opportunity defaults for partner-registered lead.

deletePartnerEngagementTypeMap

An operation to delete opportunity defaults for partner-registered lead.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerEngagementTypeMap	*Partner Opportunity Configuration*	The opportunity to be deleted for the method deletePartnerEngagementTypeMap.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	void	An operation to delete opportunity defaults for partner-registered lead.

mergePartnerEngagementTypeMap

A merge operation for opportunity defaults for partner-registered lead. It performs an update if the object exists or an insert if the object does not already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerEngagementTypeMap	*Partner Opportunity Configuration*	The opportunity for partner-registered lead to be merged.

Response Payload

Element Name	Type	Description
result	*Partner Opportunity Configuration*	A merged opportunity defaults for partner-registered lead.

findPartnerEngagementTypeMap

An operation to find opportunity defaults for partner-registered lead.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause), the fetch size, and so on.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findPartnerEngagementTypeMap.

Response Payload

Element Name	Type	Description
result	*Partner Opportunity Configuration*	A list of opportunity defaults for partner-registered lead that satisfies the inbound criteria.

processPartnerEngagementTypeMap

An operation to bulk load opportunity defaults for partner-registered lead.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The parameter indicates what action shall be performed, such as create, update, merge, or delete.
partnerEngagementTypeMap	*Partner Opportunity Configuration*	A list of opportunity defaults for partner-registered lead to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter which controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Partner Opportunity Configuration*	A list of opportunity defaults for partner-registered lead that is successfully processed.

processCSPartnerEngagementTypeMap

An operation to apply the changes back to the data source for opportunity defaults for partner-registered lead.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter which controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation including a list of created or updated data objects, and all warning and informational messages.

getRevenueCredTmplSet

The credit allocation template setup feature has been deprecated. Hence this operation is deprecated. Get operation for credit allocation template.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
revnCredTmplSetId	long	The set identifier for credit allocation template.

Response Payload

Element Name	Type	Description
result	*Credit Allocation Template*	The parameter returns the credit allocation template that matches the inbound key attributes.

createRevenueCredTmplSet

The credit allocation template setup feature has been deprecated. Hence this operation is deprecated. Create operation for credit allocation template.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
revenueCredTmplSet	*Credit Allocation Template*	The credit allocation template to be created.

Response Payload

Element Name	Type	Description
result	*Credit Allocation Template*	The parameter returns the created credit allocation template.

updateRevenueCredTmplSet

The credit allocation template setup feature has been deprecated. Hence this operation is deprecated. Update operation for credit allocation template.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
revenueCredTmplSet	*Credit Allocation Template*	The credit allocation template to be updated.

Response Payload

Element Name	Type	Description
result	*Credit Allocation Template*	The parameter returns the updated credit allocation template.

deleteRevenueCredTmplSet

The credit allocation template setup feature has been deprecated. Hence this operation is deprecated. Delete operation for credit allocation template.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
revenueCredTmplSet	*Credit Allocation Template*	The credit allocation template to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter returns the deleted credit allocation template.

mergeRevenueCredTmplSet

The credit allocation template setup feature has been deprecated. Hence this operation is deprecated. Merge operation for credit allocation template. It performs an update if the object exists or an insert if the object does not already exist.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
revenueCredTmplSet	*Credit Allocation Template*	The credit allocation template to be merged.

Response Payload

Element Name	Type	Description
result	*Credit Allocation Template*	The parameter returns the merged credit allocation template.

findRevenueCredTmplSet

The credit allocation template setup feature has been deprecated. Hence this operation is deprecated. Find operation for credit allocation template.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findRevenueCredTmplSet.

Response Payload

Element Name	Type	Description
result	*Credit Allocation Template*	The parameter returns a list of credit allocation templates that satisfies the inbound criteria.

processRevenueCredTmplSet

The credit allocation template setup feature has been deprecated. Hence this operation is deprecated. Bulk load operation for credit allocation template.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
changeOperation	string	The parameter indicates what action shall be performed, such as create, update, merge, or delete.
revenueCredTmplSet	*Credit Allocation Template*	A list of credit allocation templates to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter to control the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Credit Allocation Template*	The parameter returns a list of credit allocation templates that is successfully processed.

processCSRevenueCredTmplSet

The credit allocation template setup feature has been deprecated. Hence this operation is deprecated. An operation to apply the changes back to the data source for credit allocation template.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter to control your bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The parameter returns the result of the operation including a list of created or updated data objects, and all warning and informational messages.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
deletePartnerEngagementTypeMap	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
createRevenueCredTmplSet	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles,

Operation Name	Privilege Code	Privilege Name	Privilege Description
			lookups, flexfields, and assignment rules, among others.
findRevenueCredTmplSet	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
updatePartnerEngagementTypeMap	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
createPartnerEngagementTypeMap	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
deleteRevenueCredTmplSet	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
getRevenueCredTmplSet	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
processCSRevenueCredTmplSet	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
processCSPartnerEngagementTypel	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
updateRevenueCredTmplSet	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit

Operation Name	Privilege Code	Privilege Name	Privilege Description
			allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
processRevenueCredTmplSet	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
mergePartnerEngagementTypeMap	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
getPartnerEngagementTypeMap	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
mergeRevenueCredTmplSet	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
findPartnerEngagementTypeMap	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
processPartnerEngagementTypeMa	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
	APPLICATION_ADMINISTRATOR_JOB		Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Credit Allocation Template

The template containing information on how credit allocations should be assigned for an opportunity revenue line.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/revenues/revenueService/}RevenueCredTmplSet

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Allocation Template Version*
Contains	*Credit Allocation Template Translation SDO*
Handled by	*Opportunity Configuration*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CalculatedStatus	string	Status evaluated based on the effective start date and effective end date for the credit allocation template.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DescriptionText	string	The text describing the credit allocation template set.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Name	string	The name of the credit allocation template.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
RevenueCredTmplSetTranslation	*Credit Allocation Template Translation*	The attribute for list of translated credit allocation templates.
RevenueCredTmplSetVer	*Credit Allocation Template Version*	The credit allocation template version.
RevnCredTmplSetId	long	Set identifier of the credit allocation template. • Primary Key
RevnCredTmplSetNumber	string	The alternate key for the credit allocation template.
RevnCredTmplSetVerId	long	The credit allocation template version identifier.

Name	Type	Description
SetId	long	The set identifier for the credit allocation template.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.
VersionCreatedDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The creation date of the template version.
VersionExpiredDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The expiration date of the template version.
VersionNumber	long	The credit allocation template version number.

Credit Allocation Template Details

The details of a credit allocation template which include the type of credit to be allocated, the credit amount or percentage, the credit recipient, and the forecast territory.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/revenues/revenueService/}RevenueCredAllocTmpl

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Credit Allocation Template Version*
Handled by	*Opportunity Configuration*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CredAllocPercent	long	The percentage of credit to be allocated.
CredAllocTypeCd	string	The attribute describes whether the credit allocation is an ad hoc amount or a percentage proportional to the line revenue amount.
CredPrTerrSrc	string	The source for deriving the forecast territory of the credit allocation.
CredPrTerrType	string	The territory type of the forecast territory of the credit allocation.
CredType	string	The type of sales credit - revenue or nonrevenue.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
RcptResourceSrc	string	The source for deriving the credit recipient.
RcptResourceTerrResourceFunc	string	The function of the credit recipient on the territory.
RcptResourceTerrType	string	The territory type of the credit recipient's territory.
RevnCredAllocTmplId	long	The credit allocation template identifier.

Name	Type	Description
		• Primary Key
RevnCredAllocTmplNumber	string	The alternate key for the credit allocation template.
RevnCredTmplSetVerId	long	The credit allocation template version identifier.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Credit Allocation Template Translation

The credit allocation templates containing information on how credit allocations should be assigned for an opportunity revenue line.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/revenues/revenueService/}RevenueCredTmplSetTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Credit Allocation Template*
Handled by	*Opportunity Configuration*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
DescriptionText	string	The description of the credit allocation template.
Language	string	The translated language for the translation service data object. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Name	string	The credit allocation template name.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
RevnCredTmplSetId	long	The revenue Credit Template Set Identifier. • Primary Key
SourceLang	string	The source language for the Credit Allocation Template.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Credit Allocation Template Version

The credit allocation template's version.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/revenues/revenueService/}RevenueCredTmplSetVer

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Allocation Template Details*
Contained by	*Credit Allocation Template*
Handled by	*Opportunity Configuration*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DescriptionText	string	The description of the credit allocation template.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Name	string	The name of the credit allocation template.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
RevenueCredAllocTmpl	*Credit Allocation Template Details*	The credit allocation template details.
RevnCredTmplSetId	long	The credit allocation template identifier.
RevnCredTmplSetVerId	long	The credit allocation template version identifier. • Primary Key
RevnCredTmplSetVerNumber	string	The alternate key for the credit allocation template.
StatusCd	string	The status of the template.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.
VersionCreatedDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The creation date of the template version.
VersionExpiredDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The expiration date of the template version.
VersionNumber	long	The credit allocation template version number.

Partner Opportunity Configuration

The configurable setup data defined specifically for handling partner opportunities.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/revenues/revenueService/}PartnerEngagementTypeMap

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Opportunity Configuration*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartEngmtTypeCd	string	The attribute for lead registration type that drives the configuration rule.
PartEngmtTypeMapId	long	The identifier of the configuration rule that determines whether partner should be copied to the lines and how sales channel should be defaulted. • Primary Key
PartEngmtTypeMapNumber	string	The alternate key to the configuration rule that determines whether partner should be copied to the lines and how sales channel should be defaulted.

Name	Type	Description
PartPropagationFlag	boolean	The flag indicating if the partner should be copied to the revenue lines for a specified lead registration type.
RevnSalesChannel	string	The sales channel to be defaulted based on the lead registration type.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Opportunity Service

Service to operate on opportunities. The supported operations are create, update, get, find, and delete. An opportunity is used by a sales organization to track information about a potential sale such as the sales account, key contacts, product interests, and potential revenues.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opportunityService/}OpportunityService

Service WSDL URL: https://servername/crmService/OpportunityService?WSDL

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Opportunity Team Member*
Handles	*Opportunity Deal*
Handles	*Note Descriptive Flexfields*
Handles	*Category Summary Revenue*
Handles	*Appointment Transient Contact SDO*

Relationship Type	Object or Service
Handles	*Revenue Line Set*
Handles	*Opportunity Response*
Handles	*Opportunity Recurring Revenue*
Handles	*Appointment Transient SDO*
Handles	*Note*
Handles	*Opportunity Contact*
Handles	*Opportunity Revenue*
Handles	*Appointment Transient Category SDO*
Handles	*Item External Reference*
Handles	*Opportunity Reference*
Handles	*Opportunity*
Handles	*Appointment Transient Note SDO*
Handles	*Opportunity Revenue Territory*
Handles	*Opportunity Lead*
Handles	*Opportunity Competitor*
Handles	*Item Deletion External Error*
Handles	*Opportunity Partner*
Handles	*Opportunity Subscription*
Handles	*Opportunity Split Revenue*
Handles	*Common Attachment SDO*
Handles	*Appointment Transient Assignee SDO*

Relationship Type	Object or Service
Handles	*Opportunity Source*

Operations

- *doAutoAssignmentAsynchronously*
- *isSalesAccountUsedInOpportunity*
- *checkConstraint*
- *createAttachment*
- *copyAttachment*
- *deleteAttachment*
- *getAttachmentContent*
- *getAttachmentsListWithoutContent*
- *deleteAllRevenuesInOpportunity*
- *getOpportunity*
- *createOpportunity*
- *updateOpportunity*
- *deleteOpportunity*
- *mergeOpportunity*
- *findOpportunity*
- *processOpportunity*
- *processCSOpportunity*
- *deleteOpportunityCompetitor*
- *deleteOpportunityContact*
- *deleteOpportunityLead*
- *deleteOpportunityReference*
- *deleteOpportunityResource*
- *deleteOpportunityMktResponse*
- *deleteOpportunityRevenue*
- *processOpportunityRevenue*
- *deleteOpportunitySource*
- *deleteOpportunityPartner*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

doAutoAssignmentAsynchronously

A web service method which is called from auto assignment composite to assign a specific opportunity automatically when the opportunity is created or updated. WARNING: The operation is renamed in the newer version of this service planned in the upcoming release.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
optyId	string	The unique opportunity identifier for the method doAutoAssignmentAsynchronously.

Response Payload

Element Name	Type	Description
result	void	The parameter returns the method which is called from auto assignment composite to assign a specific opportunity automatically when the opportunity is created or updated.

isSalesAccountUsedInOpportunity

A web service method to determine if a given sales account has any opportunties.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountId	long	The parameter which provides the sales account party identifier.

Response Payload

Element Name	Type	Description
result	boolean	The parameter returns whether the sales account is associated with any opportunities.

checkConstraint

This operation is an internal operation and is not superseded by any another operation.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
deleteEntities	*Item External Reference*	The input parameter for the internal operation checkConstraint.

Response Payload

Element Name	Type	Description
result	*Item External Reference*	The return for the internal operation checkConstraint.

createAttachment

A web service method to create attachments associated to an opportunity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
attachmentRows	*Common Attachment*	The parameter which provides the list of attachments to be created.
commitData	string	The flag to indicate whether or not to commit transaction for this operation.

Response Payload

Element Name	Type	Description
result	string	The parameter returns the success or failure status of the operation.

copyAttachment

A web service method to copy attachments associated to an opportunity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
attachmentRows	*Common Attachment*	The parameter which provides the list of attachments to be copied.
commitData	string	The flag to indicate whether or not to commit transaction for this operation.

Response Payload

Element Name	Type	Description
result	string	The parameter returns the success or failure status of the operation.

deleteAttachment

A web service method to delete attachments associated to an opportunity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
deleteParams	*Common Attachment*	The parameter based on which deletion of attachment would trigger.
commitData	string	The flag to indicate whether or not to commit transaction for this operation.

Response Payload

Element Name	Type	Description
result	string	The parameter returns the success or failure status of the operation.

getAttachmentContent

A web service method to get attachment associated with an opportunity with file content if applicable.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
getParameters	*Common Attachment*	The parameter based on which attachment to be fetched would trigger.

Response Payload

Element Name	Type	Description
result	*Common Attachment*	The parameter returns the attachment with file content, if applicable.

getAttachmentsListWithoutContent

A web service method to get list of all the attachment associated with an opportunity without any file content.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
getParameters	*Common Attachment*	The parameter based on which list of attachments to be fetched would trigger.

Response Payload

Element Name	Type	Description
result	*Common Attachment*	The parameter returns the list of all the attachments without any file content.

deleteAllRevenuesInOpportunity

A web service method which deletes all revenue lines of an opportunity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
optyId	long	The unique opportunity identifier for the method deleteAllRevenuesInOpportunity.

Response Payload

Element Name	Type	Description
result	void	The parameter deletes all revenue lines of an opportunity.

getOpportunity

A web service method which queries a single opportunity record by primary key.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
optyId	long	The system generated unique identifier for this opportunity.

Response Payload

Element Name	Type	Description
result	*Opportunity*	The parameter returns the opportunity that matches the inbound key attributes.

createOpportunity

A web service method which creates a single opportunity record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
opportunity	*Opportunity*	The parameter for the opportunity to be created.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	*Opportunity*	The parameter returns the created opportunity.

updateOpportunity

A web service method which updates a single opportunity record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
opportunity	*Opportunity*	The parameter for the opportunity to be updated.

Response Payload

Element Name	Type	Description
result	*Opportunity*	The parameter returns the updated opportunity.

deleteOpportunity

A web service method which delete a single opportunity record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
opportunity	*Opportunity*	The parameter for the opportunity to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter delete a single opportunity record.

mergeOpportunity

A web service method which updates a single opportunity record if one exists, or else, create a new one.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
opportunity	*Opportunity*	The parameter for the opportunity to be merged.

Response Payload

Element Name	Type	Description
result	*Opportunity*	The parameter returns the merged opportunity.

findOpportunity

A web service method which queries a group of opportunities based on filter criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not currently used for the method findOppurtunity.

Response Payload

Element Name	Type	Description
result	*Opportunity*	The parameter returns a list of opportunities that satisfies the inbound criteria.

processOpportunity

A web service method which performs a create, update, delete, or merge operation on a list of opportunity rows. The specified operation is applied to all objects in the given list.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The parameter indicates what action shall be performed, such as create, update, merge, or delete.
opportunity	*Opportunity*	The parameter which provides a list of opportunities to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter which controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains only the key attributes or the full object.

Response Payload

Element Name	Type	Description
result	*Opportunity*	The parameter return a list of opportunities that are successfully processed.

processCSOpportunity

Performs a create, update, or delete operation on a list of opportunity rows. Different operations may be applied to different objects, depending on what is specified in the ChangeSummary object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter which controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The parameter returns the result of the operation including a list of created or updated data objects, and all warning and informational messages.

deleteOpportunityCompetitor

A web service method which delete an opportunity competitor.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
opportunityCompetitorVO	*Opportunity Competitor*	The parameter which provides the opportunity competitor to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter delete an opportunity competitor.

deleteOpportunityContact

A web service method which delete an opportunity contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
opportunityContactVO	*Opportunity Contact*	The parameter which provides the opportunity contact to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter delete an opportunity contact.

deleteOpportunityLead

A web service method which delete an opportunity lead.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
opportunityLeadVO	*Opportunity Lead*	The parameter which provides the opportunity lead to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter delete an opportunity lead.

deleteOpportunityReference

A web service method which delete an opportunity reference.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
opportunityReferenceVO	*Opportunity Reference*	The parameter which provides the opportunity reference to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter delete an opportunity reference.

deleteOpportunityResource

A web service method which delete an opportunity resource.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
opportunityResourceVO	*Opportunity Team Member*	The parameter which provides the opportunity resource to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter delete an opportunity resource.

deleteOpportunityMktResponse

A web service method which delete an opportunity response.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
opportunityResponseVO	*Opportunity Response*	The parameter which provides the opportunity response to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter delete an opportunity response.

deleteOpportunityRevenue

A web service method which delete an opportunity revenue.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
opportunityRevenueVO	*Opportunity Revenue*	The parameter which provides the opportunity revenue to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter delete an opportunity revenue.

processOpportunityRevenue

Performs a Create, Update, Delete, or Merge operation on a list of Opportunity Revenue rows. The specified operation is applied to all objects in the given list.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action shall be performed, such as Create, Update, Merge, or Delete.
opportunityRevenueVO	*Opportunity Revenue*	A list of opportunity revenues to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Opportunity Revenue*	A list of opportunity revenues that are successfully processed.

Element Name	Type	Description

deleteOpportunitySource

A web service method which delete an opportunity source.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
opportunitySourceVO	*Opportunity Source*	The parameter which provides the opportunity source to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter delete an opportunity source.

deleteOpportunityPartner

Deletes an Opportunity Partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
opportunityPartnerVO	*Opportunity Partner*	Opportunity partner to be deleted.

Response Payload

Element Name	Type	Description
result	void	

getDfltObjAttrHints

A web service method of Get operation for opportunity that returns control hints defined on a service view and its attributes.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

A web service method that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	The parameter returns the list of service view instances.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
deleteOpportunityResource	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
findOpportunity	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
deleteOpportunityLead	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
processOpportunityRevenue	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
deleteOpportunityPartner	MOO_MANAGE_OPPORTUNITY_PARTNERS_PRIV	Manage Opportunity Partners	Allows adding or removing of partners on the opportunity.
deleteOpportunityContact	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.

Operation Name	Privilege Code	Privilege Name	Privilege Description
updateOpportunity	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
checkConstraint	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
getOpportunity	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
deleteOpportunityReference	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
deleteAttachment	MOO_DELETE_OPPORTUNITY_PRIV	Delete Opportunity	Allows deleting of opportunities.
getDfltObjAttrHints	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
createAttachment	MOO_CREATE_OPPORTUNITY_PRIV	Create Opportunity	Allows creating of opportunities.
deleteOpportunityRevenue	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
doAutoAssignmentAsynchronously	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.

Operation Name	Privilege Code	Privilege Name	Privilege Description
deleteOpportunity	MOO_DELETE_OPPORTUNITY_PRIV	Delete Opportunity	Allows deleting of opportunities.
processOpportunity	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
mergeOpportunity	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
isSalesAccountUsedInOpportunity	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
getEntityList	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
deleteOpportunityMktResponse	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
deleteOpportunityCompetitor	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
copyAttachment	MOO_CREATE_OPPORTUNITY_PRIV	Create Opportunity	Allows creating of opportunities.
getAttachmentContent	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently

Operation Name	Privilege Code	Privilege Name	Privilege Description
			used tasks and reports useful for managing relevant opportunities.
processCSOpportunity	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
deleteOpportunitySource	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
createOpportunity	MOO_CREATE_OPPORTUNITY_PRIV	Create Opportunity	Allows creating of opportunities.
deleteAllRevenuesInOpportunity	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
getAttachmentsListWithoutContent	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
getServiceLastUpdateTime	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			registrations, approving or rejecting registrations, and forecasting sales.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOO_MANAGE_OPPORTUNITY_PARTNERS_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
MOO_MANAGE_OPPORTUNITY_PARTNERS_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
MOO_MANAGE_OPPORTUNITY_PARTNERS_PRIV	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
MOO_CREATE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
MOO_CREATE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
MOO_CREATE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
MOO_CREATE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
MOO_CREATE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
MOO_CREATE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
MOO_CREATE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOO_DELETE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
MOO_DELETE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
MOO_DELETE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
MOO_DELETE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
MOO_DELETE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_READ_ONLY_DUTY	Lead Registration Processing Read Only	Read Only role for Lead Registration Processing Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			products or events to specific customers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_READ_ONLY_DUTY	Personal Campaign Management Read Only	Read Only role for Personal Campaign Management Duty.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_READ_ONLY_DUTY	Product Recommendation Analysis Read Only	Read Only role for Product Recommendation Analysis Duty
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_READ_ONLY_DUTY	Sales Forecasting Management Read Only	Read Only role for Sales Forecasting Management Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_READ_ONLY_DUTY	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZPM_CHANNEL_SALES_ MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_ PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_ MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_ PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_ VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_ VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_ VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZPM_CHANNEL_SALES_ MANAGER_JOB	ORA_MOT_TERRITORY_ MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_ MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_READ_ONLY_DUTY	Territory Management Read Only	Read Only role for Territory Management Duty.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Appointment Transient Assignee

A participant in an appointment and each instance of a recurring appointment. The participant is an internal resource.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TransientAssignee

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Appointment Transient*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityAssigneeId	long	The unique identifier for the appointment resource participant. • Primary Key
ActivityId	long	The unique identifier of the activity.
AppointmentResponseCd	string	The response to an appointment invitation such as Accepted, Rejected, and Tentatively Accepted.
AssigneeId	long	The identifier of the party corresponding to resource participating at the appointment.
AssigneeRsrcOrgId	long	The identifier of the organization to which the resource belongs.
OwnerFlag	boolean	The attribute that indicates that the appointment resource participant is also the appointment owner.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
ShowTimeAsCd	string	The attribute to show a resource time as Busy or Available on a calendar.

Appointment Transient Category

A category that the appointment and its instances belong to, such as a phone call or demonstration.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TransientCategory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Appointment Transient*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityCategoryId	long	The unique identifier for the Appointment Category table. • Primary Key
ActivityId	long	The unique identifier of the activity.
CategoryCd	string	The attribute for lookup code for category.

Appointment Transient Contact

A contact participant in an appointment and each instance of a recurring appointment.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TransientContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Appointment Transient*

Relationship Type	Object or Service
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityContactId	long	The identifier of the row in the intersection table between Appointment and Contact. • Primary Key
ActivityId	long	The unique identifier of the activity.
ContactId	long	The Party id of the contact.
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.

Name	Type	Description
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.

Appointment Transient Note

A note for an appointment and each instance of a recurring appointment.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TransientNote

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Appointment Transient*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
NoteId	long	The unique identifier of the note. • Primary Key
NoteTxt	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The description of the note.
NoteTypeCode	string	The lookup code for the type of the note associated to the appointment, such as, General, Reference, or Special.

Name	Type	Description
PartyId	string	The unique identifier of the contact party.
PartyName	string	The name of the party.
SourceObjectCode	string	Indicates that the object associated to the appointment is a Note.
SourceObjectId	long	The Note id associated to the appointment.
VisibilityCode	string	The Lookup code for note visibility, such as private, internal or external.

Appointment Transient

A individual appointment or an instance of a recurring appointment. For example, monthly lunchtime sales meetings or a client visit.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TransientAppointment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Appointment Transient Category SDO*
Contains	*Appointment Transient Note SDO*
Contains	*Appointment Transient Assignee SDO*
Contains	*Appointment Transient Contact*
Contained by	*Opportunity*
Contained by	*Reference*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*

Relationship Type	Object or Service
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityDescription	string	The description of the appointment.
ActivityId	long	The unique identifier of the activity. • Primary Key
ActivityLocationTxt	string	The location of the appointment.
ActivityName	string	The subject of the appointment.
AlarmFlag	boolean	Indicates whether a reminder alarm should start prior to the appointment.
AllDayFlag	boolean	Indicates the appointment is an all-day appointment.
AppointmentAssignee	*Appointment Transient Assignee*	Not used in V1.0 for appointment.
AppointmentContact	*Appointment Transient Contact*	The contact populated on the appointment using its party id.
AppointmentNote	*Appointment Transient Note*	The appointment note.
ApptAlarmTmMinimumNumber	long	Specifies how long the Alarm Notice Time should be in minutes.
AsgnDenormFlag	boolean	Not used in V1.0 for appointment.
AsgnManualFlag	boolean	Not used in V1.0 for appointment.
AsgnSystemFlag	boolean	Not used in V1.0 for appointment.
CategoryCodeTransient	string	The lookup code corresponding to the category set on the appointment.

Name	Type	Description
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CustomerId	long	The identifier of the customer on the appointment.
CustomerName	string	The name of the customer on the appointment.
CustomerPartyType	string	The customer type of the customer assigned to the appointment.
DoNotRouteFlag	boolean	Not used in V1.0 for appointment.
EditMode	string	Not used in V1.0 for appointment.
FuseParticipants	string	Internal Attribute. Do not use.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LockAsgnFlag	boolean	Not used in V1.0 for appointment.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
Owner	string	The name of the appointment owner.
OwnerId	long	The Party Id of the appointment owner.
OwnerRsrcOrgId	long	The identifier corresponding to the organization to which the appointment owner belongs.

Name	Type	Description
PartyId	long	The unique identifier of the contact party.
PartyId1	long	The name of the party.
PartyName	string	The name of the party.
PartyName1	string	The name of the party.
PlannedDurationNumber	decimal	Not used in V1.0 for appointment.
PlannedDurationUOMCd	string	Not used in V1.0 for appointment.
PlannedEndDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The appointment end date and time.
PlannedStartDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The appointment start date and time.
RecurApptId	long	The identifier of the appointment record describing recurrence.
RecurDay	long	The week days the appointment can be recurring on.
RecurEndDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Specifies a specific date when recurrence stops.
RecurExceptionFlag	boolean	Indicates that this is an exception in a recurrence series.
RecurFlag	boolean	Indicates that the appointment is recurring.
RecurFreqNumber	long	Recurrence frequency, such as, Every x Days, Every x Weeks, Every x Months, Every x Years.
RecurFriFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Friday.
RecurMonFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Monday.
RecurMonth	string	In yearly recurrence, indicates the month appointments occur in.

Name	Type	Description
RecurOccursNumber	long	The number of recurrence instances.
RecurOrigInstDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The first date and time an appointment occurs in a recurring series.
RecurPattern	string	Indicates recurrence patterns such as Third Week of Every Month.
RecurReplaceCd	string	Not used in V1.0 for appointment.
RecurSatFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Saturday.
RecurSunFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Sunday.
RecurThuFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Thursday.
RecurTueFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Tuesday.
RecurTypeCd	string	Indicates the type of recurrence such as Daily, Weekly, Monthly, Yearly.
RecurWedFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Wednesday.
RecurWeekDayCd	string	Indicates if the appointment should occur every day including weekends or just on week days, applicable for daily recurring appointments.
ReferenceCustomerId	long	The identifier corresponding to the reference customer set on the appointment.
ReferenceCustomerName	string	The reference customer name set on the appointment.
Response	string	The response of the participant, such as Accepted, Rejected, Tentatively Accepted.
ShowTimeAs	string	Indicates how the time between the appointment start and end date-time shows on a participant's calendar, such as Busy.
SourceObjectCd	string	Indicates the object type the appointment is related to.

Name	Type	Description
SourceObjectCodeMeaningTransient	string	The code indicating the type of business object associated with the appointment, examples: LEAD or OPPORTUNITY.
SourceObjectId	long	The object identifier to which the appointment is related.
TemplateFlag	boolean	Not used in V1.0 for appointment.
TemplateId	long	Not used in V1.0 for appointment.
TransientCategory	*Appointment Transient Category*	The category of an appointment.
VisibilityCd	string	Not used in V1.0 for appointment.

Category Summary Revenue

The summarized revenue amount for a given revenue category within an opportunity revenue line set.

QName: {http://xmlns.oracle.com/oracle/apps/sales/opptyMgmt/revenues/revenueService/}CategorySummaryRevenue

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Opportunity*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BUOrgId	long	The business unit identifier.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CrmCategorySummaryRevenue	decimal	The category summary revenue in corporate currency.
CrmConversionRate	decimal	The rate is used for the conversion of the revenue amount to the CRM common currency to facilitate the computation of the revenue forecast metrics. This is the amount that one currency can be exchanged for, at a specific point of time.
CrmConversionRateType	string	The rate type is used for the conversion of the revenue amount to the crm common currency for Revenue Forecast Metrics, if the currency of the revenue line is different. This is usually spot, user defined or corporate.
CrmCurcyCode	string	The CRM common currency code.
EffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The estimated close date for the category summary revenue line.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OptyId	long	The unique identifier of the opportunity.

Name	Type	Description
PrimaryFlag	boolean	The attribute that indicates whether the revenue record is a summary revenue line.
RevnAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The attribute for revenue amount.
RevnAmountCurcyCode	string	The currency that the amount on this revenue line is based on.
RevnCategoryCode	string	The revenue category used in Revenue Line Set functionality.
RevnId	long	The attribute for revenue identifier. • Primary Key
RevnLineTypeCode	string	This denotes the type of revenue line like opportunity Summary Revenue, Standard Revenue and so on.
RevnNumber	string	The attribute for revenue number.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Common Attachment

The attachment that can include documents, files, or web site links associated with appointments, interactions or tasks.

QName: {http://xmlns.oracle.com/apps/crmCommon/objects/objectsService/}CommonAttachments

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Appointment Service*
Handled by	*Customer Interaction*
Handled by	*Activity Service*

Relationship Type	Object or Service
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttachedDocumentId	long	The identifier of the document attachment.
Attachment	string	The title or name of the attachment.
CategoryName	string	The name of the attachment category.
DatatypeCode	string	The code value of the data type.
Description	string	The free text description of the record.
DmFolderPath	string	The folder path of the attachment.
DmNode	decimal	The attachment node.
DmRepository	string	The attachment repository.
DmType	string	The type of attachment.
DmVersionNumber	string	The version number of the attachment.
DocumentAttributes	string	The attributes of the document attachment.
DocumentEntityId	long	The identifier of document entity.
DownloadStatus	string	The download status of attachment.
EntityAttributes	string	The entity attributes of the attachment.
EntityName	string	The name of the entity attachment.
FileName	string	The name of the file attachment.
FileURL	string	The URL of the file attachment.

Name	Type	Description
Pk1Value	string	Value of primary key 1.
Pk2Value	string	Value of primary key 2.
Pk3Value	string	Value of primary key 3.
Pk4Value	string	Value of primary key 4.
Pk5Value	string	Value of primary key 5.
TableName	string	The table name of attachment.
Title	string	The attachment title.
URL	string	The destination URL associated with a specific Google AdWords ad.
UploadedFile	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The uploaded attachment file.
UploadedFileContentType	string	The content type of file attachment.
UploadedFileLength	long	The length of file attachment.
UploadedFileName	string	The name of the file attachment.
UploadedText	string	The attachment text.
UsageType	string	The usage type of the attachment.
VersionControlIcon	string	The attachment version control.

Item Deletion External Error

The list of errors returned if an external transaction, such as an open inventory transaction or an open sales order, includes a reference to an item that is marked for deletion.

QName: {http://xmlns.oracle.com/apps/scm/productModel/deleteGroups/publicModel/}DeleteError

Logical Business Objects

- SCM : Product Model : Item Delete Group

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Item External Reference*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
DeleteEntitySequenceId	long	The unique identifier of table delete entities. • Primary Key
DeleteErrorType	int	A value which indicates the type of error, which could be a functional error or a system error.
ErrorCode	string	The code of the error message logged against a delete entity.
ErrorMessage	string	The actual message logged against a delete entity.
ErrorSequenceNumber	long	A numeric value used to indicate the sequence number for a particular error. • Primary Key
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ProgramName	string	A legacy attribute that indicates the program or the application that last updated the database record.

Item External Reference

The reference to an item from an external transaction, such as a sales order or an inventory transaction.

QName: {http://xmlns.oracle.com/apps/scm/productModel/deleteGroups/publicModel/}DeleteEntity

Logical Business Objects

- SCM : Product Model : Item Delete Group

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Item Deletion External Error*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
DeleteDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date in which the entity was submitted for deletion.
DeleteEntitySequenceId	long	The unique identifier of table delete entities. • Primary Key
DeleteEntityType	int	A numeric value which indicates the type of delete entity, for example, an item, a structure or a change order.
DeleteErrorVO	*Item Deletion External Error*	The SDO object used to populate errors pertaining to a delete entity.
DeleteGroupSequenceId	long	The unique identifier of a Delete Group to which an entity to be deleted has been added.
DeleteStatusType	int	A numeric value which indicates the status of a delete entity, for example, 1 indicates

Name	Type	Description
		unprocessed, 4 indicates successfully deleted, and so on.
EntitySequenceNumber	long	The sequence number of an entity within a delete group. This may be used to group similar entities together for processing.
Pk1Value	long	A numeric value which, with the combination of Pk2Value, Pk3Value, Pk4Value and Pk5Value may form a unique key for an entity, for example, for an Item Type delete entity. This is the inventory item identifier.
Pk2Value	long	A numeric value which, with the combination of Pk1Value, Pk3Value, Pk4Value and Pk5Value may form a unique key for an entity, for example, for an Item Type delete entity. This is the organization identifier.
Pk3Value	long	A numeric value which, with the combination of Pk1Value, Pk2Value, Pk4Value and Pk5Value may form a unique key for an entity, for example, for an Item Supplier Type delete entity. This is the supplier identifier.
Pk4Value	long	A numeric value which, with the combination of Pk1Value, Pk2Value, Pk3Value and Pk5Value may form a unique key for an entity, for example, for an Item Supplier Site Type delete entity. This is the supplier site identifier.
Pk5Value	long	A numeric value which, with the combination of Pk1Value, Pk2Value, Pk3Value and Pk5Value may form a unique key for an entity, for example, for a Structure type delete entity. This is the inventory item identifier.

Note

The object that captures comments, information, or instructions for an Oracle Fusion Applications business object.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/noteService}Note

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note Descriptive Flexfields*
Contained by	*Objective*
Contained by	*Opportunity*
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Contained by	*Activity*
Contained by	*Sales Competitor*
Contained by	*Sales Lead*
Contained by	*Business Plan*
Contained by	*Program Enrollments*
Contained by	*Reference*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*

Relationship Type	Object or Service
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreatorPartyId	long	This is the party identifier for the note creator.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteFlag	boolean	Indicates whether the user has access to delete the note.
Dff	*Note Descriptive Flexfields*	The descriptive flex field segment.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record

Name	Type	Description
NoteAttributeCategory	string	The contextual flex field for development usage.
NoteAttributeUid1	string	The flex field for development usage.
NoteAttributeUid2	string	The flex field for development usage.
NoteAttributeUid3	string	The flex field for development usage.
NoteAttributeUid4	string	The flex field for development usage.
NoteAttributeUid5	string	The flex field for development usage.
NoteId	long	The unique identifier of the note. • Primary Key
NoteNumber	string	The alternate unique identifier of the note. A user key that is system generated or from an external system.
NoteTitle	string	The title of the note entered by the user.
NoteTxt	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	This is the column that stores the actual note text.
NoteTypeCode	string	This is the note type code for categorization of note.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
SourceObjectCode	string	This is the source_object_code for the source object as defined in OBJECTS Metadata.
SourceObjectId	string	This is the source_object_Uid for the source object such as Activities, Opportunities, and so on defined in OBJECTS metadata.
UpdateFlag	boolean	Indicates whether the user can update the note.
VisibilityCode	string	This is the attribute to specify the visibility level of the note.

Note Descriptive Flexfields

The descriptive flex field that captures additional information for notes, such as a priority or status.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/flex/noteDff/}NoteDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Note*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
NoteId	long	The unique identifier of the note. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Opportunity

The object used by a sales organization to track information about a potential sale such as the sales account, key contacts, product interests, and potential revenues.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opportunityService/}Opportunity

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Opportunity Deal*
Contains	*Opportunity Team Member*
Contains	*Opportunity Reference*
Contains	*Opportunity Revenue Territory*
Contains	*Opportunity Lead*
Contains	*Category Summary Revenue*
Contains	*Revenue Line Set*
Contains	*Opportunity Competitor*

Relationship Type	Object or Service
Contains	*Opportunity Response*
Contains	*Opportunity Recurring Revenue*
Contains	*Appointment Transient*
Contains	*Note*
Contains	*Opportunity Subscription*
Contains	*Opportunity Partner*
Contains	*Opportunity Contact*
Contains	*Opportunity Split Revenue*
Contains	*Opportunity Revenue*
Contains	*Opportunity Source*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountNumber	string	The account number of the opportunity sales account.
Appointment	*Appointment Transient*	The appointments associated with the opportunity.
AssetId	long	Identifier of the asset of the opportunity.
AssetNumber	string	Asset number of the asset of the opportunity.
AssetProduct	string	The associated Asset's Product name
AssetSerialNumber	string	The associated Asset's Serial number

Name	Type	Description
AverageDaysAtStage	long	The average days an opportunity remains in the current sales stage.
BdgtAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The budget amount from the sales account.
BudgetAvailableDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the budget will be available.
BudgetedFlag	boolean	The attribute that indicates if the opportunity sales account has its budget approved for the potential purchase.
CategorySummaryRevenue	*Category Summary Revenue*	The category summary revenue for revenue line set enabled opportunity.
ChampionFlag	boolean	The attribute that indicates if this opportunity has a key internal sponsor.
ChildRevenue	*Opportunity Revenue*	The revenue items on the opportunity.
City	string	The name of the city.
Comments	string	The comments for the record.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
ConsumerFirstName	string	The First Name of the Target Party for the opportunity.
ConsumerLastName	string	The Last Name of the Target Party for the opportunity.
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CrmConversionRate	decimal	The rate is used for the conversion of the revenue amount to the CRM common currency to facilitate the computation of the revenue forecast metrics. This is the amount that one

Name	Type	Description
		currency can be exchanged for, at a specific point of time.
CrmRevenue	decimal	The opportunity revenue amount converted to the corporate currency.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CurrentFyPotentialRevenue	decimal	Do not use this attribute.
CustomerAccountId	long	The customer account associated with the opportunity.
DUNSNumber	string	The D-U-N-S number of the sales account.
DealHorizonCode	string	The attribute that indicates how long it may take to close the deal. This field refers to the lookup type MOO_SETID_DEAL_HORIZION.
DealHorizonCodeSetId	long	The set identifier for the Deal Horizon of this opportunity.
DecisionLevelCode	string	The attribute that indicates the decision level at the opportunity sales account to commit. This field refers to the lookup type MOO_SETID_DECISION_LEVEL.
DecisionLevelCodeSetId	long	The set identifier for the Decision Level of this opportunity.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
Description	string	The free text description of the record.
DescriptionText	string	The attribute for sales objective of the opportunity.
DownsideAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The worst case amount.
EffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The estimated close date for the opportunity.
EmailAddress	string	The email address associated with the record.

Name	Type	Description
EmployeesTotal	decimal	The total number of employees.
ExpectAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The expected revenue amount.
FormattedAddress	string	Do not use this attribute.
IBAssetId	long	Identifier of the installed base asset of the opportunity.
IBAssetNumber	string	Asset number of the installed base asset of the opportunity.
IBAssetSerialNumber	string	The associated installed base Asset's Serial number
KeyContactId	long	The identifier of the primary contact.
LastAssignedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the opportunity is last assigned.
LastAssignedTimestamp	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The timestamp when the opportunity is last assigned.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LineOfBusinessCode	string	The line of business that is responsible for the opportunity.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
LookupCategory	string	The status category of the opportunity.
LookupValuesId	long	The attribute for lookup value identifier for the opportunity status.
MaximumDaysInStage	long	The attribute for maximum days the opportunity can be in the sales stage prior to considering it stalled.

Name	Type	Description
Name	string	The name of the opportunity.
Note	*Note*	The notes associated with the opportunity.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
OpportunityCompetitor2	*Opportunity Competitor*	The attribute containing all competitors associated with the opportunity, including both primary and non-primary competitors.
OpportunityCompetitor3	*Opportunity Competitor*	The non-primary competitors associated with the opportunity.
OpportunityContact	*Opportunity Contact*	The contacts associated with the opportunity.
OpportunityDeal	*Opportunity Deal*	The deal registrations associated to the opportunity.
OpportunityLead	*Opportunity Lead*	The attribute for leads associated to the opportunity.
OpportunityReference	*Opportunity Reference*	The references associated with the opportunity.
OpportunityResource	*Opportunity Team Member*	The resources on the opportunity team.
OpportunityResponse	*Opportunity Response*	The attribute for marketing responses associated with the opportunity.
OpportunitySource1	*Opportunity Source*	The attribute for marketing sources associated to the opportunity.
OpportunitySubscription	*Opportunity Subscription*	Opportunity Subscription aggregates all revenue subscriptions to opportunity level.
OpportunityTypeCode	string	Display the different types of opportunity such as new, renewal and expansion.

Name	Type	Description
OptyCreatedBy	string	The attribute that replicates WHO column CREATED_BY for functional use.
OptyCreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The attribute that replicates WHO column creation_date for functional use.
OptyId	long	The unique identifier of the opportunity. • Primary Key
OptyLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The attribute that replicates WHO column last_update_date for functional use.
OptyLastUpdatedBy	string	The attribute that replicates WHO column last_updated_by for functional use.
OptyNumber	string	The number of the opportunity.
OwnerResourcePartyId	long	The identifier of the opportunity owner.
PartyName	string	The name of the party.
PartyName1	string	The name of the opportunity owner.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUniqueName1	string	The unique name of the primary opportunity competitor.
PhaseCd	string	The phase of the opportunity sales stage.
PhonePreferenceExistsFlag	boolean	The attribute that indicates if the contact has specified a phone preference.
PostalCode	string	The postal code element of the address.
PrConRelationshipId	long	The relationship identifier of the primary contact on the opportunity.

Name	Type	Description
PrSrcNumber	string	The primary marketing source or campaign that generated this opportunity.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PrimaryCompetitorId	long	The identifier of the primary competitor of this opportunity.
PrimaryContactEmailAddress	string	The e-mail address of the primary contact.
PrimaryContactFirstName	string	The first name of the primary contact for the opportunity.
PrimaryContactFormattedPhoneNumber	string	The formatted phone number for the primary contact on the opportunity.
PrimaryContactLastName	string	The last name of the primary contact for the opportunity.
PrimaryContactPartyId	long	The party identifier of the primary contact.
PrimaryContactPartyName	string	The name of the primary contact.
PrimaryOrganizationId	long	The identifier of the business unit to which this opportunity belongs.
PrimaryOrganizationName	string	The name of the business unit to which this opportunity belongs.
PrimaryPartnerId	long	The party identifier of primary partner.
PrimaryPartnerOrgPartyName	string	The attribute for name of primary partner assigned to the opportunity.
PrimaryRevenueId	long	The identifier for the summary revenue line for the opportunity. The summary revenue line stores the total revenue amount of an opportunity.
PrimarySubscriptionId	long	The unique identifier for the primary subscription of an opportunity.

Name	Type	Description
PrimarySubscriptionNumber	string	The alternate identifier for primary subscription of the opportunity.
QuotaFactor	decimal	The quote factor of the opportunity sales stage.
QuotedFlag	boolean	Indicates that a quote has been created for this Opportunity.
RcmndWinProb	decimal	The recommended win probability for an opportunity in the sales stage.
ReasonWonLostCode	string	The win or loss reason for the opportunity. Valid values from the MOO_SETID_WIN_LOSS_REASON lookup type.
ReasonWonLostCodeSetId	long	The set identifier for the win or loss reason for the opportunity.
RecurringRevenue	*Opportunity Recurring Revenue*	The revenues that span over a period of time and are sourced from the same product on the opportunity.
Registered	string	The attribute that indicates the deal registration status.
RegistrationStatus	string	The registration type used for the partner-created opportunity or deal.
RegistrationType	string	The registration type used for the partner-created opportunity or deal.
RenewalProcess	string	The renewal process can be manual, do not renew or automatic renewal.
Revenue	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The attribute for revenue amount.
RevenueLineSet	*Revenue Line Set*	The revenue line set associated with the opportunity.
RevenuePartnerPrimary	*Opportunity Partner*	The partners associated to the opportunity.
RevenueTerritory	*Opportunity Revenue Territory*	The territories assigned to the opportunity.
RevenueType	string	Do not use this attribute.

Name	Type	Description
RevnId	long	The attribute for revenue identifier.
RevnLineSetEnabledFlag	boolean	The attribute that indicates whether the sales method on the opportunity is revenue line set enabled.
RiskLevelCode	string	The attribute that indicates the risk level for the opportunity. This field refers to the lookup type MOO_SETID_RISK_LEVEL.
RiskLevelCodeSetId	long	The set identifier for risk-level of an opportunity.
SalesAccountId	long	The identifier of the opportunity sales account.
SalesAccountUniqueName	string	The name of the sales account.
SalesChannelCd	string	The attribute that indicates the sales channel for the opportunity.
SalesMethod	string	The attribute for sales method of the opportunity.
SalesMethodEOObjVerNumber	int	The object version number of the sales method associated to the opportunity.
SalesMethodId	long	The sales method identifier for this opportunity. This indicates the sales process used.
SalesStage	string	The sales stage of the opportunity.
SalesStageEOObjVerNumber	int	The object version number of the sales stage associated to the opportunity.
SalesStageId	long	The identifier of the sales stage of the opportunity.
SplitRevenue	*Opportunity Split Revenue*	The revenue or nonrevenue credit allocated to resources who have contributed to the selling effort for the opportunity.
StageStatusCd	string	The default status for the opportunity sales stage.
State	string	The name of the state.

Name	Type	Description
StatusCode	string	The pre-defined code used to indicate the status.
StatusCodeSetId	long	The set identifier for the Status of this opportunity.
StgOrder	decimal	The order of the opportunity's sales stage within the sales method.
StrategicLevelCode	string	The attribute that indicates the level of the strategic value to work with the opportunity sales account. This field refers to the lookup type MOO_SETID_STRATEGIC_VALUE.
StrategicLevelCodeSetId	long	The set identifier for strategic value of an opportunity.
TargetPartyId	long	The party identifier of the opportunity sales account.
TargetPartyName	string	The name of the sales account.
TargetPartyPrimaryAddressCountry	string	Country of the primary account's primary address.
UpdateFlag	boolean	This flag controls if the user has access to update the record.
UpsideAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The best case amount.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.
WinProb	decimal	The win-probability percentage.

Opportunity Competitor

The organization that competes with the deploying organization in the sales opportunity.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opportunityService/}OpportunityCompetitor

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Opportunity*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AnnualRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The competitor company's annual revenue.
CmptPartyId	long	Party ID with competitor party usage.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The estimated close date for the opportunity.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Name	string	The name of the opportunity.

Name	Type	Description
Name1	string	The name of the opportunity.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
ObjectVersionNumber2	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
OptyCompetitorId	long	The identifier of the opportunity's competitor. • Primary Key
OptyId	long	The unique identifier of the opportunity.
PartyName	string	The name of the party.
PartyName1	string	The name of the party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUniqueName1	string	The unique name of the opportunity competitor.
PrimaryContactPartyName	string	The attribute for the name of primary contact.
PrimaryFlg	string	The flag identifying the primary competitor for the opportunity.
RevnAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The revenue amount.
RevnAmountCurcyCode	string	The currency that the amount on this revenue line is based on.

Name	Type	Description
SalesAccountId	long	The identifier of the opportunity sales account.
SalesAccountUniqueName	string	The name of the sales account.
StgId	long	The current sales stage identifier for opportunity.
ThreatLevelCode	string	Threat level code. Out of the box values are Low, Medium and High. This field refers to the ZBS lookup type for Competitor Threat Level.
WinProb	decimal	The win-probability percentage.

Opportunity Contact

The contact associated with the opportunity who is involved in the purchase.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opportunityService/}OpportunityContact

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Opportunity*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AffinityLvlCd	string	The affinity level for an opportunity contact. Valid values from the HZ_SLS_CNTCT_ AFFINITY_CODE lookup type.
Comments	string	The comments for the record.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
ContactPartyNumber	string	The party number of the opportunity contact.
ContactPointId	long	The unique primary key identifier for the contact point.
ContactPointId1	long	The unique identifier for a contact point.
ContactPointType	string	The type of the contact point.
ContactPointType1	string	The type of the contact point. For example, phone, e-mail, and so on.
ContactedFlg	string	Indicates if there was a previous communication with the contact regarding this opportunity.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/ types/}dateTime-Timestamp	The date when the record was created.
DoNotContactFlag	boolean	Indicates whether the contact can be contacted through phone, e-mail, and mail.
EmailAddress	string	The email address associated with the record.
EmailPreferenceExistsFlag	boolean	Indicates if the contact has specified an email preference.
FormattedAddress	string	The formatted address of the opportunity contact.
FormattedMultilineAddress	string	The formatted multi-line address for the opportunity contact.
FormattedPhoneNumber	string	The formatted phone number.

Name	Type	Description
InfluenceLvlCd	string	The influence level of the opportunity contact. Valid values from the HZ_SLS_CNTCT_ INFLUENCE_LVL_CD lookup type.
JobTitle	string	The job title of the opportunity contact.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/ types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
ObjectId	long	The identifier of the object in the contact's relationship record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
OptyConId	long	The identifier of the opportunity contact. • Primary Key
OptyId	long	The unique identifier of the opportunity.
OrgContactId	long	The identifier of the organization contact.
OrganizationPartyId	long	The party identifier of the contact's organization.
OrganizationPartyName	string	The name of the contact's organization.
PERPartyId	long	The party identifier of the opportunity contact.

Name	Type	Description
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PersonCentricJobTitle	string	The job title of the contact person.
PhonePreferenceExistsFlag	boolean	Indicates if the contact has specified a phone preference.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PrimaryFlg	string	Indicates whether the contact is the primary contact for the opportunity.
RawPhoneNumber	string	Unformatted telephone number.
RelationshipCode	string	Forward or a backward relationship code that describes the contact's relationship record.
RelationshipId	long	The relationship identifier for the record.
RelationshipRecId	long	The identifier of the contact's relationship record.
RoleCd	string	Role played by contact on the opportunity. Valid values from the HZ_SLS_CNTCT_BUY_ROLE_CODE lookup type.
SalesAffinityCode	string	Contact's affinity towards the deploying organization.
SalesBuyingRoleCode	string	Contact's role in the buying process.
SalesInfluenceLevelCode	string	Contact's level of influence in the buying process.
SubjectId	long	The identifier of the subject in the contact's relationship record.

Name	Type	Description
TargetPartyId	long	The Party identifier of the opportunity sales account.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Opportunity Deal

The deal registrations associated with the opportunity.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opportunityService/}OpportunityDeal

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Opportunity*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ApprovedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The approval date of the deal.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DealExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expiration date of the deal.

Name	Type	Description
DealId	long	The opportunity deal identifier.
DealName	string	The name of the deal.
DealNumber	string	The opportunity deal number.
DealSize	decimal	Deal Size
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OptyDealId	long	The opportunity deal identifier. • Primary Key
OptyId	long	The unique identifier of the opportunity.
PartnerId	long	The unique identifier of the partner.
PartyName	string	The name of the party.
StatusCode	string	The pre-defined code used to indicate the status.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Opportunity Lead

The lead from which the opportunity originates.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opportunityService/}OpportunityLead

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Opportunity*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
ContactName	string	Name associated with the primary lead contact.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CustomerId	long	Customer Id. It is a reference to the customer record in the TCA schema.
CustomerName	string	Name of the customer.
DealEstimatedCloseDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The estimated close date of the deal registration.
DealExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expiration date of the lead registration.
DealPartProgramId	long	The partner program on the lead registration.

Name	Type	Description
DealSize	decimal	Deal Size.
DealType	string	The attribute for deal type.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LeadAging	int	Lead age in days
LeadId	long	Lead identifier.
LeadName	string	Lead name.
LeadNumber	string	The attribute for the lead number.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OptyId	long	The unique identifier of the opportunity.
OptyLeadId	long	The opportunity lead identifier. • Primary Key
PartnerTypeCd	string	The type of partner on the lead registration.
PrDealPartOrgPartyId	long	The party organization identifier of the partner on the lead registration.
PrDealPartResourcePartyId	long	The identifier of the primary partner resource on the lead registration.
PrimaryContactId	long	Identifer of the sales lead contact marked as a primary lead contact.
Rank	string	Lead Rank.
RankMeaning	string	Meaning associated with specific lead rank.

Name	Type	Description
RegistrationNumber	string	The attribute for lead registration number.
StatusCode	string	Lead Status Code.
StatusCodeMeaning	string	Meaning associated with the codes defined to indicate lead status.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Opportunity Partner

The partner that is contributing to the selling effort for an opportunity revenue line.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/revenues/revenueService/}RevenuePartner

Logical Business Objects

- CRM : Opportunity Management : Sales Revenue

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Opportunity*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
DealEstCloseDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The estimated close date of the deal registration.
DealExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The expiration date of the deal registration.
DealType	string	The type of deal registration.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OptyId	long	The unique identifier of the opportunity.
PartOrgEmailAddress	string	The email address of the Partner Organization.
PartOrgFormattedPhoneNumber	string	The phone number of the Partner Organization.
PartOrgPartyId	long	The party identifier of the partner organization associated to the revenue.
PartProgramId	long	The identifier of the partner program of the partner in the context of this opportunity.
PartTypeCd	string	The partner type for the partner in the context of this opportunity.
PartnerPartyNumber	string	The party number of the Partner Party associated to the Opportunity.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyName1	string	The name of the party.
PrPartResourcePartyId	long	The identifier of the primary partner resource.
PreferredContactEmail	string	Email of the Partner's Primary contact.

Name	Type	Description
PreferredContactName	string	Name of the Partner's Primary contact.
PreferredContactPhone	string	Phone Number of the Partner's Primary contact.
RegistrationNumber	string	The registration number of the deal registration.
RegistrationStatus	string	The registration status of the Partner Created Opportunity/Deal.
RevnId	long	Identifier of the summary revenue for this opportunity.
RevnPartOrgPartyId	long	Identifier for the partners associated to the opportunity. • Primary Key
RevnPartnerNumber	string	The label displaying the association between a revenue line and an opportunity partner.

Opportunity Recurring Revenue

The revenues that span over a period of time sourced from the same product on an opportunity.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/revenues/revenueService/}RecurringRevenue

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Opportunity Split Revenue*
Contained by	*Opportunity*
Contained by	*Opportunity Revenue*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	An additional currency enabled field on the revenue object to store any custom numeric value.
AdditionalNumber	decimal	An additional numeric field on the revenue object to store any custom numeric value.
AdditionalText1	string	An additional Text field on the revenue object to store any custom text.
AdditionalText2	string	An additional Text field on the revenue object to store any custom text.
BUOrgId	long	The business unit identifier.
Comments	string	The comments for the record.
CommitFlag	boolean	The attribute that indicates if this revenue line should be used for forecasting.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
ConversionRate	decimal	This rate is used for the conversion of the revenue amount to the opportunity summary currency, if the currency of the revenue line is different from that of the opportunity. This is the amount that one currency can be exchanged for, at a specific point of time.
ConversionRateType	string	The currency conversion rate type that is used to derive the exchange rate for converting the user-entered currency to CRM Corporate currency.
CostAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The cost amount.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
CustomerAccountId	long	The customer account identifier.
DownsideAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The worst case amount.
EffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The estimated close date for this revenue - defaulted from opportunity's close date.
ExpectAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The expected revenue amount.
ExpectDlvryDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expected delivery date. This column is used by opportunity products only.
ForecastOverrideCode	string	The forecast override code that takes values of always, never, or criteria.
InventoryItemId	long	The product inventory item identifier.
InventoryOrgId	long	The product inventory organization identifier.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MarginAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The attribute for margin amount.
NonRecurringRevenue	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Non-Recurring Revenue Amount (Net)
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OptyId	long	The unique identifier of the opportunity.
OwnerResourceOrgId	long	The identifier for resource organization of the revenue owner.

Name	Type	Description
PrCmptPartyId	long	The primary competitor party identifier.
PrimaryFlag	boolean	The attribute that indicates whether the revenue record is a summary revenue line.
ProdGroupId	long	The product group identifier.
Quantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The quantity of the product.
RecurEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The recurrence end date.
RecurFrequencyCode	string	The frequency for the recurrence.
RecurNumberPeriods	int	The number of periods for creating the recurrence.
RecurParentRevnId	long	The attribute that indicates the parent revenue identifier for the recurrence.
RecurQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The recurrence quantity.
RecurRevenue	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The recurring revenue amount on the revenue line
RecurRevnAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The revenue amount for the recurrence.
RecurStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The recurrence start date.
RecurTypeCode	string	The recurring type code.
ResourcePartyId	long	The identifier for revenue owner, inherited from the parent record.
RevnAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The attribute for revenue amount.
RevnAmountCurcyCode	string	The currency that the amount on this revenue line is based on.
RevnId	long	The attribute for revenue identifier. • Primary Key

Name	Type	Description
RevnNumber	string	The editable revenue number, which is defaulted from REVN_ID. Must be unique and cannot be NULL.
SalesAccountId	long	The identifier of the opportunity sales account.
SalesCreditTypeCode	string	The quote or non-quota sales credit type.
SplitParentRevnId	long	The attribute for split parent revenue identifier.
SplitPercent	decimal	The attribute for split percent.
SplitRevenue	*Opportunity Split Revenue*	The revenue or nonrevenue credit amount allocated to the resource who has contributed to the selling effort for an opportunity revenue line.
SplitTypeCode	string	The attribute for split type code.
StatusCode	string	The pre-defined code used to indicate the status.
StatusCodeSetId	long	The set identifier for the status of this revenue.
TargetPartyId	long	The party identifier of the opportunity sales account.
TypeCode	string	The attribute that indicates revenue type for this revenue.
TypeCodeSetId	long	The set identifier for the revenue type of this opportunity.
UOMCode	string	The attribute for unit of measure code for product.
UnitPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The attribute for unit price of product.
UpsideAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The best case amount.
UsageRevenue	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The usage revenue amount on the revenue line

Name	Type	Description
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.
WinProb	decimal	The win-probability percentage.

Opportunity Reference

The past customer who is being used as a reference on the opportunity.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opportunityService/}OpportunityReference

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Opportunity*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
Comments1	string	The comments for the opportunity reference.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CustomerContactRelationId	long	The customer contact relationship identifier.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
EffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The estimated close date for the opportunity.
EmailAddress	string	The email address associated with the record.
IntContactPartyId	long	The Party identifier of the internal contact for the opportunity reference.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Name	string	The sales stage of the opportunity.
Name1	string	The name of the opportunity.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OptyId	long	The unique identifier of the opportunity.
OptyReferenceId	long	The identifier of the opportunity's references. • Primary Key
PartyName	string	The name of the party.
PartyName1	string	The name of the party.
PartyName2	string	The name of the party.

Name	Type	Description
PartyNumber	string	The unique identification number for the party.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUniqueName1	string	This is the derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, this is concatenation of person_name and suffix.
ReferencePartyId	long	The Party identifier with the reference party usage.
ReferenceRankNumber	string	The ranking for this reference.
RevnAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The revenue amount.
RevnAmountCurcyCode	string	The currency on which the revenue line is based.
SalesAccountId	long	The identifier of the opportunity sales account.
SalesAccountUniqueName	string	The name of the sales account.
StatusCode	string	The pre-defined code used to indicate the status.
StgId	long	The sales stage of the opportunity.
TargetPartyId	long	The Party identifier of the opportunity sales account.
TargetPartyName	string	The name of the opportunity sales account.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.
WinProb	decimal	The win probability percent.

Opportunity Response

The response from which the opportunity originates.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opportunityService/}OpportunityResponse

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Opportunity*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row

Name	Type	Description
		is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OptyId	long	The unique identifier of the opportunity.
OptyResponseId	long	The opportunity response identifier. • Primary Key
ResponseNumber	string	The attribute for response number.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Opportunity Revenue

The revenue line associated with the opportunity representing the projected revenue expected from selling a product.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/revenues/revenueService/}Revenue

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Opportunity Recurring Revenue*
Contains	*Opportunity Revenue Territory*
Contains	*Opportunity Split Revenue*
Contained by	*Opportunity*
Contained by	*Revenue Line Set*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActualCloseDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the revenue line was closed.
AdditionalAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	An additional currency enabled field on the revenue object to store any custom numeric value.
AdditionalNumber	decimal	An additional numeric field on the revenue object to store any custom numeric value.
AdditionalText1	string	An additional text field on the revenue object to store any custom text.
AdditionalText2	string	An additional text field on the revenue object to store any custom text.
AmountAggregatedForScheduleFlag	boolean	The aggregated amount based on the set schedule.
AssetId	long	Identifier of the asset of the opportunity.
AttachmentEntityName	string	The entity name used to retrieve attachment associated with the product.
BUOrgId	long	The identifier of the business unit.
ChildSplitRevenue	*Opportunity Split Revenue*	Split revenues
CloseReasonCode	string	The win/loss reason for this revenue item.
CloseReasonCodeSetId	long	The set identifier for the Win/Loss reason of this revenue.
Comments	string	The comments for the record.
CommitFlag	boolean	Indicates if this revenue line should be used for forecasting.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.

Name	Type	Description
ContractEndDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The end date of the contract for the quote
ContractStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The start date of the contract for the quote
ConversionRate	decimal	The rate used to convert the revenue amount to the opportunity summary currency, if the currency of the revenue line is different from that of the opportunity. This is the amount that one currency can be exchanged for, at a specific point of time.
ConversionRateType	string	The currency conversion rate type that is used to derive the exchange rate for converting the user-entered currency to CRM Corporate currency.
CostAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The cost amount.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRcptPartOrgPartyId	long	The identifier of the partner organization to which the credit recipient belongs.
CrmConversionRate	decimal	This rate is used to convert the revenue amount to the CRM common currency for the Revenue Forecast Metrics, if the currency of the revenue line is different. This is the amount that one currency can be exchanged for, at a specific point of time.
CrmConversionRateType	string	This rate type used to convert the revenue amount to the CRM common currency for Revenue Forecast Metrics, if the currency of the revenue line is different. It is usually spot, user-defined, or corporate.
CrmCurcyCode	string	The CRM common currency code.
CustomerAccountId	long	The identifier of the customer account.
Description	string	The free text description of the record.
Discount	decimal	The percentage of discount.

Name	Type	Description
DownsideAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The worst case amount.
EffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The estimated close date for this revenue; defaulted from opportunity's close date.
ExpectAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The expected revenue amount.
ExpectDlvryDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expected delivery date. This column is used by Opportunity products only.
ExternalAssetKey	string	The asset key from an external system.
ExternalParentAssetKey	string	The root asset key of the parent from an external system.
ExternalRootAssetKey	string	The root asset key obtained from an external system.
ForecastOverrideCode	string	The code for Forecast Override. The values include, ALWAYS, NEVER, or CRITERIA.
InventoryItemId	long	The identifier of the product inventory item.
InventoryOrgId	long	The identifier of the inventory organization.
ItemNumber	string	The item number of the product associated with the revenue.
ItemNumberInternal	string	The item number of the product associated with the revenue.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MarginAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The margin amount.

Name	Type	Description
MonthlyRecurringRevenue	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The monthly recurring revenue on the revenue line
MonthlyUsageRevenue	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The monthly usage revenue on the revenue line
Name	string	The name of the opportunity.
Name1	string	The name of the territory.
NonRecurringRevenue	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Non-Recurring Revenue Amount (Net)
NqSplitAllocTypeCode	string	The non-quota split allocation type code. Values supported are Adhoc amount or Proportional to Revenue.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OptyId	long	The unique identifier of the opportunity.
OptyLeadId	long	The identifier of the lead associated with the opportunity.
OptyNumber	string	The opportunity number. This is a public surrogate key.
OrganizationId	long	The inventory organization identifier to which the product belongs.
OwnerDealExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The owner deal expiration date.
OwnerDealProtectedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The owner deal protected date.
OwnerLockAsgnFlag	boolean	Indicates whether the revenue owner assignment should be locked.
OwnerOrgTreeCode	string	The owner organization tree code.
OwnerOrgTreeStructCode	string	The owner organization tree structure code.

Name	Type	Description
OwnerResourceOrgId	long	The identifier for resource organization of the revenue owner.
ParentRevnId	long	The identifier of the parent revenue line. It is used for Lineset functionality.
PartEngagementTypeCd	string	The type of partner engagement.
PartOrgPartyId	long	The identifier of the partner organization associated to the revenue.
PartOrgPartyName	string	The name of the partner organization associated to the revenue.
PartyName	string	The name of the party.
PartyName1	string	The name of the party.
PartyName2	string	The name of the party.
PartyUniqueName1	string	The unique name for the primary revenue competitor.
PrCmptPartyId	long	Primary competitor party id.
PrPartOrgPartyId	long	The Primary Revenue Partner Organization Party.
PrTerritoryUpdatedById	long	The identifier of the user who last updated the forecast territory.
PrTerritoryUpdatedByPartyName	string	The user who last updated the forecast territory.
PrTerritoryVersionId	long	The primary territory for this revenue item.
PriceTypeCode	string	The type of pricing associated with the revenue line
PrimaryFlag	boolean	Indicates whether the revenue record is a summary revenue.
ProdGroupId	long	The identifier of the product group.
ProdGroupModelConfigAttributes	string	Model Configuration Attributes associated with the Product Group in Revenue Line.

Name	Type	Description
ProdGroupModelFamily	string	The model family associated with the product group.
ProdGroupModelLine	string	The model line associated with the product group.
ProdGroupModelName	string	Model Name associated with the Product Group in Revenue Line.
ProdGroupName	string	The name of the product group associated with the revenue.
ProdGroupQuotableFlag	boolean	Indicates if a product group is quotable.
ProductConfigurableFlag	boolean	Indicates that a product allows configuration.
ProductModelConfigAttributes	string	Model Configuration Attributes associated with the Product in Revenue Line.
ProductModelFamily	string	The model family associated with the product.
ProductModelLine	string	The model line associated with the product.
ProductModelName	string	Model Name associated with the Product in Revenue Line.
ProductType	string	The type of product on the revenue line (item or product group).
Quantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The product quantity.
RecurAdditionalAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The additional amount value for the recurrence.
RecurAdditionalNumber	decimal	The additional number value for the recurrence.
RecurDownsideAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The downside amount for the recurrence.
RecurEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The recurrence end date.
RecurExpectAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The expected revenue amount for the recurrence.

Name	Type	Description
RecurFrequencyCode	string	The frequency for the recurrence.
RecurNumberPeriods	int	The number of periods for creating the recurrence.
RecurParentRevnId	long	Indicates the parent revenue identifier for the recurrence.
RecurPeriodOrEndDateCode	string	Indicates if a date is specified or a number of periods is specified to end the recurrence.
RecurQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The recurrence quantity.
RecurRevenue	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The recurring revenue amount on the revenue line
RecurRevnAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The revenue amount for the recurrence.
RecurStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The recurrence start date.
RecurTypeCode	string	The recurring type code.
RecurUnitPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The unit price for the recurrence.
RecurUpsideAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The upside amount for the recurrence.
RecurringRevenue	*Opportunity Recurring Revenue*	The recurring revenue child occurrences.
ResourcePartyId	long	The identifier for revenue owner.
RevenueTerritory	*Opportunity Revenue Territory*	The territories assigned to the revenue.
RevenueTypeCategory	string	The Revenue category type on the opportunity revenue line.
RevnAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The revenue amount.
RevnAmountCurcyCode	string	The currency on which the revenue line is based.

Name	Type	Description
RevnCategoryCode	string	Revenue category used in Revenue Line Set functionality.
RevnCreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The functional creation date for the revenue item.
RevnId	long	The revenue identifier. • Primary Key
RevnLineTypeCode	string	The type of revenue line like Opportunity Summary Revenue, Standard Revenue and so on.
RevnNumber	string	User editable revenue number. Defaulted from REVN_ID. Needs to be unique, cannot be NULL.
RevnSequenceNumber	int	The Revenue Sequence Number.
SalesAccountId	long	The identifier of the opportunity sales account.
SalesAccountUniqueName	string	The name of the sales account.
SalesChannelCd	string	The sales channel code.
SalesCreditTypeCode	string	Quota or Non-quota sales credit type.
ScheduleAction	string	Transient attribute. Web services need to pass a value to indicate the action to be taken on Recurring Schedule - create, delete, extend, replace.
ScheduleNonRecurringAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The nonrecurring amount based on the set schedule.
ScheduleRecurringAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The recurring amount based on the set schedule.
ScheduleUsageAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The usage amount based on the set schedule.
SplitParentRevnId	long	The identifier of the split parent revenue.
SplitPercent	decimal	The split percentage.

Name	Type	Description
SplitRevenue	*Opportunity Split Revenue*	The split revenues.
SplitRevenueNonQuota	*Opportunity Split Revenue*	The non-revenue credits associated with the revenue record.
SplitRevenueNonQuotaOtherSplits	*Opportunity Split Revenue*	The non-revenue sales credits, excluding the record with the maximum percentage.
SplitRevenueOtherSplits	*Opportunity Split Revenue*	The revenue sales credits, excluding the record with the maximum percentage.
SplitTypeCode	string	Indicates whether the split is revenue or non-revenue.
StatusCode	string	The pre-defined code used to indicate the status.
StatusCodeSetId	long	The set id for the status of this revenue.
SubscriptionId	long	The unique identifier of the subscription.
SubscriptionLineId	long	The unique identifier of the subscription line within a subscription.
TargetPartyId	long	The Party identifier of the opportunity sales account.
TypeCode	string	Indicates the revenue type for this revenue.
TypeCodeSetId	long	The Set identifier for the revenue type of this opportunity.
UOMCode	string	The unit of measure code for product.
UnitPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The unit price for product.
UpsideAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The best case amount.
UsageRevenue	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The usage revenue amount on the revenue line
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Name	Type	Description
ViewCriterialdentifier	string	Indicates when a View Criteria is seeded rather than a custom one.
WinProb	decimal	The win probability percent.

Opportunity Revenue Territory

The territories assigned to an opportunity revenue line.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/revenues/revenueService/}RevenueTerritory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Opportunity*
Contained by	*Opportunity Revenue*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AssignmentType	string	Identifies how the territory resource was assigned.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective. • Primary Key
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective. • Primary Key
ForecastParticipationCode	string	The type of forecast this territory participates in (Revenue, Nonrevenue, Revenue and Nonrevenue, or Nonforecasting).
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Name	string	The name of the territory.
Name1	string	The resource organization of the territory resource.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
RevnId	long	Revenue identifier.
RevnTerrId	long	Revenue territory identifier. • Primary Key
RoleId	long	Resource role identifier of the territory resource.
RoleName	string	Resource role of the territory resource.
TerritoryId	long	The Territory identifier.

Name	Type	Description
TerritoryVersionId	long	The Territory version identifier.
TypeCode	string	Identifies the type of the assigned territory.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Opportunity Source

The marketing source from which the opportunity originates.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opportunityService/}OpportunitySource

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Opportunity*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OptyId	long	The unique identifier of the opportunity.
OptySrcId	long	The opportunity source identifier. • Primary Key
SrcNumber	string	The source of the marketing event. For example: a campaign, new product line, a marketing seminar, and so on. This is a required attribute.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Opportunity Split Revenue

The revenue or nonrevenue credit allocated to the resource who has contributed to the selling effort for an opportunity revenue line.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/revenues/revenueService/}SplitRevenue

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Opportunity*
Contained by	*Opportunity Recurring Revenue*
Contained by	*Opportunity Revenue*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AssignmentType	string	Indicates how the territory was added to the revenue line; manually selected or automatically assigned.
BUOrgId	long	The identifier of the business unit.
CloseReasonCode	string	The win/loss reason the revenue line.
CloseReasonCodeSetId	long	The set identifier for the Win/Loss reason of this revenue.
Comments	string	The comments for the record.
CommitFlag	boolean	Indicates if this revenue line should be used for forecasting.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
ConversionRate	decimal	The rate used to convert the revenue amount to the opportunity summary currency, if the currency of the revenue line is different from that of the opportunity. This is the amount that one currency can be exchanged for, at a specific point of time.
ConversionRateType	string	The currency conversion rate type that is used to derive the exchange rate for converting the user-entered currency to CRM Corporate currency.

Name	Type	Description
CostAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The cost amount. Not currently used in Fusion.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRcptPartOrgPartyId	long	The identifier of the partner organization to which the credit recipient belongs.
CreditRcptPartOrgPartyName	string	The name of the partner organization to which the credit recipient belongs.
CustomerAccountId	long	The identifier of the customer account.
DownsideAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The worst case amount.
EffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The estimated close date for this revenue line; defaulted from opportunity's close date.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
ExpectAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The expected revenue amount.
ExpectDlvryDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expected delivery date for the product. Not currently used in Fusion.
ForecastOverrideCode	string	Determines if the revenue line should always be forecasted, never be forecasted, or forecasted only when the forecast criteria is met.
InventoryItemId	long	The identifier of the product inventory.
InventoryOrgId	long	The identifier of the inventory organization.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MarginAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The margin amount. Not currently used in Fusion.
Name	string	The name of the resource organization of the credit recipient.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
OptyId	long	The unique identifier of the opportunity.
OwnerDealExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The deal expiration date of the credit recipient.
OwnerDealProtectedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The deal protected date of the credit recipient.
OwnerLockAsgnFlag	boolean	Indicates if the credit recipients of the revenue line should be locked from re-assignment by the system.
OwnerOrgTreeCode	string	The resource organization tree code for the credit recipient.
OwnerOrgTreeStructCode	string	The resource organization tree structure code for the credit recipient.
OwnerResourceOrgId	long	The resource organization identifier of the credit recipient.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.

Name	Type	Description
PrCmptPartyId	long	Primary competitor identifier.
PrTerritoryUpdatedById	long	The user who last updated the forecast territory.
PrTerritoryUpdatedByPartyName	string	The name of the user who last updated the forecast territory.
PrTerritoryVersionId	long	The Forecast territory version identifier.
PrimaryFlag	boolean	Indicates whether the revenue record is a summary revenue line.
ProdGroupId	long	The identifier of the product group.
Quantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The product quantity.
RecurEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	End date of the recurrence.
RecurFrequencyCode	string	The frequency for the recurrence.
RecurNumberPeriods	int	The number of periods for the recurrence.
RecurParentRevnId	long	Indicates the parent revenue identifier for the recurrence.
RecurQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The recurring quantity. This is the quantity for each recurrence.
RecurRevnAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The recurring revenue amount. This is the revenue amount for each recurrence.
RecurStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date of the recurrence.
RecurTypeCode	string	Indicates the type of revenue line, whether it is a parent recurring line, a child recurring line, or a non-recurring line.
ResourcePartyId	long	The resource identifier of the credit recipient.
RevnAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The revenue amount.

Name	Type	Description
RevnAmountCurcyCode	string	The currency on which the revenue line is based.
RevnId	long	The unique identifier of the revenue. • Primary Key
RevnNumber	string	Unique number for the revenue line. Initially defaulted from the revenue identifier.
SalesAccountId	long	The identifier of the opportunity sales account.
SalesCreditTypeCode	string	Indicates the type of sales credit - revenue or nonrevenue.
SplitParentRevnId	long	The identifier of the customer account.
SplitPercent	decimal	The split percentage.
SplitTypeCode	string	The sales credit type of this credit split - Revenue or Nonrevenue.
StatusCode	string	The pre-defined code used to indicate the status.
StatusCodeSetId	long	The set identifier for the status of this revenue.
TargetPartyId	long	The Party identifier of the opportunity sales account.
TypeCode	string	Indicates the revenue type for this revenue line.
TypeCodeSetId	long	The Set identifier for the revenue type of this opportunity.
UOMCode	string	The unit of measure code for the product.
UnitPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The unit price for the product.
UpsideAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The best case amount.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Name	Type	Description
WinProb	decimal	The win probability percent.

Opportunity Subscription

Opportunity Subscription aggregates all revenue subscriptions to opportunity level.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opportunityService/}OpportunitySubscription

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Opportunity*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CorpCurrencyCode	string	Corporate currency code for extensibility.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
CurcyConvRateType	string	Currency conversion rate type for extensibility.
Currency	string	The currency associated with the subscription.

Name	Type	Description
CurrencyCode	string	Currency code for the extensibility.
DeleteFlag	boolean	This flag controls if the user has access to delete the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date of the subscription.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
NetPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total contract value of the subscription.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
OptyId	long	Parent Opportunity
OptySubscriptionId	long	Primary Key, the unique internal identifier of the row. • Primary Key
OptySubscriptionNumber	string	The unique number to associate a subscription with an opportunity.
PrimaryFlag	boolean	Indicates if a subscription is the Primary Subscription associated with the opportunity.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date of the subscription.
Status	string	The current status of the subscription.
SubscriptionId	long	A subscription associated with opportunity.

Name	Type	Description
SubscriptionId1	long	Displays the unique identifier of a subscription.
SubscriptionNumber	string	The number assigned to the line within a subscription by the system or the customer.
SubscriptionPeriod	string	The duration of the subscription.
UpdateFlag	boolean	This flag controls if the user has access to update the record.

Opportunity Team Member

The employee of the deploying organization who is assisting with the sales opportunity.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opportunityService/}OpportunityResource

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Opportunity*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	Access level determines the type of access granted to the opportunity team member, manager, and administrator of the organizations in the hierarchy.

Name	Type	Description
AsgnTerritoryVersionId	long	Version identifier of the territory for the resource that got assigned to the opportunity through territory-based assignment.
AssignmentType	string	Indicates how the resource was added to opportunity team. Ad-Hoc indicates that the resource was either added manually or through rule-based assignment. Territory indicates that the resource was added using territory-based assignment.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DealExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date of the deal protection period of an opportunity team member. The date is set for members of territories that are removed from the opportunity because of territory re-alignment.
DealProtected	string	Indicates whether the resource is under deal protection.
DealProtectedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date of the deal protection period of an opportunity team member. The date is set for the members of territories that are removed from opportunity because of territory re-alignment.
EmailAddress	string	The email address associated with the record.
FormattedPhoneNumber	string	The formatted phone number.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
LockAssignmentFlag	boolean	Flag to prevent an opportunity team member from being removed from the team by automatic assignment.
MemberFunctionCode	string	The role of the team member on the opportunity, such as Integrator, Executive Sponsor, Technical Account Manager, and so on.
MgrResourceId	long	The resource identifier of the opportunity team member's manager.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OptyId	long	The unique identifier of the opportunity.
OptyResourceId	long	The identifier of the opportunity team member. • Primary Key
OptyResourceNumber	string	Displays the association between an opportunity and a resource (typically an opportunity sales team member).
OrgTreeCode	string	The tree which depicts the organization hierarchy. Managers/Admins of parent resource organizations of the opportunity team member gain access through this hierarchy.
OrgTreeStructureCode	string	The tree structure of the organization hierarchy. Managers/Admins of parent resource organizations of the opportunity team member gain access through this hierarchy.
OrganizationId	long	The resource organization identifier of the opportunity team member.
OrganizationName	string	The name of the party when the party type is Organization.
OwnerFlag	boolean	Indicates if the opportunity team member is also the owner of the opportunity.
PartnerOrgId	long	The party identifier of the partner organization that the partner resource belongs to.

Name	Type	Description
PartnerPartyName	string	The name of the partner organization that the partner resource belongs to.
PartyName	string	The name of the party.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
ResourceId	long	The unique identifier of the resource.
ResourceOrgId	long	The resource organization identifier of the opportunity team member.
ResourcePartyNumber	string	The resource party number of the opportunity team member.
RoleName	string	Role of the opportunity team member in the resource organization.
TerritoryName	string	The name of the territory of the opportunity team member.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Revenue Line Set

The collection of revenue lines representing a product offering on an opportunity.

QName: {http://xmlns.oracle.com/oracle/apps/sales/opptyMgmt/revenues/revenueService/}RevenueLineSet

Logical Business Objects

- CRM : Opportunity Management : Sales Revenue

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Opportunity Revenue*
Contained by	*Opportunity*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BUOrgId	long	The business unit identifier.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CustomerAccountId	long	The customer's billing account identifier.
CustomerPartyId	long	The party identifier of the sales account.
EffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The estimated close date for the revenue line set.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OptyId	long	The unique identifier of the opportunity.
OwnerOrgTreeCode	string	The resource organization tree code for the revenue line set owner.
OwnerOrgTreeStructCode	string	The resource organization tree structure code for the revenue line set owner.
OwnerResourceId	long	The resource party identifier of the revenue line set owner.
OwnerResourceOrgId	long	The resource organization identifier of the revenue line set owner.
ProdGroupId	long	The product group identifier.
ProdGroupName	string	The name of the product group associated with the revenue.
Revenue	*Opportunity Revenue*	The revenue line set members associated with the revenue line set.
RevnAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The attribute for revenue amount.
RevnAmountCurcyCode	string	The currency that the amount on this revenue line is based on.
RevnId	long	The revenue line set identifier. • Primary Key
RevnLineTypeCode	string	This denotes the type of revenue line such as Summary Revenue or Standard Revenue.
RevnSequenceNumber	int	The attribute for revenue sequence number.
SalesAccountId	long	The identifier of the opportunity sales account.
StatusCode	string	The pre-defined code used to indicate the status.

Name	Type	Description
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Partner Program Enrollment Service

Service to operate on program enrollments. The supported operations are create, get, submit, renew, and terminate. Partner enrollment into a program and the enrollment lifecycle is supported via the operations provided in this service.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerProgram/enrollment/partnerProgramEnrollmentService/}PartnerProgramEnrollmentService

Service WSDL URL: https://servername/crmService/PartnerProgramEnrollmentService?WSDL

Logical Business Objects

- CRM : Partner Management : Partner Program Enrollment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Original System Mapping Identifier Additional Information*
Handles	*Program Enrollment Participants*
Handles	*Partner Dimension Member*
Handles	*Trading Community Address Purpose*
Handles	*Partner Focus Area*
Handles	*Partner Phone*
Handles	*Partner Members*
Handles	*Partner Certification*

Relationship Type	Object or Service
Handles	*Partner Programs*
Handles	*Trading Community Contact Point Additional Information*
Handles	*Telex*
Handles	*Partner Public Contact*
Handles	*Web*
Handles	*Program Enrollments*
Handles	*Partner Generic List of Values*
Handles	*Electronic File Transfer*
Handles	*Trading Community Address Additional Information*
Handles	*Source System Reference*
Handles	*Email*
Handles	*Note Descriptive Flexfields*
Handles	*Partner*
Handles	*Note*
Handles	*Contact Preference*
Handles	*Industry Served*
Handles	*Partner Program Language Translation*
Handles	*Partner Account Resource*
Handles	*Instant Messaging*
Handles	*Classification Assignment*
Handles	*Phone*

Relationship Type	Object or Service
Handles	*Partner Email*
Handles	*Address*
Handles	*Partner Geography Served*
Handles	*Partner Type*
Handles	*Expertise*

Operations

- *expireProgramEnrollment*
- *renewProgramEnrollment*
- *submitProgramEnrollment*
- *terminateProgramEnrollment*
- *deleteParticipants*
- *getProgramEnrollment*
- *createProgramEnrollment*
- *updateProgramEnrollment*
- *mergeProgramEnrollment*
- *findProgramEnrollment*
- *deleteNote*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

expireProgramEnrollment

A web service method that supports expiring a program enrollment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
enrollmentId	long	The system generated unique identifier for enrollment of the method expireProgramEnrollment.

Response Payload

Element Name	Type	Description
result	void	The parameter is not used for the method expireProgramEnrollment.

renewProgramEnrollment

A web service method which renews an existing program enrollment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
enrollmentIdForRenew	long	The system generated unique identifier for an existing enrollment.

Response Payload

Element Name	Type	Description
result	long	The parameter is not used for the method renewProgramEnrollment.

submitProgramEnrollment

A web service method which submits an enrollment request for a program.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
enrollmentId	long	The system generated unique identifier for enrollment.
acceptance	string	The parameter gives the acceptance status which are ONLINE, OFFLINE or ONANDOFF.

Response Payload

Element Name	Type	Description
result	void	The parameter is not used for the method submitProgramEnrollment.

terminateProgramEnrollment

A web service method which requests a termination of an enrollment in a given program.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
enrollmentId	long	The system generated unique identifier for enrollment.

Response Payload

Element Name	Type	Description
result	void	The parameter is not used for the method terminateProgramEnrollment.

deleteParticipants

A web service method which deletes participants of an enrollment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
participants	*Program Enrollment Participants*	The participant object for the method deleteParticipants.

Response Payload

Element Name	Type	Description
result	void	The parameter is not used for the method deleteParticipants.

getProgramEnrollment

A web service method which gets details of a program enrollment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
programEnrollmentId	long	The system generated unique identifier for enrollment.

Response Payload

Element Name	Type	Description
result	*Program Enrollments*	The parameter returns a partner program enrollment matching the criteria.

createProgramEnrollment

A web service method which creates program enrollment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
programEnrollment	*Program Enrollments*	The Program Enrollment SDO which needs to be created.

Response Payload

Element Name	Type	Description
result	*Program Enrollments*	The parameter returns the created enrollment for the method createProgramEnrollment.

updateProgramEnrollment

Updates program enrollment which may be in draft or submitted status.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
programEnrollment	*Program Enrollments*	The Program Enrollment SDO which needs to be updated.

Response Payload

Element Name	Type	Description
result	*Program Enrollments*	The parameter returns the updated enrollment for the method updateProgramEnrollment.

mergeProgramEnrollment

A web service method which merges one or more program enrollments.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
programEnrollment	*Program Enrollments*	The program enrollment SDO which needs to be merged.

Response Payload

Element Name	Type	Description
result	*Program Enrollments*	The parameter returns the merged enrollment for the method mergeProgramEnrollment.

findProgramEnrollment

Searches for partner program enrollment based on various attributes of partner program or enrollment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The list of attributes that can be used for searching.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The filtering condition to separate out the set of records.

Response Payload

Element Name	Type	Description
result	*Program Enrollments*	The parameter returns the partner program enrollments matching the criteria.

deleteNote

A web service method to delete a note associated to a program enrollment.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
note	*Note*	The note object which needs to be deleted for the method deleteNote.

Response Payload

Element Name	Type	Description
result	void	The parameter is not used for the method deleteNote.

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create,

Element Name	Type	Description
		update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
terminateProgramEnrollment	ZPM_MANAGE_PARTNER_PROGRAM_ENROLLMENT_PRIV	Manage Partner Program Enrollment	Allows management of partner program enrollment in the partner work area.
mergeProgramEnrollment	ZPM_APPLY_PARTNER_PROGRAM_PRIV	Apply Partner Program	Allows enrolling into a partner program.
findProgramEnrollment	ZPM_APPLY_PARTNER_PROGRAM_PRIV	Apply Partner Program	Allows enrolling into a partner program.
getEntityList	ZPM_APPLY_PARTNER_PROGRAM_PRIV	Apply Partner Program	Allows enrolling into a partner program.
getEntityList	ZPM_MANAGE_PARTNER_PROGRAM_ENROLLMENT_PRIV	Manage Partner Program Enrollment	Allows management of partner program enrollment in the partner work area.
deleteParticipants	ZPM_APPLY_PARTNER_PROGRAM_PRIV	Apply Partner Program	Allows enrolling into a partner program.
deleteNote	ZPM_APPLY_PARTNER_PROGRAM_PRIV	Apply Partner Program	Allows enrolling into a partner program.
deleteNote	ZPM_MANAGE_PARTNER_PROGRAM_ENROLLMENT_PRIV	Manage Partner Program Enrollment	Allows management of partner program enrollment in the partner work area.
createProgramEnrollment	ZPM_APPLY_PARTNER_PROGRAM_PRIV	Apply Partner Program	Allows enrolling into a partner program.
renewProgramEnrollment	ZPM_APPLY_PARTNER_PROGRAM_PRIV	Apply Partner Program	Allows enrolling into a partner program.
getProgramEnrollment	ZPM_APPLY_PARTNER_PROGRAM_PRIV	Apply Partner Program	Allows enrolling into a partner program.

Operation Name	Privilege Code	Privilege Name	Privilege Description
updateProgramEnrollment	ZPM_APPLY_PARTNER_PROGRAM_PRIV	Apply Partner Program	Allows enrolling into a partner program.
getDfltObjAttrHints	ZPM_APPLY_PARTNER_PROGRAM_PRIV	Apply Partner Program	Allows enrolling into a partner program.
getDfltObjAttrHints	ZPM_MANAGE_PARTNER_PROGRAM_ENROLLMENT_PRIV	Manage Partner Program Enrollment	Allows management of partner program enrollment in the partner work area.
submitProgramEnrollment	ZPM_APPLY_PARTNER_PROGRAM_PRIV	Apply Partner Program	Allows enrolling into a partner program.
getServiceLastUpdateTime	ZPM_APPLY_PARTNER_PROGRAM_PRIV	Apply Partner Program	Allows enrolling into a partner program.
getServiceLastUpdateTime	ZPM_MANAGE_PARTNER_PROGRAM_ENROLLMENT_PRIV	Manage Partner Program Enrollment	Allows management of partner program enrollment in the partner work area.
expireProgramEnrollment	ZPM_MANAGE_PARTNER_PROGRAM_ENROLLMENT_PRIV	Manage Partner Program Enrollment	Allows management of partner program enrollment in the partner work area.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZPM_MANAGE_PARTNER_PROGRAM_ENROLLMENT_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZPM_MANAGE_PARTNER_PROGRAM_ENROLLMENT_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZPM_MANAGE_PARTNER_PROGRAM_ENROLLMENT_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			rejecting registrations, and forecasting sales.
ZPM_MANAGE_PARTNER_PROGRAM_ENROLLMENT_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZPM_MANAGE_PARTNER_PROGRAM_ENROLLMENT_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZPM_APPLY_PARTNER_PROGRAM_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZPM_APPLY_PARTNER_PROGRAM_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZPM_APPLY_PARTNER_PROGRAM_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZPM_APPLY_PARTNER_PROGRAM_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZPM_APPLY_PARTNER_PROGRAM_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZPM_APPLY_PARTNER_PROGRAM_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Address

An address of a trading community member, such as Oracle Corporation is located at 500 Oracle Parkway, Redwood Shores, CA.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Telex*

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contains	*Trading Community Address Additional Information*
Contains	*Email*
Contains	*Electronic File Transfer*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AddressExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the location is no longer valid.
AddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines that are used in Japan.
AddressStyle	string	Style of the address.
Addressee	string	The information of the addressee.
City	string	The name of the city.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
ContactPreferenceExistFlag	boolean	Indicator to specify if the contact is primary contact for the party.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	The name of the country.

Name	Type	Description
Country1	string	The attribute country1 is not used.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
DoNotValidateFlag	boolean	Indicator to specify that a particular location is not eligible for address validation irrespective of the current validation.
Eft	*Electronic File Transfer*	The electronic file transfer information for the party.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedAddress	string	The formatted read-only address.
FormattedLocaleAddress	string	The formatted read-only local address.
FormattedMultilineAddress	string	The formatted multi line address of the party site.

Name	Type	Description
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
HouseType	string	Indicates the building type.
IdentifyingAddressFlag	boolean	Indicator to specify the identifying address for the party. Y stands for the indentifying site and N stands for sites that are not the indentifying site.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
Language	string	The operating language for the party site.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	The latitude of the party address.
LocationDirections	string	Directions to the location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
LocationLanguage	string	The operating language for the locations.
Longitude	decimal	The longitude of the party address.
Mailstop	string	A user-defined code to indicate a mail drop point within the organization.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction

Name	Type	Description
		to detect whether another session has updated the row since it was last queried.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary address of the contact irrespective of the context. Y stands for primary address and N stands for all others.
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	Stores the doing-business_as (DBA) party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameDivision	string	Stores the division party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameLegal	string	Stores the legal party name for a party site. This column is used to store FSIO related legal party name attribute.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteInformation	*Trading Community Address Additional Information*	The party address information.
PartySiteName	string	The user-defined name for the site.
PartySiteNumber	string	The party site number of the address.
PartySiteType	string	Stores the party site type and is based on the lookup. Currently this is either null or one-time.
PartySiteUse	*Trading Community Address Purpose*	The information of the party address usage.
PartyUsageCode	string	The usage context of a party's contact point.

Name	Type	Description
Phone	*Phone*	The phone information for the entity.
Position	string	The primary direction such as north or east that is used to access the location.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four digit extension to the United States postal ZIP code.
Province	string	The name of the province.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The Telex information associated with the party.
UsageCode	string	The usage code is not used.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	The standardized status code describing the results of the validation.
Web	*Web*	The web information related to the record.

Classification Assignment

The classification code assigned to a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CodeAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Sales Competitor*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Reference*
Handled by	*Sales Reference Customer*
Handled by	*Company and User Registration*
Handled by	*Sales Party*
Handled by	*Sales Competitor Service*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party Territory service*
Handled by	*Sales Party Resource Service*
Handled by	*Partner Service*

Relationship Type	Object or Service
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassCategory	string	The name of the classification category.
ClassCode	string	The code of the classification.
CodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an object. It is primary key and system generated. • Primary Key
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableKey1	string	The first column of the alphanumeric or multi-part foreign key.
OwnerTableKey2	string	The second column of the alphanumeric or multi-part foreign key.
OwnerTableKey3	string	The third column of the alphanumeric or multi-part foreign key.
OwnerTableKey4	string	The fourth column of the alphanumeric or multi-part foreign key.
OwnerTableKey5	string	The fifth column of the alphanumeric or multi-part foreign key.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PrimaryFlag	boolean	Indicator that specifies if this is the primary class code of a class category for the organization. Y stands for the primary class code and N stands for all others.
Rank	decimal	Ranks classes if multiple classes are assigned to a party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Contact Preference

The contact preference of the trading community member. For example, do not call Joe Smith between 10 a.m. and 12 noon on weekdays.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}ContactPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Electronic Data Interchange*
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Household*
Contained by	*Phone*
Contained by	*Telex*
Contained by	*Web*
Contained by	*Contact Address*
Contained by	*Electronic File Transfer*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactLevelTable	string	The table that stores the contact level of the contact preference, and uses the SUBJECT_TABLE lookup. The list of accepted values are HZ_PARTIES, HZ_PARTIES_SITES, or HZ_CONTACT_POINTS.
ContactLevelTableId	long	The foreign key to the table specified in CONTACT_LEVEL_TABLE column. The list of accepted values are PARTY_ID from HZ_PARTIES table, CONTACT_POINT_ID from HZ_CONTACT_POINTS table, or PARTY_SITE_ID from HZ_PARTY_SITES table.
ContactPreferenceId	long	The unique identifier for the contact preference. • Primary Key
ContactType	string	The contact party type that defines whether the contact is a sales account, a prospect, a contact, or any other user-defined party type. The default value is CUSTOMER. A list of accepted values is defined in the lookup CONTACT_TYPE.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaximumNoOfInteractUOMCode	string	The period of time during which the maximum number of interactions applies. Uses the MAX_NO_OF_INTERACT_UOM_CODE lookup.
MaximumNoOfInteractions	decimal	The number of times you can use this contact point. The period of time that this number applies is stored in the MAX_NO_OF_INTERACT_UOM_CODE column.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PreferenceCode	string	Indicates whether to use a particular contact method. The list of accepted values are defined in the PREFERENCE_CODE lookup.
PreferenceEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes inactive.
PreferenceEndTimeHR	int	The hour part of time when the contact preference becomes inactive. The time is recorded in the 24 hour format.
PreferenceEndTimeMi	int	The minutes part of the time when the contact preference becomes inactive.
PreferenceStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes active.
PreferenceStartTimeHR	int	The hour part of time when the contact preference becomes active. The time is recorded in the 24 hour format.

Name	Type	Description
PreferenceStartTimeMi	int	The minutes part of the time when the contact preference becomes active.
PreferenceTopicType	string	The appropriate subjects to send the party that the preference is created for. The list of accepted values are defined in the PREFERENCE_TOPIC_TYPE lookup.
PreferenceTopicTypeCode	string	The code of the preference topic type.
PreferenceTopicTypeId	long	The unique identifier of the preference topic type.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
RequestedBy	string	Indicates if the permission or restriction was created internally or requested by the party. The list of accepted values are defined in the REQUESTED_BY lookup.
Status	string	The status of the record.

Electronic File Transfer

The electronic funds transfer information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Eft

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*

Relationship Type	Object or Service
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.

Name	Type	Description
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EFTPrintingProgramId	long	The printing program identifier.
EFTSWIFTCode	string	The EFT swift code information.
EFTTransmissionProgramId	long	The transmission program identifier.
EFTUserNumber	string	The number that identifies you as a user of electronic funds transfer service for your bank or clearing organization.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

E-Mail

The e-mail address associated with a trading community member. For example, john.doe@oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Email

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The preferred format for e-mail addressed to this address such as HTML or ASCII. A list of accepted values is defined using the lookup EMAIL_FORMAT.
EmailInformation	*Trading Community Contact Point Additional Information*	The additional information about the e-mail.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row

Name	Type	Description
		is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary e-mail of the associated object. If the value is True, then this is the primary e-mail. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.

Name	Type	Description
Status	string	The status of the record.

Expertise

The expertise of a partner.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerExpertise

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Partner Generic List of Values*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ExpertiseCode	string	The expertise code of the partner expertise.
ExpertiseName	string	The expertise name of the partner expertise.

Partner Generic List of Values

The generic list of multiple values used for certifications and expertise.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerProfileMultivalueLov

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Partner Certification*
Extended by	*Expertise*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
LookupCode	string	The value from a multi-value list of values category that applies to the profile.

Name	Type	Description
LookupType	string	The list of values code that defines the category to which the list of values belong. This value indicates the profile field to which the value belongs.
PartnerMultivalLovId	long	The unique identifier of the list of values code selected for a specific multi-value field in the partner profile. • Primary Key
PartyId	long	The unique identifier of the contact party.

Industries Served

The industries in which a partner operates.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerIndustryServed

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Partner Dimension Member*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassificationCategory	string	The classification category of the industry served.
ClassificationCode	string	The classification code of the industry served.
ClassificationName	string	The classification name of the industry served.

Partner Dimension Member

A generic list of multiple values used for territory dimensions.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Industries Served*
Extended by	*Focus Areas*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK1 column.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	A specific type of item within the dimension code. For example, for the products dimension, product items and product categories are there.
DimensionCode	string	The dimension of the item being stored. For example, geography.
DimensionMemberName	string	The name of the dimension member.
DimensionMemberNameBackup	string	The name of the dimension member to which this record refers to. This is stored in case the dimension member was removed and the user still requires the name of the item that was removed.
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerId	long	The unique identifier of the entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.

Name	Type	Description
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of the table. • Primary Key
TerrDimMemberId	long	The key data for the territory dimension.
TerrDimPartitionId	long	The primary key.
TypeCode	string	The type of the partition.

Instant Messaging

The instant messaging information of a trading community member, such as the AOL identifier or Yahoo Messenger information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}InstantMessaging

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*

Relationship Type	Object or Service
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessagingAddress	string	The instant messaging information address.
InstantMessagingInformation	*Trading Community Contact Point Additional Information*	The instant messaging information related to the record.
InstantMessengerType	string	The type of the instant messenger type.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary instant messaging Id of the associated object. If the value is True, then this is the primary instant messaging Id. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.

Name	Type	Description
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Note

The object that captures comments, information, or instructions for an Oracle Fusion Applications business object.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/noteService}Note

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note Descriptive Flexfields*

Relationship Type	Object or Service
Contained by	*Objective*
Contained by	*Opportunity*
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Contained by	*Activity*
Contained by	*Sales Competitor*
Contained by	*Sales Lead*
Contained by	*Business Plan*
Contained by	*Program Enrollments*
Contained by	*Reference*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*

Relationship Type	Object or Service
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreatorPartyId	long	This is the party identifier for the note creator.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteFlag	boolean	Indicates whether the user has access to delete the note.
Dff	*Note Descriptive Flexfields*	The descriptive flex field segment.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record

Name	Type	Description
NoteAttributeCategory	string	The contextual flex field for development usage.
NoteAttributeUid1	string	The flex field for development usage.
NoteAttributeUid2	string	The flex field for development usage.
NoteAttributeUid3	string	The flex field for development usage.
NoteAttributeUid4	string	The flex field for development usage.
NoteAttributeUid5	string	The flex field for development usage.
NoteId	long	The unique identifier of the note. • Primary Key
NoteNumber	string	The alternate unique identifier of the note. A user key that is system generated or from an external system.
NoteTitle	string	The title of the note entered by the user.
NoteTxt	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	This is the column that stores the actual note text.
NoteTypeCode	string	This is the note type code for categorization of note.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
SourceObjectCode	string	This is the source_object_code for the source object as defined in OBJECTS Metadata.
SourceObjectId	string	This is the source_object_Uid for the source object such as Activities, Opportunities, and so on defined in OBJECTS metadata.
UpdateFlag	boolean	Indicates whether the user can update the note.
VisibilityCode	string	This is the attribute to specify the visibility level of the note.

Note Descriptive Flexfields

The descriptive flex field that captures additional information for notes, such as a priority or status.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/flex/noteDff/}NoteDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Note*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
NoteId	long	The unique identifier of the note. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Partner

The set of partner profile attributes used to provide values while creating or changing a partner account.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}Partner

Logical Business Objects

- CRM : Partner Management : Partner

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Partner E-Mail*
Contains	*Partner Geography Served*
Contains	*Address*
Contains	*Partner Members*
Contains	*Web*
Contains	*Partner Dimension Member*
Contains	*Classification Assignment*
Contains	*Partner Public Contact*

Relationship Type	Object or Service
Contains	*Partner Account Resource*
Contains	*Partner Generic List of Values*
Contains	*Expertise*
Contains	*Industry Served*
Contains	*Partner Certification*
Contains	*Phone*
Contains	*Focus Areas*
Contains	*Partner Phone*
Contains	*Partner Type*
Contains	*Email*
Contained by	*Deal Registration*
Contained by	*Program Enrollments*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountDirectorId	long	The unique identifier of a valid employee resource who owns and manages the partner sales account.

Name	Type	Description
Address1	string	The first line of the address.
AnalysisFy	string	The fiscal year that the financial information is based on.
AnnualRevenue	decimal	The partner's annual revenue. This field is maintained by the channel manager and partner administrator.
Auxiliary1ClassCode	string	The auxiliary Class Code 1 for a classification.
Auxiliary1CodeAssignmentId	long	The unique identifier of the assignment of the auxiliary Class Code 1.
Auxiliary1EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 1 is no longer active.
Auxiliary1StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 1 becomes effective.
Auxiliary2ClassCode	string	The auxiliary Class Code 2 for a classification.
Auxiliary2CodeAssignmentId	long	The unique identifier of the assignment of the auxiliary Class Code 2.
Auxiliary2EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 2 is no longer active.
Auxiliary2StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 2 becomes effective.
Auxiliary3ClassCode	string	The auxiliary Class Code 3 for a classification.
Auxiliary3CodeAssignmentId	long	The unique identifier of the assignment of the auxiliary Class Code 3.
Auxiliary3EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 3 is no longer active.
Auxiliary3StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 3 becomes effective.
BusinessScope	string	The physical class of business in which a business participates. For example, local, national, or international.

Name	Type	Description
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CeoTitle	string	The formal title of the chief executive officer.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
City	string	The name of the city.
ClassificationTypes	*Classification Assignment*	The classification type of a partner.
CompanyNumber	string	The partner's company number that is an alternate unique identifier of the partner. This value is maintained by the channel manager and partner administrator.
ComplianceReviewedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the compliance review for the partner was last completed.
ComplianceStatus	string	Indicates whether the partner is compliant with vendor's criteria such as certifications, training, and so on. If the value is True, then the partner is compliant.
ControlYr	decimal	The year when current ownership gained control of the organization.
CorpCurrencyCode	string	Corporate currency
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	Currency
CurrentFyPotentialRevenue	decimal	The estimated revenues that can be earned by the organization during its current fiscal year.

Name	Type	Description
DUNSNumber	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DbRating	string	The Dun & Bradstreet credit rating.
Description	string	The free text description of the record.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EligibleForPublicProfile	string	Indicates whether the partner is eligible to publish their public profile. If the value is True, then the partner can publish their public profile.
Email	*E-Mail*	The email address associated with the record.
EmployeesTotal	decimal	The total number of employees.
ExportInd	string	Indicates whether the organization is an exporter. If the value is Y, then the organization is an exporter. The default value is N.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
FormattedAddress	string	The formatted address information.
FormattedPhoneNumber	string	The formatted phone number.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
GeoNameReferenceId	long	The unique name reference identifier.
GeographyId	long	The geography ID for the geography served by the partner.

Name	Type	Description
HomeCountry	string	The home country associated with the party.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
IncorpYear	int	The year that the business was formally incorporated.
IndustryClassCode	string	The Industry classification code. The classification codes are defined for every classification category as specified in IndustryCodeType attribute.
IndustryCodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code.
IndustryCodeEndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the industry class code is no longer valid.
IndustryCodeStartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the industry class code applies to the industry.
IsSelfRegisteredPartner	string	Indicates whether the partner registered through the self-service user interface.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LastTerritoryAssignedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the territory was last assigned.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LegalStatus	string	The legal structure of the organization such as partnership, corporation, and so on.
LineOfBusiness	string	The type of business activities performed at this site.

Name	Type	Description
Location	string	The location information of the partner.
LockTerritoryAssignment	string	Indicates if the automatic territory assignment can be set. If the value is True, then the automatic territory assignment cannot remove the sales account team resource. The default value is False.
MinorityOwnedInd	string	Indicates whether the organization is primarily owned by ethnic or racial minorities. If the value is Y, then the organization is owned by ethnic or racial minorities. The default value is N.
MinorityOwnedType	string	The type of minority-owned firm.
NextFyPotentialRevenue	decimal	The estimated revenues that can be earned by the organization during its next fiscal year.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OpportunitiesWonPriorYear	decimal	Opportunities that the partner sales representatives closed and won in the prior fiscal year.
OpportunitiesWonYTD	decimal	Opportunities that the partner sales representatives closed and won in the current fiscal year-to-date.
OrgTypeClassCode	string	The classification code for the organization type.
OrgTypeCodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an organization type.
OrgTypeCodeEndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the organization type class code is no longer valid.
OrgTypeCodeStartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the class code applies to the organization type.
OrganizationName	string	The name of the party when the party type is Organization.

Name	Type	Description
OrganizationProfileId	long	The unique identifier of the organization profile.
OrganizationSize	string	The size of the organization based on its revenue, number of employees, and so on.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference.
OwnerName	string	The name of a valid employee resource that owns and manages the partner account.
OwnerPersonPartyId	long	The unique identifier of a valid employee resource who owns and manages the partner account.
ParentPartnerPartyId	long	A foreign key reference to the TCA party records that represents the Partner's parent company.
ParentPartnerPartyNumber	string	Candidate for public surrogate key field and serves as a user-entered identifier for the Partner's Parent company.
ParentPk1Value	string	Attribute Deprecated, use Attribute ParentPartnerPartyId instead
PartnerAccountId	long	The unique identifier of the partner account resource team member.
PartnerAccountResourceToAccountP	*Partner Account Team*	The list of account resources for the partner account.
PartnerCertificationP	*Partner Certification*	The list of certifications for partner.
PartnerDimensionMemberPVO	*Partner Dimension Member*	The list of dimension members for the partner.
PartnerEmailPVO	*Partner E-Mail*	The list of e-mails for the partner.
PartnerExpertise	*Expertise*	The list of expertise for the partner.

Name	Type	Description
PartnerFaxPVO	*Partner Phone*	The list of fax for the partner.
PartnerGeography	*Geographies Served*	The list of geographies served by the partner.
PartnerIndustry	*Industries Served*	The list of industries served by the partner.
PartnerLevel	string	The relative tier of the partner.
PartnerMember	*Partner Members*	The list of members for a partner.
PartnerMemberPVO	*Partner Public Contact*	The public contact information of the partner.
PartnerPhonePVO	*Partner Phone*	The list of phones of the partner.
PartnerProductSpeciality	*Focus Areas*	The list of product specialties of the partner.
PartnerProfileMultivalueLovP	*Partner Generic List of Values*	The list of partner profile values for the partner.
PartnerSummary	string	The description of the partner company.
PartnerTypeDimensionMemberP	*Partner Type*	The list of partner type dimensions for the partner.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartySite	*Address*	The party site associated with the partner.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_

Name	Type	Description
		PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PrefferedContactId	long	The unique identifier of the preferred contact person for the partner.
PrefferedContactName	string	The name of the preferred contact person for the partner.
PrimaryPhoneContactPointId	long	The unique identifier of the primary phone contact point.
PrimaryURLContactPointId	long	The unique identifier of the primary URL contact point.
PrincipalName	string	The Name of the highest ranking person in the company.
PrincipalTitle	string	The title of the highest ranking person in the organization.
ProfileObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
Province	string	The name of the province.
PublicAddressId	long	The partner company address displayed in Partner Finder.
PublicContactId	long	The partner contact name displayed in Partner Finder.
PublicEmailId	long	The e-mail displayed in Partner Finder.
PublicFaxId	long	The fax number displayed in in Partner Finder.
PublicPhoneId	long	The phone displayed in Partner Finder.
PublicPrivateOwnershipFlag	boolean	Indicates whether the organization is publically or privately owned. If the value is Y, then the organization is a privately owned organization. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.

Name	Type	Description
PublicStatus	string	Status of approval of public profile.
RangeEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date in the import range.
RangeStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date in the import range.
ReassignTerritory	string	Indicates whether this partner needs territory reassignment.
RegistrationType	string	Indicates the registration type of the partner.
SmallBusInd	string	Indicates whether the organization is considered as a small business. If the value is Y, then the organization is considered as a small business. The default value is N.
SolutionOverview	string	The overview description of partner solutions.
State	string	The name of the state.
Status	string	The status of the record.
StockSymbol	string	The corporate stock symbol of the organization as listed in stock exchanges.
Synergy	string	The description of the value of the partnership between the Vendor and Partner.
TierId	long	The unique identifier for a tier to which a partner applies.
TotalEmployeesInd	string	Indicates if subsidiaries are included in the calculation of total employees. The accepted values are defined in the lookup type TOTAL_EMPLOYEES_INDICATOR.
TotalEmployeesText	string	The total number of employees in text format.
TreeCode	string	The unique code of the partner organization tree.
TreeStructureCode	string	The unique code for the partner organization tree structure.

Name	Type	Description
URL	string	The destination URL associated with a specific Google AdWords ad.
UniqueNameSuffix	string	The suffix used to generate the attribute PartyUniqueName. The suffix is concatenated to the Organization Name attribute to generate the PartyUniqueName. The primary address is defaulted as the suffix.
Web	*Web*	The web information related to the record.
YearEstablished	int	The year when the organization began doing business.

Partner Account Team

The person assigned to a partner account team.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerAccountResource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	The type of access granted to the resource as well as managers of the organizations.
AssignmentTypeCode	string	The code indicating how the resource is assigned to the sales account team.
CreatedBy	string	Who column: indicates the date and time of the creation of the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who created the row.
EmailAddress	string	The email address associated with the record.
FormattedPhoneNumber	string	The formatted phone number.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
MemberFunctionCode	string	The code indicating the role of a sales team member in the resource team such as Integrator, Executive Sponsor, and Technical Account Manager. A list of accepted values is defined in the lookup FND_LOOKUPS.
OrganizationName	string	The name of the party when the party type is Organization.
OrganizationRole	string	The role of the partner in the organization.
PartnerAccountId	long	The unique identifier of the partner account resource team.
PartnerAccountResourceId	long	The unique identifier of the member of the partner account resource team. • Primary Key
PartnerPartyId	long	The PartyId of Partner whose Account Team includes this resource.

Name	Type	Description
ResourceId	long	The unique identifier of the resource.
ResourceName	string	The name of the resource associated with the partner account team.
TerritoryName	string	The name of the territory for the partner account.

Partner Certification

The list of certifications that a partner has achieved.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerCertification

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Partner Generic List of Values*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CertificationCode	string	The code for the certification.

Name	Type	Description
CertificationName	string	The name of this certification.
LookupCode1	string	The key information for the certification.
LookupType1	string	The key information for the certification.
Meaning	string	The name of this certification.

Partner Generic List of Values

The generic list of multiple values used for certifications and expertise.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerProfileMultivalueLov

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Partner Certification*
Extended by	*Expertise*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
LookupCode	string	The value from a multi-value list of values category that applies to the profile.
LookupType	string	The list of values code that defines the category to which the list of values belong. This value indicates the profile field to which the value belongs.
PartnerMultivalLovId	long	The unique identifier of the list of values code selected for a specific multi-value field in the partner profile. • Primary Key
PartyId	long	The unique identifier of the contact party.

Partner Dimension Member

A generic list of multiple values used for territory dimensions.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Industries Served*
Extended by	*Focus Areas*

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK1 column.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	A specific type of item within the dimension code. For example, for the products dimension, product items and product categories are there.
DimensionCode	string	The dimension of the item being stored. For example, geography.
DimensionMemberName	string	The name of the dimension member.
DimensionMemberNameBackup	string	The name of the dimension member to which this record refers to. This is stored in case the dimension member was removed and the user still requires the name of the item that was removed.
IntegrationId	string	The reference to the actual dimension member item.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerId	long	The unique identifier of the entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of the table. • Primary Key
TerrDimMemberId	long	The key data for the territory dimension.
TerrDimPartitionId	long	The primary key.
TypeCode	string	The type of the partition.

Partner E-Mail

The e-mail address of the partner.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerPublicEmail

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActualContentSource	string	The information regarding the source of the contact point.
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPointValue	string	The key information for the contact point.
CreatedByModule	string	The module that created the record.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The information on how to interpret the e-mail address.

Name	Type	Description
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
OrigSystemReference	string	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
Primary2Flag	boolean	Indicator to specify that the contact point is the primary point of contact.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
RelationshipId	long	The relationship identifier for the record.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Focus Areas

The focus areas or product specialties of the partner.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerProductSpeciality

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Partner Dimension Member*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ProductId	string	The unique identifier of the product for product specialties.
ProductName	string	The name of the product for product specialties.

Partner Dimension Member

A generic list of multiple values used for territory dimensions.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Industries Served*
Extended by	*Focus Areas*
Contained by	*Partner*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK1 column.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	A specific type of item within the dimension code. For example, for the products dimension, product items and product categories are there.
DimensionCode	string	The dimension of the item being stored. For example, geography.
DimensionMemberName	string	The name of the dimension member.
DimensionMemberNameBackup	string	The name of the dimension member to which this record refers to. This is stored in case the dimension member was removed and the user still requires the name of the item that was removed.
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.

Name	Type	Description
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerId	long	The unique identifier of the entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of the table. • Primary Key
TerrDimMemberId	long	The key data for the territory dimension.
TerrDimPartitionId	long	The primary key.
TypeCode	string	The type of the partition.

Partner Generic List of Values

The generic list of multiple values used for certifications and expertise.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerProfileMultivalueLov

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Partner Certification*

Relationship Type	Object or Service
Extended by	*Expertise*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
LookupCode	string	The value from a multi-value list of values category that applies to the profile.
LookupType	string	The list of values code that defines the category to which the list of values belong. This value indicates the profile field to which the value belongs.

Name	Type	Description
PartnerMultivalLovId	long	The unique identifier of the list of values code selected for a specific multi-value field in the partner profile. • Primary Key
PartyId	long	The unique identifier of the contact party.

Geographies Served

The geographies in which a partner operates.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerGeographyServed

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK1 column.
CreatedBy	string	Who column: indicates the user who created the row.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	A specific type of item within the dimension code. For example, for the products dimension there could be product items and product categories.
DimensionCode	string	The dimension of the item being stored. For example, geography.
DimensionMemberName	string	Name of dimension member.
DimensionMemberNameBackup	string	The name of the dimension remember this record refers to. This is stored in case the dimension member was removed and the user still needs to know the name of the item that was removed.
GeographyId	string	The geography ID of the geography served.
GeographyName	string	The geography name of the geography served.
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
OwnerId	long	The identifier of the entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.

Name	Type	Description
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of this table. • Primary Key
TerrDimMemberId	long	Key data for the territory dimension.
TerrDimPartitionId	long	Primary key.
TypeCode	string	Type of the partition.

Partner Members

The partner members for a partner.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Trading Community Person Details*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ObjectId	long	PartyId of Partner Organization to whom this Contact belongs.

Trading Community Person Details

The information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Person

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*
Contains	*Citizenship*
Contains	*Contact Language*
Contains	*Instant Messaging*
Contains	*Employment History*
Contains	*Web*
Contains	*Classification Assignment*
Contains	*Usage Assignment*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Contact Interest*
Contains	*Contact*

Relationship Type	Object or Service
Contains	*Additional Contact Name*
Contains	*Phone*
Contains	*Education*
Contains	*Email Domain*
Contains	*Additional Identifier*
Contains	*Contact Preference*
Contains	*Source System Reference*
Contains	*Certification*
Contains	*Contact Address*
Contains	*Email*
Contains	*Preference*
Extended by	*Partner Members*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*

Relationship Type	Object or Service
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.
AdditionalPersonName	*Additional Contact Name*	The additional name of the person.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information for the person.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Citizenship	*Citizenship*	The citizenship information of a person.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the person.
Comments	string	The comments for the record.

Name	Type	Description
ContactPreference	*Contact Preference*	The contact preference associated with the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
Education	*Education*	The education information of the person.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.
EmploymentHistory	*Employment History*	The employment history information of a person.
FinancialProfile	*Financial Profile*	The financial profile information of a person.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
Gender	string	The gender of the person, such as male, female, and unknown. A list of accepted values is defined in the lookup HZ_GENDER.

Name	Type	Description
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person. A list of accepted values is defined in the lookup MARITAL_STATUS.
MissionStatement	string	The corporate charter of organization in user-defined text format.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.

Name	Type	Description
PartyPreference	*Preference*	The preference mentioned in the person details.
PartySite	*Contact Address*	The party site associated with the person.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the person.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonInterest	*Contact Interest*	The interest information associated with a person.
PersonLanguage	*Contact Language*	The language information associated with a person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.

Name	Type	Description
PersonPreviousLastName	string	The previous last name of a person.
PersonProfile	*Contact*	The profile information of the person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPTId	long	The unique identifier of the primary e-mail.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPTId	long	The unique identifier of the primary phone contact point.

Name	Type	Description
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPTId	long	The unique identifier of the primary URL contact point.
Province	string	The name of the province.
Relationship	*Relationship*	The relationship information of the person.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
Salutation	string	The size of the household this person is a part of.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.

Name	Type	Description
Status	string	The status of the record.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the Third Party field in the Customers window is mandatory.
URL	string	The destination URL associated with a specific Google AdWords ad.
UserGUID	string	The "light weight" user Global Unique Id. Light Weight users defined in the Extended Security (XS) System.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
Web	*Web*	The web information related to the record.

Partner Phone

The phone number for a contact point.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerPublicPhone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActualContentSource	string	The information regarding the source of the contact point.
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPointValue	string	The key information for the contact point.
CreatedByModule	string	The module that created the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FormattedPhoneNumber	string	The formatted phone number.
LastContactDtTime	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The last time when the contact point was contacted.
OrigSystemReference	string	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PagerTypeCode	string	The type of pager for the phone number.
PartyUsageCode	string	The usage context of a party's contact point.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCallingCalendar	string	The information on proper calling times.

Name	Type	Description
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The extension of the phone number.
PhoneLineType	string	The type of phone line.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
RawPhoneNumber	string	The unformatted phone number.
RelationshipId	long	The relationship identifier for the record.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TransposedPhoneNumber	string	The transposed phone number.

Partner Program Language Translation

The translation language of the partner program.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerProgram/management/partnerProgramService/}PartnerProgramsTranslation

Logical Business Objects

- CRM : Partner Management : Partner Program

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner Programs*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BenefitDescription	string	Translation of benefits description into different language.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EligibilityDescription	string	Translation of eligibility description into different language.
FeesAgreementDescription	string	Translation of agreement description into different language.
Language	string	Language that the translation is in. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MeasureDescription	string	The translation of objectives description into different language.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartnerProgramId	long	The unique identifier of a partner program.

Name	Type	Description
		• Primary Key
ProgramDescription	string	The text describing the program.
ProgramName	string	The name of the partner program.
QuestionDescription	string	Translation of question description into different language.
SourceLang	string	Source language for the program.

Partner Programs

The partner program information such as the name of the program, program description, validity period and so on. The programs have eligibility criteria, associated benefits and terms and conditions.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerProgram/management/partnerProgramService/}PartnerPrograms

Logical Business Objects

- CRM : Partner Management : Partner Program

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Partner Program Language Translation*
Contained by	*Program Enrollments*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ApprovalComments	string	The approval comments.
BenefitDescription	string	The text describing the benefits.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
EligibilityDescription	string	The text describing the eligibility criteria to enroll into program.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
EnrollmentApproverUser	string	An approver of the program enrollments.
FeesAgreementDescription	string	Text describing the agreement criteria.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
MeasureDescription	string	The text to describe objectives listed for this program.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
PartnerProgramId	long	The Primary Key: Partner Program Id. • Primary Key
PartnerProgramsTranslation	*Partner Program Language Translation*	The translations of the partner program.
PrimaryContactId	long	A unique identifier of the contact person for the partner program. This is to identify who can be contacted for this program.
PrimaryContactName	string	A primary contact name.
ProductId	long	A unique identifier of product that is associated to the program.
ProductName	string	The name of the product.
ProductOrgId	long	A unique identifier of product organization that the product belongs to.
ProgramApproverId	long	A program approver ID.
ProgramApproverUser	string	An approver of the program.
ProgramDescription	string	The text describing the program.
ProgramManagerId	long	A unique identifier of the manager for the partner program. This is to identify who is managing this partner program.
ProgramName	string	The name of the partner program.
ProgramNumber	string	A unique number generated for each program.
ProgramTermAutoRenewal	string	A flag to identify if program enrollment can be auto renewed or not.
ProgramTermExpiryWarn	string	The duration from program term end date after which a renewal notification is sent. Possible values are 30 days, 60 days.
ProgramTermGracePeriod	string	The duration after expiry of the enrollment a renewal into the program can be accepted.
ProgramType	string	Type of various partner program. Possible values are reseller, go to market.

Name	Type	Description
QuestionDescription	string	The text to describe the set of questions to follow for this program.
ReadOnlyEndDate	string	The read only end date.
ReadOnlyProgramType	string	The read only program type.
ReadOnlyStartDate	string	The read only start date.
ReadOnlyStatusCode	string	The read only status code.
RemainingDays	string	The derived column: remaining days.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
UpdateFlag	boolean	An attribute to identify if a record is updateable.

Partner Public Contact

The point of contact used for the public profile.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerPublicContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AnalysisFy	string	The fiscal year that the financial information is based on.
CategoryCode	string	The user-defined category. The lookup type is CUSTOMER_CATEGORY.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
City	string	The name of the city.
Comments1	string	The denormalization of the COMMENTS in HZ_GROUP_PROFILES.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy1	string	The user who created the account record.
CreatedByModule1	string	The module that created the account record.
CreationDate1	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
CurrencyFyPotentialRevenue	decimal	The potential revenue of the organization in this fiscal year.
DUNSNumber	string	DUNS_NUMBER in VARCHAR format. Column value is not restricted to nine digit DUNS number.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The denormalization of the DATE_OF_BIRTH in HZ_PERSON_PROFILES.
EmailAddress	string	The email address associated with the record.
EmployeesTotal	decimal	The total number of employees.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
FormattedAddress	string	The formatted address of the contact.
FormattedPhoneNumber	string	The formatted phone number.
Gender	string	The denormalization of the GENDER in HZ_PERSON_PROFILES.
GroupType	string	The lookup for the group type.
HQBranchInd	string	The status of the site. Identifies if the location is the headquarters, a branch, or a single location.
HomeCountry	string	The home country associated with the party.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for a language.

Name	Type	Description
LastUpdateDate1	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin1	string	The login of the user who last updated the record.
LastUpdatedBy1	string	The user who last updated the record.
MaritalStatus	string	The denormalization of the MARITAL_STATUS in HZ_PERSON_PROFILES.
MissionStatement	string	The corporate charter of the organization.
NextFyPotentialRevenue	decimal	The potential revenue of the organization for the next fiscal year.
OrigSystemReference	string	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PersonAcademicTitle	string	An academic title that is part of the name of a person, such as Dr. John Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	Used to specify the last name prefix such as fon, van, and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_PREFIX in HZ_PERSON_PROFILES is used. Corresponds to the field Last Name Prefix in HL7.

Name	Type	Description
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	Indicates the place in a family structure. For example, in Tom Jones III, III is the suffix.
PersonPreNameAdjunct	string	The salutary introduction such as Mr. or Herr.
PersonPreviousLastName	string	The previous last or surname of the person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPTId	long	The key to primary e-mail contact point.
PrimaryPhoneAreaCode	string	The area code within a country code.

Name	Type	Description
PrimaryPhoneContactPTId	long	The key to the primary contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPTId	long	The key to the primary URL contact point.
Province	string	The name of the province.
SICCode	string	The standard industry classification (SIC) code.
SICCodeType	string	The version of standard industry classification (SIC) code.
Salutation	string	The phrase used to address a party in any correspondence.
State	string	The name of the state.
Status1	string	The party status indicator.
TradingPartnerIdentifier	string	One column to store the FSIO related trading partner codes. This column stores alpha numeric values. The column also addresses Fed vs. Non-Fed attribute requirement.
URL	string	The destination URL associated with a specific Google AdWords ad.
UserGUID	string	Stores the light weight user Global Unique ID. Light weight users are defined in the Extended Security (XS) system. Foreign key to FND_USER.

Name	Type	Description
YearEstablished	int	The year when the organization began doing business.

Partner Type

The information about the partner type.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerTypeDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK2 column.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.

Name	Type	Description
DimSubtypeCode	string	This attribute is not used.
DimensionCode	string	This will contain the string 'SChnl' to indicate Partner Type.
DimensionMemberName	string	Name of dimension member.
DimensionMemberNameBackup	string	The name of the dimension remember this record refers to. This is stored in case the dimension member was removed and the user still needs to know the name of the item that was removed.
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
OwnerId	long	Partner Party Id of the Partner.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of this table. • Primary Key
PartnerTypeCode	string	The partner type code for partner.

Name	Type	Description
PartnerTypeName	string	The name of the partner type, such as Value Added Reseller.
TerrDimMemberId	long	Key data for the territory dimension.
TerrDimPartitionId	long	Primary key.
TypeCode	string	Type of the partition.

Phone

The phone number associated with a trading community member. For example, the phone number for Oracle Corporation is 650-506-6000.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Phone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Contact Address*
Contained by	*Trading Community Organization Details*

Relationship Type	Object or Service
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.

Name	Type	Description
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FormattedPhoneNumber	string	The formatted phone number.
LastContactDtTime	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time of last contact placed to this contact point.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.

Name	Type	Description
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PagerTypeCode	string	The PAGER_TYPE_CODE column stores the lookup code for the type of pager. The type of pager determines how the page is received. For example, tone, number, alphanumeric or two-way alphanumeric.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCallingCalendar	string	The name or code for a calling calendar used with this telephone number. This attribute is no longer used in Fusion applications.
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The additional number addressed after initial connection to an internal telephone system.
PhoneInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community phone.
PhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound, or outbound.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.

Name	Type	Description
RawPhoneNumber	string	The unformatted telephone number.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TimezoneCode	string	The foreign key to FND_TIMEZONES_B.TIMEZONE_CODE.
TransposedPhoneNumber	string	This column stores the concatenation of PHONE_COUNTRY_CODE, PHONE_AREA_CODE, and PHONE_NUMBER in reverse order. For example, if PHONE_COUNTRY_CODE=1, PHONE_AREA_CODE=650 and PHONE_NUMBER=5065747, this column stores 74756050561. This column is used for building an index to search for any combination of the above three columns.

Program Enrollment Participants

The partners enrolled in a specific partner program. A partner can enroll in multiple programs.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerProgram/enrollment/partnerProgramEnrollmentService/}ProgramEnrollmentParticipants

Logical Business Objects

- CRM : Partner Management : Partner Program Enrollment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Program Enrollments*

Relationship Type	Object or Service
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ParticipantPartyId	long	Party Id of the participant enrolled into a program.
PartyNumber	string	The unique identification number for the party.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PrgmEnrlmtPrtcptsId	long	Enrollment Participant Id - Primary Key. • Primary Key
ProgramEnrollmentId	long	Unique identifier of program enrollment.

Program Enrollments

The programs into which a partner is enrolled. A partner can enroll in multiple programs.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerProgram/enrollment/partnerProgramEnrollmentService/}ProgramEnrollments

Logical Business Objects

- CRM : Partner Management : Partner Program Enrollment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note*
Contains	*Program Enrollment Participants*
Contains	*Partner Programs*
Contains	*Partner*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveEnrollment	string	The status of enrollment. Possible values are active or inactive.
ApprovalDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date on which enrollment is approved.
BusinessUnit	string	The Business Unit identifier.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.

Name	Type	Description
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
EnrollmentApproverId	long	The numeric identifier for the Program Manager who has access to approve the enrollment.
EnrollmentLanguage	string	Language that the translation is in.
EnrollmentNumber	string	A unique number generated for each program enrollment.
EnrollmentParticipants	*Program Enrollment Participants*	A unique identifier of the partners enrolled into program.
EnrollmentStatus	string	Status of the enrollment. Possible values are draft, pending, approved, rejected, terminated, renewed.
ExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date on which enrollment is expiring.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
Notes	*Note*	Notes associated with Program Enrollment.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
PartnerCompanyNumber	string	Public Unique Identifier of Partner company associated to the Program Enrollments.
PartnerParty	*Partner*	The Partner details.
PartnerPartyId	long	Unique identifier of a partner.
PartnerPartyName	string	The partner name.
PartnerProgram	*Partner Programs*	The partner program details for the enrollment.
PartnerProgramId	long	Unique identifier of a partner program.
ProgramDescription	string	Text describing the program.
ProgramEnrollmentId	long	Unique identifier of a partner program enrollment. • Primary Key
ProgramName	string	Name of the partner program.
ProgramNumber	string	A unique number generated for each program.
RemainingDays	string	Number of days left for expiry of the enrollment.
RenewedEnrollment	string	The status of enrollment which is of type renewal. Possible values are new or renewal.
RenewedFromId	long	Unique identifier of the enrollment from which the renewal enrollment is copied.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Term	string	Duration for which the enrollment is valid. Possible values are 1 year, 2 year, 3 year.
TerminationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date on which enrollment is terminated.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*
Contained by	*Location Details*
Contained by	*Household*
Contained by	*Contact Preference*
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*
Contained by	*Trading Community Address Purpose*
Contained by	*Telex*
Contained by	*Phone*

Relationship Type	Object or Service
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*
Contained by	*Trading Community Person Details*
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*
Contained by	*Trading Community Customer Account Site Use*
Contained by	*Relationship*
Contained by	*Electronic Data Interchange*
Contained by	*Trading Community Customer Account or Site Role*
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*

Relationship Type	Object or Service
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Telex

The telex number information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Telex

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.

Name	Type	Description
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary telex of the associated object. If the value is True, then this is the primary telex. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TelexNumber	string	The telex reference number (usually a telephone number) of the organization.

Trading Community Address Additional Information

The address information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/}PartySiteInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Address Purpose

The purpose of an address, such as Business, Home, or Ship To.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySiteUse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Relationship Type	Object or Service
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date at the start of the date range within which the row is active.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
IntegrationKey	string	The integration key is not used.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteUseId	long	The unique identifier of the party site used. • Primary Key
PrimaryPerType	string	Indicates if this is the primary use for the site. Y stands for the primary site and N stands for all other sites.
RequestId	long	A system-generated read-only attribute used by the application framework.
SiteUseType	string	The site use type associated with the address.
Status	string	The status of the record.

Trading Community Contact Point Additional Information

The contact point for a trading community member like phone or e-mail. For example 650-506-6000 is the phone number for Oracle Corporation, john.doe@example.com is the e-mail address for John Doe.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/}ContactPointInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Phone*
Contained by	*Web*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key

Name	Type	Description
ContactPointType	string	The type of the contact point.
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*

Relationship Type	Object or Service
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Web

The Web information associated with a trading community member. For example, Oracle's address on the Web is www.oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Web

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Relationship Type	Object or Service
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the

Name	Type	Description
		start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N stands for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Name	Type	Description
URL	string	The destination URL associated with a specific Google AdWords ad.
WebInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community Web.
WebType	string	The prefix class to a Web address. Typically, this is either FTP or HTTP.

Partner Public Profile Attachment

Service to operate on partner administrators for uploading attachments such as files and URLs while setting up a public profile. These documents become available for download from the partner public profile.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/partnerFinder/publicModel/}PartnerFinderAttachmentService

Service WSDL URL: https://servername/crmService/PartnerFinderAttachmentService?WSDL

Operations

- *getAttachmentStream*
- *getAttachmentURL*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getAttachmentStream

Queries attachments for a given entity name, category name(s), title and organization party ID. It also returns a BlobDomain containing the document content stream.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
stEntityName	string	An attachment entity name to be queried. Must be ZPM_PARTNER_PROFILE.

Element Name	Type	Description
stCategoryName	string	An attachment category name to be queried. Must be either ZPM_PARTNER_FINDER_ATTACHMENT or ZPM_PARTNER_FINDER_LOGO.
stPk1Value	string	A string containing PARTY_ID of the organization, to be part of the attachments query.
stPk2Value	string	The string forms part of the attachments query. This value can be null.
stPk3Value	string	The string forms part of the attachments query. This value can be null.
stPk4Value	string	The string forms part of the attachments query. This value can be null.
stPk5Value	string	The string forms part of the attachments query. This value can be null.
Title	string	The file name of the attachment to be queried for the method getAttachmentStream.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The parameter returns a oracle.jbo.domain.BlobDomain object encapsulating the stream containing the document content.

getAttachmentURL

Queries the attachment for a given entity name, category name(s), and organization party ID. It also returns a URL to the document.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
stEntityName	string	An attachment entity name to be queried. Must be ZPM_PARTNER_PROFILE.

Element Name	Type	Description
stCategoryName	string	An attachment category name to be queried. Must be either ZPM_PARTNER_FINDER_ATTACHMENT or ZPM_PARTNER_FINDER_LOGO.
stPk1Value	string	A string containing PARTY_ID of the organization, to be part of the attachments query.
stPk2Value	string	The string forms part of the attachments query. This value can be null.
stPk3Value	string	The string forms part of the attachments query. This value can be null.
stPk4Value	string	The string forms part of the attachments query. This value can be null.
stPk5Value	string	The string forms part of the attachments query. This value can be null.

Response Payload

Element Name	Type	Description
result	string	The string containing URL of the document for the method getAttachmentURL.

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.

Element Name	Type	Description
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getAttachmentStream	ZPM_VIEW_PARTNER_DASHBOARD_PRIV	View Partner Dashboard	Allows viewing of the Partner dashboard.
getAttachmentStream	CRM_ANONYMOUS_SELFREGISTER_PRIV_PRIV	Create Self Service Partner Registration	Allows access to register Partner Company and also request for username
getAttachmentStream	ZPM_CREATE_PARTNER_USER_PRIV	Create Partner User	Allows provisioning of partner members to sign into the vendor partner network.
getAttachmentURL	ZPM_VIEW_PARTNER_DASHBOARD_PRIV	View Partner Dashboard	Allows viewing of the Partner dashboard.
getAttachmentURL	CRM_ANONYMOUS_SELFREGISTER_PRIV_PRIV	Create Self Service Partner Registration	Allows access to register Partner Company and also request for username
getAttachmentURL	ZPM_CREATE_PARTNER_USER_PRIV	Create Partner User	Allows provisioning of partner members to sign into the vendor partner network.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZPM_CREATE_PARTNER_USER_PRIV	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ZPM_CREATE_PARTNER_USER_PRIV	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ZPM_CREATE_PARTNER_USER_PRIV	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			This role is for the partner administrator.
ZPM_VIEW_PARTNER_DASHBOARD_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZPM_VIEW_PARTNER_DASHBOARD_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ZPM_VIEW_PARTNER_DASHBOARD_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZPM_VIEW_PARTNER_DASHBOARD_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZPM_VIEW_PARTNER_DASHBOARD_PRIV	ORA_ZPM_PARTNER_PORTAL_USER_ABSTRACT	Partner Portal User	Views limited information when a partner organization is in a status of registered or expired. This role is for the partner sales representative or partner sales manager.
ZPM_VIEW_PARTNER_DASHBOARD_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZPM_VIEW_PARTNER_DASHBOARD_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
CRM_ANONYMOUS_SELFREGISTER_PRIV_PRIV	ORA_FND_ANONYMOUS_USER_ABSTRACT	Anonymous User	Maps to OPSS system Anonymous Role

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_PORTAL_USER_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Partner Public Profile Search

Service to search partner public profile records by anonymous or authenticated users. This service uses Enterprise Crawl and Search Framework (ECSF) framework to search for the partner public profile records that are crawled and indexed by Oracle Secure Enterprise Search (SES) engine.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/partnerFinder/publicModel/}PartnerFinderService

Service WSDL URL: https://servername/crmService/PartnerFinderService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Partner Public Profile Search Filters*

Relationship Type	Object or Service
Handles	*Partner Public Profile Search Results*

Operations

- *doPartnerSearch*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

doPartnerSearch

Searches for partner public profile records. This operation takes search keywords, a partner public profile search filters SDO, start Index, the number of documents requested and the language as parameters and returns a partner public profile search results SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
keywords	string	The keyword to be used for searching partner public profile records.
partnerSearchFilterPVORowImplList	*Partner Public Profile Search Filters*	A list containing PartnerSearchFilter SDO objects that contain filters to be applied for the search.
filterConnector	string	The logical connectors to be applied on the keyword which can be ANY, ALL, NONE, or EXACT.
startIndex	int	The start index of the records to be returned in the search result. This is provided for supporting page navigation.
docsRequested	int	The number of partner public profile records requested. This is provided for supporting page navigation.
queryLang	string	The string containing language information for the method doPartnerSearch.

Response Payload

Element Name	Type	Description
result	*Partner Public Profile Search Results*	The parameter returns a partner public profile search results SDO.

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
doPartnerSearch	ZPM_VIEW_PARTNER_DASHBOARD_PRIV	View Partner Dashboard	Allows viewing of the Partner dashboard.
doPartnerSearch	CRM_ANONYMOUS_SELFREGISTER_PRIV_PRIV	Create Self Service Partner Registration	Allows access to register Partner Company and also request for username
doPartnerSearch	ZPM_CREATE_PARTNER_USER_PRIV	Create Partner User	Allows provisioning of partner members to sign into the vendor partner network.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZPM_CREATE_PARTNER_USER_PRIV	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZPM_CREATE_PARTNER_USER_PRIV	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ZPM_CREATE_PARTNER_USER_PRIV	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ZPM_VIEW_PARTNER_DASHBOARD_PRIV	ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	Partner Sales Representative	Maintains leads, registers leads, and manages partner opportunities.
ZPM_VIEW_PARTNER_DASHBOARD_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ZPM_VIEW_PARTNER_DASHBOARD_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZPM_VIEW_PARTNER_DASHBOARD_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZPM_VIEW_PARTNER_DASHBOARD_PRIV	ORA_ZPM_PARTNER_PORTAL_USER_ABSTRACT	Partner Portal User	Views limited information when a partner organization is in a status of registered or expired. This role is for the partner sales representative or partner sales manager.
ZPM_VIEW_PARTNER_DASHBOARD_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZPM_VIEW_PARTNER_DASHBOARD_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.
CRM_ANONYMOUS_SELFREGISTER_PRIV_PRIV	ORA_FND_ANONYMOUS_USER_ABSTRACT	Anonymous User	Maps to OPSS system Anonymous Role

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_PORTAL_USER_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_PARTNER_SALES_REPRESENTATIVE_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Partner Public Profile Search Filters

The object used to pass the filter criteria to the partner public profile search service.

QName: {http://xmlns.oracle.com/apps/partnerFinder/publicModel/publicView/}PartnerSearchFilterSDO

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Partner Public Profile Search*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
attributeName	string	The name of the Filter to be applied on the Search. It can be one of "COUNTRY", "STATE","CITY","POSTAL_CODE", "GEOGRAPHIESSERVED_XIENT_1", "PARTNEREXPERTISEMEANING_XIENT_1", "DIMENSION_MEMBER_NAME", "PRODUCTSPECIALITIES_XIENT_1", "PARTNER_LEVEL", "YEAR_ESTABLISHED". • Primary Key
attributeVal	string	A comma separated list of filter values.
operatorType	string	The operator type to be used with the filter. • Primary Key

Partner Public Profile Search Results

The object used to return results from the partner public profile search service.

QName: {http://xmlns.oracle.com/apps/partnerFinder/publicModel/}PartnerSearchResultElementSDO

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Partner Public Profile Search*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
description	string	A partner search result description.
lastModified	string	The partner public profile last modified date.
score	string	A partner search result score.
snippet	string	A partner search result snippet.

Name	Type	Description
title	string	A partner search result title.
url	string	A partner URL in a partner search result. • Primary Key

Partner Service

Service to operate on partner information using a partner identifier. The supported operations are get and update. A partner is defined as an external organization that works with a vendor as an agent or a reseller.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerService

Service WSDL URL: https://servername/crmService/PartnerService?WSDL

Logical Business Objects

- CRM : Partner Management : Partner

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Relationship*
Handles	*Partner Account Resource*
Handles	*Partner Type*
Handles	*Contact Preference*
Handles	*Trading Community Organization Details*
Handles	*Partner Email*
Handles	*Customer Contact Profile*

Relationship Type	Object or Service
Handles	*Partner Focus Area*
Handles	*Additional Account Name*
Handles	*Trading Community Relationship Additional Information*
Handles	*Financial Report*
Handles	*Trading Community Address Additional Information*
Handles	*Source System Reference*
Handles	*Trading Community Contact Point Additional Information*
Handles	*Preference*
Handles	*Address*
Handles	*Partner Certification*
Handles	*Email Domain*
Handles	*Partner Members*
Handles	*Financial Number*
Handles	*Trading Community Organization Profile Additional Information*
Handles	*Location Locale*
Handles	*Partner Phone*
Handles	*Additional Identifier*
Handles	*Customer Contact Responsibility*
Handles	*Account*
Handles	*Expertise*
Handles	*Usage Assignment*

Relationship Type	Object or Service
Handles	*Trading Community Location Profile Additional Information*
Handles	*Partner*
Handles	*Location Profile*
Handles	*Location Details*
Handles	*Telex*
Handles	*Web*
Handles	*Phone*
Handles	*Certification*
Handles	*Trading Community Address Purpose*
Handles	*Partner Public Contact*
Handles	*Electronic Data Interchange*
Handles	*Partner Generic List of Values*
Handles	*Instant Messaging*
Handles	*Classification Assignment*
Handles	*Financial Profile*
Handles	*Partner Geography Served*
Handles	*Electronic File Transfer*
Handles	*Email*
Handles	*Partner Dimension Member*
Handles	*Trading Community Original System Mapping Identifier Additional Information*
Handles	*Trading Community Organization Contact Additional Information*

Relationship Type	Object or Service
Handles	*Credit Rating*
Handles	*Industry Served*

Operations

- *getProfileOptionValue*
- *activatePartner*
- *approvePartner*
- *terminatePartner*
- *provisionResourceAsUser*
- *provisionPartnerMemberAsResource*
- *getRootResourceIdForthePartner*
- *deletePartnerWeb*
- *deletePartnerPhone*
- *deletePartnerEmail*
- *convertToPartner*
- *updateResourceManager*
- *updateResourceOrganization*
- *deletePartnerMember*
- *createPartner*
- *makeContactPrimary*
- *setPartnerAccountOwner*
- *getPartnerAdministratorUserName*
- *raisePartnerPublicEvent*
- *provisionRootResource*
- *getPartner*
- *updatePartner*
- *mergePartner*
- *findPartner*
- *deletePartnerGeographyServed*
- *deletePartnerIndustryServed*
- *deletePartnerProductSpeciality*
- *deletePartnerCertification*
- *deletePartnerExpertises*
- *deletePartnerAccountResource*
- *deletePartnerType*

- *getPartnerContact*
- *updatePartnerContact*
- *mergePartnerContact*
- *findPartnerContact*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getProfileOptionValue

A web service method which returns the profile option value for given profile option.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
profileOption	string	The parameter of the profile option category for the method getProfileOptionValue.

Response Payload

Element Name	Type	Description
result	string	The parameter returns the profile option value for the method getProfileOptionValue.

activatePartner

A web service method which activates the registered partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	The parameter for the party ID of a partner account.

Response Payload

Element Name	Type	Description
result	*Partner*	The parameter returns the result of the operation which includes the successfully updated partner and a list of warnings or informational messages.

approvePartner

A web service method which approves the prospective partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	A party id of a partner account for the method approvePartner.

Response Payload

Element Name	Type	Description
result	*Partner*	The result of the operation includes successfully updated partner and/or a list of warnings or informational messages.

terminatePartner

A web service method which terminates the registered partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	A party id of a partner account for the method terminatePartner.

Response Payload

Element Name	Type	Description
result	*Partner*	The result of the operation includes successfully updated partner and/or a list of warnings or informational messages.

provisionResourceAsUser

Provisions the resource as a user and creates LDAP request and roles.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerPartyId	long	The party ID of the partner for the method provisionResourceAsUser.
partnerMemberId	long	The party ID of the member for the method provisionResourceAsUser.
autoProvisionRoles	boolean	The parameter returns true if role provisioning is required.

Response Payload

Element Name	Type	Description
result	long	The parameter returns the partnerMemberId if resource creation is successful.

provisionPartnerMemberAsResource

A web service method which provisions the partner member as a resource.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerPartyId	long	The party ID of the partner for the method provisionPartnerMemberAsResource.
partnerMemberId	long	The party ID of the member for the method provisionPartnerMemberAsResource.

Element Name	Type	Description
roleName	string	The parameter for the role to be assigned to the member.
mgrId	long	The ID of the manager for the method provisionPartnerMemberAsResource.
orgName	string	The parameter is required when the role is a managerial role.

Response Payload

Element Name	Type	Description
result	long	The parameter returns the partnerMemberId if resource creation is successful.

getRootResourceIdForthePartner

A web service method which returns the root resource ID for a partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerPartyId	long	The party ID of the partner for the method getRootResourceIdForthePartner.

Response Payload

Element Name	Type	Description
result	long	The parameter returns the PartyId for the root resource.

deletePartnerWeb

A web service method which deletes web details for the partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerWeb	*Web*	A partner web object containing ContactPointId which needs to be deleted.

Response Payload

Element Name	Type	Description
result	void	The result of the operation includes a list of warnings or informational messages.

deletePartnerPhone

A web service method which deletes phone details for the partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerPhone	*Phone*	A partner phone object containing ContactPointId which needs to be deleted.

Response Payload

Element Name	Type	Description
result	void	The result of the operation includes a list of warnings or informational messages.

deletePartnerEmail

A web service method which deletes email details for the partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerEmail	*E-Mail*	A partner email object containing ContactPointId which needs to be deleted.

Response Payload

Element Name	Type	Description
result	void	The result of the operation includes list of warnings or informational messages.

convertToPartner

A web service method which converts existing organization to partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgPartyId	long	The organization party ID parameter is required for newly converted partner.

Response Payload

Element Name	Type	Description
result	*Partner*	The result of the operation includes successfully updated partner and/or a list of warnings or informational messages.

updateResourceManager

A web service method which updates the manager for the resource.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerPartyId	long	The party ID of the partner for the method updateResourceManager.
partnerMemberId	long	The party ID of the member for the method updateResourceManager.
managerPartyId	long	The party ID of the manager for the method updateResourceManager.

Response Payload

Element Name	Type	Description
result	long	The parameter returns the partnerMemberId if resource creation is successful.

updateResourceOrganization

A web service method which updates the organization for the resource if the user is a manager.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerPartyId	long	The party ID of the partner for the method updateResourceOrganization.
partnerMemberId	long	The party ID of the member for the method updateResourceOrganization.
orgName	string	The parameter provides the organization name for the method updateResourceOrganization.

Response Payload

Element Name	Type	Description
result	long	The parameter returns the partnerMemberId if resource creation is successful.

deletePartnerMember

A web service method which deletes a partner member for the partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerPartyId	long	The party ID of the partner for the method deletePartnerMember.

Element Name	Type	Description
partnerMemberId	long	The party ID of the member for the method deletePartnerMember.

Response Payload

Element Name	Type	Description
result	long	The parameter returns the partnerMemberId if resource creation is successful.

createPartner

A web service method which creates partner with primary location details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orgParty	*Trading Community Organization Details*	An organization party object which contains organization details like Organization Name, Org Email, and so on.
primaryLocation	*Location Details*	A location object which contains address details of partner.
partner	*Partner*	A partner object which contains the partner profile attributes and their corresponding new values that the partner services use.

Response Payload

Element Name	Type	Description
result	*Partner*	The result of the operation includes successfully created partner and/or a list of warnings or informational messages.

makeContactPrimary

A web service method which makes the specified contact as primary for partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerPartyId	long	The party ID of the partner for the method makeContactPrimary.
partnerMemberId	long	The party ID of the member for the method makeContactPrimary.

Response Payload

Element Name	Type	Description
result	long	The parameter returns the party ID of the primary partner contact.

setPartnerAccountOwner

A web service method which sets the partner account owner for the partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerPartyId	long	The party ID of the partner for the method setPartnerAccountOwner.
resourceId	long	The resource ID of the partner contact for the method setPartnerAccountOwner.

Response Payload

Element Name	Type	Description
result	void	The parameter is not used for the method setPartnerAccountOwner.

getPartnerAdministratorUserName

Retrieves the administrator name for the partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerId	long	The ID of the partner for the method getPartnerAdministratorUserName.

Response Payload

Element Name	Type	Description
result	string	The user name of the partner administrators of the partner company.

raisePartnerPublicEvent

Raises partner public events based on the TCA Events like CreateOrganization, UpdateOrganization, or UpdatePerson.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	The party ID of either organization or person party record.
eventType	string	The parameter for the event type which can be CreateOrganization, UpdateOrganization, or UpdatePerson.

Response Payload

Element Name	Type	Description
result	void	The parameter is not used for the method raisePartnerPublicEvent.

provisionRootResource

Provision partner member as a root of the partner organization if no root exists for the partner

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerPartyId	long	PartyId of the partner
partnerMemberPartyId	long	partyId of the partner member
roleCode	string	Role Code to be assigned to the member

Response Payload

Element Name	Type	Description
result	long	partnerMemberPartyId if root resource creation is successful

getPartner

Queries partner profile information using a party ID of the partner account.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	A party ID of a partner account for the method getPartner.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerResult	The parameter returns the partner that matches the inbound key attributes.

updatePartner

Updates partner profile information. This operation takes a partner object that contains party ID of a partner account and new partner profile values to update.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partner	*Partner*	A partner object that contains party ID of a partner account that the partner service updates. This partner object also contains the partner profile attributes and their corresponding new values that the partner service uses for update.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerResult	The result of the operation includes successfully updated partner and/or a list of warnings or informational messages.

mergePartner

Updates partner profile information. This operation takes a partner object that contains party ID of a partner account and new partner profile values for update. You can add account resource, contact points like email, phone, web, partner dimensions like geography, industry served, product specialty, and so on.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partner	*Partner*	A partner object that contains party ID of a partner account that the partner service updates. This partner object also contains the partner profile attributes and their corresponding new values that the partner service uses for update.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerResult	The result of the operation includes successfully updated partner and/or a list of warnings or informational messages.

findPartner

Queries a group of partners based on filter criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The parameter contains the criteria based on which partner search is performed.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The filtering condition to separate out the set of records.

Response Payload

Element Name	Type	Description
result	*Partner*	Returns the list of partner matching the criteria.

deletePartnerGeographyServed

Deletes geography served dimension for the partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerGeographyServed	*Geographies Served*	A partner geography served dimension object containing ID of the geography dimension which needs to be deleted.

Response Payload

Element Name	Type	Description
result	void	The result of the operation includes a list of warnings or informational messages.

deletePartnerIndustryServed

Deletes industry served dimension for the partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerIndustryServed	*Industries Served*	A partner industry served dimension object for the partner which needs to be deleted.

Response Payload

Element Name	Type	Description
result	void	The result of the operation includes a list of warnings or informational messages.

deletePartnerProductSpeciality

Deletes product specialty dimension for the partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerProductSpeciality	*Focus Areas*	A partner product specialty object containing ID of the product dimension which needs to be deleted.

Response Payload

Element Name	Type	Description
result	void	The result of the operation includes a list of warnings or informational messages.

deletePartnerCertification

Deletes certification for the partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerCertification	*Partner Certification*	A partner certification object containing PartnerMultivalLovId which has to deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the operation includes a list of warnings or informational messages.

deletePartnerExpertises

Deletes expertise dimension for the partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerExpertises	*Expertise*	A partner expertise object containing party ID of partner for whom partner service creates expertise and expertise code like Computer Hardware and so on.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the operation includes a list of warnings or informational messages.

deletePartnerAccountResource

Deletes resource from partner account team.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerAccountResource	*Partner Account Team*	A partner account resource object containing PartnerAccountResourceId which has to deleted. Note: Account Director cannot be deleted from this service operation.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the operation includes a list of warnings or informational messages.

deletePartnerType

Deletes partner type dimension for the partner.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerType	*Partner Type*	The parameter has partner type dimension for the partner.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The result of the operation includes a list of warnings or informational messages.

getPartnerContact

Use this operation to query Partner Contact information using a party id of the Person Record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	PartyId of Partner Contact Person Record
relationshipRecId	long	Relationship Record Id of Relationship Record Created Between Partner and Contact

Response Payload

Element Name	Type	Description
result	*Partner Members*	Partner Contact that matches the inbound key attributes.

Element Name	Type	Description

updatePartnerContact

Use this operation to update partner Contact information. This operation takes a partner Contact object that contains Party id of a partner Contact and new partner Contact Attribute values for update.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerContact	*Partner Members*	A partner Contact object that contains party id of a partner Contact. This partner Contact object also contains the Partner Contact attributes and their corresponding new values that the Partner Contact service uses for update.

Response Payload

Element Name	Type	Description
result	*Partner Members*	Result of the operation includes the successfully updated Partner Contact and/or a list of warnings or informational messages.

mergePartnerContact

Use this operation to update Partner Contact information. This operation takes a Partner Contact object that contains party id of a Partner Contact and new Partner Contact values for update.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partnerContact	*Partner Members*	A partner Contact object that contains party id of a Partner Contact. This partner Contact object also contains the Partner Contact attributes and their corresponding new values that the Partner Contact service uses for update.

Response Payload

Element Name	Type	Description
result	*Partner Members*	Result of the operation includes the successfully updated Partner Contact and/or a list of warnings or informational messages.

findPartnerContact

Queries a group of Partner Contacts based on filter criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	FindCriteria Object containing the Criteria based on which Partner Contact Serach is performed
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	FindControl object

Response Payload

Element Name	Type	Description
result	*Partner Members*	Returns List of Partner Contact matching the creteria.

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and object attribute labels for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.

Element Name	Type	Description
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
deletePartnerExpertises	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
deletePartnerExpertises	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
setPartnerAccountOwner	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
getPartnerAdministratorUserName	ZPM_VIEW_PARTNER_PROFILE_PRIV	View Partner Profile	Allows viewing the partner profile.
getPartnerAdministratorUserName	ZPM_VIEW_PARTNER_PRIV	View Partner	Allows viewing a list of partners from the partner work area.
getPartnerContact	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
getPartnerContact	ZPM_VIEW_PARTNER_PROFILE_PRIV	View Partner Profile	Allows viewing the partner profile.
getPartnerContact	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
getPartnerContact	ZPM_VIEW_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	View Partner Profile as Partner Administrator Function	Allows function security to view the partner profile by a Partner Administrator.
deletePartnerType	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
approvePartner	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
mergePartnerContact	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.

Operation Name	Privilege Code	Privilege Name	Privilege Description
mergePartnerContact	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
findPartnerContact	ZPM_VIEW_PARTNER_PROFILE_PRIV	View Partner Profile	Allows viewing the partner profile.
findPartnerContact	ZPM_VIEW_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	View Partner Profile as Partner Administrator Function	Allows function security to view the partner profile by a Partner Administrator.
mergePartner	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
mergePartner	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
updatePartnerContact	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
updatePartnerContact	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
deletePartnerAccountResource	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
deletePartnerCertification	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
deletePartnerProductSpeciality	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
deletePartnerProductSpeciality	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
deletePartnerGeographyServed	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
deletePartnerGeographyServed	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
getProfileOptionValue	ZPM_VIEW_PARTNER_PROFILE_PRIV	View Partner Profile	Allows viewing the partner profile.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getProfileOptionValue	ZPM_VIEW_PARTNER_PRIV	View Partner	Allows viewing a list of partners from the partner work area.
deletePartnerWeb	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
deletePartnerWeb	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
makeContactPrimary	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
makeContactPrimary	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
provisionRootResource	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
provisionRootResource	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
deletePartnerIndustryServed	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
deletePartnerIndustryServed	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
updateResourceOrganization	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
updateResourceOrganization	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
findPartner	ZPM_VIEW_PARTNER_PROFILE_PRIV	View Partner Profile	Allows viewing the partner profile.
findPartner	ZPM_VIEW_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	View Partner Profile as Partner Administrator Function	Allows function security to view the partner profile by a Partner Administrator.
deletePartnerMember	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.

Operation Name	Privilege Code	Privilege Name	Privilege Description
deletePartnerMember	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
activatePartner	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
createPartner	ZPM_CREATE_PARTNER_PRIV	Create Partner	Allows creating a partner.
provisionPartnerMemberAsResourc	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
provisionPartnerMemberAsResourc	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
convertToPartner	ZPM_CREATE_PARTNER_PRIV	Create Partner	Allows creating a partner.
updatePartner	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
updatePartner	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
provisionResourceAsUser	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
provisionResourceAsUser	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
deletePartnerPhone	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
deletePartnerPhone	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
raisePartnerPublicEvent	ZPM_CREATE_PARTNER_PRIV	Create Partner	Allows creating a partner.
getRootResourceIdForthePartner	ZPM_VIEW_PARTNER_PROFILE_PRIV	View Partner Profile	Allows viewing the partner profile.
getRootResourceIdForthePartner	ZPM_VIEW_PARTNER_PRIV	View Partner	Allows viewing a list of partners from the partner work area.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getPartner	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
getPartner	ZPM_VIEW_PARTNER_PROFILE_PRIV	View Partner Profile	Allows viewing the partner profile.
getPartner	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
getPartner	ZPM_VIEW_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	View Partner Profile as Partner Administrator Function	Allows function security to view the partner profile by a Partner Administrator.
terminatePartner	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
updateResourceManager	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
updateResourceManager	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.
deletePartnerEmail	ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	Update Partner Profile as Partner Administrator Function	Allows function security for a Partner Administrator to maintain partner profile.
deletePartnerEmail	ZPM_EDIT_PARTNER_PROFILE_PRIV	Update Partner Profile	Allows managing of partner profiles.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZPM_VIEW_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZPM_VIEW_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZPM_VIEW_PARTNER_PROFILE_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZPM_VIEW_PARTNER_PROFILE_PRIV	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ZPM_VIEW_PARTNER_PROFILE_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
ZPM_VIEW_PARTNER_PROFILE_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZPM_VIEW_PARTNER_PROFILE_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
ZPM_VIEW_PARTNER_PROFILE_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZPM_VIEW_PARTNER_PROFILE_PRIV	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ZPM_VIEW_PARTNER_PROFILE_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
ZPM_VIEW_PARTNER_PROFILE_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZPM_VIEW_PARTNER_PROFILE_PRIV	ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	Channel Partner Manager	Defines new channel partner programs.
ZPM_VIEW_PARTNER_PROFILE_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZPM_VIEW_PARTNER_PROFILE_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
ZPM_VIEW_PARTNER_PROFILE_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	Prospective Partner Administrator	Views limited information about partner organization is in a status of registered or expired. This is for the partner administrator.
ZPM_EDIT_PARTNER_PROFILE_AS_PARTNER_FUNCTION_PRIV	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ZPM_CREATE_PARTNER_PRIV	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ZPM_CREATE_PARTNER_PRIV	ORA_LOY_MANAGEMENT_DUTY	Loyalty Management	Manages all aspects of a Loyalty Program
ZPM_EDIT_PARTNER_PROFILE_PRIV	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ZPM_EDIT_PARTNER_PROFILE_PRIV	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ZPM_EDIT_PARTNER_PROFILE_PRIV	ORA_LOY_MANAGEMENT_DUTY	Loyalty Management	Manages all aspects of a Loyalty Program
ZPM_VIEW_PARTNER_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ZPM_VIEW_PARTNER_PRIV	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ZPM_VIEW_PARTNER_PRIV	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZPM_VIEW_PARTNER_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
ZPM_VIEW_PARTNER_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_ADMINISTRATOR_LIMITED_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_LOY_MANAGEMENT_DUTY	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_ MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_ MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_ MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_ MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ MANAGMENT_AS_PARTNER_ DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			products or events to specific customers.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_LOY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_PARTNER_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Account

An organization account and its profile information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Organization Profile Additional Information*
Contained by	*Sales Account*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Alias	string	The organization alias name.
AnalysisFy	string	The fiscal year that the financial information is based on.
BankCode	string	Identifies the bank in several countries, typically for regulatory purposes.
BankOrBranchNumber	string	Stores bank number for banks and branch number for bank branches. Primarily stores ABA number for US bank branches.
BranchCode	string	Identifies the bank branch in several countries, typically for regulatory purposes.
BranchFlag	boolean	Indicates if this is a branch location. If the value is True, then this is a branch location.
BusinessReport	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	Dun and Bradstreet business information report.
BusinessScope	string	The physical class of business in which a business participates. For example, local, national, or international.

Name	Type	Description
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CeoTitle	string	The formal title of the chief executive officer.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Comments	string	The comments for the record.
CongDistCode	string	The U.S. Congressional district code for the account.
ContentSourceNumber	string	The content source number is not used.
ControlYr	decimal	The year when current ownership gained control of the organization.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CorporationClass	string	The taxation classification for corporation entities such as Chapter S in the US.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CurrentFiscalYearPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its current fiscal year.

Name	Type	Description
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DataCloudStatus	string	Specifies the enrichment status of the person.
DbRating	string	The Dun & Bradstreet credit rating.
Disadv8aInd	string	Indicates whether the organization is considered disadvantaged by the US government under Title 8A. If the value is Yes, the organization is considered disadvantaged under Title 8A. The default value is No.
DisplayedDUNSPartyIdentifier	long	Dun and Bradstreet does not maintain data for the branch offices of companies that are located beyond North America. Data is only maintained for the company headquarters. If the data pertains only to company headquarters, the headquarters PARTY_ID is stored. If the data pertains to a branch office, the branch PARTY_ID is stored.
DoNotConfuseWith	string	Indicates existence of similarly named businesses.
DomesticUltimateDUNSNumberC	string	DUNS Number for the Domestic Ultimate, which is the highest family member in the same country as the business entity. A subject can be its own Domestic Ultimate.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	The effective latest change is not used.
EffectiveSequence	int	The effective sequence is not used.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EmployeesAtPrimaryAddress	string	The number of employees at the referenced address.
EmployeesAtPrimaryAddressEstimation	string	Indicates the calculation of employees at the primary address as estimated.

Name	Type	Description
EmployeesAtPrimaryAddressMinimum	string	Indicates the calculation of employees at the primary address as minimum.
EmployeesAtPrimaryAddressText	string	The number of employees at the referenced address that cannot be mapped to a number.
EmployeesTotal	decimal	The total number of employees.
EnquiryDUNS	string	The identifier used to query the Dun and Bradstreet data. If a location is a branch, then in some countries the headquarters DUNS number is used to do the query. Otherwise it is the same as the DUNS number.
ExportInd	string	Indicates whether the organization is an exporter. If the value is Y, then the organization is an exporter. The default value is N.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
GlobalUltimateDUNSNumberC	string	DUNS Number for the Global Ultimate, which is the highest family member in the same country as the business entity as you proceed further on this branch of the tree. A case can be its own ultimate.
GrowthStrategyDescription	string	The description of the growth strategy.
HQBranchIndicator	string	The status of this site, such as HQ, a branch, or a single location. A list of accepted values are defined in the lookup type HQ_BRANCH_IND.
HomeCountry	string	The home country associated with the party.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.

Name	Type	Description
ImportInd	string	Indicates whether the organization is an importer. If the value is Y, then the organization is an importer. The default value is N.
IncorpYear	int	The year that the business was formally incorporated.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LaborSurplusInd	string	Indicates whether the organization operates in an area with a labor surplus. If the value is Y, then the organization operates in an area with a labor surplus. The default value is N.
LastEnrichmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was last enriched in DaaS.
LastSourceUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated by the source system.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdateSourceSystem	string	The source system that last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LegalStatus	string	The legal structure of the organization such as partnership, corporation, and so on.
LineOfBusiness	string	The type of business activities performed at this site.
LocalActivityCode	string	The local activity classification code.
LocalActivityCodeType	string	The local activity classification code type identifier.

Name	Type	Description
LocalBusIdenType	string	The most common business identifiers in a country such as Chamber of Commerce Number in Italy, Government Registration Number in Taiwan. A list of accepted values are defined in the lookup type LOCAL_BUS_IDEN_TYPE.
LocalBusIdentifier	string	The primary identifier assigned to a businesses by a government agency such as Chamber of Commerce, or other authority. It is often used by countries other than USA.
MinorityOwnedInd	string	Indicates whether the organization is primarily owned by ethnic or racial minorities. If the value is Y, then the organization is owned by ethnic or racial minorities. The default value is N.
MinorityOwnedType	string	The type of minority-owned firm.
MissionStatement	string	The corporate charter of organization in user-defined text format.
NextFyPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its next fiscal year.
OobInd	string	Indicates whether the organization is out of business. If the value is Y, then the organization is out of business. The default value is N.
OrgInformation	*Trading Community Organization Profile Additional Information*	The information of the organization.
OrganizationName	string	The name of the party when the party type is Organization.
OrganizationProfileId	long	The unique identifier of the organization profile. • Primary Key
OrganizationSize	string	Size of an organization based on revenue, number of employees, and so on.
OrganizationType	string	Not used in Fusion V1.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
ParentDUNSNumberC	string	Parent is a corporation that owns more than 50 percent capital stock of another corporation. The parent company can also be a subsidiary of another corporation. If the parent also has branches, then it is headquarters and also parent company. Headquarters is a business establishment that has branches or divisions reporting to it, and is financially responsible for those branches or divisions. If the headquarters has more than 50 percent of capital stock owned by another corporation, then it is also a subsidiary. If it owns more than 50 percent of capital stock of another corporation, then it is also a parent.
ParentSubInd	string	Indicates whether the organization is a parent or subsidiary.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PreferredContactEmailAddress	string	The e-mail address of the primary contact person of the organization.
PreferredContactFormattedPhoneNumber	string	The formatted phone number of the primary contact person of the organization.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactName	string	The name of the primary contact person of the organization.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.

Name	Type	Description
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the identifying address.
PrimaryAddressCountry	string	The country listed in the TERRITORY_CODE column of the FND_TERRITORY table for the identifying address.
PrimaryAddressCounty	string	The county of the Identifying address.
PrimaryAddressLine1	string	The first line of the identifying address.
PrimaryAddressLine2	string	The second line of the Identifying address.
PrimaryAddressLine3	string	The third line of the Identifying address.
PrimaryAddressLine4	string	The fourth line of the Identifying address.
PrimaryAddressPostalCode	string	The postal code of the identifying address.
PrimaryAddressProvince	string	The province of the identifying address.
PrimaryAddressState	string	The state of the Identifying address.
PrimaryEmailAddress	string	The e-mail address of the organization.
PrimaryEmailId	long	The primary e-mail contact point ID of the organization.
PrimaryFormattedPhoneNumber	string	The primary telephone number formatted in the local format of the organization.
PrimaryLanguage	string	The standard name for a language.
PrimaryPhoneAreaCode	string	The area code within a country code.

Name	Type	Description
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The primary contact point phone ID of the organization.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	The primary uniform resource locator.
PrimaryWebId	long	The unique identifier of the primary uniform resource locator.
PrincipalName	string	The Name of the highest ranking person in the company.
PrincipalTitle	string	The title of the highest ranking person in the organization.
Pronunciation	string	The pronunciation of the organization.
PublicPrivateOwnershipFlag	boolean	Indicator to specify if the organization is privately owned. Y stands for a privately owned organization and N stands for a publicly owned organization.
RegistrationType	string	Indicates the registration type of the organization.
RentOwnInd	string	Indicates if this account owns or rents the place of business. A list of valid values for rent, own, and lease are defined in the lookup OWN_RENT_IND.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
SICCode	string	The standard industry classification (SIC) code.
SICCodeType	string	The version of the standard industry classification (SIC) code.
SeblUserKeyLoc	string	The location of the account, optional part of the user primary key.
SmallBusInd	string	Indicates whether the organization is considered as a small business. If the value is Y, then the organization is considered as a small business. The default value is N.
Status	string	The status of the record.
StockSymbol	string	The corporate stock symbol such as ORCL.
SuffixOverriddenFlag	boolean	Indicator to specify that the attribute has Y if the suffix is overridden by user and N otherwise. Default value is N.
ThirdPartyFlag	boolean	Indicator that tracks if a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. Y stands for a third party relationship, N stands for a direct relationship. If Oracle Service is installed, the third party field in the Customers window is required.
TotalEmployeesEstimatedIndicator	string	Indicates if the employee total is estimated. The accepted values are defined in the lookup type TOTAL_EMP_EST_IND.
TotalEmployeesInd	string	Indicates if subsidiaries are included in the calculation of total employees. The accepted values are defined in the lookup type TOTAL_EMPLOYEES_INDICATOR.
TotalEmployeesMinimumIndicator	string	Indicates if the number is a minimum, maximum, or average number of total employees. The accepted values are defined in the lookup type TOTAL_EMP_MIN_IND.
TotalEmployeesText	string	The total number of employees in text format.
TotalPaymentAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total number of payment experiences.

Name	Type	Description
TradingPartnerIdentifier	string	One column to store the FSIO related trading partner codes. It stores alpha numeric values and also addresses the Fed vs. Non-Fed attribute requirement.
UniqueNameAlias	string	The name as identified by the users to internally recognize the organization.
UniqueNameSuffix	string	Identifies system generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
WomanOwnedInd	string	Indicates whether the organization is primarily owned by women. If the value is Y, then the organization is primarily owned by women. The default value is N.
YearEstablished	int	The year when the organization began doing business.

Additional Account Name

An additional name of an organization, such as a legal name or a DBA name.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}AdditionalOrganizationName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Indicator to specify the preferred additional name for the organization.
PartyId	long	The unique identifier of the contact party.

Name	Type	Description
PartyName	string	The name of the party.
PartyNameId	long	The unique identifier of the party name. It is primary Key and system generated. • Primary Key
PartyNameType	string	The type of the name. It is a value defined by the additional party name and identifier type entity. The party type must be consistent with the party type that the PARTY_NAME_TYPE can be applied to.
PreferredFlag	boolean	Indicator to specify the name as preferred name for this party within the name type. Possible values are Y and N. Default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TransliterationLang	string	Used to identify the language for the name. It is validated against FND_LANGUAGES.LANGUAGE_CODE. Default value is the Session Language.

Additional Identifier

An additional identifier of a trading community member, such as driver's license number or passport number.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}AdditionalPartyId

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.

Name	Type	Description
ExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expiration date for the identifier. It may be NULL, and does not apply to all types of identifiers.
IssueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date in which the Identifier was issued. It may be NULL and does not apply to all types of identifiers.
IssuingAuthorityName	string	The issuing authority name.
IssuingAuthorityPartyId	long	The unique identifier of the issuing authority.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyIdentifierId	long	The unique identifier of the party identifier. • Primary Key
PartyIdentifierType	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.
PartyIdentifierType1	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.
PartyIdentifierValue	string	The value of the party identifier.
PartyName	string	The name of the party.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
StateProvince	string	The province of the address.
StatusCode	string	The pre-defined code used to indicate the status.

Address

An address of a trading community member, such as Oracle Corporation is located at 500 Oracle Parkway, Redwood Shores, CA.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Telex*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contains	*Trading Community Address Additional Information*
Contains	*Email*
Contains	*Electronic File Transfer*
Contained by	*Marketing Response*

Relationship Type	Object or Service
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.

Name	Type	Description
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AddressExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the location is no longer valid.
AddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines that are used in Japan.
AddressStyle	string	Style of the address.
Addressee	string	The information of the addressee.
City	string	The name of the city.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
ContactPreferenceExistFlag	boolean	Indicator to specify if the contact is primary contact for the party.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	The name of the country.
Country1	string	The attribute country1 is not used.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.

Name	Type	Description
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
DoNotValidateFlag	boolean	Indicator to specify that a particular location is not eligible for address validation irrespective of the current validation.
Eft	*Electronic File Transfer*	The electronic file transfer information for the party.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedAddress	string	The formatted read-only address.
FormattedLocaleAddress	string	The formatted read-only local address.
FormattedMultilineAddress	string	The formatted multi line address of the party site.
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
HouseType	string	Indicates the building type.
IdentifyingAddressFlag	boolean	Indicator to specify the identifying address for the party. Y stands for the indentifying site and N stands for sites that are not the indentifying site.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.

Name	Type	Description
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
Language	string	The operating language for the party site.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	The latitude of the party address.
LocationDirections	string	Directions to the location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
LocationLanguage	string	The operating language for the locations.
Longitude	decimal	The longitude of the party address.
Mailstop	string	A user-defined code to indicate a mail drop point within the organization.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary address of the contact irrespective of the context. Y stands for primary address and N stands for all others.

Name	Type	Description
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	Stores the doing-business_as (DBA) party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameDivision	string	Stores the division party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameLegal	string	Stores the legal party name for a party site. This column is used to store FSIO related legal party name attribute.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteInformation	*Trading Community Address Additional Information*	The party address information.
PartySiteName	string	The user-defined name for the site.
PartySiteNumber	string	The party site number of the address.
PartySiteType	string	Stores the party site type and is based on the lookup. Currently this is either null or one-time.
PartySiteUse	*Trading Community Address Purpose*	The information of the party address usage.
PartyUsageCode	string	The usage context of a party's contact point.
Phone	*Phone*	The phone information for the entity.
Position	string	The primary direction such as north or east that is used to access the location.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four digit extension to the United States postal ZIP code.
Province	string	The name of the province.

Name	Type	Description
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The Telex information associated with the party.
UsageCode	string	The usage code is not used.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	The standardized status code describing the results of the validation.
Web	*Web*	The web information related to the record.

Certification

The certification information of a trading community member, such as a full ISO 9001 registered firm.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}Certification

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*

Relationship Type	Object or Service
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CertificationId	long	The unique identifier for certification. • Primary Key
CertificationName	string	The name of the certification such as ISO9000 and GMP001.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrentStatus	string	The name for the status of the certification. For example, applied for, granted, or expired.
ExpiresOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification expires.

Name	Type	Description
Grade	string	The level or grade of certification provided by the ISSUED_BY_AUTHORITY. For example, founding member, gold, fully certified, and partially certified.
IssuedByAuthority	string	The name of the certifying authority.
IssuedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification was issued.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Classification Assignment

The classification code assigned to a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CodeAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*

Relationship Type	Object or Service
Contained by	*Sales Competitor*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Reference*
Handled by	*Sales Reference Customer*
Handled by	*Company and User Registration*
Handled by	*Sales Party*
Handled by	*Sales Competitor Service*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party Territory service*
Handled by	*Sales Party Resource Service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassCategory	string	The name of the classification category.

Name	Type	Description
ClassCode	string	The code of the classification.
CodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an object. It is primary key and system generated. • Primary Key
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableKey1	string	The first column of the alphanumeric or multi-part foreign key.
OwnerTableKey2	string	The second column of the alphanumeric or multi-part foreign key.
OwnerTableKey3	string	The third column of the alphanumeric or multi-part foreign key.

Name	Type	Description
OwnerTableKey4	string	The fourth column of the alphanumeric or multi-part foreign key.
OwnerTableKey5	string	The fifth column of the alphanumeric or multi-part foreign key.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PrimaryFlag	boolean	Indicator that specifies if this is the primary class code of a class category for the organization. Y stands for the primary class code and N stands for all others.
Rank	decimal	Ranks classes if multiple classes are assigned to a party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Contact Preference

The contact preference of the trading community member. For example, do not call Joe Smith between 10 a.m. and 12 noon on weekdays.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}ContactPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Electronic Data Interchange*

Relationship Type	Object or Service
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Household*
Contained by	*Phone*
Contained by	*Telex*
Contained by	*Web*
Contained by	*Contact Address*
Contained by	*Electronic File Transfer*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactLevelTable	string	The table that stores the contact level of the contact preference, and uses the SUBJECT_TABLE lookup. The list of accepted values are HZ_PARTIES, HZ_PARTIES_SITES, or HZ_CONTACT_POINTS.
ContactLevelTableId	long	The foreign key to the table specified in CONTACT_LEVEL_TABLE column. The list of accepted values are PARTY_ID from HZ_PARTIES table, CONTACT_POINT_ID from HZ_CONTACT_POINTS table, or PARTY_SITE_ID from HZ_PARTY_SITES table.
ContactPreferenceId	long	The unique identifier for the contact preference. • Primary Key
ContactType	string	The contact party type that defines whether the contact is a sales account, a prospect, a contact, or any other user-defined party type. The default value is CUSTOMER. A list of accepted values is defined in the lookup CONTACT_TYPE.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
MaximumNoOfInteractUOMCode	string	The period of time during which the maximum number of interactions applies. Uses the MAX_NO_OF_INTERACT_UOM_CODE lookup.
MaximumNoOfInteractions	decimal	The number of times you can use this contact point. The period of time that this number applies is stored in the MAX_NO_OF_INTERACT_UOM_CODE column.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PreferenceCode	string	Indicates whether to use a particular contact method. The list of accepted values are defined in the PREFERENCE_CODE lookup.
PreferenceEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes inactive.
PreferenceEndTimeHR	int	The hour part of time when the contact preference becomes inactive. The time is recorded in the 24 hour format.
PreferenceEndTimeMi	int	The minutes part of the time when the contact preference becomes inactive.
PreferenceStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes active.
PreferenceStartTimeHR	int	The hour part of time when the contact preference becomes active. The time is recorded in the 24 hour format.
PreferenceStartTimeMi	int	The minutes part of the time when the contact preference becomes active.
PreferenceTopicType	string	The appropriate subjects to send the party that the preference is created for. The list of accepted values are defined in the PREFERENCE_TOPIC_TYPE lookup.
PreferenceTopicTypeCode	string	The code of the preference topic type.

Name	Type	Description
PreferenceTopicTypeId	long	The unique identifier of the preference topic type.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
RequestedBy	string	Indicates if the permission or restriction was created internally or requested by the party. The list of accepted values are defined in the REQUESTED_BY lookup.
Status	string	The status of the record.

Credit Rating

The trading community member's credit rating information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CreditRating

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AverageHighCredit	decimal	The average of all the high credit experiences.
BankruptcyInd	string	Indicates if open bankruptcy exists. Y stands for any open bankruptcy that exists and N stands for no open bankruptcy.
BusinessDiscontinued	string	The business discontinued at the listed location. Prompts reader to contact D and B customer service center if any business is operating.
ClaimsInd	string	Indicates if open claims, legal claims, liens, protested bills, or any equivalent information exists. Y stands for availability of information and N stands for no information.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRatingId	long	The unique identifier of the credit rating. • Primary Key
CreditRiskScoreExplain	string	Explains numeric credit risk score that estimates the risk of delinquent payment over the next 12 months.

Name	Type	Description
CreditScore	string	Indicates the risk of delinquent payments.
CreditScoreAge	decimal	Indicates the age of the credit score expressed in months.
CreditScoreClass	decimal	The date when the credit score was calculated.
CreditScoreCommentary	string	The lookup for explanation codes in the CREDIT_SCORE column.
CreditScoreCommentary10	string	Indicates comments about the credit score.
CreditScoreCommentary2	string	Indicates comments about the credit score.
CreditScoreCommentary3	string	Indicates comments about the credit score.
CreditScoreCommentary4	string	Indicates comments about the credit score.
CreditScoreCommentary5	string	Indicates comments about the credit score.
CreditScoreCommentary6	string	Indicates comments about the credit score.
CreditScoreCommentary7	string	Indicates comments about the credit score.
CreditScoreCommentary8	string	Indicates comments about the credit score.
CreditScoreCommentary9	string	Indicates comments about the credit score.
CreditScoreDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the credit score was calculated.
CreditScoreIncdDefault	decimal	Indicates the probability expressed as a percentage of delinquency for a score range or class.
CreditScoreNatlPercentile	decimal	Indicates the relative credit rating of a business compared to all businesses whose credit ratings are included in the local country database.
CreditScoreOverrideCode	string	Indicates why no score was calculated or why score is equal to zero in the US.

Name	Type	Description
CriminalProceedingInd	string	Indicates if criminal proceedings exist. Y stands for availability of information and N stands for no information.
DebarmentInd	string	Indicates whether the company is debarred from doing business with government agencies. Y stands for company debarred and N stands for not debarred.
DebarmentsCount	decimal	The count of filings by government agencies in the United States that prohibit the party from entering into contracts or transactions with those agencies.
DebarmentsDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date of the most recent filing to prohibit the party from entering into contracts or transactions with a government agency in the United States.
DelqPmtPctgForAllFirms	decimal	Specifies a delinquency percentage for all firms.
DelqPmtRngPrcnt	decimal	Specifies a delinquency percentage for credit score range.
Description	string	The free text description of the record.
DetHistoryInd	string	The code that indicates if detrimental information exists for the party and whether complete details exist on management and party. Y stands for availability of information and N stands for no information.
DisasterInd	string	Indicates if information exists about disasters such as fires, hurricanes, and so on. Y stands for availability of information and N stands for no information.
FailureScore	string	For US, the failure risk class, 1 through 5. For Canada , the stability score that indicates risk of business closure, 1 through 10. For Australia, the percentile failure score.
FailureScoreAge	decimal	The failure score age in months.
FailureScoreClass	decimal	1 through 5 to indicate risk of financial stress for a customer account. 1 for a business with greatest risk and 5 for a business with least risk.
FailureScoreCommentary	string	The comments related to failure score.

Name	Type	Description
FailureScoreCommentary10	string	The comments related to failure score.
FailureScoreCommentary2	string	The comments related to failure score.
FailureScoreCommentary3	string	The comments related to failure score.
FailureScoreCommentary4	string	The comments related to failure score.
FailureScoreCommentary5	string	The comments related to failure score.
FailureScoreCommentary6	string	The comments related to failure score.
FailureScoreCommentary7	string	The comments related to failure score.
FailureScoreCommentary8	string	The comments related to failure score.
FailureScoreCommentary9	string	The comments related to failure score.
FailureScoreDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the failure score was calculated.
FailureScoreIncdDefault	decimal	Probability, in percentage, of failure for score range of class.
FailureScoreNatnlPercentile	decimal	The national percentile that reflects the relative ranking of a company among all scored companies in the local country database.
FailureScoreOverrideCode	string	In Europe, code for the reason for variance between the D and B rating and the failure score. In the US, code for the reason why no score was calculated, or why the score is zero.
FinclEmbtInd	string	Indicates if open bankruptcy, receivership liquidation, or any equivalent information exists. Y stands for availability of information and N stands for no information.
FinclLglEventInd	string	Indicates if special events such as financial embarrassment and legal filings exist. Y stands for availability of information and N stands for no information.
GlobalFailureScore	string	The global score for the risk of business default.

Name	Type	Description
HighCredit	decimal	Maximum credit ever extended to the organization.
HighRngDelqScr	decimal	Specifies the high end of the range of the commercial credit score.
JudgementInd	string	Indicates if open judgments exist. Y stands for any open judgment that exists and N stands for no open judgments.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LienInd	string	Indicates if open liens exist. Y stands for any open lien that exists and N stands for no open liens.
LowRngDelqScr	decimal	Specifies the low end of the range of the commercial credit score.
MaximumCreditCurrencyCode	string	The currency used to denominate the MAXIMUM_CREDIT_RECOMMENDATION column.
MaximumCreditRecommendationAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Maximum credit limit recommended for the currency specified in the MAXIMUM_CREDIT_CURRENCY_CODE column.
NegvPmtExpl	string	The conditional comment generated when negative payments are present.
NoTradeInd	string	Indicates that no trade experiences exist. Y stands for any trade experience that exists and N stands for no trade experience.
NumberParentBankruptcyConversions	decimal	The number of bankruptcy conversions by the parent.
NumberParentBankruptcyFiling	decimal	The number of bankruptcies filed by the parent.
NumberSpecialEvent	decimal	The number of occurrences of the special events.

Name	Type	Description
NumberTradeExperiences	decimal	The number of trade experiences.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OprgSpecificationEvntInd	string	Indicates if information exists about operational changes such as name changes, management changes, change of control, moves, and so on. Y stands for availability of information and N stands for no information.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OtherSpecificationEvntInd	string	Indicates if special events exist that are not otherwise specified.
ParentHQBankruptcyInd	string	Indicates if parent (P) or headquarters (H) are entered into bankruptcy.
PartyId	long	The unique identifier of the contact party.
PaydexComment	string	Additional paydex information.
PaydexFirmComment	string	Comment on the paydex score for the organization.
PaydexFirmDays	string	The number of days used in the paydex score.
PaydexIndustryComment	string	Comment on the paydex score for the industry.
PaydexIndustryDays	string	The number of days used in the paydex score for the industry.
PaydexNorm	string	Median or average Paydex score for the industry.
PaydexScore	string	Paydex score for the previous 12 months payment history.
PaydexThreeMonthsAgo	string	Paydex score three months ago.
PrntBkcyChapterConv	string	The change of bankruptcy type.

Name	Type	Description
PrntBkcyConvDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the bankruptcy converted from one type to another.
PrntBkcyFilgChapter	decimal	The chapter number of the bankruptcy filed by the parent under the US uniform commercial code.
PrntBkcyFilgDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The bankruptcy filing date of the parent.
PrntBkcyFilgType	string	The type of bankruptcy filed by the parent.
PubRecExpl	string	The conditional comment generated if suits, liens, and judgments exist.
RatedAsOfDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the rating was acquired.
Rating	string	The rating number or code of the rating company.
RatingOrganization	string	The name of the credit rating organization.
RequestId	long	A system-generated read-only attribute used by the application framework.
SecuredFlngInd	string	Indicates if open secured filings such as UCC filings, secured charges or mortgages pledging, or any equivalent information exists. Y stands for availability of information and N stands for no information.
SlowTradeExpl	string	The conditional comment generated when paydex score indicates that slow trade experiences are present.
SpecialEventComment	string	The comment generated if special event section exists.
SpecialEventText	string	The narrative of the special event.
SpecialEventUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the special event was updated.
Status	string	The status of the record.

Name	Type	Description
SuitInd	string	Indicates if open suits exist. Y stands for any open suit that exists and N stands for no open suits.

Customer Contact Profile

The person who functions as a contact for an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Organization Contact Additional Information*
Contains	*Customer Contact Responsibility*
Contains	*Source System Reference*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
ContactFormattedAddress	string	The formatted version of the contact address.
ContactFormattedMultilineAddress	string	The formatted multiline version of the contact address.
ContactName	string	The name of the contact.
ContactNumber	string	The user-defined identification number for this contact.
ContactPartyId	long	The unique identifier of the contact.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerEmailAddress	string	The e-mail address of the customer this contact person belongs to.
CustomerName	string	The name of the customer.

Name	Type	Description
CustomerPartyId	long	The unique identifier of the customer this contact person belongs to.
CustomerPartyNumber	string	The alternate unique identifier of the customer this contact person belongs to.
CustomerUniqueName	string	The unique name of the customer. For an Organization, the value is a concatenation of unique_name_alias and suffix. For a Person, the value is a concatenation of person_name and suffix.
DecisionMakerFlag	boolean	Indicates if this contact is a decision maker. If the value is True, then the contact is a decision maker.
Department	string	The free form text used to name the department for the contact.
DepartmentCode	string	The department code for the contact. A list of accepted values is defined in the lookup DEPARTMENT_TYPE.
EmailAddress	string	The email address associated with the record.
FormattedAddress	string	The formatted address information.
FormattedPhoneNumber	string	The formatted phone number.
JobTitle	string	The free form text for job title.
JobTitleCode	string	The code given to the job title.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OrgContactId	long	The unique identifier of the organization contact. • Primary Key
OrgContactInformation	*Trading Community Organization Contact Additional Information*	The information of the organization contact.
OrganizationContactRole	*Customer Contact Responsibility*	The role of the contact in the organization.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyRelationshipId	long	The unique identifier of the relationship of the party.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteName	string	The address associated with the party site.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonCertReasonCode	string	The reason for the organization's current certification level assignment. A list of accepted values is defined using the lookup HZ_PARTY_CERT_REASON.
PersonCertificationLevel	string	The certification level of a organization. A list of accepted values is defined in the lookup HZ_PARTY_CERT_LEVEL.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLanguageName	string	The language name associated with the person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.

Name	Type	Description
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.
PersonPreviousLastName	string	The previous last name of a person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.
Rank	string	The rank associated with this customer contact.
ReferenceUseFlag	boolean	Indicates if this contact can be used as a reference. If the value is Y, then the contact can be used as a reference.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
SalesAffinityCode	string	The affinity of a contact to the deploying organization. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_AFFINITY_CODE.
SalesAffinityComments	string	The comments about the contact's affinity to the deploying organization.
SalesBuyingRoleCode	string	The roles played by a contact in the buying process, for example, decision maker or supporting role. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_BUY_ROLE_CODE.
SalesInfluenceLevelCode	string	The influence of the contact has on the deploying organization. A list of accepted values are defined in the lookup HZ_SLS_CNTCT_INFLUENCE_LVL_CD.
Salutation	string	The size of the household this person is a part of.
WebUrl	string	The web URL of contact point.

Customer Contact Responsibility

The role or responsibility of an organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContactRole

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Customer Contact Profile*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The organization contact identifier. Foreign key to the HZ_ORG_CONTACTS table.

Name	Type	Description
OrgContactRoleId	long	The unique contact role identifier. It is primary key and system generated. • Primary Key
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PrimaryContactPerRoleType	string	Indicates if the contact is the primary contact for the role. Y stands for primary contact and N stands for a contact that is not the primary contact for the role type. The default value is N.
PrimaryFlag	boolean	Indicator that specifies if this is the primary role for the contact. Y stands for primary role and N stands for a non-primary role for the contact. The default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
RoleLevel	string	The role level of the contact. For example, executive, department head, or middle manager.
RoleType	string	The role performed by a contact.
Status	string	The status of the record.

Electronic Data Interchange

The electronic data interchange information associated with a trading community member. For example, the details of standard codes and payment methods that are to be used for data interchange.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Edi

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EDIEceTpLocationCode	string	The trading partner location code for EDI Gateway.
EDIIdNumber	string	The EDI trading partner number for the supplier site.
EDIPaymentFormat	string	Indicates type of information being transmitted with the funds if using EDI_PAYMENT_METHOD ACH. The list of accepted values are CCD, CCP, CHZ, CTX, PPD, and PPP.
EDIPaymentMethod	string	Indicates how a payment is to be made through EDI. The list of accepted values are ACH and BOP.
EDIRemittanceInstruction	string	Indicates who will send the remittance advice. The list of accepted values are Banks or Payables systems.
EDIRemittanceMethod	string	Indicates how remittance advice are sent to the supplier.
EDITpHeaderId	long	The unique identifier of the EDI transaction header.
EDITransactionHandling	string	The ANSI standard code for EDI transaction type.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary EDI of the associated object. If the value is True, then this is the primary EDI. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Electronic File Transfer

The electronic funds transfer information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Eft

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EFTPrintingProgramId	long	The printing program identifier.
EFTSWIFTCode	string	The EFT swift code information.
EFTTransmissionProgramId	long	The transmission program identifier.
EFTUserNumber	string	The number that identifies you as a user of electronic funds transfer service for your bank or clearing organization.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

E-Mail

The e-mail address associated with a trading community member. For example, john.doe@oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Email

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The preferred format for e-mail addressed to this address such as HTML or ASCII. A list of accepted values is defined using the lookup EMAIL_FORMAT.
EmailInformation	*Trading Community Contact Point Additional Information*	The additional information about the e-mail.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary e-mail of the associated object. If the value is True, then this is the primary e-mail. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.

Name	Type	Description
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

E-Mail Domain

The domain of the e-mail address associated with a trading community member. For example, ABC Corporation has CORP and BUSINESS e-mail domains.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}EmailDomain

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DomainName	string	The actual or non-reversed domain name of the organization for display purpose.
EmailDomainId	long	The sequence generated unique identifier. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
Status	string	The status of the record.
TransposedDomain	string	The reversed domain name for the purposes of searching.

Expertise

The expertise of a partner.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerExpertise

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Partner Generic List of Values*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ExpertiseCode	string	The expertise code of the partner expertise.
ExpertiseName	string	The expertise name of the partner expertise.

Partner Generic List of Values

The generic list of multiple values used for certifications and expertise.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerProfileMultivalueLov

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Partner Certification*
Extended by	*Expertise*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
LookupCode	string	The value from a multi-value list of values category that applies to the profile.
LookupType	string	The list of values code that defines the category to which the list of values belong. This value indicates the profile field to which the value belongs.
PartnerMultivalLovId	long	The unique identifier of the list of values code selected for a specific multi-value field in the partner profile. • Primary Key
PartyId	long	The unique identifier of the contact party.

Financial Number

The financial report numbers of a trading community member, such as assets, liabilities, and cash balance.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}FinancialNumber

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Financial Report*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FinancialNumber	decimal	The value for the financial number. For example, the FINANCIAL_NUMBER_NAME column could have a numerical value of 3,000,000,000 for annual sales.
FinancialNumberCurrency	string	The ISO currency code for the financial number.
FinancialNumberId	long	The unique identifier of the financial number. • Primary Key
FinancialNumberName	string	A text field that lets you assign a descriptive name to a financial report item. For example, gross annual sales, profit, and net annual sales. A user-defined lookup.
FinancialReportId	long	The unique identifier of the financial report.

Name	Type	Description
FinancialUnitsApplied	decimal	The order of magnitude (tens, hundreds, thousands, and so on) used for the FINANCIAL_NUMBER column.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ProjectedActualCode	string	Indicates if the projected amount is projected or actual. The list of accepted values are P and A. The default value is A.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Financial Profile

The financial details of a trading community member, such as bank account information that was obtained as part of a credit evaluation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}FinancialProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessAuthorityDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when access to the information in the account was granted.
AccessAuthorityGranted	string	Indicates whether access to information in a financial account was granted. If the value is True, then the access has been granted.
BalanceAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The reported balance on an account. The balance can be a positive number, negative number, or zero.
BalanceVerifiedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the account balance was verified.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FinancialAccountNumber	string	The alternate unique identifier of the financial account.

Name	Type	Description
FinancialAccountType	string	The short name that classifies the financial accounts. For example, savings, checking, home loan, personal loan, trading, and so on.
FinancialOrgType	string	The classification of financial organizations. For example, bank, savings and loan, private lender, building society and so on.
FinancialOrganizationName	string	The name of the financial organization that holds the account.
FinancialProfileId	long	The unique identifier of the party's financial profile. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Financial Report

The financial report information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}FinancialReport

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Financial Number*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AuditInd	string	Indicates if the financial reports are audited. If the value is True, then the financial reports have been audited.
ConsolidatedInd	string	Indicates if the financial reports are consolidated. If the value is C, then the reports are consolidated.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateReportIssued	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the financial report was published.
DocumentReference	string	The unique reference number such as passport number or naturalization reference number associated with DOCUMENT_TYPE.
EstimatedInd	string	Indicates whether the financial reports provide estimated data. If the value is True, then the financial reports provide the data.
FinalInd	string	Indicates whether the financial reports are the final closing statements for a business that has ceased operations. If the value is True, then the reports are final closing statements.
FinancialNumber	*Financial Number*	The number that indicates a financial value like annual sales.
FinancialReportId	long	The unique identifier for a financial report. • Primary Key
FiscalInd	string	Indicates whether the financial reports cover a fiscal twelve-month accounting period. If the value is Y, then the financial report covers a twelve-month fiscal period.
ForecastInd	string	Indicates whether the financial reports display forecasts or future projections. If the value is Y, then the financial report displays forecasts.
IssuedPeriod	string	The period covered by the financial report. For example, fiscal year 1999, 1998, and so on.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OpeningInd	string	Indicates whether the financial reports are the opening statements for a business. If the value is Y, then the financial statements are opening statements.

Name	Type	Description
PartyId	long	The unique identifier of the contact party.
ProformaInd	string	Indicates if the financial reports are pro forma numbers. If the value is Y, then the financial reports are pro forma numbers.
QualifiedInd	string	Indicates whether the financial reports include qualifying remarks from auditors about the fairness and accuracy of the numbers. If the value is Y, then the report is qualified by auditors.
ReportEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date of the report, used instead of Issued Period.
ReportStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date of the report, used instead of Issued Period.
RequestId	long	A system-generated read-only attribute used by the application framework.
RequiringAuthority	string	The name of the primary organization that requires this financial report. For example, auditors, the Federal Trade Commission, or the Internal Revenue Service.
RestatedInd	string	Indicates whether the financial reports include data that was corrected after the original financial reports. If the value is Y, then the report has been corrected.
SignedByPrincipalsInd	string	Indicates whether the financial reports were signed by the principals of the organization. If the value is Y, then the reports are signed.
Status	string	The status of the record.
TrialBalanceInd	string	Indicates whether the financial reports include trial balance numbers. If the value is Y, then the financial report includes trial balance numbers.
TypeOfFinancialReport	string	A name for the financial report. For example, 10K report, Annual Report, or Shareholder's Special Report.
UnbalancedInd	string	Indicates whether the financial reports include balance sheet accounts that do not balance. If the value is Y, then report includes unbalanced balance sheet accounts.

Name	Type	Description
WhUdpateId	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the record was entered or changed in a data warehouse.

Industries Served

The industries in which a partner operates.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerIndustryServed

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Partner Dimension Member*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassificationCategory	string	The classification category of the industry served.
ClassificationCode	string	The classification code of the industry served.
ClassificationName	string	The classification name of the industry served.

Partner Dimension Member

A generic list of multiple values used for territory dimensions.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Industries Served*
Extended by	*Focus Areas*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK1 column.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	A specific type of item within the dimension code. For example, for the products dimension, product items and product categories are there.

Name	Type	Description
DimensionCode	string	The dimension of the item being stored. For example, geography.
DimensionMemberName	string	The name of the dimension member.
DimensionMemberNameBackup	string	The name of the dimension member to which this record refers to. This is stored in case the dimension member was removed and the user still requires the name of the item that was removed.
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerId	long	The unique identifier of the entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of the table. • Primary Key
TerrDimMemberId	long	The key data for the territory dimension.
TerrDimPartitionId	long	The primary key.

Name	Type	Description
TypeCode	string	The type of the partition.

Instant Messaging

The instant messaging information of a trading community member, such as the AOL identifier or Yahoo Messenger information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}InstantMessaging

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Relationship Type	Object or Service
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.

Name	Type	Description
InstantMessagingAddress	string	The instant messaging information address.
InstantMessagingInformation	*Trading Community Contact Point Additional Information*	The instant messaging information related to the record.
InstantMessengerType	string	The type of the instant messenger type.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary instant messaging Id of the associated object. If the value is True, then this is the primary instant messaging Id. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party

Name	Type	Description
		or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Location Details

The details about a geographical or physical location. For example, 500 Oracle Parkway, Redwood Shores, CA 94065.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/}Location

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Location Profile Additional Information*
Contains	*Location Locale*
Contains	*Source System Reference*
Contains	*Location Profile*
Handled by	*Trading Community Location*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddrElementAttribute1	string	The additional address element to support flexible address format.
AddrElementAttribute2	string	The additional address element to support flexible address format.
AddrElementAttribute3	string	The additional address element to support flexible address format.
AddrElementAttribute4	string	The additional address element to support flexible address format.
AddrElementAttribute5	string	The additional address element to support flexible address format.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AddressEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address becomes effective.
AddressExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address is no longer active.
AddressLinesPhonetic	string	The phonetic or kana representation of the Kanji address lines (used in Japan).
AddressStyle	string	The context value for Flexible Address Format descriptive flex field. Do not use this column, join to the FND_TERRITORIES table via

Name	Type	Description
		COUNTRY = TERRITORY_CODE to retrieve the address style for the country.
Building	string	The specific building name or number at a given address.
City	string	The name of the city.
CliiCode	string	Common Language Location Identifier (CLLI) code.
Comments	string	The comments for the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
Description	string	The free text description of the record.
Distance	decimal	The distance from the input location.
DoNotValidateFlag	boolean	Indicates that a particular location should not validated, regardless of the current validation status code. If the value is Yes, then the location is not validated. The default is No.
EffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the location becomes valid.
FaLocationId	long	Foreign key to the FA_LOCATIONS table.
FloorNumber	string	The floor number of the address.
GeometryStatusCode	string	The spatial data integration status for given location.

Name	Type	Description
HouseType	string	Indicates the building type for the building in the address. A list of valid values are defined in the lookup HZ_HOUSE_TYPE.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
Language	string	The language used in the location.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	The latitude information for the address. The latitude information for the location is used for spatial proximity and containment purposes.
LocationDirections	string	The directions to the address location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table. • Primary Key
LocationInformation	*Trading Community Location Profile Additional Information*	The detailed information about the location.
LocationLocale	*Location Locale*	The location or address information in the local language.
LocationProfile	*Location Profile*	The profile information of the location.
Longitude	decimal	The longitude information for the address. The longitude information for the location is used for spatial proximity and containment purposes.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
Position	string	The primary direction such as North or East that is used to access the location.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four-digit extension to the United States Postal ZIP code for the address.
Province	string	The name of the province.
RequestId	long	A system-generated read-only attribute used by the application framework.
SalesTaxGeocode	string	The US Sales Tax Jurisdiction code. This provides a Jurisdiction Code (also called as Geocode) defined by either Vertex or Taxware. This value is passed as a ship-to location jurisdiction code to the tax partner API.
SalesTaxInsideCityLimits	string	Indicates if the location is inside the boundary of a city. Used to calculate state and local taxes in the United States. If the value is 1, then the location is within city limits.
ShortDescription	string	The short description of the location.
State	string	The name of the state.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TimezoneCode	string	The code of the time zone for the location.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.

Name	Type	Description
ValidationStatusCode	string	A standardized status code describing the results of the validation. The value is internally set by system during address cleansing.

Location Locale

The details about a location or address in the local language.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/}LocationLocale

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Location Details*
Handled by	*Trading Community Location*
Handled by	*Company and User Registration*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddrElementAttribute1	string	The additional address element to support flexible address format.
AddrElementAttribute2	string	The additional address element to support flexible address format.
AddrElementAttribute3	string	The additional address element to support flexible address format.
AddrElementAttribute4	string	The additional address element to support flexible address format.

Name	Type	Description
AddrElementAttribute5	string	The additional address element to support flexible address format.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
Building	string	The specific building name or number at a given address in the local language.
City	string	The name of the city.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FloorNumber	string	The floor number of the address in the local language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PostalCode	string	The postal code element of the address.

Name	Type	Description
PostalPlus4Code	string	The four-digit extension to the United States Postal ZIP code for the address.
Province	string	The name of the province.
State	string	The name of the state.
TransliterationLang	string	The language used to define the address elements of the location. The list of accepted values are defined in the FND_LANGUAGES.LANGUAGE_COD lookup.

Location Profile

The profile information of a location.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/}LocationProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Location Details*
Handled by	*Trading Community Location*
Handled by	*Company and User Registration*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddrElementAttribute1	string	The additional address element to support flexible address format.

Name	Type	Description
AddrElementAttribute2	string	The additional address element to support flexible address format.
AddrElementAttribute3	string	The additional address element to support flexible address format.
AddrElementAttribute4	string	The additional address element to support flexible address format.
AddrElementAttribute5	string	The additional address element to support flexible address format.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
Building	string	The specific building name or number at a given address.
City	string	The name of the city.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	Indicates whether the row has the latest change in the day. If the value is True, then this row has the latest change in the day.

Name	Type	Description
EffectiveSequence	int	The order of the different changes made during the day. The lowest value represents the earliest change in the day.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
FloorNumber	string	The floor number of the address.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
LocationProfileId	long	The unique Identifier for a location profile. • Primary Key
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PostalCode	string	The postal code element of the address.
Province	string	The name of the province.
RequestId	long	A system-generated read-only attribute used by the application framework.
State	string	The name of the state.
ValidationSstFlag	boolean	Indicates if the location information has been validated. If the value is Y, then the location has been validated.
ValidationStatusCode	string	A standardized status code describing the results of the validation. The value is internally set by system during address cleansing.

Partner

The set of partner profile attributes used to provide values while creating or changing a partner account.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}Partner

Logical Business Objects

- CRM : Partner Management : Partner

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Partner E-Mail*
Contains	*Partner Geography Served*
Contains	*Address*
Contains	*Partner Members*
Contains	*Web*
Contains	*Partner Dimension Member*
Contains	*Classification Assignment*
Contains	*Partner Public Contact*
Contains	*Partner Account Resource*
Contains	*Partner Generic List of Values*
Contains	*Expertise*
Contains	*Industry Served*
Contains	*Partner Certification*
Contains	*Phone*

Relationship Type	Object or Service
Contains	*Focus Areas*
Contains	*Partner Phone*
Contains	*Partner Type*
Contains	*Email*
Contained by	*Deal Registration*
Contained by	*Program Enrollments*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountDirectorId	long	The unique identifier of a valid employee resource who owns and manages the partner sales account.
Address1	string	The first line of the address.
AnalysisFy	string	The fiscal year that the financial information is based on.
AnnualRevenue	decimal	The partner's annual revenue. This field is maintained by the channel manager and partner administrator.
Auxiliary1ClassCode	string	The auxiliary Class Code 1 for a classification.

Name	Type	Description
Auxiliary1CodeAssignmentId	long	The unique identifier of the assignment of the auxiliary Class Code 1.
Auxiliary1EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 1 is no longer active.
Auxiliary1StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 1 becomes effective.
Auxiliary2ClassCode	string	The auxiliary Class Code 2 for a classification.
Auxiliary2CodeAssignmentId	long	The unique identifier of the assignment of the auxiliary Class Code 2.
Auxiliary2EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 2 is no longer active.
Auxiliary2StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 2 becomes effective.
Auxiliary3ClassCode	string	The auxiliary Class Code 3 for a classification.
Auxiliary3CodeAssignmentId	long	The unique identifier of the assignment of the auxiliary Class Code 3.
Auxiliary3EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 3 is no longer active.
Auxiliary3StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the auxiliary Class Code 3 becomes effective.
BusinessScope	string	The physical class of business in which a business participates. For example, local, national, or international.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CeoTitle	string	The formal title of the chief executive officer.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.

Name	Type	Description
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
City	string	The name of the city.
ClassificationTypes	*Classification Assignment*	The classification type of a partner.
CompanyNumber	string	The partner's company number that is an alternate unique identifier of the partner. This value is maintained by the channel manager and partner administrator.
ComplianceReviewedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the compliance review for the partner was last completed.
ComplianceStatus	string	Indicates whether the partner is compliant with vendor's criteria such as certifications, training, and so on. If the value is True, then the partner is compliant.
ControlYr	decimal	The year when current ownership gained control of the organization.
CorpCurrencyCode	string	Corporate currency
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	Currency
CurrentFyPotentialRevenue	decimal	The estimated revenues that can be earned by the organization during its current fiscal year.
DUNSNumber	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DbRating	string	The Dun & Bradstreet credit rating.
Description	string	The free text description of the record.

Name	Type	Description
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EligibleForPublicProfile	string	Indicates whether the partner is eligible to publish their public profile. If the value is True, then the partner can publish their public profile.
Email	*E-Mail*	The email address associated with the record.
EmployeesTotal	decimal	The total number of employees.
ExportInd	string	Indicates whether the organization is an exporter. If the value is Y, then the organization is an exporter. The default value is N.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
FormattedAddress	string	The formatted address information.
FormattedPhoneNumber	string	The formatted phone number.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
GeoNameReferenceId	long	The unique name reference identifier.
GeographyId	long	The geography ID for the geography served by the partner.
HomeCountry	string	The home country associated with the party.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
IncorpYear	int	The year that the business was formally incorporated.

Name	Type	Description
IndustryClassCode	string	The Industry classification code. The classification codes are defined for every classification category as specified in IndustryCodeType attribute.
IndustryCodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code.
IndustryCodeEndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the industry class code is no longer valid.
IndustryCodeStartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the industry class code applies to the industry.
IsSelfRegisteredPartner	string	Indicates whether the partner registered through the self-service user interface.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LastTerritoryAssignedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the territory was last assigned.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LegalStatus	string	The legal structure of the organization such as partnership, corporation, and so on.
LineOfBusiness	string	The type of business activities performed at this site.
Location	string	The location information of the partner.
LockTerritoryAssignment	string	Indicates if the automatic territory assignment can be set. If the value is True, then the automatic territory assignment cannot remove the sales account team resource. The default value is False.

Name	Type	Description
MinorityOwnedInd	string	Indicates whether the organization is primarily owned by ethnic or racial minorities. If the value is Y, then the organization is owned by ethnic or racial minorities. The default value is N.
MinorityOwnedType	string	The type of minority-owned firm.
NextFyPotentialRevenue	decimal	The estimated revenues that can be earned by the organization during its next fiscal year.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OpportunitiesWonPriorYear	decimal	Opportunities that the partner sales representatives closed and won in the prior fiscal year.
OpportunitiesWonYTD	decimal	Opportunities that the partner sales representatives closed and won in the current fiscal year-to-date.
OrgTypeClassCode	string	The classification code for the organization type.
OrgTypeCodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an organization type.
OrgTypeCodeEndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the organization type class code is no longer valid.
OrgTypeCodeStartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the class code applies to the organization type.
OrganizationName	string	The name of the party when the party type is Organization.
OrganizationProfileId	long	The unique identifier of the organization profile.
OrganizationSize	string	The size of the organization based on its revenue, number of employees, and so on.
OrigSystem	string	The source system name.

Name	Type	Description
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference.
OwnerName	string	The name of a valid employee resource that owns and manages the partner account.
OwnerPersonPartyId	long	The unique identifier of a valid employee resource who owns and manages the partner account.
ParentPartnerPartyId	long	A foreign key reference to the TCA party records that represents the Partner's parent company.
ParentPartnerPartyNumber	string	Candidate for public surrogate key field and serves as a user-entered identifier for the Partner's Parent company.
ParentPk1Value	string	Attribute Deprecated, use Attribute ParentPartnerPartyId instead
PartnerAccountId	long	The unique identifier of the partner account resource team member.
PartnerAccountResourceToAccountP	*Partner Account Team*	The list of account resources for the partner account.
PartnerCertificationP	*Partner Certification*	The list of certifications for partner.
PartnerDimensionMemberPVO	*Partner Dimension Member*	The list of dimension members for the partner.
PartnerEmailPVO	*Partner E-Mail*	The list of e-mails for the partner.
PartnerExpertise	*Expertise*	The list of expertise for the partner.
PartnerFaxPVO	*Partner Phone*	The list of fax for the partner.
PartnerGeography	*Geographies Served*	The list of geographies served by the partner.
PartnerIndustry	*Industries Served*	The list of industries served by the partner.
PartnerLevel	string	The relative tier of the partner.

Name	Type	Description
PartnerMember	*Partner Members*	The list of members for a partner.
PartnerMemberPVO	*Partner Public Contact*	The public contact information of the partner.
PartnerPhonePVO	*Partner Phone*	The list of phones of the partner.
PartnerProductSpeciality	*Focus Areas*	The list of product specialties of the partner.
PartnerProfileMultivalueLovP	*Partner Generic List of Values*	The list of partner profile values for the partner.
PartnerSummary	string	The description of the partner company.
PartnerTypeDimensionMemberP	*Partner Type*	The list of partner type dimensions for the partner.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartySite	*Address*	The party site associated with the partner.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PrefferedContactId	long	The unique identifier of the preferred contact person for the partner.
PrefferedContactName	string	The name of the preferred contact person for the partner.

Name	Type	Description
PrimaryPhoneContactPointId	long	The unique identifier of the primary phone contact point.
PrimaryURLContactPointId	long	The unique identifier of the primary URL contact point.
PrincipalName	string	The Name of the highest ranking person in the company.
PrincipalTitle	string	The title of the highest ranking person in the organization.
ProfileObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
Province	string	The name of the province.
PublicAddressId	long	The partner company address displayed in Partner Finder.
PublicContactId	long	The partner contact name displayed in Partner Finder.
PublicEmailId	long	The e-mail displayed in Partner Finder.
PublicFaxId	long	The fax number displayed in in Partner Finder.
PublicPhoneId	long	The phone displayed in Partner Finder.
PublicPrivateOwnershipFlag	boolean	Indicates whether the organization is publically or privately owned. If the value is Y, then the organization is a privately owned organization. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
PublicStatus	string	Status of approval of public profile.
RangeEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date in the import range.
RangeStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date in the import range.

Name	Type	Description
ReassignTerritory	string	Indicates whether this partner needs territory reassignment.
RegistrationType	string	Indicates the registration type of the partner.
SmallBusInd	string	Indicates whether the organization is considered as a small business. If the value is Y, then the organization is considered as a small business. The default value is N.
SolutionOverview	string	The overview description of partner solutions.
State	string	The name of the state.
Status	string	The status of the record.
StockSymbol	string	The corporate stock symbol of the organization as listed in stock exchanges.
Synergy	string	The description of the value of the partnership between the Vendor and Partner.
TierId	long	The unique identifier for a tier to which a partner applies.
TotalEmployeesInd	string	Indicates if subsidiaries are included in the calculation of total employees. The accepted values are defined in the lookup type TOTAL_EMPLOYEES_INDICATOR.
TotalEmployeesText	string	The total number of employees in text format.
TreeCode	string	The unique code of the partner organization tree.
TreeStructureCode	string	The unique code for the partner organization tree structure.
URL	string	The destination URL associated with a specific Google AdWords ad.
UniqueNameSuffix	string	The suffix used to generate the attribute PartyUniqueName. The suffix is concatenated to the Organization Name attribute to generate the PartyUniqueName. The primary address is defaulted as the suffix.

Name	Type	Description
Web	*Web*	The web information related to the record.
YearEstablished	int	The year when the organization began doing business.

Partner Account Team

The person assigned to a partner account team.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerAccountResource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	The type of access granted to the resource as well as managers of the organizations.
AssignmentTypeCode	string	The code indicating how the resource is assigned to the sales account team.
CreatedBy	string	Who column: indicates the date and time of the creation of the row.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who created the row.
EmailAddress	string	The email address associated with the record.
FormattedPhoneNumber	string	The formatted phone number.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
MemberFunctionCode	string	The code indicating the role of a sales team member in the resource team such as Integrator, Executive Sponsor, and Technical Account Manager. A list of accepted values is defined in the lookup FND_LOOKUPS.
OrganizationName	string	The name of the party when the party type is Organization.
OrganizationRole	string	The role of the partner in the organization.
PartnerAccountId	long	The unique identifier of the partner account resource team.
PartnerAccountResourceId	long	The unique identifier of the member of the partner account resource team. • Primary Key
PartnerPartyId	long	The PartyId of Partner whose Account Team includes this resource.
ResourceId	long	The unique identifier of the resource.
ResourceName	string	The name of the resource associated with the partner account team.
TerritoryName	string	The name of the territory for the partner account.

Partner Certification

The list of certifications that a partner has achieved.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerCertification

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Partner Generic List of Values*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CertificationCode	string	The code for the certification.
CertificationName	string	The name of this certification.
LookupCode1	string	The key information for the certification.
LookupType1	string	The key information for the certification.
Meaning	string	The name of this certification.

Partner Generic List of Values

The generic list of multiple values used for certifications and expertise.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerProfileMultivalueLov

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Partner Certification*
Extended by	*Expertise*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.

Name	Type	Description
LookupCode	string	The value from a multi-value list of values category that applies to the profile.
LookupType	string	The list of values code that defines the category to which the list of values belong. This value indicates the profile field to which the value belongs.
PartnerMultivalLovId	long	The unique identifier of the list of values code selected for a specific multi-value field in the partner profile. • Primary Key
PartyId	long	The unique identifier of the contact party.

Partner Dimension Member

A generic list of multiple values used for territory dimensions.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Industries Served*
Extended by	*Focus Areas*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK1 column.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	A specific type of item within the dimension code. For example, for the products dimension, product items and product categories are there.
DimensionCode	string	The dimension of the item being stored. For example, geography.
DimensionMemberName	string	The name of the dimension member.
DimensionMemberNameBackup	string	The name of the dimension member to which this record refers to. This is stored in case the dimension member was removed and the user still requires the name of the item that was removed.
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OwnerId	long	The unique identifier of the entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of the table. • Primary Key
TerrDimMemberId	long	The key data for the territory dimension.
TerrDimPartitionId	long	The primary key.
TypeCode	string	The type of the partition.

Partner E-Mail

The e-mail address of the partner.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerPublicEmail

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActualContentSource	string	The information regarding the source of the contact point.
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPointValue	string	The key information for the contact point.
CreatedByModule	string	The module that created the record.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The information on how to interpret the e-mail address.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
OrigSystemReference	string	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
Primary2Flag	boolean	Indicator to specify that the contact point is the primary point of contact.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact

Name	Type	Description
		point is the primary contact point. A party or site can have only one contact point with value Y.
RelationshipId	long	The relationship identifier for the record.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Focus Areas

The focus areas or product specialties of the partner.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerProductSpeciality

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Partner Dimension Member*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ProductId	string	The unique identifier of the product for product specialties.
ProductName	string	The name of the product for product specialties.

Partner Dimension Member

A generic list of multiple values used for territory dimensions.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Industries Served*
Extended by	*Focus Areas*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK1 column.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	A specific type of item within the dimension code. For example, for the products dimension, product items and product categories are there.
DimensionCode	string	The dimension of the item being stored. For example, geography.
DimensionMemberName	string	The name of the dimension member.
DimensionMemberNameBackup	string	The name of the dimension member to which this record refers to. This is stored in case the dimension member was removed and the user still requires the name of the item that was removed.
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerId	long	The unique identifier of the entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.

Name	Type	Description
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of the table. • Primary Key
TerrDimMemberId	long	The key data for the territory dimension.
TerrDimPartitionId	long	The primary key.
TypeCode	string	The type of the partition.

Partner Generic List of Values

The generic list of multiple values used for certifications and expertise.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerProfileMultivalueLov

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Partner Certification*
Extended by	*Expertise*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
LookupCode	string	The value from a multi-value list of values category that applies to the profile.
LookupType	string	The list of values code that defines the category to which the list of values belong. This value indicates the profile field to which the value belongs.
PartnerMultivalLovId	long	The unique identifier of the list of values code selected for a specific multi-value field in the partner profile. • Primary Key
PartyId	long	The unique identifier of the contact party.

Geographies Served

The geographies in which a partner operates.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerGeographyServed

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK1 column.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	A specific type of item within the dimension code. For example, for the products dimension there could be product items and product categories.
DimensionCode	string	The dimension of the item being stored. For example, geography.
DimensionMemberName	string	Name of dimension member.
DimensionMemberNameBackup	string	The name of the dimension remember this record refers to. This is stored in case the dimension member was removed and the user still needs to know the name of the item that was removed.
GeographyId	string	The geography ID of the geography served.
GeographyName	string	The geography name of the geography served.

Name	Type	Description
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
OwnerId	long	The identifier of the entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of this table. • Primary Key
TerrDimMemberId	long	Key data for the territory dimension.
TerrDimPartitionId	long	Primary key.
TypeCode	string	Type of the partition.

Partner Members

The partner members for a partner.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Trading Community Person Details*
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ObjectId	long	PartyId of Partner Organization to whom this Contact belongs.

Trading Community Person Details

The information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Person

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*
Contains	*Citizenship*

Relationship Type	Object or Service
Contains	*Contact Language*
Contains	*Instant Messaging*
Contains	*Employment History*
Contains	*Web*
Contains	*Classification Assignment*
Contains	*Usage Assignment*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Contact Interest*
Contains	*Contact*
Contains	*Additional Contact Name*
Contains	*Phone*
Contains	*Education*
Contains	*Email Domain*
Contains	*Additional Identifier*
Contains	*Contact Preference*
Contains	*Source System Reference*
Contains	*Certification*
Contains	*Contact Address*
Contains	*Email*
Contains	*Preference*

Relationship Type	Object or Service
Extended by	*Partner Members*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.
AdditionalPersonName	*Additional Contact Name*	The additional name of the person.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.

Name	Type	Description
Address4	string	The fourth line of the address.
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information for the person.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Citizenship	*Citizenship*	The citizenship information of a person.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the person.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
Education	*Education*	The education information of the person.

Name	Type	Description
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.
EmploymentHistory	*Employment History*	The employment history information of a person.
FinancialProfile	*Financial Profile*	The financial profile information of a person.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
Gender	string	The gender of the person, such as male, female, and unknown. A list of accepted values is defined in the lookup HZ_GENDER.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person. A list of accepted values is defined in the lookup MARITAL_STATUS.
MissionStatement	string	The corporate charter of organization in user-defined text format.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	The preference mentioned in the person details.
PartySite	*Contact Address*	The party site associated with the person.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the person.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.

Name	Type	Description
PersonInterest	*Contact Interest*	The interest information associated with a person.
PersonLanguage	*Contact Language*	The language information associated with a person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.
PersonPreviousLastName	string	The previous last name of a person.
PersonProfile	*Contact*	The profile information of the person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.

Name	Type	Description
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPTId	long	The unique identifier of the primary e-mail.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPTId	long	The unique identifier of the primary phone contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPTId	long	The unique identifier of the primary URL contact point.
Province	string	The name of the province.

Name	Type	Description
Relationship	*Relationship*	The relationship information of the person.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
Salutation	string	The size of the household this person is a part of.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.
Status	string	The status of the record.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the Third Party field in the Customers window is mandatory.
URL	string	The destination URL associated with a specific Google AdWords ad.
UserGUID	string	The "light weight" user Global Unique Id. Light Weight users defined in the Extended Security (XS) System.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
Web	*Web*	The web information related to the record.

Partner Phone

The phone number for a contact point.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerPublicPhone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActualContentSource	string	The information regarding the source of the contact point.
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPointValue	string	The key information for the contact point.
CreatedByModule	string	The module that created the record.

Name	Type	Description
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FormattedPhoneNumber	string	The formatted phone number.
LastContactDtTime	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The last time when the contact point was contacted.
OrigSystemReference	string	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PagerTypeCode	string	The type of pager for the phone number.
PartyUsageCode	string	The usage context of a party's contact point.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCallingCalendar	string	The information on proper calling times.
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The extension of the phone number.
PhoneLineType	string	The type of phone line.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
RawPhoneNumber	string	The unformatted phone number.

Name	Type	Description
RelationshipId	long	The relationship identifier for the record.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TransposedPhoneNumber	string	The transposed phone number.

Partner Public Contact

The point of contact used for the public profile.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerPublicContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.

Name	Type	Description
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AnalysisFy	string	The fiscal year that the financial information is based on.
CategoryCode	string	The user-defined category. The lookup type is CUSTOMER_CATEGORY.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
City	string	The name of the city.
Comments1	string	The denormalization of the COMMENTS in HZ_GROUP_PROFILES.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy1	string	The user who created the account record.
CreatedByModule1	string	The module that created the account record.
CreationDate1	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyFyPotentialRevenue	decimal	The potential revenue of the organization in this fiscal year.
DUNSNumber	string	DUNS_NUMBER in VARCHAR format. Column value is not restricted to nine digit DUNS number.

Name	Type	Description
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The denormalization of the DATE_OF_BIRTH in HZ_PERSON_PROFILES.
EmailAddress	string	The email address associated with the record.
EmployeesTotal	decimal	The total number of employees.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
FormattedAddress	string	The formatted address of the contact.
FormattedPhoneNumber	string	The formatted phone number.
Gender	string	The denormalization of the GENDER in HZ_PERSON_PROFILES.
GroupType	string	The lookup for the group type.
HQBranchInd	string	The status of the site. Identifies if the location is the headquarters, a branch, or a single location.
HomeCountry	string	The home country associated with the party.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for a language.
LastUpdateDate1	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin1	string	The login of the user who last updated the record.
LastUpdatedBy1	string	The user who last updated the record.

Name	Type	Description
MaritalStatus	string	The denormalization of the MARITAL_STATUS in HZ_PERSON_PROFILES.
MissionStatement	string	The corporate charter of the organization.
NextFyPotentialRevenue	decimal	The potential revenue of the organization for the next fiscal year.
OrigSystemReference	string	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PersonAcademicTitle	string	An academic title that is part of the name of a person, such as Dr. John Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	Used to specify the last name prefix such as fon, van, and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_PREFIX in HZ_PERSON_PROFILES is used. Corresponds to the field Last Name Prefix in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	Indicates the place in a family structure. For example, in Tom Jones III, III is the suffix.

Name	Type	Description
PersonPreNameAdjunct	string	The salutary introduction such as Mr. or Herr.
PersonPreviousLastName	string	The previous last or surname of the person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPTId	long	The key to primary e-mail contact point.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPTId	long	The key to the primary contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.

Name	Type	Description
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPTId	long	The key to the primary URL contact point.
Province	string	The name of the province.
SICCode	string	The standard industry classification (SIC) code.
SICCodeType	string	The version of standard industry classification (SIC) code.
Salutation	string	The phrase used to address a party in any correspondence.
State	string	The name of the state.
Status1	string	The party status indicator.
TradingPartnerIdentifier	string	One column to store the FSIO related trading partner codes. This column stores alpha numeric values. The column also addresses Fed vs. Non-Fed attribute requirement.
URL	string	The destination URL associated with a specific Google AdWords ad.
UserGUID	string	Stores the light weight user Global Unique ID. Light weight users are defined in the Extended Security (XS) system. Foreign key to FND_USER.
YearEstablished	int	The year when the organization began doing business.

Partner Type

The information about the partner type.

QName: {http://xmlns.oracle.com/apps/partnerMgmt/partnerCenter/}PartnerTypeDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Partner*
Handled by	*Deal Registration Service*
Handled by	*Company and User Registration*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributePk1	string	This is the ATTRIBUTE PK1 column.
AttributePk2	string	This is the ATTRIBUTE PK2 column.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DimSubtypeCode	string	This attribute is not used.
DimensionCode	string	This will contain the string 'SChnl' to indicate Partner Type.

Name	Type	Description
DimensionMemberName	string	Name of dimension member.
DimensionMemberNameBackup	string	The name of the dimension remember this record refers to. This is stored in case the dimension member was removed and the user still needs to know the name of the item that was removed.
IntegrationId	string	The reference to the actual dimension member item.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the user who last updated the row.
LastUpdateLogin	string	Who column: indicates the date and time of the last update of the row.
LastUpdatedBy	string	Who column: indicates the session login associated to the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
OwnerId	long	Partner Party Id of the Partner.
OwnerType	string	The type of entity that owns the relationship with the dimension data. For example, partner profile, partner program, or enrollment.
PartitionTypeCode	string	The type of partition in which the data is stored.
PartnerDimMembersId	long	This column is the private key of this table. • Primary Key
PartnerTypeCode	string	The partner type code for partner.
PartnerTypeName	string	The name of the partner type, such as Value Added Reseller.
TerrDimMemberId	long	Key data for the territory dimension.
TerrDimPartitionId	long	Primary key.

Name	Type	Description
TypeCode	string	Type of the partition.

Phone

The phone number associated with a trading community member. For example, the phone number for Oracle Corporation is 650-506-6000.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Phone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Contact Address*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*

Relationship Type	Object or Service
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FormattedPhoneNumber	string	The formatted phone number.
LastContactDtTime	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time of last contact placed to this contact point.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.

Name	Type	Description
PagerTypeCode	string	The PAGER_TYPE_CODE column stores the lookup code for the type of pager. The type of pager determines how the page is received. For example, tone, number, alphanumeric or two-way alphanumeric.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCallingCalendar	string	The name or code for a calling calendar used with this telephone number. This attribute is no longer used in Fusion applications.
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The additional number addressed after initial connection to an internal telephone system.
PhoneInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community phone.
PhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound, or outbound.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RawPhoneNumber	string	The unformatted telephone number.
RelationshipId	long	The relationship identifier for the record.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TimezoneCode	string	The foreign key to FND_TIMEZONES_B.TIMEZONE_CODE.
TransposedPhoneNumber	string	This column stores the concatenation of PHONE_COUNTRY_CODE, PHONE_AREA_CODE, and PHONE_NUMBER in reverse order. For example, if PHONE_COUNTRY_CODE=1, PHONE_AREA_CODE=650 and PHONE_NUMBER=5065747, this column stores 74756050561. This column is used for building an index to search for any combination of the above three columns.

Preference

The preferences of a trading community member. For example, a member may prefer that the transaction currency is the US dollar.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalValue1	string	The additional preference value.
AdditionalValue2	string	The additional preference value.
AdditionalValue3	string	The additional preference value.
AdditionalValue4	string	The additional preference value.
AdditionalValue5	string	The additional preference value.
Category	string	A preference category is used to logically group one or more preference codes in a particular user interface. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Module	string	The program that creates the preference. For example, TCA MOBILE CUSTOMER DIRECTORY.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PartyPreferenceId	long	The unique identifier of the party preference. • Primary Key
PreferenceCode	string	A preference code determines if a preference is a single value or a multiple value preference. The preference code is validated by the HZ_PREFERENCE lookup. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
ValueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The preference value when the data type is DATE.
ValueName	string	A user-defined alias for a preference value.
ValueNumber	decimal	The preference value when the data type is NUMBER.
ValueVarchar2	string	The preference value when the data type is VARCHAR2.

Relationship

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}Relationship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Address*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Usage Assignment*
Contains	*Trading Community Relationship Additional Information*
Contains	*Customer Contact Profile*
Contains	*Source System Reference*
Contains	*Email*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*

Relationship Type	Object or Service
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalInformation1	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type. For operating unit and legal entity to bank relationships, column stores communication agreement ID, which identifies agreement between payer and bank on type of EDIFACT documents that can be sent for processing payments.
AdditionalInformation10	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation11	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation12	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation13	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation14	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation15	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation16	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation17	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation18	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation19	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation2	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation20	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation21	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation22	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation23	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation24	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation25	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation26	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation27	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation28	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation29	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation3	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation30	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation4	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation5	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation6	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation7	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation8	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation9	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
Comments	string	The comments for the record.

Name	Type	Description
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DirectionCode	string	The code of the relationship direction. The list of accepted values are defined in the lookup DIRECTION_CODE.
Email	*E-Mail*	The email address associated with the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectEmailAddress	string	The e-mail address of the object party in the relationship.
ObjectId	long	The unique identifier of the object party in this relationship.
ObjectPartyName	string	The name of the object party in this relationship.

Name	Type	Description
ObjectTableName	string	The source table name of the object party in this relationship.
ObjectType	string	The object type of the relationship.
ObjectUsageCode	string	The usage code of object party in the relationship.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationContact	*Customer Contact Profile*	The organization contact information.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyName	string	The name of the party.
PartySite	*Address*	The party site associated with the relationship.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the relationship.
PercentageOwnership	decimal	The percentage of the child entity owned by the parent entity.
Phone	*Phone*	The phone information for the entity.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.
RelationshipCode	string	The code for a forward or a backward relationship. A list of accepted relationship values is defined in the lookup PARTY_ RELATIONS_TYPE.
RelationshipId	long	The relationship identifier for the record.
RelationshipInformation	*Trading Community Relationship Additional Information*	The relationship type information.

Name	Type	Description
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key
RelationshipType	string	The relationship type name. For example, CUSTOMER_SUPPLIER. A list of valid relationship types is defined in the lookup HZ_RELATIONSHIP_TYPE.
RequestId	long	A system-generated read-only attribute used by the application framework.
Role	string	The role between the subject and object party in this relationship.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
SubjectEmailAddress	string	The e-mail address of the subject party in relationship.
SubjectId	long	The unique identifier of the subject in this relationship.
SubjectPartyUsageAssignment	*Usage Assignment*	The usage assignment of the subject party in the relationship.
SubjectTableName	string	The source table of the subject.
SubjectType	string	The subject type of the relationship.
SubjectUsageCode	string	The usage code of subject party in the relationship.
Web	*Web*	The web information related to the record.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*
Contained by	*Location Details*
Contained by	*Household*
Contained by	*Contact Preference*
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*
Contained by	*Trading Community Address Purpose*
Contained by	*Telex*
Contained by	*Phone*
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*
Contained by	*Trading Community Person Details*

Relationship Type	Object or Service
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*
Contained by	*Trading Community Customer Account Site Use*
Contained by	*Relationship*
Contained by	*Electronic Data Interchange*
Contained by	*Trading Community Customer Account or Site Role*
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*

Relationship Type	Object or Service
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.

Name	Type	Description
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Telex

The telex number information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Telex

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key

Name	Type	Description
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary telex of the associated object. If the value is True, then this is the primary telex. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.

Name	Type	Description
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TelexNumber	string	The telex reference number (usually a telephone number) of the organization.

Trading Community Address Additional Information

The address information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/}PartySiteInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.

Name	Type	Description
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Address Purpose

The purpose of an address, such as Business, Home, or Ship To.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySiteUse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Relationship Type	Object or Service
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date at the start of the date range within which the row is active.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
IntegrationKey	string	The integration key is not used.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteUseId	long	The unique identifier of the party site used. • Primary Key
PrimaryPerType	string	Indicates if this is the primary use for the site. Y stands for the primary site and N stands for all other sites.
RequestId	long	A system-generated read-only attribute used by the application framework.
SiteUseType	string	The site use type associated with the address.
Status	string	The status of the record.

Trading Community Contact Point Additional Information

The contact point for a trading community member like phone or e-mail. For example 650-506-6000 is the phone number for Oracle Corporation, john.doe@example.com is the e-mail address for John Doe.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/}ContactPointInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Phone*
Contained by	*Web*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointType	string	The type of the contact point.
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Location Profile Additional Information

The physical location information of a trading community member. For example 300 Oracle Parkway, Redwood Shore, CA.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/location/}LocationInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Location Details*
Handled by	*Trading Community Location*
Handled by	*Company and User Registration*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Organization Contact Additional Information

The additional information about the organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/orgContact/}OrganizationContactInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Customer Contact Profile*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrgContactId	long	The unique identifier of the organization contact. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Organization Details

The information about an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationParty

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*
Contains	*Address*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Classification Assignment*
Contains	*Usage Assignment*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Phone*
Contains	*Email Domain*
Contains	*Telex*
Contains	*Additional Identifier*
Contains	*Account*
Contains	*Source System Reference*
Contains	*Contact Preference*

Relationship Type	Object or Service
Contains	*Financial Report*
Contains	*Certification*
Contains	*Electronic Data Interchange*
Contains	*Email*
Contains	*Preference*
Contains	*Additional Account Name*
Contains	*Electronic File Transfer*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalOrganizationName	*Additional Account Name*	The additional name associated with the organization.
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AnalysisFy	string	The fiscal year that the financial information is based on.
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information associated with the organization.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the organization.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.

Name	Type	Description
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating for the organization.
CurrentFiscalYearPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its current fiscal year.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
Edi	*Electronic Data Interchange*	The electronic data interchange information for the organization.
Eft	*Electronic File Transfer*	The electronic file transfer information for the organization.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.
EmployeesTotal	decimal	The total number of employees.
FinancialProfile	*Financial Profile*	The financial profile information of the organization.
FinancialReport	*Financial Report*	The financial report information of the organization.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services

Name	Type	Description
		Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
GroupType	string	The type of the group.
HQBranchIndicator	string	The status of this site, such as HQ, a branch, or a single location. A list of accepted values are defined in the lookup type HQ_BRANCH_IND.
HomeCountry	string	The home country associated with the party.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MissionStatement	string	The corporate charter of organization in user-defined text format.
NextFyPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its next fiscal year.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationProfile	*Account*	The information about the partner organization.
OrganizationSize	string	The size of the organization based on its revenue, number of employees, and so on.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	The preference mentioned in the organization details.
PartySite	*Address*	The party site associated with the organization.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the organization.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
Phone	*Phone*	The phone information for the entity.

Name	Type	Description
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPointId	long	The unique identifier of the primary e-mail.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPointId	long	The unique identifier of the primary phone contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.

Name	Type	Description
PrimaryURLContactPointId	long	The unique identifier of the primary URL contact point.
PrincipalName	string	The Name of the highest ranking person in the company.
Province	string	The name of the province.
Relationship	*Relationship*	The relationship information of the organization.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The telex information of the organization.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the Third Party field in the Customers window is mandatory.
TradingPartnerIdentifier	string	The FSIO related trading partner codes.
URL	string	The destination URL associated with a specific Google AdWords ad.

Name	Type	Description
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
Web	*Web*	The web information related to the record.
YearEstablished	int	The year when the organization began doing business.

Trading Community Organization Profile Additional Information

The additional profile information about an organization, such as the organization type.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/organization/}OrganizationInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Cloud Account*
Contained by	*Account*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrganizationProfileId	long	The unique identifier of the organization profile. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Relationship Additional Information

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/relationship/}RelationshipInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key

Name	Type	Description
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Usage Assignment

The party usage assigned to a trading community member. For example, John Doe is a contact of ABC Corporation and XYZ Corporation is a supplier.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyUsageAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Party Usage Assignment Service*
Handled by	*Trading Community Party Information*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerTableId	long	The unique identifier for a record in the owner table.

Name	Type	Description
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
PartyUsageCode	string	The usage context of a party's contact point.
PartyUsgAssignmentId	long	The unique identifier of the party usage assignment. • Primary Key
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Web

The Web information associated with a trading community member. For example, Oracle's address on the Web is www.oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Web

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key

Name	Type	Description
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N stands for all others.

Name	Type	Description
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
URL	string	The destination URL associated with a specific Google AdWords ad.
WebInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community Web.
WebType	string	The prefix class to a Web address. Typically, this is either FTP or HTTP.

Price Books

Service to operate on price books. The supported operations are create, update, get, find, and delete. A price book is used by a order capture organization to store the price catalog of items.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/orderCapture/priceBook/priceBookService/}PriceBookService

Service WSDL URL: https://servername/crmService/PriceBookService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Price Book Line*

Price Book Line

The price catalog of items for a particular price book. This is used by an order capture organization.

QName: {http://xmlns.oracle.com/apps/orderCapture/priceBook/priceBookService/}PriceBookItem

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Price Books*

Sales Account Resource Service

The service used to create, update, get, or find sales account resources.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesAccountResourceService/}SalesAccountResourceService

Service WSDL URL: https://servername/crmService/SalesAccountResourceService?WSDL

Logical Business Objects

- CRM : Customer Center : Sales Party

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Sales Account Resource*

Operations

- *getSalesAccountResource*
- *createSalesAccountResource*
- *updateSalesAccountResource*
- *deleteSalesAccountResource*
- *findSalesAccountResource*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getSalesAccountResource

The get operation for sales account resource details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
sAccountResourceId	long	The sales account resource identifier.

Response Payload

Element Name	Type	Description
result	*Sales Account Resource*	The operation that returns sales account resource details that matches the inbound key attributes.

Element Name	Type	Description

createSalesAccountResource

The operation to create sales account resource details for a sales account.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountResource	*Sales Account Resource*	The locale to use when evaluating locale-based user interface hints. The locale name is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	*Sales Account Resource*	The result of the operation including the successfully created sales account resource details and any warnings or informational messages.

updateSalesAccountResource

The operation to update sales account resource details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountResource	*Sales Account Resource*	Sales Account Resource Details to be updated

Response Payload

Element Name	Type	Description
result	*Sales Account Resource*	The result of the operation includes the successfully updated sales account resource details or a list of warnings or informational messages, or both.

deleteSalesAccountResource

The operation that deletes sales account resource details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountResource	*Sales Account Resource*	Sales Account Resource Details to be deleted

Response Payload

Element Name	Type	Description
result	void	A list of warnings or informational messages encountered when deleting the object.

findSalesAccountResource

The find operation for sales account resource details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Account Resource*	The result of the operation including the list of sales account resource details that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The locale name is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getSalesAccountResource	ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	Manage Sales Account Team	Allows managing and maintaining the sales account teams.
updateSalesAccountResource	ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	Manage Sales Account Team	Allows managing and maintaining the sales account teams.
deleteSalesAccountResource	ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	Manage Sales Account Team	Allows managing and maintaining the sales account teams.
findSalesAccountResource	ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	Manage Sales Account Team	Allows managing and maintaining the sales account teams.
createSalesAccountResource	ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	Manage Sales Account Team	Allows managing and maintaining the sales account teams.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Sales Account Resource

An object representing a resource party that is assigned to a sales account team and has a defined access role for the sales account.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesAccountResource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Party*
Contained by	*Sales Account*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Sales Account Resource Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	The access level determines the type of access granted to the resource as well as managers of the organizations. The possible values are contained in the ZCA_ACCESS_LEVEL lookup.
AccountDirectorId	long	The party identifier for the resource designated as the sales account owner.
AssignmentTypeCode	string	The code indicating how the resource is assigned to the sales account team. The possible values are contained in the ZCA_ASSIGNMENT_TYPE lookup.
Attribute1	string	The segment of the user descriptive flex field.
Attribute10	string	The segment of the user descriptive flex field.
Attribute11	string	The segment of the user descriptive flex field.
Attribute12	string	The segment of the user descriptive flex field.
Attribute13	string	The segment of the user descriptive flex field.

Name	Type	Description
Attribute14	string	The segment of the user descriptive flex field.
Attribute15	string	The segment of the user descriptive flex field.
Attribute2	string	The segment of the user descriptive flex field.
Attribute3	string	The segment of the user descriptive flex field.
Attribute4	string	The segment of the user descriptive flex field.
Attribute5	string	The segment of the user descriptive flex field.
Attribute6	string	The segment of the user descriptive flex field.
Attribute7	string	The segment of the user descriptive flex field.
Attribute8	string	The segment of the user descriptive flex field.
Attribute9	string	The segment of the user descriptive flex field.
AttributeCategory	string	The structure definition of the user descriptive flex field.
AttributeDate1	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The segment of the user descriptive flex field.
AttributeDate2	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The segment of the user descriptive flex field.
AttributeDate3	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The segment of the user descriptive flex field.
AttributeDate4	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The segment of the user descriptive flex field.
AttributeDate5	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The segment of the user descriptive flex field.
AttributeNumber1	decimal	The segment of the user descriptive flex field.
AttributeNumber2	decimal	The segment of the user descriptive flex field.
AttributeNumber3	decimal	The segment of the user descriptive flex field.

Name	Type	Description
AttributeNumber4	decimal	The segment of the user descriptive flex field.
AttributeNumber5	decimal	The segment of the user descriptive flex field.
CpdrfLastUpd	string	The standard replication column.
CpdrfVerPillar	int	The standard replication column.
CpdrfVerSor	int	The standard replication column.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EmailAddress	string	The email address associated with the record.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedPhoneNumber	string	The formatted phone number.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LockAssignmentBooleanFlag	boolean	Indicates whether the sales account resource is enabled for locked assignment, which means the sales account resource cannot be removed from the team at future territory assignments.
LockAssignmentFlag	boolean	The flag indicates automatic territory assignment cannot remove the sales account team resource when this flag is Y'. When a sales account team member is added manually, this flag is defaulted to Y'.

Name	Type	Description
ManagerPartyId	long	The party identifier for the manager.
MemberFunctionCode	string	The lookup code indicating a sales account resource's role on the resource team such as Integrator, Executive Sponsor and Technical Account Manager. The code lookup is stored in FND_LOOKUPS.
Name	string	The name of the organization for the resource.
Name1	string	The name of the territory.
NamedAccountFlag	boolean	The indicator for whether a sales account is a named sales account.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
ObjectVersionNumber2	int	The number to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
OrgTreeCode	string	The code for the organization hierarchy tree. Managers and administrators of sales account resource gain access through this hierarchy.
OrgTreeStructureCode	string	The structure code for the organization hierarchy tree. Managers/Administrators of parent member organizations will gain access through this hierarchy.
OrganizationId	long	The identifier for the organization the sales account resource belongs.
OwnerResourceId	long	The identifier for the sales account owner.

Name	Type	Description
PartyName	string	The name of the party.
PartyName1	string	The party name of the manager.
PrTerritoryId	long	The territory the sales account team resource belongs to.
ReportsToFlag	boolean	The indicator showing a resource reports to another resource in the same account team.
ResourceId	long	The unique identifier of the resource.
ResourceOrgId	long	The resource organization identifier.
ResourcePartyId	long	The party identifier for the resource.
ResourcePrimaryOrgId	long	The resource primary organization identifier.
ResourcePrimaryOrgName	string	The resource primary organization name.
RoleName	string	The list of all roles for the resources in the organization.
SAccountResourceId	long	The surrogate primary key for the member of the sales account resource team. • Primary Key
SalesAccountId	long	The identifier for the sales account.
SalesAccountPartyId	long	The unique identifier for the sales account.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
TerritoryVersionId	long	The territory version is a primary key.
TypeCode	string	The type code for the territory of which the resource is member of.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Account Service

The service used for multiple sales account. You can use the Sales Party service to create sales account for 1:1 relationships. A service used to create, update, get, or find sales accounts for a party.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesAccountsService

Service WSDL URL: https://servername/crmService/SalesAccountsService?WSDL

Logical Business Objects

- CRM : Customer Center : Sales Party

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Additional Account Name*
Handles	*Citizenship*
Handles	*Financial Profile*
Handles	*Credit Rating*
Handles	*E-Mail Domain*
Handles	*Trading Community Original System Mapping Identifier Additional Information*
Handles	*Sales Account Contact*
Handles	*Trading Community Person Details*
Handles	*Asset*
Handles	*Classification Assignment*
Handles	*Preference*

Relationship Type	Object or Service
Handles	*Additional Household Name*
Handles	*Phone*
Handles	*Trading Community Address Purpose*
Handles	*Trading Community Organization Contact Additional Information*
Handles	*Additional Identifier*
Handles	*Relationship*
Handles	*Education*
Handles	*Sales Account*
Handles	*Contact Address*
Handles	*Telex*
Handles	*Electronic Data Interchange*
Handles	*Contact Preference*
Handles	*Account*
Handles	*Contact Interest*
Handles	*Usage Assignment*
Handles	*Electronic File Transfer*
Handles	*Sales Account Contact Point*
Handles	*Contact Language*
Handles	*Trading Community Person Profile Additional Information*
Handles	*Certification*
Handles	*Financial Number*

Relationship Type	Object or Service
Handles	*Trading Community Organization Details*
Handles	*Trading Community Organization Profile Additional Information*
Handles	*Trading Community Contact Point Additional Information*
Handles	*Source System Reference*
Handles	*Customer Contact Profile*
Handles	*Sales Account Territory*
Handles	*Household*
Handles	*Additional Contact Name*
Handles	*Web*
Handles	*Customer Contact Responsibility*
Handles	*E-Mail*
Handles	*Trading Community Relationship Additional Information*
Handles	*Financial Report*
Handles	*Employment History*
Handles	*Instant Messaging*
Handles	*Work Class*
Handles	*Address*
Handles	*Sales Account Resource*
Handles	*Contact*
Handles	*Trading Community Address Additional Information*

Operations

- *getSalesAccount*
- *createSalesAccount*
- *updateSalesAccount*
- *deleteSalesAccount*
- *mergeSalesAccount*
- *findSalesAccount*
- *findAccountsOfParty*
- *getSalesAccountTerritory*
- *createSalesAccountTerritory*
- *updateSalesAccountTerritory*
- *deleteSalesAccountTerritory*
- *mergeSalesAccountTerritory*
- *findSalesAccountTerritory*
- *getSalesAccountContacts*
- *createSalesAccountContacts*
- *updateSalesAccountContacts*
- *deleteSalesAccountContacts*
- *mergeSalesAccountContacts*
- *findSalesAccountContacts*
- *getSalesAccountContactPoints*
- *createSalesAccountContactPoints*
- *updateSalesAccountContactPoints*
- *deleteSalesAccountContactPoints*
- *mergeSalesAccountContactPoints*
- *findSalesAccountContactPoints*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getSalesAccount

The get operation for sales account details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountId	long	Updates a set of records of an Oracle Fusion Customer custom object.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	*Sales Account*	The operation to return sales account details that matches the inbound key attributes.

createSalesAccount

The operation to create sales account details for a party.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccount	*Sales Account*	The operation to create sales account contact.

Response Payload

Element Name	Type	Description
result	*Sales Account*	The result of the operation including the successfully created sales account details and any warnings or informational messages.

updateSalesAccount

The operation to update sales account.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccount	*Sales Account*	The operation to update sales account details.

Response Payload

Element Name	Type	Description
result	*Sales Account*	The result of the operation includes the successfully updated sales account details or a list of warnings or informational messages, or both.

deleteSalesAccount

The operation that deletes sales account details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccount	*Sales Account*	The operation to delete sales account contact.

Response Payload

Element Name	Type	Description
result	void	A list of warnings or informational messages encountered when deleting the object.

mergeSalesAccount

The merge operation for sales account details. It will perform an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccount	*Sales Account*	The operation to merge sales account contact.

Response Payload

Element Name	Type	Description
result	*Sales Account*	The result of the operation including the successfully merged sales account details and any warnings or informational messages.

Element Name	Type	Description

findSalesAccount

The find operation for sales account details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Account*	The result of the operation including the list of sales account details that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

findAccountsOfParty

The find operation for sales account details filtered by party identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
BindPartyId	long	The find operation for party identifier.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Account*	The result of the operation including the list of sales account details that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

getSalesAccountTerritory

The get operation for sales account territory details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
sAccountTerritoryId	long	The sales account territory identifier.

Response Payload

Element Name	Type	Description
result	*Sales Account Territory*	The operation that returns sales account territory details that matches the inbound key attributes.

createSalesAccountTerritory

The operation to create sales account territory details for a sales account.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountTerritory	*Sales Account Territory*	A required input parameter of the createEntity web service method. Includes the attribute values that the records will be created with.

Response Payload

Element Name	Type	Description
result	*Sales Account Territory*	The result of the operation including the successfully created sales account territory details and any warnings or informational messages.

updateSalesAccountTerritory

The operation to update sales account territory details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountTerritory	*Sales Account Territory*	Sales Account Territory Details to be updated

Response Payload

Element Name	Type	Description
result	*Sales Account Territory*	The result of the operation includes the successfully updated sales account territory details or a list of warnings or informational messages, or both.

deleteSalesAccountTerritory

The operation that deletes sales account territory details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountTerritory	*Sales Account Territory*	A required input parameter of the deleteEntity web service method. All records matching the input attribute values specified in this input object are deleted.

Response Payload

Element Name	Type	Description
result	void	A list of warnings or informational messages encountered when deleting the object.

mergeSalesAccountTerritory

The merge operation for sales account territory details. It will perform an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountTerritory	*Sales Account Territory*	The required input parameter of the updateEntity web service method. The object includes only the IDs and the attribute values you want to update. Records with the matching IDs will be updated with the attribute values in the object.

Response Payload

Element Name	Type	Description
result	*Sales Account Territory*	The result of the operation including the successfully merged sales account territory details and any warnings or informational messages.

findSalesAccountTerritory

The find operation for sales account territory details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Account Territory*	The result of the operation including the list of sales account territory details that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

getSalesAccountContacts

The get operation for sales account contact details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
sAccountContactId	long	The sales account contact identifier.

Response Payload

Element Name	Type	Description
result	*Sales Account Contact*	The operation returns sales account contact details that matches the inbound key attributes.

createSalesAccountContacts

The operation to create contact details for a sales account.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountContacts	*Sales Account Contact*	Queries by ID a single record of an Oracle Fusion Customer custom object.

Response Payload

Element Name	Type	Description
result	*Sales Account Contact*	The result of the operation including the successfully created sales account contact details and any warnings or informational messages.

updateSalesAccountContacts

The operation to update sales account contact details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountContacts	*Sales Account Contact*	Retrieves the list of service data objects defined on this service.

Response Payload

Element Name	Type	Description
result	*Sales Account Contact*	The result of the operation includes the successfully updated sales account contact details or a list of warnings or informational messages, or both.

deleteSalesAccountContacts

The operation that deletes sales account contact details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountContacts	*Sales Account Contact*	Retrieves a set of records of an Oracle Fusion Customer custom object.

Response Payload

Element Name	Type	Description
result	void	A list of warnings or informational messages encountered when deleting the object.

mergeSalesAccountContacts

The merge operation for sales account contact details. It will perform an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountContacts	*Sales Account Contact*	Retrieves the date and time when the schema files referenced in the service definition last changed.

Response Payload

Element Name	Type	Description
result	*Sales Account Contact*	The result of the operation including the successfully merged sales account contacts and any warnings or informational messages.

findSalesAccountContacts

The find operation for sales account contact details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Account Contact*	The result of the operation including the list of sales account contacts that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

getSalesAccountContactPoints

The get operation for sales account contact point details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
sAccountContactPointId	long	The operation to get sales account contact point identifier.

Response Payload

Element Name	Type	Description
result	*Sales Account Contact Point*	The operation to return sales account contact point details that matches the inbound key attributes.

createSalesAccountContactPoints

The operation to create contact point details for a sales account.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountContactPoints	*Sales Account Contact Point*	Sales Account Contact Points Details to be created

Response Payload

Element Name	Type	Description
result	*Sales Account Contact Point*	The result of the operation including the successfully created sales account

Element Name	Type	Description
		contact points details and any warnings or informational messages.

updateSalesAccountContactPoints

The operation to update sales account contact point details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountContactPoints	*Sales Account Contact Point*	Deletes a set of records of an Oracle Fusion Customer custom object.

Response Payload

Element Name	Type	Description
result	*Sales Account Contact Point*	The result of the operation includes the successfully updated sales account contact point details or a list of warnings or informational messages, or both.

deleteSalesAccountContactPoints

The operation that deletes sales account contact points details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountContactPoints	*Sales Account Contact Point*	Sales Account Contact Point Details to be deleted

Response Payload

Element Name	Type	Description
result	void	A list of warnings or informational messages encountered when deleting the object.

mergeSalesAccountContactPoints

The merge operation for sales account contact points details. It will perform an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountContactPoints	*Sales Account Contact Point*	Creates records of an Oracle Fusion Customer custom object.

Response Payload

Element Name	Type	Description
result	*Sales Account Contact Point*	The result of the operation including the successfully merged sales account contact points details and any warnings or informational messages.

findSalesAccountContactPoints

The find operation for sales account contact points details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Account Contact Point*	The result of the operation including the list of sales account contact points details that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

Element Name	Type	Description

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The locale name is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
updateSalesAccountContactPoints	ZCM_UPDATE_SALES_ACCOUNT_CONTACT_PRIV	Update Sales Account Contact	Allows updating a sales account contact
findAccountsOfParty	ZCM_CREATE_SALES_ACCOUNT_PRIV	Create Sales Account	Allows creating a sales account
mergeSalesAccountContacts	ZCM_UPDATE_SALES_ACCOUNT_CONTACT_PRIV	Update Sales Account Contact	Allows updating a sales account contact
deleteSalesAccount	ZCM_CREATE_SALES_ACCOUNT_PRIV	Create Sales Account	Allows creating a sales account
createSalesAccountContacts	ZCM_CREATE_SALES_ACCOUNT_CONTACT_PRIV	Create Sales Account Contact	Allows creating a sales account contact
mergeSalesAccountContactPoints	ZCM_UPDATE_SALES_ACCOUNT_CONTACT_PRIV	Update Sales Account Contact	Allows updating a sales account contact
updateSalesAccountContacts	ZCM_UPDATE_SALES_ACCOUNT_CONTACT_PRIV	Update Sales Account Contact	Allows updating a sales account contact

Operation Name	Privilege Code	Privilege Name	Privilege Description
findSalesAccount	ZCM_CREATE_SALES_ACCOUNT_PRIV	Create Sales Account	Allows creating a sales account
getSalesAccountContactPoints	ZCM_VIEW_SALES_ACCOUNT_CONTACT_PRIV	View Sales Account Contact	Allows viewing a sales account contact
updateSalesAccount	ZCM_UPDATE_SALES_ACCOUNT_PRIV	Update Sales Account	Allows update of the sales account
updateSalesAccount	ZCM_CREATE_SALES_ACCOUNT_PRIV	Create Sales Account	Allows creating a sales account
createSalesAccount	ZCM_CREATE_SALES_ACCOUNT_PRIV	Create Sales Account	Allows creating a sales account
deleteSalesAccountContacts	ZCM_DELETE_SALES_ACCOUNT_CONTACT_PRIV	Delete Sales Account Contact	Allows deleting a sales account contact
getSalesAccountContacts	ZCM_VIEW_SALES_ACCOUNT_CONTACT_PRIV	View Sales Account Contact	Allows viewing a sales account contact
mergeSalesAccount	ZCM_UPDATE_SALES_ACCOUNT_PRIV	Update Sales Account	Allows update of the sales account
mergeSalesAccount	ZCM_CREATE_SALES_ACCOUNT_PRIV	Create Sales Account	Allows creating a sales account
deleteSalesAccountContactPoints	ZCM_DELETE_SALES_ACCOUNT_CONTACT_PRIV	Delete Sales Account Contact	Allows deleting a sales account contact
findSalesAccountContacts	ZCM_VIEW_SALES_ACCOUNT_CONTACT_PRIV	View Sales Account Contact	Allows viewing a sales account contact
findSalesAccountContactPoints	ZCM_VIEW_SALES_ACCOUNT_CONTACT_PRIV	View Sales Account Contact	Allows viewing a sales account contact
createSalesAccountContactPoints	ZCM_CREATE_SALES_ACCOUNT_CONTACT_PRIV	Create Sales Account Contact	Allows creating a sales account contact
getSalesAccount	ZCM_CREATE_SALES_ACCOUNT_PRIV	Create Sales Account	Allows creating a sales account

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_DELETE_SALES_ACCOUNT_CONTACT_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_DELETE_SALES_ACCOUNT_CONTACT_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_DELETE_SALES_ACCOUNT_CONTACT_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_UPDATE_SALES_ACCOUNT_CONTACT_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_UPDATE_SALES_ACCOUNT_CONTACT_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_UPDATE_SALES_ACCOUNT_CONTACT_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_VIEW_SALES_ACCOUNT_CONTACT_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_ACCOUNT_CONTACT_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCM_VIEW_SALES_ACCOUNT_CONTACT_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_CREATE_SALES_ACCOUNT_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_CREATE_SALES_ACCOUNT_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_CREATE_SALES_ACCOUNT_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_CREATE_SALES_ACCOUNT_CONTACT_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_CREATE_SALES_ACCOUNT_CONTACT_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_CREATE_SALES_ACCOUNT_CONTACT_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Account

An organization account and its profile information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Organization Profile Additional Information*
Contained by	*Sales Account*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Alias	string	The organization alias name.
AnalysisFy	string	The fiscal year that the financial information is based on.
BankCode	string	Identifies the bank in several countries, typically for regulatory purposes.
BankOrBranchNumber	string	Stores bank number for banks and branch number for bank branches. Primarily stores ABA number for US bank branches.
BranchCode	string	Identifies the bank branch in several countries, typically for regulatory purposes.
BranchFlag	boolean	Indicates if this is a branch location. If the value is True, then this is a branch location.
BusinessReport	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	Dun and Bradstreet business information report.
BusinessScope	string	The physical class of business in which a business participates. For example, local, national, or international.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CeoTitle	string	The formal title of the chief executive officer.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Comments	string	The comments for the record.
CongDistCode	string	The U.S. Congressional district code for the account.
ContentSourceNumber	string	The content source number is not used.

Name	Type	Description
ControlYr	decimal	The year when current ownership gained control of the organization.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CorporationClass	string	The taxation classification for corporation entities such as Chapter S in the US.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CurrentFiscalYearPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its current fiscal year.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DataCloudStatus	string	Specifies the enrichment status of the person.
DbRating	string	The Dun & Bradstreet credit rating.
Disadv8aInd	string	Indicates whether the organization is considered disadvantaged by the US government under Title 8A. If the value is Yes, the organization is considered disadvantaged under Title 8A. The default value is No.
DisplayedDUNSPartyIdentifier	long	Dun and Bradstreet does not maintain data for the branch offices of companies that are located beyond North America. Data is only maintained for the company headquarters. If the data pertains only to company headquarters, the headquarters PARTY_ID is stored. If the data pertains to a branch office, the branch PARTY_ID is stored.

Name	Type	Description
DoNotConfuseWith	string	Indicates existence of similarly named businesses.
DomesticUltimateDUNSNumberC	string	DUNS Number for the Domestic Ultimate, which is the highest family member in the same country as the business entity. A subject can be its own Domestic Ultimate.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	The effective latest change is not used.
EffectiveSequence	int	The effective sequence is not used.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EmployeesAtPrimaryAddress	string	The number of employees at the referenced address.
EmployeesAtPrimaryAddressEstimation	string	Indicates the calculation of employees at the primary address as estimated.
EmployeesAtPrimaryAddressMinimum	string	Indicates the calculation of employees at the primary address as minimum.
EmployeesAtPrimaryAddressText	string	The number of employees at the referenced address that cannot be mapped to a number.
EmployeesTotal	decimal	The total number of employees.
EnquiryDUNS	string	The identifier used to query the Dun and Bradstreet data. If a location is a branch, then in some countries the headquarters DUNS number is used to do the query. Otherwise it is the same as the DUNS number.
ExportInd	string	Indicates whether the organization is an exporter. If the value is Y, then the organization is an exporter. The default value is N.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services

Name	Type	Description
		Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
GlobalUltimateDUNSNumberC	string	DUNS Number for the Global Ultimate, which is the highest family member in the same country as the business entity as you proceed further on this branch of the tree. A case can be its own ultimate.
GrowthStrategyDescription	string	The description of the growth strategy.
HQBranchIndicator	string	The status of this site, such as HQ, a branch, or a single location. A list of accepted values are defined in the lookup type HQ_BRANCH_IND.
HomeCountry	string	The home country associated with the party.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
ImportInd	string	Indicates whether the organization is an importer. If the value is Y, then the organization is an importer. The default value is N.
IncorpYear	int	The year that the business was formally incorporated.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LaborSurplusInd	string	Indicates whether the organization operates in an area with a labor surplus. If the value is Y, then the organization operates in an area with a labor surplus. The default value is N.
LastEnrichmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was last enriched in DaaS.

Name	Type	Description
LastSourceUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated by the source system.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdateSourceSystem	string	The source system that last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LegalStatus	string	The legal structure of the organization such as partnership, corporation, and so on.
LineOfBusiness	string	The type of business activities performed at this site.
LocalActivityCode	string	The local activity classification code.
LocalActivityCodeType	string	The local activity classification code type identifier.
LocalBusIdenType	string	The most common business identifiers in a country such as Chamber of Commerce Number in Italy, Government Registration Number in Taiwan. A list of accepted values are defined in the lookup type LOCAL_BUS_IDEN_TYPE.
LocalBusIdentifier	string	The primary identifier assigned to a businesses by a government agency such as Chamber of Commerce, or other authority. It is often used by countries other than USA.
MinorityOwnedInd	string	Indicates whether the organization is primarily owned by ethnic or racial minorities. If the value is Y, then the organization is owned by ethnic or racial minorities. The default value is N.
MinorityOwnedType	string	The type of minority-owned firm.
MissionStatement	string	The corporate charter of organization in user-defined text format.
NextFyPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its next fiscal year.

Name	Type	Description
OobInd	string	Indicates whether the organization is out of business. If the value is Y, then the organization is out of business. The default value is N.
OrgInformation	*Trading Community Organization Profile Additional Information*	The information of the organization.
OrganizationName	string	The name of the party when the party type is Organization.
OrganizationProfileId	long	The unique identifier of the organization profile. • Primary Key
OrganizationSize	string	Size of an organization based on revenue, number of employees, and so on.
OrganizationType	string	Not used in Fusion V1.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
ParentDUNSNumberC	string	Parent is a corporation that owns more than 50 percent capital stock of another corporation. The parent company can also be a subsidiary of another corporation. If the parent also has branches, then it is headquarters and also parent company. Headquarters is a business establishment that has branches or divisions reporting to it, and is financially responsible for those branches or divisions. If the headquarters has more than 50 percent of capital stock owned by another corporation, then it is also a subsidiary. If it owns more than 50 percent of capital stock of another corporation, then it is also a parent.
ParentSubInd	string	Indicates whether the organization is a parent or subsidiary.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix.

Name	Type	Description
		For Person, it is concatenation of person_name and suffix.
PreferredContactEmailAddress	string	The e-mail address of the primary contact person of the organization.
PreferredContactFormattedPhoneNumber	string	The formatted phone number of the primary contact person of the organization.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactName	string	The name of the primary contact person of the organization.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the identifying address.
PrimaryAddressCountry	string	The country listed in the TERRITORY_CODE column of the FND_TERRITORY table for the identifying address.
PrimaryAddressCounty	string	The county of the Identifying address.
PrimaryAddressLine1	string	The first line of the identifying address.
PrimaryAddressLine2	string	The second line of the Identifying address.
PrimaryAddressLine3	string	The third line of the Identifying address.

Name	Type	Description
PrimaryAddressLine4	string	The fourth line of the Identifying address.
PrimaryAddressPostalCode	string	The postal code of the identifying address.
PrimaryAddressProvince	string	The province of the identifying address.
PrimaryAddressState	string	The state of the Identifying address.
PrimaryEmailAddress	string	The e-mail address of the organization.
PrimaryEmailId	long	The primary e-mail contact point ID of the organization.
PrimaryFormattedPhoneNumber	string	The primary telephone number formatted in the local format of the organization.
PrimaryLanguage	string	The standard name for a language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The primary contact point phone ID of the organization.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	The primary uniform resource locator.
PrimaryWebId	long	The unique identifier of the primary uniform resource locator.

Name	Type	Description
PrincipalName	string	The Name of the highest ranking person in the company.
PrincipalTitle	string	The title of the highest ranking person in the organization.
Pronunciation	string	The pronunciation of the organization.
PublicPrivateOwnershipFlag	boolean	Indicator to specify if the organization is privately owned. Y stands for a privately owned organization and N stands for a publicly owned organization.
RegistrationType	string	Indicates the registration type of the organization.
RentOwnInd	string	Indicates if this account owns or rents the place of business. A list of valid values for rent, own, and lease are defined in the lookup OWN_RENT_IND.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The standard industry classification (SIC) code.
SICCodeType	string	The version of the standard industry classification (SIC) code.
SeblUserKeyLoc	string	The location of the account, optional part of the user primary key.
SmallBusInd	string	Indicates whether the organization is considered as a small business. If the value is Y, then the organization is considered as a small business. The default value is N.
Status	string	The status of the record.
StockSymbol	string	The corporate stock symbol such as ORCL.
SuffixOverriddenFlag	boolean	Indicator to specify that the attribute has Y if the suffix is overridden by user and N otherwise. Default value is N.
ThirdPartyFlag	boolean	Indicator that tracks if a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. Y

Name	Type	Description
		stands for a third party relationship, N stands for a direct relationship. If Oracle Service is installed, the third party field in the Customers window is required.
TotalEmployeesEstimatedIndicator	string	Indicates if the employee total is estimated. The accepted values are defined in the lookup type TOTAL_EMP_EST_IND.
TotalEmployeesInd	string	Indicates if subsidiaries are included in the calculation of total employees. The accepted values are defined in the lookup type TOTAL_EMPLOYEES_INDICATOR.
TotalEmployeesMinimumIndicator	string	Indicates if the number is a minimum, maximum, or average number of total employees. The accepted values are defined in the lookup type TOTAL_EMP_MIN_IND.
TotalEmployeesText	string	The total number of employees in text format.
TotalPaymentAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total number of payment experiences.
TradingPartnerIdentifier	string	One column to store the FSIO related trading partner codes. It stores alpha numeric values and also addresses the Fed vs. Non-Fed attribute requirement.
UniqueNameAlias	string	The name as identified by the users to internally recognize the organization.
UniqueNameSuffix	string	Identifies system generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
WomanOwnedInd	string	Indicates whether the organization is primarily owned by women. If the value is Y, then the organization is primarily owned by women. The default value is N.
YearEstablished	int	The year when the organization began doing business.

Additional Account Name

An additional name of an organization, such as a legal name or a DBA name.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}AdditionalOrganizationName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Indicator to specify the preferred additional name for the organization.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameId	long	The unique identifier of the party name. It is primary Key and system generated. • Primary Key
PartyNameType	string	The type of the name. It is a value defined by the additional party name and identifier type entity. The party type must be consistent with the party type that the PARTY_NAME_TYPE can be applied to.
PreferredFlag	boolean	Indicator to specify the name as preferred name for this party within the name type. Possible values are Y and N. Default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Name	Type	Description
TransliterationLang	string	Used to identify the language for the name. It is validated against FND_LANGUAGES.LANGUAGE_CODE. Default value is the Session Language.

Additional Contact Name

An additional name of a person, such as the maiden name or alias.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}AdditionalPersonName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Indicator to specify the preferred additional name of a person.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameId	long	The unique identifier of the party name ID. It is primary key and system generated. • Primary Key
PartyNameType	string	The type of the name. It is a value defined by the additional party name and identifier type entity. The party type must be consistent with the party type that the PARTY_NAME_TYPE can be applied to.
PersonAcademicTitle	string	Used to specify the academic title for a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field degree in HL7.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_

Name	Type	Description
		PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	Used to specify the last name prefix such as fon, van, and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_PREFIX in HZ_PERSON_PROFILES is used. It corresponds to the field Last Name Prefix in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	Used to specify the name suffix such as junior, senior, the third, and so on for a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Suffix in HL7.
PersonPreNameAdjunct	string	Used to specify the name prefix such as Mr., Ms, Dr, and so on for a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Prefix in HL7. It is validated against lookup CONTACT_TITLE.
PersonPreviousLastName	string	Used to specify the previous last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It has no mapping in HL7.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PreferredFlag	boolean	Indicator to specify the name as preferred name for the party within the name type. Possible values are Y and N. Default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TransliterationLang	string	Used to specify the language used for the name. It is validated against FND_LANGUAGES.LANGUAGE_CODE. Default value is the Session Language.

Additional Household Name

An additional name associated with a group. For example, the phonetic name of a group.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}AdditionalGroupName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Household*
Handled by	*Trading Community Group*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Identify the name as preferred name for this party within this name type. Possible values are 'Y' and 'N'. Default is 'N'.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameId	long	Unique Identifier of Party Name. • Primary Key
PartyNameType	string	The type of party name.
PreferredFlag	boolean	The flag which Identifies the name as preferred name for this party within this name type. Possible values are 'Y' and 'N'. Default is 'N'.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TransliterationLang	string	Used to capture the language used for the name.

Additional Identifier

An additional identifier of a trading community member, such as driver's license number or passport number.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}AdditionalPartyId

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*

Relationship Type	Object or Service
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
ExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expiration date for the identifier. It may be NULL, and does not apply to all types of identifiers.
IssueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date in which the Identifier was issued. It may be NULL and does not apply to all types of identifiers.
IssuingAuthorityName	string	The issuing authority name.
IssuingAuthorityPartyId	long	The unique identifier of the issuing authority.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyIdentifierId	long	The unique identifier of the party identifier. • Primary Key
PartyIdentifierType	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.
PartyIdentifierType1	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.
PartyIdentifierValue	string	The value of the party identifier.
PartyName	string	The name of the party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StateProvince	string	The province of the address.
StatusCode	string	The pre-defined code used to indicate the status.

Address

An address of a trading community member, such as Oracle Corporation is located at 500 Oracle Parkway, Redwood Shores, CA.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Telex*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contains	*Trading Community Address Additional Information*
Contains	*Email*
Contains	*Electronic File Transfer*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AddressExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the location is no longer valid.
AddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines that are used in Japan.
AddressStyle	string	Style of the address.
Addressee	string	The information of the addressee.
City	string	The name of the city.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.

Name	Type	Description
ContactPreferenceExistFlag	boolean	Indicator to specify if the contact is primary contact for the party.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	The name of the country.
Country1	string	The attribute country1 is not used.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
DoNotValidateFlag	boolean	Indicator to specify that a particular location is not eligible for address validation irrespective of the current validation.
Eft	*Electronic File Transfer*	The electronic file transfer information for the party.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.

Name	Type	Description
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedAddress	string	The formatted read-only address.
FormattedLocaleAddress	string	The formatted read-only local address.
FormattedMultilineAddress	string	The formatted multi line address of the party site.
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
HouseType	string	Indicates the building type.
IdentifyingAddressFlag	boolean	Indicator to specify the identifying address for the party. Y stands for the indentifying site and N stands for sites that are not the indentifying site.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
Language	string	The operating language for the party site.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	The latitude of the party address.
LocationDirections	string	Directions to the location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
LocationLanguage	string	The operating language for the locations.

Name	Type	Description
Longitude	decimal	The longitude of the party address.
Mailstop	string	A user-defined code to indicate a mail drop point within the organization.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary address of the contact irrespective of the context. Y stands for primary address and N stands for all others.
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	Stores the doing-business_as (DBA) party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameDivision	string	Stores the division party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameLegal	string	Stores the legal party name for a party site. This column is used to store FSIO related legal party name attribute.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteInformation	*Trading Community Address Additional Information*	The party address information.
PartySiteName	string	The user-defined name for the site.

Name	Type	Description
PartySiteNumber	string	The party site number of the address.
PartySiteType	string	Stores the party site type and is based on the lookup. Currently this is either null or one-time.
PartySiteUse	*Trading Community Address Purpose*	The information of the party address usage.
PartyUsageCode	string	The usage context of a party's contact point.
Phone	*Phone*	The phone information for the entity.
Position	string	The primary direction such as north or east that is used to access the location.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four digit extension to the United States postal ZIP code.
Province	string	The name of the province.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The Telex information associated with the party.
UsageCode	string	The usage code is not used.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	The standardized status code describing the results of the validation.

Name	Type	Description
Web	*Web*	The web information related to the record.

Asset

Assets represents the products owned by customers. Anything tangible or intangible that is capable of being owned or controlled to produce value. For example: Tangible Items - Computers, engines, machine parts, and so on. Intangible items - Software, Services, Licenses and agreements.

QName: {http://xmlns.oracle.com/apps/crmCommon/assetImport/publicModel/assetImportService/}Asset

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Account*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AssetAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The cost amount of the asset in the transaction currency.
AssetDescription	string	The description field of the asset.
AssetGroup	string	The name of the asset group.
AssetId	long	The unique identifier of the asset. • Primary Key
AssetName	string	The name that describes the asset.

Name	Type	Description
AssetNumber	string	The number that identifies the asset.
AssetOrigSystem	string	A source system code that identifies the original source system of the asset.
AssetOrigSystemReference	string	A source system reference that identifies the unique ID of the asset in user's legacy or external system.
AssetTag	string	The tag number associated with the asset.
AttributeCategory	string	Standard column used in Fusion tables.
BatchId	long	The batch ID for importing process.
CompetitiveAsset	string	Indicates if the asset belongs to a competitor.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CrmConvRate	string	CRM currency convert rate.
CrmCorpCurrencyCode	string	The corporate currency code.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerId	long	The unique ID for the existing customer party record in the Oracle Fusion destination table.
CustomerPartyNumber	string	
DeleteFlag	boolean	Indicates whether the record can be deleted or not.

Name	Type	Description
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
EnteredCurrencyCode	string	The code that represents the currency for the asset amounts.
ExchangeRate	decimal	The currency exchange rate.
IBAssetId	long	Unique ID of the associated Install Base asset record.
IBAssetSyncedVersionNumber	int	Last synced Version Number of the Install Base Asset
InstallDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date the asset was installed.
InterfaceRowId	long	The interface table row's unique ID.
InventoryItemId	long	The unique ID for the existing sales catalog product (item) record in the Oracle Fusion destination table.
InventoryOrgId	long	Item organization Id as created by Fusion CRM.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Manufacturer	string	The name of the manufacturer.
Model	string	The name of the model.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyType	string	

Name	Type	Description
PartyUniqueName	string	
PrContactPartyId	long	The party identifier of the asset's primary contact.
PrContactPartyNumber	string	
ProdGroupId	long	The product group ID in sales catalog.
Product	string	The name of the product.
ProductType	string	
PurchaseDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date the asset was purchased.
Quantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The quantity purchased.
RequestId	long	A system-generated read-only attribute used by the application framework.
ResourceOwnerId	long	The identifier of the asset's resource owner.
ResourceOwnerPartyNumber	string	
SerialNumber	string	The asset's serial number.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
StatusCode	string	The pre-defined code used to indicate the status.
UOMCode	string	The unit of measure.
Version	string	The version of the asset product.
Year	string	The year of manufacture or the nominal model year of the asset product.

Certification

The certification information of a trading community member, such as a full ISO 9001 registered firm.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}Certification

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CertificationId	long	The unique identifier for certification. • Primary Key
CertificationName	string	The name of the certification such as ISO9000 and GMP001.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrentStatus	string	The name for the status of the certification. For example, applied for, granted, or expired.
ExpiresOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification expires.
Grade	string	The level or grade of certification provided by the ISSUED_BY_AUTHORITY. For example, founding member, gold, fully certified, and partially certified.
IssuedByAuthority	string	The name of the certifying authority.
IssuedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification was issued.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Citizenship

The citizenship information about a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Citizenship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BirthOrSelected	string	Indicates if the citizenship was granted by being born in the country or by naturalization.
CitizenshipId	long	The unique citizenship identifier of a person. • Primary Key
CountryCode	string	The ISO code of the country from which a person claims citizenship.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateDisowned	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when an individual renounced citizenship. This is usually a self-declared date that might not match a legal effective date.
DateRecognized	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the country granted citizenship to the individual. For a native-born person, this date is typically the person's date of birth.
DocumentReference	string	The unique reference number such as passport number or naturalization reference number associated with DOCUMENT_TYPE.
DocumentType	string	The class of document that confirms citizenship. For example, a passport, or naturalization papers.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Classification Assignment

The classification code assigned to a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CodeAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Sales Competitor*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Reference*
Handled by	*Sales Reference Customer*
Handled by	*Company and User Registration*
Handled by	*Sales Party*
Handled by	*Sales Competitor Service*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party Territory service*
Handled by	*Sales Party Resource Service*

Relationship Type	Object or Service
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassCategory	string	The name of the classification category.
ClassCode	string	The code of the classification.
CodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an object. It is primary key and system generated. • Primary Key
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableKey1	string	The first column of the alphanumeric or multi-part foreign key.
OwnerTableKey2	string	The second column of the alphanumeric or multi-part foreign key.
OwnerTableKey3	string	The third column of the alphanumeric or multi-part foreign key.
OwnerTableKey4	string	The fourth column of the alphanumeric or multi-part foreign key.
OwnerTableKey5	string	The fifth column of the alphanumeric or multi-part foreign key.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PrimaryFlag	boolean	Indicator that specifies if this is the primary class code of a class category for the organization. Y stands for the primary class code and N stands for all others.
Rank	decimal	Ranks classes if multiple classes are assigned to a party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Contact

The profile information of the trading community person. The profile includes information such as marital status and additional name.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Person Profile Additional Information*
Contained by	*Trading Community Person Details*
Contained by	*Sales Account*
Contained by	*Loyalty Member*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Loyalty Member Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Alias	string	Person alias name.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.

Name	Type	Description
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DataCloudStatus	string	The enrichment status of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
DateOfDeath	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person died.
DeceasedFlag	boolean	Y or N indicates whether the person is deceased or not.
DeclaredEthnicity	string	The declared ethnicity of the person.
Department	string	The free form text used to name the department.
DepartmentCode	string	The list of values for possible department codes.
Distance	decimal	The distance from the input location.
DoNotCallFlag	boolean	Indicator to specify if the user can send mail to the person or not.
DoNotContactFlag	boolean	Indicator to specify if the user can contact the person through phone, e-mail, or mail or not.

Name	Type	Description
DoNotEmailFlag	boolean	Indicator to specify if the user can send e-mail to the person or not.
DoNotMailFlag	boolean	Indicator to specify if the user can send mail to the person or not.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	The date effective entity. Y indicates that this row represents the latest change in the day.
EffectiveSequence	int	The date effective entity. Indicates the order of different changes made during a day. The lowest value represents the earliest change in the day.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
FavoriteContactFlag	boolean	Indicator to specify if the person is key contact.
Gender	string	The gender details such as male, female, or unknown of the person.
HeadOfHouseholdFlag	boolean	The head of household indicator is not used.
HouseholdIncomeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The household income amount is not used.
HouseholdSize	decimal	The household size is not used.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
JobTitle	string	The free form text for the job title.
JobTitleCode	string	The code given to the job title.

Name	Type	Description
LastContactDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the contact was last contacted.
LastEnrichmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was last enriched in DaaS.
LastKnownGPS	string	The geophysical location that is, GPS point last reported for the person.
LastSourceUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated by the source application.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdateSourceSystem	string	The source application that last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person.
MaritalStatusEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marital status of the person changed.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PersonAcademicTitle	string	The academic title that is part of the name of a person such as Dr. Jane Smith.

Name	Type	Description
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonInformation	*Trading Community Person Profile Additional Information*	The information of the person.
PersonInitials	string	The Initials of the name.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	Used to identify the Last name prefix such as fon, van and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_PREFIX in HZ_PERSON_PROFILES is used. Corresponds to the field, Last Name Prefix in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonName	string	The combination of title, first, middle, last, and suffix names.
PersonNameSuffix	string	Indicates the place in a family structure. For example, III in Tom Jones III.
PersonPreNameAdjunct	string	Salutary introduction such as Mr., Herr, and so on.
PersonPreviousLastName	string	The previous last or surname of the person.
PersonProfileId	long	The unique identifier of the person profile. • Primary Key
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.

Name	Type	Description
PersonalIncomeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated gross annual income of the person.
PlaceOfBirth	string	The place where the person was born, including city and country.
PreferredContactEmail	string	The preferred contact e-mail of the person.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactName	string	The preferred contact name of the person.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredContactPhone	string	The preferred contact phone of the person.
PreferredContactURL	string	The preferred contact uniform resource locator of the person.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the identifying address.
PrimaryAddressCountry	string	The country listed in the TERRITORY_CODE column of the FND_TERRITORY table for the identifying address.
PrimaryAddressCounty	string	The county of the identifying address.

Name	Type	Description
PrimaryAddressLatitude	decimal	The primary address latitude information for the location for spatial proximity and containment purposes.
PrimaryAddressLine1	string	The first line of the identifying address.
PrimaryAddressLine2	string	The second line of the identifying address.
PrimaryAddressLine3	string	The third line of the identifying address.
PrimaryAddressLine4	string	The fourth line of the identifying address.
PrimaryAddressLocationId	long	The primary address location ID.
PrimaryAddressLongitude	decimal	The primary address longitude information for the location for spatial proximity and containment purposes.
PrimaryAddressPostalCode	string	The postal code of the identifying address.
PrimaryAddressProvince	string	The province of the identifying address.
PrimaryAddressState	string	The state of the identifying address.
PrimaryCustomerId	long	The customer party identifier of a primary customer for a given person. There should be a valid relationship between the person and the customer.
PrimaryCustomerName	string	The customer party name of a primary customer for a given person. There should be a valid relationship between the person and the customer.
PrimaryCustomerRelationshipId	long	The unique identifier of the primary customer relationship.
PrimaryEmailAddress	string	The e-mail address of the person.
PrimaryEmailId	long	The primary contact point e-mail ID of the person.
PrimaryFormattedAddress	string	The primary formatted address of the person.
PrimaryFormattedPhoneNumber	string	The primary telephone number formatted in the local format of the person.

Name	Type	Description
PrimaryLanguage	string	The standard name for a language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The primary contact point phone ID of the person.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	The uniform resource locator.
PrimaryWebId	long	The unique identifier of the primary uniform resource locator.
Pronunciation	string	The person pronunciation.
RentOwnInd	string	Indicates if the person rents or owns his or her residence. Lookup values include rent, own, lease, and so on.
RequestId	long	A system-generated read-only attribute used by the application framework.
SalesAffinityCode	string	The affinity of a person towards the deploying organization.
SalesBuyingRoleCode	string	The role of a person in the buying process.
Salutation	string	The phrase used to address a party in any correspondence.

Name	Type	Description
Status	string	The status of the record.
SuffixOverriddenFlag	boolean	This attribute has Y if the suffix is overridden by user and N if not. Default value is N.
UniqueNameSuffix	string	Identifies system generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.

Contact Address

The address of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PersonPartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Contact Preference*
Contains	*Source System Reference*
Contains	*Trading Community Address Additional Information*
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Addressee	string	The information of the addressee in the contact address.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
IdentifyingAddressFlag	boolean	Indicates whether this is the identifying address for the party. If the value is Y, then this is the identifying address for the party.
Language	string	The language used in the contact's location.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
Mailstop	string	A user-defined code to indicate a mail drop point within their organization.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary address of the associated object. If the value is True, then this is the primary address. The default value is False.
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	The doing-business_as (DBA) party name for a party site.
PartyNameDivision	string	The division of the party name for a party site.
PartyNameLegal	string	The legal party name for a party site.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteName	string	The address associated with the party site.
PartySiteNumber	string	The alternate identifier of the party site.

Name	Type	Description
PartySiteType	string	The type of the party site.
PartySiteUse	*Trading Community Address Purpose*	Indicates the use of the party site.
PartyUsageCode	string	The usage context of a party's contact point.
PersonPartySiteInformation	*Trading Community Address Additional Information*	The party site information of the person.
Phone	*Phone*	The phone information for the entity.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Contact Interest

The interests of the trading community member, such as baseball, sports car, or painting.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonInterest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
InterestName	string	A text field that lets you assign a descriptive name to an interest. For example, pets, dogs, baseball, or sports car racing.
InterestTypeCode	string	A code to classify interests for evaluation.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LevelOfInterest	string	The user-defined level number or name to rate the amount of interest in the activity. For example, high, medium, or low.
LevelOfParticipation	string	The user-defined level number or name to indicate if the person participates and to what extent.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PersonInterestId	long	The unique identifier of interests of the person. • Primary Key
RequestId	long	A system-generated read-only attribute used by the application framework.
Since	{http://xmlns.oracle.com/adf/svc/types/}date-Date	An approximate date from which the person was involved with the activity.
SportIndicator	string	Indicates if the activity is a sport. Y stands for sports and N stands for non-sport activities.
Status	string	The status of the record.
SubInterestTypeCode	string	A code to classify subinterests of the interest type code.
Team	string	Any team the person likes to watch or play for.

Contact Language

The languages known information of a trading community member. For example, Mary Smith can speak both Spanish and English but can only read and write English.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PersonLanguage

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*

Relationship Type	Object or Service
Handled by	*Trading Community Group*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LanguageName	string	The standard name for a language. For example, Spanish, Mandarin, or American English. Foreign key to the FND_LANGUAGES table.
LanguageUseReferenceId	long	The unique identifier of the language use reference. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
NativeLanguageFlag	boolean	Indicator to specify if the language is the declared native language of a person. Y stands for a declared native language and N stands for all other languages.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PrimaryLanguageIndicator	string	Indicates if this is the primary language used by a person in day-to-day transactions. Y stands for the primary language and N stands for other languages.
ReadsLevel	string	The user-defined level number or name to indicate the ability to read a language.
RequestId	long	A system-generated read-only attribute used by the application framework.
SpeaksLevel	string	The user-defined level number or name to indicate the ability to speak a language.
SpokenComprehensionLevel	string	The code to indicate comprehension of a spoken language.
Status	string	The status of the record.
WritesLevel	string	The user-defined level number or name to indicate the ability to write in a language.

Contact Preference

The contact preference of the trading community member. For example, do not call Joe Smith between 10 a.m. and 12 noon on weekdays.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}ContactPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Electronic Data Interchange*
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Household*
Contained by	*Phone*
Contained by	*Telex*
Contained by	*Web*
Contained by	*Contact Address*
Contained by	*Electronic File Transfer*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactLevelTable	string	The table that stores the contact level of the contact preference, and uses the SUBJECT_TABLE lookup. The list of accepted values are HZ_PARTIES, HZ_PARTIES_SITES, or HZ_CONTACT_POINTS.
ContactLevelTableId	long	The foreign key to the table specified in CONTACT_LEVEL_TABLE column. The list of accepted values are PARTY_ID from HZ_PARTIES table, CONTACT_POINT_ID from HZ_CONTACT_POINTS table, or PARTY_SITE_ID from HZ_PARTY_SITES table.
ContactPreferenceId	long	The unique identifier for the contact preference. • Primary Key
ContactType	string	The contact party type that defines whether the contact is a sales account, a prospect, a contact, or any other user-defined party type. The default value is CUSTOMER. A list of accepted values is defined in the lookup CONTACT_TYPE.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaximumNoOfInteractUOMCode	string	The period of time during which the maximum number of interactions applies. Uses the MAX_NO_OF_INTERACT_UOM_CODE lookup.
MaximumNoOfInteractions	decimal	The number of times you can use this contact point. The period of time that this number applies is stored in the MAX_NO_OF_INTERACT_UOM_CODE column.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PreferenceCode	string	Indicates whether to use a particular contact method. The list of accepted values are defined in the PREFERENCE_CODE lookup.
PreferenceEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes inactive.
PreferenceEndTimeHR	int	The hour part of time when the contact preference becomes inactive. The time is recorded in the 24 hour format.
PreferenceEndTimeMi	int	The minutes part of the time when the contact preference becomes inactive.
PreferenceStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes active.
PreferenceStartTimeHR	int	The hour part of time when the contact preference becomes active. The time is recorded in the 24 hour format.

Name	Type	Description
PreferenceStartTimeMi	int	The minutes part of the time when the contact preference becomes active.
PreferenceTopicType	string	The appropriate subjects to send the party that the preference is created for. The list of accepted values are defined in the PREFERENCE_TOPIC_TYPE lookup.
PreferenceTopicTypeCode	string	The code of the preference topic type.
PreferenceTopicTypeId	long	The unique identifier of the preference topic type.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
RequestedBy	string	Indicates if the permission or restriction was created internally or requested by the party. The list of accepted values are defined in the REQUESTED_BY lookup.
Status	string	The status of the record.

Credit Rating

The trading community member's credit rating information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CreditRating

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*

Relationship Type	Object or Service
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AverageHighCredit	decimal	The average of all the high credit experiences.
BankruptcyInd	string	Indicates if open bankruptcy exists. Y stands for any open bankruptcy that exists and N stands for no open bankruptcy.
BusinessDiscontinued	string	The business discontinued at the listed location. Prompts reader to contact D and B customer service center if any business is operating.
ClaimsInd	string	Indicates if open claims, legal claims, liens, protested bills, or any equivalent information exists. Y stands for availability of information and N stands for no information.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRatingId	long	The unique identifier of the credit rating. • Primary Key
CreditRiskScoreExplain	string	Explains numeric credit risk score that estimates the risk of delinquent payment over the next 12 months.
CreditScore	string	Indicates the risk of delinquent payments.
CreditScoreAge	decimal	Indicates the age of the credit score expressed in months.
CreditScoreClass	decimal	The date when the credit score was calculated.
CreditScoreCommentary	string	The lookup for explanation codes in the CREDIT_SCORE column.
CreditScoreCommentary10	string	Indicates comments about the credit score.
CreditScoreCommentary2	string	Indicates comments about the credit score.
CreditScoreCommentary3	string	Indicates comments about the credit score.
CreditScoreCommentary4	string	Indicates comments about the credit score.
CreditScoreCommentary5	string	Indicates comments about the credit score.
CreditScoreCommentary6	string	Indicates comments about the credit score.
CreditScoreCommentary7	string	Indicates comments about the credit score.
CreditScoreCommentary8	string	Indicates comments about the credit score.
CreditScoreCommentary9	string	Indicates comments about the credit score.
CreditScoreDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the credit score was calculated.

Name	Type	Description
CreditScoreIncdDefault	decimal	Indicates the probability expressed as a percentage of delinquency for a score range or class.
CreditScoreNatlPercentile	decimal	Indicates the relative credit rating of a business compared to all businesses whose credit ratings are included in the local country database.
CreditScoreOverrideCode	string	Indicates why no score was calculated or why score is equal to zero in the US.
CriminalProceedingInd	string	Indicates if criminal proceedings exist. Y stands for availability of information and N stands for no information.
DebarmentInd	string	Indicates whether the company is debarred from doing business with government agencies. Y stands for company debarred and N stands for not debarred.
DebarmentsCount	decimal	The count of filings by government agencies in the United States that prohibit the party from entering into contracts or transactions with those agencies.
DebarmentsDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date of the most recent filing to prohibit the party from entering into contracts or transactions with a government agency in the United States.
DelqPmtPctgForAllFirms	decimal	Specifies a delinquency percentage for all firms.
DelqPmtRngPrcnt	decimal	Specifies a delinquency percentage for credit score range.
Description	string	The free text description of the record.
DetHistoryInd	string	The code that indicates if detrimental information exists for the party and whether complete details exist on management and party. Y stands for availability of information and N stands for no information.
DisasterInd	string	Indicates if information exists about disasters such as fires, hurricanes, and so on. Y stands for availability of information and N stands for no information.
FailureScore	string	For US, the failure risk class, 1 through 5. For Canada , the stability score that indicates risk of

Name	Type	Description
		business closure, 1 through 10. For Australia, the percentile failure score.
FailureScoreAge	decimal	The failure score age in months.
FailureScoreClass	decimal	1 through 5 to indicate risk of financial stress for a customer account. 1 for a business with greatest risk and 5 for a business with least risk.
FailureScoreCommentary	string	The comments related to failure score.
FailureScoreCommentary10	string	The comments related to failure score.
FailureScoreCommentary2	string	The comments related to failure score.
FailureScoreCommentary3	string	The comments related to failure score.
FailureScoreCommentary4	string	The comments related to failure score.
FailureScoreCommentary5	string	The comments related to failure score.
FailureScoreCommentary6	string	The comments related to failure score.
FailureScoreCommentary7	string	The comments related to failure score.
FailureScoreCommentary8	string	The comments related to failure score.
FailureScoreCommentary9	string	The comments related to failure score.
FailureScoreDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the failure score was calculated.
FailureScoreIncdDefault	decimal	Probability, in percentage, of failure for score range of class.
FailureScoreNatnlPercentile	decimal	The national percentile that reflects the relative ranking of a company among all scored companies in the local country database.
FailureScoreOverrideCode	string	In Europe, code for the reason for variance between the D and B rating and the failure score. In the US, code for the reason why no score was calculated, or why the score is zero.
FinclEmbtInd	string	Indicates if open bankruptcy, receivership liquidation, or any equivalent information

Name	Type	Description
		exists. Y stands for availability of information and N stands for no information.
FinclLglEventInd	string	Indicates if special events such as financial embarrassment and legal filings exist. Y stands for availability of information and N stands for no information.
GlobalFailureScore	string	The global score for the risk of business default.
HighCredit	decimal	Maximum credit ever extended to the organization.
HighRngDelqScr	decimal	Specifies the high end of the range of the commercial credit score.
JudgementInd	string	Indicates if open judgments exist. Y stands for any open judgment that exists and N stands for no open judgments.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LienInd	string	Indicates if open liens exist. Y stands for any open lien that exists and N stands for no open liens.
LowRngDelqScr	decimal	Specifies the low end of the range of the commercial credit score.
MaximumCreditCurrencyCode	string	The currency used to denominate the MAXIMUM_CREDIT_RECOMMENDATION column.
MaximumCreditRecommendationAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Maximum credit limit recommended for the currency specified in the MAXIMUM_CREDIT_CURRENCY_CODE column.
NegvPmtExpl	string	The conditional comment generated when negative payments are present.
NoTradeInd	string	Indicates that no trade experiences exist. Y stands for any trade experience that exists and N stands for no trade experience.

Name	Type	Description
NumberParentBankruptcyConversions	decimal	The number of bankruptcy conversions by the parent.
NumberParentBankruptcyFiling	decimal	The number of bankruptcies filed by the parent.
NumberSpecialEvent	decimal	The number of occurrences of the special events.
NumberTradeExperiences	decimal	The number of trade experiences.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OprgSpecificationEvntInd	string	Indicates if information exists about operational changes such as name changes, management changes, change of control, moves, and so on. Y stands for availability of information and N stands for no information.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OtherSpecificationEvntInd	string	Indicates if special events exist that are not otherwise specified.
ParentHQBankruptcyInd	string	Indicates if parent (P) or headquarters (H) are entered into bankruptcy.
PartyId	long	The unique identifier of the contact party.
PaydexComment	string	Additional paydex information.
PaydexFirmComment	string	Comment on the paydex score for the organization.
PaydexFirmDays	string	The number of days used in the paydex score.
PaydexIndustryComment	string	Comment on the paydex score for the industry.
PaydexIndustryDays	string	The number of days used in the paydex score for the industry.

Name	Type	Description
PaydexNorm	string	Median or average Paydex score for the industry.
PaydexScore	string	Paydex score for the previous 12 months payment history.
PaydexThreeMonthsAgo	string	Paydex score three months ago.
PrntBkcyChapterConv	string	The change of bankruptcy type.
PrntBkcyConvDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the bankruptcy converted from one type to another.
PrntBkcyFilgChapter	decimal	The chapter number of the bankruptcy filed by the parent under the US uniform commercial code.
PrntBkcyFilgDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The bankruptcy filing date of the parent.
PrntBkcyFilgType	string	The type of bankruptcy filed by the parent.
PubRecExpl	string	The conditional comment generated if suits, liens, and judgments exist.
RatedAsOfDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the rating was acquired.
Rating	string	The rating number or code of the rating company.
RatingOrganization	string	The name of the credit rating organization.
RequestId	long	A system-generated read-only attribute used by the application framework.
SecuredFlngInd	string	Indicates if open secured filings such as UCC filings, secured charges or mortgages pledging, or any equivalent information exists. Y stands for availability of information and N stands for no information.
SlowTradeExpl	string	The conditional comment generated when paydex score indicates that slow trade experiences are present.

Name	Type	Description
SpecialEventComment	string	The comment generated if special event section exists.
SpecialEventText	string	The narrative of the special event.
SpecialEventUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the special event was updated.
Status	string	The status of the record.
SuitInd	string	Indicates if open suits exist. Y stands for any open suit that exists and N stands for no open suits.

Customer Contact Profile

The person who functions as a contact for an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Organization Contact Additional Information*
Contains	*Customer Contact Responsibility*
Contains	*Source System Reference*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
ContactFormattedAddress	string	The formatted version of the contact address.
ContactFormattedMultilineAddress	string	The formatted multiline version of the contact address.
ContactName	string	The name of the contact.
ContactNumber	string	The user-defined identification number for this contact.
ContactPartyId	long	The unique identifier of the contact.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerEmailAddress	string	The e-mail address of the customer this contact person belongs to.
CustomerName	string	The name of the customer.
CustomerPartyId	long	The unique identifier of the customer this contact person belongs to.
CustomerPartyNumber	string	The alternate unique identifier of the customer this contact person belongs to.
CustomerUniqueName	string	The unique name of the customer. For an Organization, the value is a concatenation of unique_name_alias and suffix. For a Person, the value is a concatenation of person_name and suffix.
DecisionMakerFlag	boolean	Indicates if this contact is a decision maker. If the value is True, then the contact is a decision maker.
Department	string	The free form text used to name the department for the contact.
DepartmentCode	string	The department code for the contact. A list of accepted values is defined in the lookup DEPARTMENT_TYPE.
EmailAddress	string	The email address associated with the record.
FormattedAddress	string	The formatted address information.
FormattedPhoneNumber	string	The formatted phone number.
JobTitle	string	The free form text for job title.
JobTitleCode	string	The code given to the job title.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The unique identifier of the organization contact. • Primary Key
OrgContactInformation	*Trading Community Organization Contact Additional Information*	The information of the organization contact.
OrganizationContactRole	*Customer Contact Responsibility*	The role of the contact in the organization.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyRelationshipId	long	The unique identifier of the relationship of the party.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteName	string	The address associated with the party site.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonCertReasonCode	string	The reason for the organization's current certification level assignment. A list of accepted values is defined using the lookup HZ_PARTY_CERT_REASON.
PersonCertificationLevel	string	The certification level of a organization. A list of accepted values is defined in the lookup HZ_PARTY_CERT_LEVEL.

Name	Type	Description
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLanguageName	string	The language name associated with the person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.
PersonPreviousLastName	string	The previous last name of a person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.

Name	Type	Description
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.
Rank	string	The rank associated with this customer contact.
ReferenceUseFlag	boolean	Indicates if this contact can be used as a reference. If the value is Y, then the contact can be used as a reference.
RequestId	long	A system-generated read-only attribute used by the application framework.
SalesAffinityCode	string	The affinity of a contact to the deploying organization. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_AFFINITY_CODE.
SalesAffinityComments	string	The comments about the contact's affinity to the deploying organization.
SalesBuyingRoleCode	string	The roles played by a contact in the buying process, for example, decision maker or supporting role. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_BUY_ROLE_CODE.
SalesInfluenceLevelCode	string	The influence of the contact has on the deploying organization. A list of accepted values are defined in the lookup HZ_SLS_CNTCT_INFLUENCE_LVL_CD.
Salutation	string	The size of the household this person is a part of.
WebUrl	string	The web URL of contact point.

Customer Contact Responsibility

The role or responsibility of an organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContactRole

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Customer Contact Profile*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The organization contact identifier. Foreign key to the HZ_ORG_CONTACTS table.
OrgContactRoleId	long	The unique contact role identifier. It is primary key and system generated. • Primary Key
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PrimaryContactPerRoleType	string	Indicates if the contact is the primary contact for the role. Y stands for primary contact and N stands for a contact that is not the primary contact for the role type. The default value is N.
PrimaryFlag	boolean	Indicator that specifies if this is the primary role for the contact. Y stands for primary role and N stands for a non-primary role for the contact. The default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
RoleLevel	string	The role level of the contact. For example, executive, department head, or middle manager.
RoleType	string	The role performed by a contact.
Status	string	The status of the record.

E-Mail

The e-mail address associated with a trading community member. For example, john.doe@oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Email

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*

Relationship Type	Object or Service
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The preferred format for e-mail addressed to this address such as HTML or ASCII. A list of accepted values is defined using the lookup EMAIL_FORMAT.
EmailInformation	*Trading Community Contact Point Additional Information*	The additional information about the e-mail.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary e-mail of the associated object. If the value is True, then this is the primary e-mail. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.

Name	Type	Description
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

E-Mail Domain

The domain of the e-mail address associated with a trading community member. For example, ABC Corporation has CORP and BUSINESS e-mail domains.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}EmailDomain

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DomainName	string	The actual or non-reversed domain name of the organization for display purpose.
EmailDomainId	long	The sequence generated unique identifier. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
Status	string	The status of the record.

Name	Type	Description
TransposedDomain	string	The reversed domain name for the purposes of searching.

Education

The trading community person's education information. For example, a person may have attended the University of California from 1995 to 1999 and received an undergraduate degree in Computer Science with a GPA of 4.0.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Education

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CourseMajor	string	The primary area of study.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DegreeReceived	string	The abbreviation for the degree. For example, BA, BSc, MBA, MSc, PhD, and Gd (graduate diploma).
EducationId	long	The unique identifier of the education record. • Primary Key
LastDateAttended	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The year and month when a person last attended the educational institution.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
SchoolAttendedName	string	The name of the school.
SchoolPartyId	long	The party identifier of the school.
StartDateAttended	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the attendance of a person starts.
Status	string	The status of the record.
TypeOfSchool	string	The classification of the educational organization. For example, high school, college, university, or professional school. Note that the classification of schools varies among different cultures.

Electronic Data Interchange

The electronic data interchange information associated with a trading community member. For example, the details of standard codes and payment methods that are to be used for data interchange.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Edi

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key

Name	Type	Description
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EDIEceTpLocationCode	string	The trading partner location code for EDI Gateway.
EDIIdNumber	string	The EDI trading partner number for the supplier site.
EDIPaymentFormat	string	Indicates type of information being transmitted with the funds if using EDI_PAYMENT_METHOD ACH. The list of accepted values are CCD, CCP, CHZ, CTX, PPD, and PPP.
EDIPaymentMethod	string	Indicates how a payment is to be made through EDI. The list of accepted values are ACH and BOP.
EDIRemittanceInstruction	string	Indicates who will send the remittance advice. The list of accepted values are Banks or Payables systems.
EDIRemittanceMethod	string	Indicates how remittance advice are sent to the supplier.
EDITpHeaderId	long	The unique identifier of the EDI transaction header.
EDITransactionHandling	string	The ANSI standard code for EDI transaction type.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary EDI of the associated object. If the value is True, then this is the primary EDI. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Electronic File Transfer

The electronic funds transfer information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Eft

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EFTPrintingProgramId	long	The printing program identifier.
EFTSWIFTCode	string	The EFT swift code information.
EFTTransmissionProgramId	long	The transmission program identifier.

Name	Type	Description
EFTUserNumber	string	The number that identifies you as a user of electronic funds transfer service for your bank or clearing organization.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or

Name	Type	Description
		site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Employment History

The employment history information of a trading community member. For example, John Doe was a Vice President at Business World from 2001 to 2007 and President at World of Business from 2007 to 2009.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}EmploymentHistory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Work Class*
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*

Relationship Type	Object or Service
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the employment officially began.
Branch	string	The military branch code.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmployedAsTitle	string	Job position title assigned by an employer.
EmployedAsTitleCode	string	The code for the job title. If title cannot be represented by a code, then the EMPLOYED_AS_TITLE column must be used.
EmployedByDivisionName	string	The common name of a division or an organization at which the person was employed.
EmployedByNameCompany	string	The name of the organization at which the person was employed. Note that the name must not include the division name.
EmployedByPartyId	long	The party identifier of the employer for situations in which the employer is represented as a party.
EmploymentHistoryId	long	The unique employment history identifier. • Primary Key

Name	Type	Description
EmploymentTypeCode	string	Indicates whether the employment is part-time or full-time.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FacultyPositionFlag	boolean	Indicator Y or N to specify whether the position is a faculty position or not.
FractionOfTenure	decimal	The fraction of tenure.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MilitaryRank	string	The rank of the person in the branch.
PartyId	long	The unique identifier of the contact party.
ReasonForLeaving	string	The free format text that describes the reason for leaving.
RequestId	long	A system-generated read-only attribute used by the application framework.
Responsibility	string	Job responsibility of the person.
Served	string	Indicates where the person performed military service.
Station	string	Indicates the station name.
Status	string	The status of the record.
SupervisorName	string	The full name of the manager of the person.
TenureCode	string	The type of tenure for faculty positions.
WeeklyWorkHours	decimal	The usual number of hours worked per week.

Name	Type	Description
WorkClass	*Work Class*	The custom-defined classification information about job title and work experience of a person.

Financial Number

The financial report numbers of a trading community member, such as assets, liabilities, and cash balance.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}FinancialNumber

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Financial Report*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FinancialNumber	decimal	The value for the financial number. For example, the FINANCIAL_NUMBER_NAME column could have a numerical value of 3,000, 000,000 for annual sales.
FinancialNumberCurrency	string	The ISO currency code for the financial number.
FinancialNumberId	long	The unique identifier of the financial number. • Primary Key
FinancialNumberName	string	A text field that lets you assign a descriptive name to a financial report item. For example, gross annual sales, profit, and net annual sales. A user-defined lookup.
FinancialReportId	long	The unique identifier of the financial report.
FinancialUnitsApplied	decimal	The order of magnitude (tens, hundreds, thousands, and so on) used for the FINANCIAL_NUMBER column.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ProjectedActualCode	string	Indicates if the projected amount is projected or actual. The list of accepted values are P and A. The default value is A.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Financial Profile

The financial details of a trading community member, such as bank account information that was obtained as part of a credit evaluation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}FinancialProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessAuthorityDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when access to the information in the account was granted.
AccessAuthorityGranted	string	Indicates whether access to information in a financial account was granted. If the value is True, then the access has been granted.
BalanceAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The reported balance on an account. The balance can be a positive number, negative number, or zero.
BalanceVerifiedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the account balance was verified.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FinancialAccountNumber	string	The alternate unique identifier of the financial account.
FinancialAccountType	string	The short name that classifies the financial accounts. For example, savings, checking, home loan, personal loan, trading, and so on.
FinancialOrgType	string	The classification of financial organizations. For example, bank, savings and loan, private lender, building society and so on.
FinancialOrganizationName	string	The name of the financial organization that holds the account.
FinancialProfileId	long	The unique identifier of the party's financial profile. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the

Name	Type	Description
		start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Financial Report

The financial report information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}FinancialReport

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Financial Number*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*

Relationship Type	Object or Service
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AuditInd	string	Indicates if the financial reports are audited. If the value is True, then the financial reports have been audited.
ConsolidatedInd	string	Indicates if the financial reports are consolidated. If the value is C, then the reports are consolidated.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateReportIssued	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the financial report was published.
DocumentReference	string	The unique reference number such as passport number or naturalization reference number associated with DOCUMENT_TYPE.
EstimatedInd	string	Indicates whether the financial reports provide estimated data. If the value is True, then the financial reports provide the data.
FinalInd	string	Indicates whether the financial reports are the final closing statements for a business that has ceased operations. If the value is True, then the reports are final closing statements.
FinancialNumber	*Financial Number*	The number that indicates a financial value like annual sales.
FinancialReportId	long	The unique identifier for a financial report. • Primary Key

Name	Type	Description
FiscalInd	string	Indicates whether the financial reports cover a fiscal twelve-month accounting period. If the value is Y, then the financial report covers a twelve-month fiscal period.
ForecastInd	string	Indicates whether the financial reports display forecasts or future projections. If the value is Y, then the financial report displays forecasts.
IssuedPeriod	string	The period covered by the financial report. For example, fiscal year 1999, 1998, and so on.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OpeningInd	string	Indicates whether the financial reports are the opening statements for a business. If the value is Y, then the financial statements are opening statements.
PartyId	long	The unique identifier of the contact party.
ProformaInd	string	Indicates if the financial reports are pro forma numbers. If the value is Y, then the financial reports are pro forma numbers.
QualifiedInd	string	Indicates whether the financial reports include qualifying remarks from auditors about the fairness and accuracy of the numbers. If the value is Y, then the report is qualified by auditors.
ReportEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date of the report, used instead of Issued Period.
ReportStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date of the report, used instead of Issued Period.
RequestId	long	A system-generated read-only attribute used by the application framework.
RequiringAuthority	string	The name of the primary organization that requires this financial report. For example,

Name	Type	Description
		auditors, the Federal Trade Commission, or the Internal Revenue Service.
RestatedInd	string	Indicates whether the financial reports include data that was corrected after the original financial reports. If the value is Y, then the report has been corrected.
SignedByPrincipalsInd	string	Indicates whether the financial reports were signed by the principals of the organization. If the value is Y, then the reports are signed.
Status	string	The status of the record.
TrialBalanceInd	string	Indicates whether the financial reports include trial balance numbers. If the value is Y, then the financial report includes trial balance numbers.
TypeOfFinancialReport	string	A name for the financial report. For example, 10K report, Annual Report, or Shareholder's Special Report.
UnbalancedInd	string	Indicates whether the financial reports include balance sheet accounts that do not balance. If the value is Y, then report includes unbalanced balance sheet accounts.
WhUdpateId	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the record was entered or changed in a data warehouse.

Household

The trading community group information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}Group

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Additional Household Name*
Contains	*Classification Assignment*

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Web*
Contains	*Contact Preference*
Contains	*Phone*
Contains	*Contact Language*
Contains	*Certification*
Contains	*Usage Assignment*
Contains	*Additional Identifier*
Contains	*E-Mail Domain*
Contains	*Instant Messaging*
Contains	*E-Mail*
Contains	*Address*
Contains	*Preference*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Trading Community Group*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalGroupName	*Additional Household Name*	Additional name associated with the group.
AdditionalPartyId	*Additional Identifier*	Additional Identifier for the group.
AnnualExpenses	long	Household annual expenses.
AnnualIncome	long	The value for annual income.
AverageAge	long	Household average age.
Certification	*Certification*	Certification information associated with the group.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
CertificationReasonCode	string	Reason for group party's current certification level assignment. HZ_PARTY_CERT_REASON lookup type.
Child0to6Number	long	The number of children between 0 and 6 years.
Child13to18Number	long	The number of children between 13 and 18 years.
Child7to12Number	long	The number of children between 7 and 12 years.

Name	Type	Description
CodeAssignment	*Classification Assignment*	Classification code assigned to the group.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DependentsNumber	long	The number of dependents.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	Not Used.
EffectiveSequence	int	Not Used.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
Email	*E-Mail*	The email address associated with the record.
EmailDomain	*E-Mail Domain*	Email domain information for the group.
FinancialProfile	*Financial Profile*	Financial Profile information of the group.
GroupName	string	Name of this group.

Name	Type	Description
GroupSize	long	Size of the group.
GroupType	string	The party type can only be person, organization, group.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MedianAge	long	The age of the median.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	Preference information of the group.
PartySite	*Address*	Address information associated with the group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	Party usage assigned to the group.
PersonLanguage	*Contact Language*	Language information associated with a group.
Phone	*Phone*	The phone information for the entity.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.

Name	Type	Description
PreferredContactPersonEmail	string	The E-Mail of the preferred contact person.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredContactPersonName	string	The name of the preferred contact person.
PreferredContactPersonPhone	string	The phone number of the preferred contact person.
PreferredContactPersonURL	string	The URL of the preferred contact person.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the primary address.
PrimaryAddressCountry	string	The country for the primary address.
PrimaryAddressCounty	string	The country of the primary address.
PrimaryAddressLine1	string	Line one of the primary address.
PrimaryAddressLine2	string	Line two of the primary address.
PrimaryAddressLine3	string	Line three of the primary address.
PrimaryAddressLine4	string	Line four of the primary address.
PrimaryAddressLocationId	long	The unique identification number for the primary address location.

Name	Type	Description
PrimaryAddressPartySiteId	long	The unique identifier for the primary address party site.
PrimaryAddressPostalCode	string	The postal code of the primary address.
PrimaryAddressProvince	string	The province of the primary address.
PrimaryAddressState	string	The state of the primary address.
PrimaryEmail	string	Primary E-Mail Address of the Group.
PrimaryEmailId	long	Primary E-Mail ID.
PrimaryFormattedAddress	string	Primary formatted address for the group.
PrimaryFormattedMultilineAddress	string	Primary formatted multiline address for the group.
PrimaryFormattedPhoneNumber	string	Primary formatted phone number for the group.
PrimaryLanguage	string	Standard name for a primary language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The unique identification number for the primary phone.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.

Name	Type	Description
PrimaryURL	string	Primary URL.
PrimaryWebId	long	Primary Web ID.
ProfileCreatedBy	string	The user who created the row.
ProfileCreatedByModule	string	The module that created the profile.
ProfileCreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time of the creation of the row.
ProfileLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time of the last update of the row.
ProfileLastUpdateLogin	string	The session login associated to the user who last updated the row.
ProfileLastUpdatedBy	string	The user who last updated the row.
Relationship	*Relationship*	Relationship information for the group.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.
SuffixOverriddenFlag	boolean	This will have Y if the suffix is overridden by user N if not.
UniqueNameSuffix	string	System generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
WealthAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Household wealth amount or net worth.
Web	*Web*	The web information related to the record.

Instant Messaging

The instant messaging information of a trading community member, such as the AOL identifier or Yahoo Messenger information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}InstantMessaging

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessagingAddress	string	The instant messaging information address.
InstantMessagingInformation	*Trading Community Contact Point Additional Information*	The instant messaging information related to the record.

Name	Type	Description
InstantMessengerType	string	The type of the instant messenger type.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary instant messaging Id of the associated object. If the value is True, then this is the primary instant messaging Id. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.

Name	Type	Description
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Phone

The phone number associated with a trading community member. For example, the phone number for Oracle Corporation is 650-506-6000.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Phone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*

Relationship Type	Object or Service
Contained by	*Contact Address*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key

Name	Type	Description
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FormattedPhoneNumber	string	The formatted phone number.
LastContactDtTime	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time of last contact placed to this contact point.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PagerTypeCode	string	The PAGER_TYPE_CODE column stores the lookup code for the type of pager. The type of pager determines how the page is received. For example, tone, number, alphanumeric or two-way alphanumeric.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCallingCalendar	string	The name or code for a calling calendar used with this telephone number. This attribute is no longer used in Fusion applications.
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The additional number addressed after initial connection to an internal telephone system.
PhoneInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community phone.
PhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound, or outbound.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.

Name	Type	Description
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RawPhoneNumber	string	The unformatted telephone number.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TimezoneCode	string	The foreign key to FND_TIMEZONES_B.TIMEZONE_CODE.
TransposedPhoneNumber	string	This column stores the concatenation of PHONE_COUNTRY_CODE, PHONE_AREA_CODE, and PHONE_NUMBER in reverse order. For example, if PHONE_COUNTRY_CODE=1, PHONE_AREA_CODE=650 and PHONE_NUMBER=5065747, this column stores 74756050561. This column is used for building an index to search for any combination of the above three columns.

Preference

The preferences of a trading community member. For example, a member may prefer that the transaction currency is the US dollar.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalValue1	string	The additional preference value.
AdditionalValue2	string	The additional preference value.
AdditionalValue3	string	The additional preference value.
AdditionalValue4	string	The additional preference value.
AdditionalValue5	string	The additional preference value.
Category	string	A preference category is used to logically group one or more preference codes in a

Name	Type	Description
		particular user interface. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Module	string	The program that creates the preference. For example, TCA MOBILE CUSTOMER DIRECTORY.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PartyPreferenceId	long	The unique identifier of the party preference. • Primary Key
PreferenceCode	string	A preference code determines if a preference is a single value or a multiple value preference. The preference code is validated by the HZ_PREFERENCE lookup. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
ValueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The preference value when the data type is DATE.
ValueName	string	A user-defined alias for a preference value.

Name	Type	Description
ValueNumber	decimal	The preference value when the data type is NUMBER.
ValueVarchar2	string	The preference value when the data type is VARCHAR2.

Relationship

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}Relationship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Address*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Usage Assignment*
Contains	*Trading Community Relationship Additional Information*
Contains	*Customer Contact Profile*
Contains	*Source System Reference*
Contains	*Email*
Contained by	*Trading Community Person Details*
Contained by	*Household*

Relationship Type	Object or Service
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalInformation1	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type. For operating unit and legal entity to bank relationships, column stores communication agreement ID, which identifies agreement between payer and bank on type of EDIFACT documents that can be sent for processing payments.
AdditionalInformation10	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation11	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation12	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation13	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation14	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation15	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation16	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation17	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation18	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation19	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation2	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation20	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation21	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation22	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation23	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation24	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation25	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation26	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation27	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation28	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation29	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation3	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation30	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation4	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation5	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation6	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation7	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation8	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation9	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DirectionCode	string	The code of the relationship direction. The list of accepted values are defined in the lookup DIRECTION_CODE.
Email	*E-Mail*	The email address associated with the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
ObjectEmailAddress	string	The e-mail address of the object party in the relationship.
ObjectId	long	The unique identifier of the object party in this relationship.
ObjectPartyName	string	The name of the object party in this relationship.
ObjectTableName	string	The source table name of the object party in this relationship.
ObjectType	string	The object type of the relationship.
ObjectUsageCode	string	The usage code of object party in the relationship.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationContact	*Customer Contact Profile*	The organization contact information.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyName	string	The name of the party.
PartySite	*Address*	The party site associated with the relationship.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the relationship.
PercentageOwnership	decimal	The percentage of the child entity owned by the parent entity.
Phone	*Phone*	The phone information for the entity.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.

Name	Type	Description
RelationshipCode	string	The code for a forward or a backward relationship. A list of accepted relationship values is defined in the lookup PARTY_ RELATIONS_TYPE.
RelationshipId	long	The relationship identifier for the record.
RelationshipInformation	*Trading Community Relationship Additional Information*	The relationship type information.
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key
RelationshipType	string	The relationship type name. For example, CUSTOMER_SUPPLIER. A list of valid relationship types is defined in the lookup HZ_ RELATIONSHIP_TYPE.
RequestId	long	A system-generated read-only attribute used by the application framework.
Role	string	The role between the subject and object party in this relationship.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
SubjectEmailAddress	string	The e-mail address of the subject party in relationship.
SubjectId	long	The unique identifier of the subject in this relationship.
SubjectPartyUsageAssignment	*Usage Assignment*	The usage assignment of the subject party in the relationship.
SubjectTableName	string	The source table of the subject.
SubjectType	string	The subject type of the relationship.
SubjectUsageCode	string	The usage code of subject party in the relationship.

Name	Type	Description
Web	*Web*	The web information related to the record.

Sales Account

An object used to store sales account profile attributes. A sales account is a sales party with usage as sales account.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesAccount

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Account*
Contains	*Sales Account Territory*
Contains	*Asset*
Contains	*Household*
Contains	*Trading Community Organization Details*
Contains	*Sales Account Contact Point SDO*
Contains	*Sales Account Resource*
Contains	*Contact*
Contains	*Trading Community Person Details*
Contains	*Sales Account Contact*
Contained by	*Sales Party*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountDirectorId	long	The identifier for the sales account owner.
Asset	*Asset*	Represents the products owned by customer.
AssgnExceptionFlag	boolean	The indicator shows whether the sales account has the required dimensions to allow the assignment manager to assign territories to the sales account.
AttributeCategory	string	A segment of the user descriptive flex field.
ClassCategory	string	The label displaying the classification category.
ClassCategory1	string	The label displaying the classification category.
ClassCode	string	The label displaying the classification code.
CodeAssignmentId	long	The label displaying the classification code assignment identifier for a sales party.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CpdrfLastUpd	string	The standard replication column.
CpdrfVerPillar	int	The standard replication column.
CpdrfVerSor	int	The standard replication column.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteCustomerKey	string	The label for a transient attribute for delete operations in a web services call. If set to Y in WS payload, then sales account profile, its party usage, contact relationships, hierarchies and TCA party will be deleted. If set to N in the payload, then only sales account profile will be deleted.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
ExistingFlag	boolean	The indicator shows whether there is an existing selling or billing relationship with the sales account.
ExistingFlgLastUpdDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the existing flag was last modified.
Group	*Household*	The group associated to the sales account.
InternalStatus	string	The label displaying the internal status of a sales account to track if its active or inactive. Values for InternalStatus are active and inactive.
LastAssignedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date indicates when the sales account territory assignment was last run by assignment manager.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Meaning	string	The label displaying the classification category meaning.
NamedAccountFlag	boolean	The indicator shows whether a sales account is a named sales account.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationD	*Account*	The organization associated to the sales account.
OrganizationParty	*Trading Community Organization Details*	The organization associated to the sales account.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUniqueName1	string	The label displaying the unique name of a sales party.
PersonD	*Contact*	The person associated to the sales account.
PersonParty	*Trading Community Person Details*	The person associated to the sales account.
PrimaryFlag	boolean	The label indicating whether an account is designated primary for a sales party with multiple sales accounts. Values for PrimaryFlag are yes and no.
Rating	int	Indicates the user's favorite rating for the sales account. Users can select a number between 1 to 5 to set or update the favorite rating for the sales account.
SalesAccountContactPoints	*Sales Account Contact Point*	The contact points associated to the sales account.
SalesAccountContacts	*Sales Account Contact*	The contacts associated to the sales account.

Name	Type	Description
SalesAccountId	long	The label displaying the internal identifier of a sales party. • Primary Key
SalesAccountName	string	Indicates the name of the sales account.
SalesAccountNameSuffix	string	The suffix of the sales account name.
SalesAccountResource	*Sales Account Resource*	The resources associated to the sales account.
SalesAccountStatus	string	The status value reflecting the current state of the sales account. Values for status are active and inactive.
SalesAccountTerritory	*Sales Account Territory*	The territories associated to the sales account.
SalesAccountType	string	Type of account, contact or household. For example, customer or prospect.
SalesAccountUniqueName	string	Indicates the sales account unique name.
SellToPartySiteId	long	Indicates the party site id which has usage as SELL_TO.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.
Status1	string	The label displaying the status of a sales account. Sample values for status are active and inactive.
UpdateRating	int	Indicates the user's favorite rating for the sales account. Users can pass a number between 1 to 5 to query sales accounts for which they have given one-star favorite rating to 5-star favorite rating.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.
UserSalesAccountId	long	Identifier of the user who has marked this customer account as a favorite.
ViewApplicationId	long	The label displaying view application.

Name	Type	Description

Sales Account Contact

These are contacts associated with the account.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesAccountContacts

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Account*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AffinityLvlCd	string	The LOV that shows the affinity the contact has with the deployment company. Valid values are Favorable, negative, neutral, somewhat favorable, and somewhat negative.
BuyingRoleCd	string	Indicates the buying role of the contact. LOV with valid values as Does not matter, Key decision maker, Secondary decision maker, and Supporting role.
Comments	string	The comments for the record.
CpdrfLastUpd	string	The standard replication column.
CpdrfVerPillar	int	The standard replication column.
CpdrfVerSor	int	The standard replication column.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
InfluenceLvlCd	string	Indicates the influence level of the contact. LOV with valid values as Influence Circle, None, and Political Structure.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PersonPartyId	long	Indicates the person party id of this relationship.
PrimaryFlag	boolean	Indicates account contact as primary.
RelationshipId	long	The relationship identifier for the record.
SAccountContactId	long	Indicates the account contact identifier. • Primary Key
SalesAccountId	long	Indicates the account which is related to the contact.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Account Contact Point

These are contact points associated with the account.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesAccountContactPoints

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Account*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point.
CpdrfLastUpd	string	The standard replication column.
CpdrfVerPillar	int	The standard replication column.
CpdrfVerSor	int	The standard replication column.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PrimaryFlag	boolean	Indicates contact point as primary. Note, multiple contact points for an account can be marked as primary, as long as they are not of the same type. For example, an account can have a primary email and a primary phone number.
SAccountContactPointId	long	Indicates account contact point identifier. • Primary Key
SalesAccountId	long	Indicates account which is related to the contact point.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Account Resource

An object representing a resource party that is assigned to a sales account team and has a defined access role for the sales account.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesAccountResource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Party*

Relationship Type	Object or Service
Contained by	*Sales Account*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Sales Account Resource Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	The access level determines the type of access granted to the resource as well as managers of the organizations. The possible values are contained in the ZCA_ACCESS_LEVEL lookup.
AccountDirectorId	long	The party identifier for the resource designated as the sales account owner.
AssignmentTypeCode	string	The code indicating how the resource is assigned to the sales account team. The possible values are contained in the ZCA_ASSIGNMENT_TYPE lookup.
Attribute1	string	The segment of the user descriptive flex field.
Attribute10	string	The segment of the user descriptive flex field.
Attribute11	string	The segment of the user descriptive flex field.
Attribute12	string	The segment of the user descriptive flex field.
Attribute13	string	The segment of the user descriptive flex field.
Attribute14	string	The segment of the user descriptive flex field.
Attribute15	string	The segment of the user descriptive flex field.
Attribute2	string	The segment of the user descriptive flex field.
Attribute3	string	The segment of the user descriptive flex field.

Name	Type	Description
Attribute4	string	The segment of the user descriptive flex field.
Attribute5	string	The segment of the user descriptive flex field.
Attribute6	string	The segment of the user descriptive flex field.
Attribute7	string	The segment of the user descriptive flex field.
Attribute8	string	The segment of the user descriptive flex field.
Attribute9	string	The segment of the user descriptive flex field.
AttributeCategory	string	The structure definition of the user descriptive flex field.
AttributeDate1	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The segment of the user descriptive flex field.
AttributeDate2	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The segment of the user descriptive flex field.
AttributeDate3	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The segment of the user descriptive flex field.
AttributeDate4	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The segment of the user descriptive flex field.
AttributeDate5	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The segment of the user descriptive flex field.
AttributeNumber1	decimal	The segment of the user descriptive flex field.
AttributeNumber2	decimal	The segment of the user descriptive flex field.
AttributeNumber3	decimal	The segment of the user descriptive flex field.
AttributeNumber4	decimal	The segment of the user descriptive flex field.
AttributeNumber5	decimal	The segment of the user descriptive flex field.
CpdrfLastUpd	string	The standard replication column.
CpdrfVerPillar	int	The standard replication column.

Name	Type	Description
CpdrfVerSor	int	The standard replication column.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EmailAddress	string	The email address associated with the record.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedPhoneNumber	string	The formatted phone number.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LockAssignmentBooleanFlag	boolean	Indicates whether the sales account resource is enabled for locked assignment, which means the sales account resource cannot be removed from the team at future territory assignments.
LockAssignmentFlag	boolean	The flag indicates automatic territory assignment cannot remove the sales account team resource when this flag is Y'. When a sales account team member is added manually, this flag is defaulted to Y'.
ManagerPartyId	long	The party identifier for the manager.
MemberFunctionCode	string	The lookup code indicating a sales account resource's role on the resource team such as Integrator, Executive Sponsor and Technical Account Manager. The code lookup is stored in FND_LOOKUPS.

Name	Type	Description
Name	string	The name of the organization for the resource.
Name1	string	The name of the territory.
NamedAccountFlag	boolean	The indicator for whether a sales account is a named sales account.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
ObjectVersionNumber2	int	The number to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
OrgTreeCode	string	The code for the organization hierarchy tree. Managers and administrators of sales account resource gain access through this hierarchy.
OrgTreeStructureCode	string	The structure code for the organization hierarchy tree. Managers/Administrators of parent member organizations will gain access through this hierarchy.
OrganizationId	long	The identifier for the organization the sales account resource belongs.
OwnerResourceId	long	The identifier for the sales account owner.
PartyName	string	The name of the party.
PartyName1	string	The party name of the manager.
PrTerritoryId	long	The territory the sales account team resource belongs to.

Name	Type	Description
ReportsToFlag	boolean	The indicator showing a resource reports to another resource in the same account team.
ResourceId	long	The unique identifier of the resource.
ResourceOrgId	long	The resource organization identifier.
ResourcePartyId	long	The party identifier for the resource.
ResourcePrimaryOrgId	long	The resource primary organization identifier.
ResourcePrimaryOrgName	string	The resource primary organization name.
RoleName	string	The list of all roles for the resources in the organization.
SAccountResourceId	long	The surrogate primary key for the member of the sales account resource team. • Primary Key
SalesAccountId	long	The identifier for the sales account.
SalesAccountPartyId	long	The unique identifier for the sales account.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
TerritoryVersionId	long	The territory version is a primary key.
TypeCode	string	The type code for the territory of which the resource is member of.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Account Territory

An object representing sales account territory attributes for territory assigned to the sales account.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesAccountTerritory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Party*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Handled by	*Sales Account Territory Service*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Name	string	The territory name.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.

Name	Type	Description
PartyName	string	The name of the party.
SAccountTerritoryId	long	The sales account territory identifier. • Primary Key
SalesAccountId	long	The sales account identifier.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
StatusCode	string	The pre-defined code used to indicate the status.
TerritoryId	long	The territory identifier.
TerritoryVersionId	long	The territory version identifier.
TypeCode	string	The type code of the sales account territory.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*
Contained by	*Location Details*
Contained by	*Household*
Contained by	*Contact Preference*

Relationship Type	Object or Service
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*
Contained by	*Trading Community Address Purpose*
Contained by	*Telex*
Contained by	*Phone*
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*
Contained by	*Trading Community Person Details*
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*
Contained by	*Trading Community Customer Account Site Use*
Contained by	*Relationship*
Contained by	*Electronic Data Interchange*
Contained by	*Trading Community Customer Account or Site Role*

Relationship Type	Object or Service
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.

Name	Type	Description
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Telex

The telex number information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Telex

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary telex of the associated object. If the value is True, then this is the primary telex. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.

Name	Type	Description
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TelexNumber	string	The telex reference number (usually a telephone number) of the organization.

Trading Community Address Additional Information

The address information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/}PartySiteInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Address Purpose

The purpose of an address, such as Business, Home, or Ship To.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySiteUse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date at the start of the date range within which the row is active.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
IntegrationKey	string	The integration key is not used.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteUseId	long	The unique identifier of the party site used. • Primary Key
PrimaryPerType	string	Indicates if this is the primary use for the site. Y stands for the primary site and N stands for all other sites.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
SiteUseType	string	The site use type associated with the address.
Status	string	The status of the record.

Trading Community Contact Point Additional Information

The contact point for a trading community member like phone or e-mail. For example 650-506-6000 is the phone number for Oracle Corporation, john.doe@example.com is the e-mail address for John Doe.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/}ContactPointInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Phone*
Contained by	*Web*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointType	string	The type of the contact point.
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Organization Contact Additional Information

The additional information about the organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/orgContact/}OrganizationContactInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Customer Contact Profile*

Relationship Type	Object or Service
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrgContactId	long	The unique identifier of the organization contact. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Organization Details

The information about an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationParty

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*
Contains	*Address*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Classification Assignment*
Contains	*Usage Assignment*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Phone*
Contains	*Email Domain*
Contains	*Telex*
Contains	*Additional Identifier*
Contains	*Account*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contains	*Financial Report*
Contains	*Certification*
Contains	*Electronic Data Interchange*
Contains	*Email*

Relationship Type	Object or Service
Contains	*Preference*
Contains	*Additional Account Name*
Contains	*Electronic File Transfer*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalOrganizationName	*Additional Account Name*	The additional name associated with the organization.
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AnalysisFy	string	The fiscal year that the financial information is based on.
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information associated with the organization.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the organization.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating for the organization.
CurrentFiscalYearPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its current fiscal year.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
Edi	*Electronic Data Interchange*	The electronic data interchange information for the organization.
Eft	*Electronic File Transfer*	The electronic file transfer information for the organization.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.
EmployeesTotal	decimal	The total number of employees.
FinancialProfile	*Financial Profile*	The financial profile information of the organization.
FinancialReport	*Financial Report*	The financial report information of the organization.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.

Name	Type	Description
GroupType	string	The type of the group.
HQBranchIndicator	string	The status of this site, such as HQ, a branch, or a single location. A list of accepted values are defined in the lookup type HQ_BRANCH_IND.
HomeCountry	string	The home country associated with the party.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MissionStatement	string	The corporate charter of organization in user-defined text format.
NextFyPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its next fiscal year.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OrganizationProfile	*Account*	The information about the partner organization.
OrganizationSize	string	The size of the organization based on its revenue, number of employees, and so on.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	The preference mentioned in the organization details.
PartySite	*Address*	The party site associated with the organization.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the organization.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.

Name	Type	Description
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPointId	long	The unique identifier of the primary e-mail.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPointId	long	The unique identifier of the primary phone contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPointId	long	The unique identifier of the primary URL contact point.
PrincipalName	string	The Name of the highest ranking person in the company.

Name	Type	Description
Province	string	The name of the province.
Relationship	*Relationship*	The relationship information of the organization.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The telex information of the organization.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the Third Party field in the Customers window is mandatory.
TradingPartnerIdentifier	string	The FSIO related trading partner codes.
URL	string	The destination URL associated with a specific Google AdWords ad.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
Web	*Web*	The web information related to the record.

Name	Type	Description
YearEstablished	int	The year when the organization began doing business.

Trading Community Organization Profile Additional Information

The additional profile information about an organization, such as the organization type.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/organization/}OrganizationInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Cloud Account*
Contained by	*Account*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrganizationProfileId	long	The unique identifier of the organization profile. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Person Details

The information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Person

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*
Contains	*Citizenship*
Contains	*Contact Language*
Contains	*Instant Messaging*
Contains	*Employment History*
Contains	*Web*
Contains	*Classification Assignment*
Contains	*Usage Assignment*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Contact Interest*
Contains	*Contact*
Contains	*Additional Contact Name*
Contains	*Phone*
Contains	*Education*
Contains	*Email Domain*
Contains	*Additional Identifier*
Contains	*Contact Preference*
Contains	*Source System Reference*

Relationship Type	Object or Service
Contains	*Certification*
Contains	*Contact Address*
Contains	*Email*
Contains	*Preference*
Extended by	*Partner Members*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.

Name	Type	Description
AdditionalPersonName	*Additional Contact Name*	The additional name of the person.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information for the person.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Citizenship	*Citizenship*	The citizenship information of a person.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the person.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
Education	*Education*	The education information of the person.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.
EmploymentHistory	*Employment History*	The employment history information of a person.
FinancialProfile	*Financial Profile*	The financial profile information of a person.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
Gender	string	The gender of the person, such as male, female, and unknown. A list of accepted values is defined in the lookup HZ_GENDER.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.

Name	Type	Description
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person. A list of accepted values is defined in the lookup MARITAL_STATUS.
MissionStatement	string	The corporate charter of organization in user-defined text format.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	The preference mentioned in the person details.
PartySite	*Contact Address*	The party site associated with the person.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.

Name	Type	Description
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the person.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonInterest	*Contact Interest*	The interest information associated with a person.
PersonLanguage	*Contact Language*	The language information associated with a person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.
PersonPreviousLastName	string	The previous last name of a person.
PersonProfile	*Contact*	The profile information of the person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_ PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.

Name	Type	Description
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPTId	long	The unique identifier of the primary e-mail.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPTId	long	The unique identifier of the primary phone contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.

Name	Type	Description
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPTId	long	The unique identifier of the primary URL contact point.
Province	string	The name of the province.
Relationship	*Relationship*	The relationship information of the person.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
Salutation	string	The size of the household this person is a part of.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.
Status	string	The status of the record.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the Third Party field in the Customers window is mandatory.
URL	string	The destination URL associated with a specific Google AdWords ad.

Name	Type	Description
UserGUID	string	The "light weight" user Global Unique Id. Light Weight users defined in the Extended Security (XS) System.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
Web	*Web*	The web information related to the record.

Trading Community Person Profile Additional Information

The additional information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/}PersonInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Loyalty Member Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PersonProfileId	long	The unique identifier of the person profile. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Relationship Additional Information

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/relationship/}RelationshipInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Usage Assignment

The party usage assigned to a trading community member. For example, John Doe is a contact of ABC Corporation and XYZ Corporation is a supplier.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyUsageAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Party Usage Assignment Service*

Relationship Type	Object or Service
Handled by	*Trading Community Party Information*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
PartyUsageCode	string	The usage context of a party's contact point.
PartyUsgAssignmentId	long	The unique identifier of the party usage assignment. • Primary Key
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Web

The Web information associated with a trading community member. For example, Oracle's address on the Web is www.oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Web

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N stands for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
URL	string	The destination URL associated with a specific Google AdWords ad.
WebInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community Web.

Name	Type	Description
WebType	string	The prefix class to a Web address. Typically, this is either FTP or HTTP.

Work Class

The custom-defined classification of information about a person's job title and work experience.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}WorkClass

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Employment History*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmploymentHistoryId	long	The foreign key to the HZ_EMPLOYMENT_HISTORY table.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LevelOfExperience	string	The user-defined rating for the level of experience in the class of work. For example, journeyman, trainee, or exposure.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.
WorkClassId	long	The unique identifier for the class of work. • Primary Key
WorkClassName	string	The user-determined classification for work. For example, bricklayer, doctor, lawyer, programmer, or minister of health.

Sales Account Territory Service

A service to create, update, get, or find sales account territories.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesAccountTerritoryService/}SalesAccountTerritoryService

Service WSDL URL: https://servername/crmService/SalesAccountTerritoryService?WSDL

Logical Business Objects

- CRM : Customer Center : Sales Party

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Sales Account Territory*

Operations

- *getSalesAccountTerritory*
- *createSalesAccountTerritory*
- *deleteSalesAccountTerritory*
- *mergeSalesAccountTerritory*
- *findSalesAccountTerritory*
- *findSalesAccountTerritoryHierarchy*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getSalesAccountTerritory

Retrieves a specific sales account territory details record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
sAccountTerritoryId	long	Identifier of the sales account territory.

Response Payload

Element Name	Type	Description
result	*Sales Account Territory*	The sales account territory details that matches the inbound key attributes.

createSalesAccountTerritory

Creates a sales account territory details for a sales account.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountTerritory	*Sales Account Territory*	Sales account territory details to be created.

Response Payload

Element Name	Type	Description
result	*Sales Account Territory*	Result of the operation includes the successfully created sales account territory details and/or a list of warnings or informational messages.

deleteSalesAccountTerritory

Deletes operation for sales account territory details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountTerritory	*Sales Account Territory*	Sales account territory details to be deleted.

Response Payload

Element Name	Type	Description
result	void	A list of warnings or informational messages encountered when deleting the object.

mergeSalesAccountTerritory

Merges operation for sales account territory details. It will perform an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountTerritory	*Sales Account Territory*	Sales account territory details to be merged.

Response Payload

Element Name	Type	Description
result	*Sales Account Territory*	Result of the operation includes the successfully merged sales account territory details and/or a list of warnings or informational messages.

findSalesAccountTerritory

Finds operation for sales account territory details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, etc.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Method not currently used.

Response Payload

Element Name	Type	Description
result	*Sales Account Territory*	Result of the operation including a list of sales account territory details that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

findSalesAccountTerritoryHierarchy

Finds operation for sales account details filtered by Territory Id. Get a list of accounts directly associated to this territory and its descendent territories. Get the complete account data object. This is a composite service.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, etc.
BindTerritoryId	long	Territory identifier.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Method not currently used.

Response Payload

Element Name	Type	Description
result	*Sales Account Territory*	Result of the operation including a list of sales account territory details that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
createSalesAccountTerritory	ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	Manage Sales Account Team	Allows managing and maintaining the sales account teams.
deleteSalesAccountTerritory	ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	Manage Sales Account Team	Allows managing and maintaining the sales account teams.

Operation Name	Privilege Code	Privilege Name	Privilege Description
findSalesAccountTerritory	ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	Manage Sales Account Team	Allows managing and maintaining the sales account teams.
mergeSalesAccountTerritory	ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	Manage Sales Account Team	Allows managing and maintaining the sales account teams.
getSalesAccountTerritory	ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	Manage Sales Account Team	Allows managing and maintaining the sales account teams.
findSalesAccountTerritoryHierarchy	ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	Manage Sales Account Team	Allows managing and maintaining the sales account teams.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_MANAGE_SALES_ACCOUNT_TEAM_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Sales Account Territory

An object representing sales account territory attributes for territory assigned to the sales account.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesAccountTerritory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Party*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Handled by	*Sales Account Territory Service*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Name	string	The territory name.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
SAccountTerritoryId	long	The sales account territory identifier. • Primary Key
SalesAccountId	long	The sales account identifier.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
StatusCode	string	The pre-defined code used to indicate the status.
TerritoryId	long	The territory identifier.
TerritoryVersionId	long	The territory version identifier.
TypeCode	string	The type code of the sales account territory.

Name	Type	Description
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Campaign

Service to enable the launching of a sales campaign.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/marketing/salesCampaigns/salesCampaignSevice/}SalesCampaignService

Service WSDL URL: https://servername/crmService/SalesCampaignService?WSDL

Logical Business Objects

- CRM : Marketing : Sales Campaign

Operations

- *launchAndExecuteSalesCampaignService*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

launchAndExecuteSalesCampaignService

A web service method that creates Oracle Fusion Sales Campaign Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
customerIds	long	A required input parameter of the launchAndExecuteSalesCampaignService web service method. The Customer ID's are associated to the new sales campaign record created.
inventoryItemIds	long	A required input parameter of the launchAndExecuteSalesCampaignService web service method. The Inventory ID's are associated to the new sales campaign record created.

Element Name	Type	Description
inventoryOrgIds	long	A required input parameter of the launchAndExecuteSalesCampaignService web service method. The Organization ID's are associated to the new sales campaign record created.
productGroupIds	long	A required input parameter of the launchAndExecuteSalesCampaignService web service method. The Product Group ID's are associated to the new sales campaign record created.

Response Payload

Element Name	Type	Description
result	long	The parameter is not applicable for the method launchAndExecuteSalesCampaignService.

getDfltObjAttrHints

A web service method to retrieve user interface hints, such as the service data object label and Object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

Element Name	Type	Description

getServiceLastUpdateTime

Returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

A web service method to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKT_MANAGE_SALES_CAMPAIGN_PRIV	Manage Sales Campaign	For internal use only. Allows web services management of sales campaigns.

Operation Name	Privilege Code	Privilege Name	Privilege Description

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_MANAGE_SALES_CAMPAIGN_PRIV	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.

Sales Catalog

Service to retrieve sales catalog hierarchy and content.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/orderCapture/salesCatalog/browse/salesCatalogService/}SalesCatalogRuntimeService

Service WSDL URL: https://servername/crmService/SalesCatalogRuntimeService?WSDL

Logical Business Objects

- CRM : Sales Catalog : Product Group

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Service Schema*
Handles	*Catalog Product Groups*
Handles	*Catalog Products*
Handles	*Selectable Product Group*

Operations

- *getCatalog*
- *getAllProductGroups*
- *getCatalogCategories*
- *getCategoryProducts*
- *getUsageCatalog*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getCatalog

A web service method to retrieve catalog information.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
usageCode	string	The parameter of the usage code for the method getCatalog.
usageModeCode	string	The parameter of the usage mode code for the method getCatalog.
runEligibilityFlag	boolean	A flag to indicate whether to run eligibility check.
minimumProductGroupId	long	The result includes a set of product groups with product group ID bigger or equal to this parameter. Usually you supply it with the last product group ID in last call, in other words the highest product group ID in last call. This is provided for supporting page navigation.
maximumSizeToReturn	int	The parameter which limits the number of product groups returned. This is provided for supporting page navigation.
contextProviderName	string	The parameter used to choose the context provider mapping to be done for the input context rows.
contextRows	*Service Schema*	The parameter has a list of rows; each row specifies the definition of a single attribute within the context provider.

Response Payload

Element Name	Type	Description
result	*Selectable Product Group*	The parameter returns a list of Product Groups.

getAllProductGroups

A web service method to get all product groups.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
usageCode	string	The parameter of the usage code for the method getAllProductGroups.
usageModeCode	string	The parameter of the usage mode code for the method getAllProductGroups.
runEligibilityFlag	boolean	A flag to indicate whether to run eligibility check.
minimumProductGroupId	long	The result includes a set of product groups with product group ID bigger or equal to this parameter. Usually you supply it with the last product group ID in last call, in other words the highest product group ID in last call. This is provided for supporting page navigation.
maximumSizeToReturn	int	The parameter which limits the number of product groups returned. This is provided for supporting page navigation.
contextProviderName	string	The parameter used to choose the context provider mapping to be done for the input context rows.
contextRows	*Service Schema*	The parameter has a list of rows; each row specifies the definition of a single attribute within the context provider.

Response Payload

Element Name	Type	Description
result	*Descendant Product Group*	The parameter returns a list of Product Groups.

getCatalogCategories

A web service method to get categories under a given catalog.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
usageCode	string	The parameter of the usage code for the method getCatalogCategories.
usageModeCode	string	The parameter of the usage mode code for the method getCatalogCategories.
runEligibilityFlag	boolean	A flag to indicate whether to run eligibility check.
ancestorProductGroupId	long	The Parent Product Group ID for the method getCatalogCategories.
minimumDepth	int	The parameter which limits the returned Product Group to be at least specified level away from the starting Product Group.
maximumDepth	int	The parameter which limits the returned Product Group to have specified limit as maximum level away from the starting Product Group.
minimumPathId	long	The result includes a set of Product Groups with path ID, which is persistent identifier for the path, bigger or equal to this parameter. Usually you supply it with the last path ID in last call, in other words the highest path ID in last call. This is provided for supporting page navigation.
maximumSizeToReturn	int	The parameter which limits the number of Product Groups returned. This is provided for supporting page navigation.
contextProviderName	string	The parameter which is used to choose the context provider mapping to be done for the input context rows.

Element Name	Type	Description
contextRows	*Service Schema*	The parameter which has a list of rows, each row specifies the definition of a single attribute within the context provider.

Response Payload

Element Name	Type	Description
result	*Descendant Product Group*	The parameter returns the list of Product Groups.

getCategoryProducts

A web service method to get products under given category.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
usageCode	string	The parameter of the usage code for the method getCategoryProducts.
usageModeCode	string	The parameter of the usage mode code for the method getCategoryProducts.
runEligibilityFlag	boolean	A flag to indicate whether to run eligibility check.
ancestorProductGroupId	long	The Parent Product Group ID for the method getCategoryProducts.
minimumDepth	int	The parameter which limits the returned Product Group to be at least specified level away from the starting Product Group.
maximumDepth	int	The parameter which limits the returned Product Group to have specified limit as maximum level away from the starting Product Group.
minimumPathId	long	The result includes a set of Product Groups with path ID, which is persistent identifier for the path, bigger or equal to this parameter. Usually you supply it with the last path ID in last call, in other words the highest path ID in last call. This is provided for supporting page navigation.

Element Name	Type	Description
minimumItemId	long	The result includes a set of products with Inventory Item identifier bigger or equal to this parameter. Usually you supply it with the last Inventory Item identifier in last call, in other words the highest Inventory Item identifier in last call. This is provided for supporting page navigation.
maximumSizeToReturn	int	The parameter which limits the number of Product Groups returned. This is provided for supporting page navigation.
contextProviderName	string	The parameter which is used to choose the context provider mapping to be done for the input context rows.
contextRows	*Service Schema*	The parameter which has a list of rows, each row specifies the definition of a single attribute within the context provider.

Response Payload

Element Name	Type	Description
result	*Descendant Product*	The parameter returns the list of Products.

getUsageCatalog

A web service method to get catalog under given usage.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
usageCode	string	The parameter of the usage code for the method getUsageCatalog.
usageModeCode	string	The parameter of the usage mode code for the method getUsageCatalog.
runEligibilityFlag	boolean	A flag to indicate whether to run eligibility check.

Element Name	Type	Description
minimumProductGroupId	long	The result includes a set of Product Groups with product group ID bigger or equal to this parameter. Usually you supply it with the last product group ID in last call, in other words the highest product group ID in last call. This is provided for supporting page navigation.
maximumSizeToReturn	int	The parameter which limits the number of Product Groups returned. This is provided for supporting page navigation.
contextProviderName	string	The parameter which is used to choose the context provider mapping to be done for the input context rows.
contextRows	*Service Schema*	The parameter which has a list of rows, each row specifies the definition of a single attribute within the context provider.

Response Payload

Element Name	Type	Description
result	*Selectable Product Group*	The parameter returns the list of Product Groups.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	QSC_MANAGE_PRODUCT_GROUPS_PRIV	Manage Product Groups	Allows management of product groups and their attributes, lookups, mapping, profile options, templates and usages.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
QSC_MANAGE_PRODUCT_GROUPS_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
QSC_MANAGE_PRODUCT_GROUPS_PRIV	ORA_QSC_SALES_CATALOG_ADMINISTRATOR_JOB	Sales Catalog Administrator	Sets up and maintains sales catalogs for leads, opportunities, quotes and orders. Sets up and maintains rollup catalog for the purpose of forecasting, territory management, and other purposes. Also associates products, promotions, and competitor products to catalogs, and defines eligibility rules. Also manages the bulk export and import of all product group-related objects.
QSC_MANAGE_PRODUCT_GROUPS_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
QSC_MANAGE_PRODUCT_GROUPS_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
QSC_MANAGE_PRODUCT_GROUPS_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
QSC_MANAGE_PRODUCT_GROUPS_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
QSC_MANAGE_PRODUCT_GROUPS_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
QSC_MANAGE_PRODUCT_GROUPS_PRIV	ORA_QSC_SALES_PRODUCT_MANAGER_JOB	Sales Product Manager	Individual responsible for ensuring that a product gets created, priced, and managed in the sales catalog and meets specifications. This person will be a member of either the Sales organization or the Subscription organization.
QSC_MANAGE_PRODUCT_GROUPS_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
QSC_MANAGE_PRODUCT_GROUPS_PRIV	ORA_LOY_MANAGEMENT_DUTY	Loyalty Management	Manages all aspects of a Loyalty Program
QSC_MANAGE_PRODUCT_GROUPS_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
QSC_MANAGE_PRODUCT_GROUPS_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_QSC_SALES_PRODUCT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_QSC_SALES_CATALOG_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ EXECUTION_MANAGEMENT_ DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ CHANNEL_ADMINISTRATION_ DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_LOY_MANAGEMENT_DUTY	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_EXPORT_MANAGEMENT_DUTY	Quota Export Management	Manages bulk export of all sales territory quota related objects.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_MANAGEMENT_SETUP_DUTY	Quota Management Setup	Manages sales territory quota setup, quota plans, prediction and spread formula parameters, and seasonality groups. Runs sales territory quota synchronization and sales quota plan activation and completion processes. Additional duties include party information inquiry.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_HR_SR_ ADMINISTRATION	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ ADMINISTRATION	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and relationship information inquiries.
ORA_LOY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			appointments, assessments, interactions, notes and tasks.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_TERRITORY_MANAGEMENT_T2P_MIGRATION_DUTY	Territory Management T2P Migration	Manages sales territory export and import. Provides users with the ability to export territory data from a test environment and import into production.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Descendant Product Group

The descendant product group view object.

QName: {http://xmlns.oracle.com/apps/orderCapture/salesCatalog/browse/salesCatalogService/}DescendantProductGroup

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Product Group*
Handled by	*Sales Catalog*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Depth	long	The difference in level from the first product group to the last Product Group in the path.

Name	Type	Description
EligibilityReason	string	The text showing the reason why product group is not eligible.
EligibilityStatus	string	The flag to indicate the status of the eligibility engine for Product Groups.
InternalName	string	The internal name of the product group.
ParentProductGroupId	long	The product group identifier for the penultimate node in the path.
PathId	long	The persistent identifier for the path.
ProductGroupDenormId	long	The product group denorm identifier. • Primary Key
ProductGroupDescription	string	The translated name of the product group used for runtime display.
ProductGroupId	long	The product group identifier.
ProductGroupName	string	The translated name of the product group used for runtime display.
ReferenceNumber	string	The identifier used for integration with external systems.

Product Group Details

The base public view object for product group details. A product group is a business object that groups related products, so that you can work with them together. You can use product groups to create a multilevel hierarchy that can be used as a sales catalog, a rollup hierarchy, or a promotion catalog.

QName: {http://xmlns.oracle.com/apps/orderCapture/salesCatalog/browse/salesCatalogService/}ProductGroupDetailBaseP

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Selectable Product Group*
Extended by	*Descendant Product Group*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	string	Indicates whether the product group is active or not.
AdminProdGrpName	string	
AllowDuplicateContentFlag	string	Indicates whether a duplicate product or product group can be allowed in this product group hierarchy.
AllowSelectionFlag	string	
EndDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FilterByTerritory	string	
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	
ObjectParam	string	
ProdGroupId3	long	
ProdGrpDetailsId	long	The identifier of the product group details. • Primary Key
RevenueCategoryCode	string	The code for the revenue category for the product group.
RevenueRoleCode	string	The code for the revenue role for the product group.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.

Name	Type	Description
UsageRootFlag	string	Indicates whether the product group can be assigned and displayed as a root product group in the context of an application usage type.

Descendant Product

The descendant product view object.

QName: {http://xmlns.oracle.com/apps/orderCapture/salesCatalog/browse/salesCatalogService/}DescendantProduct

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Sales Catalog*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Depth	long	The difference in level from the first product group to the last Product Group in the path.
Description	string	The free text description of the record.
EligibilityReason	string	The text showing the reason why product is not eligible.
EligibilityStatus	string	The flag to indicate the status of the eligibility engine for products.
InventoryItemId	long	The inventory item identifier. References an item. • Primary Key

Name	Type	Description
ItemNumber	string	The inventory item number for the item.
ListPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The unitized list price for this product charge, after segment discount. This value is provided by the pricing engine.
OrganizationId	long	The inventory organization identifier for the item. • Primary Key
ParentProductGroupId	long	The product group identifier for the penultimate node in the path.
PathId	long	The persistent identifier for the path.
PrimaryUOMCode	string	The unit of measure of the product.
ProductGroupDenormId	long	The product group denorm identifier. • Primary Key
ProductGroupId	long	The product group identifier.
YourPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The price of the product shown in the catalog.

Selectable Product Group

The object that groups related products, so that you can work with them together.

QName: {http://xmlns.oracle.com/apps/orderCapture/salesCatalog/browse/salesCatalogService/}ProductGroup

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Product Group*
Handled by	*Sales Catalog*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
EligibilityReason	string	The text showing the reason why product group is not eligible.
EligibilityStatus	string	The flag to indicate the status of the eligibility engine for Product Groups.
InternalName	string	The internal name of the product group.
ProductGroupDescription	string	The translated name of the product group used for runtime display.
ProductGroupId	long	The product group identifier. • Primary Key
ProductGroupName	string	The translated name of the product group used for runtime display.
ReferenceNumber	string	The identifier used for integration with external systems.

Product Group Details

The base public view object for product group details. A product group is a business object that groups related products, so that you can work with them together. You can use product groups to create a multilevel hierarchy that can be used as a sales catalog, a rollup hierarchy, or a promotion catalog.

QName: {http://xmlns.oracle.com/apps/orderCapture/salesCatalog/browse/salesCatalogService/}ProductGroupDetailBaseP

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Selectable Product Group*
Extended by	*Descendant Product Group*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	string	Indicates whether the product group is active or not.
AdminProdGrpName	string	
AllowDuplicateContentFlag	string	Indicates whether a duplicate product or product group can be allowed in this product group hierarchy.
AllowSelectionFlag	string	
EndDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FilterByTerritory	string	
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	
ObjectParam	string	
ProdGroupId3	long	
ProdGrpDetailsId	long	The identifier of the product group details. • Primary Key
RevenueCategoryCode	string	The code for the revenue category for the product group.
RevenueRoleCode	string	The code for the revenue role for the product group.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
UsageRootFlag	string	Indicates whether the product group can be assigned and displayed as a root product group in the context of an application usage type.

Service Schema

The object used to pass context provider details to the service. A row of this VO specify the definition of a single attribute within the context provider.

QName: {http://xmlns.oracle.com/apps/orderCapture/salesCatalog/browse/salesCatalogService/}ServiceContext

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Sales Catalog*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributeName	string	For attribute represented by ServiceContextVO row, specify the attribute name within entity.
AttributeValue	string	For attribute represented by ServiceContextVO row, specify the attribute value as string within entity.
EntityName	string	For attribute represented by ServiceContextVO row, specify the parent entity name of the attribute from context provider.
RecordKey	string	For attribute represented by ServiceContextVO row, specify the unique key for the parent entities from context provider.

Sales Cloud Account

The service to create, update, find, and delete organization accounts. Organization accounts contain the following information: organization profile, sales profile, contact information (primary address, phone, fax, email and URL), industry classification and account hierarchy.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/accountService/}AccountService

Service WSDL URL: https://servername/crmService/SalesPartiesAccountService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Account

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Note Descriptive Flexfields*
Handles	*Sales Cloud Primary Address*
Handles	*Sales Team Member*
Handles	*Trading Community Organization Profile Additional Information*
Handles	*Note*
Handles	*Account*

Operations

- *getAccount*
- *createAccount*
- *updateAccount*
- *deleteAccount*
- *mergeAccount*
- *findAccount*
- *processAccount*
- *processCSAccount*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getAccount

Retrieves the account based on the primary key identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
PartyId	long	The identifier for a party.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Account*	Account that matches the inbound key attributes.

createAccount

Creates an organization account and its primary address (optional).

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
account	*Sales Cloud Account*	Account to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/salesParties/accountService/}AccountResult	Created account.

updateAccount

Updates an account and primary address. When updating the primary address information it is not necessary to include the primary or alternate keys for the primary address. There is a one-to-one correspondence between the account and primary address. If the alternate keys SourceSystem and SourceSystemReferenceValue in the primary address are specified and they do not match the values in the existing primary address, then a new SourceSystem/SourceSystemReferenceValue gets created for the existing primary address.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
account	*Sales Cloud Account*	Account to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/salesParties/accountService/}AccountResult	Updated account.

deleteAccount

Deletes an account and the relationship between the account and address objects indicating the address is a primary address. The address object cannot be deleted using this operation. To delete the address, use the sales cloud address service.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
account	*Sales Cloud Account*	Account to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	Not applicable.

mergeAccount

Performs a merge on the account. It will perform an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
account	*Sales Cloud Account*	Account to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/salesParties/accountService/}AccountResult	Merged account.

findAccount

Finds a list of accounts based matching the supplied criteria pertaining to the object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, etc.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Method not currently used.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Account*	A list of accounts that satisfy the inbound criteria.

processAccount

Performs a create, update, delete or Merge a list of account rows. The specified operation is applied to all objects in the given list.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action shall be performed, such as create, update, merge, or delete.
account	*Sales Cloud Account*	A list of accounts to be processed.

Element Name	Type	Description
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Account*	A list of Account that are successfully processed.

processCSAccount

Performs a create, update, or delete operation on a list of account rows. Different operations may be applied to different objects, depending on what is specified in the ChangeSummary object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	Result of the operation including a list of created/updated data objects, and all warning and informational messages.

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
findAccount	ZCM_VIEW_SALES_ORGANIZATION_PRIV	View Sales Organization	Allows viewing of the sales organization.
updateAccount	ZCM_UPDATE_SALES_ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
createAccount	ZCM_CREATE_SALES_ORGANIZATION_PRIV	Create Sales Organization	Allows creating a sales organization.
mergeAccount	ZCM_UPDATE_SALES_ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
getAccount	ZCM_VIEW_SALES_ORGANIZATION_PRIV	View Sales Organization	Allows viewing of the sales organization.
processAccount	ZCM_DELETE_SALES_ORGANIZATION_PRIV	Delete Sales Organization	Allows deletion of Sales Organizations.
processAccount	ZCM_UPDATE_SALES_ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
processAccount	ZCM_CREATE_SALES_ORGANIZATION_PRIV	Create Sales Organization	Allows creating a sales organization.
processCSAccount	ZCM_DELETE_SALES_ORGANIZATION_PRIV	Delete Sales Organization	Allows deletion of Sales Organizations.

Operation Name	Privilege Code	Privilege Name	Privilege Description
processCSAccount	ZCM_UPDATE_SALES_ ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
processCSAccount	ZCM_CREATE_SALES_ ORGANIZATION_PRIV	Create Sales Organization	Allows creating a sales organization.
deleteAccount	ZCM_DELETE_SALES_ ORGANIZATION_PRIV	Delete Sales Organization	Allows deletion of Sales Organizations.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_ZCM_SR_SALES_PARTY_ MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_CASE_ADMINISTRATOR	Case Administrator	Administers all aspects of Case Management.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_INTERNAL_HELPDESK_ ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_CASE_EXECUTION	Case Execution	Assists clients who are applying for benefits, opens cases and manages all tasks associated to the case, processes clients applications, evaluate clients needs for benefits, counsels benefits recipients, performs assessments of clients strengths and needs to develop benefit plans, performs follow-up with clients to ensure they are working on their tasks.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_CASE_SUPERVISION	Case Supervision	Supervises and manages caseworkers, assists caseworkers with any complex issues, handles case approvals and escalations, coordinates care and benefits with external service providers, assigns or reassigns cases to caseworkers, conducts evaluations of benefits programs and provides feedback.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_INTERNAL_HELPDESK_ SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_ZCM_SALES_PARTY_ REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_HR_SR_ ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	Utilities Customer Service Manager	Individual responsible for managing Utilities Customer Service Representatives for a utilities customer service function.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	Utilities Customer Service Representative	Individual responsible for answering customer inquiries and resolving customer problems for a utilities customer service function.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	Utilities Customer Service Administrator	Individual responsible for the day-to-day administrative support for a utilities customer service function.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_CREATE_SALES_ORGANIZATION_PRIV	ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	Utilities Customer Service Manager	Individual responsible for managing Utilities Customer

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			Service Representatives for a utilities customer service function.
ZCM_CREATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_CREATE_SALES_ORGANIZATION_PRIV	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ZCM_CREATE_SALES_ORGANIZATION_PRIV	ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	Utilities Customer Service Representative	Individual responsible for answering customer inquiries and resolving customer problems for a utilities customer service function.
ZCM_CREATE_SALES_ORGANIZATION_PRIV	ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	Utilities Customer Service Administrator	Individual responsible for the day-to-day administrative support for a utilities customer service function.
ZCM_CREATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_CREATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_DELETE_SALES_ORGANIZATION_PRIV	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ZCM_DELETE_SALES_ORGANIZATION_PRIV	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_SVC_CUSTOMER_SERVICE_MANAGER_JOB	Customer Service Manager	Manages a group of Customer Service Representatives, and would monitor the incoming call volume into the customer service department, perhaps balancing loads and reassigning work when call volume is high. This individual would monitor incoming business, and manage the demand flow to the fulfillment area. May also need to respond to escalations.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_SVC_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	Customer Service Representative	A resource that is typically assigned to a contact center to answer customer inquiries and resolve customer problems. Can respond to inquiries such as frequently asked questions, troubleshooting assistance, order status or order entry, or other transactions. This individual usually is assigned to serve a group

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			of customers or support other customer-facing resources to resolve issues.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_SVC_ENGAGEMENT_CHANNEL_APPLICATION_ADMINISTRATOR_JOB	Engagement Channel Application Administrator	Individual responsible for administration of all aspects the supervisor dashboard, including setup and administration of the engagement channel.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_SVC_ENGAGEMENT_CHANNEL_SUPERVISOR_JOB	Engagement Channel Supervisor	Individual responsible for monitoring metrics and overall resource balancing across the Engagement channels.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_ANALYTICS_DUTY	Knowledge Analytics	User's ability to execute and create analytics reports
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_CSO_KNOWLEDGE_AUTHOR_SERVICE_JOB	Knowledge Author Service	Provides for the ability to author service articles
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_CSO_KNOWLEDGE_AUTHORING_DUTY	Knowledge Authoring	Provides for the ability to participate in the life cycle of a knowledge article from creation to deletion
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_DUTY	Knowledge Home	Provides users with the ability to view and rate knowledge articles
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_CSO_KNOWLEDGE_HOME_DUTY	Knowledge Home	Provides users with the ability to view and rate knowledge articles
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_CSO_KM_REST_ADMIN	Knowledge Rest Administrator	This role is used by REST API users
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_CSO_KNOWLEDGE_SEARCH_SERVICE_JOB	Knowledge Search Service	Provides the ability to search Service department articles

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_CSO_KNOWLEDGE_SEARCH_SERVICE_JOB	Knowledge Search Service	Provides the ability to search Service department articles
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_USER_MANAGEMENT_DUTY	Knowledge User Management	Provides for the ability to manage users, internal knowledge roles, and user groups memberships
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_UER_UTILITIES_CONFIGURATION_ADMINISTRATOR	Utilities Configuration Administrator	Individual responsible for maintaining utilities industry configurations.

Sales Cloud Account

An account for a customer or prospect. This object is an aggregation of primary account profile, and contact information, and references a single primary address.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/accountService/}Account

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Cloud Primary Address*
Contains	*Sales Team Member*
Contains	*Trading Community Organization Profile Additional Information*
Contains	*Note*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountScore	long	Score assigned based on custom criteria by the user.
AccountScoringTier	string	Tier assigned based on custom criteria by the user.
AddressElementAttribute1	string	Additional address element to support flexible address format
AddressElementAttribute2	string	Additional address element to support flexible address format
AddressElementAttribute3	string	Additional address element to support flexible address format
AddressElementAttribute4	string	Additional address element to support flexible address format

Name	Type	Description
AddressElementAttribute5	string	Additional address element to support flexible address format
AddressLine1	string	First line of address.
AddressLine2	string	Second line of address.
AddressLine3	string	Third line of address.
AddressLine4	string	Fourth line of address.
AddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines (used in Japan).
AddressNumber	string	Alternate unique identifier for the address. One of AddressId, AddressNumber or SourceSystem and SourceSystemReferenceValue keys is used to identify the address record during update. If not specified, then it is automatically generated. Prefix defined as in profile option ZCA_PUID_PREFIX concatenated with an internally generated unique sequence number.
AddressType	string	Additional information as type of address like BillTo, ShipTo.
AnalysisFiscalYear	string	The fiscal year used as the source for financial information.
AssignmentExceptionFlag	boolean	Indicates whether the sales account had the required dimensions to allow assignment manager to assign territories to the sales account. If the value is True, then the sales account has the dimensions. The default value is False.
Building	string	Specific building name or number at a given address.
BusinessReport	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The Dun & Bradstreet business information report.
BusinessScope	string	The class of business to which the account belongs, such as local, national, or international.
CEOName	string	The name of the chief executive officer of the organization.

Name	Type	Description
CEOTitle	string	The formal title of the chief executive officer.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
CertificationReasonCode	string	The reason for the contact's current certification level assignment. The list of valid certification reason codes are defined using the lookup HZ_PARTY_CERT_REASON. Review and update the codes using the Manage Trading Community Common Lookups task in the Setup and Maintenance work area.
City	string	The city element of address.
Comments	string	The comments for the record.
CongressionalDistrictCode	string	The U.S. congressional district code for the account.
ControlYear	decimal	The year when the current ownership gained control of the organization.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CorporationClass	string	The taxation classification for corporation entities, such as Chapter S in the US.
Country	string	Country code of the address.
County	string	County element of address.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.

Name	Type	Description
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CurrentFiscalYearPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its current fiscal year.
DUNSCreditRating	string	The Dun & Bradstreet credit rating.
DUNSNumber	string	The D-U-N-S (Data Universal Numbering System) number in free-form text format.
DataCloudStatus	string	The enrichment status of the contact record from DaaS (Data as a Service). A list of valid values are defined in the lookup DATA_CLOUD_STATUS. Review and update the codes using the Manage Standard Lookups task in the Setup and Maintenance work area.
DatafoxCompanyId	string	Datafox Company Identifier.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
Description	string	Short description for the company.
DisadvantageIndicator	string	Indicates whether the organization is considered disadvantaged by the US government under Title 8A. If the value is Yes, the organization is considered disadvantaged under Title 8A. The default value is No.
DoNotConfuseWith	string	Indicates that there is an organization that is similarly named.
DomesticUltimateDUNSNumber	string	The D-U-N-S number for the domestic ultimate. The domestic ultimate is the highest member of the organizational hierarchy in a given country. An organization can be its own domestic ultimate.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The preferred format for email addressed to this organization, such as HTML or ASCII.
EmployeesAtPrimaryAddress	string	The qualifier to calculate the estimated number of employees at the primary address. A list of valid qualifier codes are defined using the lookup EMP_AT_PRIMARY_ADR_EST_IND.

Name	Type	Description
		Review and update the codes using the Setup and Maintenance work area, Manage Trading Community Common Lookups task.
EmployeesAtPrimaryAddressEstimation	string	The estimated minimum number of employees at the primary address. A list of accepted values are defined in the lookup type EMP_AT_PRIMARY_ADR_MIN_IND. Review and update the values using the Manage Trading Community Common Lookups task in the Setup and Maintenance work area.
EmployeesAtPrimaryAddressMinimum	string	The qualifying minimum number of employees at the primary address.
EmployeesAtPrimaryAddressText	string	The number of employees at the primary address in text format.
EmployeesTotal	decimal	The total number of employees.
ExistingCustomerFlag	boolean	Indicates if there is an existing selling or billing relationship with the sales account. If the value is True, then there is an existing relationship with the sales account. The default value is False.
ExistingCustomerFlagLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the existing customer flag was last updated.
ExportIndicator	string	Indicates whether the organization is an exporter. If the value is Y, then the organization is an exporter. The default value is N.
FavoriteAccountFlag	boolean	Indicates whether an account is a favorite.
FaxAreaCode	string	The area code for the fax number.
FaxCountryCode	string	The international country code for a fax number, such as 33 for France.
FaxExtension	string	The extension to the fax number of the organization.
FaxNumber	string	The fax number of the organization in the local format. The number should not include area code, country code, or extension.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.

Name	Type	Description
FloorNumber	string	The specific floor number at a given address or in a particular building when the building number is provided.
FormattedFaxNumber	string	The formatted fax number of the organization.
FormattedPhoneNumber	string	The formatted phone number.
GeneralServicesAdministrationFlag	boolean	Indicates whether the organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N.
GlobalUltimateDUNSNumber	string	The D-U-N-S number for the global ultimate. The global ultimate is the highest member in the organization's hierarchy. An organization can be its own global ultimate.
GrowthStrategyDescription	string	The user-defined description of growth strategy.
HQBranchIndicator	string	The status of this site, such as HQ (headquarter), branch, or single location. A list of accepted values are defined in the lookup type HQ_BRANCH_IND.
HomeCountry	string	The home country associated with the party.
ImportIndicator	string	Indicates whether the organization is an importer. If the value is Y, then the organization is an importer. The default value is N.
IndustryCode	string	The Industry classification code. The classification codes are defined for every classification category as specified in IndustryCodeType attribute. Review and update the codes using the Setup and Maintenance work area, Manage Classification Categories task.
IndustryCodeType	string	The industry classification category code type. It is defaulted to the value of profile option MOT_INDUSTRY_CLASS_CATEGORY. Review and update the codes using the Setup and Maintenance work area, Manage Classification Categories task.
Keywords	string	List of the top keywords of the company.

Name	Type	Description
LaborSurplusIndicator	string	Indicates whether the organization operates in an area with a labor surplus. If the value is Y, then the organization operates in an area with a labor surplus. The default value is N.
LastAssignmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the sales account territory assignment was last run by the assignment manager.
LastAssignmentDateTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date the organization was last enriched.
LastEnrichmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the record was last enriched.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LegalStatus	string	The legal structure of the organization such as partnership, corporation, and so on.
LineOfBusiness	string	The type of business activities performed at the given site.
LocalActivityCode	string	The classification code for the local activity.
LocalActivityCodeType	string	The local activity classification code type identifier.
LocalBusinessIdentifier	string	The primary identifier assigned to a businesses by a government agency such as Chamber of Commerce, or other authority. It is often used by countries other than USA.
LocalBusinessIdentifierType	string	The lookup that represents most common business identifier in a country such as Chamber of Commerce Number in Italy, Government Registration Number in Taiwan. A list of accepted values are defined in the lookup type LOCAL_BUS_IDEN_TYPE.
Mailstop	string	A user-defined code to indicate a mail drop point within their organization

Name	Type	Description
MinorityOwnedIndicator	string	Indicates whether the organization is primarily owned by ethnic or racial minorities. If the value is Y, then the organization is owned by ethnic or racial minorities. The default value is N.
MinorityOwnedType	string	The type of minority-owned firm.
MissionStatement	string	The corporate charter of the organization in user-defined text format.
NamedFlag	boolean	Indicates if the sales account is a named sales account. If the value is True, then the account is a named account. The default value is False.
NextFiscalYearPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenue of the organization to be earned during its next fiscal year.
Note	*Note*	A note associated with the account.
OrganizationInformation	*Trading Community Organization Profile Additional Information*	
OrganizationName	string	The name of the party when the party type is Organization.
OrganizationSize	string	The size of the organization based on its revenue, number of employees, and so on. The accepted values are defined in the lookup type HZ_ORGANIZATION_SIZE.
OrganizationType	string	The user-defined organization type value such as region, division, and department.
OutOfBusinessIndicator	string	Indicates whether the organization is out of business. If the value is Y, then the organization is out of business. The default value is N.
OwnerEmailAddress	string	The email address of the employee resource that owns and manages the sales account. The owner is a valid employee resource defined within Sales Cloud.
OwnerName	string	Name of sales account owner.
OwnerPartyId	long	The unique identifier of a valid employee resource who owns and manages the sales account.

Name	Type	Description
OwnerPartyNumber	string	The party number of a valid employee resource who owns and manages the sales account.
ParentAccountName	string	The name of the parent account within the hierarchy.
ParentAccountPartyId	long	The party Id of the parent account within the hierarchy. To assign a parent account to a sales account, you must provide the parent account's party ID, party number, or source system reference.
ParentAccountPartyNumber	string	The party number of the parent account within the hierarchy.
ParentAccountSourceSystem	string	The source system of the parent account within the hierarchy.
ParentAccountSourceSystemReferenceValue	string	The source system reference of the parent account within the hierarchy.
ParentDUNSNumber	string	The D-U-N-S number of the parent entity or the organization that owns the majority stake of the organization's capital stock.
ParentOrSubsidiaryIndicator	string	Indicates whether the organization is a parent or subsidiary.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyNumber	string	The unique identification number for the party.
PartyStatus	string	Indicates the status of the account. This is an internally-used column and the values are defined in the lookup HZ_STATUS. Review and update the codes using the Manage Trading Community Common Lookups task in the Setup and Maintenance work area.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCountryCode	string	The country code prefix for the phone number.

Name	Type	Description
PhoneExtension	string	The extension to the phone number of the organization.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PostalCode	string	The postal code as defined by the formal countrywide postal system.
PostalPlus4Code	string	Four digit extension to the United States Postal ZIP code.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PrimaryAddress	*Sales Cloud Primary Address*	The primary address of the account.
PrimaryContactEmail	string	The email address of the account's primary contact.
PrimaryContactName	string	The name of the account's primary contact.
PrimaryContactPartyId	long	The unique identifier of the primary contact of the account.
PrimaryContactPartyNumber	string	The party number of the primary contact of the account.
PrimaryContactPhone	string	The phone number of the account's primary contact.
PrimaryContactSourceSystem	string	The name of external source system where the primary contact of the account is imported from.
PrimaryContactSourceSystemReferenceValue	string	The unique identifier for the account's primary contact from the external source system specified.

Name	Type	Description
PrincipalName	string	The name of the highest ranking person in the organization.
PrincipalTitle	string	The title of the highest ranking person in the organization.
Province	string	The province element of address.
PublicPrivateOwnershipFlag	boolean	Indicates whether the organization is publically or privately owned. If the value is Y, then the organization is a privately owned. The default value is N.
RawFaxNumber	string	The unformatted fax number of the organization.
RawPhoneNumber	string	The unformatted phone number of the organization.
RecordSet	string	The record set to display search results.
RegistrationType	string	Indicates the type of registration, such as nonprofit. The accepted values are defined in the lookup type REGISTRATION_TYPE.
RentOrOwnIndicator	string	Indicates if this contact owns or rents his or her residence. A list of valid codes for rent, own, and lease are defined in the lookup OWN_RENT_IND. Review and update the codes using the Manage Standard Lookups task in the Setup and Maintenance work area.
SalesProfileStatus	string	A valid user defined status of the sales account.
SalesTeamMember	*Sales Team Member*	The sales team member associated with the account.
SiebelLocation	string	Location of account - optional part of user primary key.
SmallBusinessIndicator	string	Indicates whether the organization is considered as a small business. If the value is Y, then the organization is considered as a small business. The default value is N.
SourceSystem	string	The source system name where the record originated.

Name	Type	Description
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
State	string	The state element of address.
StockSymbol	string	The corporate stock symbol of the organization as listed in stock exchanges.
TaxpayerIdentificationNumber	string	The taxpayer identification number that is often a unique identifier of the organization, such as income taxpayer Id in USA and fiscal code or NIF in Europe.
TotalEmployeesEstimatedIndicator	string	Indicates if the employee total is estimated. The accepted values are defined in the lookup type TOTAL_EMP_EST_IND.
TotalEmployeesIndicator	string	Indicates if subsidiaries are included in the calculation of total employees. The accepted values are defined in the lookup type TOTAL_EMPLOYEES_INDICATOR.
TotalEmployeesMinimumIndicator	string	Indicates if the employee number is a minimum, maximum, or average of the total number of employees. The accepted values are defined in the lookup type TOTAL_EMP_MIN_IND.
TotalEmployeesText	string	The total number of employees in text format.
TotalPaymentAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount of payment collected from the organization.
Type	string	The account type that defines if the account is a sales account or a prospect or any other party type. The accepted values are defined in the lookup type ZCA_ACCOUNT_TYPE. It is defaulted to ZCA_CUSTOMER if no value is provided.
URL	string	The destination URL associated with a specific Google AdWords ad.
UniqueNameSuffix	string	The suffix used to generate the attribute, PartyUniqueName. The suffix is concatenated to the OrganizationName attribute to generate the PartyUniqueName. The primary address is defaulted as the suffix.

Name	Type	Description
UpdateFlag	boolean	Indicates whether the user has access to update the record.
WomanOwnedIndicator	string	Indicates whether the organization is primarily owned by women. If the value is Y, then the organization is primarily owned by women. The default value is N.
YearEstablished	int	The year when the organization began doing business.
YearIncorporated	int	The year when the business was formally incorporated.

Note

The object that captures comments, information, or instructions for an Oracle Fusion Applications business object.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/noteService}Note

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note Descriptive Flexfields*
Contained by	*Objective*
Contained by	*Opportunity*
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Contained by	*Activity*
Contained by	*Sales Competitor*

Relationship Type	Object or Service
Contained by	*Sales Lead*
Contained by	*Business Plan*
Contained by	*Program Enrollments*
Contained by	*Reference*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).

Name	Type	Description
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreatorPartyId	long	This is the party identifier for the note creator.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteFlag	boolean	Indicates whether the user has access to delete the note.
Dff	*Note Descriptive Flexfields*	The descriptive flex field segment.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record
NoteAttributeCategory	string	The contextual flex field for development usage.
NoteAttributeUid1	string	The flex field for development usage.
NoteAttributeUid2	string	The flex field for development usage.
NoteAttributeUid3	string	The flex field for development usage.
NoteAttributeUid4	string	The flex field for development usage.
NoteAttributeUid5	string	The flex field for development usage.
NoteId	long	The unique identifier of the note.

Name	Type	Description
		• Primary Key
NoteNumber	string	The alternate unique identifier of the note. A user key that is system generated or from an external system.
NoteTitle	string	The title of the note entered by the user.
NoteTxt	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	This is the column that stores the actual note text.
NoteTypeCode	string	This is the note type code for categorization of note.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
SourceObjectCode	string	This is the source_object_code for the source object as defined in OBJECTS Metadata.
SourceObjectId	string	This is the source_object_Uid for the source object such as Activities, Opportunities, and so on defined in OBJECTS metadata.
UpdateFlag	boolean	Indicates whether the user can update the note.
VisibilityCode	string	This is the attribute to specify the visibility level of the note.

Note Descriptive Flexfields

The descriptive flex field that captures additional information for notes, such as a priority or status.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/flex/noteDff/}NoteDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Note*

Relationship Type	Object or Service
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
NoteId	long	The unique identifier of the note. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Sales Cloud Primary Address

An object that includes attributes used to store values while creating or updating a primary address. A primary address is the default communication address of an entity irrespective of the address purpose.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/commonService/}PrimaryAddress

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Cloud Household*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddressElementAttribute1	string	Additional address element to support flexible address format.
AddressElementAttribute2	string	Additional address element to support flexible address format.
AddressElementAttribute3	string	Additional address element to support flexible address format.
AddressElementAttribute4	string	Additional address element to support flexible address format.

Name	Type	Description
AddressElementAttribute5	string	Additional address element to support flexible address format.
AddressId	long	First line for address. • Primary Key
AddressLine1	string	Second line for address.
AddressLine2	string	Third line for address.
AddressLine3	string	Fourth line for address.
AddressLine4	string	Address internal unique identifier that is internally generated during create. One of AddressId, AddressNumber or SourceSystem and SourceSystemReferenceValue keys is used to identify the address record during update.
AddressLinesPhonetic	string	Phonetic or Kana representation of the Kanji address lines (used in Japan).
AddressNumber	string	Alternate unique identifier for the address. One of AddressId, AddressNumber or SourceSystem and SourceSystemReferenceValue keys is used to identify the address record during update. If not specified, then it is automatically generated. Prefix defined as in profile option ZCA_PUID_PREFIX concatenated with an internally generated unique sequence number.
Building	string	Specific building name or number at a given address.
City	string	The name of the city.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date the address was last validated.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
Description	string	The free text description of the record.
FloorNumber	string	Specific floor number at a given address or in a particular building when building number is provided.
FormattedAddress	string	Formatted address information.
FormattedMultiLineAddress	string	Formatted multiple line address information.
HouseType	string	Indicates the building type. A list of valid values is defined in the lookup HZ_HOUSE_TYPE. Review and update the codes using the Setup and Maintenance work area, Manage Standard Lookups task.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	Used to store latitude information for the location for spatial proximity and containment purposes.
LocationDirections	string	Directions to the location.

Name	Type	Description
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
Longitude	decimal	Used to store longitude Information for the location for spatial proximity and containment purposes.
Mailstop	string	A user-defined code to indicate a mail drop point within their organization.
PartyId	long	The unique identifier of the contact party.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	Four digit extension to the United States Postal ZIP code.
Province	string	The name of the province.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
State	string	The name of the state.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	Standardized status code describing the results of the validation.

Sales Team Member

An object representing a resource party that is assigned to a sales account team and has a defined access role for the sales account.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/commonService/}SalesTeamMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Cloud Household*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	The access level determines the type of access granted to the resource as well as managers of the organizations. The possible values are contained in the ZCA_ACCESS_LEVEL lookup.
AssignmentTypeCode	string	The code indicating how the resource is assigned to the sales account team. The possible values are contained in the ZCA_ASSIGNMENT_TYPE lookup.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
LockAssignmentFlag	boolean	The flag indicates automatic territory assignment cannot remove the sales account team resource when this flag is 'Y'. When a sales account team member is added manually, this flag is defaulted to 'Y'.
MemberFunctionCode	string	The lookup code indicating a sales account resource's role on the resource team such as Integrator, Executive Sponsor and Technical Account Manager. The code lookup is stored in FND_LOOKUPS.
ResourceEmailAddress	string	Unique identifier for the resource.
ResourceId	long	The unique identifier of the resource.
ResourceName	string	The name of the sales team member.
ResourceOrgName	string	The name of the resource organization of the sales team member.
ResourcePartyNumber	string	Unique identifier for the resource.
ResourcePhoneNumber	string	The formatted primary phone number of the sales team member.
ResourceRoleName	string	The list of roles for a sales team member.
SalesProfileId	long	The identifier for the sales account.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
TeamMemberId	long	The surrogate primary key for the member of the sales account resource team. • Primary Key
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Trading Community Organization Profile Additional Information

The additional profile information about an organization, such as the organization type.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/organization/}OrganizationInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Cloud Account*
Contained by	*Account*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrganizationProfileId	long	The unique identifier of the organization profile. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Sales Cloud Address

Service to operate on the address entity in Oracle Sales Cloud. It exposes the key attributes of an address and provides operations to define and manage the address. This service is used to manage addresses in relation to a customer or prospect entity of type account, contact, or household. It is also used to manage multiple address purposes for a given address.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/addressService/}AddressService

Service WSDL URL: https://servername/crmService/SalesPartiesAddressService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Account
- CRM : Trading Community Model : Account
- CRM : Trading Community Model : Account

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Address*
Handles	*Address Purpose*

Operations

- *getAddress*
- *createAddress*
- *updateAddress*
- *deleteAddress*
- *mergeAddress*
- *findAddress*
- *processAddress*
- *processCSAddress*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*

- *getEntityList*

getAddress

Retrieves the address based on the primary key identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
AddressId	long	Party site identifier.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Address*	Address that matches the inbound key attributes.

createAddress

An operation to create an address.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
address	*Sales Cloud Address*	Address to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/salesParties/addressService/}AddressResult	Created address.

updateAddress

Updates an address. The address is identified by either providing the primary or alternate keys of the Address.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
address	*Sales Cloud Address*	Address to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/salesParties/addressService/}AddressResult	Updated address.

deleteAddress

Deletes an address.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
address	*Sales Cloud Address*	Address to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	Not applicable.

mergeAddress

Performs a merge on the address It will perform an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
address	*Sales Cloud Address*	Address to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/salesParties/addressService/}AddressResult	Merged address.

findAddress

Finds a list of addresses matching the supplied criteria pertaining to the object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, etc.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Method not currently used.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Address*	A list of Address that satisfy the inbound criteria.

processAddress

Performs a create, update, delete, or merge operation on a list of address rows. The specified operation is applied to all objects in the given list.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action shall be performed, such as create, update, merge, or delete.
address	*Sales Cloud Address*	A list of addresses to be processed.

Element Name	Type	Description
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Address*	A list of Addresses that are successfully processed.

processCSAddress

Performs a create, update, or delete operation on a list of address rows. Different operations may be applied to different objects, depending on what is specified in the ChangeSummary object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	Result of the operation including a list of created/updated data objects, and all warning and informational messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
mergeAddress	ZCM_UPDATE_SALES_GROUP_PRIV	Update Sales Group	Allows updating a sales group
mergeAddress	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.
mergeAddress	ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	Update Sales Party Contact	Allows updating the sales party contacts.
mergeAddress	ZCM_UPDATE_SALES_ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
updateAddress	ZCM_UPDATE_SALES_GROUP_PRIV	Update Sales Group	Allows updating a sales group
updateAddress	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.
updateAddress	ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	Update Sales Party Contact	Allows updating the sales party contacts.
updateAddress	ZCM_UPDATE_SALES_ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
findAddress	ZCM_VIEW_SALES_GROUP_PRIV	View Sales Group	Allows viewing a sales group
findAddress	ZCM_VIEW_CONSUMER_PRIV	View Consumer	Allows viewing of consumers.

Operation Name	Privilege Code	Privilege Name	Privilege Description
findAddress	ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	View Sales Party Contact	Allows viewing of sales party contact information.
findAddress	ZCM_VIEW_SALES_ORGANIZATION_PRIV	View Sales Organization	Allows viewing of the sales organization.
createAddress	ZCM_UPDATE_SALES_GROUP_PRIV	Update Sales Group	Allows updating a sales group
createAddress	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.
createAddress	ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	Update Sales Party Contact	Allows updating the sales party contacts.
createAddress	ZCM_UPDATE_SALES_ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
deleteAddress	ZCM_UPDATE_SALES_GROUP_PRIV	Update Sales Group	Allows updating a sales group
deleteAddress	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.
deleteAddress	ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	Update Sales Party Contact	Allows updating the sales party contacts.
deleteAddress	ZCM_UPDATE_SALES_ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
processCSAddress	ZCM_UPDATE_SALES_GROUP_PRIV	Update Sales Group	Allows updating a sales group
processCSAddress	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.
processCSAddress	ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	Update Sales Party Contact	Allows updating the sales party contacts.
processCSAddress	ZCM_UPDATE_SALES_ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
processAddress	ZCM_UPDATE_SALES_GROUP_PRIV	Update Sales Group	Allows updating a sales group

Operation Name	Privilege Code	Privilege Name	Privilege Description
processAddress	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.
processAddress	ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	Update Sales Party Contact	Allows updating the sales party contacts.
processAddress	ZCM_UPDATE_SALES_ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
getAddress	ZCM_VIEW_SALES_GROUP_PRIV	View Sales Group	Allows viewing a sales group
getAddress	ZCM_VIEW_CONSUMER_PRIV	View Consumer	Allows viewing of consumers.
getAddress	ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	View Sales Party Contact	Allows viewing of sales party contact information.
getAddress	ZCM_VIEW_SALES_ORGANIZATION_PRIV	View Sales Organization	Allows viewing of the sales organization.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_VIEW_SALES_ORGANIZATION_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_VIEW_SALES_ORGANIZATION_PRIV	ORA_SVC_CASE_ADMINISTRATOR	Case Administrator	Administers all aspects of Case Management.
ZCM_VIEW_SALES_ORGANIZATION_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZCM_VIEW_SALES_ORGANIZATION_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_ORGANIZATION_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			critical service requests, service level agreements.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_CASE_EXECUTION	Case Execution	Assists clients who are applying for benefits, opens cases and manages all tasks associated to the case, processes clients applications, evaluate clients needs for benefits, counsels benefits recipients, performs assessments of clients strengths and needs to develop benefit plans, performs follow-up with clients to ensure they are working on their tasks.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_CASE_SUPERVISION	Case Supervision	Supervises and manages caseworkers, assists caseworkers with any complex issues, handles case approvals and escalations, coordinates care and benefits with external service providers, assigns or reassigns cases to caseworkers, conducts evaluations of benefits programs and provides feedback.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_INTERNAL_HELPDESK_ SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_ZCM_SALES_PARTY_ REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_HR_SR_ ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			manage queues and administer the Internal Help Desk service application, including setup.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_VIEW_CONSUMER_PRIV	ORA_ZCM_SR_SALES_PARTY_ MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_VIEW_CONSUMER_PRIV	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_VIEW_CONSUMER_PRIV	ORA_ZCM_SALES_PARTY_ REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCM_VIEW_CONSUMER_PRIV	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_UPDATE_SALES_ ORGANIZATION_PRIV	ORA_ZCM_SR_SALES_PARTY_ MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_UPDATE_SALES_ ORGANIZATION_PRIV	ORA_UER_UTILITIES_CUSTOMER_ SERVICE_MANAGER_JOB	Utilities Customer Service Manager	Individual responsible for managing Utilities Customer Service Representatives for a utilities customer service function.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	Utilities Customer Service Representative	Individual responsible for answering customer inquiries and resolving customer problems for a utilities customer service function.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	Utilities Customer Service Administrator	Individual responsible for the day-to-day administrative support for a utilities customer service function.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_UPDATE_SALES_GROUP_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_UPDATE_SALES_GROUP_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_UPDATE_SALES_GROUP_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_UPDATE_SALES_GROUP_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_UPDATE_CONSUMER_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_UPDATE_CONSUMER_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_UPDATE_CONSUMER_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_GROUP_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_VIEW_SALES_GROUP_PRIV	ORA_SVC_CASE_SUPERVISION	Case Supervision	Supervises and manages caseworkers, assists caseworkers

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			with any complex issues, handles case approvals and escalations, coordinates care and benefits with external service providers, assigns or reassigns cases to caseworkers, conducts evaluations of benefits programs and provides feedback.
ZCM_VIEW_SALES_GROUP_PRIV	ORA_SVC_CASE_ADMINISTRATOR	Case Administrator	Administers all aspects of Case Management.
ZCM_VIEW_SALES_GROUP_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_GROUP_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCM_VIEW_SALES_GROUP_PRIV	ORA_SVC_CASE_EXECUTION	Case Execution	Assists clients who are applying for benefits, opens cases and manages all tasks associated to the case, processes clients applications, evaluate clients needs for benefits, counsels benefits recipients, performs assessments of clients strengths and needs to develop benefit plans, performs follow-up with clients to ensure they are working on their tasks.
ZCM_VIEW_SALES_GROUP_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	ORA_LOY_MANAGEMENT_DUTY	Loyalty Management	Manages all aspects of a Loyalty Program
ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_CASE_ADMINISTRATOR	Case Administrator	Administers all aspects of Case Management.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			critical service requests, service level agreements.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_CASE_EXECUTION	Case Execution	Assists clients who are applying for benefits, opens cases and manages all tasks associated to the case, processes clients applications, evaluate clients needs for benefits, counsels benefits recipients, performs assessments of clients strengths and needs to develop benefit plans, performs follow-up with clients to ensure they are working on their tasks.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_CASE_SUPERVISION	Case Supervision	Supervises and manages caseworkers, assists caseworkers with any complex issues, handles case approvals and escalations, coordinates care and benefits with external service providers, assigns or reassigns cases to caseworkers, conducts evaluations of benefits programs and provides feedback.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_SVC_CUSTOMER_SERVICE_MANAGER_JOB	Customer Service Manager	Manages a group of Customer Service Representatives, and would monitor the incoming call volume into the customer service department, perhaps balancing loads and reassigning work when call volume is high. This individual would monitor incoming business, and manage the demand flow to the fulfillment area. May also need to respond to escalations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_SVC_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	Customer Service Representative	A resource that is typically assigned to a contact center to answer customer inquiries and resolve customer problems. Can respond to inquiries such as frequently asked questions, troubleshooting assistance, order status or order entry, or other transactions. This individual usually is assigned to serve a group of customers or support other customer-facing resources to resolve issues.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_SVC_ENGAGEMENT_CHANNEL_APPLICATION_ADMINISTRATOR_JOB	Engagement Channel Application Administrator	Individual responsible for administration of all aspects the supervisor dashboard, including setup and administration of the engagement channel.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_SVC_ENGAGEMENT_CHANNEL_SUPERVISOR_JOB	Engagement Channel Supervisor	Individual responsible for monitoring metrics and overall resource balancing across the Engagement channels.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_ANALYTICS_DUTY	Knowledge Analytics	User's ability to execute and create analytics reports
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_CSO_KNOWLEDGE_AUTHOR_SERVICE_JOB	Knowledge Author Service	Provides for the ability to author service articles
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_CSO_KNOWLEDGE_AUTHORING_DUTY	Knowledge Authoring	Provides for the ability to participate in the life cycle of a knowledge article from creation to deletion
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_DUTY	Knowledge Home	Provides users with the ability to view and rate knowledge articles
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_CSO_KNOWLEDGE_HOME_DUTY	Knowledge Home	Provides users with the ability to view and rate knowledge articles
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_CSO_KM_REST_ADMIN	Knowledge Rest Administrator	This role is used by REST API users
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_CSO_KNOWLEDGE_SEARCH_SERVICE_JOB	Knowledge Search Service	Provides the ability to search Service department articles
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_CSO_KNOWLEDGE_SEARCH_SERVICE_JOB	Knowledge Search Service	Provides the ability to search Service department articles
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_USER_MANAGEMENT_DUTY	Knowledge User Management	Provides for the ability to manage users, internal knowledge roles, and user groups memberships
ORA_LOY_MANAGEMENT_DUTY	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ORA_LOY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_UER_UTILITIES_CONFIGURATION_ADMINISTRATOR	Utilities Configuration Administrator	Individual responsible for maintaining utilities industry configurations.

Sales Cloud Address

An object that includes attributes used to store values while creating or updating an address. An address represents the location information of an account, contact or household.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/addressService/}Address

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Address Purpose*
Handled by	*Sales Cloud Address*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddrElementAttribute1	string	The additional address element to support flexible address format.
AddrElementAttribute2	string	The additional address element to support flexible address format.
AddrElementAttribute3	string	The additional address element to support flexible address format.
AddrElementAttribute4	string	The additional address element to support flexible address format.

Name	Type	Description
AddrElementAttribute5	string	The additional address element to support flexible address format.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AddressId	long	The unique address identifier that is internally generated during create. One of AddressId, AddressNumber, or SourceSystem and SourceSystemReferenceValue keys is used to identify the address record during update. • Primary Key
AddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines (used in Japan).
AddressNumber	string	The alternate unique identifier for the address. One of AddressId, AddressNumber, or SourceSystem and SourceSystemReferenceValue keys is used to identify the address record during update. If not specified, then it is automatically generated. The prefix is the profile option ZCA_PUID_PREFIX concatenated with an internally generated unique sequence number.
AddressPurpose	*Sales Cloud Address Purpose*	The reference to the address purpose child entity associated with the address.
Building	string	The specific building name or number at a given address.
City	string	The name of the city.
CliiCode	string	The Common Language Location Identifier (CLLI) code.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.

Name	Type	Description
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date on which the address was last validated.
Description	string	The free text description of the record.
DoNotMailFlag	boolean	Indicates whether the address should be used for mailing or not.
EffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The effective date for the address.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FloorNumber	string	The specific floor number at a given address when the building number is provided.
FormattedAddress	string	The formatted address information.
FormattedMultilineAddress	string	The formatted multiple line address information.
HouseType	string	Indicates the building type. A list of valid values is defined in the lookup HZ_HOUSE_TYPE. Review and update the codes using the Manage Standard Lookups task in the Setup and Maintenance work area.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	The latitude information for the location for spatial proximity and containment purposes.
LocationDirections	string	The directions to the location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table. • Primary Key
Longitude	decimal	The longitude information for the location for spatial proximity and containment purposes.
Mailstop	string	A user-defined code to indicate the mail drop point within the organization.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PartySourceSystem	string	The name of the external source system of the account, contact, or household with which the address is associated. It is part of the alternate key for the account, contact, or household record (along with PartySourceSystemReferenceValue). One of PartyId, PartyNumber, or PartySourceSystem and PartySourceSystemReferenceValue keys is required to identify the account, contact, or household record. The value for this attribute should be predefined in the lookup type HZ_ORIG_SYSTEMS_VL using the setup task Manage Trading Community Source Systems.
PartySourceSystemReferenceValue	string	The identifier for the account, contact, or household from the external source system with which the address is associated.

Name	Type	Description
		It is part of the alternate key (along with PartySourceSystem). One of PartyId, PartyNumber, or PartySourceSystem and PartySourceSystemReferenceValue keys is required to identify the account, contact, or household record.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four digit extension to the United States Postal ZIP code.
PrimaryFlag	boolean	Indicates if this is the primary address of the associated object. If the value is Y, then the address is a primary address.
Province	string	The name of the province.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
State	string	The name of the state.
Status	string	The status of the record.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the validation starts. It is internally set by the system during address cleansing.
ValidationStatusCode	string	The standardized status code that describes the results of the validation.

Sales Cloud Address Purpose

An object that includes attributes used to store values while creating or updating the address purpose. The address purpose describes the use of an address. For example, shipping address or billing address.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/addressService/}AddressPurpose

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Cloud Address*
Handled by	*Sales Cloud Address*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddressPurposeId	long	The unique internal identifier used for identifying the address purpose record in case of an update. The identifier is internally generated during record creation. • Primary Key
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
Purpose	string	The use or purpose of the address e.g. billing, shipping, and so on. A list of valid values is defined in the lookup PARTY_SITE_USE_CODE. Review and update the codes using the Manage Standard Lookups task in the Setup and Maintenance work area.

Sales Cloud Contact

The service used to create, update, retrieve, and delete contacts. A contact could be either a buying customer in a B2C scenario or contact of an account in a B2B scenario. A contact could also be a member of a household or a standalone contact defined within the application. Almost all frequently used operations involving a contact excluding relationships and additional address are covered by this service.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/contactService/}ContactService

Service WSDL URL: https://servername/crmService/ContactService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Contact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Note Descriptive Flexfields*
Handles	*Primary Address SDO*
Handles	*Sales Team Member*
Handles	*Note*
Handles	*Contact*

Operations

- *getContact*
- *createContact*
- *updateContact*
- *deleteContact*
- *mergeContact*
- *findContact*
- *processContact*
- *processCSContact*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getContact

An operation to retrieve the contact based on the primary key identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
PartyId	long	The get operation for party identifier.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Contact*	The operation to return contact that matches the inbound key attributes.

createContact

An operation to create a contact and its primary address (optional).

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contact	*Sales Cloud Contact*	The operation for the contact to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/salesParties/contactService/}ContactResult	The operation that returns create contact.

updateContact

An operation to update a contact and primary address. When updating the primary address information, it is not necessary to include the primary or alternate keys for the primary address. There is a one-to-one correspondence between the contact and primary address. If the alternate keys SourceSystem and SourceSystemReferenceValue in the primary address are specified and they do not match the values in the existing primary address, then a new SourceSystem/SourceSystemReferenceValue gets created for the existing primary address.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contact	*Sales Cloud Contact*	The operation for the contacts to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/salesParties/contactService/}ContactResult	The operation that returns the updated contact.

deleteContact

An operation to delete a contact and the relationship between the contact and address objects indicating the address is a primary address. The address object cannot be deleted using this operation. To delete the address, use the Sales Cloud Address service.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contact	*Sales Cloud Contact*	The operation for the contact to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	Not applicable.

mergeContact

An operation to perform a merge on the contact. It will perform an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contact	*Sales Cloud Contact*	The operation for the contact to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/salesParties/contactService/}ContactResult	The operation returns merged contact.

findContact

An operation to find a list of contacts based matching the supplied criteria pertaining to the object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Contact*	A list of contacts that satisfy the inbound criteria.

processContact

The operation that performs a create, update, delete, or merge operation on a list of contact rows. The specified operation is applied to all objects in the given list.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The operation that indicates what action, such as create, update, merge, or delete, will be performed.
contact	*Sales Cloud Contact*	A list of contacts to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The operation to control your bulk upload behavior, such as whether the valid data will

Element Name	Type	Description
		be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Contact*	A list of contacts that are successfully processed.

processCSContact

The operation that performs create, update, or delete on a list of contact rows. Different operations may be applied to different objects, depending on what is specified in the change summary object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The operation to control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation including a list of created or updated data objects, and all warning and informational messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The locale name is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
findContact	ZCM_VIEW_CONSUMER_PRIV	View Consumer	Allows viewing of consumers.
findContact	ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	View Sales Party Contact	Allows viewing of sales party contact information.
updateContact	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.
updateContact	ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	Update Sales Party Contact	Allows updating the sales party contacts.
processContact	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.
processContact	ZCM_DELETE_SALES_PARTY_CONTACT_PRIV	Delete Sales Party Contact	Allows deleting sales party contacts.
processContact	ZCM_CREATE_CONSUMER_PRIV	Create Consumer	Allows creating a consumer.
processContact	ZCM_CREATE_SALES_PARTY_CONTACT_PRIV	Create Sales Party Contact	Allows creating a sales party contact.
processContact	ZCM_DELETE_CONSUMER_PRIV	Delete Consumer	Allows deleting consumers.
processContact	ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	Update Sales Party Contact	Allows updating the sales party contacts.
processCSContact	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.

Operation Name	Privilege Code	Privilege Name	Privilege Description
processCSContact	ZCM_DELETE_SALES_PARTY_CONTACT_PRIV	Delete Sales Party Contact	Allows deleting sales party contacts.
processCSContact	ZCM_CREATE_CONSUMER_PRIV	Create Consumer	Allows creating a consumer.
processCSContact	ZCM_CREATE_SALES_PARTY_CONTACT_PRIV	Create Sales Party Contact	Allows creating a sales party contact.
processCSContact	ZCM_DELETE_CONSUMER_PRIV	Delete Consumer	Allows deleting consumers.
processCSContact	ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	Update Sales Party Contact	Allows updating the sales party contacts.
createContact	ZCM_CREATE_CONSUMER_PRIV	Create Consumer	Allows creating a consumer.
createContact	ZCM_CREATE_SALES_PARTY_CONTACT_PRIV	Create Sales Party Contact	Allows creating a sales party contact.
getContact	ZCM_VIEW_CONSUMER_PRIV	View Consumer	Allows viewing of consumers.
getContact	ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	View Sales Party Contact	Allows viewing of sales party contact information.
mergeContact	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.
mergeContact	ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	Update Sales Party Contact	Allows updating the sales party contacts.
deleteContact	ZCM_DELETE_SALES_PARTY_CONTACT_PRIV	Delete Sales Party Contact	Allows deleting sales party contacts.
deleteContact	ZCM_DELETE_CONSUMER_PRIV	Delete Consumer	Allows deleting consumers.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_CREATE_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_CREATE_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_CREATE_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_CREATE_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_VIEW_CONSUMER_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_VIEW_CONSUMER_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_VIEW_CONSUMER_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCM_VIEW_CONSUMER_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_UPDATE_CONSUMER_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_UPDATE_CONSUMER_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_UPDATE_CONSUMER_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_DELETE_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_DELETE_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_DELETE_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_DELETE_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_DELETE_CONSUMER_PRIV	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	ORA_LOY_MANAGEMENT_DUTY	Loyalty Management	Manages all aspects of a Loyalty Program
ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_UPDATE_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_CREATE_CONSUMER_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_CREATE_CONSUMER_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_CREATE_CONSUMER_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_CASE_ADMINISTRATOR	Case Administrator	Administers all aspects of Case Management.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_CASE_EXECUTION	Case Execution	Assists clients who are applying for benefits, opens cases and manages all tasks associated to the case, processes clients applications, evaluate clients needs for benefits, counsels benefits recipients, performs assessments of clients strengths and needs to develop benefit plans, performs follow-up with clients to ensure they are working on their tasks.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_CASE_SUPERVISION	Case Supervision	Supervises and manages caseworkers, assists caseworkers with any complex issues, handles case approvals and escalations, coordinates care and benefits with external service providers, assigns or reassigns cases to caseworkers, conducts evaluations of benefits programs and provides feedback.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZCM_VIEW_SALES_PARTY_CONTACT_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.
ORA_LOY_MANAGEMENT_DUTY	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_LOY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Sales Cloud Contact

An object that includes attributes used to store values while creating or updating a contact. A contact is a person who either has a relationship to other objects like contact and household or is a standalone customer or prospect. This object is an aggregation of person profile, contact information, and references a single primary address.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/contactService/}Contact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Cloud Primary Address*
Contains	*Sales Team Member*
Contains	*Note*
Handled by	*Sales Cloud Contact*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
AccountName	string	The name of the sales account that this contact belongs to.
AccountPartyId	long	The unique identifier of sales account that this contact belongs to. To specify the account for a contact, you can provide an Account's party ID, PartyNumber, SourceSystem, or SourceSystemReference.
AccountPartyNumber	string	The party number of the sales account that this contact belongs to. To specify the account for a contact, you can provide an Account's party ID, PartyNumber, SourceSystem, or SourceSystemReference.
AccountSourceSystem	string	The Source System code of the sales account that this contact belongs to. To specify the account for a contact, you can provide an Account's party ID, PartyNumber, SourceSystem, or SourceSystemReference.
AccountSourceSystemReferenceValue	string	The Source System Reference value of the sales account that this contact belongs to. To specify the account for a contact, you can

Name	Type	Description
		provide an Account's party ID, PartyNumber, SourceSystem, or SourceSystemReference.
AddressElementAttribute1	string	Additional address element to support flexible address format
AddressElementAttribute2	string	Additional address element to support flexible address format
AddressElementAttribute3	string	Additional address element to support flexible address format
AddressElementAttribute4	string	Additional address element to support flexible address format
AddressElementAttribute5	string	Additional address element to support flexible address format
AddressLine1	string	First line of address.
AddressLine2	string	Second line of address.
AddressLine3	string	Third line of address.
AddressLine4	string	Fourth line of address.
AddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines (used in Japan).
AddressNumber	string	Alternate unique identifier for the address. One of AddressId, AddressNumber or SourceSystem and SourceSystemReferenceValue keys is used to identify the address record during update. If not specified, then it is automatically generated. Prefix defined as in profile option ZCA_PUID_PREFIX concatenated with an internally generated unique sequence number.
AddressType	string	Additional information as type of address like BillTo, ShipTo.
AssignmentExceptionFlag	boolean	Indicates whether the sales account has the required dimensions to allow assignment manager to assign territories to the sales account. If the value is True, then the sales account has the required dimensions. The default value is False.

Name	Type	Description
Building	string	Specific building name or number at a given address.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
CertificationReasonCode	string	The reason for the contact's current certification level assignment. A list of accepted values are defined using the lookup HZ_PARTY_CERT_REASON. Review and update the value for this attribute using the Setup and Maintenance work area, Manage Trading Community Common Lookups task.
City	string	The city element of address.
ClassificationCategory	string	A valid classification category code for the contact. This is defined by an admin and is marked as primary.
ClassificationCode	string	A valid classification code corresponding to the classification category, which is marked as primary.
Comments	string	The comments for the record.
ContactIsPrimaryForAccount	string	The preferred contact for the account.
ContactName	string	The derived name of the contact.
ContactRole	string	Specifies the role of the contact.
ContactUniqueName	string	The unique contact name displayed on contact related screens. The default value for ContactUniqueName is the concatenation of attributes ContactName and UniqueNameSuffix. If the attribute UniqueNameSuffix is nil, then the ContactName is concatenated with a system generated number.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	Country code of the address.
County	string	County element of address.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DataCloudStatus	string	The enrichment status of the contact record from Data cloud. A list of accepted values are defined in the lookup DATA_CLOUD_STATUS. Review and update the value for this attribute using the Setup and Maintenance work area, Manage Standard Lookups task.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
DateOfDeath	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date when the person died.
DeceasedFlag	boolean	Indicates whether the person deceased or not. If the value is True, then the person is deceased. The default value is False.
DeclaredEthnicity	string	The declared ethnicity of the person.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
Department	string	The free form text used to name the department for the contact.
DepartmentCode	string	The department code for the contact. A list of accepted values is defined in the lookup DEPARTMENT_TYPE. Review and update the value for this attribute using the Setup and Maintenance work area, Manage Contact Lookups task.
DoNotCallFlag	boolean	Indicates if the user can call the person or not. If the value is True, then the user must not call

Name	Type	Description
		the person. The default value is False. A list of accepted values is defined using the lookup YES_NO. Review and update the value for this attribute using the Setup and Maintenance work area, Manage Common Lookups task.
DoNotContactFlag	boolean	Indicates if the user can contact the person or not by phone, email, or mail. If the value is True, then the user must not contact the person. The default is False. A list of accepted values is defined using the lookup YES_NO. Review and update the value for this attribute using the Setup and Maintenance work area, Manage Common Lookups task.
DoNotEmailFlag	boolean	Indicates if the user can email the person or not. If the value is True, then the user must not contact the person by e-mail. The default is False. A list of accepted values is defined using the lookup YES_NO. Review and update the value for this attribute using the Setup and Maintenance work area, Manage Common Lookups task.
DoNotMailFlag	boolean	Indicates if the user can send mail to the person or not. If the value is True, then the user must not contact the person by mail. The default is False. A list of accepted values is defined using the lookup YES_NO. Review and update the value for this attribute using the Setup and Maintenance work area, Manage Common Lookups task.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The preferred format for email addressed to this address such as HTML or ASCII. A list of accepted values is defined using the lookup EMAIL_FORMAT. Review and update the value for this attribute using the Setup and Maintenance work area, Manage Standard Lookups task.
ExistingCustomerFlag	boolean	Indicates whether there is an existing selling or billing relationship with the sales account. If the value is true, then there is an existing relationship with the sales account. The default value is False. Such relationships are defined by the existence of a Sell_To or Bill_To address.
ExistingCustomerFlagLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the ExistingCustomerFlag was last modified. It is internally populated by the application.

Name	Type	Description
FavoriteContactFlag	boolean	Indicates whether the person is a key contact. If the value is True, then person is a key contact. The default value is False.
FaxAreaCode	string	The area code.
FaxCountryCode	string	The international country code for a telephone number, such as 33 for France.
FaxExtension	string	The additional number addressed after initial connection to an internal telephone system.
FaxNumber	string	A telephone number formatted in the local format without the area code, country code, or extension.
FirstName	string	The first name of the person.
FloorNumber	string	Specific floor number at a given address or in a particular building when building number is provided
FormattedFaxNumber	string	The formatted fax number information.
FormattedHomePhoneNumber	string	Formatted mobile phone number information.
FormattedMobileNumber	string	Formatted work phone number information.
FormattedWorkPhoneNumber	string	The formatted work phone number information.
Gender	string	The gender of the person, such as male, female, and unknown. A list of accepted values are defined in the lookup HZ_GENDER. Review and update the value for this attribute using the Setup and Maintenance work area, Manage Standard Lookups task.
HeadOfHouseholdFlag	boolean	Indicates if the person is the head of the household. If the value is True, then the person is the head of the household. The default value is False.
HomePhoneAreaCode	string	The area code within a country code.
HomePhoneCountryCode	string	The international country code for a telephone number, such as 33 for France.

Name	Type	Description
HomePhoneNumber	string	The home phone number formatted in the local format without the area code, country code, or extension.
HouseholdIncomeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The income of the household that this person is a part of.
HouseholdSize	decimal	The size of the household that this person is a part of.
Initials	string	The initials of the contact's name.
JobTitle	string	The free form text for job title.
JobTitleCode	string	Code given to the job title.
LastAssignmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the sales account territory assignment was last run by assignment manager.
LastAssignmentDateTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the sales account territory assignment was last run by assignment manager.
LastContactDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the contact was last contacted.
LastEnrichmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact record was last enriched with data from external sources by using Data-as-a-Service.
LastName	string	The last name of the person.
LastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
Mailstop	string	A user-defined code to indicate a mail drop point within their organization
MaritalStatus	string	The marital status of the person. A list of accepted values is defined in the lookup MARITAL_STATUS. Review and update the value for this attribute using the Setup and Maintenance work area, Manage Standard Lookups task.
MaritalStatusEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person's marital status was changed.
MiddleName	string	The middle name of the person.
MobileAreaCode	string	The area code for the contact's mobile phone.
MobileCountryCode	string	The international country code for a contact's mobile phone number, such as 33 for France.
MobileExtension	string	The additional number addressed after initial connection to an internal telephone system.
MobileNumber	string	The mobile phone number formatted in the local format. The number should not include area code, country code, or extension.
MyBusinessContact	string	Indicates if searching on business contact belongs to login user. If the value is True, then the business contact belongs to login user. The default value is False.
NameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
NamedFlag	boolean	Indicates whether a sales account is a named sales account. If the value is True, then the sales account is a named sales account. The default value is False.
Note	*Note*	The note about the contact.
OwnerEmailAddress	string	The email address of a valid employee resource who owns and manages the sales account. To assign an owner to the sales account, user can provide one of the following attributes pertaining to the owner: PartyID, PartyNumber or E-mail Address. This is provided if user wants to change the owner of the contact or create contact with a different owner than the

Name	Type	Description
		login user. If provided, then OwnerPartyID, OwnerPartyNumber, and OwnerEmailAddress are honored in this order to determine the owner for the contact.
OwnerName	string	The name of the sales account owner.
OwnerPartyId	long	The unique identifier of a valid employee resource who owns and manages the sales account. The owner is a valid employee resource defined within Sales Cloud. To assign an owner to the sales account, user can provide one of the following attributes pertaining to the owner: PartyID, PartyNumber, or E-mail Address. This is provided if user wants to change the owner of the contact or create contact with a different owner than the login user. If provided, then OwnerPartyID, OwnerPartyNumber, and OwnerEmailAddress are honored in this order to determine the owner for the contact. During create, if none of the OwnerPartyID, OwnerPartyNumber, or OwnerEmailAddress is provided, then the contact is assigned by default to the login user. The login user's partyID is used to populate OwnerPartyID.
OwnerPartyNumber	string	The party number of a valid employee resource who owns and manages the sales account. To assign an owner to the sales account, user can provide one of the following attributes pertaining to the owner: PartyID, PartyNumber, or E-mail Address. This is provided if user wants to change the owner of the contact or create contact with a different owner than the login user. If provided, then OwnerPartyID, OwnerPartyNumber, and OwnerEmailAddress are honored in this order to determine the owner for the contact.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyNumber	string	The unique identification number for the party.
PartyStatus	string	The status of the contact. A list of valid values are defined in the lookup HZ_STATUS. Review and update the value for this attribute using the Setup and Maintenance work area, Manage Standard Lookups task.
PersonalIncomeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated gross annual income of the person.

Name	Type	Description
PlaceOfBirth	string	The place where the person was born, such as city or country.
PostalCode	string	Postal code as defined by the formal countrywide postal system
PostalPlus4Code	string	Four digit extension to the United States Postal ZIP code.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreviousLastName	string	The previous last name or surname of the person.
PrimaryAddress	*Sales Cloud Primary Address*	The primary address of the contact.
Province	string	Province element of address.
RawFaxNumber	string	The unformatted fax number information.
RawHomePhoneNumber	string	Unformatted home phone number information.
RawMobileNumber	string	The unformatted mobile phone number information.
RawWorkPhoneNumber	string	The unformatted work phone number information.
RecordSet	string	The search results displayed under the selected record set.
RegistrationStatus	string	Specifies the registration status of the contact.
RentOrOwnIndicator	string	Indicates if this contact owns or rents his or her residence. A list of valid values for rent, own, and lease is defined in the lookup OWN_RENT_IND. Review and update the value for this attribute using the Setup and Maintenance work area, Manage Standard Lookups task.

Name	Type	Description
SalesAffinityCode	string	The affinity of a contact to the deploying organization. A list of accepted values are defined in the lookup HZ_SLS_CNTCT_AFFINITY_CODE. Review and update the value for this attribute using the Setup and Maintenance work area, Manage Contact Lookups task.
SalesBuyingRoleCode	string	The roles played by a contact in the buying process, for example, decision maker or supporting role. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_BUY_ROLE_CODE. Review and update the values for this attribute using the Setup and Maintenance work area, Manage Contact Lookups task.
SalesProfileStatus	string	A valid user defined status of the sales account.
SalesTeamMember	*Sales Team Member*	The unique alternate identifier of the sales team member.
Salutation	string	The phrase used to address a contact party in any correspondence.
SalutoryIntroduction	string	The title or a salutary introduction for a contact, such as Mr., Herr, and so on. A list of accepted values is defined in the lookup CONTACT_TITLE. Review and update the value for this attribute using the Setup and Maintenance work area, Manage Standard Lookups task.
SecondLastName	string	The second last name for a person. A list of accepted values is defined in the lookup HZ_PERSON_PROFILES. Review and update the value for this attribute using the Setup and Maintenance work area, Manage Standard Lookups task.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
State	string	State element of address.
TaxpayerIdentificationNumber	string	The taxpayer identification number, which is often a unique identifier of the contact. These typical values are the taxpayer Id in USA or the fiscal code, or the NIF in Europe.

Name	Type	Description
TimezoneCode	string	Time zone of a contact to know preferred time to call or email.
Title	string	A professional or family title, such as Don or The Right Honorable.
Type	string	The contact party type that defines whether the contact is a sales account, a prospect, a contact or any other user-defined party type. The default value is ZCA_CUSTOMER. A list of accepted values is defined in the lookup ZCA_CONTACT_TYPE. Review and update the value for this attribute using the Setup and Maintenance work area, Manage Standard Lookups task.
UniqueNameSuffix	string	The system generated or manually overridden suffix. The suffix is used to generate the PartyUniqueName attribute and is concatenated to the ContactName attribute to generate the PartyUniqueName. The primary address is defaulted as the suffix.
UpdateFlag	boolean	This flag controls if the user has access to update the record.
WorkPhoneAreaCode	string	The area code for the contact's work phone.
WorkPhoneCountryCode	string	The international country code for a contact's work phone number, such as 33 for France.
WorkPhoneExtension	string	The additional number addressed after initial connection to an internal telephone system.
WorkPhoneNumber	string	The work phone number formatted in the local format without the area code, country code, or extension.

Note

The object that captures comments, information, or instructions for an Oracle Fusion Applications business object.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/noteService}Note

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note Descriptive Flexfields*
Contained by	*Objective*
Contained by	*Opportunity*
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Contained by	*Activity*
Contained by	*Sales Competitor*
Contained by	*Sales Lead*
Contained by	*Business Plan*
Contained by	*Program Enrollments*
Contained by	*Reference*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*

Relationship Type	Object or Service
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreatorPartyId	long	This is the party identifier for the note creator.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteFlag	boolean	Indicates whether the user has access to delete the note.
Dff	*Note Descriptive Flexfields*	The descriptive flex field segment.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record

Name	Type	Description
NoteAttributeCategory	string	The contextual flex field for development usage.
NoteAttributeUid1	string	The flex field for development usage.
NoteAttributeUid2	string	The flex field for development usage.
NoteAttributeUid3	string	The flex field for development usage.
NoteAttributeUid4	string	The flex field for development usage.
NoteAttributeUid5	string	The flex field for development usage.
NoteId	long	The unique identifier of the note. • Primary Key
NoteNumber	string	The alternate unique identifier of the note. A user key that is system generated or from an external system.
NoteTitle	string	The title of the note entered by the user.
NoteTxt	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	This is the column that stores the actual note text.
NoteTypeCode	string	This is the note type code for categorization of note.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
SourceObjectCode	string	This is the source_object_code for the source object as defined in OBJECTS Metadata.
SourceObjectId	string	This is the source_object_Uid for the source object such as Activities, Opportunities, and so on defined in OBJECTS metadata.
UpdateFlag	boolean	Indicates whether the user can update the note.
VisibilityCode	string	This is the attribute to specify the visibility level of the note.

Note Descriptive Flexfields

The descriptive flex field that captures additional information for notes, such as a priority or status.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/flex/noteDff/}NoteDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Note*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
NoteId	long	The unique identifier of the note. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Sales Cloud Primary Address

An object that includes attributes used to store values while creating or updating a primary address. A primary address is the default communication address of an entity irrespective of the address purpose.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/commonService/}PrimaryAddress

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Cloud Household*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddressElementAttribute1	string	Additional address element to support flexible address format.
AddressElementAttribute2	string	Additional address element to support flexible address format.
AddressElementAttribute3	string	Additional address element to support flexible address format.
AddressElementAttribute4	string	Additional address element to support flexible address format.
AddressElementAttribute5	string	Additional address element to support flexible address format.
AddressId	long	First line for address. • Primary Key
AddressLine1	string	Second line for address.
AddressLine2	string	Third line for address.
AddressLine3	string	Fourth line for address.
AddressLine4	string	Address internal unique identifier that is internally generated during create. One of AddressId, AddressNumber or SourceSystem and SourceSystemReferenceValue keys is used to identify the address record during update.
AddressLinesPhonetic	string	Phonetic or Kana representation of the Kanji address lines (used in Japan).
AddressNumber	string	Alternate unique identifier for the address. One of AddressId, AddressNumber or SourceSystem and SourceSystemReferenceValue keys is used to identify the address record during update. If not specified, then it is automatically generated. Prefix defined as in profile option ZCA_PUID_PREFIX concatenated with an internally generated unique sequence number.
Building	string	Specific building name or number at a given address.
City	string	The name of the city.
Comments	string	The comments for the record.

Name	Type	Description
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date the address was last validated.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
Description	string	The free text description of the record.
FloorNumber	string	Specific floor number at a given address or in a particular building when building number is provided.
FormattedAddress	string	Formatted address information.
FormattedMultiLineAddress	string	Formatted multiple line address information.
HouseType	string	Indicates the building type. A list of valid values is defined in the lookup HZ_HOUSE_TYPE. Review and update the codes using the Setup and Maintenance work area, Manage Standard Lookups task.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	Used to store latitude information for the location for spatial proximity and containment purposes.
LocationDirections	string	Directions to the location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
Longitude	decimal	Used to store longitude Information for the location for spatial proximity and containment purposes.
Mailstop	string	A user-defined code to indicate a mail drop point within their organization.
PartyId	long	The unique identifier of the contact party.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	Four digit extension to the United States Postal ZIP code.
Province	string	The name of the province.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
State	string	The name of the state.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	Standardized status code describing the results of the validation.

Sales Team Member

An object representing a resource party that is assigned to a sales account team and has a defined access role for the sales account.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/commonService/}SalesTeamMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Cloud Household*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	The access level determines the type of access granted to the resource as well as managers of the organizations. The possible values are contained in the ZCA_ACCESS_LEVEL lookup.
AssignmentTypeCode	string	The code indicating how the resource is assigned to the sales account team. The possible values are contained in the ZCA_ ASSIGNMENT_TYPE lookup.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/ types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LockAssignmentFlag	boolean	The flag indicates automatic territory assignment cannot remove the sales account team resource when this flag is Y'. When a sales account team member is added manually, this flag is defaulted to Y'.
MemberFunctionCode	string	The lookup code indicating a sales account resource's role on the resource team such as Integrator, Executive Sponsor and Technical Account Manager. The code lookup is stored in FND_LOOKUPS.
ResourceEmailAddress	string	Unique identifier for the resource.
ResourceId	long	The unique identifier of the resource.
ResourceName	string	The name of the sales team member.
ResourceOrgName	string	The name of the resource organization of the sales team member.
ResourcePartyNumber	string	Unique identifier for the resource.
ResourcePhoneNumber	string	The formatted primary phone number of the sales team member.
ResourceRoleName	string	The list of roles for a sales team member.
SalesProfileId	long	The identifier for the sales account.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
TeamMemberId	long	The surrogate primary key for the member of the sales account resource team.

Name	Type	Description
		• Primary Key
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Cloud Customer Classification

The service used to maintain classifications for a party that already exists.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/customerClassificationService/}CustomerClassificationService

Service WSDL URL: https://servername/crmService/CustomerClassificationService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Account
- CRM : Trading Community Model : Account
- CRM : Trading Community Model : Account

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Classification*

Operations

- *getCustomerClassification*
- *createCustomerClassification*
- *updateCustomerClassification*
- *deleteCustomerClassification*
- *mergeCustomerClassification*
- *findCustomerClassification*
- *processCustomerClassification*
- *processCSCustomerClassification*

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getCustomerClassification

The operation retrieves the customer classification details based on the primary key identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
codeAssignmentId	long	The operation for code assignment identifier.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Customer Classification*	The customer classification that matches the inbound key attributes.

createCustomerClassification

The operation creates a new classification association.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
customerClassification	*Sales Cloud Customer Classification*	The customer classification to be associated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/salesParties/customerClassificationService/}CustomerClassif	The customer classification which is created.

updateCustomerClassification

Updates a customer classification. The customer classification is identified by providing the primary key of the customer classification.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
customerClassification	*Sales Cloud Customer Classification*	Customer classification to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/salesParties/customerClassificationService/}CustomerClassif	The customer classification which is updated.

deleteCustomerClassification

Removes a classification from a customer.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
customerClassification	*Sales Cloud Customer Classification*	Customer classification to be removed.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	Not applicable.

mergeCustomerClassification

Performs a merge on the customer classification. It will perform an update if the object exists or an insert if the object doesn't exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
customerClassification	*Sales Cloud Customer Classification*	Customer classification to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/salesParties/customerClassificationService/}CustomerClassif	The customer classification which is merged.

findCustomerClassification

Finds a list of customer classifications matching the supplied criteria pertaining to the object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, etc.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This method is not currently used.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Customer Classification*	A list of customer classification that satisfy the inbound criteria.

processCustomerClassification

Performs a create, update, delete, or merge operation on a list of customer classification rows. It performs the specified operation on the customer classification.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action shall be performed, such as create, update, merge, or delete.
customerClassification	*Sales Cloud Customer Classification*	A list of customer classifications to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Customer Classification*	A list of customer classifications that are successfully processed.

processCSCustomerClassification

Performs a create, update, delete, or merge operation on a list of customer classification rows. The operation and objects depend on the ChangeSummary object specified.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	Result of the operation including a list of created or updated data objects, and all warning and informational messages.

Element Name	Type	Description

getDfltObjAttrHints

Retrieves the user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, which is an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Gets a list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
processCustomerClassification	ZCM_MANAGE_SALES_PARTY_CLASSIFICATIONS_PRIV	Manage Sales Party Classifications	Allows creation and maintenance of sales party classification.
getCustomerClassification	ZCM_VIEW_SALES_PARTY_CLASSIFICATIONS_PRIV	View Sales Party Classifications	Allows viewing of sales party classifications.
processCSCustomerClassification	ZCM_MANAGE_SALES_PARTY_CLASSIFICATIONS_PRIV	Manage Sales Party Classifications	Allows creation and maintenance of sales party classification.
createCustomerClassification	ZCM_MANAGE_SALES_PARTY_CLASSIFICATIONS_PRIV	Manage Sales Party Classifications	Allows creation and maintenance of sales party classification.
findCustomerClassification	ZCM_VIEW_SALES_PARTY_CLASSIFICATIONS_PRIV	View Sales Party Classifications	Allows viewing of sales party classifications.
deleteCustomerClassification	ZCM_MANAGE_SALES_PARTY_CLASSIFICATIONS_PRIV	Manage Sales Party Classifications	Allows creation and maintenance of sales party classification.
updateCustomerClassification	ZCM_MANAGE_SALES_PARTY_CLASSIFICATIONS_PRIV	Manage Sales Party Classifications	Allows creation and maintenance of sales party classification.

Operation Name	Privilege Code	Privilege Name	Privilege Description
mergeCustomerClassification	ZCM_MANAGE_SALES_PARTY_CLASSIFICATIONS_PRIV	Manage Sales Party Classifications	Allows creation and maintenance of sales party classification.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_MANAGE_SALES_PARTY_CLASSIFICATIONS_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_MANAGE_SALES_PARTY_CLASSIFICATIONS_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_MANAGE_SALES_PARTY_CLASSIFICATIONS_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_PARTY_CLASSIFICATIONS_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_VIEW_SALES_PARTY_CLASSIFICATIONS_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_PARTY_CLASSIFICATIONS_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Sales Cloud Customer Classification

An object that includes attributes used to store values while creating or updating a code assignment. A code assignment represents the classification category and classification code information of an account, contact, or household.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/customerClassificationService/}CustomerClassification

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Sales Cloud Customer Classification*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassCategory	string	Name of the classification category.

Name	Type	Description
ClassCode	string	A valid classification code corresponding to the classification category.
CodeAssignmentId	long	The unique identifier for the customer classification assignment. • Primary Key
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
IsAuxClassificationFlag	boolean	Indicates whether the classification category is a custom group classification category.
IsIndustryFlag	boolean	Indicates whether the classification category is an industry group classification category.
IsOrgTypeFlag	boolean	Indicates whether the classification category is an organization type classification category.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PartySourceSystem	string	The name of the external source system of the account, contact, or household with which the classification category and classification code is associated.
PartySourceSystemReferenceValue	string	The identifier from external source system for the account, contact, or household with which

Name	Type	Description
		the classification category and classification code is associated.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PrimaryFlag	boolean	Indicator to show if the current code is the primary classification code.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Sales Cloud Household

The service used to create, update, retrieve, and delete households.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/householdService/}HouseholdService

Service WSDL URL: https://servername/crmService/HouseholdService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Household

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Note Descriptive Flexfields*
Handles	*Sales Cloud Primary Address*

Relationship Type	Object or Service
Handles	*Sales Team Member*
Handles	*Household*
Handles	*Note*

Operations

- *getHousehold*
- *createHousehold*
- *updateHousehold*
- *deleteHousehold*
- *mergeHousehold*
- *findHousehold*
- *processHousehold*
- *processCSHousehold*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getHousehold

Retrieves the household based on the primary key identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
PartyId	long	Party identifier.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Household*	Household that matches the inbound key attributes.

createHousehold

Creates a household and its primary address (optional).

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
household	*Sales Cloud Household*	Household to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/salesParties/householdService/}HouseholdResult	Created household.

updateHousehold

Updates a household and primary address. When updating the primary address information it is not necessary to include the primary or alternate keys for the primary address. There is a one-to-one correspondence between the account and primary address. If the alternate keys SourceSystem and SourceSystemReferenceValue in the primary address are specified and they do not match the values in the existing primary address, then a new SourceSystem/SourceSystemReferenceValue gets created for the existing primary address.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
household	*Sales Cloud Household*	Household to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/salesParties/householdService/}HouseholdResult	Updated household.

deleteHousehold

Deletes a household and the relationship between the household and address objects indicating the address is a primary address. The address object cannot be deleted using this operation. To delete the address, use the Sales Cloud Address service.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
household	*Sales Cloud Household*	Household to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	Not applicable.

mergeHousehold

Performs a merge on the household. It will perform an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
household	*Sales Cloud Household*	Household to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/crmCommon/salesParties/householdService/}HouseholdResult	Merged household.

findHousehold

Finds a list of households based on matching the supplied criteria pertaining to the object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, etc.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Method not currently used.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Household*	A list of household that satisfy the inbound criteria.

processHousehold

Performs a create, update, delete, or merge operation on a list of household rows. The specified operation is applied to all objects in the given list.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action shall be performed, such as create, update, merge, or delete.
household	*Sales Cloud Household*	A list of households to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Household*	A list of household that are successfully processed.

processCSHousehold

Performs a create, update, or delete operation on a list of household rows. Different operations may be applied to different objects, depending on what is specified in the ChangeSummary object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	Result of the operation including a list of created/updated data objects, and all warning and informational messages.

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getHousehold	ZCM_VIEW_SALES_GROUP_PRIV	View Sales Group	Allows viewing a sales group
mergeHousehold	ZCM_UPDATE_SALES_GROUP_PRIV	Update Sales Group	Allows updating a sales group
deleteHousehold	ZCM_DELETE_SALES_GROUP_PRIV	Delete Sales Group	Allows deleting sales groups.
processCSHousehold	ZCM_UPDATE_SALES_GROUP_PRIV	Update Sales Group	Allows updating a sales group
processCSHousehold	ZCM_CREATE_SALES_GROUP_PRIV	Create Sales Group	Allows creating a sales group
processCSHousehold	ZCM_DELETE_SALES_GROUP_PRIV	Delete Sales Group	Allows deleting sales groups.
processHousehold	ZCM_UPDATE_SALES_GROUP_PRIV	Update Sales Group	Allows updating a sales group
processHousehold	ZCM_CREATE_SALES_GROUP_PRIV	Create Sales Group	Allows creating a sales group
processHousehold	ZCM_DELETE_SALES_GROUP_PRIV	Delete Sales Group	Allows deleting sales groups.
findHousehold	ZCM_VIEW_SALES_GROUP_PRIV	View Sales Group	Allows viewing a sales group
createHousehold	ZCM_CREATE_SALES_GROUP_PRIV	Create Sales Group	Allows creating a sales group
updateHousehold	ZCM_UPDATE_SALES_GROUP_PRIV	Update Sales Group	Allows updating a sales group

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_UPDATE_SALES_GROUP_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_UPDATE_SALES_GROUP_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_UPDATE_SALES_GROUP_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_UPDATE_SALES_GROUP_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_DELETE_SALES_GROUP_PRIV	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ZCM_CREATE_SALES_GROUP_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_CREATE_SALES_GROUP_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_CREATE_SALES_GROUP_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			has limited access to customers and contacts.
ZCM_CREATE_SALES_GROUP_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_GROUP_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_VIEW_SALES_GROUP_PRIV	ORA_SVC_CASE_SUPERVISION	Case Supervision	Supervises and manages caseworkers, assists caseworkers with any complex issues, handles case approvals and escalations, coordinates care and benefits with external service providers, assigns or reassigns cases to caseworkers, conducts evaluations of benefits programs and provides feedback.
ZCM_VIEW_SALES_GROUP_PRIV	ORA_SVC_CASE_ADMINISTRATOR	Case Administrator	Administers all aspects of Case Management.
ZCM_VIEW_SALES_GROUP_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_GROUP_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCM_VIEW_SALES_GROUP_PRIV	ORA_SVC_CASE_EXECUTION	Case Execution	Assists clients who are applying for benefits, opens cases and manages all tasks associated to the case, processes clients applications, evaluate clients needs for benefits, counsels benefits recipients, performs assessments of clients strengths and needs to develop benefit plans, performs follow-

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			up with clients to ensure they are working on their tasks.
ZCM_VIEW_SALES_GROUP_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Sales Cloud Household

An object that includes attributes used to store values while creating or updating a household. A household is a group that has a relationship with either an account or a contact.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/householdService/}Household

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Cloud Primary Address*
Contains	*Sales Team Member*
Contains	*Note*
Handled by	*Sales Cloud Household*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddressElementAttribute1	string	Additional address element to support flexible address format
AddressElementAttribute2	string	Additional address element to support flexible address format
AddressElementAttribute3	string	Additional address element to support flexible address format

Name	Type	Description
AddressElementAttribute4	string	Additional address element to support flexible address format
AddressElementAttribute5	string	Additional address element to support flexible address format
AddressLine1	string	First line of address.
AddressLine2	string	Second line of address.
AddressLine3	string	Third line of address.
AddressLine4	string	Fourth line of address.
AddressLinesPhonetic	string	Phonetic or Kana representation of the Kanji address lines (used in Japan)
AddressNumber	string	Alternate unique identifier for the address. One of AddressId, AddressNumber or SourceSystem and SourceSystemReferenceValue keys is used to identify the address record during update. If not specified, then it is automatically generated. Prefix defined as in profile option ZCA_PUID_PREFIX concatenated with an internally generated unique sequence number.
AddressType	string	Additional information as type of address like BillTo, ShipTo.
AnnualIncome	long	The annual income of the household. If not provided, then the value is NULL.
AssignmentExceptionFlag	boolean	Indicates whether the sales account had the required dimensions to allow assignment manager to assign territories to the sales account. Possible values are True or False.
AverageAge	long	The average age of the members of the household.
Building	string	Specific building name or number at a given address.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.

Name	Type	Description
CertificationReasonCode	string	The reason for the household current certification level assignment. A list of valid certification reason codes are defined using the lookup HZ_PARTY_CERT_REASON. Review and update the codes using the Setup and Maintenance task, Manage Trading Community Common Lookups.
Child0to6Number	long	The number of children in the household less than 6 years of age.
Child13to18Number	long	The number of children in the household between the age of 13 and 18.
Child7to12Number	long	The number of children in the household between the age of 7 and 12.
City	string	The city element of address.
ClassificationCategory	string	A valid classification category code for the household which will be marked as primary and is defined by an admin.
ClassificationCode	string	A valid classification code corresponding to the classification category and which will be marked as primary.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	Country code of the address.
County	string	County element of address.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.

Name	Type	Description
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
DependentsNumber	long	The number of dependents in the household.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	Indicates the preferred format for email, such as HTML or ASCII.
ExistingCustomerFlag	boolean	Indicates whether there is an existing selling or billing relationship with the sales account. If the value is True, then there is an existing relationship with the sales account. The default value is False.
ExistingCustomerFlagLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the ExistingCustomerFlag was last modified. It is internally populated by the application.
FavoriteHouseholdFlag	boolean	Indicator to determine if a household is a favorite.
FloorNumber	string	The specific floor number at a given address or in a particular building when the building number is provided.
FormattedPhoneNumber	string	The formatted phone number.
HouseholdName	string	The unique identification number for this party. Data stored in this attribute comes from PARTY_NUMBER in HZ_PARTIES.
HouseholdSize	long	The size of the household or group.
LastAssignmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the sales account territory assignment was last run by assignment manager.
LastAssignmentDateTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time during which the sales account territory assignment was last run by assignment manager.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Mailstop	string	A user-defined code to indicate a mail drop point within their organization
MedianAge	long	The median age of the members of the household.
NamedFlag	boolean	Indicates whether a sales account is a named sales account. Possible values are True or False. If the value is True, then the sales account is a named sales account.
Note	*Note*	The note about the household.
OwnerEmailAddress	string	The email address of valid employee resource that owns and manages the sales account. To assign an owner to the sales account, you can either provide owner's party ID, PartyNumber, or Email Address.
OwnerName	string	The name of a valid employee resource who owns and manages the sales account.
OwnerPartyId	long	The unique identifier of a valid employee resource who owns and manages the sales account. To assign an owner to the sales account, you must provide either owner's party identifier, party number, or email address.
OwnerPartyNumber	string	Party number of a valid employee resource who owns and manages the sales account. To assign an owner to the sales account, you can either provide owner's party ID, PartyNumber, or Email Address.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyNumber	string	The unique identification number for the party.
PartyStatus	string	The status of the household. This is an internal column and you are not expected to pass in a value. A list of valid statuses are defined in the lookup HZ_STATUS. Review and update

Name	Type	Description
		the codes using the Setup and Maintenance task, Manage Trading Community Common Lookups.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The additional number addressed after initial connection to an internal telephone system.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PostalCode	string	The postal code as defined by the formal countrywide postal system.
PostalPlus4Code	string	Four digit extension to the United States Postal ZIP code.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PrimaryAddress	*Sales Cloud Primary Address*	The primary address of the household. Address attributes of the household are grouped under a PrimaryAddress entity for clarity.
PrimaryContactEmail	string	The email address of the primary contact.
PrimaryContactName	string	The name of the primary contact.
PrimaryContactPartyId	long	The unique identifier of the primary contact. To specify the contact for a household, you can provide Contact's party ID, PartyNumber, or a combination of SourceSystem and SourceSystemReference.

Name	Type	Description
PrimaryContactPartyNumber	string	The party number of the primary contact. To specify the contact for a household, you can either provide Contact's party ID, PartyNumber, or a combination of SourceSystem and SourceSystemReference.
PrimaryContactPhone	string	The phone number of the primary contact.
PrimaryContactSourceSystem	string	The source system of the primary contact. To specify the contact for a household, you can either provide Contact's party ID, PartyNumber, or a combination of SourceSystem and SourceSystemReference.
PrimaryContactSourceSystemReferenceValue	string	The source system reference of the primary contact. To specify the contact for a household, you can either provide Contact's party ID, PartyNumber, or a combination of SourceSystem and SourceSystemReference.
Province	string	The province element of address.
RawPhoneNumber	string	The unformatted phone number information.
RecordSet	string	The selected record set under which the search results are displayed.
SalesProfileStatus	string	A valid user-defined status of the sales account that this household belongs to.
SalesTeamMember	*Sales Team Member*	The sales team member who is associated to a sales account.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
State	string	The state element of address.
Type	string	The household party type that defines whether the household is a sales account or a prospect or any other user-defined party type as specified using the lookup type ZCA_ HOUSEHOLD _TYPE. It is defaulted to ZCA_CUSTOMER if no value is provided. Possible values are CUSTOMER or PROSPECT. A list of valid values is defined in the lookup ZCA_HOUSEHOLD_TYPE. Review and update

Name	Type	Description
		the codes using the Setup and Maintenance work area, Manage Standard Lookups task.
UniqueNameSuffix	string	The suffix used to generate the attribute PartyUniqueName. The suffix is concatenated to the householdName attribute to generate the PartyUniqueName. The primary address is defaulted as the suffix.
UpdateFlag	boolean	This flag controls if the user has access to update the record.
WealthAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The household's wealth amount or net worth. The value is NULL if not given.

Note

The object that captures comments, information, or instructions for an Oracle Fusion Applications business object.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/noteService}Note

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note Descriptive Flexfields*
Contained by	*Objective*
Contained by	*Opportunity*
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Contained by	*Activity*
Contained by	*Sales Competitor*

Relationship Type	Object or Service
Contained by	*Sales Lead*
Contained by	*Business Plan*
Contained by	*Program Enrollments*
Contained by	*Reference*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).

Name	Type	Description
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreatorPartyId	long	This is the party identifier for the note creator.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteFlag	boolean	Indicates whether the user has access to delete the note.
Dff	*Note Descriptive Flexfields*	The descriptive flex field segment.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record
NoteAttributeCategory	string	The contextual flex field for development usage.
NoteAttributeUid1	string	The flex field for development usage.
NoteAttributeUid2	string	The flex field for development usage.
NoteAttributeUid3	string	The flex field for development usage.
NoteAttributeUid4	string	The flex field for development usage.
NoteAttributeUid5	string	The flex field for development usage.
NoteId	long	The unique identifier of the note.

Name	Type	Description
		• Primary Key
NoteNumber	string	The alternate unique identifier of the note. A user key that is system generated or from an external system.
NoteTitle	string	The title of the note entered by the user.
NoteTxt	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	This is the column that stores the actual note text.
NoteTypeCode	string	This is the note type code for categorization of note.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
SourceObjectCode	string	This is the source_object_code for the source object as defined in OBJECTS Metadata.
SourceObjectId	string	This is the source_object_Uid for the source object such as Activities, Opportunities, and so on defined in OBJECTS metadata.
UpdateFlag	boolean	Indicates whether the user can update the note.
VisibilityCode	string	This is the attribute to specify the visibility level of the note.

Note Descriptive Flexfields

The descriptive flex field that captures additional information for notes, such as a priority or status.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/flex/noteDff/}NoteDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Note*

Relationship Type	Object or Service
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
NoteId	long	The unique identifier of the note. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Sales Cloud Primary Address

An object that includes attributes used to store values while creating or updating a primary address. A primary address is the default communication address of an entity irrespective of the address purpose.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/commonService/}PrimaryAddress

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Cloud Household*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddressElementAttribute1	string	Additional address element to support flexible address format.
AddressElementAttribute2	string	Additional address element to support flexible address format.
AddressElementAttribute3	string	Additional address element to support flexible address format.
AddressElementAttribute4	string	Additional address element to support flexible address format.

Name	Type	Description
AddressElementAttribute5	string	Additional address element to support flexible address format.
AddressId	long	First line for address. • Primary Key
AddressLine1	string	Second line for address.
AddressLine2	string	Third line for address.
AddressLine3	string	Fourth line for address.
AddressLine4	string	Address internal unique identifier that is internally generated during create. One of AddressId, AddressNumber or SourceSystem and SourceSystemReferenceValue keys is used to identify the address record during update.
AddressLinesPhonetic	string	Phonetic or Kana representation of the Kanji address lines (used in Japan).
AddressNumber	string	Alternate unique identifier for the address. One of AddressId, AddressNumber or SourceSystem and SourceSystemReferenceValue keys is used to identify the address record during update. If not specified, then it is automatically generated. Prefix defined as in profile option ZCA_PUID_PREFIX concatenated with an internally generated unique sequence number.
Building	string	Specific building name or number at a given address.
City	string	The name of the city.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date the address was last validated.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
Description	string	The free text description of the record.
FloorNumber	string	Specific floor number at a given address or in a particular building when building number is provided.
FormattedAddress	string	Formatted address information.
FormattedMultiLineAddress	string	Formatted multiple line address information.
HouseType	string	Indicates the building type. A list of valid values is defined in the lookup HZ_HOUSE_TYPE. Review and update the codes using the Setup and Maintenance work area, Manage Standard Lookups task.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	Used to store latitude information for the location for spatial proximity and containment purposes.
LocationDirections	string	Directions to the location.

Name	Type	Description
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
Longitude	decimal	Used to store longitude Information for the location for spatial proximity and containment purposes.
Mailstop	string	A user-defined code to indicate a mail drop point within their organization.
PartyId	long	The unique identifier of the contact party.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	Four digit extension to the United States Postal ZIP code.
Province	string	The name of the province.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
State	string	The name of the state.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	Standardized status code describing the results of the validation.

Sales Team Member

An object representing a resource party that is assigned to a sales account team and has a defined access role for the sales account.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/commonService/}SalesTeamMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Cloud Household*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	The access level determines the type of access granted to the resource as well as managers of the organizations. The possible values are contained in the ZCA_ACCESS_LEVEL lookup.
AssignmentTypeCode	string	The code indicating how the resource is assigned to the sales account team. The possible values are contained in the ZCA_ASSIGNMENT_TYPE lookup.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
LockAssignmentFlag	boolean	The flag indicates automatic territory assignment cannot remove the sales account team resource when this flag is 'Y'. When a sales account team member is added manually, this flag is defaulted to 'Y'.
MemberFunctionCode	string	The lookup code indicating a sales account resource's role on the resource team such as Integrator, Executive Sponsor and Technical Account Manager. The code lookup is stored in FND_LOOKUPS.
ResourceEmailAddress	string	Unique identifier for the resource.
ResourceId	long	The unique identifier of the resource.
ResourceName	string	The name of the sales team member.
ResourceOrgName	string	The name of the resource organization of the sales team member.
ResourcePartyNumber	string	Unique identifier for the resource.
ResourcePhoneNumber	string	The formatted primary phone number of the sales team member.
ResourceRoleName	string	The list of roles for a sales team member.
SalesProfileId	long	The identifier for the sales account.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
TeamMemberId	long	The surrogate primary key for the member of the sales account resource team. • Primary Key
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Cloud Relationship

The service used to create, update, retrieve, and delete relationships. Accounts, contacts and household could have various types of predefined relationships within Oracle Sales Cloud. A contact can have a contact relationship with an account or household while it could also be a member of a household. Other such relationships could exist between two contacts or between two accounts or households. This service is used to manage all such relationships between two parties.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/relationshipService/}RelationshipService

Service WSDL URL: https://servername/crmService/SalesPartiesRelationshipService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Account
- CRM : Trading Community Model : Account
- CRM : Trading Community Model : Account

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Relationship*

Operations

- *createRelationship*
- *updateRelationship*
- *deleteRelationship*
- *mergeRelationship*
- *findRelationship*
- *processRelationship*
- *processCSRelationship*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

createRelationship

An operation to create a relationship.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
relationship	*Sales Cloud Relationship*	The operation for the relationship to be created.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Relationship*	The operation that returns create relationship.

updateRelationship

The operation to update relationship.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
relationship	*Sales Cloud Relationship*	The operation to update relationship.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Relationship*	The parameter that returns updated relationship.

deleteRelationship

The operation that deletes a relationship.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
relationship	*Sales Cloud Relationship*	The operation for the relationship to be deleted.

Response Payload

Element Name	Type	Description
result	void	Not applicable.

mergeRelationship

The merge operation for relationship. It will perform an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
relationship	*Sales Cloud Relationship*	The operation for the relationship to be merged.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Relationship*	The operation returns merged relationship.

findRelationship

An operation to find a list of relationships based matching the supplied criteria pertaining to the object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Relationship*	A list of relationship that satisfy the inbound criteria.

processRelationship

The operation that performs a create, update, delete, or merge operation on a list of relationship rows. The specified operation is applied to all objects in the given list.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The operation that indicates what action, such as create, update, merge, or delete, will be performed.
relationship	*Sales Cloud Relationship*	The list of relationships to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The operation to control your bulk upload behavior. For example, whether the valid data will be committed if there are other invalid data in the same batch and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Sales Cloud Relationship*	The operation that returns the list of relationships that are successfully processed.

processCSRelationship

The operation that performs create, update, or delete on a list of relationship rows. Different operations may be applied to different objects, depending on what is specified in the change summary object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The operation to control your bulk upload behavior. For example, whether the valid data will be committed if there are other invalid data in the same batch and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation including a list of created or updated data objects, and all warning and informational messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The locale name is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
findRelationship	ZCM_VIEW_SALES_PARTY_RELATIONSHIP_PRIV	View Sales Party Relationship	Allows viewing a sales party relationships to other parties.
processCSRelationship	ZCM_DELETE_SALES_PARTY_RELATIONSHIP_PRIV	Delete Sales Party Relationship	Allows deleting sales party relationships to other parties.
processCSRelationship	ZCM_CREATE_SALES_PARTY_RELATIONSHIP_PRIV	Create Sales Party Relationship	Allows creating sales party relationships to other parties.
processCSRelationship	ZCM_UPDATE_SALES_PARTY_RELATIONSHIP_PRIV	Update Sales Party Relationship	Allows updating a sales party relationships to other parties.
deleteRelationship	ZCM_DELETE_SALES_PARTY_RELATIONSHIP_PRIV	Delete Sales Party Relationship	Allows deleting sales party relationships to other parties.
updateRelationship	ZCM_UPDATE_SALES_PARTY_RELATIONSHIP_PRIV	Update Sales Party Relationship	Allows updating a sales party relationships to other parties.
createRelationship	ZCM_CREATE_SALES_PARTY_RELATIONSHIP_PRIV	Create Sales Party Relationship	Allows creating sales party relationships to other parties.
mergeRelationship	ZCM_UPDATE_SALES_PARTY_RELATIONSHIP_PRIV	Update Sales Party Relationship	Allows updating a sales party relationships to other parties.
processRelationship	ZCM_DELETE_SALES_PARTY_RELATIONSHIP_PRIV	Delete Sales Party Relationship	Allows deleting sales party relationships to other parties.
processRelationship	ZCM_CREATE_SALES_PARTY_RELATIONSHIP_PRIV	Create Sales Party Relationship	Allows creating sales party relationships to other parties.
processRelationship	ZCM_UPDATE_SALES_PARTY_RELATIONSHIP_PRIV	Update Sales Party Relationship	Allows updating a sales party relationships to other parties.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_VIEW_SALES_PARTY_RELATIONSHIP_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_VIEW_SALES_PARTY_RELATIONSHIP_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			of appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_PARTY_RELATIONSHIP_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCM_CREATE_SALES_PARTY_RELATIONSHIP_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_CREATE_SALES_PARTY_RELATIONSHIP_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_CREATE_SALES_PARTY_RELATIONSHIP_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_UPDATE_SALES_PARTY_RELATIONSHIP_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_UPDATE_SALES_PARTY_RELATIONSHIP_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_DELETE_SALES_PARTY_RELATIONSHIP_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			of appointments, interactions, and customer contacts.
ZCM_DELETE_SALES_PARTY_RELATIONSHIP_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Sales Cloud Relationship

An object that includes attributes used to store values while creating or updating a relationship. This object stores attributes that defines and categorizes a relationship between 2 entities such as account, contact and household.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/relationshipService/}Relationship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Sales Cloud Relationship*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectPartyId	long	The primary key identifier of the object in this relationship. Either one of ObjectPartyId, ObjectPartyNumber, and combination of ObjectSourceSystem and ObjectSourceSystemReferenceValue, is used to identify the object party of the relationship.
ObjectPartyNumber	string	The unique identification number for the object party of the relationship. One of ObjectPartyId, ObjectPartyNumber, and a combination of ObjectSourceSystem and ObjectSourceSystemReferenceValue, is used to identify the object party of the relationship.

Name	Type	Description
ObjectSourceSystem	string	The name of external source system for the object party in the relationship, which are defined by an admin as part of system setup. One of ObjectPartyId, ObjectPartyNumber, and a combination of ObjectSourceSystem and ObjectSourceSystemReferenceValue, is used to identify the object party of the relationship. The value for this attribute should be predefined in the lookup type HZ_ORIG_SYSTEMS_VL using the setup task, Manage Trading Community Source Systems.
ObjectSourceSystemReferenceValue	string	The identifier for the object party in the relationship from external source system. One of ObjectPartyId, ObjectPartyNumber, and a combination of ObjectSourceSystem and ObjectSourceSystemReferenceValue, is used to identify the object party of the relationship.
RelationshipCode	string	Indicates whether this is a forward or a backward relationship code. A list of valid relationship codes is defined in the lookup PARTY_RELATIONS_TYPE. Review and update the codes using the Setup and Maintenance task, Manage Relationship Lookups.
RelationshipSourceSystem	string	The name of external source system for the relationship, which is defined by an admin as part of the system setup.
RelationshipSourceSystemReferenceValue	string	The identifier for the relationship with the external source system.
RelationshipType	string	The relationship type name. For example, CUSTOMER_SUPPLIER. A list of valid relationship types is defined in the lookup HZ_RELATIONSHIP_TYPE. Review and update the codes using the Setup and Maintenance task, Manage Relationship Lookups.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
SubjectPartyId	long	The primary key identifier of the subject in this relationship. Either one of SubjectPartyId, SubjectPartyNumber, and a combination of SubjectSourceSystem and SubjectSourceSystemReferenceValue, is used to identify the subject party of the relationship.

Name	Type	Description
SubjectPartyNumber	string	The alternate key identifier for the subject party of the relationship. One of SubjectPartyId, SubjectPartyNumber, and a combination of SubjectSourceSystem and SubjectSourceSystemReferenceValue, is used to identify the subject party of the relationship.
SubjectSourceSystem	string	The name of external source system for the subject party in the relationship, which are defined by an admin as part of system setup. One of SubjectPartyId, SubjectPartyNumber, and a combination of SubjectSourceSystem and SubjectSourceSystemReferenceValue, is used to identify the subject party of the relationship. The value for this attribute should be predefined in the lookup type HZ_ORIG_SYSTEMS_VL using the setup task, Manage Trading Community Source Systems.
SubjectSourceSystemReferenceValue	string	The identifier for the subject party in the relationship from external source system. One of SubjectPartyId, SubjectPartyNumber, and a combination of SubjectSourceSystem and SubjectSourceSystemReferenceValue, is used to identify the subject party of the relationship.

Sales Competitor Service

Service to operate on competitors. The supported operations are create, update, get, and find. Competitors are organizations that compete with the deploying organizations in sales situations.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/sales/baseSales/competitors/competitorService/}CompetitorService

Service WSDL URL: https://servername/crmService/CompetitorService?WSDL

Logical Business Objects

- CRM : Sales : Sales Competitor

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Sales Competitor*

Relationship Type	Object or Service
Handles	*Source System Reference*
Handles	*Sales Competitor SWOT Translation SDO*
Handles	*Sales Competitor SWOT*
Handles	*Classification Assignment*
Handles	*Trading Community Original System Mapping Identifier Additional Information*
Handles	*Note Descriptive Flexfields*
Handles	*Note*

Operations

- *getCompetitor*
- *createCompetitor*
- *updateCompetitor*
- *deleteCompetitor*
- *mergeCompetitor*
- *findCompetitor*
- *processCompetitor*
- *processCSCompetitor*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getCompetitor

A web service method of Get operation for Sales Competitor.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	The system generated identifier for this Competitor Party.

Response Payload

Element Name	Type	Description
result	*Sales Competitor*	The parameter returns the Sales Competitor that matches the inbound key attributes.

createCompetitor

Create operation for Sales Competitor, PartyId is a mandatory attribute.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
competitor	*Sales Competitor*	The parameter for the Sales Competitor to be created for the method createCompetitor.

Response Payload

Element Name	Type	Description
result	*Sales Competitor*	The parameter returns the created Sales Competitor.

updateCompetitor

A web service method of Update operation for Sales Competitor.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
competitor	*Sales Competitor*	The parameter for the Sales Competitor to be updated.

Response Payload

Element Name	Type	Description
result	*Sales Competitor*	The parameter returns the updated Sales Competitor.

Element Name	Type	Description

deleteCompetitor

A web service method of Delete operation for Sales Competitor.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
competitor	*Sales Competitor*	The parameter for the Sales Competitor to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter returns the deleted Sales Competitor.

mergeCompetitor

A web service method of Merge operation for Sales Competitor. It performs an update if the object exists or an insert if the object does not already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
competitor	*Sales Competitor*	The parameter for the Sales Competitor to be merged.

Response Payload

Element Name	Type	Description
result	*Sales Competitor*	The parameter returns the merged Sales Competitor.

findCompetitor

A web service method of Find operation for Sales Competitor.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findCompetitor.

Response Payload

Element Name	Type	Description
result	*Sales Competitor*	The parameter returns a list of Sales Competitor that satisfies the inbound criteria.

processCompetitor

A web service method of Bulk load operation for Sales Competitor.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The parameter indicates what action shall be performed, such as create, update, merge, or delete.
competitor	*Sales Competitor*	The parameter provides a list of Sales Competitors to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter which controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains only the key attributes or the full object.

Response Payload

Element Name	Type	Description
result	*Sales Competitor*	The parameter returns a list of Sales Competitor that is successfully processed.

processCSCompetitor

An operation to apply the changes back to the data source for Sales Competitor.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter which controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains only the key attributes or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The parameter returns the result of the operation including a list of created/updated data objects, and all warning and informational messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create,

Element Name	Type	Description
		update, merge, and delete operations can be performed on the object. A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getEntityList	ZBS_MANAGE_SALES_COMPETITOR_PRIV	Manage Sales Competitor	Allows management of competitors in the application.
getCompetitor	ZBS_VIEW_SALES_COMPETITOR_PRIV	View Sales Competitor	Allows viewing of pages displaying sales competitor information, such as the competitor profile.
deleteCompetitor	ZBS_MANAGE_SALES_COMPETITOR_PRIV	Manage Sales Competitor	Allows management of competitors in the application.
processCompetitor	ZBS_VIEW_SALES_COMPETITOR_PRIV	View Sales Competitor	Allows viewing of pages displaying sales competitor information, such as the competitor profile.
mergeCompetitor	ZBS_MANAGE_SALES_COMPETITOR_PRIV	Manage Sales Competitor	Allows management of competitors in the application.
updateCompetitor	ZBS_MANAGE_SALES_COMPETITOR_PRIV	Manage Sales Competitor	Allows management of competitors in the application.
processCSCompetitor	ZBS_VIEW_SALES_COMPETITOR_PRIV	View Sales Competitor	Allows viewing of pages displaying sales competitor information, such as the competitor profile.
findCompetitor	ZBS_VIEW_SALES_COMPETITOR_PRIV	View Sales Competitor	Allows viewing of pages displaying sales competitor information, such as the competitor profile.
getDfltObjAttrHints	ZBS_MANAGE_SALES_COMPETITOR_PRIV	Manage Sales Competitor	Allows management of competitors in the application.

Operation Name	Privilege Code	Privilege Name	Privilege Description
createCompetitor	ZBS_MANAGE_SALES_COMPETITOR_PRIV	Manage Sales Competitor	Allows management of competitors in the application.
getServiceLastUpdateTime	ZBS_MANAGE_SALES_COMPETITOR_PRIV	Manage Sales Competitor	Allows management of competitors in the application.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZBS_VIEW_SALES_COMPETITOR_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZBS_VIEW_SALES_COMPETITOR_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZBS_VIEW_SALES_COMPETITOR_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZBS_VIEW_SALES_COMPETITOR_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZBS_VIEW_SALES_COMPETITOR_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZBS_VIEW_SALES_COMPETITOR_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZBS_VIEW_SALES_COMPETITOR_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZBS_VIEW_SALES_COMPETITOR_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZBS_VIEW_SALES_COMPETITOR_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZBS_MANAGE_SALES_COMPETITOR_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			sufficient information to assignee to create contract.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_READ_ONLY_DUTY	Lead Registration Processing Read Only	Read Only role for Lead Registration Processing Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_READ_ONLY_DUTY	Personal Campaign Management Read Only	Read Only role for Personal Campaign Management Duty.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_READ_ONLY_DUTY	Product Recommendation Analysis Read Only	Read Only role for Product Recommendation Analysis Duty

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			information and managing forecasts on behalf of other users.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_READ_ONLY_DUTY	Sales Forecasting Management Read Only	Read Only role for Sales Forecasting Management Duty.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_READ_ONLY_DUTY	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_READ_ONLY_DUTY	Territory Management Read Only	Read Only role for Territory Management Duty.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Classification Assignment

The classification code assigned to a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CodeAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Sales Competitor*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Reference*
Handled by	*Sales Reference Customer*
Handled by	*Company and User Registration*
Handled by	*Sales Party*
Handled by	*Sales Competitor Service*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party Territory service*
Handled by	*Sales Party Resource Service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassCategory	string	The name of the classification category.
ClassCode	string	The code of the classification.
CodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an object. It is primary key and system generated. • Primary Key
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableKey1	string	The first column of the alphanumeric or multi-part foreign key.

Name	Type	Description
OwnerTableKey2	string	The second column of the alphanumeric or multi-part foreign key.
OwnerTableKey3	string	The third column of the alphanumeric or multi-part foreign key.
OwnerTableKey4	string	The fourth column of the alphanumeric or multi-part foreign key.
OwnerTableKey5	string	The fifth column of the alphanumeric or multi-part foreign key.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PrimaryFlag	boolean	Indicator that specifies if this is the primary class code of a class category for the organization. Y stands for the primary class code and N stands for all others.
Rank	decimal	Ranks classes if multiple classes are assigned to a party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Note

The object that captures comments, information, or instructions for an Oracle Fusion Applications business object.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/noteService}Note

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note Descriptive Flexfields*
Contained by	*Objective*
Contained by	*Opportunity*
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Contained by	*Activity*
Contained by	*Sales Competitor*
Contained by	*Sales Lead*
Contained by	*Business Plan*
Contained by	*Program Enrollments*
Contained by	*Reference*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*

Relationship Type	Object or Service
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreatorPartyId	long	This is the party identifier for the note creator.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteFlag	boolean	Indicates whether the user has access to delete the note.
Dff	*Note Descriptive Flexfields*	The descriptive flex field segment.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record

Name	Type	Description
NoteAttributeCategory	string	The contextual flex field for development usage.
NoteAttributeUid1	string	The flex field for development usage.
NoteAttributeUid2	string	The flex field for development usage.
NoteAttributeUid3	string	The flex field for development usage.
NoteAttributeUid4	string	The flex field for development usage.
NoteAttributeUid5	string	The flex field for development usage.
NoteId	long	The unique identifier of the note. • Primary Key
NoteNumber	string	The alternate unique identifier of the note. A user key that is system generated or from an external system.
NoteTitle	string	The title of the note entered by the user.
NoteTxt	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	This is the column that stores the actual note text.
NoteTypeCode	string	This is the note type code for categorization of note.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
SourceObjectCode	string	This is the source_object_code for the source object as defined in OBJECTS Metadata.
SourceObjectId	string	This is the source_object_Uid for the source object such as Activities, Opportunities, and so on defined in OBJECTS metadata.
UpdateFlag	boolean	Indicates whether the user can update the note.
VisibilityCode	string	This is the attribute to specify the visibility level of the note.

Note Descriptive Flexfields

The descriptive flex field that captures additional information for notes, such as a priority or status.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/flex/noteDff/}NoteDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Note*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
NoteId	long	The unique identifier of the note. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Sales Competitor

The competitor is an organization that competes with the deploying organization in sales situations. This includes additional competitor attributes such as SWOT, products sold by competitors and their mappings to the deploying organization's products, details of win/loss reasons, and associations to competitive literature.

QName: {http://xmlns.oracle.com/apps/sales/baseSales/competitors/competitorService/}Competitor

Logical Business Objects

- CRM : Sales : Sales Competitor

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Competitor SWOT*
Contains	*Classification Assignment*
Contains	*Note*
Handled by	*Sales Competitor Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AnnualRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The attribute that indicates the competitor company's annual revenue.
CodeAssignment	*Classification Assignment*	The classification code assigned to a trading community member.
CompetitorSwotVO	*Sales Competitor SWOT*	The strengths, weaknesses, opportunities, and threats of a competitor.
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteFlag	boolean	Indicates whether the logged in user has access to delete the Competitor. It will always be false since Competitors cannot be deleted.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
NoteVO	*Note*	A note data object that captures comments, information, or instructions for an Oracle Fusion Applications business object.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.

Name	Type	Description
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
RssViewerURL	string	The URL for the competitor RSS viewer.
SICCode	string	The standard industry classification (SIC) code.
StatusCode	string	The pre-defined code used to indicate the status.
ThreatLevelCode	string	The level of threat the competitor provides when competing against the competitor for a deal.
TradingPartnerIdentifier	string	The column to store the FSIO related trading partner codes. This column will store alpha numeric values. This column will also take care of the "Fed vs. Non-Fed" attribute requirement.
URL	string	The destination URL associated with a specific Google AdWords ad.
UpdateFlag	boolean	Indicates whether the logged in user has access to update the Competitor. It will be true or false based on the user's Data Security privileges.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Competitor SWOT

The strengths, weaknesses, opportunities, and threats of a competitor.

QName: {http://xmlns.oracle.com/apps/sales/baseSales/competitors/competitorService/}CompetitorSwot

Logical Business Objects

- CRM : Sales : Sales Competitor

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Competitor SWOT Translation*
Contained by	*Sales Competitor*
Handled by	*Sales Competitor Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CompetitorSwotTranslation	*Sales Competitor SWOT Translation*	The attribute for list of translated competitor SWOT.
CompttrSWOTId	long	The competitor SWOT identifier. • Primary Key
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.

Name	Type	Description
SWOTDescriptionText	string	The attribute for SWOT description.
SWOTTypeCode	string	The attribute for SWOT type indicator.

Sales Competitor SWOT Translation

The translated SWOT, strengths, weaknesses, opportunities, and threats, of a competitor.

QName: {http://xmlns.oracle.com/apps/sales/baseSales/competitors/competitorService/}CompetitorSwotTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Competitor SWOT*
Handled by	*Sales Competitor Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CompttrSWOTId	long	The identifier for a SWOT attribute within competitor. • Primary Key
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
Language	string	The translated language for the translation service data object. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
SWOTDescriptionText	string	The description of the sales competitor SWOT entry.
SourceLang	string	The source language for the Sales Competitor SWOT entry.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*
Contained by	*Location Details*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Contact Preference*
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*
Contained by	*Trading Community Address Purpose*
Contained by	*Telex*
Contained by	*Phone*
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*
Contained by	*Trading Community Person Details*
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*
Contained by	*Trading Community Customer Account Site Use*
Contained by	*Relationship*

Relationship Type	Object or Service
Contained by	*Electronic Data Interchange*
Contained by	*Trading Community Customer Account or Site Role*
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Relationship Type	Object or Service
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key

Name	Type	Description
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*

Relationship Type	Object or Service
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key

Name	Type	Description
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Sales Custom Business Object (Deprecated)

Service to operate on custom business objects created in the Oracle Fusion Sales application. The supported operations are create, update, delete, and find. A custom business object stores extended information for an Oracle Fusion business object, for example, related orders for a sales opportunity.

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/sales/custExtn/extnService/}SalesCustomObjectService

Service WSDL URL: https://servername/crmService/SalesCustomObjectService?WSDL

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Custom Business Object*

Operations

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*
- *createEntity*
- *getEntity*
- *updateEntity*
- *deleteEntity*
- *findEntity*

- *mergeEntity*
- *processEntity*

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Retrieves the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

createEntity

Creates records of an Oracle Fusion lead management custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A required input parameter of the createEntity web service method. Includes the attribute values that the records will be created with.
objectName	string	A required input parameter of the createEntity web service method. Use the API name of the custom object you want to create.

Response Payload

Element Name	Type	Description
result	anyType	The return value of the createEntity web service method. Includes the full set of attributes and child entities of the record.

getEntity

Queries by ID a single record of an Oracle Fusion lead management custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
keyValue	string	A required input parameter of the getEntity web service method. Includes the row ID of the record you want to query for.
objectName	string	A required input parameter of the getEntity web service method. Use the API name of the custom object you want to query for.

Response Payload

Element Name	Type	Description
result	anyType	The return value of the getEntity web service method. Includes the full set of attributes and child entities of the record.

updateEntity

Updates a set of records of an Oracle Fusion lead management custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A required input parameter of the updateEntity method. All records matching the IDs specified in this input object are updated with the corresponding input attribute values also specified.
objectName	string	A required input parameter of the updateEntity web service method. Use the API name of the custom object you want to update.

Response Payload

Element Name	Type	Description
result	anyType	

deleteEntity

Deletes a set of records of an Oracle Fusion lead management custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A required input parameter of the deleteEntity web service method. All records matching the input attribute values specified in this input object are deleted.
objectName	string	A required input parameter of the deleteEntity web service method. Use the API name of the custom object you want to delete.

Response Payload

Element Name	Type	Description
result	void	

findEntity

Queries for a set of records of an Oracle Fusion lead management custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findEntity web service method. Includes optional search criteria, sort filter, and attributes to be excluded when returning the set of records. Also includes the option to return any of the custom object's child entities,
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Not applicable
objectName	string	A required input parameter of the findEntity web service method. Use the API name of the custom object you want to query for.

Response Payload

Element Name	Type	Description
result	anyType	The return value of the findEntity web service method. Includes the full set of attributes and child entities of the records.

mergeEntity

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	
objectName	string	

Response Payload

Element Name	Type	Description
result	anyType	

processEntity

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	
object	anyType	
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	
objectName	string	

Response Payload

Element Name	Type	Description
result	anyType	

Custom Business Object

A service to create, update, delete, or find custom business objects created in the Oracle Fusion CRM application. A custom business object stores extended information for an Oracle Fusion business object.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/custom/extnService/}CustomReferenceService

Service WSDL URL: https://servername/crmService/CustomReferenceService?WSDL

Logical Business Objects

- CRM : CRM Application Composer : CRM Extensible Object

Operations

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*
- *invokeObjectFunction*
- *createEntity*
- *getEntity*
- *updateEntity*
- *deleteEntity*
- *findEntity*
- *mergeEntity*
- *processEntity*

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create,

Element Name	Type	Description
		update, merge, and delete operations can be performed on the object.

invokeObjectFunction

invoke custom object row function.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
row	anyType	DataObject used to invoke the script
viewName	string	Custom Object type name
scriptName	string	row function name
params	anyType	row function parameters

Response Payload

Element Name	Type	Description
result	anyType	DataObject

createEntity

Create operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject created for the custom object.

getEntity

Get operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
keyValue	string	A list of key values for identifying the custom object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject identified by the keyValue.

updateEntity

Update operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be updated. The DataObject must include key fields for identifying the updated record, as well as the fields to be updated.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject updated for the custom object.

deleteEntity

Delete operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be deleted. The DataObject must include key fields for identifying the deleted record.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	void	DataObject that is deleted.

findEntity

Find operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	List of DataObjects identified by the findCriteria.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Search control.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObjects found

mergeEntity

merge with existing custom object if exist, create new object if does not exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be merged. The DataObject must include key fields for identifying the record, as well as the fields to be merged.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject result from the merge

processEntity

batch process for custom object operation

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Operation name
object	anyType	DataObjects to be batch processed
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	process control
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject result list

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
processEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea
getEntityList	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
updateEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea
getEntity	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
deleteEntity	ZCX_DELETE_CUSTOM_OBJECT_PRIV	DELETE custom object resources (WorkArea)	PermissionSet to DELETE for custom object WorkArea
findEntity	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
getDfltObjAttrHints	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
createEntity	ZCX_CREATE_CUSTOM_OBJECT_PRIV	CREATE custom object resources (WorkArea)	PermissionSet to CREATE for custom object WorkArea
getServiceLastUpdateTime	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
mergeEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea

Sales Forecast

Service to operate on forecast items. The supported operations are create, update, get, and delete. Forecast items are snapshots of revenues predicted to close within the forecast period.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/sales/salesForecasting/forecasts/forecastService/}ForecastIntegService

Service WSDL URL: https://servername/crmService/ForecastIntegService?WSDL

Logical Business Objects

- CRM : Sales Forecasting
- CRM : Sales Forecasting

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Forecast Item*
Handles	*Forecast Territory Details*

Operations

- *createItem*
- *deleteItem*
- *getForecastItemDetail*
- *updateForecastItemDetail*
- *findForecastItemDetail*
- *getTerritoryForecast*
- *updateTerritoryForecast*
- *findTerritoryForecast*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

createItem

A web service method to create a forecast item from a revenue item.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
revnId	long	The ID of the revenue which needs to be converted to a forecast item.

Response Payload

Element Name	Type	Description
result	void	The parameter returns the created forecast item for the method createItem.

deleteItem

A web service method which deletes a forecast item.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
itemId	long	The ForecastItemId is passed as an input to delete a forecast item.

Response Payload

Element Name	Type	Description
result	void	The parameter returns the deleted forecast item for the method deleteItem.

getForecastItemDetail

A web service method which returns a forecast item object for a given forecast item ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
forecastItemId	long	The ForecastItemId is passed as input to get details on a forecast item.

Response Payload

Element Name	Type	Description
result	*Forecast Item*	The parameter returns a forecast item detail object for the method getForecastItemDetail.

updateForecastItemDetail

Updates the forecast item and synchronizes the underlying revenue attributes.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
forecastItemDetail	*Forecast Item*	The ForecastItemDetail object is passed as input to update a forecast item.

Response Payload

Element Name	Type	Description
result	*Forecast Item*	The parameter returns a forecast item detail object.

findForecastItemDetail

Finds a particular record or set of records based on the criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The parameter to set the criteria to find the set of records.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The filtering condition to separate out the set of records.

Response Payload

Element Name	Type	Description
result	*Forecast Item*	The parameter returns the type of item object for the method findForecastItemDetail.

getTerritoryForecast

A web service method which obtains territory forecast details based on key information.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
forecastParticipantId	long	The system generated unique participant identifier to get territory forecast details.

Response Payload

Element Name	Type	Description
result	*Forecast Territory Details*	The parameter returns the territory forecast details for the method getTerritoryForecast.

updateTerritoryForecast

A web service method to update territory forecast details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryForecast	*Forecast Territory Details*	The input parameter to update territory forecast details.

Response Payload

Element Name	Type	Description
result	*Forecast Territory Details*	The parameter returns the updated territory forecast details for the method updateTerritoryForecast.

findTerritoryForecast

A web service method to find territory forecast based on a set of criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The parameter to set the find criteria for territory forecast.
BindParticipantId	long	The parameter to find territory forecast based on participant ID criteria.
BindFcstHeaderId	long	The parameter to find territory forecast based on header ID criteria.
BindForecastName	string	The parameter to find territory forecast based on forecast name criteria.
BindTerritoryId	long	The parameter to find territory forecast based on territory ID criteria.
BindTerritoryVersionId	long	The parameter to find territory forecast based on territory version ID criteria.
BindOwnerResourceId	string	The parameter to find territory forecast based on owner resource ID criteria.
BindForecastType	string	The parameter to find territory forecast based on forecast type criteria.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The filtering condition to separate out the set of records.

Response Payload

Element Name	Type	Description
result	*Forecast Territory Details*	The parameter returns the output list of values from find service.

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
updateForecastItemDetail	ZSF_MANAGE_SALES_FORECAST_PARTICIPANT_PRIV	Manage Sales Forecast Participant	Allows viewing and submitting of all sales forecasts. Also includes the ability to submit and reject all child territories.
getForecastItemDetail	ZSF_MANAGE_SALES_FORECAST_PARTICIPANT_PRIV	Manage Sales Forecast Participant	Allows viewing and submitting of all sales forecasts. Also includes the ability to submit and reject all child territories.
deleteItem	ZSF_MANAGE_SALES_FORECAST_PARTICIPANT_PRIV	Manage Sales Forecast Participant	Allows viewing and submitting of all sales forecasts. Also includes the ability to submit and reject all child territories.
createItem	ZSF_MANAGE_SALES_FORECAST_PARTICIPANT_PRIV	Manage Sales Forecast Participant	Allows viewing and submitting of all sales forecasts. Also includes the ability to submit and reject all child territories.
updateTerritoryForecast	ZSF_MANAGE_SALES_FORECAST_PARTICIPANT_PRIV	Manage Sales Forecast Participant	Allows viewing and submitting of all sales forecasts. Also includes the ability to submit and reject all child territories.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getTerritoryForecast	ZSF_MANAGE_SALES_FORECAST_PARTICIPANT_PRIV	Manage Sales Forecast Participant	Allows viewing and submitting of all sales forecasts. Also includes the ability to submit and reject all child territories.
findTerritoryForecast	ZSF_MANAGE_SALES_FORECAST_PARTICIPANT_PRIV	Manage Sales Forecast Participant	Allows viewing and submitting of all sales forecasts. Also includes the ability to submit and reject all child territories.
findForecastItemDetail	ZSF_MANAGE_SALES_FORECAST_PARTICIPANT_PRIV	Manage Sales Forecast Participant	Allows viewing and submitting of all sales forecasts. Also includes the ability to submit and reject all child territories.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZSF_MANAGE_SALES_FORECAST_PARTICIPANT_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZSF_MANAGE_SALES_FORECAST_PARTICIPANT_PRIV	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ZSF_MANAGE_SALES_FORECAST_PARTICIPANT_PRIV	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ZSF_MANAGE_SALES_FORECAST_PARTICIPANT_PRIV	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_READ_ONLY_DUTY	Lead Registration Processing Read Only	Read Only role for Lead Registration Processing Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_READ_ONLY_DUTY	Personal Campaign Management Read Only	Read Only role for Personal Campaign Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_READ_ONLY_DUTY	Product Recommendation Analysis Read Only	Read Only role for Product Recommendation Analysis Duty
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_READ_ONLY_DUTY	Sales Forecasting Management Read Only	Read Only role for Sales Forecasting Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_READ_ONLY_DUTY	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_READ_ONLY_DUTY	Territory Management Read Only	Read Only role for Territory Management Duty.

Forecast Item

The forecast item of the forecast territory.

QName: {http://xmlns.oracle.com/apps/sales/salesForecasting/forecasts/forecastService/}ForecastItemDetail

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Sales Forecast*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdjustPeriodId	long	The adjust period ID if there is a adjustment tied to the item.
AdjustedForecast	decimal	The adjusted forecast.
AdjustedQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The adjusted quantity value.
BUOrgId	long	The organization ID of the business unit.
BestCaseAdjustedForecast	decimal	The best case adjusted forecast.
Category	string	Forecast item category denotes whether the forecast item is of type renewal or new.

Name	Type	Description
CloseDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The close date.
CorporateCurrencyCode	string	A corporate currency code set in profile.
CorporateCurrencyRate	decimal	The currency rate in corporate currency.
CorporateUnadjustedDownsideAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The worst case amount in corporate currency.
CorporateUnadjustedRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The revenue amount in corporate currency.
CorporateUnadjustedUpsideAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Best Case amount in corporate currency.
CurrentStageId	long	The current sales stage ID.
CustomerPartyId	long	The customer associated with the revenue.
DownsideAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The worst case amount.
EffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The effective date of the revenue.
ForecastHeaderId	long	The ID that represents a forecast header record key.
ForecastItemId	long	The primary key for a ForecastItem record. • Primary Key
ForecastOverrideCode	string	The forecast override code for criteria.
InventoryItemId	long	The item Id of the product.
InventoryOrgId	long	The inventory organization ID from product schema.
OpportunityId	long	The ID of opportunity that the underlying revenue belongs to.
OpportunityName	string	The name of an opportunity.

Name	Type	Description
OpportunityNumber	string	The opportunity number associated to the opportunity.
OpportunityStatusCode	string	The status of opportunity.
OwnerName	string	The owner name.
OwnerResourceId	long	The ID associated with the revenue owner.
OwnerResourceOrgId	long	The organization ID of revenue owner.
PartEngagementTypeCode	string	A partner engagement type code.
PartnerPartOrgPartyId	long	The party ID of the partner's organization.
PartnerSourceNumber	string	The source number of partner.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PrimaryTerritoryId	long	Primary territory ID of the revenue.
PrimaryTerritoryVersionId	long	Primary territory Version ID of the revenue.
ProductGroupId	long	The group that the product belongs to.
ProductName	string	The product name.
Quantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	Quantity of product making up the revenue.
RecommendedRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The recommended revenue amount.
RecommendedWinProbability	decimal	The likelihood to bug product.
RecurTypeCode	string	A recurring type code.
RevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The revenue amount from the revenue Item.
RevenueAmountCurrencyCode	string	Entered currency code for revenue.

Name	Type	Description
RevenueExpectAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The expected revenue amount.
RevenueId	long	The ID of the revenue that the item belongs to.
RevenueNumber	string	The revenue number of the revenue.
RevenueStatusCode	string	The status of revenue.
RevenueTerritoryId	long	The Territory ID of the revenue.
RevenueTypeCode	string	A type of revenue.
SalesChannelCode	string	A code for sales channel, DIRECT or INDIRECT.
SalesCreditTypeCode	string	The code associated with the sales credit type.
SplitTypeCode	string	The split type code.
StatusCodeSetId	long	The StatusCodeSetId of revenue.
TypeCodeSetId	long	The TypeCodeSetId of the revenue.
UOMCode	string	Unit of measure code.
UnadjustedQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The unadjusted quantity value.
UnitPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	A unit price of revenue.
UpdateFlag	boolean	The flag that controls if the user has access to update the record.
UpsideAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The best case amount.
WinProbability	decimal	The win probability for the revenue.
WorstCaseAdjustedForecast	decimal	The worst case adjusted forecast.

Forecast Territory Details

The information about the forecast territory.

QName: {http://xmlns.oracle.com/apps/sales/salesForecasting/forecasts/forecastService/}TerritoryForecast

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Sales Forecast*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdjustedBestCase	decimal	The adjusted best case value.
AdjustedForecast	decimal	The adjusted forecast value.
AdjustedQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The adjusted quantity value.
AdjustedWorstCase	decimal	The adjusted worst case vale.
CorporateUnadjustedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The corporate unadjusted amount attribute.
DueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The due date attribute.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
ForecastHeaderId	long	The header ID attribute associated with the forecast.
ForecastName	string	The forecast name attribute.

Name	Type	Description
ForecastParticipantId	long	The participant ID attribute. • Primary Key
ForecastParticipationCode	string	The forecast participation attribute.
ForecastType	string	The forecast type attribute.
HeaderStatusCode	string	The status code of the header.
Meaning	string	The meaning attribute.
OwnerResourceId	long	The owner resource ID attribute.
ParentTerritoryOwnerResourceId	long	The parent territory owner resource id attribute.
PseudoTerritoryFlag	boolean	The manager territory flag.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
StatusCode	string	The pre-defined code used to indicate the status.
SubmittedBy	string	The submitted by attribute.
SubmittedOn	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The submitted on attribute.
TerritoryHierarchyFreezeDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date attribute associated with the territory hierarchy freeze date.
TerritoryId	long	The territory ID attribute.
TerritoryLevel	decimal	The territory level.
TerritoryName	string	The territory name attribute.
TerritoryVersionId	long	The territory version ID attribute.
UnadjustedQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The unadjusted quantity value.

Name	Type	Description
UpdateFlag	boolean	The flag that controls if the user has access to update the record.

Sales Lead Custom Business Object (Deprecated)

Service to operate on custom business objects created in the Oracle Fusion Lead Management application. The supported operations are create, update, delete, and find. A custom business object stores the extended information for an Oracle Fusion business object, for example, related orders for a sales lead.

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/custExtn/extnService/}LeadsCustomObjectService

Service WSDL URL: https://servername/crmService/LeadsCustomObjectService?WSDL

Logical Business Objects

- CRM : Lead Management : Sales Lead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Custom Business Object*

Operations

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*
- *createEntity*
- *getEntity*
- *updateEntity*
- *deleteEntity*
- *findEntity*
- *mergeEntity*
- *processEntity*

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

createEntity

A web service method that creates records of an Oracle Fusion Lead Management custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A required input parameter of the createEntity web service method. Includes the attribute values that the records will be created with.
objectName	string	A required input parameter of the createEntity web service method. Use the API name of the custom object you want to create.

Response Payload

Element Name	Type	Description
result	anyType	The return value of the createEntity web service method. Includes the full set of attributes and child entities of the record.

getEntity

A web service method that queries by ID a single record of an Oracle Fusion Lead Management custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
keyValue	string	A required input parameter of the getEntity web service method. Includes the row ID of the record you want to query for.
objectName	string	A required input parameter of the getEntity web service method. Use the API name of the custom object you want to query for.

Response Payload

Element Name	Type	Description
result	anyType	The return value of the getEntity web service method. Includes the full set of attributes and child entities of the record.

updateEntity

A web service method that updates a set of records of an Oracle Fusion Lead Management custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A required input parameter of the updateEntity method. All records matching the IDs specified in this input object are updated with the corresponding input attribute values also specified.
objectName	string	A required input parameter of the updateEntity web service method. Use the API name of the custom object you want to update.

Response Payload

Element Name	Type	Description
result	anyType	

deleteEntity

A web service method that deletes a set of records of an Oracle Fusion Lead Management custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A required input parameter of the deleteEntity web service method. All records matching the input attribute values specified in this input object are deleted.
objectName	string	A required input parameter of the deleteEntity web service method. Use the API name of the custom object you want to delete.

Response Payload

Element Name	Type	Description
result	void	

findEntity

A web service method that queries for a set of records of an Oracle Fusion Lead Management custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findEntity web service method. Includes optional search criteria, sort filter, and attributes to be excluded when returning the set of records. Also includes the option to return any of the custom object's child entities.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Not applicable.
objectName	string	A required input parameter of the findEntity web service method. Use the API name of the custom object you want to query for.

Response Payload

Element Name	Type	Description
result	anyType	The return value of the findEntity web service method. Includes the full set of attributes and child entities of the records.

mergeEntity

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	
objectName	string	

Response Payload

Element Name	Type	Description
result	anyType	

processEntity

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	
object	anyType	
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	
objectName	string	

Response Payload

Element Name	Type	Description
result	anyType	

Custom Business Object

A service to create, update, delete, or find custom business objects created in the Oracle Fusion CRM application. A custom business object stores extended information for an Oracle Fusion business object.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/custom/extnService/}CustomReferenceService

Service WSDL URL: https://servername/crmService/CustomReferenceService?WSDL

Logical Business Objects

- CRM : CRM Application Composer : CRM Extensible Object

Operations

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*
- *invokeObjectFunction*
- *createEntity*
- *getEntity*
- *updateEntity*
- *deleteEntity*
- *findEntity*
- *mergeEntity*
- *processEntity*

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value

Element Name	Type	Description
		of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

invokeObjectFunction

invoke custom object row function.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
row	anyType	DataObject used to invoke the script
viewName	string	Custom Object type name
scriptName	string	row function name
params	anyType	row function parameters

Response Payload

Element Name	Type	Description
result	anyType	DataObject

createEntity

Create operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject created for the custom object.

getEntity

Get operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
keyValue	string	A list of key values for identifying the custom object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject identified by the keyValue.

updateEntity

Update operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be updated. The DataObject must include key fields for identifying the updated record, as well as the fields to be updated.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject updated for the custom object.

deleteEntity

Delete operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be deleted. The DataObject must include key fields for identifying the deleted record.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	void	DataObject that is deleted.

findEntity

Find operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	List of DataObjects identified by the findCriteria.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Search control.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObjects found

mergeEntity

merge with existing custom object if exist, create new object if does not exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be merged. The DataObject must include key fields for identifying the record, as well as the fields to be merged.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject result from the merge

processEntity

batch process for custom object operation

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Operation name
object	anyType	DataObjects to be batch processed
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	process control
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject result list

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
processEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea
getEntityList	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
updateEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea
getEntity	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
deleteEntity	ZCX_DELETE_CUSTOM_OBJECT_PRIV	DELETE custom object resources (WorkArea)	PermissionSet to DELETE for custom object WorkArea
findEntity	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
getDfltObjAttrHints	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
createEntity	ZCX_CREATE_CUSTOM_OBJECT_PRIV	CREATE custom object resources (WorkArea)	PermissionSet to CREATE for custom object WorkArea
getServiceLastUpdateTime	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
mergeEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea

Sales Lead Service Version 1 (Deprecated)

Service to operate on leads. The supported operations are create, update, delete, and search.
WARNING: This service has been deprecated and is being replaced with Sales Lead Service Version 2 (oracle.apps.marketing.leadMgmt.leads.leadService.SalesLeadService).

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/}LeadPublicService

Service WSDL URL: https://servername/crmService/LeadPublicService?WSDL

Logical Business Objects

- CRM : Lead Management : Sales Lead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Sales Lead Service Version 2*
Handles	*Sales Lead Resource*
Handles	*Sales Lead Product*
Handles	*Service Lead Service Data Object*
Handles	*Sales Lead Contact*

Operations

- *assignLead*
- *convertLeadToOpportunity*
- *qualifyLead*
- *rankLead*
- *scoreLead*
- *getLead*
- *createLead*
- *updateLead*

- *deleteLead*
- *findLead*
- *getLeadContact*
- *createLeadContact*
- *updateLeadContact*
- *deleteLeadContact*
- *findLeadContact*
- *getLeadProduct*
- *createLeadProduct*
- *updateLeadProduct*
- *deleteLeadProduct*
- *findLeadProduct*
- *getLeadResource*
- *createLeadResource*
- *updateLeadResource*
- *deleteLeadResource*
- *findLeadResource*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

assignLead

A web service method that assigns sales team to the lead.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the assignLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the assignLead web service method.

convertLeadToOpportunity

A web service method that converts a Lead record to an opportunity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required parameter of the convertLeadToOpportunity web service method. The lead record matching the ID input is used as source for the opportunity.

Response Payload

Element Name	Type	Description
result	string	The return value of the convertLeadToOppportunity web service method. It includes the full set of attributes of the opportunity record.

qualifyLead

A web service method that qualifies a lead based on qualification rules.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the qualifyLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the qualifyLead web service method.

rankLead

Assigns a pre-defined rank on the lead based on ranking rules.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the rankLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the rankLead web service method.

scoreLead

A web service method that scores an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the scoreLead web service method. It is the ID of the lead record that would need to be scored.

Response Payload

Element Name	Type	Description
result	string	The return value of the scoreLead web service method.

getLead

A web service method that queries a single record of Oracle Fusion Lead Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the getLead web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Service Lead Service Data Object*	The return value of the getLead web service method. It includes the full set of attributes of record.

createLead

A web service method that creates Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceLead1	*Service Lead Service Data Object*	A required input parameter of the createLead web service method. The input object include the attribute values that the lead record is created with.

Response Payload

Element Name	Type	Description
result	*Service Lead Service Data Object*	The return value of the createLead web service method. It includes the full set of attributes of the record.

updateLead

A web service method that updates an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceLead1	*Service Lead Service Data Object*	A required parameter of the updateLead web service method. The record matching the ID specified in this input lead contact is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Service Lead Service Data Object*	The return value of the updateLead web service method. It includes the full set of attributes of the record.

deleteLead

A web service method that deletes an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceLead1	*Service Lead Service Data Object*	A required input parameter of the deleteLead web service method. The record matching the input attribute values specified in the lead is deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteLead.

findLead

A web service method that queries a single record or set of records of Oracle Fusion Lead Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLead web service method. The filter criteria is the cumulative set of attribute criteria that will identify records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findLead.

Response Payload

Element Name	Type	Description
result	*Service Lead Service Data Object*	The return value of the findLead web service method. It includes the full set of attributes of records queried.

getLeadContact

A web service method that queries a single record of Oracle Fusion Lead Contact Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadMemberId	long	A required input parameter of the getLeadContact web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the getLeadContact web service method. It includes the full set of attributes of record.

createLeadContact

A web service method that create Oracle Fusion Lead Contact Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadContacts	*Sales Lead Contacts*	A required input parameter of the createLeadContact web service method. It includes the attribute values that the record is created with.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the createLeadContact web service method. It includes the full set of attributes of the record.

updateLeadContact

A web service method that updates an Oracle Fusion Lead Contact Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadContacts	*Sales Lead Contacts*	A required parameter of the updateLeadContact web service method. The record matching the ID specified in this input lead contact is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the updateLeadContact web service method. It includes the full set of attributes of the record.

deleteLeadContact

A web service method that deletes an Oracle Fusion Lead Contact Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadContacts	*Sales Lead Contacts*	A required input parameter of the deleteLeadContact web service method. The lead contact record matching the input attribute values specified are deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteLeadContact.

findLeadContact

A web service method that queries a single record or set of records of Oracle Fusion Lead Contact Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadContact web service method. The filter criteria is the cumulative set of attribute criteria that identifies records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findLeadContact.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the findLeadContact web service method. It includes the full set of attributes of records queried.

getLeadProduct

A web service method that queries a single record of Oracle Fusion Lead Product Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadProductId	long	A required input parameter of the getLeadProduct web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	The return value of the getLeadProduct web service method. It includes the full set of attributes of record.

createLeadProduct

A web service method that create Oracle Fusion Lead Product Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadProducts	*Sales Lead Products*	The return value of the createLeadProduct web service method. It includes the full set of attributes of the record.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	A required input parameter of the createLeadProduct web service method. The input object includes the attribute values that the record will be created with.

updateLeadProduct

A web service method that updates an Oracle Fusion Lead Product Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadProducts	*Sales Lead Products*	A required parameter of the updateLeadProduct web service method. The record matching the ID specified in this input lead product is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	The return value of the updateLeadProduct web service method. It includes the full set of attributes of the record.

deleteLeadProduct

A web service method that deletes an Oracle Fusion Lead Product Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadProducts	*Sales Lead Products*	A required input parameter of the deleteLeadProduct web service method. The record matching the input attribute values specified in the lead product are deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteLeadProduct.

findLeadProduct

A web service method that queries a single record or set of records of Oracle Fusion Lead Product Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadResource web service method. The filter criteria is a cumulative set of attribute criteria that will identify records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findLeadProduct.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	The return value of the findLeadProduct web service method. It includes the full set of attributes of records queried.

getLeadResource

A web service method that queries a single record of Oracle Fusion Lead Resource Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadResourceId	long	A required input parameter of the getLeadResource web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the getLeadResource web service method. It includes the full set of attributes of record.

createLeadResource

A web service method that create Oracle Fusion Lead Resource Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadResources	*Sales Lead Resources*	A required input parameter of the createLeadResource web service method. The input object It includes the attribute values that the record are created with.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the createLeadResource web service method. It includes the full set of attributes of the record.

updateLeadResource

A web service method that updates an Oracle Fusion Lead Resource Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadResources	*Sales Lead Resources*	A required parameter of the updateLeadResource web service method. The record matching the ID specified in this input lead resource is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the updateLeadResource web service method. It includes the full set of attributes of the record.

deleteLeadResource

A web service method that deletes an Oracle Fusion Lead Resource Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadResources	*Sales Lead Resources*	A required input parameter of the deleteLeadResource web service method. The record matching the input attribute values specified in the Lead Resource is deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteLeadResource.

findLeadResource

A web service method that queries a single record or set of records of Oracle Fusion Lead Resource Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadResource web service method. The filter criteria is a cumulative set of attribute criteria that identifies the records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findLeadResource.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the findLeadResource web service method. It includes the full set of attributes of records queried.

getDfltObjAttrHints

Retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated. The parameter is present in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKL_VIEW_SALES_LEAD_PRIV	View Sales Lead	Allows viewing sales leads. A sales lead is a prospect or existing customer who has interest or the potential for interest in a product or service being sold.
All Operations	MKL_MANAGE_SALES_LEAD_PRIV	Manage Sales Lead	Allows web services management of sales leads including modifying lead attributes and accepting or rejecting sales leads.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			creation and removal of partner users and the users' privileges.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Sales Lead Contacts

The contact associated with the sales lead.

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/}MklLeadTcMembers

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Sales Lead Contacts*
Contained by	*Sales Lead*

Relationship Type	Object or Service
Contained by	*Service Lead Service Data Object*
Handled by	*Sales Lead Service Version 2*
Handled by	*Sales Lead Service Version 1*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
City	string	The name of the city.
ContactDoNotCallFlag	boolean	The indicator set at person level for the sales lead contact.
ContactDoNotContactFlag	boolean	The indicator set at person level for the sales lead contact.
ContactDoNotEmailFlag	boolean	The indicator set at person level for the sales lead contact.
ContactDoNotMailFlag	boolean	The indicator set at person level for the sales lead contact.
ContactNumber	string	The contact number of the sales lead contact.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
FormattedPhoneNumber	string	The formatted phone number.
JobTitle	string	The job title of the sales lead contact.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LeadId	long	The unique identifier of the sales lead for the sales lead contact.
LeadMemberId	long	The primary key for lead contact. • Primary Key
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The organization contact identifier of the sales lead contact.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyStatus	string	The status of the sales lead contact.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUsageCode	string	The usage context of a party's contact point.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonJobTitle	string	The person Job title of the sales lead contact.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.

Name	Type	Description
PersonProfileId	long	The person profile identifier of the sales lead contact.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PostalCode	string	The postal code element of the address.
PrimaryFlag	boolean	Indicates whether the lead contact is primary. Primary lead contact is also the lead owner.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
RelationshipId	long	The relationship identifier for the record.
Role	string	The role of lead contact in the context of the lead.
State	string	The name of the state.

Sales Lead Products

The product associated with a sales lead.

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/}MklProdAssoc

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Sales Lead Products*
Contained by	*Sales Lead*
Contained by	*Service Lead Service Data Object*
Handled by	*Sales Lead Service Version 2*
Handled by	*Sales Lead Service Version 1*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Amount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount associated with the sales lead product.
AverageTimeToClose	decimal	Indicates average time to close for the sales lead product.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Description	string	The free text description of the record.
EstimatedUnitPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated unit price for the lead product.
InventoryItemId	long	The inventory item identifier associated with the lead product.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
LeadId	long	The unique identifier of the sales lead for the sales lead product.
LeadProductId	long	The primary key that represents the identifier of the current lead product. • Primary Key
LeadProductNumber	string	This is a public surrogate key for the table and is defaulted with a unique number. It cannot be null.
LongDescription	string	The long description of the sales lead product.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationId	long	The inventory organization identifier associated with the lead product.
PrimaryFlag	boolean	Indicates whether this product is a primary product for this lead.
ProductGroupDescription	string	The description of the product group.
ProductGroupId	long	The unique identifier of the product group.
ProductGroupName	string	The name of the product group if the record represents a product group.
ProductName	string	The name of product or product group. It is the same as the product name if the record represents a product. It is the same as the product group name if the record represents a product group.
ProductType	string	Indicates if the record represents a product or a product group.
Quantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The product quantity identified for the product on the lead.

Name	Type	Description
UOMCode	string	The unit of measure associated with the sales lead product line.

Sales Lead Resources

The resource associated with the sales lead.

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/}MklLeadResources

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Sales Lead Resources*
Contained by	*Sales Lead*
Contained by	*Service Lead Service Data Object*
Handled by	*Sales Lead Service Version 2*
Handled by	*Sales Lead Service Version 1*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	Access level for the sale team member on the lead.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.

Name	Type	Description
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedPhoneNumber	string	The formatted phone number.
FunctionalRole	string	Indicates the role played by the sales team resource for handling the sales lead.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
LeadId	long	The unique identifier of the sales lead for the sales lead resource.
LeadResourceId	long	The unique identifier of the sales lead resource. • Primary Key
ManagerName	string	The manager name of the resource.
ManagerPartyId	long	The party identifier of the manager of the resource in the organizational hierarchy.
Name	string	The name of the lead resource.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgTreeCode	string	The resource organization hierarchy code associated with the resource organization which is associated with the lead resource.
OrgTreeStructureCode	string	The resource organization hierarchy structure code associated with the resource organization hierarchy which is associated with the resource organization associated with the lead resource.
OrgTreeVersionId	string	The resource organization hierarchy version associated with the resource organization which is associated with the lead resource.

Name	Type	Description
PartnerContactFlag	boolean	The indicator to identify whether the resource is a partner contact.
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PrimaryFlag	boolean	Indicates whether the record represents the primary resource on the lead. Primary resource on the lead is the same as the lead owner.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
ResourceId	long	The unique identifier of the resource.
ResourceOrgId	long	The resource organization identifier associated with the lead resource.
ResourceUsername	string	The sign in name of the resource.
RoleName	string	The name of the role of the lead resource in the context of the sales lead.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.

Sales Lead Service Version 2

Service to convert, reject, and accept actions in addition to create, update, delete, and search for leads.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/}SalesLeadService

Service WSDL URL: https://servername/crmService/SalesLeadService?WSDL

Logical Business Objects

- CRM : Lead Management : Sales Lead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Previous version is	*Sales Lead Service Version 1*
Handles	*Note*
Handles	*Note Descriptive Flexfields*
Handles	*Sales Lead*
Handles	*Sales Lead Resources*
Handles	*Sales Lead Products*
Handles	*Sales Lead Contacts*

Operations

- *assignLead*
- *convertLeadToOpportunity*
- *qualifyLead*
- *rankLead*
- *scoreLead*
- *submitDeal*
- *reassignLead*
- *getSalesLeadProduct*
- *createSalesLeadProduct*
- *updateSalesLeadProduct*
- *deleteSalesLeadProduct*
- *findSalesLeadProduct*
- *getSalesLeadResource*
- *createSalesLeadResource*
- *updateSalesLeadResource*
- *deleteSalesLeadResource*
- *findSalesLeadResource*
- *getSalesLead*
- *createSalesLead*
- *updateSalesLead*
- *deleteSalesLead*
- *mergeSalesLead*
- *findSalesLead*

- *processSalesLead*
- *getSalesLeadContact*
- *createSalesLeadContact*
- *updateSalesLeadContact*
- *deleteSalesLeadContact*
- *findSalesLeadContact*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

assignLead

A web service method that assigns sales team to the lead.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the assignLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the assignLead web service method.

convertLeadToOpportunity

A web service method that converts a lead record to an opportunity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required parameter of the convertLeadToOpportunity web service method. The lead record matching the ID input is used as source for the opportunity.

Response Payload

Element Name	Type	Description
result	string	The return value of the convertLeadToOppportunity web service method. It includes the full set of attributes of the opportunity record.

qualifyLead

A web service method that qualifies a lead based on qualification rules.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the qualifyLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the qualifyLead web service method.

rankLead

A web service method that assigns a pre-defined rank on the lead based on ranking rules.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the rankLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the rankLead web service method.

Element Name	Type	Description

scoreLead

A web service method that scores an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the scoreLead web service method. It is the ID of the lead record that would need to be scored.

Response Payload

Element Name	Type	Description
result	string	The return value of the scoreLead web service method.

submitDeal

A web service method that submits an Oracle Fusion Lead Object record for registration.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the submitDeal web service method. It is the ID of the lead record to be registered.

Response Payload

Element Name	Type	Description
result	string	The return value of the submitDeal web service method.

reassignLead

A web service method that reassigns an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
mode	string	A required input parameter of the reassignLead web service method. Values: AUTOIMMEDIATE: Reassigns the lead immediately, AUTO: Flags the lead for reassignment to be picked-up next time assignment runs, MANUAL: only reassign the owners with the parameter value passed.
leadId	long	A required input parameter of the reassignLead web service method. It is the ID of the lead record that would need to be reassigned.
ownerId	long	An optional input parameter of the reassignLead web service method. It is required when the mode is MANUAL. It is the ID of the resource record to be set as the owner for the lead.
organizationId	long	An optional input parameter of the reassignLead web service method. It is used when the mode is MANUAL. It is the organization ID of the resource record to be set as the owner for the lead.
reason	string	An optional input parameter of the reassignLead web service method. It is the reason for reassignment.
comment	string	An optional input parameter of the reassignLead web service method. It is the comment recorded for the lead while being reassigned.

Response Payload

Element Name	Type	Description
result	string	The return value of the reassignLead web service method.

getSalesLeadProduct

A web service method that queries a single record of Oracle Fusion Lead Product Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadProductId	long	A required input parameter of the getLeadProduct web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	The return value of the getLeadProduct web service method. It includes the full set of attributes of record.

createSalesLeadProduct

A web service method that creates Oracle Fusion Lead Product Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadProduct	*Sales Lead Products*	The return value of the createLeadProduct web service method. It includes the full set of attributes of the record.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	A required input parameter of the createLeadProduct web service method. The input object includes the attribute values that the record is created with.

updateSalesLeadProduct

A web service method that updates an Oracle Fusion Lead Product Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadProduct	*Sales Lead Products*	A required parameter of the updateLeadProduct web service method. The record matching the ID specified in this input lead product is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	The return value of the updateLeadProduct web service method. It includes the full set of attributes of the record.

deleteSalesLeadProduct

A web service method that deletes an Oracle Fusion Lead Product Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadProduct	*Sales Lead Products*	A required input parameter of the deleteLeadProduct web service method. The record matching the input attribute values specified in the lead product are deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteSalesLeadProduct.

findSalesLeadProduct

A web service method that queries a single record or set of records of Oracle Fusion Lead Product Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadResource web service method. The filter criteria is a cumulative set of attribute criteria that identifies record queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findSalesLeadProduct.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	The return value of the findLeadProduct web service method. It includes the full set of attributes of records queried.

getSalesLeadResource

A web service method that queries a single record of Oracle Fusion Lead Resource Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadResourceId	long	A required input parameter of the getLeadResource web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the getLeadResource web service method. It includes the full set of attributes of record.

createSalesLeadResource

A web service method that creates Oracle Fusion Lead Resource Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadResource	*Sales Lead Resources*	A required input parameter of the createLeadResource web service method. The input object includes the attribute values that the record is created with.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the createLeadResource web service method. It includes the full set of attributes of the record.

updateSalesLeadResource

A web service method that updates an Oracle Fusion Lead Resource Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadResource	*Sales Lead Resources*	A required parameter of the updateLeadResource web service method. The record matching the ID specified in this input lead resource is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the updateLeadResource web service method. It includes the full set of attributes of the record.

deleteSalesLeadResource

A web service method that deletes an Oracle Fusion Lead Resource Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadResource	*Sales Lead Resources*	A required input parameter of the deleteLeadResource web service method. The record matching the input attribute values specified in the Lead Resource is deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteSalesLeadResource.

findSalesLeadResource

A web service method that queries a single record or set of records of Oracle Fusion Lead Resource Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadResource web service method. The filter criteria is a cumulative set of attribute criteria that identifies records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findSalesLeadResource.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the findLeadResource web service method. It includes the full set of attributes of records queried.

getSalesLead

A web service method that queries a single record of Oracle Fusion Lead Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the getLead web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the getLead web service method. It includes the full set of attributes of record.

createSalesLead

A web service method that creates Oracle Fusion Lead Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLead	*Sales Lead*	A required input parameter of the createLead web service method. The input object includes the attribute values that the lead record is created with.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the createLead web service method. It includes the full set of attributes of the record.

updateSalesLead

A web service method that updates an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLead	*Sales Lead*	A required parameter of the updateLead web service method. The record matching the ID specified in this input lead contact is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the updateLead web service method. It includes the full set of attributes of the record.

deleteSalesLead

A web service method that deletes an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLead	*Sales Lead*	A required input parameter of the deleteLead web service method. The record matching the input attribute values specified in the Lead is deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteSalesLead.

mergeSalesLead

A web service method that either creates a single record of Oracle Fusion Lead Object or updates a record by the given ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLead	*Sales Lead*	A required parameter of the mergeSalesLead web service method. The record matching the ID specified in this input is updated. If no ID is specified, the record is created instead.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the mergeLead web service method. It includes the full set of attributes of the record.

findSalesLead

A web service method that queries a single record or set of records of Oracle Fusion Lead Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLead web service method. The filter criteria is the cumulative set of attribute criteria that identifies records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findSalesLead.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the findLead web service method. It includes the full set of attributes of records queried.

Element Name	Type	Description

processSalesLead

A web service method that creates or updates Oracle Fusion Lead Object record in bulk.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	As a input parameter value either of create, merge or update needs to be passed.
salesLead	*Sales Lead*	A required parameter of the processLead web service method. The list of lead input records to be created or merged or updated.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	It has three parts. For the first parameter, value can be full which means full set of lead attributes to be returned, value of key means only lead ID values to be returned, value of none means no value returned. For the second parameter, similar to first parameter but related to exceptions. For the third mandatory parameter, indicates true or false for partial failure allowed or not.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the processLead web service method. It can be none or a list of only the lead IDs or a list of full set of lead records.

getSalesLeadContact

A web service method that queries a single record of Oracle Fusion Lead Contact Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadMemberId	long	A required input parameter of the getLeadContact web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the getLeadContact web service method. It includes the full set of attributes of record.

createSalesLeadContact

A web service method that creates Oracle Fusion Lead Contact Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadContact	*Sales Lead Contacts*	A required input parameter of the createLeadContact web service method. It includes the attribute values that the record is created with.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the createLeadContact web service method. It includes the full set of attributes of the record.

updateSalesLeadContact

A web service method that updates an Oracle Fusion Lead Contact Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadContact	*Sales Lead Contacts*	A required parameter of the updateLeadContact web service method. The record matching the ID specified in this input lead contact is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the updateLeadContact web service method. It includes the full set of attributes of the record.

deleteSalesLeadContact

A web service method that deletes an Oracle Fusion Lead Contact Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadContact	*Sales Lead Contacts*	A required input parameter of the deleteLeadContact web service method. The lead contact record matching the input attribute values specified are deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteSalesLeadContact.

findSalesLeadContact

A web service method that queries a single record or set of records of Oracle Fusion Lead Contact Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadContact web service method. The filter criteria is the cumulative set of attribute criteria that identifies records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findSalesLeadContact.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the findLeadContact web service method. It includes the full set of attributes of records queried.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated. The parameter is present in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKL_VIEW_SALES_LEAD_PRIV	View Sales Lead	Allows viewing sales leads. A sales lead is a prospect or existing customer who has interest or the potential for interest in a product or service being sold.
All Operations	MKL_SET_UP_SALES_LEAD_PRIV	Set Up Sales Lead	Allows setting up common configuration settings, including

Operation Name	Privilege Code	Privilege Name	Privilege Description
			assignment manager, assessment templates, appointments, interactions, notes, tasks, standard lookup types, profile options and descriptive flexfields for sales leads.
All Operations	MKL_MANAGE_SALES_LEAD_PRIV	Manage Sales Lead	Allows web services management of sales leads including modifying lead attributes and accepting or rejecting sales leads.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
MKL_SET_UP_SALES_LEAD_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MKL_SET_UP_SALES_LEAD_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			ready to send status and delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ EXECUTION_MANAGEMENT_ DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKL_SALES_LEAD_ QUALIFIER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_PARTNER_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Service Lead Service Data Object

The transaction record created when a party has expressed an interest in a product or service. It represents a selling opportunity.

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/}ServiceLead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Lead Resources*
Contains	*Sales Lead Products*
Contains	*Sales Lead Contact*
Handled by	*Sales Lead Service Version 1*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AcceptedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the lead was accepted.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
ApprovalDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the lead was approved. This is applicable to deals only.
ApprovalTaskId	string	The unique identifier of the approval task associated with the approval process for the lead. This is applicable to deals only.
ApproverId	long	The party identifier associated with the approver of the lead registration record.

Name	Type	Description
AssignmentStatusCode	string	Includes the current assignment related status for the lead. For example, whether the lead is assigned or unassigned.
BudgetAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The budget amount associated with the sales lead.
BudgetStatus	string	The budget status associated with the budget amount associated with the sales lead.
CampaignContactId	long	The campaign contact identifier associated with the sales lead.
ChannelType	string	Indicates the channel through which the lead contacted the company.
City	string	The name of the city.
ConvertedTimestamp	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates when the lead was converted to an opportunity.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerId	long	The party identifier associated with the customer who is associated with the sales lead.
CustomerNeed	string	Indicates which needs the lead product serves for the lead customer.
DealAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The deal size associated with the sales lead.
DecisionMakerIdentifiedFlag	boolean	Indicates whether a decision maker is identified for the sales lead.
Description	string	The free text description of the record.

Name	Type	Description
EmailAddress	string	The email address associated with the record.
EstimatedCloseDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The estimated close date of the deal. This is a deal specific attribute.
ExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expiration date associated with the sales lead.
FollowupTimestamp	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates when the sales lead must be followed up.
ImportTaskId	long	The unique identifier of the import task associated with the lead. This is applicable to imported leads only.
LastAssignmentDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the lead was last run through automated batch lead assignment process.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
LeadAcceptedFlag	boolean	Indicates if the lead is accepted.
LeadId	long	The primary identifier of the sales lead. • Primary Key
LeadNumber	string	The unique identifier of the sales lead. It also acts as a public surrogate key.
MklLeadResources	*Sales Lead Resources*	Indicates the reference to lead resources (child).
MklLeadTcMembers	*Sales Lead Contacts*	Indicates the reference to lead contacts (child).
MklProdAssoc	*Sales Lead Products*	Indicates the reference to lead products (child).
Name	string	The name of the sales lead.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OwnerId	long	The resource identifier for the lead owner resource.
OwnerPartyName	string	The name associated with the owner of the sales lead.
PartnerId	long	The unique identifier of the partner.
PartnerPartyName	string	The name associated with the primary partner of the sales lead. This is a deal specific attribute.
PartnerProgramId	long	A reference to the partner program in which the primary partner associated with the sales lead is enrolled. This is a deal specific attribute.
PartnerType	string	Indicates the type of the primary partner associated with the sales lead. This is a deal specific attribute.
PartnerTypeMeaning	string	The meaning of the type of primary partner associated with the sales lead. This is a deal specific attribute.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PostalCode	string	The postal code element of the address.
PrimaryContactId	long	The unique identifier of the sales lead contact marked as a primary lead contact.
PrimaryContactPartyName	string	The name associated with the primary lead contact.
PrimaryInventoryItemDescription	string	The description associated with the sales lead.
PrimaryInventoryItemId	long	The inventory item identifier associated with the primary lead product.
PrimaryInventoryOrgId	long	The inventory item organization identifier associated with primary lead product.
PrimaryProductDescription	string	The description of the primary lead product.

Name	Type	Description
PrimaryProductGroupId	long	The unique identifier of the primary product group associated with the lead.
ProductGroupName	string	The name associated with the primary lead product Group.
ProgramName	string	The name of the partner program in which the primary partner associated with the sales lead is enrolled. This is a deal specific attribute.
Project	string	The customer project identified for the sales lead.
QualificationScore	long	The qualification score associated with the lead. This score is computed by the assignment manager.
QualifiedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date when the sales lead was qualified.
Rank	string	The rank associated with the sales lead.
ReassignCommentText	string	Comments added to the lead during reassign operation.
ReassignReasonCode	string	The reason code specified by the user when the lead was reassigned.
RegistrationNumber	string	The registration number of the sales lead. This unique identifier is generated when the sales lead is approved. This is a deal specific attribute.
RegistrationStatus	string	The approval Status of the sales lead. This is a deal specific attribute.
RegistrationType	string	Indicates the registration type of the sales lead. This is a deal specific attribute.
RegistrationTypeMeaning	string	Indicates the meaning of the registration type of the sales lead. This is a deal specific attribute.
RejectByTerritoryId	long	The territory identifier associated with the territory to which the resources who rejected the lead belonged at the time of rejection.
RejectByTerritoryVersionId	long	The territory version identifier associated with the territory to which the resources who

Name	Type	Description
		rejected the lead belonged at the time of rejection.
RejectByUserId	long	The unique identifier of the sales representative who rejected the sales lead.
RejectComment	string	The comments provided by the sales representative who rejected the sales lead.
RejectReasonCode	string	Indicates the rejection reason code provided by the sales representative who rejected the sales lead.
RejectedCount	long	Indicates the number of times the sales lead was rejected by sales representatives.
RejectedTimestamp	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date and time when the sales lead was rejected by a sales representative.
RelationshipId	long	The relationship identifier for the record.
RetireComment	string	The comments recorded when the sales lead is moved to retired status.
RetireReasonCode	string	The reason code recorded when the sales lead is moved to retired status.
RetiredTimestamp	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time recorded when the sales lead is moved to retired status.
SalesChannel	string	Indicates the sales channel responsible for following up on the sales lead.
SalesChannelMeaning	string	The meaning of the sales channel associated with the sales lead.
Score	long	The score associated with the sales lead. The score is computed based on the scoring rules.
SourceCode	string	The marketing source code associated with the sales lead.
State	string	The name of the state.
StatusCode	string	The pre-defined code used to indicate the status.

Name	Type	Description
Timeframe	string	The time frame associated with the sales lead.
ToReassignFlag	boolean	Indicates whether the sales lead must be reassigned during the next batch assignment run.
ToRescoreFlag	boolean	Indicates whether the sales lead must be rescored during the next batch assignment run.
UniqueName	string	The unique name of the customer associated with the sales lead.

Sales Lead Service Version 2

Service to convert, reject, and accept actions in addition to create, update, delete, and search for leads.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/}SalesLeadService

Service WSDL URL: https://servername/crmService/SalesLeadService?WSDL

Logical Business Objects

- CRM : Lead Management : Sales Lead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Previous version is	*Sales Lead Service Version 1*
Handles	*Note*
Handles	*Note Descriptive Flexfields*
Handles	*Sales Lead*
Handles	*Sales Lead Resources*

Relationship Type	Object or Service
Handles	*Sales Lead Products*
Handles	*Sales Lead Contacts*

Operations

- *assignLead*
- *convertLeadToOpportunity*
- *qualifyLead*
- *rankLead*
- *scoreLead*
- *submitDeal*
- *reassignLead*
- *getSalesLeadProduct*
- *createSalesLeadProduct*
- *updateSalesLeadProduct*
- *deleteSalesLeadProduct*
- *findSalesLeadProduct*
- *getSalesLeadResource*
- *createSalesLeadResource*
- *updateSalesLeadResource*
- *deleteSalesLeadResource*
- *findSalesLeadResource*
- *getSalesLead*
- *createSalesLead*
- *updateSalesLead*
- *deleteSalesLead*
- *mergeSalesLead*
- *findSalesLead*
- *processSalesLead*
- *getSalesLeadContact*
- *createSalesLeadContact*
- *updateSalesLeadContact*
- *deleteSalesLeadContact*
- *findSalesLeadContact*
- *getDfltObjAttrHints*

- *getServiceLastUpdateTime*
- *getEntityList*

assignLead

A web service method that assigns sales team to the lead.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the assignLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the assignLead web service method.

convertLeadToOpportunity

A web service method that converts a lead record to an opportunity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required parameter of the convertLeadToOpportunity web service method. The lead record matching the ID input is used as source for the opportunity.

Response Payload

Element Name	Type	Description
result	string	The return value of the convertLeadToOppportunity web service method. It includes the full set of attributes of the opportunity record.

qualifyLead

A web service method that qualifies a lead based on qualification rules.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the qualifyLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the qualifyLead web service method.

rankLead

A web service method that assigns a pre-defined rank on the lead based on ranking rules.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the rankLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the rankLead web service method.

scoreLead

A web service method that scores an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the scoreLead web service method. It is the ID of the lead record that would need to be scored.

Response Payload

Element Name	Type	Description
result	string	The return value of the scoreLead web service method.

submitDeal

A web service method that submits an Oracle Fusion Lead Object record for registration.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the submitDeal web service method. It is the ID of the lead record to be registered.

Response Payload

Element Name	Type	Description
result	string	The return value of the submitDeal web service method.

reassignLead

A web service method that reassigns an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
mode	string	A required input parameter of the reassignLead web service method. Values: AUTOIMMEDIATE: Reassigns the lead immediately, AUTO: Flags the lead for reassignment to be picked-up next time assignment runs, MANUAL: only reassign the owners with the parameter value passed.
leadId	long	A required input parameter of the reassignLead web service method. It is the ID of the lead record that would need to be reassigned.
ownerId	long	An optional input parameter of the reassignLead web service method. It is required when the mode is MANUAL. It is the ID of the resource record to be set as the owner for the lead.
organizationId	long	An optional input parameter of the reassignLead web service method. It is used when the mode is MANUAL. It is the organization ID of the resource record to be set as the owner for the lead.
reason	string	An optional input parameter of the reassignLead web service method. It is the reason for reassignment.
comment	string	An optional input parameter of the reassignLead web service method. It is the comment recorded for the lead while being reassigned.

Response Payload

Element Name	Type	Description
result	string	The return value of the reassignLead web service method.

getSalesLeadProduct

A web service method that queries a single record of Oracle Fusion Lead Product Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadProductId	long	A required input parameter of the getLeadProduct web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	The return value of the getLeadProduct web service method. It includes the full set of attributes of record.

createSalesLeadProduct

A web service method that creates Oracle Fusion Lead Product Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadProduct	*Sales Lead Products*	The return value of the createLeadProduct web service method. It includes the full set of attributes of the record.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	A required input parameter of the createLeadProduct web service method. The input object includes the attribute values that the record is created with.

updateSalesLeadProduct

A web service method that updates an Oracle Fusion Lead Product Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadProduct	*Sales Lead Products*	A required parameter of the updateLeadProduct web service method. The record matching the ID specified in this input lead product is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	The return value of the updateLeadProduct web service method. It includes the full set of attributes of the record.

deleteSalesLeadProduct

A web service method that deletes an Oracle Fusion Lead Product Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadProduct	*Sales Lead Products*	A required input parameter of the deleteLeadProduct web service method. The record matching the input attribute values specified in the lead product are deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteSalesLeadProduct.

findSalesLeadProduct

A web service method that queries a single record or set of records of Oracle Fusion Lead Product Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadResource web service method. The filter criteria is a cumulative set of attribute criteria that identifies record queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findSalesLeadProduct.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	The return value of the findLeadProduct web service method. It includes the full set of attributes of records queried.

getSalesLeadResource

A web service method that queries a single record of Oracle Fusion Lead Resource Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadResourceId	long	A required input parameter of the getLeadResource web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the getLeadResource web service method. It includes the full set of attributes of record.

createSalesLeadResource

A web service method that creates Oracle Fusion Lead Resource Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadResource	*Sales Lead Resources*	A required input parameter of the createLeadResource web service method. The input object includes the attribute values that the record is created with.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the createLeadResource web service method. It includes the full set of attributes of the record.

updateSalesLeadResource

A web service method that updates an Oracle Fusion Lead Resource Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadResource	*Sales Lead Resources*	A required parameter of the updateLeadResource web service method. The record matching the ID specified in this input lead resource is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the updateLeadResource web service method. It includes the full set of attributes of the record.

deleteSalesLeadResource

A web service method that deletes an Oracle Fusion Lead Resource Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadResource	*Sales Lead Resources*	A required input parameter of the deleteLeadResource web service method. The record matching the input attribute values specified in the Lead Resource is deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteSalesLeadResource.

findSalesLeadResource

A web service method that queries a single record or set of records of Oracle Fusion Lead Resource Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadResource web service method. The filter criteria is a cumulative set of attribute criteria that identifies records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findSalesLeadResource.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the findLeadResource web service method. It includes the full set of attributes of records queried.

getSalesLead

A web service method that queries a single record of Oracle Fusion Lead Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the getLead web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the getLead web service method. It includes the full set of attributes of record.

createSalesLead

A web service method that creates Oracle Fusion Lead Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLead	*Sales Lead*	A required input parameter of the createLead web service method. The input object includes the attribute values that the lead record is created with.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the createLead web service method. It includes the full set of attributes of the record.

updateSalesLead

A web service method that updates an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLead	*Sales Lead*	A required parameter of the updateLead web service method. The record matching the ID specified in this input lead contact is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the updateLead web service method. It includes the full set of attributes of the record.

deleteSalesLead

A web service method that deletes an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLead	*Sales Lead*	A required input parameter of the deleteLead web service method. The record matching the input attribute values specified in the Lead is deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteSalesLead.

mergeSalesLead

A web service method that either creates a single record of Oracle Fusion Lead Object or updates a record by the given ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLead	*Sales Lead*	A required parameter of the mergeSalesLead web service method. The record matching the ID specified in this input is updated. If no ID is specified, the record is created instead.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the mergeLead web service method. It includes the full set of attributes of the record.

findSalesLead

A web service method that queries a single record or set of records of Oracle Fusion Lead Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLead web service method. The filter criteria is the cumulative set of attribute criteria that identifies records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findSalesLead.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the findLead web service method. It includes the full set of attributes of records queried.

processSalesLead

A web service method that creates or updates Oracle Fusion Lead Object record in bulk.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	As a input parameter value either of create, merge or update needs to be passed.
salesLead	*Sales Lead*	A required parameter of the processLead web service method. The list of lead input records to be created or merged or updated.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	It has three parts. For the first parameter, value can be full which means full set of lead attributes to be returned, value of key means only lead ID values to be returned, value of none means no value returned. For the second parameter, similar to first parameter but related to exceptions. For the third mandatory parameter, indicates true or false for partial failure allowed or not.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the processLead web service method. It can be none or a list of only the lead IDs or a list of full set of lead records.

getSalesLeadContact

A web service method that queries a single record of Oracle Fusion Lead Contact Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadMemberId	long	A required input parameter of the getLeadContact web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the getLeadContact web service method. It includes the full set of attributes of record.

createSalesLeadContact

A web service method that creates Oracle Fusion Lead Contact Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadContact	*Sales Lead Contacts*	A required input parameter of the createLeadContact web service method. It includes the attribute values that the record is created with.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the createLeadContact web service method. It includes the full set of attributes of the record.

updateSalesLeadContact

A web service method that updates an Oracle Fusion Lead Contact Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadContact	*Sales Lead Contacts*	A required parameter of the updateLeadContact web service method. The record matching the ID specified in this input lead contact is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the updateLeadContact web service method. It includes the full set of attributes of the record.

deleteSalesLeadContact

A web service method that deletes an Oracle Fusion Lead Contact Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadContact	*Sales Lead Contacts*	A required input parameter of the deleteLeadContact web service method. The lead contact record matching the input attribute values specified are deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteSalesLeadContact.

findSalesLeadContact

A web service method that queries a single record or set of records of Oracle Fusion Lead Contact Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadContact web service method. The filter criteria is the cumulative set of attribute criteria that identifies records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findSalesLeadContact.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the findLeadContact web service method. It includes the full set of attributes of records queried.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated. The parameter is present in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKL_VIEW_SALES_LEAD_PRIV	View Sales Lead	Allows viewing sales leads. A sales lead is a prospect or existing customer who has interest or the potential for interest in a product or service being sold.
All Operations	MKL_SET_UP_SALES_LEAD_PRIV	Set Up Sales Lead	Allows setting up common configuration settings, including assignment manager, assessment templates, appointments, interactions, notes, tasks, standard lookup types, profile options and descriptive flexfields for sales leads.
All Operations	MKL_MANAGE_SALES_LEAD_PRIV	Manage Sales Lead	Allows web services management of sales leads including modifying

Operation Name	Privilege Code	Privilege Name	Privilege Description
			lead attributes and accepting or rejecting sales leads.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			supporting roles include territory development, event and webinar strategies.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
MKL_SET_UP_SALES_LEAD_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MKL_SET_UP_SALES_LEAD_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ EXECUTION_MANAGEMENT_ DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKL_SALES_LEAD_ QUALIFIER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			of appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_ CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_ RECOMMENDATION_ANALYSIS_ DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Note

The object that captures comments, information, or instructions for an Oracle Fusion Applications business object.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/noteService}Note

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note Descriptive Flexfields*
Contained by	*Objective*
Contained by	*Opportunity*
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Contained by	*Activity*
Contained by	*Sales Competitor*
Contained by	*Sales Lead*
Contained by	*Business Plan*
Contained by	*Program Enrollments*
Contained by	*Reference*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*

Relationship Type	Object or Service
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreatorPartyId	long	This is the party identifier for the note creator.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteFlag	boolean	Indicates whether the user has access to delete the note.
Dff	*Note Descriptive Flexfields*	The descriptive flex field segment.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record

Name	Type	Description
NoteAttributeCategory	string	The contextual flex field for development usage.
NoteAttributeUid1	string	The flex field for development usage.
NoteAttributeUid2	string	The flex field for development usage.
NoteAttributeUid3	string	The flex field for development usage.
NoteAttributeUid4	string	The flex field for development usage.
NoteAttributeUid5	string	The flex field for development usage.
NoteId	long	The unique identifier of the note. • Primary Key
NoteNumber	string	The alternate unique identifier of the note. A user key that is system generated or from an external system.
NoteTitle	string	The title of the note entered by the user.
NoteTxt	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	This is the column that stores the actual note text.
NoteTypeCode	string	This is the note type code for categorization of note.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
SourceObjectCode	string	This is the source_object_code for the source object as defined in OBJECTS Metadata.
SourceObjectId	string	This is the source_object_Uid for the source object such as Activities, Opportunities, and so on defined in OBJECTS metadata.
UpdateFlag	boolean	Indicates whether the user can update the note.
VisibilityCode	string	This is the attribute to specify the visibility level of the note.

Note Descriptive Flexfields

The descriptive flex field that captures additional information for notes, such as a priority or status.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/flex/noteDff/}NoteDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Note*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
NoteId	long	The unique identifier of the note. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Sales Lead

The transaction record created when a party has expressed an interest in a product or service. It represents a selling opportunity.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/leadService/}MklLead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note*
Contains	*Sales Lead Resources*
Contains	*Sales Lead Products*
Contains	*Sales Lead Contacts*
Extended by	*Sales Lead*
Handled by	*Sales Lead Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AcceptedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the lead was accepted by a resource assigned to it.
AcceptedDateTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Date and time when the sales lead is accepted by a resource assigned to it.
AddrElementAttribute1	string	Additional address element to support flexible address format.
AddrElementAttribute2	string	Additional address element to support flexible address format.
AddrElementAttribute3	string	Additional address element to support flexible address format.
AddrElementAttribute4	string	Additional address element to support flexible address format.
AddrElementAttribute5	string	Additional address element to support flexible address format.
AddressLinesPhonetic	string	Phonetic or Kana representation of the Kanji address lines (used in Japan).
ApprovalDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when a partner registered lead is approved by internal channel manager.
ApprovalDateTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the sales lead was approved. This is applicable to deal registrations only.
ApprovalTaskId	string	The unique identifier of the approval task pertaining to a partner registered lead.
ApproverId	long	The party identifier associated with the approver of the lead registration record.
AssetId	long	Unique identifier for the Asset associated with the Sales Lead.
AssetNumber	string	Unique Number for the Asset associated with the Sales Lead.
AssetSerialNumber	string	Serial Number for the Asset associated with the Sales Lead.

Name	Type	Description
AssignmentStatusCdMeaning	string	Defines the current assignment related status for the lead that is, whether the lead is assigned or unassigned and so on.
AssignmentStatusCode	string	Includes the current assignment related status for the lead. For example, whether the lead is assigned or unassigned.
BranchCode	string	The branch code pertaining to an organization.
BudgetAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The budget amount associated with the sales lead.
BudgetCurrencyCode	string	The currency code associated with the budget amount associated with the sales lead.
BudgetStatus	string	The budget status associated with the budget amount associated with the sales lead.
BudgetStatusSetId	long	The identifier of the budget status list set.
Building	string	Specific building name or number at a given address.
BusinessUnitId	long	The business unit identifier associated with the business unit of the sales lead creator.
BusinessUnitName	string	The name of the business unit associated with the sales lead.
CampaignId	long	The unique identifier for the campaign.
CampaignName	string	The name of the campaign associated with the sales lead.
ChannelType	string	Indicates the channel through which the lead contacted the company.
ChannelTypeMeaning	string	Indicates the channel through which this lead contacted the company.
ChannelTypeSetId	long	The identifier of the channel type list set.
ClassCode1	string	The auxiliary dimension for the Account.
ClassCode2	string	The auxiliary dimension for the Account.

Name	Type	Description
ClassCode3	string	The auxiliary dimension for the Account.
ClassCode4	string	The auxiliary dimension for the Account.
ContactTimezoneCd	string	Preferred time zone of the contact pursued on the lead.
ConvCurrencyCode	string	The currency code used to convert the lead currency. This is typically the corporate currency.
ConvExchangeRate	decimal	The exchange rate used to convert the lead currency to the corporate currency.
ConvRateType	string	The rate type used to convert the lead currency to the corporate currency.
ConvertedDateTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the sales lead was converted to an opportunity.
ConvertedTimestamp	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates when the lead was converted to an opportunity.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreationDateFormatted	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date and time when the record is created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CurrencyConversionDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The currency conversion date.
CurrencyMeaning	string	The currency code for the lead.
CustomerAddress1	string	The first line of the identifying address.
CustomerAddress2	string	The second line of the identifying address.
CustomerAddress3	string	The third line of the identifying address.

Name	Type	Description
CustomerAddress4	string	The fourth line of the identifying address.
CustomerCategoryCode	string	The category code for a customer.
CustomerCity	string	The city associated with the sale that is associated with the lead customer.
CustomerCountry	string	The country in which customer is located.
CustomerCurrencyFyPotentialRevenue	decimal	The potential annual revenues for a customer.
CustomerDoNotCallFlag	boolean	Indicates the Do not call flag set for sales lead customer (person).
CustomerDoNotContactFlag	boolean	Indicates the Do not contact flag set for sales lead customer (person).
CustomerDoNotEmailFlag	boolean	Indicates the do not email flag set for sales lead customer (person).
CustomerDoNotMailFlag	boolean	Indicates the do not mail flag set for sales lead customer (person).
CustomerEmployeesTotal	decimal	The total number of employees at a customer site.
CustomerId	long	The customer identifier. It is a reference to the customer record in the TCA schema.
CustomerIdenAddrLocationId	long	The address location identifier pertaining to a customer.
CustomerNeed	string	Indicates needs that the lead product serves for the lead customer.
CustomerPartyName	string	The name of the customer.
CustomerPartyType	string	The type of customer.
CustomerPartyUniqueName	string	The concatenation of customer name with postal code to make it unique.
CustomerPersonProfileId	long	The unique identifier of the sales lead customer (person) to get the dnc flags.

Name	Type	Description
CustomerPostalCode	string	The code in which customer is located.
CustomerPrimaryAddress	string	The primary address of the customer associated with the sales lead.
CustomerPrimaryEmailAddress	string	The primary email address of the customer associated with the sales lead.
CustomerPrimaryPhoneNumber	string	The primary formatted phone number of the customer associated with the sales lead.
CustomerRegistryId	string	The customer registry identifier.
CustomerSICCode	string	The industry code pertaining to the customer.
CustomerSellToAddress	string	The sell-to address of the customer associated with the sales lead.
CustomerState	string	The state in which customer is located.
CustomerStatus	string	The status of the customer associated with the sales lead.
CustomerURL	string	The URL address pertaining to the customer.
DaysUntilExpiration	int	The number of days prior to expiration of the partner registered lead.
DealAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount attributed to a lead.
DealTypeSetId	long	The identifier of the deal type list set.
DecisionMakerIdentifiedFlag	boolean	Indicates if the decision maker at customer site is identified.
DeleteFlag	boolean	This flag controls if the user has access to delete the record
Description	string	The free text description of the record.
Distance	decimal	Distance from the input location.

Name	Type	Description
EstimatedCloseDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The estimated close date for the deal once registered.
ExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expiration date associated with the sales lead.
FloorNumber	string	Specific floor number at a given address or in a particular building when building number is provided.
FollowupTimestamp	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates when the sales lead must be followed up.
IBAssetId	long	Unique identifier for the IB Asset associated with the Sales Lead.
IBAssetNumber	string	Unique number for the IB Asset associated with the Sales Lead.
IBAssetSerialNumber	string	Unique serial number for the IB Asset associated with the Sales Lead.
ImportTaskId	long	The unique identifier of the import activity that resulted in the lead being created.
InventoryItemDescription	string	The description of the product added to a lead.
JobTitle	string	The job title of the primary contact on the sales lead.
LastAssignmentDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the lead was last reassigned.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateDateFormatted	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date and time of the last update of the row.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	Latitude information for the location.

Name	Type	Description
LeadAcceptedFlag	boolean	Indicates if the lead is accepted.
LeadAging	decimal	The number of days elapsed since the lead was created.
LeadCreatedBy	string	Functional WHO: Indicates the user who created this record.
LeadCreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Functional WHO: Indicates the date and time when this record is created.
LeadId	long	The partner type. Indicates the type of partner stamped on the lead. • Primary Key
LeadLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Functional WHO: Indicates the date and time of the last update of the row.
LeadLastUpdatedBy	string	Functional WHO: Indicates the user who last updated the row.
LeadNumber	string	User friendly unique identifier for the lead.
LeadOrigin	string	Origin of the Lead
LongDescription	string	The description of the item.
Longitude	decimal	Longitude information for the location.
MklLeadResources	*Sales Lead Resources*	The lead resource for sales lead.
MklLeadTcMembers1	*Sales Lead Contacts*	The lead contacts for sales lead.
MklProdAssoc1	*Sales Lead Products*	The lead products for sales lead.
Name	string	Lead Name used for identifying the lead.
Note	*Note*	Notes added to the sales lead.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OrgContactId	long	The unique identifier for the primary sales lead contact of the sales lead.
OrganizationSize	string	The size of the organization.
OrganizationType	string	The type of the organization.
OwnerId	long	The party identifier associated with the owner of the sales lead.
OwnerPartyName	string	The name associated with the owner of the sales lead.
OwnerResourceOrgId	long	The unique identifier for the organization to which the lead owner belongs.
OwnerTreeCode	string	The tree code of the resource hierarchy to which the lead owner belongs.
OwnerTreeStructureCode	string	The tree structure code of the resource hierarchy to which the lead owner belongs.
OwnerTreeVersionId	string	The tree version identifier of the resource hierarchy to which the lead owner belongs.
PartnerId	long	The unique identifier of the partner.
PartnerPartyName	string	The name associated with the primary partner of the sales lead. This is a deal specific attribute.
PartnerProgramId	long	A reference to the partner program in which the primary partner associated with the sales lead is enrolled. This is a deal specific attribute.
PartnerProgramName	string	The name of the partner program in which the primary partner associated with the sales lead is enrolled. This is a deal specific attribute.
PartnerType	string	Indicates the type of the primary partner associated with the sales lead. This is a deal specific attribute.
PartnerTypeMeaning	string	The meaning of the type of primary partner associated with the sales lead. This is a deal specific attribute.

Name	Type	Description
PostalPlus4Code	string	Four digit extension to the United States Postal ZIP code.
PrimaryContactAddress1	string	The first line of address associated with the primary contact of the lead.
PrimaryContactAddress2	string	The second line of address associated with the primary contact of the lead.
PrimaryContactAddress3	string	The third line of address associated with the primary contact of the lead.
PrimaryContactAddress4	string	The fourth line of address associated with the primary contact of the lead.
PrimaryContactCity	string	The city where the primary contact of the lead is located.
PrimaryContactCountry	string	The country where the primary contact of the lead is located.
PrimaryContactCountryName	string	Full name associated with primary contact's country code.
PrimaryContactCounty	string	The county where the primary contact of the lead is located.
PrimaryContactDoNotCallFlag	boolean	Do not call flag set at person level for primary contact associated with sales lead.
PrimaryContactDoNotContactFlag	boolean	Do not contact flag set at person level for primary contact associated with sales lead.
PrimaryContactDoNotEmailFlag	boolean	The do not email flag set at person level for primary contact associated with sales lead.
PrimaryContactDoNotMailFlag	boolean	The do not mail flag set at person level for primary contact associated with sales lead.
PrimaryContactEmailAddress	string	The email address of the primary sales lead contact on the lead.
PrimaryContactFormattedPhoneNumber	string	The formatted version of the phone number for the primary contact on the sales lead.
PrimaryContactId	long	The unique identifier of the sales lead contact marked as a primary lead contact.

Name	Type	Description
PrimaryContactPartyName	string	The name associated with the primary lead contact.
PrimaryContactPartyStatus	string	Status of the primary contact associated with the sales lead.
PrimaryContactPartyType	string	The relationship type for the primary contact of the lead.
PrimaryContactPersonFirstName	string	The first name of the primary contact for a lead.
PrimaryContactPersonLastName	string	The last name of the primary contact for a lead.
PrimaryContactPersonMiddleName	string	The middle name of the primary contact for a lead.
PrimaryContactPersonProfileId	long	The unique identifier for the sales lead primary contact person row to get dnc flags.
PrimaryContactPostalCode	string	The zip code of the location where the primary contact of the lead is located.
PrimaryContactPrimaryAddress	string	The primary address of the primary contact associated with the sales lead.
PrimaryContactProvince	string	The province where the primary contact of the lead is located.
PrimaryContactRelationshipId	long	The unique identifier of the relationship that a primary contact has with the parent organization.
PrimaryContactSellToAddress	string	The sell-to address of the primary contact associated with the sales lead.
PrimaryContactState	string	The state where the primary contact of the lead is located.
PrimaryContactTitle	string	The title of the primary contact for a lead.
PrimaryContactURL	string	The URL address pertaining to the primary contact for a lead.
PrimaryInventoryItemId	long	The unique identifier of the primary product associated with a lead.

Name	Type	Description
PrimaryInventoryOrgId	long	The unique identifier of the organization to which the primary product associated with a lead belongs.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryProductGroupId	long	The unique identifier of the primary product group associated with a lead.
ProdNameOrGroupName	string	The name of the product associated with a lead.
ProductGroupDescription	string	The description of the product or product group associated with a lead.
ProductGroupName	string	The name of the product group associated with a lead.
ProgramName	string	The name of the partner program in which the primary partner associated with the sales lead is enrolled. This is a deal specific attribute.
Project	string	The customer project identified for the sales lead.
QualificationScore	long	The qualification score for a lead.
QualifiedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date when the sales lead was qualified.
QualifiedDateTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the sales lead was qualified.
Rank	string	The rank associated with the sales lead.
RankMeaning	string	The meaning associated with specific lead rank.
RankSetId	long	The identifier of the rank list set identifier.

Name	Type	Description
ReassignComment	string	The comment provided by a user while requesting the lead reassignment.
ReassignReasonCode	string	The predefined code used to indicate the reason for lead reassignment.
ReassignReasonCodeSetId	long	The reassign reason of the list set identifier.
RegistrationNumber	string	The registration number of the sales lead. This unique identifier is generated when the sales lead is approved. This is a deal specific attribute.
RegistrationStatus	string	The approval status of the sales lead. This is a deal specific attribute.
RegistrationStatusMeaning	string	The status of the approval request for the partner registered lead.
RegistrationType	string	Indicates the registration type of the sales lead. This is a deal specific attribute.
RegistrationTypeMeaning	string	Indicates the meaning of the registration type of the sales lead. This is a deal specific attribute.
RejectByTerritoryId	long	The unique identifier of the territory of the sales representative who rejected the sales lead.
RejectByTerritoryVersionId	long	The version identifier of the territory of the sales representative who rejected the sales lead.
RejectByUserId	long	The unique identifier of the sales representative who rejected the sales lead.
RejectComment	string	The comments provided by the sales representative who rejected the sales lead.
RejectReasonCdMeaning	string	The meaning associated with the codes for lead rejection reason.
RejectReasonCode	string	The predefined code used to indicate the reason for rejecting a lead.
RejectReasonCodeSetId	long	The identifier of the reject reason list set.
RejectedCount	long	The number of times a lead has been rejected by various users.

Name	Type	Description
RejectedDateTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the sales lead was rejected.
RejectedTimestamp	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time when a lead was rejected.
RetireComment	string	The comments recorded when the sales lead is moved to a retired status.
RetireReasonCdMeaning	string	The meaning associated with the codes for lead retirement reason.
RetireReasonCode	string	The predefined code used to indicate the reason for retiring a lead.
RetireReasonCodeSetId	long	The identifier of the retire reason list set.
RetiredDateTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the sales lead was moved to a retired status.
RetiredTimestamp	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time when a lead was retired.
SalesChannel	string	Indicates the sales channel responsible for following up on the sales lead.
SalesChannelMeaning	string	The meaning of the sales channel associated with the sales lead.
Score	long	The score associated with the sales lead. The score is computed based on the scoring rules.
SourceCode	string	The marketing source code associated with the sales lead.
StatusCdMeaning	string	The meaning associated with the codes defined to indicate lead status.
StatusCode	string	The pre-defined code used to indicate the status.
Timeframe	string	The time frame associated with the sales lead.
TimeframeSetId	long	The identifier of the time frame list set.

Name	Type	Description
ToReassignFlag	boolean	Identifies leads that are marked for reassignment.
ToRescoreFlag	boolean	Identifies leads that are marked for scoring.
UniqueName	string	The unique name is a concatenation of the lead name and the time stamp.
UpdateFlag	boolean	This flag controls if the user has access to update the record
WorkPhoneAreaCode	string	The work phone area code for the sales lead contact.
WorkPhoneCountryCode	string	The work phone country code for the sales lead contact.
WorkPhoneNumber	string	The work phone number for the sales lead contact.

Sales Lead Contacts

The contact associated with the sales lead.

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/}MklLeadTcMembers

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Sales Lead Contacts*
Contained by	*Sales Lead*
Contained by	*Service Lead Service Data Object*
Handled by	*Sales Lead Service Version 2*
Handled by	*Sales Lead Service Version 1*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
City	string	The name of the city.
ContactDoNotCallFlag	boolean	The indicator set at person level for the sales lead contact.
ContactDoNotContactFlag	boolean	The indicator set at person level for the sales lead contact.
ContactDoNotEmailFlag	boolean	The indicator set at person level for the sales lead contact.
ContactDoNotMailFlag	boolean	The indicator set at person level for the sales lead contact.
ContactNumber	string	The contact number of the sales lead contact.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
FormattedPhoneNumber	string	The formatted phone number.
JobTitle	string	The job title of the sales lead contact.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
LeadId	long	The unique identifier of the sales lead for the sales lead contact.
LeadMemberId	long	The primary key for lead contact. • Primary Key
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The organization contact identifier of the sales lead contact.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyStatus	string	The status of the sales lead contact.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUsageCode	string	The usage context of a party's contact point.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonJobTitle	string	The person Job title of the sales lead contact.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonProfileId	long	The person profile identifier of the sales lead contact.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PhoneAreaCode	string	The area code prefix for the phone number.

Name	Type	Description
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PostalCode	string	The postal code element of the address.
PrimaryFlag	boolean	Indicates whether the lead contact is primary. Primary lead contact is also the lead owner.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
RelationshipId	long	The relationship identifier for the record.
Role	string	The role of lead contact in the context of the lead.
State	string	The name of the state.

Sales Lead Products

The product associated with a sales lead.

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/}MklProdAssoc

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Sales Lead Products*

Relationship Type	Object or Service
Contained by	*Sales Lead*
Contained by	*Service Lead Service Data Object*
Handled by	*Sales Lead Service Version 2*
Handled by	*Sales Lead Service Version 1*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Amount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount associated with the sales lead product.
AverageTimeToClose	decimal	Indicates average time to close for the sales lead product.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Description	string	The free text description of the record.
EstimatedUnitPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated unit price for the lead product.
InventoryItemId	long	The inventory item identifier associated with the lead product.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
LeadId	long	The unique identifier of the sales lead for the sales lead product.

Name	Type	Description
LeadProductId	long	The primary key that represents the identifier of the current lead product. • Primary Key
LeadProductNumber	string	This is a public surrogate key for the table and is defaulted with a unique number. It cannot be null.
LongDescription	string	The long description of the sales lead product.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationId	long	The inventory organization identifier associated with the lead product.
PrimaryFlag	boolean	Indicates whether this product is a primary product for this lead.
ProductGroupDescription	string	The description of the product group.
ProductGroupId	long	The unique identifier of the product group.
ProductGroupName	string	The name of the product group if the record represents a product group.
ProductName	string	The name of product or product group. It is the same as the product name if the record represents a product. It is the same as the product group name if the record represents a product group.
ProductType	string	Indicates if the record represents a product or a product group.
Quantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The product quantity identified for the product on the lead.
UOMCode	string	The unit of measure associated with the sales lead product line.

Sales Lead Resources

The resource associated with the sales lead.

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/}MklLeadResources

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Sales Lead Resources*
Contained by	*Sales Lead*
Contained by	*Service Lead Service Data Object*
Handled by	*Sales Lead Service Version 2*
Handled by	*Sales Lead Service Version 1*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	Access level for the sale team member on the lead.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedPhoneNumber	string	The formatted phone number.

Name	Type	Description
FunctionalRole	string	Indicates the role played by the sales team resource for handling the sales lead.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
LeadId	long	The unique identifier of the sales lead for the sales lead resource.
LeadResourceId	long	The unique identifier of the sales lead resource. • Primary Key
ManagerName	string	The manager name of the resource.
ManagerPartyId	long	The party identifier of the manager of the resource in the organizational hierarchy.
Name	string	The name of the lead resource.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgTreeCode	string	The resource organization hierarchy code associated with the resource organization which is associated with the lead resource.
OrgTreeStructureCode	string	The resource organization hierarchy structure code associated with the resource organization hierarchy which is associated with the resource organization associated with the lead resource.
OrgTreeVersionId	string	The resource organization hierarchy version associated with the resource organization which is associated with the lead resource.
PartnerContactFlag	boolean	The indicator to identify whether the resource is a partner contact.
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.

Name	Type	Description
PrimaryFlag	boolean	Indicates whether the record represents the primary resource on the lead. Primary resource on the lead is the same as the lead owner.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
ResourceId	long	The unique identifier of the resource.
ResourceOrgId	long	The resource organization identifier associated with the lead resource.
ResourceUsername	string	The sign in name of the resource.
RoleName	string	The name of the role of the lead resource in the context of the sales lead.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.

Sales Lead Service Version 1

Service to operate on leads. The supported operations are create, update, delete, and search.
WARNING: This service has been deprecated and is being replaced with Sales Lead Service Version 2 (oracle.apps.marketing.leadMgmt.leads.leadService.SalesLeadService).

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/}LeadPublicService

Service WSDL URL: https://servername/crmService/LeadPublicService?WSDL

Logical Business Objects

- CRM : Lead Management : Sales Lead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Sales Lead Service Version 2*

Relationship Type	Object or Service
Handles	*Sales Lead Resource*
Handles	*Sales Lead Product*
Handles	*Service Lead Service Data Object*
Handles	*Sales Lead Contact*

Operations

- *assignLead*
- *convertLeadToOpportunity*
- *qualifyLead*
- *rankLead*
- *scoreLead*
- *getLead*
- *createLead*
- *updateLead*
- *deleteLead*
- *findLead*
- *getLeadContact*
- *createLeadContact*
- *updateLeadContact*
- *deleteLeadContact*
- *findLeadContact*
- *getLeadProduct*
- *createLeadProduct*
- *updateLeadProduct*
- *deleteLeadProduct*
- *findLeadProduct*
- *getLeadResource*
- *createLeadResource*
- *updateLeadResource*
- *deleteLeadResource*
- *findLeadResource*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

assignLead

A web service method that assigns sales team to the lead.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the assignLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the assignLead web service method.

convertLeadToOpportunity

A web service method that converts a Lead record to an opportunity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required parameter of the convertLeadToOpportunity web service method. The lead record matching the ID input is used as source for the opportunity.

Response Payload

Element Name	Type	Description
result	string	The return value of the convertLeadToOppportunity web service method. It includes the full set of attributes of the opportunity record.

qualifyLead

A web service method that qualifies a lead based on qualification rules.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the qualifyLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the qualifyLead web service method.

rankLead

Assigns a pre-defined rank on the lead based on ranking rules.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the rankLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the rankLead web service method.

scoreLead

A web service method that scores an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the scoreLead web service method. It is the ID of the lead record that would need to be scored.

Response Payload

Element Name	Type	Description
result	string	The return value of the scoreLead web service method.

getLead

A web service method that queries a single record of Oracle Fusion Lead Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the getLead web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Service Lead Service Data Object*	The return value of the getLead web service method. It includes the full set of attributes of record.

createLead

A web service method that creates Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceLead1	*Service Lead Service Data Object*	A required input parameter of the createLead web service method. The input object include the attribute values that the lead record is created with.

Response Payload

Element Name	Type	Description
result	*Service Lead Service Data Object*	The return value of the createLead web service method. It includes the full set of attributes of the record.

updateLead

A web service method that updates an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceLead1	*Service Lead Service Data Object*	A required parameter of the updateLead web service method. The record matching the ID specified in this input lead contact is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Service Lead Service Data Object*	The return value of the updateLead web service method. It includes the full set of attributes of the record.

deleteLead

A web service method that deletes an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceLead1	*Service Lead Service Data Object*	A required input parameter of the deleteLead web service method. The record matching the input attribute values specified in the lead is deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteLead.

findLead

A web service method that queries a single record or set of records of Oracle Fusion Lead Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLead web service method. The filter criteria is the cumulative set of attribute criteria that will identify records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findLead.

Response Payload

Element Name	Type	Description
result	*Service Lead Service Data Object*	The return value of the findLead web service method. It includes the full set of attributes of records queried.

getLeadContact

A web service method that queries a single record of Oracle Fusion Lead Contact Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadMemberId	long	A required input parameter of the getLeadContact web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the getLeadContact web service method. It includes the full set of attributes of record.

createLeadContact

A web service method that create Oracle Fusion Lead Contact Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadContacts	*Sales Lead Contacts*	A required input parameter of the createLeadContact web service method. It includes the attribute values that the record is created with.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the createLeadContact web service method. It includes the full set of attributes of the record.

updateLeadContact

A web service method that updates an Oracle Fusion Lead Contact Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadContacts	*Sales Lead Contacts*	A required parameter of the updateLeadContact web service method. The record matching the ID specified in this input lead contact is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the updateLeadContact web service method. It includes the full set of attributes of the record.

deleteLeadContact

A web service method that deletes an Oracle Fusion Lead Contact Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadContacts	*Sales Lead Contacts*	A required input parameter of the deleteLeadContact web service method. The lead contact record matching the input attribute values specified are deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteLeadContact.

findLeadContact

A web service method that queries a single record or set of records of Oracle Fusion Lead Contact Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadContact web service method. The filter criteria is the cumulative set of attribute criteria that identifies records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findLeadContact.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the findLeadContact web service method. It includes the full set of attributes of records queried.

getLeadProduct

A web service method that queries a single record of Oracle Fusion Lead Product Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadProductId	long	A required input parameter of the getLeadProduct web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	The return value of the getLeadProduct web service method. It includes the full set of attributes of record.

createLeadProduct

A web service method that create Oracle Fusion Lead Product Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadProducts	*Sales Lead Products*	The return value of the createLeadProduct web service method. It includes the full set of attributes of the record.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	A required input parameter of the createLeadProduct web service method. The input object includes the attribute values that the record will be created with.

updateLeadProduct

A web service method that updates an Oracle Fusion Lead Product Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadProducts	*Sales Lead Products*	A required parameter of the updateLeadProduct web service method. The record matching the ID specified in this input lead product is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	The return value of the updateLeadProduct web service method. It includes the full set of attributes of the record.

deleteLeadProduct

A web service method that deletes an Oracle Fusion Lead Product Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadProducts	*Sales Lead Products*	A required input parameter of the deleteLeadProduct web service method. The record matching the input attribute values specified in the lead product are deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteLeadProduct.

findLeadProduct

A web service method that queries a single record or set of records of Oracle Fusion Lead Product Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadResource web service method. The filter criteria is a cumulative set of attribute criteria that will identify records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findLeadProduct.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	The return value of the findLeadProduct web service method. It includes the full set of attributes of records queried.

getLeadResource

A web service method that queries a single record of Oracle Fusion Lead Resource Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadResourceId	long	A required input parameter of the getLeadResource web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the getLeadResource web service method. It includes the full set of attributes of record.

createLeadResource

A web service method that create Oracle Fusion Lead Resource Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadResources	*Sales Lead Resources*	A required input parameter of the createLeadResource web service method. The input object It includes the attribute values that the record are created with.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the createLeadResource web service method. It includes the full set of attributes of the record.

updateLeadResource

A web service method that updates an Oracle Fusion Lead Resource Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadResources	*Sales Lead Resources*	A required parameter of the updateLeadResource web service method. The record matching the ID specified in this input lead resource is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the updateLeadResource web service method. It includes the full set of attributes of the record.

deleteLeadResource

A web service method that deletes an Oracle Fusion Lead Resource Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadResources	*Sales Lead Resources*	A required input parameter of the deleteLeadResource web service method. The record matching the input attribute values specified in the Lead Resource is deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteLeadResource.

findLeadResource

A web service method that queries a single record or set of records of Oracle Fusion Lead Resource Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadResource web service method. The filter criteria is a cumulative set of attribute criteria that identifies the records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findLeadResource.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the findLeadResource web service method. It includes the full set of attributes of records queried.

getDfltObjAttrHints

Retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated. The parameter is present in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKL_VIEW_SALES_LEAD_PRIV	View Sales Lead	Allows viewing sales leads. A sales lead is a prospect or existing customer who has interest or the potential for interest in a product or service being sold.
All Operations	MKL_MANAGE_SALES_LEAD_PRIV	Manage Sales Lead	Allows web services management of sales leads including modifying

Operation Name	Privilege Code	Privilege Name	Privilege Description
			lead attributes and accepting or rejecting sales leads.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			supporting roles include territory development, event and webinar strategies.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Sales Lead Service Version 3

Service to convert, reject, and accept actions in addition to create, update, delete, and search for leads.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}LeadIntegrationService

Service WSDL URL: https://servername/crmService/LeadIntegrationService?WSDL

Logical Business Objects

- CRM : Lead Management : Sales Lead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Previous version is	*Sales Lead Service Version 2*
Handles	*Sales Lead Resource*
Handles	*Sales Lead Contact*
Handles	*Sales Lead Product*

Relationship Type	Object or Service
Handles	*Sales Lead*

Operations

- *assignLead*
- *convertLeadToOpportunity*
- *qualifyLead*
- *rankLead*
- *reassignLead*
- *scoreLead*
- *submitDeal*
- *acceptLead*
- *rejectLead*
- *retireLead*
- *getSalesLead*
- *createSalesLead*
- *updateSalesLead*
- *deleteSalesLead*
- *mergeSalesLead*
- *findSalesLead*
- *processSalesLead*
- *getSalesLeadContact*
- *createSalesLeadContact*
- *updateSalesLeadContact*
- *deleteSalesLeadContact*
- *findSalesLeadContact*
- *getSalesLeadProduct*
- *createSalesLeadProduct*
- *updateSalesLeadProduct*
- *deleteSalesLeadProduct*
- *findSalesLeadProduct*
- *getSalesLeadResource*
- *createSalesLeadResource*
- *updateSalesLeadResource*
- *deleteSalesLeadResource*
- *findSalesLeadResource*
- *getDfltObjAttrHints*

- *getServiceLastUpdateTime*
- *getEntityList*

assignLead

A web service method that assigns sales team to the lead.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the assignLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the assignLead web service method.

convertLeadToOpportunity

A web service method that converts a lead record to an opportunity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required parameter of the convertLeadToOpportunity web service method. The lead record matching the ID input is used as source for the opportunity.

Response Payload

Element Name	Type	Description
result	string	The return value of the convertLeadToOppportunity web service method. It includes the full set of attributes of the opportunity record.

qualifyLead

A web service method that qualifies a lead based on qualification rules.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the qualifyLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the qualifyLead web service method.

rankLead

A web service method that assigns a pre-defined rank on the lead based on ranking rules.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the rankLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the rankLead web service method.

reassignLead

A web service method that reassigns an Oracle Fusion Lead Object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
mode	string	A required input parameter of the reassignLead web service method. Values: IMDT_AUTO_ASSGMNT: Reassigns the lead immediately, AUTO_ASSGMNT: Flags the lead for reassignment to be picked-up next time assignment runs, MAN_ASSGMNT: only reassign the owners with the parameter value passed.
leadId	long	A required input parameter of the reassignLead web service method. It is the ID of the lead record that would need to be reassigned.
ownerId	long	An optional input parameter of the reassignLead web service method. It is required when the mode is MAN_ASSGMNT. It is the ID of the resource record to be set as the owner for the lead.
organizationId	long	An optional input parameter of the reassignLead web service method. It is used when the mode is MAN_ASSGMNT. It is the organization ID of the resource record to be set as the owner for the lead.
reason	string	An optional input parameter of the reassignLead web service method. It is the reason for reassignment.
comment	string	An optional input parameter of the reassignLead web service method. It is the comment recorded for the lead while being reassigned.

Response Payload

Element Name	Type	Description
result	string	The return value of the reassignLead web service method.

scoreLead

A web service method that scores an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the scoreLead web service method. It is the ID of the lead record that needs to be scored.

Response Payload

Element Name	Type	Description
result	string	The return value of the scoreLead web service method.

submitDeal

A web service method that submits an Oracle Fusion Lead Object record for registration.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the submitDeal web service method. It is the ID of the lead record to be registered.

Response Payload

Element Name	Type	Description
result	string	The return value of the submitDeal web service method.

acceptLead

A web service method that accepts an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the acceptLead web service method. It is the ID of the lead record that needs to be accepted.

Response Payload

Element Name	Type	Description
result	string	The return value of the reassignLead web service method.

rejectLead

A web service method that rejects an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the rejectLead web service method. It is the ID of the lead record that needs to be rejected.
rejectReason	string	An optional input parameter of the rejectLead web service method. It is the reason for rejecting the lead.
rejectComments	string	An optional input parameter of the rejectLead web service method. It is the comment recorded for the lead while getting rejected.

Response Payload

Element Name	Type	Description
result	string	The return value of the rejectLead web service method.

retireLead

A web service method that retires a lead.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the retireLead web service method that identifies the lead record by ID.
retireReason	string	An optional input parameter of the retireLead web service method. It is the reason for retiring a lead.
retireComments	string	An optional input parameter of the retireLead web service method. It is the comment recorded for the lead while getting retired.

Response Payload

Element Name	Type	Description
result	string	The return value of the retireLead web service method.

getSalesLead

A web service method that queries a single record of Oracle Fusion Lead Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the getLead web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLeadResult	The return value of the getLead web service method. It includes the full set of attributes of record.

createSalesLead

A web service method that creates Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLead	*Sales Lead*	A required input parameter of the createLead web service method. The input object includes the attribute values that the lead record will be created with.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLeadResult	The return value of the createLead web service method. It includes the full set of attributes of the record.

updateSalesLead

A web service method that updates an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLead	*Sales Lead*	A required parameter of the updateLead web service method. The record matching the ID specified in this input lead contact is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLeadResult	The return value of the updateLead web service method. It includes the full set of attributes of the record.

deleteSalesLead

A web service method that deletes an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLead	*Sales Lead*	A required input parameter of the deleteLead web service method. The record matching the input attribute values specified in the Lead is deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The parameter is not applicable for the method deleteSalesLead.

mergeSalesLead

A web service method that either creates a single record of Oracle Fusion Lead Object or updates a record by the given ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLead	*Sales Lead*	A required parameter of the mergeSalesLead web service method. The record matching the ID specified in this input is updated. If no ID is specified, the record is created instead.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLeadResult	The return value of the mergeLead web service method. It includes the full set of attributes of the record.

findSalesLead

A web service method that queries a single record or set of records of Oracle Fusion Lead Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLead web service method. The filter criteria is the cumulative set of attribute criteria that identifies records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findSalesLead.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the findLead web service method. It includes the full set of attributes of records queried.

processSalesLead

A web service method that creates or updates Oracle Fusion Lead Object record in bulk.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	As a input parameter value either of create, merge or update needs to be passed.
salesLead	*Sales Lead*	A required parameter of the processLead web service method. The list of lead input records to be created or merged or updated.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	It has three parts. For the first parameter, value can be full which means full set of lead attributes to be returned, value of key means only lead ID values to be returned, value of none means no value returned. For the second parameter, similar to first parameter but related to exceptions. For the third mandatory

Element Name	Type	Description
		parameter, indicates true or false for partial failure allowed or not.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the processLead web service method. It can be none or a list of only the lead IDs or a list of full set of lead records.

getSalesLeadContact

A web service method that queries a single record of Oracle Fusion Lead Contact Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadMemberId	long	A required input parameter of the getLeadContact web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLeadContactResult	The return value of the getLeadContact web service method. It includes the full set of attributes of record.

createSalesLeadContact

A web service method that creates Oracle Fusion Lead Contact Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadContact	*Sales Lead Contacts*	A required input parameter of the createLeadContact web service method. It

Element Name	Type	Description
		includes the attribute values that the record is created with.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLeadContactResult	The return value of the createLeadContact web service method. It includes the full set of attributes of the record.

updateSalesLeadContact

A web service method that updates an Oracle Fusion Lead Contact Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadContact	*Sales Lead Contacts*	A required parameter of the updateLeadContact web service method. The record matching the ID specified in this input lead contact is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLeadContactResult	The return value of the updateLeadContact web service method. It includes the full set of attributes of the record.

deleteSalesLeadContact

A web service method that deletes an Oracle Fusion Lead Contact Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadContact	*Sales Lead Contacts*	A required input parameter of the deleteLeadContact web service method. The lead contact record matching the input attribute values specified are deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The parameter is not applicable for the method deleteSalesLeadContact.

findSalesLeadContact

A web service method that queries a single record or set of records of Oracle Fusion Lead Contact Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadContact web service method. The filter criteria is the cumulative set of attribute criteria that identifies records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findSalesLeadContact.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the findLeadContact web service method. It includes the full set of attributes of records queried.

getSalesLeadProduct

A web service method that queries a single record of Oracle Fusion Lead Product Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadProductId	long	A required input parameter of the getLeadProduct web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLeadProductResult	The return value of the getLeadProduct web service method. It includes the full set of attributes of record.

createSalesLeadProduct

A web service method that creates Oracle Fusion Lead Product Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadProduct	*Sales Lead Products*	The return value of the createLeadProduct web service method. It includes the full set of attributes of the record.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLeadProductResult	A required input parameter of the createLeadProduct web service method. The input object includes the attribute values that the record is created with.

updateSalesLeadProduct

A web service method that updates an Oracle Fusion Lead Product Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadProduct	*Sales Lead Products*	A required parameter of the updateLeadProduct web service method. The record matching the ID specified in this input lead product is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLeadProductResult	The return value of the updateLeadProduct web service method. It includes the full set of attributes of the record.

deleteSalesLeadProduct

A web service method that deletes an Oracle Fusion Lead Product Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadProduct	*Sales Lead Products*	A required input parameter of the deleteLeadProduct web service method. The record matching the input attribute values specified in the lead product are deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The parameter is not applicable for the method deleteSalesLeadProduct.

findSalesLeadProduct

A web service method that queries a single record or set of records of Oracle Fusion Lead Product Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadResource web service method. The filter criteria is a cumulative set of attribute criteria that identifies records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findSalesLeadProduct.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	The return value of the findLeadProduct web service method. It includes the full set of attributes of records queried.

getSalesLeadResource

A web service method that queries a single record of Oracle Fusion Lead Resource Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadResourceId	long	A required input parameter of the getLeadResource web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLeadResourceResult	The return value of the getLeadResource web service method. It includes the full set of attributes of record.

createSalesLeadResource

A web service method that creates Oracle Fusion Lead Resource Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadResource	*Sales Lead Resources*	A required input parameter of the createLeadResource web service method. The input object includes the attribute values that the record is created with.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLeadResourceResult	The return value of the createLeadResource web service method. It includes the full set of attributes of the record.

updateSalesLeadResource

A web service method that updates an Oracle Fusion Lead Resource Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadResource	*Sales Lead Resources*	A required parameter of the updateLeadResource web service method. The record matching the ID specified in this input lead resource is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLeadResourceResult	The return value of the updateLeadResource web service method. It includes the full set of attributes of the record.

deleteSalesLeadResource

A web service method that deletes an Oracle Fusion Lead Resource Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadResource	*Sales Lead Resources*	A required input parameter of the deleteLeadResource web service method. The record matching the input attribute values specified in the Lead Resource is deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	The parameter is not applicable for the method deleteSalesLeadResource.

findSalesLeadResource

A web service method that queries a single record or set of records of Oracle Fusion Lead Resource Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadResource web service method. The filter criteria is a cumulative set of attribute criteria that identifies record queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findSalesLeadResource.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the findLeadResource web service method. It includes the full set of attributes of records queried.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated. The parameter is present in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKL_VIEW_SALES_LEAD_PRIV	View Sales Lead	Allows viewing sales leads. A sales lead is a prospect or existing customer who has interest or the potential for interest in a product or service being sold.
All Operations	MKL_SET_UP_SALES_LEAD_PRIV	Set Up Sales Lead	Allows setting up common configuration settings, including assignment manager, assessment templates, appointments, interactions, notes, tasks, standard lookup types, profile options and descriptive flexfields for sales leads.
All Operations	MKL_MANAGE_SALES_LEAD_PRIV	Manage Sales Lead	Allows web services management of sales leads including modifying lead attributes and accepting or rejecting sales leads.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
MKL_SET_UP_SALES_LEAD_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			application users to maintain consistent financial application setup, rules, and access.
MKL_SET_UP_SALES_LEAD_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_EXECUTION_MANAGEMENT_DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			administration activities of Partner Import
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_ CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_ RECOMMENDATION_ANALYSIS_ DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKL_SALES_LEAD_ QUALIFIER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_PARTNER_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_ PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZCA_REVIEW_CRM_ APPROVAL_TRANSACTIONS_ ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Sales Lead

The transaction record created when a party has expressed an interest in a product or service. It represents a selling opportunity.

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLead

Logical Business Objects

- CRM : Lead Management : Sales Lead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Sales Lead*
Handled by	*Sales Lead Service Version 3*

Sales Lead

The transaction record created when a party has expressed an interest in a product or service. It represents a selling opportunity.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/leadMgmt/leads/leadService/}MklLead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note*
Contains	*Sales Lead Resources*
Contains	*Sales Lead Products*
Contains	*Sales Lead Contacts*
Extended by	*Sales Lead*
Handled by	*Sales Lead Service Version 2*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AcceptedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the lead was accepted by a resource assigned to it.
AcceptedDateTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Date and time when the sales lead is accepted by a resource assigned to it.
AddrElementAttribute1	string	Additional address element to support flexible address format.
AddrElementAttribute2	string	Additional address element to support flexible address format.
AddrElementAttribute3	string	Additional address element to support flexible address format.
AddrElementAttribute4	string	Additional address element to support flexible address format.
AddrElementAttribute5	string	Additional address element to support flexible address format.

Name	Type	Description
AddressLinesPhonetic	string	Phonetic or Kana representation of the Kanji address lines (used in Japan).
ApprovalDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when a partner registered lead is approved by internal channel manager.
ApprovalDateTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the sales lead was approved. This is applicable to deal registrations only.
ApprovalTaskId	string	The unique identifier of the approval task pertaining to a partner registered lead.
ApproverId	long	The party identifier associated with the approver of the lead registration record.
AssetId	long	Unique identifier for the Asset associated with the Sales Lead.
AssetNumber	string	Unique Number for the Asset associated with the Sales Lead.
AssetSerialNumber	string	Serial Number for the Asset associated with the Sales Lead.
AssignmentStatusCdMeaning	string	Defines the current assignment related status for the lead that is, whether the lead is assigned or unassigned and so on.
AssignmentStatusCode	string	Includes the current assignment related status for the lead. For example, whether the lead is assigned or unassigned.
BranchCode	string	The branch code pertaining to an organization.
BudgetAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The budget amount associated with the sales lead.
BudgetCurrencyCode	string	The currency code associated with the budget amount associated with the sales lead.
BudgetStatus	string	The budget status associated with the budget amount associated with the sales lead.
BudgetStatusSetId	long	The identifier of the budget status list set.

Name	Type	Description
Building	string	Specific building name or number at a given address.
BusinessUnitId	long	The business unit identifier associated with the business unit of the sales lead creator.
BusinessUnitName	string	The name of the business unit associated with the sales lead.
CampaignId	long	The unique identifier for the campaign.
CampaignName	string	The name of the campaign associated with the sales lead.
ChannelType	string	Indicates the channel through which the lead contacted the company.
ChannelTypeMeaning	string	Indicates the channel through which this lead contacted the company.
ChannelTypeSetId	long	The identifier of the channel type list set.
ClassCode1	string	The auxiliary dimension for the Account.
ClassCode2	string	The auxiliary dimension for the Account.
ClassCode3	string	The auxiliary dimension for the Account.
ClassCode4	string	The auxiliary dimension for the Account.
ContactTimezoneCd	string	Preferred time zone of the contact pursued on the lead.
ConvCurrencyCode	string	The currency code used to convert the lead currency. This is typically the corporate currency.
ConvExchangeRate	decimal	The exchange rate used to convert the lead currency to the corporate currency.
ConvRateType	string	The rate type used to convert the lead currency to the corporate currency.
ConvertedDateTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the sales lead was converted to an opportunity.

Name	Type	Description
ConvertedTimestamp	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates when the lead was converted to an opportunity.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreationDateFormatted	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date and time when the record is created.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CurrencyConversionDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The currency conversion date.
CurrencyMeaning	string	The currency code for the lead.
CustomerAddress1	string	The first line of the identifying address.
CustomerAddress2	string	The second line of the identifying address.
CustomerAddress3	string	The third line of the identifying address.
CustomerAddress4	string	The fourth line of the identifying address.
CustomerCategoryCode	string	The category code for a customer.
CustomerCity	string	The city associated with the sale that is associated with the lead customer.
CustomerCountry	string	The country in which customer is located.
CustomerCurrencyFyPotentialRevenue	decimal	The potential annual revenues for a customer.
CustomerDoNotCallFlag	boolean	Indicates the Do not call flag set for sales lead customer (person).
CustomerDoNotContactFlag	boolean	Indicates the Do not contact flag set for sales lead customer (person).
CustomerDoNotEmailFlag	boolean	Indicates the do not email flag set for sales lead customer (person).

Name	Type	Description
CustomerDoNotMailFlag	boolean	Indicates the do not mail flag set for sales lead customer (person).
CustomerEmployeesTotal	decimal	The total number of employees at a customer site.
CustomerId	long	The customer identifier. It is a reference to the customer record in the TCA schema.
CustomerIdenAddrLocationId	long	The address location identifier pertaining to a customer.
CustomerNeed	string	Indicates needs that the lead product serves for the lead customer.
CustomerPartyName	string	The name of the customer.
CustomerPartyType	string	The type of customer.
CustomerPartyUniqueName	string	The concatenation of customer name with postal code to make it unique.
CustomerPersonProfileId	long	The unique identifier of the sales lead customer (person) to get the dnc flags.
CustomerPostalCode	string	The code in which customer is located.
CustomerPrimaryAddress	string	The primary address of the customer associated with the sales lead.
CustomerPrimaryEmailAddress	string	The primary email address of the customer associated with the sales lead.
CustomerPrimaryPhoneNumber	string	The primary formatted phone number of the customer associated with the sales lead.
CustomerRegistryId	string	The customer registry identifier.
CustomerSICCode	string	The industry code pertaining to the customer.
CustomerSellToAddress	string	The sell-to address of the customer associated with the sales lead.
CustomerState	string	The state in which customer is located.

Name	Type	Description
CustomerStatus	string	The status of the customer associated with the sales lead.
CustomerURL	string	The URL address pertaining to the customer.
DaysUntilExpiration	int	The number of days prior to expiration of the partner registered lead.
DealAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount attributed to a lead.
DealTypeSetId	long	The identifier of the deal type list set.
DecisionMakerIdentifiedFlag	boolean	Indicates if the decision maker at customer site is identified.
DeleteFlag	boolean	This flag controls if the user has access to delete the record
Description	string	The free text description of the record.
Distance	decimal	Distance from the input location.
EstimatedCloseDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The estimated close date for the deal once registered.
ExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The expiration date associated with the sales lead.
FloorNumber	string	Specific floor number at a given address or in a particular building when building number is provided.
FollowupTimestamp	{http://xmlns.oracle.com/adf/svc/types/}dateDate	Indicates when the sales lead must be followed up.
IBAssetId	long	Unique identifier for the IB Asset associated with the Sales Lead.
IBAssetNumber	string	Unique number for the IB Asset associated with the Sales Lead.
IBAssetSerialNumber	string	Unique serial number for the IB Asset associated with the Sales Lead.

Name	Type	Description
ImportTaskId	long	The unique identifier of the import activity that resulted in the lead being created.
InventoryItemDescription	string	The description of the product added to a lead.
JobTitle	string	The job title of the primary contact on the sales lead.
LastAssignmentDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the lead was last reassigned.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateDateFormatted	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date and time of the last update of the row.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	Latitude information for the location.
LeadAcceptedFlag	boolean	Indicates if the lead is accepted.
LeadAging	decimal	The number of days elapsed since the lead was created.
LeadCreatedBy	string	Functional WHO: Indicates the user who created this record.
LeadCreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Functional WHO: Indicates the date and time when this record is created.
LeadId	long	The partner type. Indicates the type of partner stamped on the lead. • Primary Key
LeadLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Functional WHO: Indicates the date and time of the last update of the row.
LeadLastUpdatedBy	string	Functional WHO: Indicates the user who last updated the row.
LeadNumber	string	User friendly unique identifier for the lead.

Name	Type	Description
LeadOrigin	string	Origin of the Lead
LongDescription	string	The description of the item.
Longitude	decimal	Longitude information for the location.
MklLeadResources	*Sales Lead Resources*	The lead resource for sales lead.
MklLeadTcMembers1	*Sales Lead Contacts*	The lead contacts for sales lead.
MklProdAssoc1	*Sales Lead Products*	The lead products for sales lead.
Name	string	Lead Name used for identifying the lead.
Note	*Note*	Notes added to the sales lead.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The unique identifier for the primary sales lead contact of the sales lead.
OrganizationSize	string	The size of the organization.
OrganizationType	string	The type of the organization.
OwnerId	long	The party identifier associated with the owner of the sales lead.
OwnerPartyName	string	The name associated with the owner of the sales lead.
OwnerResourceOrgId	long	The unique identifier for the organization to which the lead owner belongs.
OwnerTreeCode	string	The tree code of the resource hierarchy to which the lead owner belongs.
OwnerTreeStructureCode	string	The tree structure code of the resource hierarchy to which the lead owner belongs.

Name	Type	Description
OwnerTreeVersionId	string	The tree version identifier of the resource hierarchy to which the lead owner belongs.
PartnerId	long	The unique identifier of the partner.
PartnerPartyName	string	The name associated with the primary partner of the sales lead. This is a deal specific attribute.
PartnerProgramId	long	A reference to the partner program in which the primary partner associated with the sales lead is enrolled. This is a deal specific attribute.
PartnerProgramName	string	The name of the partner program in which the primary partner associated with the sales lead is enrolled. This is a deal specific attribute.
PartnerType	string	Indicates the type of the primary partner associated with the sales lead. This is a deal specific attribute.
PartnerTypeMeaning	string	The meaning of the type of primary partner associated with the sales lead. This is a deal specific attribute.
PostalPlus4Code	string	Four digit extension to the United States Postal ZIP code.
PrimaryContactAddress1	string	The first line of address associated with the primary contact of the lead.
PrimaryContactAddress2	string	The second line of address associated with the primary contact of the lead.
PrimaryContactAddress3	string	The third line of address associated with the primary contact of the lead.
PrimaryContactAddress4	string	The fourth line of address associated with the primary contact of the lead.
PrimaryContactCity	string	The city where the primary contact of the lead is located.
PrimaryContactCountry	string	The country where the primary contact of the lead is located.
PrimaryContactCountryName	string	Full name associated with primary contact's country code.

Name	Type	Description
PrimaryContactCounty	string	The county where the primary contact of the lead is located.
PrimaryContactDoNotCallFlag	boolean	Do not call flag set at person level for primary contact associated with sales lead.
PrimaryContactDoNotContactFlag	boolean	Do not contact flag set at person level for primary contact associated with sales lead.
PrimaryContactDoNotEmailFlag	boolean	The do not email flag set at person level for primary contact associated with sales lead.
PrimaryContactDoNotMailFlag	boolean	The do not mail flag set at person level for primary contact associated with sales lead.
PrimaryContactEmailAddress	string	The email address of the primary sales lead contact on the lead.
PrimaryContactFormattedPhoneNumber	string	The formatted version of the phone number for the primary contact on the sales lead.
PrimaryContactId	long	The unique identifier of the sales lead contact marked as a primary lead contact.
PrimaryContactPartyName	string	The name associated with the primary lead contact.
PrimaryContactPartyStatus	string	Status of the primary contact associated with the sales lead.
PrimaryContactPartyType	string	The relationship type for the primary contact of the lead.
PrimaryContactPersonFirstName	string	The first name of the primary contact for a lead.
PrimaryContactPersonLastName	string	The last name of the primary contact for a lead.
PrimaryContactPersonMiddleName	string	The middle name of the primary contact for a lead.
PrimaryContactPersonProfileId	long	The unique identifier for the sales lead primary contact person row to get dnc flags.
PrimaryContactPostalCode	string	The zip code of the location where the primary contact of the lead is located.

Name	Type	Description
PrimaryContactPrimaryAddress	string	The primary address of the primary contact associated with the sales lead.
PrimaryContactProvince	string	The province where the primary contact of the lead is located.
PrimaryContactRelationshipId	long	The unique identifier of the relationship that a primary contact has with the parent organization.
PrimaryContactSellToAddress	string	The sell-to address of the primary contact associated with the sales lead.
PrimaryContactState	string	The state where the primary contact of the lead is located.
PrimaryContactTitle	string	The title of the primary contact for a lead.
PrimaryContactURL	string	The URL address pertaining to the primary contact for a lead.
PrimaryInventoryItemId	long	The unique identifier of the primary product associated with a lead.
PrimaryInventoryOrgId	long	The unique identifier of the organization to which the primary product associated with a lead belongs.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryProductGroupId	long	The unique identifier of the primary product group associated with a lead.
ProdNameOrGroupName	string	The name of the product associated with a lead.
ProductGroupDescription	string	The description of the product or product group associated with a lead.
ProductGroupName	string	The name of the product group associated with a lead.

Name	Type	Description
ProgramName	string	The name of the partner program in which the primary partner associated with the sales lead is enrolled. This is a deal specific attribute.
Project	string	The customer project identified for the sales lead.
QualificationScore	long	The qualification score for a lead.
QualifiedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date when the sales lead was qualified.
QualifiedDateTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the sales lead was qualified.
Rank	string	The rank associated with the sales lead.
RankMeaning	string	The meaning associated with specific lead rank.
RankSetId	long	The identifier of the rank list set identifier.
ReassignComment	string	The comment provided by a user while requesting the lead reassignment.
ReassignReasonCode	string	The predefined code used to indicate the reason for lead reassignment.
ReassignReasonCodeSetId	long	The reassign reason of the list set identifier.
RegistrationNumber	string	The registration number of the sales lead. This unique identifier is generated when the sales lead is approved. This is a deal specific attribute.
RegistrationStatus	string	The approval status of the sales lead. This is a deal specific attribute.
RegistrationStatusMeaning	string	The status of the approval request for the partner registered lead.
RegistrationType	string	Indicates the registration type of the sales lead. This is a deal specific attribute.
RegistrationTypeMeaning	string	Indicates the meaning of the registration type of the sales lead. This is a deal specific attribute.

Name	Type	Description
RejectByTerritoryId	long	The unique identifier of the territory of the sales representative who rejected the sales lead.
RejectByTerritoryVersionId	long	The version identifier of the territory of the sales representative who rejected the sales lead.
RejectByUserId	long	The unique identifier of the sales representative who rejected the sales lead.
RejectComment	string	The comments provided by the sales representative who rejected the sales lead.
RejectReasonCdMeaning	string	The meaning associated with the codes for lead rejection reason.
RejectReasonCode	string	The predefined code used to indicate the reason for rejecting a lead.
RejectReasonCodeSetId	long	The identifier of the reject reason list set.
RejectedCount	long	The number of times a lead has been rejected by various users.
RejectedDateTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the sales lead was rejected.
RejectedTimestamp	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time when a lead was rejected.
RetireComment	string	The comments recorded when the sales lead is moved to a retired status.
RetireReasonCdMeaning	string	The meaning associated with the codes for lead retirement reason.
RetireReasonCode	string	The predefined code used to indicate the reason for retiring a lead.
RetireReasonCodeSetId	long	The identifier of the retire reason list set.
RetiredDateTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the sales lead was moved to a retired status.
RetiredTimestamp	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time when a lead was retired.

Name	Type	Description
SalesChannel	string	Indicates the sales channel responsible for following up on the sales lead.
SalesChannelMeaning	string	The meaning of the sales channel associated with the sales lead.
Score	long	The score associated with the sales lead. The score is computed based on the scoring rules.
SourceCode	string	The marketing source code associated with the sales lead.
StatusCdMeaning	string	The meaning associated with the codes defined to indicate lead status.
StatusCode	string	The pre-defined code used to indicate the status.
Timeframe	string	The time frame associated with the sales lead.
TimeframeSetId	long	The identifier of the time frame list set.
ToReassignFlag	boolean	Identifies leads that are marked for reassignment.
ToRescoreFlag	boolean	Identifies leads that are marked for scoring.
UniqueName	string	The unique name is a concatenation of the lead name and the time stamp.
UpdateFlag	boolean	This flag controls if the user has access to update the record
WorkPhoneAreaCode	string	The work phone area code for the sales lead contact.
WorkPhoneCountryCode	string	The work phone country code for the sales lead contact.
WorkPhoneNumber	string	The work phone number for the sales lead contact.

Sales Lead Contacts

The contact associated with the sales lead.

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLeadContact

Logical Business Objects

- CRM : Lead Management : Sales Lead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Sales Lead Contacts*
Handled by	*Sales Lead Service Version 3*

Sales Lead Contacts

The contact associated with the sales lead.

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/}MklLeadTcMembers

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Sales Lead Contacts*
Contained by	*Sales Lead*
Contained by	*Service Lead Service Data Object*
Handled by	*Sales Lead Service Version 2*
Handled by	*Sales Lead Service Version 1*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
City	string	The name of the city.
ContactDoNotCallFlag	boolean	The indicator set at person level for the sales lead contact.
ContactDoNotContactFlag	boolean	The indicator set at person level for the sales lead contact.
ContactDoNotEmailFlag	boolean	The indicator set at person level for the sales lead contact.
ContactDoNotMailFlag	boolean	The indicator set at person level for the sales lead contact.
ContactNumber	string	The contact number of the sales lead contact.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
FormattedPhoneNumber	string	The formatted phone number.
JobTitle	string	The job title of the sales lead contact.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LeadId	long	The unique identifier of the sales lead for the sales lead contact.

Name	Type	Description
LeadMemberId	long	The primary key for lead contact. • Primary Key
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The organization contact identifier of the sales lead contact.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyStatus	string	The status of the sales lead contact.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUsageCode	string	The usage context of a party's contact point.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonJobTitle	string	The person Job title of the sales lead contact.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonProfileId	long	The person profile identifier of the sales lead contact.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PhoneAreaCode	string	The area code prefix for the phone number.

Name	Type	Description
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PostalCode	string	The postal code element of the address.
PrimaryFlag	boolean	Indicates whether the lead contact is primary. Primary lead contact is also the lead owner.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
RelationshipId	long	The relationship identifier for the record.
Role	string	The role of lead contact in the context of the lead.
State	string	The name of the state.

Sales Lead Products

The product associated with a sales lead.

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLeadProduct

Logical Business Objects

- CRM : Lead Management : Sales Lead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Sales Lead Products*
Handled by	*Sales Lead Service Version 3*

Sales Lead Products

The product associated with a sales lead.

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/}MklProdAssoc

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Sales Lead Products*
Contained by	*Sales Lead*
Contained by	*Service Lead Service Data Object*
Handled by	*Sales Lead Service Version 2*
Handled by	*Sales Lead Service Version 1*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Amount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The amount associated with the sales lead product.
AverageTimeToClose	decimal	Indicates average time to close for the sales lead product.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
Description	string	The free text description of the record.
EstimatedUnitPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated unit price for the lead product.
InventoryItemId	long	The inventory item identifier associated with the lead product.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.
LeadId	long	The unique identifier of the sales lead for the sales lead product.
LeadProductId	long	The primary key that represents the identifier of the current lead product. • Primary Key
LeadProductNumber	string	This is a public surrogate key for the table and is defaulted with a unique number. It cannot be null.
LongDescription	string	The long description of the sales lead product.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationId	long	The inventory organization identifier associated with the lead product.
PrimaryFlag	boolean	Indicates whether this product is a primary product for this lead.
ProductGroupDescription	string	The description of the product group.
ProductGroupId	long	The unique identifier of the product group.
ProductGroupName	string	The name of the product group if the record represents a product group.

Name	Type	Description
ProductName	string	The name of product or product group. It is the same as the product name if the record represents a product. It is the same as the product group name if the record represents a product group.
ProductType	string	Indicates if the record represents a product or a product group.
Quantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The product quantity identified for the product on the lead.
UOMCode	string	The unit of measure associated with the sales lead product line.

Sales Lead Resources

The resource associated with the sales lead.

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadServiceV3/}SalesLeadResource

Logical Business Objects

- CRM : Lead Management : Sales Lead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extends	*Sales Lead Resources*
Handled by	*Sales Lead Service Version 3*

Sales Lead Resources

The resource associated with the sales lead.

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/}MklLeadResources

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*Sales Lead Resources*
Contained by	*Sales Lead*
Contained by	*Service Lead Service Data Object*
Handled by	*Sales Lead Service Version 2*
Handled by	*Sales Lead Service Version 1*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	Access level for the sale team member on the lead.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedPhoneNumber	string	The formatted phone number.
FunctionalRole	string	Indicates the role played by the sales team resource for handling the sales lead.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
LeadId	long	The unique identifier of the sales lead for the sales lead resource.
LeadResourceId	long	The unique identifier of the sales lead resource. • Primary Key
ManagerName	string	The manager name of the resource.
ManagerPartyId	long	The party identifier of the manager of the resource in the organizational hierarchy.
Name	string	The name of the lead resource.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgTreeCode	string	The resource organization hierarchy code associated with the resource organization which is associated with the lead resource.
OrgTreeStructureCode	string	The resource organization hierarchy structure code associated with the resource organization hierarchy which is associated with the resource organization associated with the lead resource.
OrgTreeVersionId	string	The resource organization hierarchy version associated with the resource organization which is associated with the lead resource.
PartnerContactFlag	boolean	The indicator to identify whether the resource is a partner contact.
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PrimaryFlag	boolean	Indicates whether the record represents the primary resource on the lead. Primary resource on the lead is the same as the lead owner.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
ResourceId	long	The unique identifier of the resource.

Name	Type	Description
ResourceOrgId	long	The resource organization identifier associated with the lead resource.
ResourceUsername	string	The sign in name of the resource.
RoleName	string	The name of the role of the lead resource in the context of the sales lead.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.

Sales Lead Service Version 2

Service to convert, reject, and accept actions in addition to create, update, delete, and search for leads.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/marketing/leadMgmt/leads/leadService/}SalesLeadService

Service WSDL URL: https://servername/crmService/SalesLeadService?WSDL

Logical Business Objects

- CRM : Lead Management : Sales Lead

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Previous version is	*Sales Lead Service Version 1*
Handles	*Note*
Handles	*Note Descriptive Flexfields*
Handles	*Sales Lead*
Handles	*Sales Lead Resources*
Handles	*Sales Lead Products*

Relationship Type	Object or Service
Handles	*Sales Lead Contacts*

Operations

- *assignLead*
- *convertLeadToOpportunity*
- *qualifyLead*
- *rankLead*
- *scoreLead*
- *submitDeal*
- *reassignLead*
- *getSalesLeadProduct*
- *createSalesLeadProduct*
- *updateSalesLeadProduct*
- *deleteSalesLeadProduct*
- *findSalesLeadProduct*
- *getSalesLeadResource*
- *createSalesLeadResource*
- *updateSalesLeadResource*
- *deleteSalesLeadResource*
- *findSalesLeadResource*
- *getSalesLead*
- *createSalesLead*
- *updateSalesLead*
- *deleteSalesLead*
- *mergeSalesLead*
- *findSalesLead*
- *processSalesLead*
- *getSalesLeadContact*
- *createSalesLeadContact*
- *updateSalesLeadContact*
- *deleteSalesLeadContact*
- *findSalesLeadContact*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

assignLead

A web service method that assigns sales team to the lead.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the assignLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the assignLead web service method.

convertLeadToOpportunity

A web service method that converts a lead record to an opportunity.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required parameter of the convertLeadToOpportunity web service method. The lead record matching the ID input is used as source for the opportunity.

Response Payload

Element Name	Type	Description
result	string	The return value of the convertLeadToOppportunity web service method. It includes the full set of attributes of the opportunity record.

qualifyLead

A web service method that qualifies a lead based on qualification rules.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the qualifyLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the qualifyLead web service method.

rankLead

A web service method that assigns a pre-defined rank on the lead based on ranking rules.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	An input parameter of the rankLead web service method that identifies the lead record by ID.

Response Payload

Element Name	Type	Description
result	string	The return value of the rankLead web service method.

scoreLead

A web service method that scores an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the scoreLead web service method. It is the ID of the lead record that would need to be scored.

Response Payload

Element Name	Type	Description
result	string	The return value of the scoreLead web service method.

submitDeal

A web service method that submits an Oracle Fusion Lead Object record for registration.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the submitDeal web service method. It is the ID of the lead record to be registered.

Response Payload

Element Name	Type	Description
result	string	The return value of the submitDeal web service method.

reassignLead

A web service method that reassigns an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
mode	string	A required input parameter of the reassignLead web service method. Values: AUTOIMMEDIATE: Reassigns the lead immediately, AUTO: Flags the lead for reassignment to be picked-up next time assignment runs, MANUAL: only reassign the owners with the parameter value passed.
leadId	long	A required input parameter of the reassignLead web service method. It is the ID of the lead record that would need to be reassigned.
ownerId	long	An optional input parameter of the reassignLead web service method. It is required when the mode is MANUAL. It is the ID of the resource record to be set as the owner for the lead.
organizationId	long	An optional input parameter of the reassignLead web service method. It is used when the mode is MANUAL. It is the organization ID of the resource record to be set as the owner for the lead.
reason	string	An optional input parameter of the reassignLead web service method. It is the reason for reassignment.
comment	string	An optional input parameter of the reassignLead web service method. It is the comment recorded for the lead while being reassigned.

Response Payload

Element Name	Type	Description
result	string	The return value of the reassignLead web service method.

getSalesLeadProduct

A web service method that queries a single record of Oracle Fusion Lead Product Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadProductId	long	A required input parameter of the getLeadProduct web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	The return value of the getLeadProduct web service method. It includes the full set of attributes of record.

createSalesLeadProduct

A web service method that creates Oracle Fusion Lead Product Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadProduct	*Sales Lead Products*	The return value of the createLeadProduct web service method. It includes the full set of attributes of the record.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	A required input parameter of the createLeadProduct web service method. The input object includes the attribute values that the record is created with.

updateSalesLeadProduct

A web service method that updates an Oracle Fusion Lead Product Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadProduct	*Sales Lead Products*	A required parameter of the updateLeadProduct web service method. The record matching the ID specified in this input lead product is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	The return value of the updateLeadProduct web service method. It includes the full set of attributes of the record.

deleteSalesLeadProduct

A web service method that deletes an Oracle Fusion Lead Product Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadProduct	*Sales Lead Products*	A required input parameter of the deleteLeadProduct web service method. The record matching the input attribute values specified in the lead product are deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteSalesLeadProduct.

findSalesLeadProduct

A web service method that queries a single record or set of records of Oracle Fusion Lead Product Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadResource web service method. The filter criteria is a cumulative set of attribute criteria that identifies record queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findSalesLeadProduct.

Response Payload

Element Name	Type	Description
result	*Sales Lead Products*	The return value of the findLeadProduct web service method. It includes the full set of attributes of records queried.

getSalesLeadResource

A web service method that queries a single record of Oracle Fusion Lead Resource Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadResourceId	long	A required input parameter of the getLeadResource web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the getLeadResource web service method. It includes the full set of attributes of record.

createSalesLeadResource

A web service method that creates Oracle Fusion Lead Resource Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadResource	*Sales Lead Resources*	A required input parameter of the createLeadResource web service method. The input object includes the attribute values that the record is created with.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the createLeadResource web service method. It includes the full set of attributes of the record.

updateSalesLeadResource

A web service method that updates an Oracle Fusion Lead Resource Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadResource	*Sales Lead Resources*	A required parameter of the updateLeadResource web service method. The record matching the ID specified in this input lead resource is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the updateLeadResource web service method. It includes the full set of attributes of the record.

deleteSalesLeadResource

A web service method that deletes an Oracle Fusion Lead Resource Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadResource	*Sales Lead Resources*	A required input parameter of the deleteLeadResource web service method. The record matching the input attribute values specified in the Lead Resource is deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteSalesLeadResource.

findSalesLeadResource

A web service method that queries a single record or set of records of Oracle Fusion Lead Resource Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadResource web service method. The filter criteria is a cumulative set of attribute criteria that identifies records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findSalesLeadResource.

Response Payload

Element Name	Type	Description
result	*Sales Lead Resources*	The return value of the findLeadResource web service method. It includes the full set of attributes of records queried.

getSalesLead

A web service method that queries a single record of Oracle Fusion Lead Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadId	long	A required input parameter of the getLead web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the getLead web service method. It includes the full set of attributes of record.

createSalesLead

A web service method that creates Oracle Fusion Lead Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLead	*Sales Lead*	A required input parameter of the createLead web service method. The input object includes the attribute values that the lead record is created with.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the createLead web service method. It includes the full set of attributes of the record.

updateSalesLead

A web service method that updates an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLead	*Sales Lead*	A required parameter of the updateLead web service method. The record matching the ID specified in this input lead contact is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the updateLead web service method. It includes the full set of attributes of the record.

deleteSalesLead

A web service method that deletes an Oracle Fusion Lead Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLead	*Sales Lead*	A required input parameter of the deleteLead web service method. The record matching the input attribute values specified in the Lead is deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteSalesLead.

mergeSalesLead

A web service method that either creates a single record of Oracle Fusion Lead Object or updates a record by the given ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLead	*Sales Lead*	A required parameter of the mergeSalesLead web service method. The record matching the ID specified in this input is updated. If no ID is specified, the record is created instead.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the mergeLead web service method. It includes the full set of attributes of the record.

findSalesLead

A web service method that queries a single record or set of records of Oracle Fusion Lead Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLead web service method. The filter criteria is the cumulative set of attribute criteria that identifies records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findSalesLead.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the findLead web service method. It includes the full set of attributes of records queried.

processSalesLead

A web service method that creates or updates Oracle Fusion Lead Object record in bulk.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	As a input parameter value either of create, merge or update needs to be passed.
salesLead	*Sales Lead*	A required parameter of the processLead web service method. The list of lead input records to be created or merged or updated.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	It has three parts. For the first parameter, value can be full which means full set of lead attributes to be returned, value of key means only lead ID values to be returned, value of none means no value returned. For the second parameter, similar to first parameter but related to exceptions. For the third mandatory parameter, indicates true or false for partial failure allowed or not.

Response Payload

Element Name	Type	Description
result	*Sales Lead*	The return value of the processLead web service method. It can be none or a list of only the lead IDs or a list of full set of lead records.

getSalesLeadContact

A web service method that queries a single record of Oracle Fusion Lead Contact Object by ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
leadMemberId	long	A required input parameter of the getLeadContact web service method. It is the row ID of the record you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the getLeadContact web service method. It includes the full set of attributes of record.

createSalesLeadContact

A web service method that creates Oracle Fusion Lead Contact Object records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadContact	*Sales Lead Contacts*	A required input parameter of the createLeadContact web service method. It includes the attribute values that the record is created with.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the createLeadContact web service method. It includes the full set of attributes of the record.

updateSalesLeadContact

A web service method that updates an Oracle Fusion Lead Contact Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadContact	*Sales Lead Contacts*	A required parameter of the updateLeadContact web service method. The record matching the ID specified in this input lead contact is updated with the corresponding input attribute values also.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the updateLeadContact web service method. It includes the full set of attributes of the record.

deleteSalesLeadContact

A web service method that deletes an Oracle Fusion Lead Contact Object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesLeadContact	*Sales Lead Contacts*	A required input parameter of the deleteLeadContact web service method. The lead contact record matching the input attribute values specified are deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method deleteSalesLeadContact.

findSalesLeadContact

A web service method that queries a single record or set of records of Oracle Fusion Lead Contact Object by criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findLeadContact web service method. The filter criteria is the cumulative set of attribute criteria that identifies records queried for.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findSalesLeadContact.

Response Payload

Element Name	Type	Description
result	*Sales Lead Contacts*	The return value of the findLeadContact web service method. It includes the full set of attributes of records queried.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition was last updated. The parameter is present in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKL_VIEW_SALES_LEAD_PRIV	View Sales Lead	Allows viewing sales leads. A sales lead is a prospect or existing customer who has interest or the potential for interest in a product or service being sold.
All Operations	MKL_SET_UP_SALES_LEAD_PRIV	Set Up Sales Lead	Allows setting up common configuration settings, including assignment manager, assessment templates, appointments, interactions, notes, tasks, standard lookup types, profile options and descriptive flexfields for sales leads.
All Operations	MKL_MANAGE_SALES_LEAD_PRIV	Manage Sales Lead	Allows web services management of sales leads including modifying lead attributes and accepting or rejecting sales leads.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFIER_JOB	Sales Lead Qualifier	Identifies, generates and qualifies sales leads and ensures that they are successfully closed within established time objectives. Includes the ability to deliver reports, ensure a healthy sales pipeline volume, help shorten sales cycles, shape lead generation strategies, and provide effective guidance to the rest of the lead qualification team. Other supporting roles include territory development, event and webinar strategies.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			and conversion of sales lead to revenue opportunities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
MKL_VIEW_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
MKL_VIEW_SALES_LEAD_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKL_SET_UP_SALES_LEAD_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MKL_SET_UP_SALES_LEAD_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
MKL_MANAGE_SALES_LEAD_PRIV	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			sufficient information to assignee to create contract.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_EXECUTION_MANAGEMENT_DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKL_SALES_LEAD_QUALIFIER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKL_SALES_LEAD_PROCESSING_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Sales Lookup

Service to configure setup data specific to sales usage.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/sales/baseSales/common/salesLookups/salesLookupService/}LookupValuesService

Service WSDL URL: https://servername/crmService/LookupValuesService?WSDL

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Sales Lookup SDO*
Handles	*Sales Lookup Translation SDO*

Operations

- *getLookupValuesByPrimaryBU*
- *getLookupValuesByBU*
- *getLookupValues*
- *createLookupValues*
- *updateLookupValues*
- *deleteLookupValues*
- *mergeLookupValues*
- *findLookupValues*
- *processLookupValues*
- *processCSLookupValues*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getLookupValuesByPrimaryBU

Get operation for Sales Lookup SDO, marked by owner's Primary Business Unit.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	*Sales Lookup*	Returns a collection of filtered Sales Lookup Values for the Primary Business Unit of logged-in user.

getLookupValuesByBU

Get operation for Sales Method SDO, marked by passed Business Unit.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
buOrgId	long	The unique identifier for Business Unit for the method getLookupValuesByBU.

Response Payload

Element Name	Type	Description
result	*Sales Lookup*	The parameter returns a collection of filtered Sales Lookup Values for the supplied Business Unit.

getLookupValues

A web service method of Get operation for Sales Lookup SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
lookupValuesId	long	The unique Sales Lookup value identifier for the method getLookupValues.

Response Payload

Element Name	Type	Description
result	*Sales Lookup*	The parameter returns the Sales Lookup SDO that matches the inbound key attributes.

createLookupValues

A web service method of Create operation for Sales Lookup SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
lookupValues	*Sales Lookup*	The parameter for Sales Lookup SDO to be created for the method createLookupValues.

Response Payload

Element Name	Type	Description
result	*Sales Lookup*	The parameter returns the created Sales Lookup SDO.

updateLookupValues

A web service method of Update operation for Sales Lookup SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
lookupValues	*Sales Lookup*	The parameter for Sales Lookup SDO to be updated for the method updateLookupValues.

Response Payload

Element Name	Type	Description
result	*Sales Lookup*	The parameter returns the updated Sales Lookup SDO.

deleteLookupValues

A web service method of Delete operation for Sales Lookup SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
lookupValues	*Sales Lookup*	The parameter for Sales Lookup SDO to be deleted for the method deleteLookupValues.

Response Payload

Element Name	Type	Description
result	void	The parameter returns the deleted Sales Lookup SDO.

Element Name	Type	Description

mergeLookupValues

A web service method of Merge operation for Sales Lookup SDO. It performs an update if the object exists or an insert if the object does not already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
lookupValues	*Sales Lookup*	The parameter for Sales Lookup SDO to be merged for the method mergeLookupValues.

Response Payload

Element Name	Type	Description
result	*Sales Lookup*	The parameter returns the merged Sales Lookup SDO.

findLookupValues

A web service method of Find operation for Sales Lookup SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findLookupValues.

Response Payload

Element Name	Type	Description
result	*Sales Lookup*	The parameter returns a list of Sales Lookup SDO that satisfies the inbound criteria.

processLookupValues

A web service method of Bulk load operation for Sales Lookup SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The parameter indicates what action shall be performed, such as create, update, merge, or delete.
lookupValues	*Sales Lookup*	The parameter which provides a list of Sales Lookup SDO to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter which controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains only the key attributes or the full object.

Response Payload

Element Name	Type	Description
result	*Sales Lookup*	The parameter returns a list of Sales Lookup SDO that is successfully processed.

processCSLookupValues

An operation to apply the changes back to the data source for Sales Lookup SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.

Element Name	Type	Description
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter which controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains only the key attributes or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The parameter returns the result of the operation including a list of created/updated data objects, and all warning and informational messages.

getDfltObjAttrHints

Get operation for Sales Lookup that returns control hints defined on a service view and its attributes.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The parameter returns the control hints for the method getDfltObjAttrHints.

getServiceLastUpdateTime

Get operation for Sales Lookup that returns the last modified time for the service schema files.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The parameter returns the last modified time for the method getServiceLastUpdateTime.

getEntityList

Get operation for Sales Lookups that returns the list of service view instances.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	The parameter returns the list of service view instances.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
createLookupValues	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
getLookupValues	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles,

Operation Name	Privilege Code	Privilege Name	Privilege Description
			lookups, flexfields, and assignment rules, among others.
getLookupValues	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
mergeLookupValues	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
processLookupValues	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
processCSLookupValues	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
updateLookupValues	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
getLookupValuesByPrimaryBU	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
getLookupValuesByBU	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
findLookupValues	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit

Operation Name	Privilege Code	Privilege Name	Privilege Description
			allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
findLookupValues	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
deleteLookupValues	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_READ_ONLY_DUTY	Lead Registration Processing Read Only	Read Only role for Lead Registration Processing Duty.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			partner account team and their management chain.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_READ_ONLY_DUTY	Personal Campaign Management Read Only	Read Only role for Personal Campaign Management Duty.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_READ_ONLY_DUTY	Product Recommendation Analysis Read Only	Read Only role for Product Recommendation Analysis Duty
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			duties include exporting forecast information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_READ_ONLY_DUTY	Sales Forecasting Management Read Only	Read Only role for Sales Forecasting Management Duty.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_READ_ONLY_DUTY	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_READ_ONLY_DUTY	Territory Management Read Only	Read Only role for Territory Management Duty.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Sales Lookup

The configurable setup data defined specifically for sales usage.

QName: {http://xmlns.oracle.com/apps/sales/baseSales/common/salesLookups/salesLookupService/}LookupValues

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Lookup Translation SDO*
Handled by	*Sales Lookup*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AppliesTo	string	The object for which the lookup value is applicable.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
DisplaySequence	long	The order in which the status code is displayed.
EnabledFlag	boolean	The flag indicating whether the Lookup value is enabled.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LookupCategory	string	The attribute for lookup category associated with lookup value.
LookupCode	string	The attribute for lookup code associated with lookup value.

Name	Type	Description
LookupType	string	The attribute for lookup type associated with the lookup value.
LookupValuesId	long	The unique identifier for the Lookup Value. • Primary Key
LookupValuesTranslation	*Sales Lookup Translation*	The attribute for list of translated sales lookup values.
Meaning	string	The translated value of the lookup value.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
SetCode	string	The sales status lookup value's reference data set code.
SetId	long	The identifier for sales status lookup value's reference data set.
SetName	string	The identifier name of sales status lookup value's reference data set.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Lookup Translation

The translated configurable setup data defined specifically for sales usage.

QName: {http://xmlns.oracle.com/apps/sales/baseSales/common/salesLookups/salesLookupService/}LookupValuesTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Lookup*
Handled by	*Sales Lookup*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
Language	string	The translated language for the translation service data object. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LookupValuesId	long	The sales lookup value identifier. • Primary Key
Meaning	string	The attribute for meaning of the sales lookup value.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
SourceLang	string	The source language for the Sales Lookup Value.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Method

Service to operate on sales methods. The supported operations are create, update, get, find, and delete. A sales method is an approach used in the sales process. A method may encompass every stage associated with the sales process, from prospecting to forecasting to closing opportunities.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/salesMethods/salesMethodService/}SalesMethodService

Service WSDL URL: https://servername/crmService/SalesMethodService?WSDL

Logical Business Objects

- CRM : Opportunity Management : Sales Method

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Process Steps*
Handles	*Process Steps Translation SDO*
Handles	*Sales Stage Assessment Template*
Handles	*Sales Stage Translation SDO*
Handles	*Sales Stage Required Fields*
Handles	*Sales Stage*
Handles	*Sales Method SDO*

Relationship Type	Object or Service
Handles	*Sales Method Translation SDO*

Operations

- *getSalesMethodByBU*
- *getSalesMethodByPrimaryBU*
- *getSalesMethod*
- *createSalesMethod*
- *updateSalesMethod*
- *deleteSalesMethod*
- *mergeSalesMethod*
- *findSalesMethod*
- *processSalesMethod*
- *processCSSalesMethod*

getSalesMethodByBU

A web service method of Get operation for Sales Method SDO, marked by passed business unit.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
buOrgId	long	The parameter for unique identifier for Business Unit.

Response Payload

Element Name	Type	Description
result	*Sales Method*	The parameter returns a collection of filtered Sales Methods for passed Business Unit.

getSalesMethodByPrimaryBU

A web service method of Get operation for Sales Method SDO, marked by owner's primary business unit.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	*Sales Method*	A collection of filtered Sales Methods for Primary BU of signed in user.

getSalesMethod

A web service method of Get operation for Get operation for Sales Method SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesMethodId	long	The system generated identifier for this Sales Method.

Response Payload

Element Name	Type	Description
result	*Sales Method*	The parameter returns Sales Method SDO that matches the inbound key attributes.

createSalesMethod

A web service method of Create operation for Sales Method SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesMethod	*Sales Method*	The parameter for Sales Method SDO to be created.

Response Payload

Element Name	Type	Description
result	*Sales Method*	The parameter returns the created Sales Method SDO.

Element Name	Type	Description

updateSalesMethod

A web service method of Update operation for Sales Method SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesMethod	*Sales Method*	The parameter for Sales Method SDO to be updated.

Response Payload

Element Name	Type	Description
result	*Sales Method*	The parameter returns the updated Sales Method SDO.

deleteSalesMethod

A web service method of Delete operation for Sales Method SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesMethod	*Sales Method*	The parameter for Sales Method SDO to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter returns the deleted Sales Method SDO.

mergeSalesMethod

A web service method of Merge operation for Sales Method SDO. It performs an update if the object exists or an insert if the object does not already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesMethod	*Sales Method*	The parameter for Sales Method SDO to be merged.

Response Payload

Element Name	Type	Description
result	*Sales Method*	The parameter returns the merged Sales Method SDO.

findSalesMethod

A web service method of Find operation for Sales Method SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The parameter is not currently used for the method findSalesMethod.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not currently used for the method findSalesMethod.

Response Payload

Element Name	Type	Description
result	*Sales Method*	The parameter is not currently used for the method findSalesMethod.

processSalesMethod

A web service method of Bulk load operation for Sales Method SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The parameter which indicates what action shall be performed, such as create, update, merge, or delete.
salesMethod	*Sales Method*	The parameter with a list of Sales Method SDO to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter to control the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Sales Method*	The parameter returns a list of Sales Method SDO that is successfully processed.

processCSSalesMethod

A web service method to apply the changes back to the data source for Sales Method SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter to control the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The parameter returns the result of the operation including a list of created/updated data objects, and all warning and informational messages.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
processSalesMethod	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
getSalesMethod	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
getSalesMethod	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
createSalesMethod	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
findSalesMethod	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit

Operation Name	Privilege Code	Privilege Name	Privilege Description
			allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
findSalesMethod	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
getSalesMethodByBU	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
processCSSalesMethod	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
mergeSalesMethod	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
deleteSalesMethod	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
updateSalesMethod	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
getSalesMethodByPrimaryBU	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_READ_ONLY_DUTY	Lead Registration Processing Read Only	Read Only role for Lead Registration Processing Duty.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			products or events to specific customers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_READ_ONLY_DUTY	Personal Campaign Management Read Only	Read Only role for Personal Campaign Management Duty.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_READ_ONLY_DUTY	Product Recommendation Analysis Read Only	Read Only role for Product Recommendation Analysis Duty
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_READ_ONLY_DUTY	Sales Forecasting Management Read Only	Read Only role for Sales Forecasting Management Duty.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_READ_ONLY_DUTY	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_READ_ONLY_DUTY	Territory Management Read Only	Read Only role for Territory Management Duty.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Process Steps

The sequence of recommended steps tied to a particular sales stage, which is used to guide the sales representative through the opportunity lifecycle.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/salesMethods/salesMethodService/}SalesStageProcessSteps

Logical Business Objects

- CRM : Opportunity Management : Sales Method

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Process Steps Translation SDO*
Contained by	*Sales Stage*
Handled by	*Sales Method*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DescriptionText	string	The process step details.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Name	string	The process step name.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
SalesStageProcessStepsTranslation	*Process Steps Translation*	The attribute for list of translated sales stage process steps.
StepSequenceNumber	long	The process step name in the sales stage.
StgId	long	The stage identifier for the sales stage that the process step is a part of.
StgProcessStepId	long	The identifier for sales stage process step. • Primary Key
StgProcessStepNumber	string	A GUID-based column that has been created to be a part of the Alternate Key for data migration.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Process Steps Translation

The translated sequence of recommended steps tied to a particular sales stage which is used to guide the sales representative through the opportunity lifecycle.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/salesMethods/salesMethodService/}SalesStageProcessStepsTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Process Steps*
Handled by	*Sales Method*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DescriptionText	string	The description of the sales stage process step.
Language	string	The translated language for the translation service data object. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
Name	string	The name of process step.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
SourceLang	string	The source language for the sales stage Process Step.
StgProcessStepId	long	The identifier for sales stage process step. • Primary Key
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Method

The approach used in the sales process, and encompasses every stage associated with the sales process, from prospecting to forecasting to closing opportunities.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/salesMethods/salesMethodService/}SalesMethod

Logical Business Objects

- CRM : Opportunity Management : Sales Method

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Stage*
Contains	*Sales Method Translation SDO*
Handled by	*Sales Method*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DeletedFlag	boolean	The flag indicating whether the sales method has been deleted.
DescriptionText	string	The description for the sales method.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Name	string	The attribute for sales method name.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OpportunityType	string	Indicates if the type of opportunity is New, Renewal or an Expansion.
OptyCloseWindow	long	The sales method opportunity close window.
RevnLineSetEnabledFlag	boolean	The flag indicating whether Revenue Line Sets will be enabled when using this sales method.
SalesMethodId	long	The sales method unique identifier, primary key. • Primary Key

Name	Type	Description
SalesMethodNumber	string	A GUID-based column that has been created for being an Alternate Key for data migration.
SalesMethodTranslation	*Sales Method Translation*	The attribute for list of translated sales method data.
SalesStage	*Sales Stage*	The sales stage for a given sales method describes the progress of an opportunity in the sales cycle.
SetId	long	The sales method set identifier.
SetName	string	The sales method reference data set identifier.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Method Translation

The translated approach used in the sales process, and encompasses every stage associated with the sales process, from prospecting to forecasting to closing opportunities.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/salesMethods/salesMethodService/}SalesMethodTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Method*
Handled by	*Sales Method*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DescriptionText	string	The description of the sales method.
Language	string	The translated language for the translation service data object. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Name	string	The attribute for sales method name.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
SalesMethodId	long	The attribute for sales method identifier. • Primary Key
SourceLang	string	The source language for the sales method.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Stage

The sales stage for a given sales method describes the progress of an opportunity in the sales cycle.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/salesMethods/salesMethodService/}SalesStage

Logical Business Objects

- CRM : Opportunity Management : Sales Method

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Process Steps*
Contains	*Sales Stage Assessment Template*
Contains	*Sales Stage Translation*
Contains	*Sales Stage Required Fields*
Contained by	*Sales Method*
Handled by	*Sales Method*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AverageDaysAtStage	long	The average days at sales stage.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DeletedFlag	boolean	The flag indicating whether the sales stage has been deleted.
DescriptionText	string	The description of sales stage.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaximumDaysInStage	long	The maximum days of sales stage.
Name	string	The name of sales stage.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PhaseCd	string	The phase of sales stage.
QuotaFactor	decimal	The sales stage quota factor.
RcmndWinProb	decimal	The recommended win probability for sales stage.
SalesMethodId	long	The sales method identifier of the sales method to which the sales stage belongs.
SalesStageAssessmentTemplate1	*Sales Stage Assessment Template*	An object representing an assessment template tied to a sales stage of a particular sales method. A sales representative managing an opportunity in this particular stage is prompted to complete the assessment when he is about to move to the next stage in the lifecycle. sales stage assessment templates can be either mandatory or recommended.
SalesStageProcessSteps	*Process Steps*	A sequence of recommended steps tied to a particular sales stage which is used to guide the sales representative through the opportunity lifecycle.
SalesStageReqFields	*Sales Stage Required Fields*	A list of fields that are required to be entered for an opportunity prior to exiting the sales stage.
SalesStageTranslation	*Sales Stage Translation*	The attribute for list of translated sales stages.

Name	Type	Description
SetId	string	The set identifier for sales stage. The value is retrieved from the sales method set identifier.
StageNumber	string	A GUID-based column that has been created to be a part of the Alternate Key for data migration.
StageStatusCd	string	The status of the sales stage.
StgId	long	The unique identifier for sales stage. • Primary Key
StgOrder	decimal	The order of the opportunity's sales stage within the sales method.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Stage Assessment Template

The assessment template tied to a sales stage of a particular sales method. A sales representative managing an opportunity in this particular stage is prompted to complete the assessment when he is about to move to the next stage in the lifecycle. Sales stage assessment templates can be either mandatory or recommended.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/salesMethods/salesMethodService/}SalesStageAssessmentTemplate

Logical Business Objects

- CRM : Opportunity Management : Sales Method

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Stage*
Handled by	*Sales Method*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AssessTemplateNumber	string	The assessment template number.
AssessmentTemplateId	long	The assessment template identifier.
DescriptionText	string	The description of the sales stage assessment template.
Name	string	The assessment template name.
SalesStgId	long	The attribute for sales stage identifier.
SetId	string	The set identifier for the sales stage Assessment Template; this is derived from the sales stage set identifier.
StgAssessTemplateId	long	The unique ID for stage and assessment template association. • Primary Key
StgAssessTemplateNumber	string	A GUID-based column that has been created to be a part of the Alternate Key for data migration.
TmplApplyCode	string	The attribute that indicates how assessments based on this template will be used for the sales stage, for example, mandatory, recommended, and so on.

Sales Stage Required Fields

The list of fields that are required to be entered for an opportunity prior to exiting the sales stage.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/salesMethods/salesMethodService/}SalesStageReqFields

Logical Business Objects

- CRM : Opportunity Management : Sales Method

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Stage*
Handled by	*Sales Method*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Name	string	The required field name.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
StgId	long	The sales stage identifier of the sales stage that the required fields are associated with.

Name	Type	Description
StgRequiredFieldId	long	The system generated identifier for stage required fields. • Primary Key
StgRequiredFieldNumber	string	A GUID-based column that has been created to be a part of the Alternate Key for data migration.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Stage Translation

The translated sales stage for a given sales method describes the progress of an opportunity in the sales cycle.

QName: {http://xmlns.oracle.com/apps/sales/opptyMgmt/salesMethods/salesMethodService/}SalesStageTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Stage*
Handled by	*Sales Method*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
DescriptionText	string	The description of the sales stage.
Language	string	The translated language for the translation service data object. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Name	string	The name of sales stage.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
SourceLang	string	The source language for the sales stage.
StgId	long	The identifier for sales stage. • Primary Key
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Objective

Service to operate on sales objective business objects. It can be used by third-party applications to perform standard and custom operations on sales objective business objects.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/salesObjectives/salesObjectiveService/}SalesObjectiveService

Service WSDL URL: https://servername/crmService/SalesObjectiveService?WSDL

Logical Business Objects

- CRM : Common CRM : Sales Objective

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Objective*
Handles	*Note Descriptive Flexfields*
Handles	*Note*
Handles	*Objective Split*

Operations

- *deleteObjectiveSplits*
- *getObjective*
- *createObjective*
- *updateObjective*
- *deleteObjective*
- *mergeObjective*
- *findObjective*
- *deleteObjectiveSplit*
- *processObjectiveSplit*

deleteObjectiveSplits

A web service method to delete sales objective split.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
objectiveId	long	The parameter for the unique identifier of objective splits.

Response Payload

Element Name	Type	Description
result	void	This operation returns nothing for the method deleteObjectiveSplits.

getObjective

A web service method to query the attributes of an objective object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
objectiveId	long	The parameter for the unique identifier of objective.

Response Payload

Element Name	Type	Description
result	*Objective*	The parameter returns the objective object attributes.

createObjective

A web service method to create an objective and its child objects.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesObjective	*Objective*	The parameter of the Objective object for the method createObjective.

Response Payload

Element Name	Type	Description
result	*Objective*	The parameter returns the Objective object for the method createObjective.

Element Name	Type	Description

updateObjective

A web service method to update an objective and its child objects.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesObjective	*Objective*	The parameter of the Objective object for the method updateObjective.

Response Payload

Element Name	Type	Description
result	*Objective*	The parameter returns the Objective object for the method updateObjective.

deleteObjective

A web service method to delete an objective and its child objects.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesObjective	*Objective*	The parameter of the Objective object for the method deleteObjective.

Response Payload

Element Name	Type	Description
result	void	This operation returns nothing for the method deleteObjective.

mergeObjective

A web service method to merge an objective and its children.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesObjective	*Objective*	The parameter of the Objective object for the method mergeObjective.

Response Payload

Element Name	Type	Description
result	*Objective*	The parameter returns the Objective object for the method mergeObjective.

findObjective

A web service method to query for a list of objectives on objective object attributes.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The parameter for the criteria to retrieve records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter to control value of whether to retrieve translations.

Response Payload

Element Name	Type	Description
result	*Objective*	The parameter returns the list of objective objects.

deleteObjectiveSplit

Used to delete an objective split.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesObjectiveSplitsService	*Objective Split*	Objective Split Object.

Response Payload

Element Name	Type	Description
result	void	void

processObjectiveSplit

Used to process objective split.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Operation
salesObjectiveSplitsService	*Objective Split*	List of Objective split unique identifier
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	process information

Response Payload

Element Name	Type	Description
result	*Objective Split*	list of Objective split

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
deleteObjectiveSplits	ZCA_DELETE_SALES_OBJECTIVE_PRIV	Delete Sales Objective	Allows deleting sales objectives.
deleteObjectiveSplits	ZCA_UPDATE_SALES_OBJECTIVE_PRIV	Update Sales Objective	Allows updating sales objectives.
deleteObjective	ZCA_DELETE_SALES_OBJECTIVE_PRIV	Delete Sales Objective	Allows deleting sales objectives.
updateObjective	ZCA_UPDATE_SALES_OBJECTIVE_PRIV	Update Sales Objective	Allows updating sales objectives.
getObjective	ZCA_VIEW_SALES_OBJECTIVE_PRIV	View Sales Objective	Allows viewing sales objectives.
mergeObjective	ZCA_UPDATE_SALES_OBJECTIVE_PRIV	Update Sales Objective	Allows updating sales objectives.
processObjectiveSplit	ZCA_UPDATE_SALES_OBJECTIVE_PRIV	Update Sales Objective	Allows updating sales objectives.
deleteObjectiveSplit	ZCA_UPDATE_SALES_OBJECTIVE_PRIV	Update Sales Objective	Allows updating sales objectives.
findObjective	ZCA_VIEW_SALES_OBJECTIVE_PRIV	View Sales Objective	Allows viewing sales objectives.
createObjective	ZCA_CREATE_SALES_OBJECTIVE_PRIV	Create Sales Objective	Allows creating sales objectives.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_UPDATE_SALES_OBJECTIVE_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZCA_UPDATE_SALES_OBJECTIVE_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
	APPLICATION_ADMINISTRATOR_JOB		Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZCA_UPDATE_SALES_OBJECTIVE_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZCA_UPDATE_SALES_OBJECTIVE_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZCA_UPDATE_SALES_OBJECTIVE_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZCA_UPDATE_SALES_OBJECTIVE_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZCA_UPDATE_SALES_OBJECTIVE_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZCA_UPDATE_SALES_OBJECTIVE_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZCA_UPDATE_SALES_OBJECTIVE_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZCA_UPDATE_SALES_OBJECTIVE_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_CREATE_SALES_OBJECTIVE_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZCA_CREATE_SALES_OBJECTIVE_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZCA_CREATE_SALES_OBJECTIVE_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZCA_CREATE_SALES_OBJECTIVE_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZCA_CREATE_SALES_OBJECTIVE_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZCA_CREATE_SALES_OBJECTIVE_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZCA_CREATE_SALES_OBJECTIVE_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZCA_CREATE_SALES_OBJECTIVE_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_DELETE_SALES_OBJECTIVE_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZCA_DELETE_SALES_OBJECTIVE_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZCA_DELETE_SALES_OBJECTIVE_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZCA_DELETE_SALES_OBJECTIVE_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZCA_DELETE_SALES_OBJECTIVE_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZCA_DELETE_SALES_OBJECTIVE_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZCA_DELETE_SALES_OBJECTIVE_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZCA_DELETE_SALES_OBJECTIVE_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCA_VIEW_SALES_OBJECTIVE_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZCA_VIEW_SALES_OBJECTIVE_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ZCA_VIEW_SALES_OBJECTIVE_PRIV	ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	Partner Administrator	Registers the partner organization and program enrollment for the partner company. Manages the creation and removal of partner users and the users' privileges.
ZCA_VIEW_SALES_OBJECTIVE_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZCA_VIEW_SALES_OBJECTIVE_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZCA_VIEW_SALES_OBJECTIVE_PRIV	ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	Channel Operations Manager	Maintains and manages partner transactional data.
ZCA_VIEW_SALES_OBJECTIVE_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZCA_VIEW_SALES_OBJECTIVE_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZCA_VIEW_SALES_OBJECTIVE_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZCA_VIEW_SALES_OBJECTIVE_PRIV	ORA_ZPM_PARTNER_SALES_MANAGER_JOB	Partner Sales Manager	Manages a set of partner sales representatives and has visibility into all of their teams' transactions and the ability to work with leads and opportunities. This role is for a partner sales manager.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			submit deal registrations and view updates.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_PARTNER	Sales Change History Inquiry for Partner	View change history of marketing and partner business objects for members within the partner organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			assign SR to a user or change the status of a SR.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_PARTNER_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_PARTNER_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Note

The object that captures comments, information, or instructions for an Oracle Fusion Applications business object.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/noteService}Note

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note Descriptive Flexfields*

Relationship Type	Object or Service
Contained by	*Objective*
Contained by	*Opportunity*
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Contained by	*Activity*
Contained by	*Sales Competitor*
Contained by	*Sales Lead*
Contained by	*Business Plan*
Contained by	*Program Enrollments*
Contained by	*Reference*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*

Relationship Type	Object or Service
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreatorPartyId	long	This is the party identifier for the note creator.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteFlag	boolean	Indicates whether the user has access to delete the note.
Dff	*Note Descriptive Flexfields*	The descriptive flex field segment.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record

Name	Type	Description
NoteAttributeCategory	string	The contextual flex field for development usage.
NoteAttributeUid1	string	The flex field for development usage.
NoteAttributeUid2	string	The flex field for development usage.
NoteAttributeUid3	string	The flex field for development usage.
NoteAttributeUid4	string	The flex field for development usage.
NoteAttributeUid5	string	The flex field for development usage.
NoteId	long	The unique identifier of the note. • Primary Key
NoteNumber	string	The alternate unique identifier of the note. A user key that is system generated or from an external system.
NoteTitle	string	The title of the note entered by the user.
NoteTxt	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	This is the column that stores the actual note text.
NoteTypeCode	string	This is the note type code for categorization of note.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
SourceObjectCode	string	This is the source_object_code for the source object as defined in OBJECTS Metadata.
SourceObjectId	string	This is the source_object_Uid for the source object such as Activities, Opportunities, and so on defined in OBJECTS metadata.
UpdateFlag	boolean	Indicates whether the user can update the note.
VisibilityCode	string	This is the attribute to specify the visibility level of the note.

Note Descriptive Flexfields

The descriptive flex field that captures additional information for notes, such as a priority or status.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/flex/noteDff/}NoteDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Note*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
NoteId	long	The unique identifier of the note. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Objective

The details of a sales objective, such as the description.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesObjectives/salesObjectiveService/}SalesObjective

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note*
Contains	*Objective Split*
Handled by	*Sales Objective*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountId	long	Account unique identifier.
AccountNumber	string	Puid for the Account.
AccountPartyType	string	Type of the Account.
AccountPartyUniqueName	string	Unique Name of the Account.

Name	Type	Description
ActualValue	long	The actual numeric value.
BusinessPlanId	long	The identifier of the business plan that is a parent of the objective.
BusinessPlanName	string	The business plan name.
BusinessPlanNumber	string	The user-definable unique identifier of the business plan.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteFlag	boolean	Access level indicator for delete
Description	string	The free text description of the record.
EndDisplayPeriodName	string	The objective end period display name.
EndPeriodName	string	The values for the appropriate period type based on the entries in the GL calendar.
GeographyId	long	Geography unique identifier.
GeographyKey	string	Geography public unique identifier.
GeographyName	string	Name of the Geography.
Name	string	The objective name.
Note	*Note*	The note associated with the sales objective.
ObjectiveId	long	The objective identifier. • Primary Key
ObjectiveNumber	string	The user-definable unique identifier of the objective.
ObjectiveTypeCode	string	The objective type code.
ObjectiveTypeName	string	The objective type name.

Name	Type	Description
OrigCreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The original creation date of the objective.
OwnerPartyName	string	
PeriodEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Period End Date
PeriodStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Period Start Date
PeriodTypeCode	string	The period type such as year, quarter, or period.
PeriodTypeName	string	The objective time period name derived from the lookup (ZCA_TIME_PERIODS) meaning.
ProductGroupId	long	Product Group unique identifier.
ProductGroupName	string	Name of the Product Group.
ProductGroupReferenceNumber	string	ProductGroup Reference Number.
SalesObjectiveSplits	*Objective Split*	The split associated with the sales objective.
StartDisplayPeriodName	string	The objective start period display name.
StartPeriodName	string	The values for the appropriate period type based on the entries in GL calendar.
TargetValue	long	The numeric value of the target.
UnitOfMeasureCode	string	The unit of measure.
UnitOfMeasureName	string	The unit of measure translatable name.
UpdateFlag	boolean	Access level indicator for update

Objective Split

The details of the sales objective split.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesObjectives/salesObjectiveService/}SalesObjectiveSplits

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Objective*
Handled by	*Sales Objective*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountId	long	The unique identifier of the account.
ActualValue	long	The numeric value.
DisplayPeriodName	string	The objective split period identifier.
GeographyId	long	The unique identifier of the geography.
ObjectiveId	long	The identifier of the objective that is a parent of the objective split.
ObjectiveSplitId	long	The objective split identifier. • Primary Key
PeriodType	string	The objective split period type identifier.
ProductId	long	The product group unique identifier.
TargetValue	long	The target numeric value.

Sales Order Service

The service to create, update, get, and delete quotes and orders.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/orders/salesOrdersService/}SalesOrderService

Service WSDL URL: https://servername/crmService/SalesOrderService?WSDL

Logical Business Objects

- CRM : Common CRM : Sales Transaction

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Quote and Order*

Operations

- *getSalesOrderHeader*
- *createSalesOrderHeader*
- *updateSalesOrderHeader*
- *deleteSalesOrderHeader*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getSalesOrderHeader

The operation to get the sales order header.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
orderHeaderId	long	The unique identifier for the quote or order.

Response Payload

Element Name	Type	Description
result	*Sales Order*	The operation that returns sales order header service data object.

createSalesOrderHeader

The operation to create a new sales order header.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesOrderHeader	*Sales Order*	SalesOrderHeaderSDO

Response Payload

Element Name	Type	Description
result	*Sales Order*	The operation that returns sales order header service data object.

updateSalesOrderHeader

The operation to update an existing sales order header.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesOrderHeader	*Sales Order*	A required input parameter of the deleteEntity web service method. Use the API name of the custom object you want to delete.

Response Payload

Element Name	Type	Description
result	*Sales Order*	The service data object for update sales order header.

Element Name	Type	Description

deleteSalesOrderHeader

The operation that deletes existing sales order header.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesOrderHeader	*Sales Order*	A required input parameter of the createEntity web service method. Use the API name of the custom object you want to create.

Response Payload

Element Name	Type	Description
result	void	The operation returns void.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The locale name is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
updateSalesOrderHeader	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
deleteSalesOrderHeader	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
getSalesOrderHeader	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
createSalesOrderHeader	MOO_CREATE_OPPORTUNITY_PRIV	Create Opportunity	Allows creating of opportunities.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			manages territory forecasts, and assists salespersons in closing deals.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
MOO_CREATE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
MOO_CREATE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
MOO_CREATE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOO_CREATE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
MOO_CREATE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
MOO_CREATE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
MOO_CREATE_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_READ_ONLY_DUTY	Lead Registration Processing Read Only	Read Only role for Lead Registration Processing Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_READ_ONLY_DUTY	Personal Campaign Management Read Only	Read Only role for Personal Campaign Management Duty.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_READ_ONLY_DUTY	Product Recommendation Analysis Read Only	Read Only role for Product Recommendation Analysis Duty
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_READ_ONLY_DUTY	Sales Forecasting Management Read Only	Read Only role for Sales Forecasting Management Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_READ_ONLY_DUTY	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZPM_CHANNEL_SALES_ MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_ PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_ MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_ PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_ VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_ VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_ VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZPM_CHANNEL_SALES_ MANAGER_JOB	ORA_MOT_TERRITORY_ MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_ MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_READ_ONLY_DUTY	Territory Management Read Only	Read Only role for Territory Management Duty.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Sales Order

The name of the service data object used to integrate quotes and sales orders.

QName: {http://xmlns.oracle.com/apps/crmCommon/orders/salesOrdersService/}SalesOrderHeader

Logical Business Objects

- CRM : Common CRM : Sales Transaction

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Sales Order Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountBasedQuoteFlag	boolean	Indicates if this quote / order record is account based quote or not.
ActiveVersionFlag	boolean	The active version flag.
BUOrgId	long	The business unit (Internal Organization) to which this Quote / Order belongs.
ContractEndDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The latest end date for all the line items within the quote
ContractStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The earliest start date for all the items within the quote
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteFlag	boolean	This flag controls if the user has access to delete the record
Description	string	The free text description of the record.
ExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The expiration date of the quote or order.
ExternalHostName	string	The name of the CPQ site
ExternalProcessName	string	The name of the process for a CPQ site
ExternalQuoteNumber	string	Identifier from source system that created this Quote
ExternalReferenceNumber	string	The identifier for the external quote/order.
ExternalSystemReferenceCode	string	The external reference(Third party) type for the quote or order. Big machines will pass BMQUOTE.
LastOptySyncDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The last opportunity sync date for the quote to identify the active version of the quote for the opportunity.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
Name	string	Stores the quote/order name.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OptyId	long	The unique identifier of the opportunity.
OrderHeaderId	long	The unique identifier for the quote or order. • Primary Key
OrderHeaderNumber	string	Order Header Number for the Quote or Order. This is a public surrogate key.
OrderTotal	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total amount.
Owner	string	The quote owner.
OwnerResourcePartyId	long	The resource identifier of the owner party
OwnerResourcePartyName	string	The party name of the owner
PlacedOnDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date on which the order was placed.
ProposalExistFlag	boolean	Identifies the associated proposal for the quote. Valid values are Y or N.
QuoteTypeCategory	string	If renewal process is set is this quote a renewal subscription or expansion to a subscription.
RenewalProcess	string	The renewal process that will be used to renew the Quotes and Orders
SalesAccountUniqueName	string	Name of the customer account
SoldContactPartyId	long	The customer contact party identifier.
SoldCustomerPartyId	long	The customer party identifier.
SoldCustomerPartyUniqueName	string	Customer Party Unique Name
SoldPartySiteId	long	The customer address identifier.

Name	Type	Description
Status	string	The status of the record.
TotalMonthlyRecurringRevenue	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total monthly recurring revenue for the quote
TotalMonthlyUsageRevenue	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total monthly usage revenue for the quote
TotalNonRecurringRevenue	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total nonrecurring revenue for the quote.
TotalRecurringRevenue	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total recurring revenue for the quote
TotalUsageRevenue	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total usage revenue for the quote
UpdateFlag	boolean	This flag controls if the user has access to update the record
VersionNumber	long	The version number of the quote/order.
WinStatusCode	string	The lookup code for lookup type=ORA_ZCA_WIN_STATUS.

Sales Party

The service used to create, update, get, or find a sales party. A sales party is a party with a usage of sales account, sales prospect, or legal entity.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesPartyService

Service WSDL URL: https://servername/crmService/SalesPartyService?WSDL

Logical Business Objects

- CRM : Customer Center : Sales Party

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Additional Account Name*
Handles	*Citizenship*
Handles	*Financial Profile*
Handles	*Credit Rating*
Handles	*Email Domain*
Handles	*Trading Community Original System Mapping Identifier Additional Information*
Handles	*Sales Account Contact SDO*
Handles	*Trading Community Person Details*
Handles	*Asset*
Handles	*Classification Assignment*
Handles	*Preference*
Handles	*Additional Household Name*
Handles	*Phone*
Handles	*Sales Account Resource Access SDO*
Handles	*Trading Community Address Purpose*
Handles	*Trading Community Organization Contact Additional Information*
Handles	*Additional Identifier*
Handles	*Relationship*
Handles	*Education*

Relationship Type	Object or Service
Handles	*Sales Account*
Handles	*Sales Party SDO*
Handles	*Contact Address*
Handles	*Telex*
Handles	*Electronic Data Interchange*
Handles	*Contact Preference*
Handles	*Account*
Handles	*Contact Interest*
Handles	*Usage Assignment*
Handles	*Sales Account Contact Point SDO*
Handles	*Electronic File Transfer*
Handles	*Contact Language*
Handles	*Trading Community Person Profile Additional Information*
Handles	*Certification*
Handles	*Financial Number*
Handles	*Trading Community Organization Profile Additional Information*
Handles	*Trading Community Organization Details*
Handles	*Trading Community Contact Point Additional Information*
Handles	*My Sales Account*
Handles	*Source System Reference*
Handles	*Customer Contact Profile*

Relationship Type	Object or Service
Handles	*Sales Account Territory*
Handles	*Household*
Handles	*Additional Contact Name*
Handles	*Web*
Handles	*Customer Contact Responsibility*
Handles	*Email*
Handles	*Trading Community Relationship Additional Information*
Handles	*Financial Report*
Handles	*Employment History*
Handles	*Instant Messaging*
Handles	*Work Class*
Handles	*Address*
Handles	*Sales Account Resource*
Handles	*Contact*
Handles	*Trading Community Address Additional Information*

Operations

- *assignSalesAccountChkProfile*
- *updateExistingFlag*
- *createPartyUsage*
- *deleteSalesParty*
- *getSalesAccount*
- *createSalesAccount*
- *updateSalesAccount*

- *mergeSalesAccount*
- *findSalesAccount*
- *findSalesAccountMyFavoriteSalesAccountsVC*
- *createOrganizationParty*
- *mergeOrganizationParty*
- *createPersonParty*
- *mergePersonParty*
- *getSalesParty*
- *createSalesParty*
- *updateSalesParty*
- *findSalesParty*
- *findSalesAccountResourceAccess*
- *findSalesAccountResourceAccessResourceBySalesAccountVC*
- *findSalesAccountResourceAccessSalesAccountByResourceVC*
- *getSalesAccountResource*
- *createSalesAccountResource*
- *updateSalesAccountResource*
- *deleteSalesAccountResource*
- *findSalesAccountResource*
- *findMySalesAccount*
- *findMySalesAccountMyTeamVC*
- *findMySalesAccountMyVC*
- *getAsset*
- *createAsset*
- *updateAsset*
- *deleteAsset*
- *findAsset*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

assignSalesAccountChkProfile

The operation that assigns the sales account after its created, updated or merged based on auto assignment profile options. This is automatically invoked at the end of createSalesParty, updateSalesParty, and mergeSalesAccount.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	An input parameter. Uses the party identifier.
operation	string	An input parameter. Uses values such as create, update, or merge.
saveFlag	boolean	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Response Payload

Element Name	Type	Description
result	void	The operation returns void.

updateExistingFlag

The operation sets existing sales account identifier for all sales accounts which have the specified party usage as defined in the existing sales account usage profile option value. This operation is an internal operation and is not superseded by another operation.

Life Cycle Status: Deprecated

Request Payload

Element Name	Type	Description
startId	long	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.
endId	long	The operation to update the existing flag for ending party identifier.
schTime	long	The date and time when the service definition last changed in ISO 8601 format.

Response Payload

Element Name	Type	Description
result	void	The operation that returns the existing flag.

Element Name	Type	Description

createPartyUsage

A Web service method to set party usage for a given party.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	An input parameter. Includes the party identifier for which to set the party usage.
partyUsage	string	An input parameter. Includes the party usage you want to set.

Response Payload

Element Name	Type	Description
result	void	The operation returns void.

deleteSalesParty

The operation that deletes a sales party which may be a sales account or a sales prospect. This will inactivate the party and the sales account profile if it exists.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	An input parameter. Uses the party identifier of the sales party to be deleted.

Response Payload

Element Name	Type	Description
result	void	The operation returns void.

getSalesAccount

A Web service method to get sales account profile for a given sales account.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountId	long	The Sales Account Identifier.

Response Payload

Element Name	Type	Description
result	*Sales Account*	The return value is the sales account profile for the given party.

createSalesAccount

A Web service method that creates a sales account.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccount	*Sales Account*	An input parameter. Include the sales account to be created.

Response Payload

Element Name	Type	Description
result	*Sales Account*	The return value is the outcome of Web service method. For example, the outcome could be successfully created sales customer information.

updateSalesAccount

The Web service method that updates the specified sales account.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccount	*Sales Account*	The input parameter to update sales account.

Response Payload

Element Name	Type	Description
result	*Sales Account*	The return value is the outcome of the Web service method. For example, the outcome could be successfully updated sales account information.

mergeSalesAccount

A Web service method to merge sales account profiles. Includes performing an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccount	*Sales Account*	An input parameter. Include the sales account profile to be merged.

Response Payload

Element Name	Type	Description
result	*Sales Account*	The return value is the outcome of the Web service method. For example, the outcome could be merged sales account profiles.

findSalesAccount

A Web service method to find sales account profile for a given criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Account*	The return value includes a list of sales account profiles that satisfy the inbound criteria.

findSalesAccountMyFavoriteSalesAccountsVC

A Web service method to find a list of my favorite sales accounts. My favorite sales accounts are sales accounts for which update rating has been set.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
BindPartyUniqueName	string	The find operation for party unique name for which the list of resources is returned in the results.
BindOwner	string	The find operation for owner for which the list of resources is returned in the results.
BindPartyNumber	string	The find operation for party number for which the list of resources is returned in the results.
BindAddress1	string	The find operation for address for which the list of resources is returned in the results.
BindAddress2	string	The find operation for address for which the list of resources is returned in the results.
BindCity	string	The find operation for city for which the list of resources is returned in the results.

Element Name	Type	Description
BindState	string	The find operation for state for which the list of resources is returned in the results.
BindPostalCode	string	The find operation for postal code for which the list of resources is returned in the results.
BindCountry	string	The find operation for country for which the list of resources is returned in the results.
BindResourcePartyName	string	The find operation for resource party name for which the list of resources is returned in the results.
BindTerritory	string	The find operation for territory for which the list of resources is returned in the results.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Account*	The return value includes a list of sales account profiles that satisfy the inbound criteria.

createOrganizationParty

The operation is used internally in create sales party and can also be used independently to create parties like sales prospect.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
organizationParty	*Trading Community Organization Details*	An input parameter. Includes the trading community organization to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationPartyResult	The return value is the outcome of the method. For example, the outcome could be successfully created Trading Community Organization details. The outcome could also be a list of warnings or informational messages.

mergeOrganizationParty

A Web service method to merge trading community organizations. Includes performing an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
organizationParty	*Trading Community Organization Details*	An input parameter. Includes the trading community organization to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationPartyResult	The return value is the outcome of the method. For example, the outcome could be merged Trading Community Organization details. The outcome could also be a list of warnings or informational messages.

createPersonParty

A Web service method that creates a trading community person record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
personParty	*Trading Community Person Details*	A required input parameter. Includes the trading community person details.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonResult	The return value is the newly created trading community person object, and any warning or informational messages if applicable.

mergePersonParty

A Web service method to merge trading community persons. Includes performing an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
personParty	*Trading Community Person Details*	An input parameter. Includes the trading community person to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonResult	The return value is the outcome of the method. For example, the outcome could be merged Trading Community Person details. The outcome could also be a list of warnings or informational messages.

getSalesParty

The operation returns party information for the given party identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	An input parameter. Uses the party identifier for which to get the sales party service data object.
salesAccountId	long	Retrieves user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this

Element Name	Type	Description
		service to get the list of possible values for the viewName request payload element.

Response Payload

Element Name	Type	Description
result	*Sales Party*	The return value include the sales party service data object that matches the specified key attributes.

createSalesParty

This operation that creates a sales account or a sales prospect based on whether the address is passed and marked as a sell to address. The sales account or the sales prospect can be an organization or a person.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesParty	*Sales Party*	A required input parameter of the getEntity web service method. Use the API name of the custom object you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Party*	The return value includes the created sales party service data object.

updateSalesParty

The operation that updates sales party information for the given party identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesParty	*Sales Party*	A required input parameter of the findEntity web service method. Use the API name of the custom object you want to query for.

Response Payload

Element Name	Type	Description
result	*Sales Party*	The return value includes the updated sales party service data object.

findSalesParty

This method will return all parties that have a usage as defined in 'Eligible Customer' party usage filter rule and match the given search criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Party*	The return value includes a list of sales party service data objects that satisfy the specified criteria.

findSalesAccountResourceAccess

A Web service method to return the sales account resource access service data object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Account Resource Access*	The return value is a list of sales account resource access service data objects that match the findCriteria.

findSalesAccountResourceAccessResourceBySalesAccountVC

A Web service method that returns a list of resources that have access to the given sales account.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
BindSalesAccountId	long	The find operation for account identifier for which the list of resources is returned in the results.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Account Resource Access*	The return value of the findSalesAccountResourceAccessResourceBySalesAccoun Web service method. Includes the resources that have access to the sales account.

findSalesAccountResourceAccessSalesAccountByResourceVC

A Web service method that returns a list of sales accounts that a given resource has access to.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
BindResourceId	long	The find operation for resource identifier for which the list of resources is returned in the results.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Account Resource Access*	The return value of the findSalesAccountResourceAccessSalesAccountVC Web service method. Includes the resources that have access to the given sales account.

getSalesAccountResource

A Web service method that returns sales account resource service data object for a given sales account resource id.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
sAccountResourceId	long	A required input parameter. Use the surrogate primary key for the sales account resource team member.

Response Payload

Element Name	Type	Description
result	*Sales Account Resource*	The return value is a sales account resource service data object that matches the given sales account resource identifier.

createSalesAccountResource

The operation to add a member to the sales account team.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountResource	*Sales Account Resource*	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Account Resource*	The return value included the created sales account resource service data object.

updateSalesAccountResource

The operation to update sales account team member information such as lock assignment flag, access permission, and so on.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountResource	*Sales Account Resource*	A required input parameter of the getEntity Web service method. Includes the row ID of the record you want to query.

Response Payload

Element Name	Type	Description
result	*Sales Account Resource*	The return value is the updated sales account resource service data object.

Element Name	Type	Description

deleteSalesAccountResource

The operation that removes a member from the sales account team.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesAccountResource	*Sales Account Resource*	A required input parameter of the findEntity web service method. Includes optional search criteria, sort filter, and attributes to be excluded when returning the set of records. Also includes the option to return any of the custom object's child entities, as well as the set of search criteria to use on the child entities.

Response Payload

Element Name	Type	Description
result	void	The operation returns void.

findSalesAccountResource

The operation returns the list of members in the sales account team.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Account Resource*	The return value include a list of sales account resource service data objects that satisfy the specified criteria.

findMySalesAccount

A Web service method to find a list of my sales accounts. My sales accounts are sales accounts assigned to me or my subordinates, and sales accounts assigned to my territories or their descendent territories.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*My Sales Account*	The return value include a list of sales accounts data objects that satisfy the specified criteria.

findMySalesAccountMyTeamVC

A Web service method to find a list of my team's sales accounts. My team's sales accounts are sales accounts for which I am a member on the sales account team or sales account territory, my subordinate is a member on the sales account team, or my territory's descendent territories are assigned to the sales account.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*My Sales Account*	The return value include a list of my sales accounts data objects that satisfy the specified criteria.

findMySalesAccountMyVC

A Web service method to find a list of my sales accounts. My sales accounts are sales accounts for which I am a member on the sales account team or the sales account territory.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*My Sales Account*	The return value include a list of my sales accounts data objects that satisfy the specified criteria.

getAsset

Retrieves an asset.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
assetId	long	The asset identifier.

Response Payload

Element Name	Type	Description
result	*Asset*	The asset details for the specified asset identifier.

createAsset

Creates an asset.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
asset	*Asset*	The input payload for the asset to be created.

Response Payload

Element Name	Type	Description
result	*Asset*	The created asset.

updateAsset

Updates an asset.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
asset	*Asset*	The input payload for the asset to be updated.

Response Payload

Element Name	Type	Description
result	*Asset*	The updated asset.

deleteAsset

Deletes an asset.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
asset	*Asset*	The asset identifier.

Response Payload

Element Name	Type	Description
result	void	

findAsset

Retrieves assets based on a specified criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria for retrieving one or more assets.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used.

Response Payload

Element Name	Type	Description
result	*Asset*	The list of assets that match the specified criteria.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The locale name is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create,

Element Name	Type	Description
		update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
updateSalesAccountResource	ZCM_VIEW_SALES_ACCOUNT_TEAM_PRIV	View Sales Account Team	Allows viewing of the sales account team information.
findSalesAccountResource	ZCM_VIEW_SALES_ACCOUNT_TEAM_PRIV	View Sales Account Team	Allows viewing of the sales account team information.
findAsset	ZCM_VIEW_ASSETS_PRIV	View Assets	Allows view assets
createOrganizationParty	ZCM_CREATE_CONSUMER_PRIV	Create Consumer	Allows creating a consumer.
createOrganizationParty	ZCM_CREATE_SALES_ORGANIZATION_PRIV	Create Sales Organization	Allows creating a sales organization.
createAsset	ZCM_CREATE_ASSET_PRIV	Create Asset	Allows create new assets
findMySalesAccountMyVC	ZCM_VIEW_SALES_PARTY_PRIV	View Sales Party	Allows viewing of sales party information.
getSalesParty	ZCM_VIEW_SALES_PARTY_PRIV	View Sales Party	Allows viewing of sales party information.
mergeOrganizationParty	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.
mergeOrganizationParty	ZCM_UPDATE_SALES_ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
updateExistingFlag	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.
updateExistingFlag	ZCM_UPDATE_SALES_ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.

Operation Name	Privilege Code	Privilege Name	Privilege Description
createSalesAccountResource	ZCM_VIEW_SALES_ACCOUNT_TEAM_PRIV	View Sales Account Team	Allows viewing of the sales account team information.
findSalesAccount	ZCM_VIEW_CONSUMER_PRIV	View Consumer	Allows viewing of consumers.
findSalesAccount	ZCM_VIEW_SALES_ORGANIZATION_PRIV	View Sales Organization	Allows viewing of the sales organization.
findMySalesAccountMyTeamVC	ZCM_VIEW_SALES_PARTY_PRIV	View Sales Party	Allows viewing of sales party information.
mergePersonParty	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.
mergePersonParty	ZCM_UPDATE_SALES_ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
createPersonParty	ZCM_CREATE_CONSUMER_PRIV	Create Consumer	Allows creating a consumer.
createPersonParty	ZCM_CREATE_SALES_ORGANIZATION_PRIV	Create Sales Organization	Allows creating a sales organization.
updateSalesAccount	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.
updateSalesAccount	ZCM_UPDATE_SALES_ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
createSalesAccount	ZCM_CREATE_CONSUMER_PRIV	Create Consumer	Allows creating a consumer.
createSalesAccount	ZCM_CREATE_SALES_ORGANIZATION_PRIV	Create Sales Organization	Allows creating a sales organization.
deleteSalesParty	ZCM_DELETE_SALES_ACCOUNT_PRIV	Delete Sales Account	Allows deleting sales accounts.
deleteSalesParty	ZCM_DELETE_SALES_ORGANIZATION_PRIV	Delete Sales Organization	Allows deletion of Sales Organizations.
deleteSalesParty	ZCM_DELETE_SALES_GROUP_PRIV	Delete Sales Group	Allows deleting sales groups.
deleteSalesParty	ZCM_DELETE_CONSUMER_PRIV	Delete Consumer	Allows deleting consumers.
assignSalesAccountChkProfile	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.

Operation Name	Privilege Code	Privilege Name	Privilege Description
assignSalesAccountChkProfile	ZCM_UPDATE_SALES_ ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
deleteSalesAccountResource	ZCM_VIEW_SALES_ACCOUNT_ TEAM_PRIV	View Sales Account Team	Allows viewing of the sales account team information.
findSalesAccountMyFavoriteSalesAc	ZCM_VIEW_SALES_PARTY_PRIV	View Sales Party	Allows viewing of sales party information.
mergeSalesAccount	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.
mergeSalesAccount	ZCM_UPDATE_SALES_ ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
deleteAsset	ZCM_DELETE_ASSET_PRIV	Delete Asset	Allows delete assets
createSalesParty	ZCM_CREATE_CONSUMER_PRIV	Create Consumer	Allows creating a consumer.
createSalesParty	ZCM_CREATE_SALES_ ORGANIZATION_PRIV	Create Sales Organization	Allows creating a sales organization.
updateAsset	ZCM_EDIT_ASSET_PRIV	Edit Asset	Allows edit existing assets
getAsset	ZCM_VIEW_ASSETS_PRIV	View Assets	Allows view assets
updateSalesParty	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.
updateSalesParty	ZCM_UPDATE_SALES_ ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
findSalesAccountResourceAccess	ZCM_VIEW_SALES_ACCOUNT_ TEAM_PRIV	View Sales Account Team	Allows viewing of the sales account team information.
findSalesParty	ZCM_VIEW_SALES_PARTY_PRIV	View Sales Party	Allows viewing of sales party information.
getSalesAccount	ZCM_VIEW_CONSUMER_PRIV	View Consumer	Allows viewing of consumers.
getSalesAccount	ZCM_VIEW_SALES_ ORGANIZATION_PRIV	View Sales Organization	Allows viewing of the sales organization.
createPartyUsage	ZCM_UPDATE_CONSUMER_PRIV	Update Consumer	Allows reviewing and updating the consumer information.

Operation Name	Privilege Code	Privilege Name	Privilege Description
createPartyUsage	ZCM_CREATE_CONSUMER_PRIV	Create Consumer	Allows creating a consumer.
createPartyUsage	ZCM_UPDATE_SALES_ ORGANIZATION_PRIV	Update Sales Organization	Allows updating the sales organization.
createPartyUsage	ZCM_CREATE_SALES_ ORGANIZATION_PRIV	Create Sales Organization	Allows creating a sales organization.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_ZCM_SR_SALES_PARTY_ MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_CASE_ADMINISTRATOR	Case Administrator	Administers all aspects of Case Management.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_INTERNAL_HELPDESK_ ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_CASE_EXECUTION	Case Execution	Assists clients who are applying for benefits, opens cases and manages all tasks associated to the case, processes clients applications, evaluate clients needs for benefits, counsels benefits recipients, performs assessments of clients strengths and needs to develop benefit plans, performs follow-

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			up with clients to ensure they are working on their tasks.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_CASE_SUPERVISION	Case Supervision	Supervises and manages caseworkers, assists caseworkers with any complex issues, handles case approvals and escalations, coordinates care and benefits with external service providers, assigns or reassigns cases to caseworkers, conducts evaluations of benefits programs and provides feedback.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_INTERNAL_HELPDESK_ SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_ZCM_SALES_PARTY_ REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_HR_SR_ ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
ZCM_VIEW_SALES_ ORGANIZATION_PRIV	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			has limited access to customers and contacts.
ZCM_CREATE_ASSET_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_CREATE_ASSET_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_CREATE_ASSET_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_CREATE_ASSET_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	Utilities Customer Service Manager	Individual responsible for managing Utilities Customer Service Representatives for a utilities customer service function.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	Utilities Customer Service Representative	Individual responsible for answering customer inquiries and resolving customer problems for a utilities customer service function.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	Utilities Customer Service Administrator	Individual responsible for the day-to-day administrative support for a utilities customer service function.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_UPDATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_VIEW_CONSUMER_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_VIEW_CONSUMER_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_VIEW_CONSUMER_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCM_VIEW_CONSUMER_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_CREATE_SALES_ORGANIZATION_PRIV	ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	Utilities Customer Service Manager	Individual responsible for managing Utilities Customer Service Representatives for a utilities customer service function.
ZCM_CREATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_CREATE_SALES_ORGANIZATION_PRIV	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ZCM_CREATE_SALES_ORGANIZATION_PRIV	ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	Utilities Customer Service Representative	Individual responsible for answering customer inquiries and resolving customer problems for a utilities customer service function.
ZCM_CREATE_SALES_ORGANIZATION_PRIV	ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	Utilities Customer Service Administrator	Individual responsible for the day-to-day administrative support for a utilities customer service function.
ZCM_CREATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_CREATE_SALES_ORGANIZATION_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_VIEW_ASSETS_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_VIEW_ASSETS_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_VIEW_ASSETS_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCM_VIEW_ASSETS_PRIV	ORA_ATC_BILLING_CARE_VIEWER_DUTY	Billing Care Viewing	Can view and read all billing data.
ZCM_VIEW_ASSETS_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_VIEW_ASSETS_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_VIEW_ASSETS_PRIV	ORA_ATC_BILLING_CARE_AGENT_DUTY	Billing Care Management	Can view and read billing data. Can perform all agent billing-related customer care actions in the contact center.
ZCM_UPDATE_CONSUMER_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_UPDATE_CONSUMER_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_UPDATE_CONSUMER_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_ACCOUNT_TEAM_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_VIEW_SALES_ACCOUNT_TEAM_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_ACCOUNT_TEAM_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCM_VIEW_SALES_ACCOUNT_TEAM_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_VIEW_SALES_PARTY_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			Request. Has basic Service Request management capabilities.
ZCM_VIEW_SALES_PARTY_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_VIEW_SALES_PARTY_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ZCM_VIEW_SALES_PARTY_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_DELETE_ASSET_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_DELETE_ASSET_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_DELETE_ASSET_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_DELETE_ASSET_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_EDIT_ASSET_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_EDIT_ASSET_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_EDIT_ASSET_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_EDIT_ASSET_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_DELETE_SALES_GROUP_PRIV	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ZCM_DELETE_CONSUMER_PRIV	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			and relationship information inquiries.
ZCM_DELETE_SALES_ ORGANIZATION_PRIV	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ZCM_DELETE_SALES_ ORGANIZATION_PRIV	ORA_ZCM_SALES_PARTY_ ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ZCM_CREATE_CONSUMER_PRIV	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_CREATE_CONSUMER_PRIV	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_CREATE_CONSUMER_PRIV	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZCM_DELETE_SALES_ACCOUNT_ PRIV	ORA_ZCM_SALES_PARTY_ ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_SVC_CUSTOMER_SERVICE_MANAGER_JOB	Customer Service Manager	Manages a group of Customer Service Representatives, and would monitor the incoming call volume into the customer service department, perhaps balancing loads and reassigning work when call volume is high. This individual would monitor incoming business, and manage the demand flow to the fulfillment area. May also need to respond to escalations.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_SVC_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	Customer Service Representative	A resource that is typically assigned to a contact center to answer customer inquiries and resolve customer problems. Can respond to inquiries such as frequently asked questions, troubleshooting assistance, order status or order entry, or other transactions. This individual usually is assigned to serve a group of customers or support other customer-facing resources to resolve issues.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_SVC_ENGAGEMENT_CHANNEL_APPLICATION_ADMINISTRATOR_JOB	Engagement Channel Application Administrator	Individual responsible for administration of all aspects the supervisor dashboard, including

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			setup and administration of the engagement channel.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_SVC_ENGAGEMENT_CHANNEL_SUPERVISOR_JOB	Engagement Channel Supervisor	Individual responsible for monitoring metrics and overall resource balancing across the Engagement channels.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_ANALYTICS_DUTY	Knowledge Analytics	User's ability to execute and create analytics reports
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_CSO_KNOWLEDGE_AUTHOR_SERVICE_JOB	Knowledge Author Service	Provides for the ability to author service articles
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_CSO_KNOWLEDGE_AUTHORING_DUTY	Knowledge Authoring	Provides for the ability to participate in the life cycle of a knowledge article from creation to deletion
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_DUTY	Knowledge Home	Provides users with the ability to view and rate knowledge articles
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_CSO_KNOWLEDGE_HOME_DUTY	Knowledge Home	Provides users with the ability to view and rate knowledge articles
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_CSO_KM_REST_ADMIN	Knowledge Rest Administrator	This role is used by REST API users
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_CSO_KNOWLEDGE_SEARCH_SERVICE_JOB	Knowledge Search Service	Provides the ability to search Service department articles
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_CSO_KNOWLEDGE_SEARCH_SERVICE_JOB	Knowledge Search Service	Provides the ability to search Service department articles
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_USER_MANAGEMENT_DUTY	Knowledge User Management	Provides for the ability to manage users, internal knowledge roles, and user groups memberships
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ADMINISTRATION	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_MANAGER_JOB	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_REPRESENTATIVE_JOB	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_UER_UTILITIES_CUSTOMER_SERVICE_ADMINISTRATOR_JOB	ORA_UER_UTILITIES_CONFIGURATION_ADMINISTRATOR	Utilities Configuration Administrator	Individual responsible for maintaining utilities industry configurations.

Account

An organization account and its profile information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Organization Profile Additional Information*
Contained by	*Sales Account*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Alias	string	The organization alias name.
AnalysisFy	string	The fiscal year that the financial information is based on.
BankCode	string	Identifies the bank in several countries, typically for regulatory purposes.
BankOrBranchNumber	string	Stores bank number for banks and branch number for bank branches. Primarily stores ABA number for US bank branches.

Name	Type	Description
BranchCode	string	Identifies the bank branch in several countries, typically for regulatory purposes.
BranchFlag	boolean	Indicates if this is a branch location. If the value is True, then this is a branch location.
BusinessReport	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	Dun and Bradstreet business information report.
BusinessScope	string	The physical class of business in which a business participates. For example, local, national, or international.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CeoTitle	string	The formal title of the chief executive officer.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Comments	string	The comments for the record.
CongDistCode	string	The U.S. Congressional district code for the account.
ContentSourceNumber	string	The content source number is not used.
ControlYr	decimal	The year when current ownership gained control of the organization.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CorporationClass	string	The taxation classification for corporation entities such as Chapter S in the US.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CurrentFiscalYearPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its current fiscal year.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DataCloudStatus	string	Specifies the enrichment status of the person.
DbRating	string	The Dun & Bradstreet credit rating.
Disadv8aInd	string	Indicates whether the organization is considered disadvantaged by the US government under Title 8A. If the value is Yes, the organization is considered disadvantaged under Title 8A. The default value is No.
DisplayedDUNSPartyIdentifier	long	Dun and Bradstreet does not maintain data for the branch offices of companies that are located beyond North America. Data is only maintained for the company headquarters. If the data pertains only to company headquarters, the headquarters PARTY_ID is stored. If the data pertains to a branch office, the branch PARTY_ID is stored.
DoNotConfuseWith	string	Indicates existence of similarly named businesses.
DomesticUltimateDUNSNumberC	string	DUNS Number for the Domestic Ultimate, which is the highest family member in the same country as the business entity. A subject can be its own Domestic Ultimate.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	The effective latest change is not used.

Name	Type	Description
EffectiveSequence	int	The effective sequence is not used.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EmployeesAtPrimaryAddress	string	The number of employees at the referenced address.
EmployeesAtPrimaryAddressEstimation	string	Indicates the calculation of employees at the primary address as estimated.
EmployeesAtPrimaryAddressMinimum	string	Indicates the calculation of employees at the primary address as minimum.
EmployeesAtPrimaryAddressText	string	The number of employees at the referenced address that cannot be mapped to a number.
EmployeesTotal	decimal	The total number of employees.
EnquiryDUNS	string	The identifier used to query the Dun and Bradstreet data. If a location is a branch, then in some countries the headquarters DUNS number is used to do the query. Otherwise it is the same as the DUNS number.
ExportInd	string	Indicates whether the organization is an exporter. If the value is Y, then the organization is an exporter. The default value is N.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
GlobalUltimateDUNSNumberC	string	DUNS Number for the Global Ultimate, which is the highest family member in the same country as the business entity as you proceed further on this branch of the tree. A case can be its own ultimate.
GrowthStrategyDescription	string	The description of the growth strategy.

Name	Type	Description
HQBranchIndicator	string	The status of this site, such as HQ, a branch, or a single location. A list of accepted values are defined in the lookup type HQ_BRANCH_IND.
HomeCountry	string	The home country associated with the party.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
ImportInd	string	Indicates whether the organization is an importer. If the value is Y, then the organization is an importer. The default value is N.
IncorpYear	int	The year that the business was formally incorporated.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LaborSurplusInd	string	Indicates whether the organization operates in an area with a labor surplus. If the value is Y, then the organization operates in an area with a labor surplus. The default value is N.
LastEnrichmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was last enriched in DaaS.
LastSourceUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated by the source system.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdateSourceSystem	string	The source system that last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
LegalStatus	string	The legal structure of the organization such as partnership, corporation, and so on.
LineOfBusiness	string	The type of business activities performed at this site.
LocalActivityCode	string	The local activity classification code.
LocalActivityCodeType	string	The local activity classification code type identifier.
LocalBusIdenType	string	The most common business identifiers in a country such as Chamber of Commerce Number in Italy, Government Registration Number in Taiwan. A list of accepted values are defined in the lookup type LOCAL_BUS_IDEN_TYPE.
LocalBusIdentifier	string	The primary identifier assigned to a businesses by a government agency such as Chamber of Commerce, or other authority. It is often used by countries other than USA.
MinorityOwnedInd	string	Indicates whether the organization is primarily owned by ethnic or racial minorities. If the value is Y, then the organization is owned by ethnic or racial minorities. The default value is N.
MinorityOwnedType	string	The type of minority-owned firm.
MissionStatement	string	The corporate charter of organization in user-defined text format.
NextFyPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its next fiscal year.
OobInd	string	Indicates whether the organization is out of business. If the value is Y, then the organization is out of business. The default value is N.
OrgInformation	*Trading Community Organization Profile Additional Information*	The information of the organization.
OrganizationName	string	The name of the party when the party type is Organization.
OrganizationProfileId	long	The unique identifier of the organization profile.

Name	Type	Description
		• Primary Key
OrganizationSize	string	Size of an organization based on revenue, number of employees, and so on.
OrganizationType	string	Not used in Fusion V1.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
ParentDUNSNumberC	string	Parent is a corporation that owns more than 50 percent capital stock of another corporation. The parent company can also be a subsidiary of another corporation. If the parent also has branches, then it is headquarters and also parent company. Headquarters is a business establishment that has branches or divisions reporting to it, and is financially responsible for those branches or divisions. If the headquarters has more than 50 percent of capital stock owned by another corporation, then it is also a subsidiary. If it owns more than 50 percent of capital stock of another corporation, then it is also a parent.
ParentSubInd	string	Indicates whether the organization is a parent or subsidiary.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PreferredContactEmailAddress	string	The e-mail address of the primary contact person of the organization.
PreferredContactFormattedPhoneNumber	string	The formatted phone number of the primary contact person of the organization.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.

Name	Type	Description
PreferredContactName	string	The name of the primary contact person of the organization.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the identifying address.
PrimaryAddressCountry	string	The country listed in the TERRITORY_CODE column of the FND_TERRITORY table for the identifying address.
PrimaryAddressCounty	string	The county of the Identifying address.
PrimaryAddressLine1	string	The first line of the identifying address.
PrimaryAddressLine2	string	The second line of the Identifying address.
PrimaryAddressLine3	string	The third line of the Identifying address.
PrimaryAddressLine4	string	The fourth line of the Identifying address.
PrimaryAddressPostalCode	string	The postal code of the identifying address.
PrimaryAddressProvince	string	The province of the identifying address.
PrimaryAddressState	string	The state of the Identifying address.
PrimaryEmailAddress	string	The e-mail address of the organization.

Name	Type	Description
PrimaryEmailId	long	The primary e-mail contact point ID of the organization.
PrimaryFormattedPhoneNumber	string	The primary telephone number formatted in the local format of the organization.
PrimaryLanguage	string	The standard name for a language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The primary contact point phone ID of the organization.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	The primary uniform resource locator.
PrimaryWebId	long	The unique identifier of the primary uniform resource locator.
PrincipalName	string	The Name of the highest ranking person in the company.
PrincipalTitle	string	The title of the highest ranking person in the organization.
Pronunciation	string	The pronunciation of the organization.
PublicPrivateOwnershipFlag	boolean	Indicator to specify if the organization is privately owned. Y stands for a privately owned organization and N stands for a publicly owned organization.

Name	Type	Description
RegistrationType	string	Indicates the registration type of the organization.
RentOwnInd	string	Indicates if this account owns or rents the place of business. A list of valid values for rent, own, and lease are defined in the lookup OWN_RENT_IND.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The standard industry classification (SIC) code.
SICCodeType	string	The version of the standard industry classification (SIC) code.
SeblUserKeyLoc	string	The location of the account, optional part of the user primary key.
SmallBusInd	string	Indicates whether the organization is considered as a small business. If the value is Y, then the organization is considered as a small business. The default value is N.
Status	string	The status of the record.
StockSymbol	string	The corporate stock symbol such as ORCL.
SuffixOverriddenFlag	boolean	Indicator to specify that the attribute has Y if the suffix is overridden by user and N otherwise. Default value is N.
ThirdPartyFlag	boolean	Indicator that tracks if a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. Y stands for a third party relationship, N stands for a direct relationship. If Oracle Service is installed, the third party field in the Customers window is required.
TotalEmployeesEstimatedIndicator	string	Indicates if the employee total is estimated. The accepted values are defined in the lookup type TOTAL_EMP_EST_IND.
TotalEmployeesInd	string	Indicates if subsidiaries are included in the calculation of total employees. The accepted values are defined in the lookup type TOTAL_EMPLOYEES_INDICATOR.

Name	Type	Description
TotalEmployeesMinimumIndicator	string	Indicates if the number is a minimum, maximum, or average number of total employees. The accepted values are defined in the lookup type TOTAL_EMP_MIN_IND.
TotalEmployeesText	string	The total number of employees in text format.
TotalPaymentAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total number of payment experiences.
TradingPartnerIdentifier	string	One column to store the FSIO related trading partner codes. It stores alpha numeric values and also addresses the Fed vs. Non-Fed attribute requirement.
UniqueNameAlias	string	The name as identified by the users to internally recognize the organization.
UniqueNameSuffix	string	Identifies system generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
WomanOwnedInd	string	Indicates whether the organization is primarily owned by women. If the value is Y, then the organization is primarily owned by women. The default value is N.
YearEstablished	int	The year when the organization began doing business.

Additional Account Name

An additional name of an organization, such as a legal name or a DBA name.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}AdditionalOrganizationName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*

Relationship Type	Object or Service
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OrigSystem	string	The source system name.

Name	Type	Description
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Indicator to specify the preferred additional name for the organization.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameId	long	The unique identifier of the party name. It is primary Key and system generated. • Primary Key
PartyNameType	string	The type of the name. It is a value defined by the additional party name and identifier type entity. The party type must be consistent with the party type that the PARTY_NAME_TYPE can be applied to.
PreferredFlag	boolean	Indicator to specify the name as preferred name for this party within the name type. Possible values are Y and N. Default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TransliterationLang	string	Used to identify the language for the name. It is validated against FND_LANGUAGES.LANGUAGE_CODE. Default value is the Session Language.

Additional Contact Name

An additional name of a person, such as the maiden name or alias.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}AdditionalPersonName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Indicator to specify the preferred additional name of a person.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameId	long	The unique identifier of the party name ID. It is primary key and system generated. • Primary Key
PartyNameType	string	The type of the name. It is a value defined by the additional party name and identifier type entity. The party type must be consistent with the party type that the PARTY_NAME_TYPE can be applied to.
PersonAcademicTitle	string	Used to specify the academic title for a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field degree in HL7.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	Used to specify the last name prefix such as fon, van, and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_PREFIX in HZ_PERSON_PROFILES is used. It corresponds to the field Last Name Prefix in HL7.

Name	Type	Description
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	Used to specify the name suffix such as junior, senior, the third, and so on for a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Suffix in HL7.
PersonPreNameAdjunct	string	Used to specify the name prefix such as Mr., Ms, Dr, and so on for a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Prefix in HL7. It is validated against lookup CONTACT_TITLE.
PersonPreviousLastName	string	Used to specify the previous last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It has no mapping in HL7.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PreferredFlag	boolean	Indicator to specify the name as preferred name for the party within the name type. Possible values are Y and N. Default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TransliterationLang	string	Used to specify the language used for the name. It is validated against FND_LANGUAGES.LANGUAGE_CODE. Default value is the Session Language.

Additional Household Name

An additional name associated with a group. For example, the phonetic name of a group.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}AdditionalGroupName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Household*
Handled by	*Trading Community Group*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Identify the name as preferred name for this party within this name type. Possible values are 'Y' and 'N'. Default is 'N'.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameId	long	Unique Identifier of Party Name. • Primary Key
PartyNameType	string	The type of party name.
PreferredFlag	boolean	The flag which Identifies the name as preferred name for this party within this name type. Possible values are 'Y' and 'N'. Default is 'N'.
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TransliterationLang	string	Used to capture the language used for the name.

Additional Identifier

An additional identifier of a trading community member, such as driver's license number or passport number.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}AdditionalPartyId

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
ExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expiration date for the identifier. It may be NULL, and does not apply to all types of identifiers.
IssueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date in which the Identifier was issued. It may be NULL and does not apply to all types of identifiers.
IssuingAuthorityName	string	The issuing authority name.
IssuingAuthorityPartyId	long	The unique identifier of the issuing authority.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyIdentifierId	long	The unique identifier of the party identifier. • Primary Key
PartyIdentifierType	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.

Name	Type	Description
PartyIdentifierType1	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.
PartyIdentifierValue	string	The value of the party identifier.
PartyName	string	The name of the party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StateProvince	string	The province of the address.
StatusCode	string	The pre-defined code used to indicate the status.

Address

An address of a trading community member, such as Oracle Corporation is located at 500 Oracle Parkway, Redwood Shores, CA.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Telex*
Contains	*Source System Reference*

Relationship Type	Object or Service
Contains	*Contact Preference*
Contains	*Trading Community Address Additional Information*
Contains	*Email*
Contains	*Electronic File Transfer*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AddressExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the location is no longer valid.
AddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines that are used in Japan.
AddressStyle	string	Style of the address.
Addressee	string	The information of the addressee.
City	string	The name of the city.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
ContactPreferenceExistFlag	boolean	Indicator to specify if the contact is primary contact for the party.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	The name of the country.
Country1	string	The attribute country1 is not used.

Name	Type	Description
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
DoNotValidateFlag	boolean	Indicator to specify that a particular location is not eligible for address validation irrespective of the current validation.
Eft	*Electronic File Transfer*	The electronic file transfer information for the party.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedAddress	string	The formatted read-only address.
FormattedLocaleAddress	string	The formatted read-only local address.
FormattedMultilineAddress	string	The formatted multi line address of the party site.

Name	Type	Description
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
HouseType	string	Indicates the building type.
IdentifyingAddressFlag	boolean	Indicator to specify the identifying address for the party. Y stands for the indentifying site and N stands for sites that are not the indentifying site.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
Language	string	The operating language for the party site.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	The latitude of the party address.
LocationDirections	string	Directions to the location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
LocationLanguage	string	The operating language for the locations.
Longitude	decimal	The longitude of the party address.
Mailstop	string	A user-defined code to indicate a mail drop point within the organization.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction

Name	Type	Description
		to detect whether another session has updated the row since it was last queried.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary address of the contact irrespective of the context. Y stands for primary address and N stands for all others.
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	Stores the doing-business_as (DBA) party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameDivision	string	Stores the division party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameLegal	string	Stores the legal party name for a party site. This column is used to store FSIO related legal party name attribute.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteInformation	*Trading Community Address Additional Information*	The party address information.
PartySiteName	string	The user-defined name for the site.
PartySiteNumber	string	The party site number of the address.
PartySiteType	string	Stores the party site type and is based on the lookup. Currently this is either null or one-time.
PartySiteUse	*Trading Community Address Purpose*	The information of the party address usage.
PartyUsageCode	string	The usage context of a party's contact point.

Name	Type	Description
Phone	*Phone*	The phone information for the entity.
Position	string	The primary direction such as north or east that is used to access the location.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four digit extension to the United States postal ZIP code.
Province	string	The name of the province.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The Telex information associated with the party.
UsageCode	string	The usage code is not used.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	The standardized status code describing the results of the validation.
Web	*Web*	The web information related to the record.

Asset

Assets represents the products owned by customers. Anything tangible or intangible that is capable of being owned or controlled to produce value. For example: Tangible Items - Computers, engines, machine parts, and so on. Intangible items - Software, Services, Licenses and agreements.

QName: {http://xmlns.oracle.com/apps/crmCommon/assetImport/publicModel/assetImportService/}Asset

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Account*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AssetAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The cost amount of the asset in the transaction currency.
AssetDescription	string	The description field of the asset.
AssetGroup	string	The name of the asset group.
AssetId	long	The unique identifier of the asset. • Primary Key
AssetName	string	The name that describes the asset.
AssetNumber	string	The number that identifies the asset.
AssetOrigSystem	string	A source system code that identifies the original source system of the asset.

Name	Type	Description
AssetOrigSystemReference	string	A source system reference that identifies the unique ID of the asset in user's legacy or external system.
AssetTag	string	The tag number associated with the asset.
AttributeCategory	string	Standard column used in Fusion tables.
BatchId	long	The batch ID for importing process.
CompetitiveAsset	string	Indicates if the asset belongs to a competitor.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CrmConvRate	string	CRM currency convert rate.
CrmCorpCurrencyCode	string	The corporate currency code.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerId	long	The unique ID for the existing customer party record in the Oracle Fusion destination table.
CustomerPartyNumber	string	
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
EnteredCurrencyCode	string	The code that represents the currency for the asset amounts.

Name	Type	Description
ExchangeRate	decimal	The currency exchange rate.
IBAssetId	long	Unique ID of the associated Install Base asset record.
IBAssetSyncedVersionNumber	int	Last synced Version Number of the Install Base Asset
InstallDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date the asset was installed.
InterfaceRowId	long	The interface table row's unique ID.
InventoryItemId	long	The unique ID for the existing sales catalog product (item) record in the Oracle Fusion destination table.
InventoryOrgId	long	Item organization Id as created by Fusion CRM.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Manufacturer	string	The name of the manufacturer.
Model	string	The name of the model.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyType	string	
PartyUniqueName	string	
PrContactPartyId	long	The party identifier of the asset's primary contact.
PrContactPartyNumber	string	

Name	Type	Description
ProdGroupId	long	The product group ID in sales catalog.
Product	string	The name of the product.
ProductType	string	
PurchaseDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date the asset was purchased.
Quantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The quantity purchased.
RequestId	long	A system-generated read-only attribute used by the application framework.
ResourceOwnerId	long	The identifier of the asset's resource owner.
ResourceOwnerPartyNumber	string	
SerialNumber	string	The asset's serial number.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
StatusCode	string	The pre-defined code used to indicate the status.
UOMCode	string	The unit of measure.
Version	string	The version of the asset product.
Year	string	The year of manufacture or the nominal model year of the asset product.

Certification

The certification information of a trading community member, such as a full ISO 9001 registered firm.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}Certification

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CertificationId	long	The unique identifier for certification. • Primary Key
CertificationName	string	The name of the certification such as ISO9000 and GMP001.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrentStatus	string	The name for the status of the certification. For example, applied for, granted, or expired.
ExpiresOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification expires.
Grade	string	The level or grade of certification provided by the ISSUED_BY_AUTHORITY. For example, founding member, gold, fully certified, and partially certified.
IssuedByAuthority	string	The name of the certifying authority.
IssuedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification was issued.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Citizenship

The citizenship information about a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Citizenship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BirthOrSelected	string	Indicates if the citizenship was granted by being born in the country or by naturalization.
CitizenshipId	long	The unique citizenship identifier of a person. • Primary Key
CountryCode	string	The ISO code of the country from which a person claims citizenship.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
DateDisowned	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when an individual renounced citizenship. This is usually a self-declared date that might not match a legal effective date.
DateRecognized	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the country granted citizenship to the individual. For a native-born person, this date is typically the person's date of birth.
DocumentReference	string	The unique reference number such as passport number or naturalization reference number associated with DOCUMENT_TYPE.
DocumentType	string	The class of document that confirms citizenship. For example, a passport, or naturalization papers.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Classification Assignment

The classification code assigned to a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CodeAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Sales Competitor*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Reference*
Handled by	*Sales Reference Customer*
Handled by	*Company and User Registration*
Handled by	*Sales Party*
Handled by	*Sales Competitor Service*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party Territory service*
Handled by	*Sales Party Resource Service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassCategory	string	The name of the classification category.
ClassCode	string	The code of the classification.
CodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an object. It is primary key and system generated. • Primary Key
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableKey1	string	The first column of the alphanumeric or multi-part foreign key.

Name	Type	Description
OwnerTableKey2	string	The second column of the alphanumeric or multi-part foreign key.
OwnerTableKey3	string	The third column of the alphanumeric or multi-part foreign key.
OwnerTableKey4	string	The fourth column of the alphanumeric or multi-part foreign key.
OwnerTableKey5	string	The fifth column of the alphanumeric or multi-part foreign key.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PrimaryFlag	boolean	Indicator that specifies if this is the primary class code of a class category for the organization. Y stands for the primary class code and N stands for all others.
Rank	decimal	Ranks classes if multiple classes are assigned to a party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Contact

The profile information of the trading community person. The profile includes information such as marital status and additional name.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Person Profile Additional Information*
Contained by	*Trading Community Person Details*
Contained by	*Sales Account*
Contained by	*Loyalty Member*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Loyalty Member Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Alias	string	Person alias name.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DataCloudStatus	string	The enrichment status of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
DateOfDeath	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person died.
DeceasedFlag	boolean	Y or N indicates whether the person is deceased or not.
DeclaredEthnicity	string	The declared ethnicity of the person.
Department	string	The free form text used to name the department.
DepartmentCode	string	The list of values for possible department codes.
Distance	decimal	The distance from the input location.
DoNotCallFlag	boolean	Indicator to specify if the user can send mail to the person or not.
DoNotContactFlag	boolean	Indicator to specify if the user can contact the person through phone, e-mail, or mail or not.
DoNotEmailFlag	boolean	Indicator to specify if the user can send e-mail to the person or not.

Name	Type	Description
DoNotMailFlag	boolean	Indicator to specify if the user can send mail to the person or not.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	The date effective entity. Y indicates that this row represents the latest change in the day.
EffectiveSequence	int	The date effective entity. Indicates the order of different changes made during a day. The lowest value represents the earliest change in the day.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
FavoriteContactFlag	boolean	Indicator to specify if the person is key contact.
Gender	string	The gender details such as male, female, or unknown of the person.
HeadOfHouseholdFlag	boolean	The head of household indicator is not used.
HouseholdIncomeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The household income amount is not used.
HouseholdSize	decimal	The household size is not used.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
JobTitle	string	The free form text for the job title.
JobTitleCode	string	The code given to the job title.
LastContactDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the contact was last contacted.
LastEnrichmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was last enriched in DaaS.

Name	Type	Description
LastKnownGPS	string	The geophysical location that is, GPS point last reported for the person.
LastSourceUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated by the source application.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdateSourceSystem	string	The source application that last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person.
MaritalStatusEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marital status of the person changed.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PersonAcademicTitle	string	The academic title that is part of the name of a person such as Dr. Jane Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonInformation	*Trading Community Person Profile Additional Information*	The information of the person.

Name	Type	Description
PersonInitials	string	The Initials of the name.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	Used to identify the Last name prefix such as fon, van and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_PREFIX in HZ_PERSON_PROFILES is used. Corresponds to the field, Last Name Prefix in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonName	string	The combination of title, first, middle, last, and suffix names.
PersonNameSuffix	string	Indicates the place in a family structure. For example, III in Tom Jones III.
PersonPreNameAdjunct	string	Salutary introduction such as Mr., Herr, and so on.
PersonPreviousLastName	string	The previous last or surname of the person.
PersonProfileId	long	The unique identifier of the person profile. • Primary Key
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PersonalIncomeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated gross annual income of the person.
PlaceOfBirth	string	The place where the person was born, including city and country.

Name	Type	Description
PreferredContactEmail	string	The preferred contact e-mail of the person.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactName	string	The preferred contact name of the person.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredContactPhone	string	The preferred contact phone of the person.
PreferredContactURL	string	The preferred contact uniform resource locator of the person.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the identifying address.
PrimaryAddressCountry	string	The country listed in the TERRITORY_CODE column of the FND_TERRITORY table for the identifying address.
PrimaryAddressCounty	string	The county of the identifying address.
PrimaryAddressLatitude	decimal	The primary address latitude information for the location for spatial proximity and containment purposes.
PrimaryAddressLine1	string	The first line of the identifying address.
PrimaryAddressLine2	string	The second line of the identifying address.

Name	Type	Description
PrimaryAddressLine3	string	The third line of the identifying address.
PrimaryAddressLine4	string	The fourth line of the identifying address.
PrimaryAddressLocationId	long	The primary address location ID.
PrimaryAddressLongitude	decimal	The primary address longitude information for the location for spatial proximity and containment purposes.
PrimaryAddressPostalCode	string	The postal code of the identifying address.
PrimaryAddressProvince	string	The province of the identifying address.
PrimaryAddressState	string	The state of the identifying address.
PrimaryCustomerId	long	The customer party identifier of a primary customer for a given person. There should be a valid relationship between the person and the customer.
PrimaryCustomerName	string	The customer party name of a primary customer for a given person. There should be a valid relationship between the person and the customer.
PrimaryCustomerRelationshipId	long	The unique identifier of the primary customer relationship.
PrimaryEmailAddress	string	The e-mail address of the person.
PrimaryEmailId	long	The primary contact point e-mail ID of the person.
PrimaryFormattedAddress	string	The primary formatted address of the person.
PrimaryFormattedPhoneNumber	string	The primary telephone number formatted in the local format of the person.
PrimaryLanguage	string	The standard name for a language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.

Name	Type	Description
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The primary contact point phone ID of the person.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	The uniform resource locator.
PrimaryWebId	long	The unique identifier of the primary uniform resource locator.
Pronunciation	string	The person pronunciation.
RentOwnInd	string	Indicates if the person rents or owns his or her residence. Lookup values include rent, own, lease, and so on.
RequestId	long	A system-generated read-only attribute used by the application framework.
SalesAffinityCode	string	The affinity of a person towards the deploying organization.
SalesBuyingRoleCode	string	The role of a person in the buying process.
Salutation	string	The phrase used to address a party in any correspondence.
Status	string	The status of the record.
SuffixOverriddenFlag	boolean	This attribute has Y if the suffix is overridden by user and N if not. Default value is N.
UniqueNameSuffix	string	Identifies system generated or manually overridden suffix.

Name	Type	Description
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.

Contact Address

The address of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PersonPartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Contact Preference*
Contains	*Source System Reference*
Contains	*Trading Community Address Additional Information*
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Addressee	string	The information of the addressee in the contact address.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
IdentifyingAddressFlag	boolean	Indicates whether this is the identifying address for the party. If the value is Y, then this is the identifying address for the party.
Language	string	The language used in the contact's location.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.

Name	Type	Description
Mailstop	string	A user-defined code to indicate a mail drop point within their organization.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary address of the associated object. If the value is True, then this is the primary address. The default value is False.
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	The doing-business_as (DBA) party name for a party site.
PartyNameDivision	string	The division of the party name for a party site.
PartyNameLegal	string	The legal party name for a party site.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteName	string	The address associated with the party site.
PartySiteNumber	string	The alternate identifier of the party site.
PartySiteType	string	The type of the party site.
PartySiteUse	*Trading Community Address Purpose*	Indicates the use of the party site.
PartyUsageCode	string	The usage context of a party's contact point.
PersonPartySiteInformation	*Trading Community Address Additional Information*	The party site information of the person.

Name	Type	Description
Phone	*Phone*	The phone information for the entity.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Contact Interest

The interests of the trading community member, such as baseball, sports car, or painting.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonInterest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
InterestName	string	A text field that lets you assign a descriptive name to an interest. For example, pets, dogs, baseball, or sports car racing.
InterestTypeCode	string	A code to classify interests for evaluation.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LevelOfInterest	string	The user-defined level number or name to rate the amount of interest in the activity. For example, high, medium, or low.
LevelOfParticipation	string	The user-defined level number or name to indicate if the person participates and to what extent.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PersonInterestId	long	The unique identifier of interests of the person. • Primary Key

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
Since	{http://xmlns.oracle.com/adf/svc/types/}date-Date	An approximate date from which the person was involved with the activity.
SportIndicator	string	Indicates if the activity is a sport. Y stands for sports and N stands for non-sport activities.
Status	string	The status of the record.
SubInterestTypeCode	string	A code to classify subinterests of the interest type code.
Team	string	Any team the person likes to watch or play for.

Contact Language

The languages known information of a trading community member. For example, Mary Smith can speak both Spanish and English but can only read and write English.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PersonLanguage

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Handled by	*Trading Community Group*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*

Relationship Type	Object or Service
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LanguageName	string	The standard name for a language. For example, Spanish, Mandarin, or American English. Foreign key to the FND_LANGUAGES table.
LanguageUseReferenceId	long	The unique identifier of the language use reference. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
NativeLanguageFlag	boolean	Indicator to specify if the language is the declared native language of a person. Y stands for a declared native language and N stands for all other languages.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
PartyId	long	The unique identifier of the contact party.
PrimaryLanguageIndicator	string	Indicates if this is the primary language used by a person in day-to-day transactions. Y stands for the primary language and N stands for other languages.
ReadsLevel	string	The user-defined level number or name to indicate the ability to read a language.
RequestId	long	A system-generated read-only attribute used by the application framework.
SpeaksLevel	string	The user-defined level number or name to indicate the ability to speak a language.
SpokenComprehensionLevel	string	The code to indicate comprehension of a spoken language.
Status	string	The status of the record.
WritesLevel	string	The user-defined level number or name to indicate the ability to write in a language.

Contact Preference

The contact preference of the trading community member. For example, do not call Joe Smith between 10 a.m. and 12 noon on weekdays.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}ContactPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Electronic Data Interchange*

Relationship Type	Object or Service
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Household*
Contained by	*Phone*
Contained by	*Telex*
Contained by	*Web*
Contained by	*Contact Address*
Contained by	*Electronic File Transfer*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactLevelTable	string	The table that stores the contact level of the contact preference, and uses the SUBJECT_TABLE lookup. The list of accepted values are HZ_PARTIES, HZ_PARTIES_SITES, or HZ_CONTACT_POINTS.
ContactLevelTableId	long	The foreign key to the table specified in CONTACT_LEVEL_TABLE column. The list of accepted values are PARTY_ID from HZ_PARTIES table, CONTACT_POINT_ID from HZ_CONTACT_POINTS table, or PARTY_SITE_ID from HZ_PARTY_SITES table.
ContactPreferenceId	long	The unique identifier for the contact preference. • Primary Key
ContactType	string	The contact party type that defines whether the contact is a sales account, a prospect, a contact, or any other user-defined party type. The default value is CUSTOMER. A list of accepted values is defined in the lookup CONTACT_TYPE.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
MaximumNoOfInteractUOMCode	string	The period of time during which the maximum number of interactions applies. Uses the MAX_NO_OF_INTERACT_UOM_CODE lookup.
MaximumNoOfInteractions	decimal	The number of times you can use this contact point. The period of time that this number applies is stored in the MAX_NO_OF_INTERACT_UOM_CODE column.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PreferenceCode	string	Indicates whether to use a particular contact method. The list of accepted values are defined in the PREFERENCE_CODE lookup.
PreferenceEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes inactive.
PreferenceEndTimeHR	int	The hour part of time when the contact preference becomes inactive. The time is recorded in the 24 hour format.
PreferenceEndTimeMi	int	The minutes part of the time when the contact preference becomes inactive.
PreferenceStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes active.
PreferenceStartTimeHR	int	The hour part of time when the contact preference becomes active. The time is recorded in the 24 hour format.
PreferenceStartTimeMi	int	The minutes part of the time when the contact preference becomes active.
PreferenceTopicType	string	The appropriate subjects to send the party that the preference is created for. The list of accepted values are defined in the PREFERENCE_TOPIC_TYPE lookup.
PreferenceTopicTypeCode	string	The code of the preference topic type.

Name	Type	Description
PreferenceTopicTypeId	long	The unique identifier of the preference topic type.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
RequestedBy	string	Indicates if the permission or restriction was created internally or requested by the party. The list of accepted values are defined in the REQUESTED_BY lookup.
Status	string	The status of the record.

Credit Rating

The trading community member's credit rating information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CreditRating

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AverageHighCredit	decimal	The average of all the high credit experiences.
BankruptcyInd	string	Indicates if open bankruptcy exists. Y stands for any open bankruptcy that exists and N stands for no open bankruptcy.
BusinessDiscontinued	string	The business discontinued at the listed location. Prompts reader to contact D and B customer service center if any business is operating.
ClaimsInd	string	Indicates if open claims, legal claims, liens, protested bills, or any equivalent information exists. Y stands for availability of information and N stands for no information.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRatingId	long	The unique identifier of the credit rating. • Primary Key
CreditRiskScoreExplain	string	Explains numeric credit risk score that estimates the risk of delinquent payment over the next 12 months.

Name	Type	Description
CreditScore	string	Indicates the risk of delinquent payments.
CreditScoreAge	decimal	Indicates the age of the credit score expressed in months.
CreditScoreClass	decimal	The date when the credit score was calculated.
CreditScoreCommentary	string	The lookup for explanation codes in the CREDIT_SCORE column.
CreditScoreCommentary10	string	Indicates comments about the credit score.
CreditScoreCommentary2	string	Indicates comments about the credit score.
CreditScoreCommentary3	string	Indicates comments about the credit score.
CreditScoreCommentary4	string	Indicates comments about the credit score.
CreditScoreCommentary5	string	Indicates comments about the credit score.
CreditScoreCommentary6	string	Indicates comments about the credit score.
CreditScoreCommentary7	string	Indicates comments about the credit score.
CreditScoreCommentary8	string	Indicates comments about the credit score.
CreditScoreCommentary9	string	Indicates comments about the credit score.
CreditScoreDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the credit score was calculated.
CreditScoreIncdDefault	decimal	Indicates the probability expressed as a percentage of delinquency for a score range or class.
CreditScoreNatlPercentile	decimal	Indicates the relative credit rating of a business compared to all businesses whose credit ratings are included in the local country database.
CreditScoreOverrideCode	string	Indicates why no score was calculated or why score is equal to zero in the US.

Name	Type	Description
CriminalProceedingInd	string	Indicates if criminal proceedings exist. Y stands for availability of information and N stands for no information.
DebarmentInd	string	Indicates whether the company is debarred from doing business with government agencies. Y stands for company debarred and N stands for not debarred.
DebarmentsCount	decimal	The count of filings by government agencies in the United States that prohibit the party from entering into contracts or transactions with those agencies.
DebarmentsDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date of the most recent filing to prohibit the party from entering into contracts or transactions with a government agency in the United States.
DelqPmtPctgForAllFirms	decimal	Specifies a delinquency percentage for all firms.
DelqPmtRngPrcnt	decimal	Specifies a delinquency percentage for credit score range.
Description	string	The free text description of the record.
DetHistoryInd	string	The code that indicates if detrimental information exists for the party and whether complete details exist on management and party. Y stands for availability of information and N stands for no information.
DisasterInd	string	Indicates if information exists about disasters such as fires, hurricanes, and so on. Y stands for availability of information and N stands for no information.
FailureScore	string	For US, the failure risk class, 1 through 5. For Canada , the stability score that indicates risk of business closure, 1 through 10. For Australia, the percentile failure score.
FailureScoreAge	decimal	The failure score age in months.
FailureScoreClass	decimal	1 through 5 to indicate risk of financial stress for a customer account. 1 for a business with greatest risk and 5 for a business with least risk.
FailureScoreCommentary	string	The comments related to failure score.

Name	Type	Description
FailureScoreCommentary10	string	The comments related to failure score.
FailureScoreCommentary2	string	The comments related to failure score.
FailureScoreCommentary3	string	The comments related to failure score.
FailureScoreCommentary4	string	The comments related to failure score.
FailureScoreCommentary5	string	The comments related to failure score.
FailureScoreCommentary6	string	The comments related to failure score.
FailureScoreCommentary7	string	The comments related to failure score.
FailureScoreCommentary8	string	The comments related to failure score.
FailureScoreCommentary9	string	The comments related to failure score.
FailureScoreDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the failure score was calculated.
FailureScoreIncdDefault	decimal	Probability, in percentage, of failure for score range of class.
FailureScoreNatnlPercentile	decimal	The national percentile that reflects the relative ranking of a company among all scored companies in the local country database.
FailureScoreOverrideCode	string	In Europe, code for the reason for variance between the D and B rating and the failure score. In the US, code for the reason why no score was calculated, or why the score is zero.
FinclEmbtInd	string	Indicates if open bankruptcy, receivership liquidation, or any equivalent information exists. Y stands for availability of information and N stands for no information.
FinclLglEventInd	string	Indicates if special events such as financial embarrassment and legal filings exist. Y stands for availability of information and N stands for no information.
GlobalFailureScore	string	The global score for the risk of business default.

Name	Type	Description
HighCredit	decimal	Maximum credit ever extended to the organization.
HighRngDelqScr	decimal	Specifies the high end of the range of the commercial credit score.
JudgementInd	string	Indicates if open judgments exist. Y stands for any open judgment that exists and N stands for no open judgments.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LienInd	string	Indicates if open liens exist. Y stands for any open lien that exists and N stands for no open liens.
LowRngDelqScr	decimal	Specifies the low end of the range of the commercial credit score.
MaximumCreditCurrencyCode	string	The currency used to denominate the MAXIMUM_CREDIT_RECOMMENDATION column.
MaximumCreditRecommendationAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Maximum credit limit recommended for the currency specified in the MAXIMUM_CREDIT_CURRENCY_CODE column.
NegvPmtExpl	string	The conditional comment generated when negative payments are present.
NoTradeInd	string	Indicates that no trade experiences exist. Y stands for any trade experience that exists and N stands for no trade experience.
NumberParentBankruptcyConversions	decimal	The number of bankruptcy conversions by the parent.
NumberParentBankruptcyFiling	decimal	The number of bankruptcies filed by the parent.
NumberSpecialEvent	decimal	The number of occurrences of the special events.

Name	Type	Description
NumberTradeExperiences	decimal	The number of trade experiences.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OprgSpecificationEvntInd	string	Indicates if information exists about operational changes such as name changes, management changes, change of control, moves, and so on. Y stands for availability of information and N stands for no information.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OtherSpecificationEvntInd	string	Indicates if special events exist that are not otherwise specified.
ParentHQBankruptcyInd	string	Indicates if parent (P) or headquarters (H) are entered into bankruptcy.
PartyId	long	The unique identifier of the contact party.
PaydexComment	string	Additional paydex information.
PaydexFirmComment	string	Comment on the paydex score for the organization.
PaydexFirmDays	string	The number of days used in the paydex score.
PaydexIndustryComment	string	Comment on the paydex score for the industry.
PaydexIndustryDays	string	The number of days used in the paydex score for the industry.
PaydexNorm	string	Median or average Paydex score for the industry.
PaydexScore	string	Paydex score for the previous 12 months payment history.
PaydexThreeMonthsAgo	string	Paydex score three months ago.
PrntBkcyChapterConv	string	The change of bankruptcy type.

Name	Type	Description
PrntBkcyConvDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the bankruptcy converted from one type to another.
PrntBkcyFilgChapter	decimal	The chapter number of the bankruptcy filed by the parent under the US uniform commercial code.
PrntBkcyFilgDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The bankruptcy filing date of the parent.
PrntBkcyFilgType	string	The type of bankruptcy filed by the parent.
PubRecExpl	string	The conditional comment generated if suits, liens, and judgments exist.
RatedAsOfDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the rating was acquired.
Rating	string	The rating number or code of the rating company.
RatingOrganization	string	The name of the credit rating organization.
RequestId	long	A system-generated read-only attribute used by the application framework.
SecuredFlngInd	string	Indicates if open secured filings such as UCC filings, secured charges or mortgages pledging, or any equivalent information exists. Y stands for availability of information and N stands for no information.
SlowTradeExpl	string	The conditional comment generated when paydex score indicates that slow trade experiences are present.
SpecialEventComment	string	The comment generated if special event section exists.
SpecialEventText	string	The narrative of the special event.
SpecialEventUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the special event was updated.
Status	string	The status of the record.

Name	Type	Description
SuitInd	string	Indicates if open suits exist. Y stands for any open suit that exists and N stands for no open suits.

Customer Contact Profile

The person who functions as a contact for an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Organization Contact Additional Information*
Contains	*Customer Contact Responsibility*
Contains	*Source System Reference*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
ContactFormattedAddress	string	The formatted version of the contact address.
ContactFormattedMultilineAddress	string	The formatted multiline version of the contact address.
ContactName	string	The name of the contact.
ContactNumber	string	The user-defined identification number for this contact.
ContactPartyId	long	The unique identifier of the contact.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerEmailAddress	string	The e-mail address of the customer this contact person belongs to.
CustomerName	string	The name of the customer.

Name	Type	Description
CustomerPartyId	long	The unique identifier of the customer this contact person belongs to.
CustomerPartyNumber	string	The alternate unique identifier of the customer this contact person belongs to.
CustomerUniqueName	string	The unique name of the customer. For an Organization, the value is a concatenation of unique_name_alias and suffix. For a Person, the value is a concatenation of person_name and suffix.
DecisionMakerFlag	boolean	Indicates if this contact is a decision maker. If the value is True, then the contact is a decision maker.
Department	string	The free form text used to name the department for the contact.
DepartmentCode	string	The department code for the contact. A list of accepted values is defined in the lookup DEPARTMENT_TYPE.
EmailAddress	string	The email address associated with the record.
FormattedAddress	string	The formatted address information.
FormattedPhoneNumber	string	The formatted phone number.
JobTitle	string	The free form text for job title.
JobTitleCode	string	The code given to the job title.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OrgContactId	long	The unique identifier of the organization contact. • Primary Key
OrgContactInformation	*Trading Community Organization Contact Additional Information*	The information of the organization contact.
OrganizationContactRole	*Customer Contact Responsibility*	The role of the contact in the organization.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyRelationshipId	long	The unique identifier of the relationship of the party.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteName	string	The address associated with the party site.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonCertReasonCode	string	The reason for the organization's current certification level assignment. A list of accepted values is defined using the lookup HZ_PARTY_CERT_REASON.
PersonCertificationLevel	string	The certification level of a organization. A list of accepted values is defined in the lookup HZ_PARTY_CERT_LEVEL.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLanguageName	string	The language name associated with the person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.

Name	Type	Description
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.
PersonPreviousLastName	string	The previous last name of a person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.
Rank	string	The rank associated with this customer contact.
ReferenceUseFlag	boolean	Indicates if this contact can be used as a reference. If the value is Y, then the contact can be used as a reference.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
SalesAffinityCode	string	The affinity of a contact to the deploying organization. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_AFFINITY_CODE.
SalesAffinityComments	string	The comments about the contact's affinity to the deploying organization.
SalesBuyingRoleCode	string	The roles played by a contact in the buying process, for example, decision maker or supporting role. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_BUY_ROLE_CODE.
SalesInfluenceLevelCode	string	The influence of the contact has on the deploying organization. A list of accepted values are defined in the lookup HZ_SLS_CNTCT_INFLUENCE_LVL_CD.
Salutation	string	The size of the household this person is a part of.
WebUrl	string	The web URL of contact point.

Customer Contact Responsibility

The role or responsibility of an organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContactRole

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Customer Contact Profile*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The organization contact identifier. Foreign key to the HZ_ORG_CONTACTS table.

Name	Type	Description
OrgContactRoleId	long	The unique contact role identifier. It is primary key and system generated. • Primary Key
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PrimaryContactPerRoleType	string	Indicates if the contact is the primary contact for the role. Y stands for primary contact and N stands for a contact that is not the primary contact for the role type. The default value is N.
PrimaryFlag	boolean	Indicator that specifies if this is the primary role for the contact. Y stands for primary role and N stands for a non-primary role for the contact. The default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
RoleLevel	string	The role level of the contact. For example, executive, department head, or middle manager.
RoleType	string	The role performed by a contact.
Status	string	The status of the record.

Education

The trading community person's education information. For example, a person may have attended the University of California from 1995 to 1999 and received an undergraduate degree in Computer Science with a GPA of 4.0.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Education

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CourseMajor	string	The primary area of study.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DegreeReceived	string	The abbreviation for the degree. For example, BA, BSc, MBA, MSc, PhD, and Gd (graduate diploma).
EducationId	long	The unique identifier of the education record. • Primary Key
LastDateAttended	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The year and month when a person last attended the educational institution.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
SchoolAttendedName	string	The name of the school.
SchoolPartyId	long	The party identifier of the school.
StartDateAttended	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the attendance of a person starts.
Status	string	The status of the record.
TypeOfSchool	string	The classification of the educational organization. For example, high school, college, university, or professional school. Note that the classification of schools varies among different cultures.

Electronic Data Interchange

The electronic data interchange information associated with a trading community member. For example, the details of standard codes and payment methods that are to be used for data interchange.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Edi

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EDIEceTpLocationCode	string	The trading partner location code for EDI Gateway.

Name	Type	Description
EDIIdNumber	string	The EDI trading partner number for the supplier site.
EDIPaymentFormat	string	Indicates type of information being transmitted with the funds if using EDI_PAYMENT_ METHOD ACH. The list of accepted values are CCD, CCP, CHZ, CTX, PPD, and PPP.
EDIPaymentMethod	string	Indicates how a payment is to be made through EDI. The list of accepted values are ACH and BOP.
EDIRemittanceInstruction	string	Indicates who will send the remittance advice. The list of accepted values are Banks or Payables systems.
EDIRemittanceMethod	string	Indicates how remittance advice are sent to the supplier.
EDITpHeaderId	long	The unique identifier of the EDI transaction header.
EDITransactionHandling	string	The ANSI standard code for EDI transaction type.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/ types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary EDI of the associated object. If the value is True, then this is the primary EDI. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Electronic File Transfer

The electronic funds transfer information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Eft

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EFTPrintingProgramId	long	The printing program identifier.
EFTSWIFTCode	string	The EFT swift code information.
EFTTransmissionProgramId	long	The transmission program identifier.
EFTUserNumber	string	The number that identifies you as a user of electronic funds transfer service for your bank or clearing organization.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

E-Mail

The e-mail address associated with a trading community member. For example, john.doe@oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Email

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The preferred format for e-mail addressed to this address such as HTML or ASCII. A list of accepted values is defined using the lookup EMAIL_FORMAT.

Name	Type	Description
EmailInformation	*Trading Community Contact Point Additional Information*	The additional information about the e-mail.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary e-mail of the associated object. If the value is True, then this is the primary e-mail. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact

Name	Type	Description
		point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

E-Mail Domain

The domain of the e-mail address associated with a trading community member. For example, ABC Corporation has CORP and BUSINESS e-mail domains.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}EmailDomain

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DomainName	string	The actual or non-reversed domain name of the organization for display purpose.
EmailDomainId	long	The sequence generated unique identifier. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
PartyId	long	The unique identifier of the contact party.
Status	string	The status of the record.
TransposedDomain	string	The reversed domain name for the purposes of searching.

Employment History

The employment history information of a trading community member. For example, John Doe was a Vice President at Business World from 2001 to 2007 and President at World of Business from 2007 to 2009.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}EmploymentHistory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Work Class*
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the employment officially began.
Branch	string	The military branch code.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmployedAsTitle	string	Job position title assigned by an employer.
EmployedAsTitleCode	string	The code for the job title. If title cannot be represented by a code, then the EMPLOYED_AS_TITLE column must be used.
EmployedByDivisionName	string	The common name of a division or an organization at which the person was employed.
EmployedByNameCompany	string	The name of the organization at which the person was employed. Note that the name must not include the division name.
EmployedByPartyId	long	The party identifier of the employer for situations in which the employer is represented as a party.
EmploymentHistoryId	long	The unique employment history identifier. • Primary Key
EmploymentTypeCode	string	Indicates whether the employment is part-time or full-time.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FacultyPositionFlag	boolean	Indicator Y or N to specify whether the position is a faculty position or not.
FractionOfTenure	decimal	The fraction of tenure.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MilitaryRank	string	The rank of the person in the branch.
PartyId	long	The unique identifier of the contact party.
ReasonForLeaving	string	The free format text that describes the reason for leaving.
RequestId	long	A system-generated read-only attribute used by the application framework.
Responsibility	string	Job responsibility of the person.
Served	string	Indicates where the person performed military service.
Station	string	Indicates the station name.
Status	string	The status of the record.
SupervisorName	string	The full name of the manager of the person.
TenureCode	string	The type of tenure for faculty positions.
WeeklyWorkHours	decimal	The usual number of hours worked per week.
WorkClass	*Work Class*	The custom-defined classification information about job title and work experience of a person.

Financial Number

The financial report numbers of a trading community member, such as assets, liabilities, and cash balance.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}FinancialNumber

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Financial Report*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FinancialNumber	decimal	The value for the financial number. For example, the FINANCIAL_NUMBER_NAME column could have a numerical value of 3,000,000,000 for annual sales.
FinancialNumberCurrency	string	The ISO currency code for the financial number.
FinancialNumberId	long	The unique identifier of the financial number. • Primary Key

Name	Type	Description
FinancialNumberName	string	A text field that lets you assign a descriptive name to a financial report item. For example, gross annual sales, profit, and net annual sales. A user-defined lookup.
FinancialReportId	long	The unique identifier of the financial report.
FinancialUnitsApplied	decimal	The order of magnitude (tens, hundreds, thousands, and so on) used for the FINANCIAL_NUMBER column.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ProjectedActualCode	string	Indicates if the projected amount is projected or actual. The list of accepted values are P and A. The default value is A.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Financial Profile

The financial details of a trading community member, such as bank account information that was obtained as part of a credit evaluation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}FinancialProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessAuthorityDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when access to the information in the account was granted.
AccessAuthorityGranted	string	Indicates whether access to information in a financial account was granted. If the value is True, then the access has been granted.
BalanceAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The reported balance on an account. The balance can be a positive number, negative number, or zero.
BalanceVerifiedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the account balance was verified.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FinancialAccountNumber	string	The alternate unique identifier of the financial account.
FinancialAccountType	string	The short name that classifies the financial accounts. For example, savings, checking, home loan, personal loan, trading, and so on.
FinancialOrgType	string	The classification of financial organizations. For example, bank, savings and loan, private lender, building society and so on.
FinancialOrganizationName	string	The name of the financial organization that holds the account.
FinancialProfileId	long	The unique identifier of the party's financial profile. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Name	Type	Description

Financial Report

The financial report information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}FinancialReport

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Financial Number*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AuditInd	string	Indicates if the financial reports are audited. If the value is True, then the financial reports have been audited.

Name	Type	Description
ConsolidatedInd	string	Indicates if the financial reports are consolidated. If the value is C, then the reports are consolidated.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateReportIssued	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the financial report was published.
DocumentReference	string	The unique reference number such as passport number or naturalization reference number associated with DOCUMENT_TYPE.
EstimatedInd	string	Indicates whether the financial reports provide estimated data. If the value is True, then the financial reports provide the data.
FinalInd	string	Indicates whether the financial reports are the final closing statements for a business that has ceased operations. If the value is True, then the reports are final closing statements.
FinancialNumber	*Financial Number*	The number that indicates a financial value like annual sales.
FinancialReportId	long	The unique identifier for a financial report. • Primary Key
FiscalInd	string	Indicates whether the financial reports cover a fiscal twelve-month accounting period. If the value is Y, then the financial report covers a twelve-month fiscal period.
ForecastInd	string	Indicates whether the financial reports display forecasts or future projections. If the value is Y, then the financial report displays forecasts.
IssuedPeriod	string	The period covered by the financial report. For example, fiscal year 1999, 1998, and so on.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OpeningInd	string	Indicates whether the financial reports are the opening statements for a business. If the value is Y, then the financial statements are opening statements.
PartyId	long	The unique identifier of the contact party.
ProformaInd	string	Indicates if the financial reports are pro forma numbers. If the value is Y, then the financial reports are pro forma numbers.
QualifiedInd	string	Indicates whether the financial reports include qualifying remarks from auditors about the fairness and accuracy of the numbers. If the value is Y, then the report is qualified by auditors.
ReportEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date of the report, used instead of Issued Period.
ReportStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date of the report, used instead of Issued Period.
RequestId	long	A system-generated read-only attribute used by the application framework.
RequiringAuthority	string	The name of the primary organization that requires this financial report. For example, auditors, the Federal Trade Commission, or the Internal Revenue Service.
RestatedInd	string	Indicates whether the financial reports include data that was corrected after the original financial reports. If the value is Y, then the report has been corrected.
SignedByPrincipalsInd	string	Indicates whether the financial reports were signed by the principals of the organization. If the value is Y, then the reports are signed.
Status	string	The status of the record.

Name	Type	Description
TrialBalanceInd	string	Indicates whether the financial reports include trial balance numbers. If the value is Y, then the financial report includes trial balance numbers.
TypeOfFinancialReport	string	A name for the financial report. For example, 10K report, Annual Report, or Shareholder's Special Report.
UnbalancedInd	string	Indicates whether the financial reports include balance sheet accounts that do not balance. If the value is Y, then report includes unbalanced balance sheet accounts.
WhUdpateId	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the record was entered or changed in a data warehouse.

Household

The trading community group information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}Group

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Additional Household Name*
Contains	*Classification Assignment*
Contains	*Source System Reference*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Web*
Contains	*Contact Preference*
Contains	*Phone*

Relationship Type	Object or Service
Contains	*Contact Language*
Contains	*Certification*
Contains	*Usage Assignment*
Contains	*Additional Identifier*
Contains	*E-Mail Domain*
Contains	*Instant Messaging*
Contains	*E-Mail*
Contains	*Address*
Contains	*Preference*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Trading Community Group*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalGroupName	*Additional Household Name*	Additional name associated with the group.
AdditionalPartyId	*Additional Identifier*	Additional Identifier for the group.
AnnualExpenses	long	Household annual expenses.
AnnualIncome	long	The value for annual income.
AverageAge	long	Household average age.
Certification	*Certification*	Certification information associated with the group.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
CertificationReasonCode	string	Reason for group party's current certification level assignment. HZ_PARTY_CERT_REASON lookup type.
Child0to6Number	long	The number of children between 0 and 6 years.
Child13to18Number	long	The number of children between 13 and 18 years.
Child7to12Number	long	The number of children between 7 and 12 years.
CodeAssignment	*Classification Assignment*	Classification code assigned to the group.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DependentsNumber	long	The number of dependents.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	Not Used.
EffectiveSequence	int	Not Used.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
Email	*E-Mail*	The email address associated with the record.
EmailDomain	*E-Mail Domain*	Email domain information for the group.
FinancialProfile	*Financial Profile*	Financial Profile information of the group.
GroupName	string	Name of this group.
GroupSize	long	Size of the group.
GroupType	string	The party type can only be person, organization, group.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
MedianAge	long	The age of the median.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	Preference information of the group.
PartySite	*Address*	Address information associated with the group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	Party usage assigned to the group.
PersonLanguage	*Contact Language*	Language information associated with a group.
Phone	*Phone*	The phone information for the entity.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonEmail	string	The E-Mail of the preferred contact person.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredContactPersonName	string	The name of the preferred contact person.
PreferredContactPersonPhone	string	The phone number of the preferred contact person.
PreferredContactPersonURL	string	The URL of the preferred contact person.

Name	Type	Description
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the primary address.
PrimaryAddressCountry	string	The country for the primary address.
PrimaryAddressCounty	string	The country of the primary address.
PrimaryAddressLine1	string	Line one of the primary address.
PrimaryAddressLine2	string	Line two of the primary address.
PrimaryAddressLine3	string	Line three of the primary address.
PrimaryAddressLine4	string	Line four of the primary address.
PrimaryAddressLocationId	long	The unique identification number for the primary address location.
PrimaryAddressPartySiteId	long	The unique identifier for the primary address party site.
PrimaryAddressPostalCode	string	The postal code of the primary address.
PrimaryAddressProvince	string	The province of the primary address.
PrimaryAddressState	string	The state of the primary address.
PrimaryEmail	string	Primary E-Mail Address of the Group.
PrimaryEmailId	long	Primary E-Mail ID.

Name	Type	Description
PrimaryFormattedAddress	string	Primary formatted address for the group.
PrimaryFormattedMultilineAddress	string	Primary formatted multiline address for the group.
PrimaryFormattedPhoneNumber	string	Primary formatted phone number for the group.
PrimaryLanguage	string	Standard name for a primary language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The unique identification number for the primary phone.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	Primary URL.
PrimaryWebId	long	Primary Web ID.
ProfileCreatedBy	string	The user who created the row.
ProfileCreatedByModule	string	The module that created the profile.
ProfileCreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time of the creation of the row.
ProfileLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time of the last update of the row.

Name	Type	Description
ProfileLastUpdateLogin	string	The session login associated to the user who last updated the row.
ProfileLastUpdatedBy	string	The user who last updated the row.
Relationship	*Relationship*	Relationship information for the group.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.
SuffixOverriddenFlag	boolean	This will have Y if the suffix is overridden by user N if not.
UniqueNameSuffix	string	System generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
WealthAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Household wealth amount or net worth.
Web	*Web*	The web information related to the record.

Instant Messaging

The instant messaging information of a trading community member, such as the AOL identifier or Yahoo Messenger information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}InstantMessaging

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*

Relationship Type	Object or Service
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessagingAddress	string	The instant messaging information address.
InstantMessagingInformation	*Trading Community Contact Point Additional Information*	The instant messaging information related to the record.
InstantMessengerType	string	The type of the instant messenger type.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.

Name	Type	Description
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary instant messaging Id of the associated object. If the value is True, then this is the primary instant messaging Id. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

My Sales Account

The Web service method to find a list of my sales accounts. My sales accounts are sales accounts assigned to me or my subordinates, and sales accounts assigned to my territories or their descendent territories.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}MySalesAccount

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Account Territory*
Contains	*Household*
Contains	*Trading Community Organization Details*
Contains	*Trading Community Person Details*
Handled by	*Sales Party*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AssgnExceptionFlag	boolean	Indicator showing whether the sales account had the required dimensions to allow assignment manager to assign territories to the sales account.
AttributeCategory	string	The structure definition of the user descriptive flex field.
CpdrfLastUpd	string	The standard replication column.
CpdrfVerPillar	int	The standard replication column.
CpdrfVerSor	int	The standard replication column.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
ExistingFlag	boolean	The indicator showing whether there is an existing selling or billing relationship with the sales account.
ExistingFlgLastUpdDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the existing flag was last modified.
GroupParty	*Household*	The group associated to the sales party.
InternalStatus	string	The sales party internal status.
LastAssignedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date indicating when the sales account territory assignment was last run by assignment manager.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
NamedAccountFlag	boolean	The indicator for whether a sales account is a named sales account.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
OrganizationParty	*Trading Community Organization Details*	The organization associated to the sales party.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.

Name	Type	Description
PartyNumber	string	The unique identification number for the party.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PersonParty	*Trading Community Person Details*	The person associated to the sales party.
SalesAccountId	long	The identifier for the trading community party. • Primary Key
SalesAccountTerritory	*Sales Account Territory*	The reference to a sales party's associated territory information.
SalesAccountType	string	Type of account, contact or household. For example, customer or prospect.
Status	string	The status of the record.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Phone

The phone number associated with a trading community member. For example, the phone number for Oracle Corporation is 650-506-6000.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Phone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*

Relationship Type	Object or Service
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Contact Address*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FormattedPhoneNumber	string	The formatted phone number.
LastContactDtTime	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time of last contact placed to this contact point.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the

Name	Type	Description
		start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PagerTypeCode	string	The PAGER_TYPE_CODE column stores the lookup code for the type of pager. The type of pager determines how the page is received. For example, tone, number, alphanumeric or two-way alphanumeric.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCallingCalendar	string	The name or code for a calling calendar used with this telephone number. This attribute is no longer used in Fusion applications.
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The additional number addressed after initial connection to an internal telephone system.
PhoneInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community phone.

Name	Type	Description
PhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound, or outbound.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RawPhoneNumber	string	The unformatted telephone number.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TimezoneCode	string	The foreign key to FND_TIMEZONES_B.TIMEZONE_CODE.
TransposedPhoneNumber	string	This column stores the concatenation of PHONE_COUNTRY_CODE, PHONE_AREA_CODE, and PHONE_NUMBER in reverse order. For example, if PHONE_COUNTRY_CODE=1, PHONE_AREA_CODE=650 and PHONE_NUMBER=5065747, this column stores 74756050561. This column is used for building an index to search for any combination of the above three columns.

Preference

The preferences of a trading community member. For example, a member may prefer that the transaction currency is the US dollar.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalValue1	string	The additional preference value.
AdditionalValue2	string	The additional preference value.
AdditionalValue3	string	The additional preference value.
AdditionalValue4	string	The additional preference value.
AdditionalValue5	string	The additional preference value.
Category	string	A preference category is used to logically group one or more preference codes in a particular user interface. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Module	string	The program that creates the preference. For example, TCA MOBILE CUSTOMER DIRECTORY.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PartyPreferenceId	long	The unique identifier of the party preference. • Primary Key
PreferenceCode	string	A preference code determines if a preference is a single value or a multiple value preference. The preference code is validated by the HZ_PREFERENCE lookup. The combination of

Name	Type	Description
		CATEGORY and PREFERENCE_CODE identifies a preference.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
ValueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The preference value when the data type is DATE.
ValueName	string	A user-defined alias for a preference value.
ValueNumber	decimal	The preference value when the data type is NUMBER.
ValueVarchar2	string	The preference value when the data type is VARCHAR2.

Relationship

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}Relationship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Address*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Usage Assignment*
Contains	*Trading Community Relationship Additional Information*

Relationship Type	Object or Service
Contains	*Customer Contact Profile*
Contains	*Source System Reference*
Contains	*Email*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalInformation1	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type. For operating unit and legal entity to bank relationships, column stores communication agreement ID, which identifies agreement between payer and bank

Name	Type	Description
		on type of EDIFACT documents that can be sent for processing payments.
AdditionalInformation10	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation11	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation12	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation13	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation14	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation15	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation16	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation17	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation18	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation19	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation2	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation20	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation21	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation22	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation23	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation24	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation25	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation26	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation27	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation28	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation29	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation3	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation30	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation4	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation5	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation6	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation7	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation8	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation9	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DirectionCode	string	The code of the relationship direction. The list of accepted values are defined in the lookup DIRECTION_CODE.
Email	*E-Mail*	The email address associated with the record.

Name	Type	Description
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectEmailAddress	string	The e-mail address of the object party in the relationship.
ObjectId	long	The unique identifier of the object party in this relationship.
ObjectPartyName	string	The name of the object party in this relationship.
ObjectTableName	string	The source table name of the object party in this relationship.
ObjectType	string	The object type of the relationship.
ObjectUsageCode	string	The usage code of object party in the relationship.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationContact	*Customer Contact Profile*	The organization contact information.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyName	string	The name of the party.
PartySite	*Address*	The party site associated with the relationship.

Name	Type	Description
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the relationship.
PercentageOwnership	decimal	The percentage of the child entity owned by the parent entity.
Phone	*Phone*	The phone information for the entity.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.
RelationshipCode	string	The code for a forward or a backward relationship. A list of accepted relationship values is defined in the lookup PARTY_RELATIONS_TYPE.
RelationshipId	long	The relationship identifier for the record.
RelationshipInformation	*Trading Community Relationship Additional Information*	The relationship type information.
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key
RelationshipType	string	The relationship type name. For example, CUSTOMER_SUPPLIER. A list of valid relationship types is defined in the lookup HZ_RELATIONSHIP_TYPE.
RequestId	long	A system-generated read-only attribute used by the application framework.
Role	string	The role between the subject and object party in this relationship.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
SubjectEmailAddress	string	The e-mail address of the subject party in relationship.

Name	Type	Description
SubjectId	long	The unique identifier of the subject in this relationship.
SubjectPartyUsageAssignment	*Usage Assignment*	The usage assignment of the subject party in the relationship.
SubjectTableName	string	The source table of the subject.
SubjectType	string	The subject type of the relationship.
SubjectUsageCode	string	The usage code of subject party in the relationship.
Web	*Web*	The web information related to the record.

Sales Account

An object used to store sales account profile attributes. A sales account is a sales party with usage as sales account.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesAccount

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Account*
Contains	*Sales Account Territory*
Contains	*Asset*
Contains	*Household*
Contains	*Trading Community Organization Details*
Contains	*Sales Account Contact Point SDO*
Contains	*Sales Account Resource*

Relationship Type	Object or Service
Contains	*Contact*
Contains	*Trading Community Person Details*
Contains	*Sales Account Contact*
Contained by	*Sales Party*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountDirectorId	long	The identifier for the sales account owner.
Asset	*Asset*	Represents the products owned by customer.
AssgnExceptionFlag	boolean	The indicator shows whether the sales account has the required dimensions to allow the assignment manager to assign territories to the sales account.
AttributeCategory	string	A segment of the user descriptive flex field.
ClassCategory	string	The label displaying the classification category.
ClassCategory1	string	The label displaying the classification category.
ClassCode	string	The label displaying the classification code.
CodeAssignmentId	long	The label displaying the classification code assignment identifier for a sales party.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CpdrfLastUpd	string	The standard replication column.

Name	Type	Description
CpdrfVerPillar	int	The standard replication column.
CpdrfVerSor	int	The standard replication column.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteCustomerKey	string	The label for a transient attribute for delete operations in a web services call. If set to Y in WS payload, then sales account profile, its party usage, contact relationships, hierarchies and TCA party will be deleted. If set to N in the payload, then only sales account profile will be deleted.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
ExistingFlag	boolean	The indicator shows whether there is an existing selling or billing relationship with the sales account.
ExistingFlgLastUpdDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the existing flag was last modified.
Group	*Household*	The group associated to the sales account.
InternalStatus	string	The label displaying the internal status of a sales account to track if its active or inactive. Values for InternalStatus are active and inactive.
LastAssignedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date indicates when the sales account territory assignment was last run by assignment manager.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Meaning	string	The label displaying the classification category meaning.
NamedAccountFlag	boolean	The indicator shows whether a sales account is a named sales account.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationD	*Account*	The organization associated to the sales account.
OrganizationParty	*Trading Community Organization Details*	The organization associated to the sales account.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUniqueName1	string	The label displaying the unique name of a sales party.
PersonD	*Contact*	The person associated to the sales account.
PersonParty	*Trading Community Person Details*	The person associated to the sales account.
PrimaryFlag	boolean	The label indicating whether an account is designated primary for a sales party with

Name	Type	Description
		multiple sales accounts. Values for PrimaryFlag are yes and no.
Rating	int	Indicates the user's favorite rating for the sales account. Users can select a number between 1 to 5 to set or update the favorite rating for the sales account.
SalesAccountContactPoints	*Sales Account Contact Point*	The contact points associated to the sales account.
SalesAccountContacts	*Sales Account Contact*	The contacts associated to the sales account.
SalesAccountId	long	The label displaying the internal identifier of a sales party. • Primary Key
SalesAccountName	string	Indicates the name of the sales account.
SalesAccountNameSuffix	string	The suffix of the sales account name.
SalesAccountResource	*Sales Account Resource*	The resources associated to the sales account.
SalesAccountStatus	string	The status value reflecting the current state of the sales account. Values for status are active and inactive.
SalesAccountTerritory	*Sales Account Territory*	The territories associated to the sales account.
SalesAccountType	string	Type of account, contact or household. For example, customer or prospect.
SalesAccountUniqueName	string	Indicates the sales account unique name.
SellToPartySiteId	long	Indicates the party site id which has usage as SELL_TO.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.
Status1	string	The label displaying the status of a sales account. Sample values for status are active and inactive.

Name	Type	Description
UpdateRating	int	Indicates the user's favorite rating for the sales account. Users can pass a number between 1 to 5 to query sales accounts for which they have given one-star favorite rating to 5-star favorite rating.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.
UserSalesAccountId	long	Identifier of the user who has marked this customer account as a favorite.
ViewApplicationId	long	The label displaying view application.

Sales Account Contact Point

These are contact points associated with the account.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesAccountContactPoints

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Account*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point.
CpdrfLastUpd	string	The standard replication column.

Name	Type	Description
CpdrfVerPillar	int	The standard replication column.
CpdrfVerSor	int	The standard replication column.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PrimaryFlag	boolean	Indicates contact point as primary. Note, multiple contact points for an account can be marked as primary, as long as they are not of the same type. For example, an account can have a primary email and a primary phone number.
SAccountContactPointId	long	Indicates account contact point identifier. • Primary Key
SalesAccountId	long	Indicates account which is related to the contact point.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Account Contact

These are contacts associated with the account.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesAccountContacts

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Account*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AffinityLvlCd	string	The LOV that shows the affinity the contact has with the deployment company. Valid values are Favorable, negative, neutral, somewhat favorable, and somewhat negative.
BuyingRoleCd	string	Indicates the buying role of the contact. LOV with valid values as Does not matter, Key decision maker, Secondary decision maker, and Supporting role.
Comments	string	The comments for the record.
CpdrfLastUpd	string	The standard replication column.
CpdrfVerPillar	int	The standard replication column.
CpdrfVerSor	int	The standard replication column.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
InfluenceLvlCd	string	Indicates the influence level of the contact. LOV with valid values as Influence Circle, None, and Political Structure.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PersonPartyId	long	Indicates the person party id of this relationship.
PrimaryFlag	boolean	Indicates account contact as primary.
RelationshipId	long	The relationship identifier for the record.
SAccountContactId	long	Indicates the account contact identifier. • Primary Key
SalesAccountId	long	Indicates the account which is related to the contact.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Account Resource

An object representing a resource party that is assigned to a sales account team and has a defined access role for the sales account.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesAccountResource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Party*
Contained by	*Sales Account*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Sales Account Resource Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	The access level determines the type of access granted to the resource as well as managers of the organizations. The possible values are contained in the ZCA_ACCESS_LEVEL lookup.
AccountDirectorId	long	The party identifier for the resource designated as the sales account owner.
AssignmentTypeCode	string	The code indicating how the resource is assigned to the sales account team. The possible values are contained in the ZCA_ASSIGNMENT_TYPE lookup.
Attribute1	string	The segment of the user descriptive flex field.
Attribute10	string	The segment of the user descriptive flex field.

Name	Type	Description
Attribute11	string	The segment of the user descriptive flex field.
Attribute12	string	The segment of the user descriptive flex field.
Attribute13	string	The segment of the user descriptive flex field.
Attribute14	string	The segment of the user descriptive flex field.
Attribute15	string	The segment of the user descriptive flex field.
Attribute2	string	The segment of the user descriptive flex field.
Attribute3	string	The segment of the user descriptive flex field.
Attribute4	string	The segment of the user descriptive flex field.
Attribute5	string	The segment of the user descriptive flex field.
Attribute6	string	The segment of the user descriptive flex field.
Attribute7	string	The segment of the user descriptive flex field.
Attribute8	string	The segment of the user descriptive flex field.
Attribute9	string	The segment of the user descriptive flex field.
AttributeCategory	string	The structure definition of the user descriptive flex field.
AttributeDate1	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The segment of the user descriptive flex field.
AttributeDate2	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The segment of the user descriptive flex field.
AttributeDate3	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The segment of the user descriptive flex field.
AttributeDate4	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The segment of the user descriptive flex field.
AttributeDate5	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The segment of the user descriptive flex field.

Name	Type	Description
AttributeNumber1	decimal	The segment of the user descriptive flex field.
AttributeNumber2	decimal	The segment of the user descriptive flex field.
AttributeNumber3	decimal	The segment of the user descriptive flex field.
AttributeNumber4	decimal	The segment of the user descriptive flex field.
AttributeNumber5	decimal	The segment of the user descriptive flex field.
CpdrfLastUpd	string	The standard replication column.
CpdrfVerPillar	int	The standard replication column.
CpdrfVerSor	int	The standard replication column.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EmailAddress	string	The email address associated with the record.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedPhoneNumber	string	The formatted phone number.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
LockAssignmentBooleanFlag	boolean	Indicates whether the sales account resource is enabled for locked assignment, which means the sales account resource cannot be removed from the team at future territory assignments.
LockAssignmentFlag	boolean	The flag indicates automatic territory assignment cannot remove the sales account team resource when this flag is Y'. When a sales account team member is added manually, this flag is defaulted to Y'.
ManagerPartyId	long	The party identifier for the manager.
MemberFunctionCode	string	The lookup code indicating a sales account resource's role on the resource team such as Integrator, Executive Sponsor and Technical Account Manager. The code lookup is stored in FND_LOOKUPS.
Name	string	The name of the organization for the resource.
Name1	string	The name of the territory.
NamedAccountFlag	boolean	The indicator for whether a sales account is a named sales account.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
ObjectVersionNumber2	int	The number to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
OrgTreeCode	string	The code for the organization hierarchy tree. Managers and administrators of sales account resource gain access through this hierarchy.

Name	Type	Description
OrgTreeStructureCode	string	The structure code for the organization hierarchy tree. Managers/Administrators of parent member organizations will gain access through this hierarchy.
OrganizationId	long	The identifier for the organization the sales account resource belongs.
OwnerResourceId	long	The identifier for the sales account owner.
PartyName	string	The name of the party.
PartyName1	string	The party name of the manager.
PrTerritoryId	long	The territory the sales account team resource belongs to.
ReportsToFlag	boolean	The indicator showing a resource reports to another resource in the same account team.
ResourceId	long	The unique identifier of the resource.
ResourceOrgId	long	The resource organization identifier.
ResourcePartyId	long	The party identifier for the resource.
ResourcePrimaryOrgId	long	The resource primary organization identifier.
ResourcePrimaryOrgName	string	The resource primary organization name.
RoleName	string	The list of all roles for the resources in the organization.
SAccountResourceId	long	The surrogate primary key for the member of the sales account resource team. • Primary Key
SalesAccountId	long	The identifier for the sales account.
SalesAccountPartyId	long	The unique identifier for the sales account.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
TerritoryVersionId	long	The territory version is a primary key.

Name	Type	Description
TypeCode	string	The type code for the territory of which the resource is member of.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Account Resource Access

The alternative sales account resource service data object used exclusively by Oracle Fusion Secure Enterprise Search.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesAccountResourceAccess

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Sales Party*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PartyName	string	The name of the party.
ResourceId	decimal	The unique identifier of the resource. • Primary Key
SalesAccountId	long	The identifier for the sales account. • Primary Key
UserGUID	string	The user guid for the sales account resource.

Sales Account Territory

An object representing sales account territory attributes for territory assigned to the sales account.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesAccountTerritory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Party*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Handled by	*Sales Account Territory Service*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Name	string	The territory name.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
SAccountTerritoryId	long	The sales account territory identifier. • Primary Key
SalesAccountId	long	The sales account identifier.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
StatusCode	string	The pre-defined code used to indicate the status.
TerritoryId	long	The territory identifier.
TerritoryVersionId	long	The territory version identifier.
TypeCode	string	The type code of the sales account territory.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Party

An object representing sales party attributes that is used to store values while creating or changing a sales party. A sales party can be a legal entity, a sales prospect, or a sales account.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesParty

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Account Territory*
Contains	*Sales Account*
Contains	*Household*
Contains	*Trading Community Organization Details*
Contains	*Sales Account Resource*
Contains	*Trading Community Person Details*
Handled by	*Sales Party*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountDirectorId	long	The identifier for the sales account owner.
AssgnExceptionFlag	boolean	Indicator showing whether the sales account had the required dimensions to allow assignment manager to assign territories to the sales account.
AttachmentEntityName	string	The name of the attachment entity, which is a constant expression. The expression being ZCA_SALES_PARTY.
AttributeCategory	string	The structure definition of the user descriptive flex field.
CpdrfLastUpd	string	The standard replication column.
CpdrfVerPillar	int	The standard replication column.
CpdrfVerSor	int	The standard replication column.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
ExistingFlag	boolean	The indicator showing whether there is an existing selling or billing relationship with the sales account.
ExistingFlgLastUpdDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the existing flag was last modified.
GroupParty	*Household*	The group object representing the sales party.
InternalStatus	string	The sales party internal status.
LastAssignedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date indicating when the sales account territory assignment was last run by assignment manager.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
NamedAccountFlag	boolean	The indicator for whether a sales account is a named sales account.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
OrganizationParty	*Trading Community Organization Details*	The organization associated to the sales party.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.

Name	Type	Description
PartyNumber	string	The unique identification number for the party.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PersonParty	*Trading Community Person Details*	The person object representing the sales party.
SalesAccount	*Sales Account*	The sales account associated with the sales party.
SalesAccountId	long	The sales account identifier. • Primary Key
SalesAccountPartyId	long	The identifier for the trading community party.
SalesAccountResource	*Sales Account Resource*	The sales account resource associated to the sales party.
SalesAccountTerritory	*Sales Account Territory*	The reference to a sales account's associated territory information.
Status	string	The status of the record.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*
Contained by	*Location Details*
Contained by	*Household*
Contained by	*Contact Preference*
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*
Contained by	*Trading Community Address Purpose*
Contained by	*Telex*
Contained by	*Phone*
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*
Contained by	*Trading Community Person Details*
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*

Relationship Type	Object or Service
Contained by	*Trading Community Customer Account Site Use*
Contained by	*Relationship*
Contained by	*Electronic Data Interchange*
Contained by	*Trading Community Customer Account or Site Role*
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*

Relationship Type	Object or Service
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Telex

The telex number information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Telex

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*

Relationship Type	Object or Service
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.

Name	Type	Description
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary telex of the associated object. If the value is True, then this is the primary telex. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.

Name	Type	Description
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TelexNumber	string	The telex reference number (usually a telephone number) of the organization.

Trading Community Address Additional Information

The address information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/}PartySiteInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact Address*
Contained by	*Address*

Relationship Type	Object or Service
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Address Purpose

The purpose of an address, such as Business, Home, or Ship To.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySiteUse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date at the start of the date range within which the row is active.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
IntegrationKey	string	The integration key is not used.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteUseId	long	The unique identifier of the party site used. • Primary Key

Name	Type	Description
PrimaryPerType	string	Indicates if this is the primary use for the site. Y stands for the primary site and N stands for all other sites.
RequestId	long	A system-generated read-only attribute used by the application framework.
SiteUseType	string	The site use type associated with the address.
Status	string	The status of the record.

Trading Community Contact Point Additional Information

The contact point for a trading community member like phone or e-mail. For example 650-506-6000 is the phone number for Oracle Corporation, john.doe@example.com is the e-mail address for John Doe.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/}ContactPointInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Phone*
Contained by	*Web*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Relationship Type	Object or Service
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointType	string	The type of the contact point.
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Organization Contact Additional Information

The additional information about the organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/orgContact/}OrganizationContactInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Customer Contact Profile*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrgContactId	long	The unique identifier of the organization contact. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Organization Details

The information about an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationParty

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*
Contains	*Address*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Classification Assignment*
Contains	*Usage Assignment*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Phone*
Contains	*Email Domain*
Contains	*Telex*
Contains	*Additional Identifier*
Contains	*Account*
Contains	*Source System Reference*
Contains	*Contact Preference*

Relationship Type	Object or Service
Contains	*Financial Report*
Contains	*Certification*
Contains	*Electronic Data Interchange*
Contains	*Email*
Contains	*Preference*
Contains	*Additional Account Name*
Contains	*Electronic File Transfer*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalOrganizationName	*Additional Account Name*	The additional name associated with the organization.
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AnalysisFy	string	The fiscal year that the financial information is based on.
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information associated with the organization.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the organization.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.

Name	Type	Description
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating for the organization.
CurrentFiscalYearPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its current fiscal year.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
Edi	*Electronic Data Interchange*	The electronic data interchange information for the organization.
Eft	*Electronic File Transfer*	The electronic file transfer information for the organization.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.
EmployeesTotal	decimal	The total number of employees.
FinancialProfile	*Financial Profile*	The financial profile information of the organization.
FinancialReport	*Financial Report*	The financial report information of the organization.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services

Name	Type	Description
		Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
GroupType	string	The type of the group.
HQBranchIndicator	string	The status of this site, such as HQ, a branch, or a single location. A list of accepted values are defined in the lookup type HQ_BRANCH_IND.
HomeCountry	string	The home country associated with the party.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MissionStatement	string	The corporate charter of organization in user-defined text format.
NextFyPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its next fiscal year.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationProfile	*Account*	The information about the partner organization.
OrganizationSize	string	The size of the organization based on its revenue, number of employees, and so on.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	The preference mentioned in the organization details.
PartySite	*Address*	The party site associated with the organization.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the organization.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
Phone	*Phone*	The phone information for the entity.

Name	Type	Description
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPointId	long	The unique identifier of the primary e-mail.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPointId	long	The unique identifier of the primary phone contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.

Name	Type	Description
PrimaryURLContactPointId	long	The unique identifier of the primary URL contact point.
PrincipalName	string	The Name of the highest ranking person in the company.
Province	string	The name of the province.
Relationship	*Relationship*	The relationship information of the organization.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The telex information of the organization.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the Third Party field in the Customers window is mandatory.
TradingPartnerIdentifier	string	The FSIO related trading partner codes.
URL	string	The destination URL associated with a specific Google AdWords ad.

Name	Type	Description
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
Web	*Web*	The web information related to the record.
YearEstablished	int	The year when the organization began doing business.

Trading Community Organization Profile Additional Information

The additional profile information about an organization, such as the organization type.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/organization/}OrganizationInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Cloud Account*
Contained by	*Account*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrganizationProfileId	long	The unique identifier of the organization profile. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Person Details

The information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Person

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*
Contains	*Citizenship*
Contains	*Contact Language*
Contains	*Instant Messaging*
Contains	*Employment History*
Contains	*Web*
Contains	*Classification Assignment*
Contains	*Usage Assignment*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Contact Interest*
Contains	*Contact*
Contains	*Additional Contact Name*
Contains	*Phone*
Contains	*Education*

Relationship Type	Object or Service
Contains	*Email Domain*
Contains	*Additional Identifier*
Contains	*Contact Preference*
Contains	*Source System Reference*
Contains	*Certification*
Contains	*Contact Address*
Contains	*Email*
Contains	*Preference*
Extended by	*Partner Members*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.
AdditionalPersonName	*Additional Contact Name*	The additional name of the person.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information for the person.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Citizenship	*Citizenship*	The citizenship information of a person.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the person.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
Country	string	The name of the country.

Name	Type	Description
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
Education	*Education*	The education information of the person.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.
EmploymentHistory	*Employment History*	The employment history information of a person.
FinancialProfile	*Financial Profile*	The financial profile information of a person.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
Gender	string	The gender of the person, such as male, female, and unknown. A list of accepted values is defined in the lookup HZ_GENDER.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.

Name	Type	Description
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person. A list of accepted values is defined in the lookup MARITAL_STATUS.
MissionStatement	string	The corporate charter of organization in user-defined text format.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	The preference mentioned in the person details.
PartySite	*Contact Address*	The party site associated with the person.

Name	Type	Description
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the person.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonInterest	*Contact Interest*	The interest information associated with a person.
PersonLanguage	*Contact Language*	The language information associated with a person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.
PersonPreviousLastName	string	The previous last name of a person.
PersonProfile	*Contact*	The profile information of the person.

Name	Type	Description
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPTId	long	The unique identifier of the primary e-mail.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPTId	long	The unique identifier of the primary phone contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.

Name	Type	Description
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPTId	long	The unique identifier of the primary URL contact point.
Province	string	The name of the province.
Relationship	*Relationship*	The relationship information of the person.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
Salutation	string	The size of the household this person is a part of.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.
Status	string	The status of the record.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the

Name	Type	Description
		Third Party field in the Customers window is mandatory.
URL	string	The destination URL associated with a specific Google AdWords ad.
UserGUID	string	The "light weight" user Global Unique Id. Light Weight users defined in the Extended Security (XS) System.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
Web	*Web*	The web information related to the record.

Trading Community Person Profile Additional Information

The additional information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/}PersonInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Loyalty Member Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PersonProfileId	long	The unique identifier of the person profile. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Relationship Additional Information

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/relationship/}RelationshipInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Usage Assignment

The party usage assigned to a trading community member. For example, John Doe is a contact of ABC Corporation and XYZ Corporation is a supplier.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyUsageAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*

Relationship Type	Object or Service
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Party Usage Assignment Service*
Handled by	*Trading Community Party Information*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
PartyUsageCode	string	The usage context of a party's contact point.
PartyUsgAssignmentId	long	The unique identifier of the party usage assignment. • Primary Key
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Web

The Web information associated with a trading community member. For example, Oracle's address on the Web is www.oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Web

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N stands for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
URL	string	The destination URL associated with a specific Google AdWords ad.
WebInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community Web.
WebType	string	The prefix class to a Web address. Typically, this is either FTP or HTTP.

Work Class

The custom-defined classification of information about a person's job title and work experience.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}WorkClass

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Employment History*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmploymentHistoryId	long	The foreign key to the HZ_EMPLOYMENT_HISTORY table.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LevelOfExperience	string	The user-defined rating for the level of experience in the class of work. For example, journeyman, trainee, or exposure.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.
WorkClassId	long	The unique identifier for the class of work. • Primary Key
WorkClassName	string	The user-determined classification for work. For example, bricklayer, doctor, lawyer, programmer, or minister of health.

Sales Party Resource Service

The service to create, update, get, or find sales party resources.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartyResourceService/}SalesPartyResourceService

Service WSDL URL: https://servername/crmService/SalesPartyResourceService?WSDL

Logical Business Objects

- CRM : Customer Center : Sales Party

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Additional Account Name*
Handles	*Account*
Handles	*Contact Interest*
Handles	*Citizenship*
Handles	*Usage Assignment*
Handles	*Financial Profile*
Handles	*Electronic File Transfer*
Handles	*Credit Rating*
Handles	*E-Mail Domain*
Handles	*Contact Language*
Handles	*Trading Community Original System Mapping Identifier Additional Information*

Relationship Type	Object or Service
Handles	*Trading Community Person Details*
Handles	*Trading Community Person Profile Additional Information*
Handles	*Financial Number*
Handles	*Certification*
Handles	*Classification Assignment*
Handles	*Preference*
Handles	*Trading Community Organization Profile Additional Information*
Handles	*Trading Community Organization Details*
Handles	*Trading Community Contact Point Additional Information*
Handles	*Source System Reference*
Handles	*Additional Household Name*
Handles	*Customer Contact Profile*
Handles	*Phone*
Handles	*Trading Community Address Purpose*
Handles	*Household*
Handles	*Additional Contact Name*
Handles	*Trading Community Organization Contact Additional Information*
Handles	*Additional Identifier*
Handles	*Web*
Handles	*Customer Contact Responsibility*
Handles	*Relationship*

Relationship Type	Object or Service
Handles	*Education*
Handles	*Trading Community Relationship Additional Information*
Handles	*E-Mail*
Handles	*Financial Report*
Handles	*Employment History*
Handles	*Instant Messaging*
Handles	*Work Class*
Handles	*Contact Address*
Handles	*Sales Party Resource*
Handles	*Telex*
Handles	*Address*
Handles	*Electronic Data Interchange*
Handles	*Contact*
Handles	*Trading Community Address Additional Information*
Handles	*Contact Preference*

Operations

- *getSalesPartyResource*
- *createSalesPartyResource*
- *updateSalesPartyResource*
- *deleteSalesPartyResource*
- *findSalesPartyResource*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getSalesPartyResource

The get operation for sales party resource details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyResourceId	long	The identifier for sales party resource.

Response Payload

Element Name	Type	Description
result	*Sales Party Resource*	The operation that returns sales party resource details that matches the inbound key attributes.

createSalesPartyResource

The operation that created sales party resource details for a party.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesPartyResource	*Sales Party Resource*	Sales Party Resource Details to be created

Response Payload

Element Name	Type	Description
result	*Sales Party Resource*	The result of the operation including the successfully created sales party resource and any warnings or informational messages.

updateSalesPartyResource

The operation to update sales party resource details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesPartyResource	*Sales Party Resource*	The required input parameter of the updateEntity web service method. Use the API name of the custom object you want to update.

Response Payload

Element Name	Type	Description
result	*Sales Party Resource*	The result of the operation includes the successfully updated sales party resource details or a list of warnings or informational messages, or both.

deleteSalesPartyResource

The operation that deletes sales party resource details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesPartyResource	*Sales Party Resource*	Sales Party Resource Details to be deleted

Response Payload

Element Name	Type	Description
result	void	A list of warnings or informational messages encountered when deleting the object.

findSalesPartyResource

The find operation for sales party resource details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Party Resource*	The result of the operation including the list of sales party resource details that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The locale name is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	ZCM_MANAGE_SALES_PARTY_TEAM_PRIV	Manage Sales Party Team	Allows managing the sales party team

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_MANAGE_SALES_PARTY_TEAM_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			Request. Has basic Service Request management capabilities.
ZCM_MANAGE_SALES_PARTY_TEAM_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_MANAGE_SALES_PARTY_TEAM_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_MANAGE_SALES_PARTY_TEAM_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Account

An organization account and its profile information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Organization Profile Additional Information*
Contained by	*Sales Account*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Alias	string	The organization alias name.
AnalysisFy	string	The fiscal year that the financial information is based on.
BankCode	string	Identifies the bank in several countries, typically for regulatory purposes.
BankOrBranchNumber	string	Stores bank number for banks and branch number for bank branches. Primarily stores ABA number for US bank branches.
BranchCode	string	Identifies the bank branch in several countries, typically for regulatory purposes.
BranchFlag	boolean	Indicates if this is a branch location. If the value is True, then this is a branch location.
BusinessReport	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	Dun and Bradstreet business information report.
BusinessScope	string	The physical class of business in which a business participates. For example, local, national, or international.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CeoTitle	string	The formal title of the chief executive officer.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Comments	string	The comments for the record.
CongDistCode	string	The U.S. Congressional district code for the account.
ContentSourceNumber	string	The content source number is not used.

Name	Type	Description
ControlYr	decimal	The year when current ownership gained control of the organization.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CorporationClass	string	The taxation classification for corporation entities such as Chapter S in the US.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CurrentFiscalYearPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its current fiscal year.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DataCloudStatus	string	Specifies the enrichment status of the person.
DbRating	string	The Dun & Bradstreet credit rating.
Disadv8aInd	string	Indicates whether the organization is considered disadvantaged by the US government under Title 8A. If the value is Yes, the organization is considered disadvantaged under Title 8A. The default value is No.
DisplayedDUNSPartyIdentifier	long	Dun and Bradstreet does not maintain data for the branch offices of companies that are located beyond North America. Data is only maintained for the company headquarters. If the data pertains only to company headquarters, the headquarters PARTY_ID is stored. If the data pertains to a branch office, the branch PARTY_ID is stored.

Name	Type	Description
DoNotConfuseWith	string	Indicates existence of similarly named businesses.
DomesticUltimateDUNSNumberC	string	DUNS Number for the Domestic Ultimate, which is the highest family member in the same country as the business entity. A subject can be its own Domestic Ultimate.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	The effective latest change is not used.
EffectiveSequence	int	The effective sequence is not used.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EmployeesAtPrimaryAddress	string	The number of employees at the referenced address.
EmployeesAtPrimaryAddressEstimation	string	Indicates the calculation of employees at the primary address as estimated.
EmployeesAtPrimaryAddressMinimum	string	Indicates the calculation of employees at the primary address as minimum.
EmployeesAtPrimaryAddressText	string	The number of employees at the referenced address that cannot be mapped to a number.
EmployeesTotal	decimal	The total number of employees.
EnquiryDUNS	string	The identifier used to query the Dun and Bradstreet data. If a location is a branch, then in some countries the headquarters DUNS number is used to do the query. Otherwise it is the same as the DUNS number.
ExportInd	string	Indicates whether the organization is an exporter. If the value is Y, then the organization is an exporter. The default value is N.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services

Name	Type	Description
		Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
GlobalUltimateDUNSNumberC	string	DUNS Number for the Global Ultimate, which is the highest family member in the same country as the business entity as you proceed further on this branch of the tree. A case can be its own ultimate.
GrowthStrategyDescription	string	The description of the growth strategy.
HQBranchIndicator	string	The status of this site, such as HQ, a branch, or a single location. A list of accepted values are defined in the lookup type HQ_BRANCH_IND.
HomeCountry	string	The home country associated with the party.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
ImportInd	string	Indicates whether the organization is an importer. If the value is Y, then the organization is an importer. The default value is N.
IncorpYear	int	The year that the business was formally incorporated.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LaborSurplusInd	string	Indicates whether the organization operates in an area with a labor surplus. If the value is Y, then the organization operates in an area with a labor surplus. The default value is N.
LastEnrichmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was last enriched in DaaS.

Name	Type	Description
LastSourceUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated by the source system.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdateSourceSystem	string	The source system that last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LegalStatus	string	The legal structure of the organization such as partnership, corporation, and so on.
LineOfBusiness	string	The type of business activities performed at this site.
LocalActivityCode	string	The local activity classification code.
LocalActivityCodeType	string	The local activity classification code type identifier.
LocalBusIdenType	string	The most common business identifiers in a country such as Chamber of Commerce Number in Italy, Government Registration Number in Taiwan. A list of accepted values are defined in the lookup type LOCAL_BUS_IDEN_TYPE.
LocalBusIdentifier	string	The primary identifier assigned to a businesses by a government agency such as Chamber of Commerce, or other authority. It is often used by countries other than USA.
MinorityOwnedInd	string	Indicates whether the organization is primarily owned by ethnic or racial minorities. If the value is Y, then the organization is owned by ethnic or racial minorities. The default value is N.
MinorityOwnedType	string	The type of minority-owned firm.
MissionStatement	string	The corporate charter of organization in user-defined text format.
NextFyPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its next fiscal year.

Name	Type	Description
OobInd	string	Indicates whether the organization is out of business. If the value is Y, then the organization is out of business. The default value is N.
OrgInformation	*Trading Community Organization Profile Additional Information*	The information of the organization.
OrganizationName	string	The name of the party when the party type is Organization.
OrganizationProfileId	long	The unique identifier of the organization profile. • Primary Key
OrganizationSize	string	Size of an organization based on revenue, number of employees, and so on.
OrganizationType	string	Not used in Fusion V1.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
ParentDUNSNumberC	string	Parent is a corporation that owns more than 50 percent capital stock of another corporation. The parent company can also be a subsidiary of another corporation. If the parent also has branches, then it is headquarters and also parent company. Headquarters is a business establishment that has branches or divisions reporting to it, and is financially responsible for those branches or divisions. If the headquarters has more than 50 percent of capital stock owned by another corporation, then it is also a subsidiary. If it owns more than 50 percent of capital stock of another corporation, then it is also a parent.
ParentSubInd	string	Indicates whether the organization is a parent or subsidiary.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix.

Name	Type	Description
		For Person, it is concatenation of person_name and suffix.
PreferredContactEmailAddress	string	The e-mail address of the primary contact person of the organization.
PreferredContactFormattedPhoneNumber	string	The formatted phone number of the primary contact person of the organization.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactName	string	The name of the primary contact person of the organization.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the identifying address.
PrimaryAddressCountry	string	The country listed in the TERRITORY_CODE column of the FND_TERRITORY table for the identifying address.
PrimaryAddressCounty	string	The county of the Identifying address.
PrimaryAddressLine1	string	The first line of the identifying address.
PrimaryAddressLine2	string	The second line of the Identifying address.
PrimaryAddressLine3	string	The third line of the Identifying address.

Name	Type	Description
PrimaryAddressLine4	string	The fourth line of the Identifying address.
PrimaryAddressPostalCode	string	The postal code of the identifying address.
PrimaryAddressProvince	string	The province of the identifying address.
PrimaryAddressState	string	The state of the Identifying address.
PrimaryEmailAddress	string	The e-mail address of the organization.
PrimaryEmailId	long	The primary e-mail contact point ID of the organization.
PrimaryFormattedPhoneNumber	string	The primary telephone number formatted in the local format of the organization.
PrimaryLanguage	string	The standard name for a language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The primary contact point phone ID of the organization.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	The primary uniform resource locator.
PrimaryWebId	long	The unique identifier of the primary uniform resource locator.

Name	Type	Description
PrincipalName	string	The Name of the highest ranking person in the company.
PrincipalTitle	string	The title of the highest ranking person in the organization.
Pronunciation	string	The pronunciation of the organization.
PublicPrivateOwnershipFlag	boolean	Indicator to specify if the organization is privately owned. Y stands for a privately owned organization and N stands for a publicly owned organization.
RegistrationType	string	Indicates the registration type of the organization.
RentOwnInd	string	Indicates if this account owns or rents the place of business. A list of valid values for rent, own, and lease are defined in the lookup OWN_RENT_IND.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The standard industry classification (SIC) code.
SICCodeType	string	The version of the standard industry classification (SIC) code.
SeblUserKeyLoc	string	The location of the account, optional part of the user primary key.
SmallBusInd	string	Indicates whether the organization is considered as a small business. If the value is Y, then the organization is considered as a small business. The default value is N.
Status	string	The status of the record.
StockSymbol	string	The corporate stock symbol such as ORCL.
SuffixOverriddenFlag	boolean	Indicator to specify that the attribute has Y if the suffix is overridden by user and N otherwise. Default value is N.
ThirdPartyFlag	boolean	Indicator that tracks if a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. Y

Name	Type	Description
		stands for a third party relationship, N stands for a direct relationship. If Oracle Service is installed, the third party field in the Customers window is required.
TotalEmployeesEstimatedIndicator	string	Indicates if the employee total is estimated. The accepted values are defined in the lookup type TOTAL_EMP_EST_IND.
TotalEmployeesInd	string	Indicates if subsidiaries are included in the calculation of total employees. The accepted values are defined in the lookup type TOTAL_EMPLOYEES_INDICATOR.
TotalEmployeesMinimumIndicator	string	Indicates if the number is a minimum, maximum, or average number of total employees. The accepted values are defined in the lookup type TOTAL_EMP_MIN_IND.
TotalEmployeesText	string	The total number of employees in text format.
TotalPaymentAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total number of payment experiences.
TradingPartnerIdentifier	string	One column to store the FSIO related trading partner codes. It stores alpha numeric values and also addresses the Fed vs. Non-Fed attribute requirement.
UniqueNameAlias	string	The name as identified by the users to internally recognize the organization.
UniqueNameSuffix	string	Identifies system generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
WomanOwnedInd	string	Indicates whether the organization is primarily owned by women. If the value is Y, then the organization is primarily owned by women. The default value is N.
YearEstablished	int	The year when the organization began doing business.

Additional Account Name

An additional name of an organization, such as a legal name or a DBA name.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}AdditionalOrganizationName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Indicator to specify the preferred additional name for the organization.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameId	long	The unique identifier of the party name. It is primary Key and system generated. • Primary Key
PartyNameType	string	The type of the name. It is a value defined by the additional party name and identifier type entity. The party type must be consistent with the party type that the PARTY_NAME_TYPE can be applied to.
PreferredFlag	boolean	Indicator to specify the name as preferred name for this party within the name type. Possible values are Y and N. Default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Name	Type	Description
TransliterationLang	string	Used to identify the language for the name. It is validated against FND_LANGUAGES.LANGUAGE_CODE. Default value is the Session Language.

Additional Contact Name

An additional name of a person, such as the maiden name or alias.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}AdditionalPersonName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Indicator to specify the preferred additional name of a person.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameId	long	The unique identifier of the party name ID. It is primary key and system generated. • Primary Key
PartyNameType	string	The type of the name. It is a value defined by the additional party name and identifier type entity. The party type must be consistent with the party type that the PARTY_NAME_TYPE can be applied to.
PersonAcademicTitle	string	Used to specify the academic title for a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field degree in HL7.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_

Name	Type	Description
		PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	Used to specify the last name prefix such as fon, van, and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_ PREFIX in HZ_PERSON_PROFILES is used. It corresponds to the field Last Name Prefix in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	Used to specify the name suffix such as junior, senior, the third, and so on for a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Suffix in HL7.
PersonPreNameAdjunct	string	Used to specify the name prefix such as Mr., Ms, Dr, and so on for a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Prefix in HL7. It is validated against lookup CONTACT_TITLE.
PersonPreviousLastName	string	Used to specify the previous last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It has no mapping in HL7.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_ PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PreferredFlag	boolean	Indicator to specify the name as preferred name for the party within the name type. Possible values are Y and N. Default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TransliterationLang	string	Used to specify the language used for the name. It is validated against FND_LANGUAGES.LANGUAGE_CODE. Default value is the Session Language.

Additional Household Name

An additional name associated with a group. For example, the phonetic name of a group.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}AdditionalGroupName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Household*
Handled by	*Trading Community Group*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Identify the name as preferred name for this party within this name type. Possible values are 'Y' and 'N'. Default is 'N'.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameId	long	Unique Identifier of Party Name. • Primary Key
PartyNameType	string	The type of party name.
PreferredFlag	boolean	The flag which Identifies the name as preferred name for this party within this name type. Possible values are 'Y' and 'N'. Default is 'N'.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TransliterationLang	string	Used to capture the language used for the name.

Additional Identifier

An additional identifier of a trading community member, such as driver's license number or passport number.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}AdditionalPartyId

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*

Relationship Type	Object or Service
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
ExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expiration date for the identifier. It may be NULL, and does not apply to all types of identifiers.
IssueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date in which the Identifier was issued. It may be NULL and does not apply to all types of identifiers.
IssuingAuthorityName	string	The issuing authority name.
IssuingAuthorityPartyId	long	The unique identifier of the issuing authority.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyIdentifierId	long	The unique identifier of the party identifier. • Primary Key
PartyIdentifierType	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.
PartyIdentifierType1	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.
PartyIdentifierValue	string	The value of the party identifier.
PartyName	string	The name of the party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StateProvince	string	The province of the address.
StatusCode	string	The pre-defined code used to indicate the status.

Address

An address of a trading community member, such as Oracle Corporation is located at 500 Oracle Parkway, Redwood Shores, CA.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Telex*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contains	*Trading Community Address Additional Information*
Contains	*Email*
Contains	*Electronic File Transfer*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AddressExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the location is no longer valid.
AddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines that are used in Japan.
AddressStyle	string	Style of the address.
Addressee	string	The information of the addressee.
City	string	The name of the city.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.

Name	Type	Description
ContactPreferenceExistFlag	boolean	Indicator to specify if the contact is primary contact for the party.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	The name of the country.
Country1	string	The attribute country1 is not used.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
DoNotValidateFlag	boolean	Indicator to specify that a particular location is not eligible for address validation irrespective of the current validation.
Eft	*Electronic File Transfer*	The electronic file transfer information for the party.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.

Name	Type	Description
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedAddress	string	The formatted read-only address.
FormattedLocaleAddress	string	The formatted read-only local address.
FormattedMultilineAddress	string	The formatted multi line address of the party site.
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
HouseType	string	Indicates the building type.
IdentifyingAddressFlag	boolean	Indicator to specify the identifying address for the party. Y stands for the indentifying site and N stands for sites that are not the indentifying site.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
Language	string	The operating language for the party site.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	The latitude of the party address.
LocationDirections	string	Directions to the location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
LocationLanguage	string	The operating language for the locations.

Name	Type	Description
Longitude	decimal	The longitude of the party address.
Mailstop	string	A user-defined code to indicate a mail drop point within the organization.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary address of the contact irrespective of the context. Y stands for primary address and N stands for all others.
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	Stores the doing-business_as (DBA) party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameDivision	string	Stores the division party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameLegal	string	Stores the legal party name for a party site. This column is used to store FSIO related legal party name attribute.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteInformation	*Trading Community Address Additional Information*	The party address information.
PartySiteName	string	The user-defined name for the site.

Name	Type	Description
PartySiteNumber	string	The party site number of the address.
PartySiteType	string	Stores the party site type and is based on the lookup. Currently this is either null or one-time.
PartySiteUse	*Trading Community Address Purpose*	The information of the party address usage.
PartyUsageCode	string	The usage context of a party's contact point.
Phone	*Phone*	The phone information for the entity.
Position	string	The primary direction such as north or east that is used to access the location.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four digit extension to the United States postal ZIP code.
Province	string	The name of the province.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The Telex information associated with the party.
UsageCode	string	The usage code is not used.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	The standardized status code describing the results of the validation.

Name	Type	Description
Web	*Web*	The web information related to the record.

Certification

The certification information of a trading community member, such as a full ISO 9001 registered firm.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}Certification

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CertificationId	long	The unique identifier for certification. • Primary Key
CertificationName	string	The name of the certification such as ISO9000 and GMP001.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrentStatus	string	The name for the status of the certification. For example, applied for, granted, or expired.
ExpiresOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification expires.
Grade	string	The level or grade of certification provided by the ISSUED_BY_AUTHORITY. For example, founding member, gold, fully certified, and partially certified.
IssuedByAuthority	string	The name of the certifying authority.
IssuedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification was issued.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Name	Type	Description

Citizenship

The citizenship information about a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Citizenship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BirthOrSelected	string	Indicates if the citizenship was granted by being born in the country or by naturalization.
CitizenshipId	long	The unique citizenship identifier of a person. • Primary Key

Name	Type	Description
CountryCode	string	The ISO code of the country from which a person claims citizenship.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateDisowned	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when an individual renounced citizenship. This is usually a self-declared date that might not match a legal effective date.
DateRecognized	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the country granted citizenship to the individual. For a native-born person, this date is typically the person's date of birth.
DocumentReference	string	The unique reference number such as passport number or naturalization reference number associated with DOCUMENT_TYPE.
DocumentType	string	The class of document that confirms citizenship. For example, a passport, or naturalization papers.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Classification Assignment

The classification code assigned to a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CodeAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Sales Competitor*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Reference*
Handled by	*Sales Reference Customer*
Handled by	*Company and User Registration*
Handled by	*Sales Party*
Handled by	*Sales Competitor Service*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party Territory service*
Handled by	*Sales Party Resource Service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassCategory	string	The name of the classification category.
ClassCode	string	The code of the classification.
CodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an object. It is primary key and system generated. • Primary Key
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableKey1	string	The first column of the alphanumeric or multi-part foreign key.
OwnerTableKey2	string	The second column of the alphanumeric or multi-part foreign key.
OwnerTableKey3	string	The third column of the alphanumeric or multi-part foreign key.
OwnerTableKey4	string	The fourth column of the alphanumeric or multi-part foreign key.
OwnerTableKey5	string	The fifth column of the alphanumeric or multi-part foreign key.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PrimaryFlag	boolean	Indicator that specifies if this is the primary class code of a class category for the organization. Y stands for the primary class code and N stands for all others.
Rank	decimal	Ranks classes if multiple classes are assigned to a party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Contact

The profile information of the trading community person. The profile includes information such as marital status and additional name.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Person Profile Additional Information*
Contained by	*Trading Community Person Details*
Contained by	*Sales Account*
Contained by	*Loyalty Member*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Loyalty Member Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Alias	string	Person alias name.

Name	Type	Description
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DataCloudStatus	string	The enrichment status of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
DateOfDeath	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person died.
DeceasedFlag	boolean	Y or N indicates whether the person is deceased or not.
DeclaredEthnicity	string	The declared ethnicity of the person.
Department	string	The free form text used to name the department.
DepartmentCode	string	The list of values for possible department codes.

Name	Type	Description
Distance	decimal	The distance from the input location.
DoNotCallFlag	boolean	Indicator to specify if the user can send mail to the person or not.
DoNotContactFlag	boolean	Indicator to specify if the user can contact the person through phone, e-mail, or mail or not.
DoNotEmailFlag	boolean	Indicator to specify if the user can send e-mail to the person or not.
DoNotMailFlag	boolean	Indicator to specify if the user can send mail to the person or not.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	The date effective entity. Y indicates that this row represents the latest change in the day.
EffectiveSequence	int	The date effective entity. Indicates the order of different changes made during a day. The lowest value represents the earliest change in the day.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
FavoriteContactFlag	boolean	Indicator to specify if the person is key contact.
Gender	string	The gender details such as male, female, or unknown of the person.
HeadOfHouseholdFlag	boolean	The head of household indicator is not used.
HouseholdIncomeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The household income amount is not used.
HouseholdSize	decimal	The household size is not used.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or

Name	Type	Description
		organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
JobTitle	string	The free form text for the job title.
JobTitleCode	string	The code given to the job title.
LastContactDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the contact was last contacted.
LastEnrichmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was last enriched in DaaS.
LastKnownGPS	string	The geophysical location that is, GPS point last reported for the person.
LastSourceUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated by the source application.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdateSourceSystem	string	The source application that last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person.
MaritalStatusEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marital status of the person changed.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix.

Name	Type	Description
		For Person, it is concatenation of person_name and suffix.
PersonAcademicTitle	string	The academic title that is part of the name of a person such as Dr. Jane Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonInformation	*Trading Community Person Profile Additional Information*	The information of the person.
PersonInitials	string	The Initials of the name.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	Used to identify the Last name prefix such as fon, van and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_ PREFIX in HZ_PERSON_PROFILES is used. Corresponds to the field, Last Name Prefix in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonName	string	The combination of title, first, middle, last, and suffix names.
PersonNameSuffix	string	Indicates the place in a family structure. For example, III in Tom Jones III.
PersonPreNameAdjunct	string	Salutary introduction such as Mr., Herr, and so on.
PersonPreviousLastName	string	The previous last or surname of the person.
PersonProfileId	long	The unique identifier of the person profile. • Primary Key
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double

Name	Type	Description
		last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PersonalIncomeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated gross annual income of the person.
PlaceOfBirth	string	The place where the person was born, including city and country.
PreferredContactEmail	string	The preferred contact e-mail of the person.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactName	string	The preferred contact name of the person.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredContactPhone	string	The preferred contact phone of the person.
PreferredContactURL	string	The preferred contact uniform resource locator of the person.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the identifying address.

Name	Type	Description
PrimaryAddressCountry	string	The country listed in the TERRITORY_CODE column of the FND_TERRITORY table for the identifying address.
PrimaryAddressCounty	string	The county of the identifying address.
PrimaryAddressLatitude	decimal	The primary address latitude information for the location for spatial proximity and containment purposes.
PrimaryAddressLine1	string	The first line of the identifying address.
PrimaryAddressLine2	string	The second line of the identifying address.
PrimaryAddressLine3	string	The third line of the identifying address.
PrimaryAddressLine4	string	The fourth line of the identifying address.
PrimaryAddressLocationId	long	The primary address location ID.
PrimaryAddressLongitude	decimal	The primary address longitude information for the location for spatial proximity and containment purposes.
PrimaryAddressPostalCode	string	The postal code of the identifying address.
PrimaryAddressProvince	string	The province of the identifying address.
PrimaryAddressState	string	The state of the identifying address.
PrimaryCustomerId	long	The customer party identifier of a primary customer for a given person. There should be a valid relationship between the person and the customer.
PrimaryCustomerName	string	The customer party name of a primary customer for a given person. There should be a valid relationship between the person and the customer.
PrimaryCustomerRelationshipId	long	The unique identifier of the primary customer relationship.
PrimaryEmailAddress	string	The e-mail address of the person.

Name	Type	Description
PrimaryEmailId	long	The primary contact point e-mail ID of the person.
PrimaryFormattedAddress	string	The primary formatted address of the person.
PrimaryFormattedPhoneNumber	string	The primary telephone number formatted in the local format of the person.
PrimaryLanguage	string	The standard name for a language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The primary contact point phone ID of the person.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	The uniform resource locator.
PrimaryWebId	long	The unique identifier of the primary uniform resource locator.
Pronunciation	string	The person pronunciation.
RentOwnInd	string	Indicates if the person rents or owns his or her residence. Lookup values include rent, own, lease, and so on.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
SalesAffinityCode	string	The affinity of a person towards the deploying organization.
SalesBuyingRoleCode	string	The role of a person in the buying process.
Salutation	string	The phrase used to address a party in any correspondence.
Status	string	The status of the record.
SuffixOverriddenFlag	boolean	This attribute has Y if the suffix is overridden by user and N if not. Default value is N.
UniqueNameSuffix	string	Identifies system generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.

Contact Address

The address of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PersonPartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Contact Preference*
Contains	*Source System Reference*
Contains	*Trading Community Address Additional Information*
Contained by	*Trading Community Person Details*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Addressee	string	The information of the addressee in the contact address.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.

Name	Type	Description
IdentifyingAddressFlag	boolean	Indicates whether this is the identifying address for the party. If the value is Y, then this is the identifying address for the party.
Language	string	The language used in the contact's location.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
Mailstop	string	A user-defined code to indicate a mail drop point within their organization.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary address of the associated object. If the value is True, then this is the primary address. The default value is False.
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	The doing-business_as (DBA) party name for a party site.
PartyNameDivision	string	The division of the party name for a party site.
PartyNameLegal	string	The legal party name for a party site.

Name	Type	Description
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteName	string	The address associated with the party site.
PartySiteNumber	string	The alternate identifier of the party site.
PartySiteType	string	The type of the party site.
PartySiteUse	*Trading Community Address Purpose*	Indicates the use of the party site.
PartyUsageCode	string	The usage context of a party's contact point.
PersonPartySiteInformation	*Trading Community Address Additional Information*	The party site information of the person.
Phone	*Phone*	The phone information for the entity.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Contact Interest

The interests of the trading community member, such as baseball, sports car, or painting.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonInterest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
InterestName	string	A text field that lets you assign a descriptive name to an interest. For example, pets, dogs, baseball, or sports car racing.
InterestTypeCode	string	A code to classify interests for evaluation.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
LevelOfInterest	string	The user-defined level number or name to rate the amount of interest in the activity. For example, high, medium, or low.
LevelOfParticipation	string	The user-defined level number or name to indicate if the person participates and to what extent.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PersonInterestId	long	The unique identifier of interests of the person. • Primary Key
RequestId	long	A system-generated read-only attribute used by the application framework.
Since	{http://xmlns.oracle.com/adf/svc/types/}date-Date	An approximate date from which the person was involved with the activity.
SportIndicator	string	Indicates if the activity is a sport. Y stands for sports and N stands for non-sport activities.
Status	string	The status of the record.
SubInterestTypeCode	string	A code to classify subinterests of the interest type code.
Team	string	Any team the person likes to watch or play for.

Contact Language

The languages known information of a trading community member. For example, Mary Smith can speak both Spanish and English but can only read and write English.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PersonLanguage

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Handled by	*Trading Community Group*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LanguageName	string	The standard name for a language. For example, Spanish, Mandarin, or American English. Foreign key to the FND_LANGUAGES table.
LanguageUseReferenceId	long	The unique identifier of the language use reference.

Name	Type	Description
		• Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
NativeLanguageFlag	boolean	Indicator to specify if the language is the declared native language of a person. Y stands for a declared native language and N stands for all other languages.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PrimaryLanguageIndicator	string	Indicates if this is the primary language used by a person in day-to-day transactions. Y stands for the primary language and N stands for other languages.
ReadsLevel	string	The user-defined level number or name to indicate the ability to read a language.
RequestId	long	A system-generated read-only attribute used by the application framework.
SpeaksLevel	string	The user-defined level number or name to indicate the ability to speak a language.
SpokenComprehensionLevel	string	The code to indicate comprehension of a spoken language.
Status	string	The status of the record.
WritesLevel	string	The user-defined level number or name to indicate the ability to write in a language.

Contact Preference

The contact preference of the trading community member. For example, do not call Joe Smith between 10 a.m. and 12 noon on weekdays.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}ContactPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Electronic Data Interchange*
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Household*
Contained by	*Phone*
Contained by	*Telex*
Contained by	*Web*
Contained by	*Contact Address*
Contained by	*Electronic File Transfer*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactLevelTable	string	The table that stores the contact level of the contact preference, and uses the SUBJECT_TABLE lookup. The list of accepted values are HZ_PARTIES, HZ_PARTIES_SITES, or HZ_CONTACT_POINTS.
ContactLevelTableId	long	The foreign key to the table specified in CONTACT_LEVEL_TABLE column. The list of accepted values are PARTY_ID from HZ_PARTIES table, CONTACT_POINT_ID from HZ_CONTACT_POINTS table, or PARTY_SITE_ID from HZ_PARTY_SITES table.
ContactPreferenceId	long	The unique identifier for the contact preference. • Primary Key
ContactType	string	The contact party type that defines whether the contact is a sales account, a prospect, a contact, or any other user-defined party

Name	Type	Description
		type. The default value is CUSTOMER. A list of accepted values is defined in the lookup CONTACT_TYPE.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaximumNoOfInteractUOMCode	string	The period of time during which the maximum number of interactions applies. Uses the MAX_NO_OF_INTERACT_UOM_CODE lookup.
MaximumNoOfInteractions	decimal	The number of times you can use this contact point. The period of time that this number applies is stored in the MAX_NO_OF_INTERACT_UOM_CODE column.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PreferenceCode	string	Indicates whether to use a particular contact method. The list of accepted values are defined in the PREFERENCE_CODE lookup.
PreferenceEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes inactive.
PreferenceEndTimeHR	int	The hour part of time when the contact preference becomes inactive. The time is recorded in the 24 hour format.

Name	Type	Description
PreferenceEndTimeMi	int	The minutes part of the time when the contact preference becomes inactive.
PreferenceStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes active.
PreferenceStartTimeHR	int	The hour part of time when the contact preference becomes active. The time is recorded in the 24 hour format.
PreferenceStartTimeMi	int	The minutes part of the time when the contact preference becomes active.
PreferenceTopicType	string	The appropriate subjects to send the party that the preference is created for. The list of accepted values are defined in the PREFERENCE_TOPIC_TYPE lookup.
PreferenceTopicTypeCode	string	The code of the preference topic type.
PreferenceTopicTypeId	long	The unique identifier of the preference topic type.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
RequestedBy	string	Indicates if the permission or restriction was created internally or requested by the party. The list of accepted values are defined in the REQUESTED_BY lookup.
Status	string	The status of the record.

Credit Rating

The trading community member's credit rating information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CreditRating

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AverageHighCredit	decimal	The average of all the high credit experiences.
BankruptcyInd	string	Indicates if open bankruptcy exists. Y stands for any open bankruptcy that exists and N stands for no open bankruptcy.
BusinessDiscontinued	string	The business discontinued at the listed location. Prompts reader to contact D and B customer service center if any business is operating.

Name	Type	Description
ClaimsInd	string	Indicates if open claims, legal claims, liens, protested bills, or any equivalent information exists. Y stands for availability of information and N stands for no information.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRatingId	long	The unique identifier of the credit rating. • Primary Key
CreditRiskScoreExplain	string	Explains numeric credit risk score that estimates the risk of delinquent payment over the next 12 months.
CreditScore	string	Indicates the risk of delinquent payments.
CreditScoreAge	decimal	Indicates the age of the credit score expressed in months.
CreditScoreClass	decimal	The date when the credit score was calculated.
CreditScoreCommentary	string	The lookup for explanation codes in the CREDIT_SCORE column.
CreditScoreCommentary10	string	Indicates comments about the credit score.
CreditScoreCommentary2	string	Indicates comments about the credit score.
CreditScoreCommentary3	string	Indicates comments about the credit score.
CreditScoreCommentary4	string	Indicates comments about the credit score.
CreditScoreCommentary5	string	Indicates comments about the credit score.
CreditScoreCommentary6	string	Indicates comments about the credit score.

Name	Type	Description
CreditScoreCommentary7	string	Indicates comments about the credit score.
CreditScoreCommentary8	string	Indicates comments about the credit score.
CreditScoreCommentary9	string	Indicates comments about the credit score.
CreditScoreDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the credit score was calculated.
CreditScoreIncdDefault	decimal	Indicates the probability expressed as a percentage of delinquency for a score range or class.
CreditScoreNatlPercentile	decimal	Indicates the relative credit rating of a business compared to all businesses whose credit ratings are included in the local country database.
CreditScoreOverrideCode	string	Indicates why no score was calculated or why score is equal to zero in the US.
CriminalProceedingInd	string	Indicates if criminal proceedings exist. Y stands for availability of information and N stands for no information.
DebarmentInd	string	Indicates whether the company is debarred from doing business with government agencies. Y stands for company debarred and N stands for not debarred.
DebarmentsCount	decimal	The count of filings by government agencies in the United States that prohibit the party from entering into contracts or transactions with those agencies.
DebarmentsDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date of the most recent filing to prohibit the party from entering into contracts or transactions with a government agency in the United States.
DelqPmtPctgForAllFirms	decimal	Specifies a delinquency percentage for all firms.
DelqPmtRngPrcnt	decimal	Specifies a delinquency percentage for credit score range.
Description	string	The free text description of the record.
DetHistoryInd	string	The code that indicates if detrimental information exists for the party and whether

Name	Type	Description
		complete details exist on management and party. Y stands for availability of information and N stands for no information.
DisasterInd	string	Indicates if information exists about disasters such as fires, hurricanes, and so on. Y stands for availability of information and N stands for no information.
FailureScore	string	For US, the failure risk class, 1 through 5. For Canada , the stability score that indicates risk of business closure, 1 through 10. For Australia, the percentile failure score.
FailureScoreAge	decimal	The failure score age in months.
FailureScoreClass	decimal	1 through 5 to indicate risk of financial stress for a customer account. 1 for a business with greatest risk and 5 for a business with least risk.
FailureScoreCommentary	string	The comments related to failure score.
FailureScoreCommentary10	string	The comments related to failure score.
FailureScoreCommentary2	string	The comments related to failure score.
FailureScoreCommentary3	string	The comments related to failure score.
FailureScoreCommentary4	string	The comments related to failure score.
FailureScoreCommentary5	string	The comments related to failure score.
FailureScoreCommentary6	string	The comments related to failure score.
FailureScoreCommentary7	string	The comments related to failure score.
FailureScoreCommentary8	string	The comments related to failure score.
FailureScoreCommentary9	string	The comments related to failure score.
FailureScoreDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the failure score was calculated.
FailureScoreIncdDefault	decimal	Probability, in percentage, of failure for score range of class.

Name	Type	Description
FailureScoreNatnlPercentile	decimal	The national percentile that reflects the relative ranking of a company among all scored companies in the local country database.
FailureScoreOverrideCode	string	In Europe, code for the reason for variance between the D and B rating and the failure score. In the US, code for the reason why no score was calculated, or why the score is zero.
FinclEmbtInd	string	Indicates if open bankruptcy, receivership liquidation, or any equivalent information exists. Y stands for availability of information and N stands for no information.
FinclLglEventInd	string	Indicates if special events such as financial embarrassment and legal filings exist. Y stands for availability of information and N stands for no information.
GlobalFailureScore	string	The global score for the risk of business default.
HighCredit	decimal	Maximum credit ever extended to the organization.
HighRngDelqScr	decimal	Specifies the high end of the range of the commercial credit score.
JudgementInd	string	Indicates if open judgments exist. Y stands for any open judgment that exists and N stands for no open judgments.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LienInd	string	Indicates if open liens exist. Y stands for any open lien that exists and N stands for no open liens.
LowRngDelqScr	decimal	Specifies the low end of the range of the commercial credit score.
MaximumCreditCurrencyCode	string	The currency used to denominate the MAXIMUM_CREDIT_RECOMMENDATION column.

Name	Type	Description
MaximumCreditRecommendationAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Maximum credit limit recommended for the currency specified in the MAXIMUM_CREDIT_CURRENCY_CODE column.
NegvPmtExpl	string	The conditional comment generated when negative payments are present.
NoTradeInd	string	Indicates that no trade experiences exist. Y stands for any trade experience that exists and N stands for no trade experience.
NumberParentBankruptcyConversions	decimal	The number of bankruptcy conversions by the parent.
NumberParentBankruptcyFiling	decimal	The number of bankruptcies filed by the parent.
NumberSpecialEvent	decimal	The number of occurrences of the special events.
NumberTradeExperiences	decimal	The number of trade experiences.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OprgSpecificationEvntInd	string	Indicates if information exists about operational changes such as name changes, management changes, change of control, moves, and so on. Y stands for availability of information and N stands for no information.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OtherSpecificationEvntInd	string	Indicates if special events exist that are not otherwise specified.
ParentHQBankruptcyInd	string	Indicates if parent (P) or headquarters (H) are entered into bankruptcy.
PartyId	long	The unique identifier of the contact party.
PaydexComment	string	Additional paydex information.

Name	Type	Description
PaydexFirmComment	string	Comment on the paydex score for the organization.
PaydexFirmDays	string	The number of days used in the paydex score.
PaydexIndustryComment	string	Comment on the paydex score for the industry.
PaydexIndustryDays	string	The number of days used in the paydex score for the industry.
PaydexNorm	string	Median or average Paydex score for the industry.
PaydexScore	string	Paydex score for the previous 12 months payment history.
PaydexThreeMonthsAgo	string	Paydex score three months ago.
PrntBkcyChapterConv	string	The change of bankruptcy type.
PrntBkcyConvDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the bankruptcy converted from one type to another.
PrntBkcyFilgChapter	decimal	The chapter number of the bankruptcy filed by the parent under the US uniform commercial code.
PrntBkcyFilgDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The bankruptcy filing date of the parent.
PrntBkcyFilgType	string	The type of bankruptcy filed by the parent.
PubRecExpl	string	The conditional comment generated if suits, liens, and judgments exist.
RatedAsOfDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the rating was acquired.
Rating	string	The rating number or code of the rating company.
RatingOrganization	string	The name of the credit rating organization.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
SecuredFlngInd	string	Indicates if open secured filings such as UCC filings, secured charges or mortgages pledging, or any equivalent information exists. Y stands for availability of information and N stands for no information.
SlowTradeExpl	string	The conditional comment generated when paydex score indicates that slow trade experiences are present.
SpecialEventComment	string	The comment generated if special event section exists.
SpecialEventText	string	The narrative of the special event.
SpecialEventUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the special event was updated.
Status	string	The status of the record.
SuitInd	string	Indicates if open suits exist. Y stands for any open suit that exists and N stands for no open suits.

Customer Contact Profile

The person who functions as a contact for an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Organization Contact Additional Information*
Contains	*Customer Contact Responsibility*
Contains	*Source System Reference*
Contained by	*Relationship*

Relationship Type	Object or Service
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
ContactFormattedAddress	string	The formatted version of the contact address.
ContactFormattedMultilineAddress	string	The formatted multiline version of the contact address.
ContactName	string	The name of the contact.
ContactNumber	string	The user-defined identification number for this contact.
ContactPartyId	long	The unique identifier of the contact.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerEmailAddress	string	The e-mail address of the customer this contact person belongs to.
CustomerName	string	The name of the customer.
CustomerPartyId	long	The unique identifier of the customer this contact person belongs to.
CustomerPartyNumber	string	The alternate unique identifier of the customer this contact person belongs to.
CustomerUniqueName	string	The unique name of the customer. For an Organization, the value is a concatenation of unique_name_alias and suffix. For a Person, the value is a concatenation of person_name and suffix.
DecisionMakerFlag	boolean	Indicates if this contact is a decision maker. If the value is True, then the contact is a decision maker.
Department	string	The free form text used to name the department for the contact.
DepartmentCode	string	The department code for the contact. A list of accepted values is defined in the lookup DEPARTMENT_TYPE.
EmailAddress	string	The email address associated with the record.
FormattedAddress	string	The formatted address information.
FormattedPhoneNumber	string	The formatted phone number.

Name	Type	Description
JobTitle	string	The free form text for job title.
JobTitleCode	string	The code given to the job title.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The unique identifier of the organization contact. • Primary Key
OrgContactInformation	*Trading Community Organization Contact Additional Information*	The information of the organization contact.
OrganizationContactRole	*Customer Contact Responsibility*	The role of the contact in the organization.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyRelationshipId	long	The unique identifier of the relationship of the party.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteName	string	The address associated with the party site.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonCertReasonCode	string	The reason for the organization's current certification level assignment. A list of accepted

Name	Type	Description
		values is defined using the lookup HZ_PARTY_CERT_REASON.
PersonCertificationLevel	string	The certification level of a organization. A list of accepted values is defined in the lookup HZ_PARTY_CERT_LEVEL.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLanguageName	string	The language name associated with the person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.
PersonPreviousLastName	string	The previous last name of a person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.

Name	Type	Description
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.
Rank	string	The rank associated with this customer contact.
ReferenceUseFlag	boolean	Indicates if this contact can be used as a reference. If the value is Y, then the contact can be used as a reference.
RequestId	long	A system-generated read-only attribute used by the application framework.
SalesAffinityCode	string	The affinity of a contact to the deploying organization. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_AFFINITY_CODE.
SalesAffinityComments	string	The comments about the contact's affinity to the deploying organization.
SalesBuyingRoleCode	string	The roles played by a contact in the buying process, for example, decision maker or supporting role. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_BUY_ROLE_CODE.
SalesInfluenceLevelCode	string	The influence of the contact has on the deploying organization. A list of accepted values are defined in the lookup HZ_SLS_CNTCT_INFLUENCE_LVL_CD.
Salutation	string	The size of the household this person is a part of.
WebUrl	string	The web URL of contact point.

Customer Contact Responsibility

The role or responsibility of an organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContactRole

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Customer Contact Profile*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The organization contact identifier. Foreign key to the HZ_ORG_CONTACTS table.
OrgContactRoleId	long	The unique contact role identifier. It is primary key and system generated. • Primary Key
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PrimaryContactPerRoleType	string	Indicates if the contact is the primary contact for the role. Y stands for primary contact and N stands for a contact that is not the primary contact for the role type. The default value is N.
PrimaryFlag	boolean	Indicator that specifies if this is the primary role for the contact. Y stands for primary role and N stands for a non-primary role for the contact. The default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
RoleLevel	string	The role level of the contact. For example, executive, department head, or middle manager.

Name	Type	Description
RoleType	string	The role performed by a contact.
Status	string	The status of the record.

E-Mail

The e-mail address associated with a trading community member. For example, john.doe@oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Email

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The preferred format for e-mail addressed to this address such as HTML or ASCII. A list of accepted values is defined using the lookup EMAIL_FORMAT.
EmailInformation	*Trading Community Contact Point Additional Information*	The additional information about the e-mail.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary e-mail of the associated object. If the value is True, then this is the primary e-mail. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.

Name	Type	Description
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

E-Mail Domain

The domain of the e-mail address associated with a trading community member. For example, ABC Corporation has CORP and BUSINESS e-mail domains.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}EmailDomain

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*

Relationship Type	Object or Service
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DomainName	string	The actual or non-reversed domain name of the organization for display purpose.
EmailDomainId	long	The sequence generated unique identifier. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
Status	string	The status of the record.
TransposedDomain	string	The reversed domain name for the purposes of searching.

Education

The trading community person's education information. For example, a person may have attended the University of California from 1995 to 1999 and received an undergraduate degree in Computer Science with a GPA of 4.0.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Education

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CourseMajor	string	The primary area of study.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DegreeReceived	string	The abbreviation for the degree. For example, BA, BSc, MBA, MSc, PhD, and Gd (graduate diploma).
EducationId	long	The unique identifier of the education record. • Primary Key
LastDateAttended	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The year and month when a person last attended the educational institution.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
SchoolAttendedName	string	The name of the school.
SchoolPartyId	long	The party identifier of the school.
StartDateAttended	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the attendance of a person starts.
Status	string	The status of the record.

Name	Type	Description
TypeOfSchool	string	The classification of the educational organization. For example, high school, college, university, or professional school. Note that the classification of schools varies among different cultures.

Electronic Data Interchange

The electronic data interchange information associated with a trading community member. For example, the details of standard codes and payment methods that are to be used for data interchange.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Edi

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EDIEceTpLocationCode	string	The trading partner location code for EDI Gateway.
EDIIdNumber	string	The EDI trading partner number for the supplier site.
EDIPaymentFormat	string	Indicates type of information being transmitted with the funds if using EDI_PAYMENT_METHOD ACH. The list of accepted values are CCD, CCP, CHZ, CTX, PPD, and PPP.
EDIPaymentMethod	string	Indicates how a payment is to be made through EDI. The list of accepted values are ACH and BOP.
EDIRemittanceInstruction	string	Indicates who will send the remittance advice. The list of accepted values are Banks or Payables systems.
EDIRemittanceMethod	string	Indicates how remittance advice are sent to the supplier.
EDITpHeaderId	long	The unique identifier of the EDI transaction header.

Name	Type	Description
EDITransactionHandling	string	The ANSI standard code for EDI transaction type.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary EDI of the associated object. If the value is True, then this is the primary EDI. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.

Name	Type	Description
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Electronic File Transfer

The electronic funds transfer information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Eft

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
EFTPrintingProgramId	long	The printing program identifier.
EFTSWIFTCode	string	The EFT swift code information.
EFTTransmissionProgramId	long	The transmission program identifier.
EFTUserNumber	string	The number that identifies you as a user of electronic funds transfer service for your bank or clearing organization.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.

Name	Type	Description
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Employment History

The employment history information of a trading community member. For example, John Doe was a Vice President at Business World from 2001 to 2007 and President at World of Business from 2007 to 2009.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}EmploymentHistory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Work Class*
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*

Relationship Type	Object or Service
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the employment officially began.
Branch	string	The military branch code.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmployedAsTitle	string	Job position title assigned by an employer.
EmployedAsTitleCode	string	The code for the job title. If title cannot be represented by a code, then the EMPLOYED_AS_TITLE column must be used.
EmployedByDivisionName	string	The common name of a division or an organization at which the person was employed.
EmployedByNameCompany	string	The name of the organization at which the person was employed. Note that the name must not include the division name.

Name	Type	Description
EmployedByPartyId	long	The party identifier of the employer for situations in which the employer is represented as a party.
EmploymentHistoryId	long	The unique employment history identifier. • Primary Key
EmploymentTypeCode	string	Indicates whether the employment is part-time or full-time.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FacultyPositionFlag	boolean	Indicator Y or N to specify whether the position is a faculty position or not.
FractionOfTenure	decimal	The fraction of tenure.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MilitaryRank	string	The rank of the person in the branch.
PartyId	long	The unique identifier of the contact party.
ReasonForLeaving	string	The free format text that describes the reason for leaving.
RequestId	long	A system-generated read-only attribute used by the application framework.
Responsibility	string	Job responsibility of the person.
Served	string	Indicates where the person performed military service.
Station	string	Indicates the station name.

Name	Type	Description
Status	string	The status of the record.
SupervisorName	string	The full name of the manager of the person.
TenureCode	string	The type of tenure for faculty positions.
WeeklyWorkHours	decimal	The usual number of hours worked per week.
WorkClass	*Work Class*	The custom-defined classification information about job title and work experience of a person.

Financial Number

The financial report numbers of a trading community member, such as assets, liabilities, and cash balance.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}FinancialNumber

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Financial Report*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FinancialNumber	decimal	The value for the financial number. For example, the FINANCIAL_NUMBER_NAME column could have a numerical value of 3,000,000,000 for annual sales.
FinancialNumberCurrency	string	The ISO currency code for the financial number.
FinancialNumberId	long	The unique identifier of the financial number. • Primary Key
FinancialNumberName	string	A text field that lets you assign a descriptive name to a financial report item. For example, gross annual sales, profit, and net annual sales. A user-defined lookup.
FinancialReportId	long	The unique identifier of the financial report.
FinancialUnitsApplied	decimal	The order of magnitude (tens, hundreds, thousands, and so on) used for the FINANCIAL_NUMBER column.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ProjectedActualCode	string	Indicates if the projected amount is projected or actual. The list of accepted values are P and A. The default value is A.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
Status	string	The status of the record.

Financial Profile

The financial details of a trading community member, such as bank account information that was obtained as part of a credit evaluation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}FinancialProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessAuthorityDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when access to the information in the account was granted.
AccessAuthorityGranted	string	Indicates whether access to information in a financial account was granted. If the value is True, then the access has been granted.
BalanceAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The reported balance on an account. The balance can be a positive number, negative number, or zero.
BalanceVerifiedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the account balance was verified.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FinancialAccountNumber	string	The alternate unique identifier of the financial account.
FinancialAccountType	string	The short name that classifies the financial accounts. For example, savings, checking, home loan, personal loan, trading, and so on.
FinancialOrgType	string	The classification of financial organizations. For example, bank, savings and loan, private lender, building society and so on.
FinancialOrganizationName	string	The name of the financial organization that holds the account.
FinancialProfileId	long	The unique identifier of the party's financial profile. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Financial Report

The financial report information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}FinancialReport

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Financial Number*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AuditInd	string	Indicates if the financial reports are audited. If the value is True, then the financial reports have been audited.
ConsolidatedInd	string	Indicates if the financial reports are consolidated. If the value is C, then the reports are consolidated.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateReportIssued	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the financial report was published.
DocumentReference	string	The unique reference number such as passport number or naturalization reference number associated with DOCUMENT_TYPE.
EstimatedInd	string	Indicates whether the financial reports provide estimated data. If the value is True, then the financial reports provide the data.
FinalInd	string	Indicates whether the financial reports are the final closing statements for a business that has ceased operations. If the value is True, then the reports are final closing statements.

Name	Type	Description
FinancialNumber	*Financial Number*	The number that indicates a financial value like annual sales.
FinancialReportId	long	The unique identifier for a financial report. • Primary Key
FiscalInd	string	Indicates whether the financial reports cover a fiscal twelve-month accounting period. If the value is Y, then the financial report covers a twelve-month fiscal period.
ForecastInd	string	Indicates whether the financial reports display forecasts or future projections. If the value is Y, then the financial report displays forecasts.
IssuedPeriod	string	The period covered by the financial report. For example, fiscal year 1999, 1998, and so on.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OpeningInd	string	Indicates whether the financial reports are the opening statements for a business. If the value is Y, then the financial statements are opening statements.
PartyId	long	The unique identifier of the contact party.
ProformaInd	string	Indicates if the financial reports are pro forma numbers. If the value is Y, then the financial reports are pro forma numbers.
QualifiedInd	string	Indicates whether the financial reports include qualifying remarks from auditors about the fairness and accuracy of the numbers. If the value is Y, then the report is qualified by auditors.
ReportEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date of the report, used instead of Issued Period.
ReportStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date of the report, used instead of Issued Period.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
RequiringAuthority	string	The name of the primary organization that requires this financial report. For example, auditors, the Federal Trade Commission, or the Internal Revenue Service.
RestatedInd	string	Indicates whether the financial reports include data that was corrected after the original financial reports. If the value is Y, then the report has been corrected.
SignedByPrincipalsInd	string	Indicates whether the financial reports were signed by the principals of the organization. If the value is Y, then the reports are signed.
Status	string	The status of the record.
TrialBalanceInd	string	Indicates whether the financial reports include trial balance numbers. If the value is Y, then the financial report includes trial balance numbers.
TypeOfFinancialReport	string	A name for the financial report. For example, 10K report, Annual Report, or Shareholder's Special Report.
UnbalancedInd	string	Indicates whether the financial reports include balance sheet accounts that do not balance. If the value is Y, then report includes unbalanced balance sheet accounts.
WhUdpateId	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the record was entered or changed in a data warehouse.

Household

The trading community group information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}Group

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Additional Household Name*
Contains	*Classification Assignment*
Contains	*Source System Reference*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Web*
Contains	*Contact Preference*
Contains	*Phone*
Contains	*Contact Language*
Contains	*Certification*
Contains	*Usage Assignment*
Contains	*Additional Identifier*
Contains	*E-Mail Domain*
Contains	*Instant Messaging*
Contains	*E-Mail*
Contains	*Address*
Contains	*Preference*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*

Relationship Type	Object or Service
Contained by	*Sales Party Territory*
Handled by	*Trading Community Group*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalGroupName	*Additional Household Name*	Additional name associated with the group.
AdditionalPartyId	*Additional Identifier*	Additional Identifier for the group.
AnnualExpenses	long	Household annual expenses.
AnnualIncome	long	The value for annual income.
AverageAge	long	Household average age.
Certification	*Certification*	Certification information associated with the group.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
CertificationReasonCode	string	Reason for group party's current certification level assignment. HZ_PARTY_CERT_REASON lookup type.
Child0to6Number	long	The number of children between 0 and 6 years.
Child13to18Number	long	The number of children between 13 and 18 years.

Name	Type	Description
Child7to12Number	long	The number of children between 7 and 12 years.
CodeAssignment	*Classification Assignment*	Classification code assigned to the group.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DependentsNumber	long	The number of dependents.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	Not Used.
EffectiveSequence	int	Not Used.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
Email	*E-Mail*	The email address associated with the record.
EmailDomain	*E-Mail Domain*	Email domain information for the group.
FinancialProfile	*Financial Profile*	Financial Profile information of the group.

Name	Type	Description
GroupName	string	Name of this group.
GroupSize	long	Size of the group.
GroupType	string	The party type can only be person, organization, group.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MedianAge	long	The age of the median.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	Preference information of the group.
PartySite	*Address*	Address information associated with the group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	Party usage assigned to the group.
PersonLanguage	*Contact Language*	Language information associated with a group.
Phone	*Phone*	The phone information for the entity.

Name	Type	Description
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonEmail	string	The E-Mail of the preferred contact person.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredContactPersonName	string	The name of the preferred contact person.
PreferredContactPersonPhone	string	The phone number of the preferred contact person.
PreferredContactPersonURL	string	The URL of the preferred contact person.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the primary address.
PrimaryAddressCountry	string	The country for the primary address.
PrimaryAddressCounty	string	The country of the primary address.
PrimaryAddressLine1	string	Line one of the primary address.
PrimaryAddressLine2	string	Line two of the primary address.
PrimaryAddressLine3	string	Line three of the primary address.
PrimaryAddressLine4	string	Line four of the primary address.

Name	Type	Description
PrimaryAddressLocationId	long	The unique identification number for the primary address location.
PrimaryAddressPartySiteId	long	The unique identifier for the primary address party site.
PrimaryAddressPostalCode	string	The postal code of the primary address.
PrimaryAddressProvince	string	The province of the primary address.
PrimaryAddressState	string	The state of the primary address.
PrimaryEmail	string	Primary E-Mail Address of the Group.
PrimaryEmailId	long	Primary E-Mail ID.
PrimaryFormattedAddress	string	Primary formatted address for the group.
PrimaryFormattedMultilineAddress	string	Primary formatted multiline address for the group.
PrimaryFormattedPhoneNumber	string	Primary formatted phone number for the group.
PrimaryLanguage	string	Standard name for a primary language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The unique identification number for the primary phone.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.

Name	Type	Description
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	Primary URL.
PrimaryWebId	long	Primary Web ID.
ProfileCreatedBy	string	The user who created the row.
ProfileCreatedByModule	string	The module that created the profile.
ProfileCreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time of the creation of the row.
ProfileLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time of the last update of the row.
ProfileLastUpdateLogin	string	The session login associated to the user who last updated the row.
ProfileLastUpdatedBy	string	The user who last updated the row.
Relationship	*Relationship*	Relationship information for the group.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.
SuffixOverriddenFlag	boolean	This will have Y if the suffix is overridden by user N if not.
UniqueNameSuffix	string	System generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
WealthAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Household wealth amount or net worth.
Web	*Web*	The web information related to the record.

Instant Messaging

The instant messaging information of a trading community member, such as the AOL identifier or Yahoo Messenger information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}InstantMessaging

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessagingAddress	string	The instant messaging information address.
InstantMessagingInformation	*Trading Community Contact Point Additional Information*	The instant messaging information related to the record.

Name	Type	Description
InstantMessengerType	string	The type of the instant messenger type.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary instant messaging Id of the associated object. If the value is True, then this is the primary instant messaging Id. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.

Name	Type	Description
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Phone

The phone number associated with a trading community member. For example, the phone number for Oracle Corporation is 650-506-6000.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Phone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*

Relationship Type	Object or Service
Contained by	*Contact Address*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key

Name	Type	Description
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FormattedPhoneNumber	string	The formatted phone number.
LastContactDtTime	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time of last contact placed to this contact point.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PagerTypeCode	string	The PAGER_TYPE_CODE column stores the lookup code for the type of pager. The type of pager determines how the page is received. For example, tone, number, alphanumeric or two-way alphanumeric.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCallingCalendar	string	The name or code for a calling calendar used with this telephone number. This attribute is no longer used in Fusion applications.
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The additional number addressed after initial connection to an internal telephone system.
PhoneInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community phone.
PhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound, or outbound.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.

Name	Type	Description
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RawPhoneNumber	string	The unformatted telephone number.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TimezoneCode	string	The foreign key to FND_TIMEZONES_B.TIMEZONE_CODE.
TransposedPhoneNumber	string	This column stores the concatenation of PHONE_COUNTRY_CODE, PHONE_AREA_CODE, and PHONE_NUMBER in reverse order. For example, if PHONE_COUNTRY_CODE=1, PHONE_AREA_CODE=650 and PHONE_NUMBER=5065747, this column stores 74756050561. This column is used for building an index to search for any combination of the above three columns.

Preference

The preferences of a trading community member. For example, a member may prefer that the transaction currency is the US dollar.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalValue1	string	The additional preference value.
AdditionalValue2	string	The additional preference value.
AdditionalValue3	string	The additional preference value.
AdditionalValue4	string	The additional preference value.
AdditionalValue5	string	The additional preference value.
Category	string	A preference category is used to logically group one or more preference codes in a

Name	Type	Description
		particular user interface. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Module	string	The program that creates the preference. For example, TCA MOBILE CUSTOMER DIRECTORY.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PartyPreferenceId	long	The unique identifier of the party preference. • Primary Key
PreferenceCode	string	A preference code determines if a preference is a single value or a multiple value preference. The preference code is validated by the HZ_PREFERENCE lookup. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
ValueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The preference value when the data type is DATE.
ValueName	string	A user-defined alias for a preference value.

Name	Type	Description
ValueNumber	decimal	The preference value when the data type is NUMBER.
ValueVarchar2	string	The preference value when the data type is VARCHAR2.

Relationship

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}Relationship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Address*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Usage Assignment*
Contains	*Trading Community Relationship Additional Information*
Contains	*Customer Contact Profile*
Contains	*Source System Reference*
Contains	*Email*
Contained by	*Trading Community Person Details*
Contained by	*Household*

Relationship Type	Object or Service
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalInformation1	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type. For operating unit and legal entity to bank relationships, column stores communication agreement ID, which identifies agreement between payer and bank on type of EDIFACT documents that can be sent for processing payments.
AdditionalInformation10	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation11	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation12	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation13	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation14	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation15	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation16	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation17	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation18	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation19	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation2	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation20	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation21	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation22	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation23	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation24	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation25	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation26	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation27	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation28	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation29	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation3	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation30	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation4	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation5	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation6	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation7	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation8	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation9	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DirectionCode	string	The code of the relationship direction. The list of accepted values are defined in the lookup DIRECTION_CODE.
Email	*E-Mail*	The email address associated with the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
ObjectEmailAddress	string	The e-mail address of the object party in the relationship.
ObjectId	long	The unique identifier of the object party in this relationship.
ObjectPartyName	string	The name of the object party in this relationship.
ObjectTableName	string	The source table name of the object party in this relationship.
ObjectType	string	The object type of the relationship.
ObjectUsageCode	string	The usage code of object party in the relationship.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationContact	*Customer Contact Profile*	The organization contact information.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyName	string	The name of the party.
PartySite	*Address*	The party site associated with the relationship.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the relationship.
PercentageOwnership	decimal	The percentage of the child entity owned by the parent entity.
Phone	*Phone*	The phone information for the entity.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.

Name	Type	Description
RelationshipCode	string	The code for a forward or a backward relationship. A list of accepted relationship values is defined in the lookup PARTY_ RELATIONS_TYPE.
RelationshipId	long	The relationship identifier for the record.
RelationshipInformation	*Trading Community Relationship Additional Information*	The relationship type information.
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key
RelationshipType	string	The relationship type name. For example, CUSTOMER_SUPPLIER. A list of valid relationship types is defined in the lookup HZ_ RELATIONSHIP_TYPE.
RequestId	long	A system-generated read-only attribute used by the application framework.
Role	string	The role between the subject and object party in this relationship.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
SubjectEmailAddress	string	The e-mail address of the subject party in relationship.
SubjectId	long	The unique identifier of the subject in this relationship.
SubjectPartyUsageAssignment	*Usage Assignment*	The usage assignment of the subject party in the relationship.
SubjectTableName	string	The source table of the subject.
SubjectType	string	The subject type of the relationship.
SubjectUsageCode	string	The usage code of subject party in the relationship.

Name	Type	Description
Web	*Web*	The web information related to the record.

Sales Party Resource

These are resources associated to the sales party.

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/}SalesPartyResources

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Household*
Contains	*Trading Community Organization Details*
Contains	*Trading Community Person Details*
Handled by	*Sales Party Resource Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCode	string	Indicates access level of the resource. Valid values are Full, Edit and View. Owners (primary) always have full access.
CpdrfLastUpd	string	The standard replication column.
CpdrfVerPillar	int	The standard replication column.
CpdrfVerSor	int	The standard replication column.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
Group	*Household*	Indicates to which group the party this resource belongs to.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LockAssignmentFlag	boolean	Indicates the assignment flag.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationParty	*Trading Community Organization Details*	Indicates to which organization the party this resource belongs to.
PartyId	long	The unique identifier of the contact party.
PartyResourceId	long	Sales party team identifier. • Primary Key
PersonParty	*Trading Community Person Details*	Indicates to which person the party this resource belongs to.
PrimaryFlag	boolean	This is used to mark a resource as primary. The primary resource is also known as the owner.
ResourceId	long	The unique identifier of the resource.
ResourceOrgId	long	Indicates resource organization Id.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.

Name	Type	Description
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*
Contained by	*Location Details*
Contained by	*Household*
Contained by	*Contact Preference*
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*
Contained by	*Trading Community Address Purpose*

Relationship Type	Object or Service
Contained by	*Telex*
Contained by	*Phone*
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*
Contained by	*Trading Community Person Details*
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*
Contained by	*Trading Community Customer Account Site Use*
Contained by	*Relationship*
Contained by	*Electronic Data Interchange*
Contained by	*Trading Community Customer Account or Site Role*
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*

Relationship Type	Object or Service
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Telex

The telex number information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Telex

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.

Name	Type	Description
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary telex of the associated object. If the value is True, then this is the primary telex. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TelexNumber	string	The telex reference number (usually a telephone number) of the organization.

Trading Community Address Additional Information

The address information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/}PartySiteInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Address Purpose

The purpose of an address, such as Business, Home, or Ship To.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySiteUse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Relationship Type	Object or Service
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date at the start of the date range within which the row is active.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
IntegrationKey	string	The integration key is not used.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteUseId	long	The unique identifier of the party site used. • Primary Key
PrimaryPerType	string	Indicates if this is the primary use for the site. Y stands for the primary site and N stands for all other sites.
RequestId	long	A system-generated read-only attribute used by the application framework.
SiteUseType	string	The site use type associated with the address.
Status	string	The status of the record.

Trading Community Contact Point Additional Information

The contact point for a trading community member like phone or e-mail. For example 650-506-6000 is the phone number for Oracle Corporation, john.doe@example.com is the e-mail address for John Doe.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/}ContactPointInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Phone*
Contained by	*Web*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key

Name	Type	Description
ContactPointType	string	The type of the contact point.
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Organization Contact Additional Information

The additional information about the organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/orgContact/}OrganizationContactInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Customer Contact Profile*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrgContactId	long	The unique identifier of the organization contact. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Organization Details

The information about an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationParty

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*
Contains	*Address*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Classification Assignment*
Contains	*Usage Assignment*
Contains	*Relationship*
Contains	*Financial Profile*

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Email Domain*
Contains	*Telex*
Contains	*Additional Identifier*
Contains	*Account*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contains	*Financial Report*
Contains	*Certification*
Contains	*Electronic Data Interchange*
Contains	*Email*
Contains	*Preference*
Contains	*Additional Account Name*
Contains	*Electronic File Transfer*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*

Relationship Type	Object or Service
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalOrganizationName	*Additional Account Name*	The additional name associated with the organization.
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AnalysisFy	string	The fiscal year that the financial information is based on.
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.

Name	Type	Description
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information associated with the organization.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the organization.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating for the organization.
CurrentFiscalYearPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its current fiscal year.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
Edi	*Electronic Data Interchange*	The electronic data interchange information for the organization.
Eft	*Electronic File Transfer*	The electronic file transfer information for the organization.

Name	Type	Description
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.
EmployeesTotal	decimal	The total number of employees.
FinancialProfile	*Financial Profile*	The financial profile information of the organization.
FinancialReport	*Financial Report*	The financial report information of the organization.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
GroupType	string	The type of the group.
HQBranchIndicator	string	The status of this site, such as HQ, a branch, or a single location. A list of accepted values are defined in the lookup type HQ_BRANCH_IND.
HomeCountry	string	The home country associated with the party.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.

Name	Type	Description
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MissionStatement	string	The corporate charter of organization in user-defined text format.
NextFyPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its next fiscal year.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationProfile	*Account*	The information about the partner organization.
OrganizationSize	string	The size of the organization based on its revenue, number of employees, and so on.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.

Name	Type	Description
PartyPreference	*Preference*	The preference mentioned in the organization details.
PartySite	*Address*	The party site associated with the organization.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the organization.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPointId	long	The unique identifier of the primary e-mail.

Name	Type	Description
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPointId	long	The unique identifier of the primary phone contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPointId	long	The unique identifier of the primary URL contact point.
PrincipalName	string	The Name of the highest ranking person in the company.
Province	string	The name of the province.
Relationship	*Relationship*	The relationship information of the organization.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.

Name	Type	Description
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The telex information of the organization.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the Third Party field in the Customers window is mandatory.
TradingPartnerIdentifier	string	The FSIO related trading partner codes.
URL	string	The destination URL associated with a specific Google AdWords ad.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
Web	*Web*	The web information related to the record.
YearEstablished	int	The year when the organization began doing business.

Trading Community Organization Profile Additional Information

The additional profile information about an organization, such as the organization type.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/organization/}OrganizationInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Cloud Account*
Contained by	*Account*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrganizationProfileId	long	The unique identifier of the organization profile. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Person Details

The information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Person

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*
Contains	*Citizenship*

Relationship Type	Object or Service
Contains	*Contact Language*
Contains	*Instant Messaging*
Contains	*Employment History*
Contains	*Web*
Contains	*Classification Assignment*
Contains	*Usage Assignment*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Contact Interest*
Contains	*Contact*
Contains	*Additional Contact Name*
Contains	*Phone*
Contains	*Education*
Contains	*Email Domain*
Contains	*Additional Identifier*
Contains	*Contact Preference*
Contains	*Source System Reference*
Contains	*Certification*
Contains	*Contact Address*
Contains	*Email*
Contains	*Preference*

Relationship Type	Object or Service
Extended by	*Partner Members*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.
AdditionalPersonName	*Additional Contact Name*	The additional name of the person.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.

Name	Type	Description
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information for the person.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Citizenship	*Citizenship*	The citizenship information of a person.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the person.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
Education	*Education*	The education information of the person.
Email	*E-Mail*	The email address associated with the record.

Name	Type	Description
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.
EmploymentHistory	*Employment History*	The employment history information of a person.
FinancialProfile	*Financial Profile*	The financial profile information of a person.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
Gender	string	The gender of the person, such as male, female, and unknown. A list of accepted values is defined in the lookup HZ_GENDER.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person. A list of accepted values is defined in the lookup MARITAL_STATUS.
MissionStatement	string	The corporate charter of organization in user-defined text format.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	The preference mentioned in the person details.
PartySite	*Contact Address*	The party site associated with the person.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the person.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonInterest	*Contact Interest*	The interest information associated with a person.

Name	Type	Description
PersonLanguage	*Contact Language*	The language information associated with a person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.
PersonPreviousLastName	string	The previous last name of a person.
PersonProfile	*Contact*	The profile information of the person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.

Name	Type	Description
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPTId	long	The unique identifier of the primary e-mail.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPTId	long	The unique identifier of the primary phone contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPTId	long	The unique identifier of the primary URL contact point.
Province	string	The name of the province.
Relationship	*Relationship*	The relationship information of the person.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
Salutation	string	The size of the household this person is a part of.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.
Status	string	The status of the record.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the Third Party field in the Customers window is mandatory.
URL	string	The destination URL associated with a specific Google AdWords ad.
UserGUID	string	The "light weight" user Global Unique Id. Light Weight users defined in the Extended Security (XS) System.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
Web	*Web*	The web information related to the record.

Trading Community Person Profile Additional Information

The additional information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/}PersonInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Loyalty Member Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PersonProfileId	long	The unique identifier of the person profile. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Relationship Additional Information

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/relationship/}RelationshipInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key

Name	Type	Description
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Usage Assignment

The party usage assigned to a trading community member. For example, John Doe is a contact of ABC Corporation and XYZ Corporation is a supplier.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyUsageAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Party Usage Assignment Service*
Handled by	*Trading Community Party Information*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerTableId	long	The unique identifier for a record in the owner table.

Name	Type	Description
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
PartyUsageCode	string	The usage context of a party's contact point.
PartyUsgAssignmentId	long	The unique identifier of the party usage assignment. • Primary Key
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Web

The Web information associated with a trading community member. For example, Oracle's address on the Web is www.oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Web

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key

Name	Type	Description
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N stands for all others.

Name	Type	Description
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
URL	string	The destination URL associated with a specific Google AdWords ad.
WebInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community Web.
WebType	string	The prefix class to a Web address. Typically, this is either FTP or HTTP.

Work Class

The custom-defined classification of information about a person's job title and work experience.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}WorkClass

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Employment History*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmploymentHistoryId	long	The foreign key to the HZ_EMPLOYMENT_HISTORY table.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LevelOfExperience	string	The user-defined rating for the level of experience in the class of work. For example, journeyman, trainee, or exposure.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.
WorkClassId	long	The unique identifier for the class of work. • Primary Key
WorkClassName	string	The user-determined classification for work. For example, bricklayer, doctor, lawyer, programmer, or minister of health.

Sales Party Territory service

The service to create, update, get, or find sales party territories.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartyTerritoryService/}SalesPartyTerritoryService

Service WSDL URL: https://servername/crmService/SalesPartyTerritoryService?WSDL

Logical Business Objects

- CRM : Customer Center : Sales Party

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Additional Account Name*
Handles	*Account*
Handles	*Contact Interest*
Handles	*Citizenship*
Handles	*Usage Assignment*
Handles	*Financial Profile*
Handles	*Electronic File Transfer*
Handles	*Credit Rating*
Handles	*E-Mail Domain*
Handles	*Contact Language*
Handles	*Trading Community Original System Mapping Identifier Additional Information*
Handles	*Trading Community Person Details*
Handles	*Trading Community Person Profile Additional Information*
Handles	*Financial Number*
Handles	*Certification*
Handles	*Classification Assignment*
Handles	*Preference*
Handles	*Trading Community Organization Profile Additional Information*
Handles	*Trading Community Organization Details*
Handles	*Trading Community Contact Point Additional Information*
Handles	*Source System Reference*

Relationship Type	Object or Service
Handles	*Additional Household Name*
Handles	*Customer Contact Profile*
Handles	*Phone*
Handles	*Trading Community Address Purpose*
Handles	*Household*
Handles	*Additional Contact Name*
Handles	*Trading Community Organization Contact Additional Information*
Handles	*Additional Identifier*
Handles	*Web*
Handles	*Customer Contact Responsibility*
Handles	*Sales Party Territory*
Handles	*Relationship*
Handles	*Education*
Handles	*Trading Community Relationship Additional Information*
Handles	*E-Mail*
Handles	*Financial Report*
Handles	*Employment History*
Handles	*Instant Messaging*
Handles	*Work Class*
Handles	*Contact Address*
Handles	*Telex*

Relationship Type	Object or Service
Handles	*Address*
Handles	*Electronic Data Interchange*
Handles	*Contact*
Handles	*Trading Community Address Additional Information*
Handles	*Contact Preference*

Operations

- *getSalesPartyTerritory*
- *createSalesPartyTerritory*
- *updateSalesPartyTerritory*
- *deleteSalesPartyTerritory*
- *findSalesPartyTerritory*
- *findTerritoriesOfSalesParty*
- *findSalesPartyOfTerritory*
- *findSalesPartyTerritoriesHierarchy*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getSalesPartyTerritory

The get operation for sales party territory details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyTerritoryId	long	The identifier for sales party territory.

Response Payload

Element Name	Type	Description
result	*Sales Party Territory*	The operation that returns sales party territory details that matches the inbound key attributes.

createSalesPartyTerritory

The operation that creates sales party territory details for a party.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesPartyTerritory	*Sales Party Territory*	Sales Party Territory Details to be created

Response Payload

Element Name	Type	Description
result	*Sales Party Territory*	The result of the operation including the successfully created sales party territories and any warnings or informational messages.

updateSalesPartyTerritory

The operation to update sales party territory details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesPartyTerritory	*Sales Party Territory*	Sales Party Territory Details to be updated

Response Payload

Element Name	Type	Description
result	*Sales Party Territory*	The result of the operation includes the successfully updated sales party territory details or a list of warnings or informational messages, or both.

deleteSalesPartyTerritory

The operation that deletes sales party territory details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
salesPartyTerritory	*Sales Party Territory*	Sales Party Territory Details to be deleted

Response Payload

Element Name	Type	Description
result	void	A list of warnings or informational messages encountered when deleting the object.

findSalesPartyTerritory

The find operation for sales party territory details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Party Territory*	The result of the operation including the list of sales party territory details that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

findTerritoriesOfSalesParty

The find operation for sales party details filtered by party identifier. Get a list of territories this sales party belongs to. Get the complete territory data object. This is a composite service.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
BindPartyId	long	The find operation for party identifier.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Party Territory*	The result of the operation including the list of sales party territory details that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

findSalesPartyOfTerritory

The find operation for sales party details filtered by territory identifier. Get a list of territories this sales party belongs to. Get the complete territory data object. This is a composite service.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
BindTerritoryId	long	The find operation for territory identifier.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Party Territory*	The result of the operation including the list of sales party territory details that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

findSalesPartyTerritoriesHierarchy

The find operation for sales party details filtered by territory identifier. Get a list of territories this sales party belongs to. Get the complete territory data object. This is a composite service.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (or where clause), the fetch size, and so on.
BindTerritoryId	long	The find operation for territory identifier.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This operation is currently not in use.

Response Payload

Element Name	Type	Description
result	*Sales Party Territory*	The result of the operation including the list of sales party territory hierarchies that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The locale name is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create,

Element Name	Type	Description
		update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	ZCM_MANAGE_SALES_PARTY_TEAM_PRIV	Manage Sales Party Team	Allows managing the sales party team

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCM_MANAGE_SALES_PARTY_TEAM_PRIV	ORA_ZCM_SR_SALES_PARTY_MANAGEMENT	Service Sales Party Management	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request management capabilities.
ZCM_MANAGE_SALES_PARTY_TEAM_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCM_MANAGE_SALES_PARTY_TEAM_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ZCM_MANAGE_SALES_PARTY_TEAM_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			well as appointments, interactions, and customer contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Account

An organization account and its profile information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Organization Profile Additional Information*
Contained by	*Sales Account*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Alias	string	The organization alias name.
AnalysisFy	string	The fiscal year that the financial information is based on.
BankCode	string	Identifies the bank in several countries, typically for regulatory purposes.
BankOrBranchNumber	string	Stores bank number for banks and branch number for bank branches. Primarily stores ABA number for US bank branches.
BranchCode	string	Identifies the bank branch in several countries, typically for regulatory purposes.
BranchFlag	boolean	Indicates if this is a branch location. If the value is True, then this is a branch location.
BusinessReport	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	Dun and Bradstreet business information report.
BusinessScope	string	The physical class of business in which a business participates. For example, local, national, or international.

Name	Type	Description
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CeoTitle	string	The formal title of the chief executive officer.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Comments	string	The comments for the record.
CongDistCode	string	The U.S. Congressional district code for the account.
ContentSourceNumber	string	The content source number is not used.
ControlYr	decimal	The year when current ownership gained control of the organization.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CorporationClass	string	The taxation classification for corporation entities such as Chapter S in the US.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CurrentFiscalYearPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its current fiscal year.

Name	Type	Description
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DataCloudStatus	string	Specifies the enrichment status of the person.
DbRating	string	The Dun & Bradstreet credit rating.
Disadv8aInd	string	Indicates whether the organization is considered disadvantaged by the US government under Title 8A. If the value is Yes, the organization is considered disadvantaged under Title 8A. The default value is No.
DisplayedDUNSPartyIdentifier	long	Dun and Bradstreet does not maintain data for the branch offices of companies that are located beyond North America. Data is only maintained for the company headquarters. If the data pertains only to company headquarters, the headquarters PARTY_ID is stored. If the data pertains to a branch office, the branch PARTY_ID is stored.
DoNotConfuseWith	string	Indicates existence of similarly named businesses.
DomesticUltimateDUNSNumberC	string	DUNS Number for the Domestic Ultimate, which is the highest family member in the same country as the business entity. A subject can be its own Domestic Ultimate.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	The effective latest change is not used.
EffectiveSequence	int	The effective sequence is not used.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EmployeesAtPrimaryAddress	string	The number of employees at the referenced address.
EmployeesAtPrimaryAddressEstimation	string	Indicates the calculation of employees at the primary address as estimated.

Name	Type	Description
EmployeesAtPrimaryAddressMinimum	string	Indicates the calculation of employees at the primary address as minimum.
EmployeesAtPrimaryAddressText	string	The number of employees at the referenced address that cannot be mapped to a number.
EmployeesTotal	decimal	The total number of employees.
EnquiryDUNS	string	The identifier used to query the Dun and Bradstreet data. If a location is a branch, then in some countries the headquarters DUNS number is used to do the query. Otherwise it is the same as the DUNS number.
ExportInd	string	Indicates whether the organization is an exporter. If the value is Y, then the organization is an exporter. The default value is N.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
GlobalUltimateDUNSNumberC	string	DUNS Number for the Global Ultimate, which is the highest family member in the same country as the business entity as you proceed further on this branch of the tree. A case can be its own ultimate.
GrowthStrategyDescription	string	The description of the growth strategy.
HQBranchIndicator	string	The status of this site, such as HQ, a branch, or a single location. A list of accepted values are defined in the lookup type HQ_BRANCH_IND.
HomeCountry	string	The home country associated with the party.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.

Name	Type	Description
ImportInd	string	Indicates whether the organization is an importer. If the value is Y, then the organization is an importer. The default value is N.
IncorpYear	int	The year that the business was formally incorporated.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LaborSurplusInd	string	Indicates whether the organization operates in an area with a labor surplus. If the value is Y, then the organization operates in an area with a labor surplus. The default value is N.
LastEnrichmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was last enriched in DaaS.
LastSourceUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated by the source system.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdateSourceSystem	string	The source system that last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LegalStatus	string	The legal structure of the organization such as partnership, corporation, and so on.
LineOfBusiness	string	The type of business activities performed at this site.
LocalActivityCode	string	The local activity classification code.
LocalActivityCodeType	string	The local activity classification code type identifier.

Name	Type	Description
LocalBusIdenType	string	The most common business identifiers in a country such as Chamber of Commerce Number in Italy, Government Registration Number in Taiwan. A list of accepted values are defined in the lookup type LOCAL_BUS_IDEN_TYPE.
LocalBusIdentifier	string	The primary identifier assigned to a businesses by a government agency such as Chamber of Commerce, or other authority. It is often used by countries other than USA.
MinorityOwnedInd	string	Indicates whether the organization is primarily owned by ethnic or racial minorities. If the value is Y, then the organization is owned by ethnic or racial minorities. The default value is N.
MinorityOwnedType	string	The type of minority-owned firm.
MissionStatement	string	The corporate charter of organization in user-defined text format.
NextFyPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its next fiscal year.
OobInd	string	Indicates whether the organization is out of business. If the value is Y, then the organization is out of business. The default value is N.
OrgInformation	*Trading Community Organization Profile Additional Information*	The information of the organization.
OrganizationName	string	The name of the party when the party type is Organization.
OrganizationProfileId	long	The unique identifier of the organization profile. • Primary Key
OrganizationSize	string	Size of an organization based on revenue, number of employees, and so on.
OrganizationType	string	Not used in Fusion V1.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
ParentDUNSNumberC	string	Parent is a corporation that owns more than 50 percent capital stock of another corporation. The parent company can also be a subsidiary of another corporation. If the parent also has branches, then it is headquarters and also parent company. Headquarters is a business establishment that has branches or divisions reporting to it, and is financially responsible for those branches or divisions. If the headquarters has more than 50 percent of capital stock owned by another corporation, then it is also a subsidiary. If it owns more than 50 percent of capital stock of another corporation, then it is also a parent.
ParentSubInd	string	Indicates whether the organization is a parent or subsidiary.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PreferredContactEmailAddress	string	The e-mail address of the primary contact person of the organization.
PreferredContactFormattedPhoneNumber	string	The formatted phone number of the primary contact person of the organization.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactName	string	The name of the primary contact person of the organization.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.

Name	Type	Description
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the identifying address.
PrimaryAddressCountry	string	The country listed in the TERRITORY_CODE column of the FND_TERRITORY table for the identifying address.
PrimaryAddressCounty	string	The county of the Identifying address.
PrimaryAddressLine1	string	The first line of the identifying address.
PrimaryAddressLine2	string	The second line of the Identifying address.
PrimaryAddressLine3	string	The third line of the Identifying address.
PrimaryAddressLine4	string	The fourth line of the Identifying address.
PrimaryAddressPostalCode	string	The postal code of the identifying address.
PrimaryAddressProvince	string	The province of the identifying address.
PrimaryAddressState	string	The state of the Identifying address.
PrimaryEmailAddress	string	The e-mail address of the organization.
PrimaryEmailId	long	The primary e-mail contact point ID of the organization.
PrimaryFormattedPhoneNumber	string	The primary telephone number formatted in the local format of the organization.
PrimaryLanguage	string	The standard name for a language.
PrimaryPhoneAreaCode	string	The area code within a country code.

Name	Type	Description
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The primary contact point phone ID of the organization.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	The primary uniform resource locator.
PrimaryWebId	long	The unique identifier of the primary uniform resource locator.
PrincipalName	string	The Name of the highest ranking person in the company.
PrincipalTitle	string	The title of the highest ranking person in the organization.
Pronunciation	string	The pronunciation of the organization.
PublicPrivateOwnershipFlag	boolean	Indicator to specify if the organization is privately owned. Y stands for a privately owned organization and N stands for a publicly owned organization.
RegistrationType	string	Indicates the registration type of the organization.
RentOwnInd	string	Indicates if this account owns or rents the place of business. A list of valid values for rent, own, and lease are defined in the lookup OWN_RENT_IND.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
SICCode	string	The standard industry classification (SIC) code.
SICCodeType	string	The version of the standard industry classification (SIC) code.
SeblUserKeyLoc	string	The location of the account, optional part of the user primary key.
SmallBusInd	string	Indicates whether the organization is considered as a small business. If the value is Y, then the organization is considered as a small business. The default value is N.
Status	string	The status of the record.
StockSymbol	string	The corporate stock symbol such as ORCL.
SuffixOverriddenFlag	boolean	Indicator to specify that the attribute has Y if the suffix is overridden by user and N otherwise. Default value is N.
ThirdPartyFlag	boolean	Indicator that tracks if a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. Y stands for a third party relationship, N stands for a direct relationship. If Oracle Service is installed, the third party field in the Customers window is required.
TotalEmployeesEstimatedIndicator	string	Indicates if the employee total is estimated. The accepted values are defined in the lookup type TOTAL_EMP_EST_IND.
TotalEmployeesInd	string	Indicates if subsidiaries are included in the calculation of total employees. The accepted values are defined in the lookup type TOTAL_EMPLOYEES_INDICATOR.
TotalEmployeesMinimumIndicator	string	Indicates if the number is a minimum, maximum, or average number of total employees. The accepted values are defined in the lookup type TOTAL_EMP_MIN_IND.
TotalEmployeesText	string	The total number of employees in text format.
TotalPaymentAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total number of payment experiences.

Name	Type	Description
TradingPartnerIdentifier	string	One column to store the FSIO related trading partner codes. It stores alpha numeric values and also addresses the Fed vs. Non-Fed attribute requirement.
UniqueNameAlias	string	The name as identified by the users to internally recognize the organization.
UniqueNameSuffix	string	Identifies system generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
WomanOwnedInd	string	Indicates whether the organization is primarily owned by women. If the value is Y, then the organization is primarily owned by women. The default value is N.
YearEstablished	int	The year when the organization began doing business.

Additional Account Name

An additional name of an organization, such as a legal name or a DBA name.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}AdditionalOrganizationName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Indicator to specify the preferred additional name for the organization.
PartyId	long	The unique identifier of the contact party.

Name	Type	Description
PartyName	string	The name of the party.
PartyNameId	long	The unique identifier of the party name. It is primary Key and system generated. • Primary Key
PartyNameType	string	The type of the name. It is a value defined by the additional party name and identifier type entity. The party type must be consistent with the party type that the PARTY_NAME_TYPE can be applied to.
PreferredFlag	boolean	Indicator to specify the name as preferred name for this party within the name type. Possible values are Y and N. Default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TransliterationLang	string	Used to identify the language for the name. It is validated against FND_LANGUAGES.LANGUAGE_CODE. Default value is the Session Language.

Additional Contact Name

An additional name of a person, such as the maiden name or alias.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}AdditionalPersonName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
OverallPreferredFlag	boolean	Indicator to specify the preferred additional name of a person.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameId	long	The unique identifier of the party name ID. It is primary key and system generated. • Primary Key
PartyNameType	string	The type of the name. It is a value defined by the additional party name and identifier type entity. The party type must be consistent with the party type that the PARTY_NAME_TYPE can be applied to.
PersonAcademicTitle	string	Used to specify the academic title for a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field degree in HL7.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	Used to specify the last name prefix such as fon, van, and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_ PREFIX in HZ_PERSON_PROFILES is used. It corresponds to the field Last Name Prefix in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	Used to specify the name suffix such as junior, senior, the third, and so on for a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Suffix in HL7.

Name	Type	Description
PersonPreNameAdjunct	string	Used to specify the name prefix such as Mr., Ms, Dr, and so on for a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Prefix in HL7. It is validated against lookup CONTACT_TITLE.
PersonPreviousLastName	string	Used to specify the previous last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It has no mapping in HL7.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PreferredFlag	boolean	Indicator to specify the name as preferred name for the party within the name type. Possible values are Y and N. Default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TransliterationLang	string	Used to specify the language used for the name. It is validated against FND_LANGUAGES.LANGUAGE_CODE. Default value is the Session Language.

Additional Household Name

An additional name associated with a group. For example, the phonetic name of a group.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}AdditionalGroupName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Household*
Handled by	*Trading Community Group*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.

Name	Type	Description
OrigSystemReference	string	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Identify the name as preferred name for this party within this name type. Possible values are 'Y' and 'N'. Default is 'N'.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameId	long	Unique Identifier of Party Name. • Primary Key
PartyNameType	string	The type of party name.
PreferredFlag	boolean	The flag which Identifies the name as preferred name for this party within this name type. Possible values are 'Y' and 'N'. Default is 'N'.
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TransliterationLang	string	Used to capture the language used for the name.

Additional Identifier

An additional identifier of a trading community member, such as driver's license number or passport number.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}AdditionalPartyId

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.

Name	Type	Description
ExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expiration date for the identifier. It may be NULL, and does not apply to all types of identifiers.
IssueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date in which the Identifier was issued. It may be NULL and does not apply to all types of identifiers.
IssuingAuthorityName	string	The issuing authority name.
IssuingAuthorityPartyId	long	The unique identifier of the issuing authority.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyIdentifierId	long	The unique identifier of the party identifier. • Primary Key
PartyIdentifierType	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.
PartyIdentifierType1	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.
PartyIdentifierValue	string	The value of the party identifier.
PartyName	string	The name of the party.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
StateProvince	string	The province of the address.
StatusCode	string	The pre-defined code used to indicate the status.

Address

An address of a trading community member, such as Oracle Corporation is located at 500 Oracle Parkway, Redwood Shores, CA.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Telex*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contains	*Trading Community Address Additional Information*
Contains	*Email*
Contains	*Electronic File Transfer*

Relationship Type	Object or Service
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.

Name	Type	Description
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AddressExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the location is no longer valid.
AddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines that are used in Japan.
AddressStyle	string	Style of the address.
Addressee	string	The information of the addressee.
City	string	The name of the city.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
ContactPreferenceExistFlag	boolean	Indicator to specify if the contact is primary contact for the party.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	The name of the country.
Country1	string	The attribute country1 is not used.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
DoNotValidateFlag	boolean	Indicator to specify that a particular location is not eligible for address validation irrespective of the current validation.
Eft	*Electronic File Transfer*	The electronic file transfer information for the party.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedAddress	string	The formatted read-only address.
FormattedLocaleAddress	string	The formatted read-only local address.
FormattedMultilineAddress	string	The formatted multi line address of the party site.
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
HouseType	string	Indicates the building type.
IdentifyingAddressFlag	boolean	Indicator to specify the identifying address for the party. Y stands for the indentifying site and N stands for sites that are not the indentifying site.

Name	Type	Description
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
Language	string	The operating language for the party site.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	The latitude of the party address.
LocationDirections	string	Directions to the location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
LocationLanguage	string	The operating language for the locations.
Longitude	decimal	The longitude of the party address.
Mailstop	string	A user-defined code to indicate a mail drop point within the organization.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary address of the contact irrespective of the context. Y stands for primary address and N stands for all others.
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	Stores the doing-business_as (DBA) party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameDivision	string	Stores the division party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameLegal	string	Stores the legal party name for a party site. This column is used to store FSIO related legal party name attribute.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteInformation	*Trading Community Address Additional Information*	The party address information.
PartySiteName	string	The user-defined name for the site.
PartySiteNumber	string	The party site number of the address.
PartySiteType	string	Stores the party site type and is based on the lookup. Currently this is either null or one-time.
PartySiteUse	*Trading Community Address Purpose*	The information of the party address usage.
PartyUsageCode	string	The usage context of a party's contact point.
Phone	*Phone*	The phone information for the entity.
Position	string	The primary direction such as north or east that is used to access the location.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four digit extension to the United States postal ZIP code.

Name	Type	Description
Province	string	The name of the province.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The Telex information associated with the party.
UsageCode	string	The usage code is not used.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	The standardized status code describing the results of the validation.
Web	*Web*	The web information related to the record.

Certification

The certification information of a trading community member, such as a full ISO 9001 registered firm.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}Certification

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CertificationId	long	The unique identifier for certification. • Primary Key
CertificationName	string	The name of the certification such as ISO9000 and GMP001.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrentStatus	string	The name for the status of the certification. For example, applied for, granted, or expired.

Name	Type	Description
ExpiresOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification expires.
Grade	string	The level or grade of certification provided by the ISSUED_BY_AUTHORITY. For example, founding member, gold, fully certified, and partially certified.
IssuedByAuthority	string	The name of the certifying authority.
IssuedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification was issued.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Citizenship

The citizenship information about a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Citizenship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*

Relationship Type	Object or Service
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BirthOrSelected	string	Indicates if the citizenship was granted by being born in the country or by naturalization.
CitizenshipId	long	The unique citizenship identifier of a person. • Primary Key
CountryCode	string	The ISO code of the country from which a person claims citizenship.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateDisowned	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when an individual renounced citizenship. This is usually a self-declared date that might not match a legal effective date.
DateRecognized	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the country granted citizenship to the individual. For a native-born person, this date is typically the person's date of birth.
DocumentReference	string	The unique reference number such as passport number or naturalization reference number associated with DOCUMENT_TYPE.

Name	Type	Description
DocumentType	string	The class of document that confirms citizenship. For example, a passport, or naturalization papers.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Classification Assignment

The classification code assigned to a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CodeAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Sales Competitor*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Reference*
Handled by	*Sales Reference Customer*
Handled by	*Company and User Registration*
Handled by	*Sales Party*
Handled by	*Sales Competitor Service*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party Territory service*
Handled by	*Sales Party Resource Service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassCategory	string	The name of the classification category.
ClassCode	string	The code of the classification.

Name	Type	Description
CodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an object. It is primary key and system generated. • Primary Key
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableKey1	string	The first column of the alphanumeric or multi-part foreign key.
OwnerTableKey2	string	The second column of the alphanumeric or multi-part foreign key.
OwnerTableKey3	string	The third column of the alphanumeric or multi-part foreign key.
OwnerTableKey4	string	The fourth column of the alphanumeric or multi-part foreign key.

Name	Type	Description
OwnerTableKey5	string	The fifth column of the alphanumeric or multi-part foreign key.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PrimaryFlag	boolean	Indicator that specifies if this is the primary class code of a class category for the organization. Y stands for the primary class code and N stands for all others.
Rank	decimal	Ranks classes if multiple classes are assigned to a party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Contact

The profile information of the trading community person. The profile includes information such as marital status and additional name.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Person Profile Additional Information*
Contained by	*Trading Community Person Details*
Contained by	*Sales Account*

Relationship Type	Object or Service
Contained by	*Loyalty Member*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Loyalty Member Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Alias	string	Person alias name.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DataCloudStatus	string	The enrichment status of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
DateOfDeath	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person died.
DeceasedFlag	boolean	Y or N indicates whether the person is deceased or not.
DeclaredEthnicity	string	The declared ethnicity of the person.
Department	string	The free form text used to name the department.
DepartmentCode	string	The list of values for possible department codes.
Distance	decimal	The distance from the input location.
DoNotCallFlag	boolean	Indicator to specify if the user can send mail to the person or not.
DoNotContactFlag	boolean	Indicator to specify if the user can contact the person through phone, e-mail, or mail or not.
DoNotEmailFlag	boolean	Indicator to specify if the user can send e-mail to the person or not.
DoNotMailFlag	boolean	Indicator to specify if the user can send mail to the person or not.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	The date effective entity. Y indicates that this row represents the latest change in the day.

Name	Type	Description
EffectiveSequence	int	The date effective entity. Indicates the order of different changes made during a day. The lowest value represents the earliest change in the day.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
FavoriteContactFlag	boolean	Indicator to specify if the person is key contact.
Gender	string	The gender details such as male, female, or unknown of the person.
HeadOfHouseholdFlag	boolean	The head of household indicator is not used.
HouseholdIncomeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The household income amount is not used.
HouseholdSize	decimal	The household size is not used.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
JobTitle	string	The free form text for the job title.
JobTitleCode	string	The code given to the job title.
LastContactDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the contact was last contacted.
LastEnrichmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was last enriched in DaaS.
LastKnownGPS	string	The geophysical location that is, GPS point last reported for the person.
LastSourceUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated by the source application.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdateSourceSystem	string	The source application that last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person.
MaritalStatusEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marital status of the person changed.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PersonAcademicTitle	string	The academic title that is part of the name of a person such as Dr. Jane Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonInformation	*Trading Community Person Profile Additional Information*	The information of the person.
PersonInitials	string	The Initials of the name.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.

Name	Type	Description
PersonLastNamePrefix	string	Used to identify the Last name prefix such as fon, van and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_PREFIX in HZ_PERSON_PROFILES is used. Corresponds to the field, Last Name Prefix in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonName	string	The combination of title, first, middle, last, and suffix names.
PersonNameSuffix	string	Indicates the place in a family structure. For example, III in Tom Jones III.
PersonPreNameAdjunct	string	Salutary introduction such as Mr., Herr, and so on.
PersonPreviousLastName	string	The previous last or surname of the person.
PersonProfileId	long	The unique identifier of the person profile. • Primary Key
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PersonalIncomeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated gross annual income of the person.
PlaceOfBirth	string	The place where the person was born, including city and country.
PreferredContactEmail	string	The preferred contact e-mail of the person.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactName	string	The preferred contact name of the person.

Name	Type	Description
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredContactPhone	string	The preferred contact phone of the person.
PreferredContactURL	string	The preferred contact uniform resource locator of the person.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the identifying address.
PrimaryAddressCountry	string	The country listed in the TERRITORY_CODE column of the FND_TERRITORY table for the identifying address.
PrimaryAddressCounty	string	The county of the identifying address.
PrimaryAddressLatitude	decimal	The primary address latitude information for the location for spatial proximity and containment purposes.
PrimaryAddressLine1	string	The first line of the identifying address.
PrimaryAddressLine2	string	The second line of the identifying address.
PrimaryAddressLine3	string	The third line of the identifying address.
PrimaryAddressLine4	string	The fourth line of the identifying address.
PrimaryAddressLocationId	long	The primary address location ID.

Name	Type	Description
PrimaryAddressLongitude	decimal	The primary address longitude information for the location for spatial proximity and containment purposes.
PrimaryAddressPostalCode	string	The postal code of the identifying address.
PrimaryAddressProvince	string	The province of the identifying address.
PrimaryAddressState	string	The state of the identifying address.
PrimaryCustomerId	long	The customer party identifier of a primary customer for a given person. There should be a valid relationship between the person and the customer.
PrimaryCustomerName	string	The customer party name of a primary customer for a given person. There should be a valid relationship between the person and the customer.
PrimaryCustomerRelationshipId	long	The unique identifier of the primary customer relationship.
PrimaryEmailAddress	string	The e-mail address of the person.
PrimaryEmailId	long	The primary contact point e-mail ID of the person.
PrimaryFormattedAddress	string	The primary formatted address of the person.
PrimaryFormattedPhoneNumber	string	The primary telephone number formatted in the local format of the person.
PrimaryLanguage	string	The standard name for a language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The primary contact point phone ID of the person.

Name	Type	Description
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	The uniform resource locator.
PrimaryWebId	long	The unique identifier of the primary uniform resource locator.
Pronunciation	string	The person pronunciation.
RentOwnInd	string	Indicates if the person rents or owns his or her residence. Lookup values include rent, own, lease, and so on.
RequestId	long	A system-generated read-only attribute used by the application framework.
SalesAffinityCode	string	The affinity of a person towards the deploying organization.
SalesBuyingRoleCode	string	The role of a person in the buying process.
Salutation	string	The phrase used to address a party in any correspondence.
Status	string	The status of the record.
SuffixOverriddenFlag	boolean	This attribute has Y if the suffix is overridden by user and N if not. Default value is N.
UniqueNameSuffix	string	Identifies system generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.

Contact Address

The address of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PersonPartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Contact Preference*
Contains	*Source System Reference*
Contains	*Trading Community Address Additional Information*
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Addressee	string	The information of the addressee in the contact address.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
IdentifyingAddressFlag	boolean	Indicates whether this is the identifying address for the party. If the value is Y, then this is the identifying address for the party.
Language	string	The language used in the contact's location.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
Mailstop	string	A user-defined code to indicate a mail drop point within their organization.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary address of the associated object. If the value is True, then this is the primary address. The default value is False.
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	The doing-business_as (DBA) party name for a party site.
PartyNameDivision	string	The division of the party name for a party site.
PartyNameLegal	string	The legal party name for a party site.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteName	string	The address associated with the party site.
PartySiteNumber	string	The alternate identifier of the party site.
PartySiteType	string	The type of the party site.
PartySiteUse	*Trading Community Address Purpose*	Indicates the use of the party site.
PartyUsageCode	string	The usage context of a party's contact point.
PersonPartySiteInformation	*Trading Community Address Additional Information*	The party site information of the person.
Phone	*Phone*	The phone information for the entity.
RelationshipId	long	The relationship identifier for the record.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Contact Interest

The interests of the trading community member, such as baseball, sports car, or painting.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonInterest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
InterestName	string	A text field that lets you assign a descriptive name to an interest. For example, pets, dogs, baseball, or sports car racing.
InterestTypeCode	string	A code to classify interests for evaluation.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LevelOfInterest	string	The user-defined level number or name to rate the amount of interest in the activity. For example, high, medium, or low.
LevelOfParticipation	string	The user-defined level number or name to indicate if the person participates and to what extent.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PersonInterestId	long	The unique identifier of interests of the person. • Primary Key
RequestId	long	A system-generated read-only attribute used by the application framework.
Since	{http://xmlns.oracle.com/adf/svc/types/}date-Date	An approximate date from which the person was involved with the activity.

Name	Type	Description
SportIndicator	string	Indicates if the activity is a sport. Y stands for sports and N stands for non-sport activities.
Status	string	The status of the record.
SubInterestTypeCode	string	A code to classify subinterests of the interest type code.
Team	string	Any team the person likes to watch or play for.

Contact Language

The languages known information of a trading community member. For example, Mary Smith can speak both Spanish and English but can only read and write English.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PersonLanguage

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Handled by	*Trading Community Group*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LanguageName	string	The standard name for a language. For example, Spanish, Mandarin, or American English. Foreign key to the FND_LANGUAGES table.
LanguageUseReferenceId	long	The unique identifier of the language use reference. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
NativeLanguageFlag	boolean	Indicator to specify if the language is the declared native language of a person. Y stands for a declared native language and N stands for all other languages.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PrimaryLanguageIndicator	string	Indicates if this is the primary language used by a person in day-to-day transactions. Y stands

Name	Type	Description
		for the primary language and N stands for other languages.
ReadsLevel	string	The user-defined level number or name to indicate the ability to read a language.
RequestId	long	A system-generated read-only attribute used by the application framework.
SpeaksLevel	string	The user-defined level number or name to indicate the ability to speak a language.
SpokenComprehensionLevel	string	The code to indicate comprehension of a spoken language.
Status	string	The status of the record.
WritesLevel	string	The user-defined level number or name to indicate the ability to write in a language.

Contact Preference

The contact preference of the trading community member. For example, do not call Joe Smith between 10 a.m. and 12 noon on weekdays.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}ContactPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Electronic Data Interchange*
Contained by	*E-Mail*
Contained by	*Instant Messaging*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Phone*
Contained by	*Telex*
Contained by	*Web*
Contained by	*Contact Address*
Contained by	*Electronic File Transfer*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactLevelTable	string	The table that stores the contact level of the contact preference, and uses the SUBJECT_TABLE lookup. The list of accepted values are HZ_PARTIES, HZ_PARTIES_SITES, or HZ_CONTACT_POINTS.
ContactLevelTableId	long	The foreign key to the table specified in CONTACT_LEVEL_TABLE column. The list of accepted values are PARTY_ID from HZ_PARTIES table, CONTACT_POINT_ID from HZ_CONTACT_POINTS table, or PARTY_SITE_ID from HZ_PARTY_SITES table.
ContactPreferenceId	long	The unique identifier for the contact preference. • Primary Key
ContactType	string	The contact party type that defines whether the contact is a sales account, a prospect, a contact, or any other user-defined party type. The default value is CUSTOMER. A list of accepted values is defined in the lookup CONTACT_TYPE.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaximumNoOfInteractUOMCode	string	The period of time during which the maximum number of interactions applies. Uses the MAX_NO_OF_INTERACT_UOM_CODE lookup.
MaximumNoOfInteractions	decimal	The number of times you can use this contact point. The period of time that this

Name	Type	Description
		number applies is stored in the MAX_NO_OF_INTERACT_UOM_CODE column.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PreferenceCode	string	Indicates whether to use a particular contact method. The list of accepted values are defined in the PREFERENCE_CODE lookup.
PreferenceEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes inactive.
PreferenceEndTimeHR	int	The hour part of time when the contact preference becomes inactive. The time is recorded in the 24 hour format.
PreferenceEndTimeMi	int	The minutes part of the time when the contact preference becomes inactive.
PreferenceStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes active.
PreferenceStartTimeHR	int	The hour part of time when the contact preference becomes active. The time is recorded in the 24 hour format.
PreferenceStartTimeMi	int	The minutes part of the time when the contact preference becomes active.
PreferenceTopicType	string	The appropriate subjects to send the party that the preference is created for. The list of accepted values are defined in the PREFERENCE_TOPIC_TYPE lookup.
PreferenceTopicTypeCode	string	The code of the preference topic type.
PreferenceTopicTypeId	long	The unique identifier of the preference topic type.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
RequestedBy	string	Indicates if the permission or restriction was created internally or requested by the party. The list of accepted values are defined in the REQUESTED_BY lookup.
Status	string	The status of the record.

Credit Rating

The trading community member's credit rating information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CreditRating

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AverageHighCredit	decimal	The average of all the high credit experiences.
BankruptcyInd	string	Indicates if open bankruptcy exists. Y stands for any open bankruptcy that exists and N stands for no open bankruptcy.
BusinessDiscontinued	string	The business discontinued at the listed location. Prompts reader to contact D and B customer service center if any business is operating.
ClaimsInd	string	Indicates if open claims, legal claims, liens, protested bills, or any equivalent information exists. Y stands for availability of information and N stands for no information.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRatingId	long	The unique identifier of the credit rating. • Primary Key
CreditRiskScoreExplain	string	Explains numeric credit risk score that estimates the risk of delinquent payment over the next 12 months.
CreditScore	string	Indicates the risk of delinquent payments.
CreditScoreAge	decimal	Indicates the age of the credit score expressed in months.

Name	Type	Description
CreditScoreClass	decimal	The date when the credit score was calculated.
CreditScoreCommentary	string	The lookup for explanation codes in the CREDIT_SCORE column.
CreditScoreCommentary10	string	Indicates comments about the credit score.
CreditScoreCommentary2	string	Indicates comments about the credit score.
CreditScoreCommentary3	string	Indicates comments about the credit score.
CreditScoreCommentary4	string	Indicates comments about the credit score.
CreditScoreCommentary5	string	Indicates comments about the credit score.
CreditScoreCommentary6	string	Indicates comments about the credit score.
CreditScoreCommentary7	string	Indicates comments about the credit score.
CreditScoreCommentary8	string	Indicates comments about the credit score.
CreditScoreCommentary9	string	Indicates comments about the credit score.
CreditScoreDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the credit score was calculated.
CreditScoreIncdDefault	decimal	Indicates the probability expressed as a percentage of delinquency for a score range or class.
CreditScoreNatlPercentile	decimal	Indicates the relative credit rating of a business compared to all businesses whose credit ratings are included in the local country database.
CreditScoreOverrideCode	string	Indicates why no score was calculated or why score is equal to zero in the US.
CriminalProceedingInd	string	Indicates if criminal proceedings exist. Y stands for availability of information and N stands for no information.
DebarmentInd	string	Indicates whether the company is debarred from doing business with government agencies. Y stands for company debarred and N stands for not debarred.

Name	Type	Description
DebarmentsCount	decimal	The count of filings by government agencies in the United States that prohibit the party from entering into contracts or transactions with those agencies.
DebarmentsDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date of the most recent filing to prohibit the party from entering into contracts or transactions with a government agency in the United States.
DelqPmtPctgForAllFirms	decimal	Specifies a delinquency percentage for all firms.
DelqPmtRngPrcnt	decimal	Specifies a delinquency percentage for credit score range.
Description	string	The free text description of the record.
DetHistoryInd	string	The code that indicates if detrimental information exists for the party and whether complete details exist on management and party. Y stands for availability of information and N stands for no information.
DisasterInd	string	Indicates if information exists about disasters such as fires, hurricanes, and so on. Y stands for availability of information and N stands for no information.
FailureScore	string	For US, the failure risk class, 1 through 5. For Canada , the stability score that indicates risk of business closure, 1 through 10. For Australia, the percentile failure score.
FailureScoreAge	decimal	The failure score age in months.
FailureScoreClass	decimal	1 through 5 to indicate risk of financial stress for a customer account. 1 for a business with greatest risk and 5 for a business with least risk.
FailureScoreCommentary	string	The comments related to failure score.
FailureScoreCommentary10	string	The comments related to failure score.
FailureScoreCommentary2	string	The comments related to failure score.
FailureScoreCommentary3	string	The comments related to failure score.
FailureScoreCommentary4	string	The comments related to failure score.

Name	Type	Description
FailureScoreCommentary5	string	The comments related to failure score.
FailureScoreCommentary6	string	The comments related to failure score.
FailureScoreCommentary7	string	The comments related to failure score.
FailureScoreCommentary8	string	The comments related to failure score.
FailureScoreCommentary9	string	The comments related to failure score.
FailureScoreDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the failure score was calculated.
FailureScoreIncdDefault	decimal	Probability, in percentage, of failure for score range of class.
FailureScoreNatnlPercentile	decimal	The national percentile that reflects the relative ranking of a company among all scored companies in the local country database.
FailureScoreOverrideCode	string	In Europe, code for the reason for variance between the D and B rating and the failure score. In the US, code for the reason why no score was calculated, or why the score is zero.
FinclEmbtInd	string	Indicates if open bankruptcy, receivership liquidation, or any equivalent information exists. Y stands for availability of information and N stands for no information.
FinclLglEventInd	string	Indicates if special events such as financial embarrassment and legal filings exist. Y stands for availability of information and N stands for no information.
GlobalFailureScore	string	The global score for the risk of business default.
HighCredit	decimal	Maximum credit ever extended to the organization.
HighRngDelqScr	decimal	Specifies the high end of the range of the commercial credit score.
JudgementInd	string	Indicates if open judgments exist. Y stands for any open judgment that exists and N stands for no open judgments.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LienInd	string	Indicates if open liens exist. Y stands for any open lien that exists and N stands for no open liens.
LowRngDelqScr	decimal	Specifies the low end of the range of the commercial credit score.
MaximumCreditCurrencyCode	string	The currency used to denominate the MAXIMUM_CREDIT_RECOMMENDATION column.
MaximumCreditRecommendationAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Maximum credit limit recommended for the currency specified in the MAXIMUM_CREDIT_CURRENCY_CODE column.
NegvPmtExpl	string	The conditional comment generated when negative payments are present.
NoTradeInd	string	Indicates that no trade experiences exist. Y stands for any trade experience that exists and N stands for no trade experience.
NumberParentBankruptcyConversions	decimal	The number of bankruptcy conversions by the parent.
NumberParentBankruptcyFiling	decimal	The number of bankruptcies filed by the parent.
NumberSpecialEvent	decimal	The number of occurrences of the special events.
NumberTradeExperiences	decimal	The number of trade experiences.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OprgSpecificationEvntInd	string	Indicates if information exists about operational changes such as name changes, management

Name	Type	Description
		changes, change of control, moves, and so on. Y stands for availability of information and N stands for no information.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OtherSpecificationEvntInd	string	Indicates if special events exist that are not otherwise specified.
ParentHQBankruptcyInd	string	Indicates if parent (P) or headquarters (H) are entered into bankruptcy.
PartyId	long	The unique identifier of the contact party.
PaydexComment	string	Additional paydex information.
PaydexFirmComment	string	Comment on the paydex score for the organization.
PaydexFirmDays	string	The number of days used in the paydex score.
PaydexIndustryComment	string	Comment on the paydex score for the industry.
PaydexIndustryDays	string	The number of days used in the paydex score for the industry.
PaydexNorm	string	Median or average Paydex score for the industry.
PaydexScore	string	Paydex score for the previous 12 months payment history.
PaydexThreeMonthsAgo	string	Paydex score three months ago.
PrntBkcyChapterConv	string	The change of bankruptcy type.
PrntBkcyConvDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the bankruptcy converted from one type to another.
PrntBkcyFilgChapter	decimal	The chapter number of the bankruptcy filed by the parent under the US uniform commercial code.
PrntBkcyFilgDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The bankruptcy filing date of the parent.

Name	Type	Description
PrntBkcyFilgType	string	The type of bankruptcy filed by the parent.
PubRecExpl	string	The conditional comment generated if suits, liens, and judgments exist.
RatedAsOfDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the rating was acquired.
Rating	string	The rating number or code of the rating company.
RatingOrganization	string	The name of the credit rating organization.
RequestId	long	A system-generated read-only attribute used by the application framework.
SecuredFlngInd	string	Indicates if open secured filings such as UCC filings, secured charges or mortgages pledging, or any equivalent information exists. Y stands for availability of information and N stands for no information.
SlowTradeExpl	string	The conditional comment generated when paydex score indicates that slow trade experiences are present.
SpecialEventComment	string	The comment generated if special event section exists.
SpecialEventText	string	The narrative of the special event.
SpecialEventUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the special event was updated.
Status	string	The status of the record.
SuitInd	string	Indicates if open suits exist. Y stands for any open suit that exists and N stands for no open suits.

Customer Contact Profile

The person who functions as a contact for an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Organization Contact Additional Information*
Contains	*Customer Contact Responsibility*
Contains	*Source System Reference*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
ContactFormattedAddress	string	The formatted version of the contact address.

Name	Type	Description
ContactFormattedMultilineAddress	string	The formatted multiline version of the contact address.
ContactName	string	The name of the contact.
ContactNumber	string	The user-defined identification number for this contact.
ContactPartyId	long	The unique identifier of the contact.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerEmailAddress	string	The e-mail address of the customer this contact person belongs to.
CustomerName	string	The name of the customer.
CustomerPartyId	long	The unique identifier of the customer this contact person belongs to.
CustomerPartyNumber	string	The alternate unique identifier of the customer this contact person belongs to.
CustomerUniqueName	string	The unique name of the customer. For an Organization, the value is a concatenation of unique_name_alias and suffix. For a Person, the value is a concatenation of person_name and suffix.

Name	Type	Description
DecisionMakerFlag	boolean	Indicates if this contact is a decision maker. If the value is True, then the contact is a decision maker.
Department	string	The free form text used to name the department for the contact.
DepartmentCode	string	The department code for the contact. A list of accepted values is defined in the lookup DEPARTMENT_TYPE.
EmailAddress	string	The email address associated with the record.
FormattedAddress	string	The formatted address information.
FormattedPhoneNumber	string	The formatted phone number.
JobTitle	string	The free form text for job title.
JobTitleCode	string	The code given to the job title.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The unique identifier of the organization contact. • Primary Key
OrgContactInformation	*Trading Community Organization Contact Additional Information*	The information of the organization contact.
OrganizationContactRole	*Customer Contact Responsibility*	The role of the contact in the organization.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyRelationshipId	long	The unique identifier of the relationship of the party.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteName	string	The address associated with the party site.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonCertReasonCode	string	The reason for the organization's current certification level assignment. A list of accepted values is defined using the lookup HZ_PARTY_CERT_REASON.
PersonCertificationLevel	string	The certification level of a organization. A list of accepted values is defined in the lookup HZ_PARTY_CERT_LEVEL.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLanguageName	string	The language name associated with the person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".

Name	Type	Description
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.
PersonPreviousLastName	string	The previous last name of a person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.
Rank	string	The rank associated with this customer contact.
ReferenceUseFlag	boolean	Indicates if this contact can be used as a reference. If the value is Y, then the contact can be used as a reference.
RequestId	long	A system-generated read-only attribute used by the application framework.
SalesAffinityCode	string	The affinity of a contact to the deploying organization. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_AFFINITY_CODE.
SalesAffinityComments	string	The comments about the contact's affinity to the deploying organization.
SalesBuyingRoleCode	string	The roles played by a contact in the buying process, for example, decision maker or supporting role. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_BUY_ROLE_CODE.

Name	Type	Description
SalesInfluenceLevelCode	string	The influence of the contact has on the deploying organization. A list of accepted values are defined in the lookup HZ_SLS_CNTCT_INFLUENCE_LVL_CD.
Salutation	string	The size of the household this person is a part of.
WebUrl	string	The web URL of contact point.

Customer Contact Responsibility

The role or responsibility of an organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContactRole

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Customer Contact Profile*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*

Relationship Type	Object or Service
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The organization contact identifier. Foreign key to the HZ_ORG_CONTACTS table.
OrgContactRoleId	long	The unique contact role identifier. It is primary key and system generated. • Primary Key
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
PrimaryContactPerRoleType	string	Indicates if the contact is the primary contact for the role. Y stands for primary contact and N stands for a contact that is not the primary contact for the role type. The default value is N.
PrimaryFlag	boolean	Indicator that specifies if this is the primary role for the contact. Y stands for primary role and N stands for a non-primary role for the contact. The default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
RoleLevel	string	The role level of the contact. For example, executive, department head, or middle manager.
RoleType	string	The role performed by a contact.
Status	string	The status of the record.

E-Mail

The e-mail address associated with a trading community member. For example, john.doe@oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Email

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key

Name	Type	Description
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The preferred format for e-mail addressed to this address such as HTML or ASCII. A list of accepted values is defined using the lookup EMAIL_FORMAT.
EmailInformation	*Trading Community Contact Point Additional Information*	The additional information about the e-mail.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary e-mail of the associated object. If the value is True, then this is the primary e-mail. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

E-Mail Domain

The domain of the e-mail address associated with a trading community member. For example, ABC Corporation has CORP and BUSINESS e-mail domains.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}EmailDomain

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DomainName	string	The actual or non-reversed domain name of the organization for display purpose.
EmailDomainId	long	The sequence generated unique identifier. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
Status	string	The status of the record.
TransposedDomain	string	The reversed domain name for the purposes of searching.

Education

The trading community person's education information. For example, a person may have attended the University of California from 1995 to 1999 and received an undergraduate degree in Computer Science with a GPA of 4.0.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Education

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CourseMajor	string	The primary area of study.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DegreeReceived	string	The abbreviation for the degree. For example, BA, BSc, MBA, MSc, PhD, and Gd (graduate diploma).
EducationId	long	The unique identifier of the education record. • Primary Key
LastDateAttended	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The year and month when a person last attended the educational institution.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
SchoolAttendedName	string	The name of the school.
SchoolPartyId	long	The party identifier of the school.
StartDateAttended	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the attendance of a person starts.
Status	string	The status of the record.
TypeOfSchool	string	The classification of the educational organization. For example, high school, college, university, or professional school. Note that the classification of schools varies among different cultures.

Electronic Data Interchange

The electronic data interchange information associated with a trading community member. For example, the details of standard codes and payment methods that are to be used for data interchange.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Edi

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EDIEceTpLocationCode	string	The trading partner location code for EDI Gateway.

Name	Type	Description
EDIIdNumber	string	The EDI trading partner number for the supplier site.
EDIPaymentFormat	string	Indicates type of information being transmitted with the funds if using EDI_PAYMENT_ METHOD ACH. The list of accepted values are CCD, CCP, CHZ, CTX, PPD, and PPP.
EDIPaymentMethod	string	Indicates how a payment is to be made through EDI. The list of accepted values are ACH and BOP.
EDIRemittanceInstruction	string	Indicates who will send the remittance advice. The list of accepted values are Banks or Payables systems.
EDIRemittanceMethod	string	Indicates how remittance advice are sent to the supplier.
EDITpHeaderId	long	The unique identifier of the EDI transaction header.
EDITransactionHandling	string	The ANSI standard code for EDI transaction type.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/ types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary EDI of the associated object. If the value is True, then this is the primary EDI. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Electronic File Transfer

The electronic funds transfer information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Eft

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EFTPrintingProgramId	long	The printing program identifier.
EFTSWIFTCode	string	The EFT swift code information.
EFTTransmissionProgramId	long	The transmission program identifier.
EFTUserNumber	string	The number that identifies you as a user of electronic funds transfer service for your bank or clearing organization.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Employment History

The employment history information of a trading community member. For example, John Doe was a Vice President at Business World from 2001 to 2007 and President at World of Business from 2007 to 2009.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}EmploymentHistory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Work Class*
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the employment officially began.
Branch	string	The military branch code.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmployedAsTitle	string	Job position title assigned by an employer.
EmployedAsTitleCode	string	The code for the job title. If title cannot be represented by a code, then the EMPLOYED_AS_TITLE column must be used.
EmployedByDivisionName	string	The common name of a division or an organization at which the person was employed.
EmployedByNameCompany	string	The name of the organization at which the person was employed. Note that the name must not include the division name.
EmployedByPartyId	long	The party identifier of the employer for situations in which the employer is represented as a party.
EmploymentHistoryId	long	The unique employment history identifier. • Primary Key
EmploymentTypeCode	string	Indicates whether the employment is part-time or full-time.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FacultyPositionFlag	boolean	Indicator Y or N to specify whether the position is a faculty position or not.
FractionOfTenure	decimal	The fraction of tenure.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
MilitaryRank	string	The rank of the person in the branch.
PartyId	long	The unique identifier of the contact party.
ReasonForLeaving	string	The free format text that describes the reason for leaving.
RequestId	long	A system-generated read-only attribute used by the application framework.
Responsibility	string	Job responsibility of the person.
Served	string	Indicates where the person performed military service.
Station	string	Indicates the station name.
Status	string	The status of the record.
SupervisorName	string	The full name of the manager of the person.
TenureCode	string	The type of tenure for faculty positions.
WeeklyWorkHours	decimal	The usual number of hours worked per week.
WorkClass	*Work Class*	The custom-defined classification information about job title and work experience of a person.

Financial Number

The financial report numbers of a trading community member, such as assets, liabilities, and cash balance.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}FinancialNumber

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Financial Report*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FinancialNumber	decimal	The value for the financial number. For example, the FINANCIAL_NUMBER_NAME column could have a numerical value of 3,000,000,000 for annual sales.
FinancialNumberCurrency	string	The ISO currency code for the financial number.
FinancialNumberId	long	The unique identifier of the financial number. • Primary Key
FinancialNumberName	string	A text field that lets you assign a descriptive name to a financial report item. For example, gross annual sales, profit, and net annual sales. A user-defined lookup.
FinancialReportId	long	The unique identifier of the financial report.

Name	Type	Description
FinancialUnitsApplied	decimal	The order of magnitude (tens, hundreds, thousands, and so on) used for the FINANCIAL_NUMBER column.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ProjectedActualCode	string	Indicates if the projected amount is projected or actual. The list of accepted values are P and A. The default value is A.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Financial Profile

The financial details of a trading community member, such as bank account information that was obtained as part of a credit evaluation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}FinancialProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessAuthorityDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when access to the information in the account was granted.
AccessAuthorityGranted	string	Indicates whether access to information in a financial account was granted. If the value is True, then the access has been granted.
BalanceAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The reported balance on an account. The balance can be a positive number, negative number, or zero.
BalanceVerifiedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the account balance was verified.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FinancialAccountNumber	string	The alternate unique identifier of the financial account.

Name	Type	Description
FinancialAccountType	string	The short name that classifies the financial accounts. For example, savings, checking, home loan, personal loan, trading, and so on.
FinancialOrgType	string	The classification of financial organizations. For example, bank, savings and loan, private lender, building society and so on.
FinancialOrganizationName	string	The name of the financial organization that holds the account.
FinancialProfileId	long	The unique identifier of the party's financial profile. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Financial Report

The financial report information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}FinancialReport

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Financial Number*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AuditInd	string	Indicates if the financial reports are audited. If the value is True, then the financial reports have been audited.
ConsolidatedInd	string	Indicates if the financial reports are consolidated. If the value is C, then the reports are consolidated.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateReportIssued	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the financial report was published.
DocumentReference	string	The unique reference number such as passport number or naturalization reference number associated with DOCUMENT_TYPE.
EstimatedInd	string	Indicates whether the financial reports provide estimated data. If the value is True, then the financial reports provide the data.
FinalInd	string	Indicates whether the financial reports are the final closing statements for a business that has ceased operations. If the value is True, then the reports are final closing statements.
FinancialNumber	*Financial Number*	The number that indicates a financial value like annual sales.
FinancialReportId	long	The unique identifier for a financial report. • Primary Key
FiscalInd	string	Indicates whether the financial reports cover a fiscal twelve-month accounting period. If the value is Y, then the financial report covers a twelve-month fiscal period.
ForecastInd	string	Indicates whether the financial reports display forecasts or future projections. If the value is Y, then the financial report displays forecasts.
IssuedPeriod	string	The period covered by the financial report. For example, fiscal year 1999, 1998, and so on.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OpeningInd	string	Indicates whether the financial reports are the opening statements for a business. If the value is Y, then the financial statements are opening statements.

Name	Type	Description
PartyId	long	The unique identifier of the contact party.
ProformaInd	string	Indicates if the financial reports are pro forma numbers. If the value is Y, then the financial reports are pro forma numbers.
QualifiedInd	string	Indicates whether the financial reports include qualifying remarks from auditors about the fairness and accuracy of the numbers. If the value is Y, then the report is qualified by auditors.
ReportEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date of the report, used instead of Issued Period.
ReportStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date of the report, used instead of Issued Period.
RequestId	long	A system-generated read-only attribute used by the application framework.
RequiringAuthority	string	The name of the primary organization that requires this financial report. For example, auditors, the Federal Trade Commission, or the Internal Revenue Service.
RestatedInd	string	Indicates whether the financial reports include data that was corrected after the original financial reports. If the value is Y, then the report has been corrected.
SignedByPrincipalsInd	string	Indicates whether the financial reports were signed by the principals of the organization. If the value is Y, then the reports are signed.
Status	string	The status of the record.
TrialBalanceInd	string	Indicates whether the financial reports include trial balance numbers. If the value is Y, then the financial report includes trial balance numbers.
TypeOfFinancialReport	string	A name for the financial report. For example, 10K report, Annual Report, or Shareholder's Special Report.
UnbalancedInd	string	Indicates whether the financial reports include balance sheet accounts that do not balance. If the value is Y, then report includes unbalanced balance sheet accounts.

Name	Type	Description
WhUdpateId	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the record was entered or changed in a data warehouse.

Household

The trading community group information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}Group

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Additional Household Name*
Contains	*Classification Assignment*
Contains	*Source System Reference*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Web*
Contains	*Contact Preference*
Contains	*Phone*
Contains	*Contact Language*
Contains	*Certification*
Contains	*Usage Assignment*
Contains	*Additional Identifier*

Relationship Type	Object or Service
Contains	*E-Mail Domain*
Contains	*Instant Messaging*
Contains	*E-Mail*
Contains	*Address*
Contains	*Preference*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Trading Community Group*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalGroupName	*Additional Household Name*	Additional name associated with the group.
AdditionalPartyId	*Additional Identifier*	Additional Identifier for the group.
AnnualExpenses	long	Household annual expenses.

Name	Type	Description
AnnualIncome	long	The value for annual income.
AverageAge	long	Household average age.
Certification	*Certification*	Certification information associated with the group.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
CertificationReasonCode	string	Reason for group party's current certification level assignment. HZ_PARTY_CERT_REASON lookup type.
Child0to6Number	long	The number of children between 0 and 6 years.
Child13to18Number	long	The number of children between 13 and 18 years.
Child7to12Number	long	The number of children between 7 and 12 years.
CodeAssignment	*Classification Assignment*	Classification code assigned to the group.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.

Name	Type	Description
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DependentsNumber	long	The number of dependents.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	Not Used.
EffectiveSequence	int	Not Used.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
Email	*E-Mail*	The email address associated with the record.
EmailDomain	*E-Mail Domain*	Email domain information for the group.
FinancialProfile	*Financial Profile*	Financial Profile information of the group.
GroupName	string	Name of this group.
GroupSize	long	Size of the group.
GroupType	string	The party type can only be person, organization, group.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MedianAge	long	The age of the median.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	Preference information of the group.
PartySite	*Address*	Address information associated with the group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	Party usage assigned to the group.
PersonLanguage	*Contact Language*	Language information associated with a group.
Phone	*Phone*	The phone information for the entity.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonEmail	string	The E-Mail of the preferred contact person.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredContactPersonName	string	The name of the preferred contact person.
PreferredContactPersonPhone	string	The phone number of the preferred contact person.
PreferredContactPersonURL	string	The URL of the preferred contact person.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.

Name	Type	Description
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the primary address.
PrimaryAddressCountry	string	The country for the primary address.
PrimaryAddressCounty	string	The country of the primary address.
PrimaryAddressLine1	string	Line one of the primary address.
PrimaryAddressLine2	string	Line two of the primary address.
PrimaryAddressLine3	string	Line three of the primary address.
PrimaryAddressLine4	string	Line four of the primary address.
PrimaryAddressLocationId	long	The unique identification number for the primary address location.
PrimaryAddressPartySiteId	long	The unique identifier for the primary address party site.
PrimaryAddressPostalCode	string	The postal code of the primary address.
PrimaryAddressProvince	string	The province of the primary address.
PrimaryAddressState	string	The state of the primary address.
PrimaryEmail	string	Primary E-Mail Address of the Group.
PrimaryEmailId	long	Primary E-Mail ID.
PrimaryFormattedAddress	string	Primary formatted address for the group.
PrimaryFormattedMultilineAddress	string	Primary formatted multiline address for the group.
PrimaryFormattedPhoneNumber	string	Primary formatted phone number for the group.

Name	Type	Description
PrimaryLanguage	string	Standard name for a primary language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The unique identification number for the primary phone.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	Primary URL.
PrimaryWebId	long	Primary Web ID.
ProfileCreatedBy	string	The user who created the row.
ProfileCreatedByModule	string	The module that created the profile.
ProfileCreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time of the creation of the row.
ProfileLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time of the last update of the row.
ProfileLastUpdateLogin	string	The session login associated to the user who last updated the row.
ProfileLastUpdatedBy	string	The user who last updated the row.
Relationship	*Relationship*	Relationship information for the group.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.
SuffixOverriddenFlag	boolean	This will have Y if the suffix is overridden by user N if not.
UniqueNameSuffix	string	System generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
WealthAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Household wealth amount or net worth.
Web	*Web*	The web information related to the record.

Instant Messaging

The instant messaging information of a trading community member, such as the AOL identifier or Yahoo Messenger information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}InstantMessaging

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Household*

Relationship Type	Object or Service
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.

Name	Type	Description
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessagingAddress	string	The instant messaging information address.
InstantMessagingInformation	*Trading Community Contact Point Additional Information*	The instant messaging information related to the record.
InstantMessengerType	string	The type of the instant messenger type.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
OverallPrimaryFlag	boolean	Indicates whether this is the primary instant messaging Id of the associated object. If the value is True, then this is the primary instant messaging Id. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Phone

The phone number associated with a trading community member. For example, the phone number for Oracle Corporation is 650-506-6000.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Phone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Contact Address*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*

Relationship Type	Object or Service
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FormattedPhoneNumber	string	The formatted phone number.
LastContactDtTime	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time of last contact placed to this contact point.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PagerTypeCode	string	The PAGER_TYPE_CODE column stores the lookup code for the type of pager. The type of pager determines how the page is received. For example, tone, number, alphanumeric or two-way alphanumeric.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCallingCalendar	string	The name or code for a calling calendar used with this telephone number. This attribute is no longer used in Fusion applications.

Name	Type	Description
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The additional number addressed after initial connection to an internal telephone system.
PhoneInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community phone.
PhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound, or outbound.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RawPhoneNumber	string	The unformatted telephone number.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TimezoneCode	string	The foreign key to FND_TIMEZONES_B.TIMEZONE_CODE.
TransposedPhoneNumber	string	This column stores the concatenation of PHONE_COUNTRY_CODE, PHONE_AREA_CODE, and PHONE_NUMBER in reverse order. For example, if PHONE_COUNTRY_CODE=1, PHONE_AREA_CODE=650 and PHONE_NUMBER=5065747, this column stores

Name	Type	Description
		74756050561. This column is used for building an index to search for any combination of the above three columns.

Preference

The preferences of a trading community member. For example, a member may prefer that the transaction currency is the US dollar.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalValue1	string	The additional preference value.
AdditionalValue2	string	The additional preference value.
AdditionalValue3	string	The additional preference value.
AdditionalValue4	string	The additional preference value.
AdditionalValue5	string	The additional preference value.
Category	string	A preference category is used to logically group one or more preference codes in a particular user interface. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Module	string	The program that creates the preference. For example, TCA MOBILE CUSTOMER DIRECTORY.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PartyPreferenceId	long	The unique identifier of the party preference. • Primary Key

Name	Type	Description
PreferenceCode	string	A preference code determines if a preference is a single value or a multiple value preference. The preference code is validated by the HZ_PREFERENCE lookup. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
ValueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The preference value when the data type is DATE.
ValueName	string	A user-defined alias for a preference value.
ValueNumber	decimal	The preference value when the data type is NUMBER.
ValueVarchar2	string	The preference value when the data type is VARCHAR2.

Relationship

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}Relationship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Address*
Contains	*Instant Messaging*
Contains	*Web*

Relationship Type	Object or Service
Contains	*Usage Assignment*
Contains	*Trading Community Relationship Additional Information*
Contains	*Customer Contact Profile*
Contains	*Source System Reference*
Contains	*Email*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalInformation1	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type. For operating unit and legal entity to bank relationships, column stores communication agreement ID, which identifies agreement between payer and bank on type of EDIFACT documents that can be sent for processing payments.
AdditionalInformation10	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation11	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation12	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation13	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation14	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation15	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation16	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation17	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation18	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation19	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation2	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation20	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation21	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation22	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation23	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation24	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation25	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation26	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation27	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation28	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation29	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation3	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation30	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation4	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation5	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation6	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation7	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation8	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation9	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.

Name	Type	Description
DirectionCode	string	The code of the relationship direction. The list of accepted values are defined in the lookup DIRECTION_CODE.
Email	*E-Mail*	The email address associated with the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectEmailAddress	string	The e-mail address of the object party in the relationship.
ObjectId	long	The unique identifier of the object party in this relationship.
ObjectPartyName	string	The name of the object party in this relationship.
ObjectTableName	string	The source table name of the object party in this relationship.
ObjectType	string	The object type of the relationship.
ObjectUsageCode	string	The usage code of object party in the relationship.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationContact	*Customer Contact Profile*	The organization contact information.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyName	string	The name of the party.
PartySite	*Address*	The party site associated with the relationship.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the relationship.
PercentageOwnership	decimal	The percentage of the child entity owned by the parent entity.
Phone	*Phone*	The phone information for the entity.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.
RelationshipCode	string	The code for a forward or a backward relationship. A list of accepted relationship values is defined in the lookup PARTY_RELATIONS_TYPE.
RelationshipId	long	The relationship identifier for the record.
RelationshipInformation	*Trading Community Relationship Additional Information*	The relationship type information.
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key
RelationshipType	string	The relationship type name. For example, CUSTOMER_SUPPLIER. A list of valid relationship types is defined in the lookup HZ_RELATIONSHIP_TYPE.
RequestId	long	A system-generated read-only attribute used by the application framework.
Role	string	The role between the subject and object party in this relationship.

Name	Type	Description
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
SubjectEmailAddress	string	The e-mail address of the subject party in relationship.
SubjectId	long	The unique identifier of the subject in this relationship.
SubjectPartyUsageAssignment	*Usage Assignment*	The usage assignment of the subject party in the relationship.
SubjectTableName	string	The source table of the subject.
SubjectType	string	The subject type of the relationship.
SubjectUsageCode	string	The usage code of subject party in the relationship.
Web	*Web*	The web information related to the record.

Sales Party Territory

These are territories associated to the sales party (customer).

QName: {http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartyTerritoryService}SalesPartyTerritories

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Household*
Contains	*Trading Community Organization Details*
Contains	*Trading Community Person Details*

Relationship Type	Object or Service
Handled by	*Sales Party Territory service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributeCategory	string	Indicates attribute category.
CpdrfLastUpd	string	The standard replication column.
CpdrfVerPillar	int	The standard replication column.
CpdrfVerSor	int	The standard replication column.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
Group	*Household*	Indicates to which group party this territory belongs to.
OrganizationParty	*Trading Community Organization Details*	Indicates to which organization party this territory belongs to.
PartyId	long	The unique identifier of the contact party.
PartyTerritoryId	long	This is the customer territory association identifier. • Primary Key
PersonParty	*Trading Community Person Details*	Indicates to which person party this territory belongs to.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
TerritoryId	long	Indicates territory that is associated with the customer.

Name	Type	Description
TerritoryVersionId	long	Indicates territory version that is associated with the customer.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*
Contained by	*Location Details*
Contained by	*Household*
Contained by	*Contact Preference*
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*

Relationship Type	Object or Service
Contained by	*Trading Community Address Purpose*
Contained by	*Telex*
Contained by	*Phone*
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*
Contained by	*Trading Community Person Details*
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*
Contained by	*Trading Community Customer Account Site Use*
Contained by	*Relationship*
Contained by	*Electronic Data Interchange*
Contained by	*Trading Community Customer Account or Site Role*
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Name	Type	Description

Telex

The telex number information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Telex

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Relationship Type	Object or Service
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the

Name	Type	Description
		start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary telex of the associated object. If the value is True, then this is the primary telex. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Name	Type	Description
TelexNumber	string	The telex reference number (usually a telephone number) of the organization.

Trading Community Address Additional Information

The address information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/}PartySiteInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Address Purpose

The purpose of an address, such as Business, Home, or Ship To.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySiteUse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date at the start of the date range within which the row is active.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
IntegrationKey	string	The integration key is not used.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteUseId	long	The unique identifier of the party site used. • Primary Key
PrimaryPerType	string	Indicates if this is the primary use for the site. Y stands for the primary site and N stands for all other sites.
RequestId	long	A system-generated read-only attribute used by the application framework.
SiteUseType	string	The site use type associated with the address.
Status	string	The status of the record.

Trading Community Contact Point Additional Information

The contact point for a trading community member like phone or e-mail. For example 650-506-6000 is the phone number for Oracle Corporation, john.doe@example.com is the e-mail address for John Doe.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/}ContactPointInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Phone*
Contained by	*Web*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointType	string	The type of the contact point.
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Organization Contact Additional Information

The additional information about the organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/orgContact/}OrganizationContactInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Customer Contact Profile*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrgContactId	long	The unique identifier of the organization contact. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Organization Details

The information about an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationParty

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*
Contains	*Address*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Classification Assignment*

Relationship Type	Object or Service
Contains	*Usage Assignment*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Phone*
Contains	*Email Domain*
Contains	*Telex*
Contains	*Additional Identifier*
Contains	*Account*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contains	*Financial Report*
Contains	*Certification*
Contains	*Electronic Data Interchange*
Contains	*Email*
Contains	*Preference*
Contains	*Additional Account Name*
Contains	*Electronic File Transfer*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*

Relationship Type	Object or Service
Contained by	*Sales Party Territory*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalOrganizationName	*Additional Account Name*	The additional name associated with the organization.
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AnalysisFy	string	The fiscal year that the financial information is based on.
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.

Name	Type	Description
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information associated with the organization.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the organization.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating for the organization.
CurrentFiscalYearPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its current fiscal year.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.

Name	Type	Description
Edi	*Electronic Data Interchange*	The electronic data interchange information for the organization.
Eft	*Electronic File Transfer*	The electronic file transfer information for the organization.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.
EmployeesTotal	decimal	The total number of employees.
FinancialProfile	*Financial Profile*	The financial profile information of the organization.
FinancialReport	*Financial Report*	The financial report information of the organization.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
GroupType	string	The type of the group.
HQBranchIndicator	string	The status of this site, such as HQ, a branch, or a single location. A list of accepted values are defined in the lookup type HQ_BRANCH_IND.
HomeCountry	string	The home country associated with the party.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.

Name	Type	Description
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MissionStatement	string	The corporate charter of organization in user-defined text format.
NextFyPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its next fiscal year.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationProfile	*Account*	The information about the partner organization.
OrganizationSize	string	The size of the organization based on its revenue, number of employees, and so on.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key

Name	Type	Description
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	The preference mentioned in the organization details.
PartySite	*Address*	The party site associated with the organization.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the organization.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.

Name	Type	Description
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPointId	long	The unique identifier of the primary e-mail.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPointId	long	The unique identifier of the primary phone contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPointId	long	The unique identifier of the primary URL contact point.
PrincipalName	string	The Name of the highest ranking person in the company.
Province	string	The name of the province.
Relationship	*Relationship*	The relationship information of the organization.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.

Name	Type	Description
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The telex information of the organization.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the Third Party field in the Customers window is mandatory.
TradingPartnerIdentifier	string	The FSIO related trading partner codes.
URL	string	The destination URL associated with a specific Google AdWords ad.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
Web	*Web*	The web information related to the record.
YearEstablished	int	The year when the organization began doing business.

Trading Community Organization Profile Additional Information

The additional profile information about an organization, such as the organization type.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/organization/}OrganizationInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Cloud Account*
Contained by	*Account*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrganizationProfileId	long	The unique identifier of the organization profile. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Person Details

The information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Person

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*
Contains	*Citizenship*

Relationship Type	Object or Service
Contains	*Contact Language*
Contains	*Instant Messaging*
Contains	*Employment History*
Contains	*Web*
Contains	*Classification Assignment*
Contains	*Usage Assignment*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Contact Interest*
Contains	*Contact*
Contains	*Additional Contact Name*
Contains	*Phone*
Contains	*Education*
Contains	*Email Domain*
Contains	*Additional Identifier*
Contains	*Contact Preference*
Contains	*Source System Reference*
Contains	*Certification*
Contains	*Contact Address*
Contains	*Email*
Contains	*Preference*

Relationship Type	Object or Service
Extended by	*Partner Members*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.
AdditionalPersonName	*Additional Contact Name*	The additional name of the person.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.

Name	Type	Description
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information for the person.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Citizenship	*Citizenship*	The citizenship information of a person.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the person.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
Education	*Education*	The education information of the person.
Email	*E-Mail*	The email address associated with the record.

Name	Type	Description
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.
EmploymentHistory	*Employment History*	The employment history information of a person.
FinancialProfile	*Financial Profile*	The financial profile information of a person.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
Gender	string	The gender of the person, such as male, female, and unknown. A list of accepted values is defined in the lookup HZ_GENDER.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person. A list of accepted values is defined in the lookup MARITAL_STATUS.
MissionStatement	string	The corporate charter of organization in user-defined text format.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	The preference mentioned in the person details.
PartySite	*Contact Address*	The party site associated with the person.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the person.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonInterest	*Contact Interest*	The interest information associated with a person.

Name	Type	Description
PersonLanguage	*Contact Language*	The language information associated with a person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.
PersonPreviousLastName	string	The previous last name of a person.
PersonProfile	*Contact*	The profile information of the person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.

Name	Type	Description
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPTId	long	The unique identifier of the primary e-mail.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPTId	long	The unique identifier of the primary phone contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPTId	long	The unique identifier of the primary URL contact point.
Province	string	The name of the province.
Relationship	*Relationship*	The relationship information of the person.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
Salutation	string	The size of the household this person is a part of.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.
Status	string	The status of the record.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the Third Party field in the Customers window is mandatory.
URL	string	The destination URL associated with a specific Google AdWords ad.
UserGUID	string	The "light weight" user Global Unique Id. Light Weight users defined in the Extended Security (XS) System.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
Web	*Web*	The web information related to the record.

Trading Community Person Profile Additional Information

The additional information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/}PersonInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Loyalty Member Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PersonProfileId	long	The unique identifier of the person profile. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Relationship Additional Information

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/relationship/}RelationshipInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key

Name	Type	Description
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Usage Assignment

The party usage assigned to a trading community member. For example, John Doe is a contact of ABC Corporation and XYZ Corporation is a supplier.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyUsageAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Party Usage Assignment Service*
Handled by	*Trading Community Party Information*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerTableId	long	The unique identifier for a record in the owner table.

Name	Type	Description
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
PartyUsageCode	string	The usage context of a party's contact point.
PartyUsgAssignmentId	long	The unique identifier of the party usage assignment. • Primary Key
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Web

The Web information associated with a trading community member. For example, Oracle's address on the Web is www.oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Web

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key

Name	Type	Description
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N stands for all others.

Name	Type	Description
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
URL	string	The destination URL associated with a specific Google AdWords ad.
WebInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community Web.
WebType	string	The prefix class to a Web address. Typically, this is either FTP or HTTP.

Work Class

The custom-defined classification of information about a person's job title and work experience.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}WorkClass

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Employment History*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmploymentHistoryId	long	The foreign key to the HZ_EMPLOYMENT_HISTORY table.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LevelOfExperience	string	The user-defined rating for the level of experience in the class of work. For example, journeyman, trainee, or exposure.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.
WorkClassId	long	The unique identifier for the class of work. • Primary Key
WorkClassName	string	The user-determined classification for work. For example, bricklayer, doctor, lawyer, programmer, or minister of health.

Sales Person Setup

A setup to configure a person involved in the sale or support of products and services. For example, John Smith, sales representative.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/applicationModule/}SalesPersonService

Service WSDL URL: https://servername/crmService/SalesPersonServiceV2?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Resource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Resource Sales Representative Setup*

Operations

- *getResourceSalesrep*
- *createResourceSalesrep*
- *updateResourceSalesrep*
- *deleteResourceSalesrep*
- *mergeResourceSalesrep*
- *findResourceSalesrep*
- *processResourceSalesrep*
- *processCSResourceSalesrep*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getResourceSalesrep

Get operation for Trading Community Resource Sales Representative Setup

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceSalesrepId	long	Unique Salesrep Identifier

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceSalesrepResult	Trading Community Resource Sales Representative Setup that matches the inbound key attributes.

createResourceSalesrep

Create operation for Trading Community Resource Sales Representative Setup

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceSalesrep	*Resource Sales Representative Setup*	Trading Community Resource Sales Representative Setup to be created

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceSalesrepResult	Result of the operation includes the successfully created Trading Community Resource Sales Representative Setup and/or a list of warnings or informational messages.

updateResourceSalesrep

Update operation for Trading Community Resource Sales Representative Setup

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceSalesrep	*Resource Sales Representative Setup*	Trading Community Resource Sales Representative Setup to be updated

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceSalesrepResult	Result of the operation includes the successfully updated Trading Community Resource Sales Representative Setup and/or a list of warnings or informational messages.

deleteResourceSalesrep

Delete operation for Trading Community Resource Sales Representative Setup

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceSalesrep	*Resource Sales Representative Setup*	Trading Community Resource Sales Representative Setup to be deleted

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warnings or informational messages encountered when deleting the object.

mergeResourceSalesrep

Merge operation for Trading Community Resource Sales Representative Setup. It will perform an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceSalesrep	*Resource Sales Representative Setup*	Trading Community Resource Sales Representative Setup to be merged

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceSalesrepResult	Result of the operation includes the successfully merged Trading Community Resource Sales Representative Setup and/or a list of warnings or informational messages.

findResourceSalesrep

Find operation for Trading Community Resource Sales Representative Setup

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, etc.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Resource Sales Representative Setup*	Result of the operation including a list of Trading Community Resource Sales Representative Setup that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

processResourceSalesrep

Bulk load operation for Trading Community Resource Sales Representative Setup

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action shall be performed, such as Create, Update, Merge, or Delete
resourceSalesrep	*Resource Sales Representative Setup*	A list of Trading Community Resource Sales Representative Setup to be processed
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Resource Sales Representative Setup*	Result of the operation including a list of Trading Community Resource Sales Representative Setup that are successfully processed and any warnings or informational messages encountered during the invocation.

processCSResourceSalesrep

An operation to apply the changes back to the data source for Trading Community Resource Sales Representative Setup

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	Result of the operation including a list of created/updated data objects, and all warning and informational messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
mergeResourceSalesrep	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	Manage Trading Community Resource Sales Representative Information	Allows the management of resource saleperson setup information. If assigning, also assign the ability to view the trading community resource sales representative information.
getResourceSalesrep	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	Manage Trading Community Resource Sales Representative Information	Allows the management of resource saleperson setup information. If assigning, also assign the ability to view the trading community resource sales representative information.
updateResourceSalesrep	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	Manage Trading Community Resource Sales Representative Information	Allows the management of resource saleperson setup information. If assigning, also assign the ability to view the trading community resource sales representative information.
deleteResourceSalesrep	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	Manage Trading Community Resource Sales Representative Information	Allows the management of resource saleperson setup information. If assigning, also assign the ability to view the trading community resource sales representative information.
createResourceSalesrep	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	Manage Trading Community Resource Sales Representative Information	Allows the management of resource saleperson setup information. If assigning, also assign the ability to view the trading community resource sales representative information.
processCSResourceSalesrep	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	Manage Trading Community Resource Sales Representative Information	Allows the management of resource saleperson setup information. If assigning, also assign the ability to view the trading community resource sales representative information.
processResourceSalesrep	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	Manage Trading Community Resource Sales Representative Information	Allows the management of resource saleperson setup information. If assigning, also assign the ability to view the trading community resource sales representative information.
findResourceSalesrep	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	Manage Trading Community Resource Sales Representative Information	Allows the management of resource saleperson setup information. If assigning, also assign the ability to view the trading community resource sales representative information.

Operation Name	Privilege Code	Privilege Name	Privilege Description

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_HZRESOURCE_ADMINISTRATOR_DUTY	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.

Resource Sales Representative Setup

The information pertaining to a resource who functions as a sales person. For example, sales credit type information used to calculate sales credit in Financials, sales tax geography code and sales tax inside city limits information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceSalesrep

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Sales Person Setup*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date this salesrep becomes inactive
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
ResourceId	long	Identifier for the resource party. Foreign key to the HZ_PARTIES.PARTY_ID.
ResourceSalesrepId	long	Unique Salesrep Identifier • Primary Key
SalesCreditTypeId	long	Sales Credit Type Identifier (FK to so_sales_credit_types)
SalesTaxGeocode	string	sales tax geocode (used by AR)
SalesTaxInsideCityLimits	string	sales Tax inside city limits (used by AR)
SalesrepNumber	string	Unique number given to salesrep (used for OTHER type of salesreps)
SetCode	string	Reference data set for the sales person..
SetId	long	Identifies a set of reference data shared across business units and other entities. Also known as Reference Data Sets, they are used to filter reference data in transactional UIs.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date this salesrep becomes active

Name	Type	Description
Status	string	Status of salesrep whether he or she is active in AR or not (Used for OTHER type of Salesreps)
WhUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	wh update date (used by AR)

Sales Person Setup

A setup to configure a person involved in the sale or support of products and services. For example, John Smith, sales representative.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/applicationModule/}SalesPersonService

Service WSDL URL: https://servername/crmService/SalesPersonService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Resource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Resource Sales Representative Setup*

Operations

- *getResourceSalesrep*
- *createResourceSalesrep*
- *updateResourceSalesrep*
- *deleteResourceSalesrep*
- *mergeResourceSalesrep*
- *findResourceSalesrep*
- *processResourceSalesrep*

- *processCSResourceSalesrep*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getResourceSalesrep

The Get operation for the trading community resource sales representative setup.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceSalesrepId	long	The unique identifier of the sales representative.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceSalesrepResult	The trading community resource sales representative setup that matches the inbound key attributes.

createResourceSalesrep

The Create operation for the trading community resource sales representative setup.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceSalesrep1	*Resource Sales Representative Setup*	The trading community resource sales representative setup to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceSalesrepResult	The result of the operation that includes the successfully created trading community resource sales representative setup and a list of warning or information messages.

Element Name	Type	Description

updateResourceSalesrep

The Update operation for the trading community resource sales representative setup.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceSalesrep1	*Resource Sales Representative Setup*	The trading community resource sales representative setup to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceSalesrepResult	The result of the operation that includes the successfully updated trading community resource sales representative setup and a list of warning or information messages.

deleteResourceSalesrep

The Delete operation for the trading community resource sales representative setup.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceSalesrep1	*Resource Sales Representative Setup*	The trading community resource sales representative setup to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergeResourceSalesrep

The Merge operation for the trading community resource sales representative setup. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceSalesrep1	*Resource Sales Representative Setup*	The trading community resource sales representative setup to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceSalesrepResult	The result of the operation that includes the successfully merged trading community resource sales representative setup and a list of warning or information messages.

findResourceSalesrep

The Find operation for the trading community resource sales representative setup.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Resource Sales Representative Setup*	The result of the operation that includes a list of trading community resource sales representative setup that satisfy the inbound criteria and any warning or information messages.

processResourceSalesrep

The Bulk load operation for the trading community resource sales representative setup.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what actions were performed, such as Create, Update, Merge, or Delete.
resourceSalesrep1	*Resource Sales Representative Setup*	A list of the trading community resource sales representative setups to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Resource Sales Representative Setup*	The result of the operation that includes a list of trading community resource sales representative setup that are successfully processed and any warning or information messages.

processCSResourceSalesrep

An operation to apply the changes back to the data source for the trading community resource sales representative setup.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object used to represent the changes that were made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and

Element Name	Type	Description
		whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created/updated data objects, and all warning and informational messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used when evaluating the locale-based user interface hints. The localeName is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and The Delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
mergeResourceSalesrep	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	Manage Trading Community Resource Sales Representative Information	Allows the management of resource saleperson setup information. If assigning, also assign the ability to view the trading community resource sales representative information.
getResourceSalesrep	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	Manage Trading Community Resource Sales Representative Information	Allows the management of resource saleperson setup information. If assigning, also assign the ability to view the trading community resource sales representative information.

Operation Name	Privilege Code	Privilege Name	Privilege Description
updateResourceSalesrep	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	Manage Trading Community Resource Sales Representative Information	Allows the management of resource saleperson setup information. If assigning, also assign the ability to view the trading community resource sales representative information.
deleteResourceSalesrep	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	Manage Trading Community Resource Sales Representative Information	Allows the management of resource saleperson setup information. If assigning, also assign the ability to view the trading community resource sales representative information.
createResourceSalesrep	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	Manage Trading Community Resource Sales Representative Information	Allows the management of resource saleperson setup information. If assigning, also assign the ability to view the trading community resource sales representative information.
processCSResourceSalesrep	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	Manage Trading Community Resource Sales Representative Information	Allows the management of resource saleperson setup information. If assigning, also assign the ability to view the trading community resource sales representative information.
processResourceSalesrep	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	Manage Trading Community Resource Sales Representative Information	Allows the management of resource saleperson setup information. If assigning, also assign the ability to view the trading community resource sales representative information.
findResourceSalesrep	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	Manage Trading Community Resource Sales Representative Information	Allows the management of resource saleperson setup information. If assigning, also assign the ability to view the trading community resource sales representative information.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_SALES_REPRESENTATIVE_INFORMATION_PRIV	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_HZRESOURCE_ADMINISTRATOR_DUTY	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.

Resource Sales Representative Setup

The information pertaining to a resource who functions as a sales person. For example, sales credit type information used to calculate sales credit in Financials, sales tax geography code and sales tax inside city limits information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceSalesrep

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Sales Person Setup*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the

Name	Type	Description
		start and end of a transaction to determine whether another session has updated the row.
ResourceId	long	The unique identifier of the resource.
ResourceSalesrepId	long	The unique sales representative identifier. • Primary Key
SalesCreditTypeId	long	The sales credit type identifier (FK to so_sales_credit_types).
SalesTaxGeocode	string	The sales tax geocode (used by AR).
SalesTaxInsideCityLimits	string	The sales tax inside city limits (used by AR).
SalesrepNumber	string	The unique number given to the sales representatives (used for OTHER type of salesreps).
SetCode	string	The reference data set for the sales person.
SetId	long	Identifies a set of reference data shared across business units and other entities. Also known as Reference Data Sets, they are used to filter reference data in transactional UIs.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.
WhUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Wh update date (used by AR).

Sales Reference Customer

Service to operate on reference customers. The supported operations are create, update, get, and find. Sales reference customers are past customers who are enrolled in a reference program.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/sales/baseSales/references/referenceService/}ReferenceService

Service WSDL URL: https://servername/crmService/ReferenceService?WSDL

Logical Business Objects

- CRM : Sales : Sales Reference Customer

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Reference Supported Activity*
Handles	*Appointment Transient Category SDO*
Handles	*Appointment Transient Note SDO*
Handles	*Reference*
Handles	*Note*
Handles	*Appointment Transient Contact SDO*
Handles	*Appointment Transient SDO*
Handles	*Referable Product*
Handles	*Classification Assignment*
Handles	*Note Descriptive Flexfields*
Handles	*Trading Community Original System Mapping Identifier Additional Information*
Handles	*Source System Reference*
Handles	*Appointment Transient Assignee SDO*

Operations

- *getReference*
- *createReference*
- *updateReference*
- *mergeReference*

- *findReference*
- *processReference*
- *processCSReference*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getReference

A web service method of Get operation for Sales Reference Customer SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	The system generated identifier for this Reference Party.

Response Payload

Element Name	Type	Description
result	*Reference*	The parameter returns the Sales Reference Customer SDO that matches the inbound key attributes.

createReference

A web service method of Create operation for Sales Reference Customer SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
reference	*Reference*	The parameter for the Sales Reference Customer SDO to be created.

Response Payload

Element Name	Type	Description
result	*Reference*	The parameter returns the created Sales Reference Customer SDO.

updateReference

A web service method of Update operation for Sales Reference Customer SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
reference	*Reference*	The parameter for the Sales Reference Customer SDO to be updated.

Response Payload

Element Name	Type	Description
result	*Reference*	The parameter returns the updated Sales Reference Customer SDO.

mergeReference

A web service method of Merge operation for Sales Reference Customer SDO. It performs an update if the object exists or an insert if the object does not already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
reference	*Reference*	The parameter for the Sales Reference Customer SDO to be merged.

Response Payload

Element Name	Type	Description
result	*Reference*	The parameter returns the merged Sales Reference Customer SDO.

findReference

A web service method of Find operation for Sales Reference Customer SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findReference.

Response Payload

Element Name	Type	Description
result	*Reference*	The parameter returns a list of Sales Reference Customer SDO that satisfies the inbound criteria.

processReference

A web service method of Bulk load operation for Sales Reference Customer SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The parameter indicates what action shall be performed, such as create, update, merge, or delete.
reference	*Reference*	The parameter for a list of Sales Reference Customer SDOs to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter which controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains only the key attributes or the full object.

Response Payload

Element Name	Type	Description
result	*Reference*	The parameter returns a list of Sales Reference Customer SDO that is successfully processed.

processCSReference

An operation to apply the changes back to the data source for Sales Reference Customer SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter which controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains only the key attributes or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The parameter returns the result of the operation including a list of created/updated data objects, and all warning and informational messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The parameter returns the label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The parameter returns the date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	The parameter returns a list of service data objects defined on this service. For each service

Element Name	Type	Description
		data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getEntityList	ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	View Sales Reference Customer	Allows viewing of pages displaying information about sales reference customers, such as their names and reference status.
mergeReference	ZBS_MANAGE_SALES_REFERENCE_CUSTOMER_PRIV	Manage Sales Reference Customer	Allows management of sales reference customers in the application.
getReference	ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	View Sales Reference Customer	Allows viewing of pages displaying information about sales reference customers, such as their names and reference status.
findReference	ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	View Sales Reference Customer	Allows viewing of pages displaying information about sales reference customers, such as their names and reference status.
createReference	ZBS_MANAGE_SALES_REFERENCE_CUSTOMER_PRIV	Manage Sales Reference Customer	Allows management of sales reference customers in the application.
getDfltObjAttrHints	ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	View Sales Reference Customer	Allows viewing of pages displaying information about sales reference customers, such as their names and reference status.
processCSReference	ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	View Sales Reference Customer	Allows viewing of pages displaying information about sales reference customers, such as their names and reference status.
processReference	ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	View Sales Reference Customer	Allows viewing of pages displaying information about sales reference customers, such as their names and reference status.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getServiceLastUpdateTime	ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	View Sales Reference Customer	Allows viewing of pages displaying information about sales reference customers, such as their names and reference status.
updateReference	ZBS_MANAGE_SALES_REFERENCE_CUSTOMER_PRIV	Manage Sales Reference Customer	Allows management of sales reference customers in the application.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	Channel Sales Director	Supervises channel roles to support partner relationships and transactions.
ZBS_VIEW_SALES_REFERENCE_CUSTOMER_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ZBS_MANAGE_SALES_REFERENCE_CUSTOMER_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			attributes as needed, and view lead age and status.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_READ_ONLY_DUTY	Lead Registration Processing Read Only	Read Only role for Lead Registration Processing Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_READ_ONLY_DUTY	Personal Campaign Management Read Only	Read Only role for Personal Campaign Management Duty.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_READ_ONLY_DUTY	Product Recommendation Analysis Read Only	Read Only role for Product Recommendation Analysis Duty
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			duties include exporting forecast information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_READ_ONLY_DUTY	Sales Forecasting Management Read Only	Read Only role for Sales Forecasting Management Duty.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_READ_ONLY_DUTY	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_SALES_DIRECTOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_READ_ONLY_DUTY	Territory Management Read Only	Read Only role for Territory Management Duty.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Appointment Transient Assignee

A participant in an appointment and each instance of a recurring appointment. The participant is an internal resource.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TransientAssignee

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Appointment Transient*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityAssigneeId	long	The unique identifier for the appointment resource participant. • Primary Key
ActivityId	long	The unique identifier of the activity.
AppointmentResponseCd	string	The response to an appointment invitation such as Accepted, Rejected, and Tentatively Accepted.
AssigneeId	long	The identifier of the party corresponding to resource participating at the appointment.
AssigneeRsrcOrgId	long	The identifier of the organization to which the resource belongs.
OwnerFlag	boolean	The attribute that indicates that the appointment resource participant is also the appointment owner.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
ShowTimeAsCd	string	The attribute to show a resource time as Busy or Available on a calendar.

Appointment Transient Category

A category that the appointment and its instances belong to, such as a phone call or demonstration.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TransientCategory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Appointment Transient*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityCategoryId	long	The unique identifier for the Appointment Category table. • Primary Key
ActivityId	long	The unique identifier of the activity.
CategoryCd	string	The attribute for lookup code for category.

Appointment Transient Contact

A contact participant in an appointment and each instance of a recurring appointment.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TransientContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Appointment Transient*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*

Relationship Type	Object or Service
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityContactId	long	The identifier of the row in the intersection table between Appointment and Contact. • Primary Key
ActivityId	long	The unique identifier of the activity.
ContactId	long	The Party id of the contact.
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.

Name	Type	Description
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.

Appointment Transient Note

A note for an appointment and each instance of a recurring appointment.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TransientNote

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Appointment Transient*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
NoteId	long	The unique identifier of the note. • Primary Key
NoteTxt	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The description of the note.
NoteTypeCode	string	The lookup code for the type of the note associated to the appointment, such as, General, Reference, or Special.
PartyId	string	The unique identifier of the contact party.

Name	Type	Description
PartyName	string	The name of the party.
SourceObjectCode	string	Indicates that the object associated to the appointment is a Note.
SourceObjectId	long	The Note id associated to the appointment.
VisibilityCode	string	The Lookup code for note visibility, such as private, internal or external.

Appointment Transient

A individual appointment or an instance of a recurring appointment. For example, monthly lunchtime sales meetings or a client visit.

QName: {http://xmlns.oracle.com/apps/crmCommon/activities/activitiesService/}TransientAppointment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Appointment Transient Category SDO*
Contains	*Appointment Transient Note SDO*
Contains	*Appointment Transient Assignee SDO*
Contains	*Appointment Transient Contact*
Contained by	*Opportunity*
Contained by	*Reference*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Opportunity Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActivityDescription	string	The description of the appointment.
ActivityId	long	The unique identifier of the activity. • Primary Key
ActivityLocationTxt	string	The location of the appointment.
ActivityName	string	The subject of the appointment.
AlarmFlag	boolean	Indicates whether a reminder alarm should start prior to the appointment.
AllDayFlag	boolean	Indicates the appointment is an all-day appointment.
AppointmentAssignee	*Appointment Transient Assignee*	Not used in V1.0 for appointment.
AppointmentContact	*Appointment Transient Contact*	The contact populated on the appointment using its party id.
AppointmentNote	*Appointment Transient Note*	The appointment note.
ApptAlarmTmMinimumNumber	long	Specifies how long the Alarm Notice Time should be in minutes.
AsgnDenormFlag	boolean	Not used in V1.0 for appointment.
AsgnManualFlag	boolean	Not used in V1.0 for appointment.
AsgnSystemFlag	boolean	Not used in V1.0 for appointment.
CategoryCodeTransient	string	The lookup code corresponding to the category set on the appointment.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CustomerId	long	The identifier of the customer on the appointment.
CustomerName	string	The name of the customer on the appointment.
CustomerPartyType	string	The customer type of the customer assigned to the appointment.
DoNotRouteFlag	boolean	Not used in V1.0 for appointment.
EditMode	string	Not used in V1.0 for appointment.
FuseParticipants	string	Internal Attribute. Do not use.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LockAsgnFlag	boolean	Not used in V1.0 for appointment.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
Owner	string	The name of the appointment owner.
OwnerId	long	The Party Id of the appointment owner.
OwnerRsrcOrgId	long	The identifier corresponding to the organization to which the appointment owner belongs.
PartyId	long	The unique identifier of the contact party.
PartyId1	long	The name of the party.

Name	Type	Description
PartyName	string	The name of the party.
PartyName1	string	The name of the party.
PlannedDurationNumber	decimal	Not used in V1.0 for appointment.
PlannedDurationUOMCd	string	Not used in V1.0 for appointment.
PlannedEndDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The appointment end date and time.
PlannedStartDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The appointment start date and time.
RecurApptId	long	The identifier of the appointment record describing recurrence.
RecurDay	long	The week days the appointment can be recurring on.
RecurEndDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Specifies a specific date when recurrence stops.
RecurExceptionFlag	boolean	Indicates that this is an exception in a recurrence series.
RecurFlag	boolean	Indicates that the appointment is recurring.
RecurFreqNumber	long	Recurrence frequency, such as, Every x Days, Every x Weeks, Every x Months, Every x Years.
RecurFriFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Friday.
RecurMonFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Monday.
RecurMonth	string	In yearly recurrence, indicates the month appointments occur in.
RecurOccursNumber	long	The number of recurrence instances.
RecurOrigInstDt	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The first date and time an appointment occurs in a recurring series.

Name	Type	Description
RecurPattern	string	Indicates recurrence patterns such as Third Week of Every Month.
RecurReplaceCd	string	Not used in V1.0 for appointment.
RecurSatFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Saturday.
RecurSunFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Sunday.
RecurThuFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Thursday.
RecurTueFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Tuesday.
RecurTypeCd	string	Indicates the type of recurrence such as Daily, Weekly, Monthly, Yearly.
RecurWedFlag	boolean	Indicates in weekly recurrence patterns that appointments occur on Wednesday.
RecurWeekDayCd	string	Indicates if the appointment should occur every day including weekends or just on week days, applicable for daily recurring appointments.
ReferenceCustomerId	long	The identifier corresponding to the reference customer set on the appointment.
ReferenceCustomerName	string	The reference customer name set on the appointment.
Response	string	The response of the participant, such as Accepted, Rejected, Tentatively Accepted.
ShowTimeAs	string	Indicates how the time between the appointment start and end date-time shows on a participant's calendar, such as Busy.
SourceObjectCd	string	Indicates the object type the appointment is related to.
SourceObjectCodeMeaningTransient	string	The code indicating the type of business object associated with the appointment, examples: LEAD or OPPORTUNITY.

Name	Type	Description
SourceObjectId	long	The object identifier to which the appointment is related.
TemplateFlag	boolean	Not used in V1.0 for appointment.
TemplateId	long	Not used in V1.0 for appointment.
TransientCategory	*Appointment Transient Category*	The category of an appointment.
VisibilityCd	string	Not used in V1.0 for appointment.

Classification Assignment

The classification code assigned to a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CodeAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Sales Competitor*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Reference*
Handled by	*Sales Reference Customer*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party*
Handled by	*Sales Competitor Service*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party Territory service*
Handled by	*Sales Party Resource Service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassCategory	string	The name of the classification category.
ClassCode	string	The code of the classification.
CodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an object. It is primary key and system generated. • Primary Key
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableKey1	string	The first column of the alphanumeric or multi-part foreign key.
OwnerTableKey2	string	The second column of the alphanumeric or multi-part foreign key.
OwnerTableKey3	string	The third column of the alphanumeric or multi-part foreign key.
OwnerTableKey4	string	The fourth column of the alphanumeric or multi-part foreign key.
OwnerTableKey5	string	The fifth column of the alphanumeric or multi-part foreign key.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PrimaryFlag	boolean	Indicator that specifies if this is the primary class code of a class category for the

Name	Type	Description
		organization. Y stands for the primary class code and N stands for all others.
Rank	decimal	Ranks classes if multiple classes are assigned to a party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Note

The object that captures comments, information, or instructions for an Oracle Fusion Applications business object.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/noteService}Note

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Note Descriptive Flexfields*
Contained by	*Objective*
Contained by	*Opportunity*
Contained by	*Sales Cloud Account*
Contained by	*Sales Cloud Household*
Contained by	*Sales Cloud Contact*
Contained by	*Activity*
Contained by	*Sales Competitor*

Relationship Type	Object or Service
Contained by	*Sales Lead*
Contained by	*Business Plan*
Contained by	*Program Enrollments*
Contained by	*Reference*
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactRelationshipId	long	The identifier of the contact relationship record in Trading Community Architecture (TCA).

Name	Type	Description
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreatorPartyId	long	This is the party identifier for the note creator.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeleteFlag	boolean	Indicates whether the user has access to delete the note.
Dff	*Note Descriptive Flexfields*	The descriptive flex field segment.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record
NoteAttributeCategory	string	The contextual flex field for development usage.
NoteAttributeUid1	string	The flex field for development usage.
NoteAttributeUid2	string	The flex field for development usage.
NoteAttributeUid3	string	The flex field for development usage.
NoteAttributeUid4	string	The flex field for development usage.
NoteAttributeUid5	string	The flex field for development usage.
NoteId	long	The unique identifier of the note.

Name	Type	Description
		• Primary Key
NoteNumber	string	The alternate unique identifier of the note. A user key that is system generated or from an external system.
NoteTitle	string	The title of the note entered by the user.
NoteTxt	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	This is the column that stores the actual note text.
NoteTypeCode	string	This is the note type code for categorization of note.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
SourceObjectCode	string	This is the source_object_code for the source object as defined in OBJECTS Metadata.
SourceObjectId	string	This is the source_object_Uid for the source object such as Activities, Opportunities, and so on defined in OBJECTS metadata.
UpdateFlag	boolean	Indicates whether the user can update the note.
VisibilityCode	string	This is the attribute to specify the visibility level of the note.

Note Descriptive Flexfields

The descriptive flex field that captures additional information for notes, such as a priority or status.

QName: {http://xmlns.oracle.com/apps/crmCommon/notes/flex/noteDff/}NoteDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Note*

Relationship Type	Object or Service
Handled by	*Business Plan Service*
Handled by	*Sales Reference Customer*
Handled by	*Appointment Service*
Handled by	*Sales Cloud Contact*
Handled by	*Sales Objective*
Handled by	*Sales Lead Service Version 2*
Handled by	*Activity Service*
Handled by	*Opportunity Service*
Handled by	*Sales Competitor Service*
Handled by	*Sales Cloud Household*
Handled by	*Partner Program Enrollment Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
NoteId	long	The unique identifier of the note. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Referable Product

The product purchased by a reference customer where the customer agreed to endorse it as part of a reference program.

QName: {http://xmlns.oracle.com/apps/sales/baseSales/references/referenceService/}ReferableProduct

Logical Business Objects

- CRM : Sales : Sales Reference Customer

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Reference*
Handled by	*Sales Reference Customer*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.

Name	Type	Description
InventoryItemId	long	The item identifier for the referenceable product.
InventoryOrgId	long	The item organization identifier for the referenceable product.
KeyContactId	long	The key contact party identifier.
KeyContactRelationId	long	The key contact relationship identifier.
LastOrderDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date when a customer most recently ordered the Referenceable Product.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LevelCode	string	The information regarding the reference customer implementation level of the referenceable product (e.g. IMPLEMENTATION, IN_PRODUCTION, NO_LONGER_USING).
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
ProdGroupName	string	The product group name of the referenceable product.
ProductGroupId	long	The product group identifier for the referenceable product.
Quantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The quantity of referenceable product purchased.
ReferableCode	string	The code that indicates if the reference will be a reference for this referable product.

Name	Type	Description
ReferableProductName	string	The referable product or product group name.
ReferenceProductId	long	The referable product identifier. • Primary Key
Revenue	decimal	The revenue amount for the referenceable product purchase.
RevnCurrencyCode	string	The revenue amount currency code.
RowTypeCode	string	The code that indicates if the referenceable product is a product or product group.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
SubjectId	long	The key contact party identifier.
UOMCode	string	The unit of measure for the specified referenceable product quantity.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Reference

The additional reference attributes such as how many times this customer was used as a reference, the opportunities in which they were involved, and associations to case studies and collateral for that reference.

QName: {http://xmlns.oracle.com/apps/sales/baseSales/references/referenceService/}Reference

Logical Business Objects

- CRM : Sales : Sales Reference Customer

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Reference Supported Activity*
Contains	*Classification Assignment*
Contains	*Note*
Contains	*Appointment Transient SDO*
Contains	*Referable Product*
Handled by	*Sales Reference Customer*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Appointment	*Appointment Transient*	Indicates the label for the component showing the list of appointments created for the sales reference customer.
City	string	The name of the city.
ClassCode	string	Indicates the reference primary industry code.
CodeAssignment	*Classification Assignment*	The classification code assigned to a trading community member.
CodeAssignmentId	long	Indicates the identifier for the reference primary industry record in the Code Assignments table.
Comments	string	The comments for the record.
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
CurrentFyPotentialRevenue	decimal	The organization's potential revenue for the fiscal year.
CustomerContactPartyId	long	The party ID of the contact that maps to the sales reference customer organization.
CustomerContactRelationId	long	The reference customer contact relationship identifier that is used to identify the customer contact for the reference customer.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EmployeesTotal	decimal	The total number of employees.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
IncorpYear	int	The year the business was incorporated.
IndustryName	string	Indicates the reference primary industry name.
IntContactPartyId	long	The party ID of the internal contact that maps to the deploying organization.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
NextFyPotentialRevenue	decimal	The organization's potential revenue for next fiscal year.

Name	Type	Description
Note	*Note*	The note data object that captures comments, information, or instructions for an Oracle Fusion Applications business object.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationProfileId	long	The unique identifier for organization profiles which is a system-generated primary key.
OrganizationSize	string	The size of an organization based on revenue and number of employees.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyName1	string	The reference customer contact name.
PartyName2	string	The reference internal contact name.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PostalCode	string	The postal code element of the address.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PublicPrivateOwnershipFlag	boolean	Indicates the ownership of the organization, where Y signifies private ownership and N signifies public ownership.
ReferableProduct	*Referable Product*	The product purchased by a reference customer where the customer agreed to endorse it as part of a reference program.

Name	Type	Description
ReferenceRankNumber	string	The ranking number for a reference.
ReferenceSuppActivity	*Reference Supported Activity*	The activity type in which the reference customer agreed to engage.
ReferenceTypeCode	string	The level at which a reference is participating in the reference customer program.
RelationshipRecId	long	The sequence-generated unique identifier of the relationship record.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
State	string	The name of the state.
Status	string	The status of the record.
StatusCode	string	The pre-defined code used to indicate the status.
SubjectId	long	The attribute points to reference customer contact party identifier.
URL	string	The destination URL associated with a specific Google AdWords ad.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Reference Supported Activity

The activity that supports reference programs.

QName: {http://xmlns.oracle.com/apps/sales/baseSales/references/referenceService/}ReferenceSuppActivity

Logical Business Objects

- CRM : Sales : Sales Reference Customer

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Reference*
Handled by	*Sales Reference Customer*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
SuppActivityCode	string	The supported activity type code.
SuppActivityId	long	The reference supported activity identifier. • Primary Key

Name	Type	Description
ThresholdNumber	long	The maximum number of times the reference customer is willing to participate in the supported activity for a given threshold period.
ThresholdPeriod	string	The frequency of the related threshold number for a supported activity type.
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*
Contained by	*Location Details*
Contained by	*Household*
Contained by	*Contact Preference*
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*

Relationship Type	Object or Service
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*
Contained by	*Trading Community Address Purpose*
Contained by	*Telex*
Contained by	*Phone*
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*
Contained by	*Trading Community Person Details*
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*
Contained by	*Trading Community Customer Account Site Use*
Contained by	*Relationship*
Contained by	*Electronic Data Interchange*
Contained by	*Trading Community Customer Account or Site Role*
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*

Relationship Type	Object or Service
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.

Name	Type	Description
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*

Relationship Type	Object or Service
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Sales Status Category Mapping

Service to define the set of allowed revenue status categories for a given opportunity status category.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/sales/baseSales/common/salesLookups/salesLookupService/}StatusCategoryMappingService

Service WSDL URL: https://servername/crmService/StatusCategoryMappingService?WSDL

Logical Business Objects

- CRM : Opportunity Management : Opportunity

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Sales Status Category Mapping SDO*

Operations

- *getStatusCategoryMapping*
- *createStatusCategoryMapping*
- *updateStatusCategoryMapping*
- *deleteStatusCategoryMapping*
- *mergeStatusCategoryMapping*
- *findStatusCategoryMapping*
- *processStatusCategoryMapping*
- *processCSStatusCategoryMapping*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getStatusCategoryMapping

Get operation for Sales Status Category Mapping SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
opptyStatusCategoryOrderId	long	The unique identifier for the Opportunity Status Category Order.

Response Payload

Element Name	Type	Description
result	*Sales Status Category Mapping*	The parameter returns the Sales Status Category Mapping SDO that matches the inbound key attributes.

createStatusCategoryMapping

A web service method of Create operation for Sales Status Category Mapping SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
statusCategoryMapping	*Sales Status Category Mapping*	The parameter for the Sales Status Category Mapping SDO to be created.

Response Payload

Element Name	Type	Description
result	*Sales Status Category Mapping*	The parameter returns the created Sales Status Category Mapping SDO.

updateStatusCategoryMapping

A web service method of Update operation for Sales Status Category Mapping SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
statusCategoryMapping	*Sales Status Category Mapping*	The parameter for the Sales Status Category Mapping SDO to be updated.

Response Payload

Element Name	Type	Description
result	*Sales Status Category Mapping*	The parameter returns the updated Sales Status Category Mapping SDO.

deleteStatusCategoryMapping

A web service method of Delete operation for Sales Status Category Mapping SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
statusCategoryMapping	*Sales Status Category Mapping*	The parameter for the Sales Status Category Mapping SDO to be deleted.

Response Payload

Element Name	Type	Description
result	void	The parameter returns the deleted Sales Status Category Mapping SDO.

mergeStatusCategoryMapping

A web service method of Merge operation for Sales Status Category Mapping SDO. It performs an update if the object exists or an insert if the object does not already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
statusCategoryMapping	*Sales Status Category Mapping*	The parameter for the Sales Status Category Mapping SDO to be merged.

Response Payload

Element Name	Type	Description
result	*Sales Status Category Mapping*	The parameter returns the merged Sales Status Category Mapping SDO.

findStatusCategoryMapping

A web service method of Find operation for Sales Status Category Mapping SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, and so on.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The parameter is not used for the method findStatusCategoryMapping.

Response Payload

Element Name	Type	Description
result	*Sales Status Category Mapping*	The parameter returns a list of Sales Status Category Mapping SDO that satisfies the inbound criteria.

processStatusCategoryMapping

A web service method of Bulk Load operation for Sales Status Category Mapping SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The parameter which indicates what action shall be performed, such as create, update, merge, or delete.
statusCategoryMapping	*Sales Status Category Mapping*	The parameter with a list of Sales Status Category Mapping SDO to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter which controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains only the key attributes or the full object.

Response Payload

Element Name	Type	Description
result	*Sales Status Category Mapping*	The parameter returns a list of Sales Status Category Mapping SDO that is successfully processed.

processCSStatusCategoryMapping

An operation to apply the changes back to the data source for Sales Status Category Mapping SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The parameter which controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound contains only the key attributes or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The parameter returns the result of the operation including a list of created/updated data objects, and all warning and informational messages.

getDfltObjAttrHints

Get operation for Status Category that returns control hints defined on a service view and its attributes.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.

Element Name	Type	Description
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The parameter returns the control hints for the method getDfltObjAttrHints.

getServiceLastUpdateTime

Get operation for Status Category that returns the last modified time for the service schema files.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The parameter returns the last modified time for the method getServiceLastUpdateTime.

getEntityList

Get operation for Status Category that returns the list of service view instances.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	The parameter returns the list of service view instances.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
findStatusCategoryMapping	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
findStatusCategoryMapping	MOO_VIEW_OPPORTUNITY_PRIV	View Opportunity	Allows viewing of opportunity pages, including the work area. A work area is the landing page for accessing the frequently used tasks and reports useful for managing relevant opportunities.
processCSStatusCategoryMapping	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
updateStatusCategoryMapping	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
createStatusCategoryMapping	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
getStatusCategoryMapping	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
deleteStatusCategoryMapping	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles,

Operation Name	Privilege Code	Privilege Name	Privilege Description
			lookups, flexfields, and assignment rules, among others.
processStatusCategoryMapping	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.
mergeStatusCategoryMapping	MOO_SET_UP_OPPORTUNITY_PRIV	Set Up Opportunity	Allows setup of opportunity application features, such as sales methods, sales coach, credit allocation templates, profiles, lookups, flexfields, and assignment rules, among others.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_PARTNER_SALES_REPRESENTATIVE_DUTY	Opportunity Partner Sales Representative	Manages all aspects of the application. This role is for partner salespersons.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	Channel Sales Manager	Manages the indirect sales pipeline by routing leads to partners, reviewing lead registrations, approving or rejecting registrations, and forecasting sales.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			builds pipeline, manages leads and opportunities and performs sales forecasting.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	Channel Account Manager	Sets the objectives and goals for partners. Works with a partner organization to identify what programs best fit the partner organization and the training that the partner should take to increase skill sets or qualify for programs.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZBS_SALES_RESTRICTED_USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
MOO_VIEW_OPPORTUNITY_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
MOO_SET_UP_OPPORTUNITY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			external, internal, and anonymous pages.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_CSO_KNOWLEDGE_HOME_SERVICE_DUTY	Knowledge Home for Service	Knowledge Home duty role strictly for service access
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_READ_ONLY_DUTY	Lead Registration Processing Read Only	Read Only role for Lead Registration Processing Duty.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVAL_DUTY	Marketing Approval	Reviews and approves secured marketing campaigns by viewing detailed campaign, list, segment, and treatment information from the campaign, audience, and treatment work areas.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKT_MARKETING_APPROVER_ABSTRACT	Marketing Approver	Approves partner sales lead registrations submitted by external partners.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_MAINTENANCE_DUTY	Partner Account Maintenance	Maintains a partner account, including managing members and partner profile information. This role is for members of the partner account team and their management chain.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_ CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_ CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_ CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_RESTRICTED_ USER_JOB	ORA_MKT_PERSONAL_ CAMPAIGN_MANAGEMENT_ READ_ONLY_DUTY	Personal Campaign Management Read Only	Read Only role for Personal Campaign Management Duty.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_ RECOMMENDATION_ANALYSIS_ DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_ RECOMMENDATION_ANALYSIS_ DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_RESTRICTED_ USER_JOB	ORA_ZSP_PRODUCT_ RECOMMENDATION_ANALYSIS_ READ_ONLY_DUTY	Product Recommendation Analysis Read Only	Read Only role for Product Recommendation Analysis Duty
ORA_ZPM_CHANNEL_SALES_ MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_ZPM_CHANNEL_ACCOUNT_ MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_READ_ONLY_DUTY	Sales Forecasting Management Read Only	Read Only role for Sales Forecasting Management Duty.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_READ_ONLY_DUTY	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZPM_CHANNEL_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZPM_CHANNEL_ACCOUNT_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_READ_ONLY_DUTY	Territory Management Read Only	Read Only role for Territory Management Duty.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Sales Status Category Mapping

The definition of the set of allowed revenue status categories for a given opportunity status category.

QName: {http://xmlns.oracle.com/apps/sales/baseSales/common/salesLookups/salesLookupService/}StatusCategoryMapping

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Sales Status Category Mapping*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConflictId	long	The attribute value is used to guarantee the uniqueness of the row when duplicates are created in different databases.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OpptyStatusCategory	string	The attribute for status category.
OpptyStatusCategoryOrderId	long	The status category mapping identifier. • Primary Key
RevnLost	string	The attribute that indicates whether the revenue line can be in the LOST status category when the opportunity uses this status category.
RevnNosale	string	The attribute that indicates whether the revenue line can be in the NO SALE status category when the opportunity uses this status category.
RevnOpen	string	The attribute that indicates whether the revenue line can be in the OPEN status category when the opportunity uses this status category.
RevnWon	string	The attribute that indicates whether the revenue line can be in the WON status category when the opportunity uses this status category.

Name	Type	Description
UserLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the row was last updated.

Sales Territory Custom Business Object (Deprecated)

Service to operate on custom business objects created in the Oracle Sales Cloud Territory Management application. The supported operations are create, update, delete, and find. A custom business object stores the extended information for an Oracle Fusion business object.

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/custExtn/territories/territoryService/}SalesTerrMgmtCustomObjectService

Service WSDL URL: https://servername/crmService/SalesTerrMgmtCustomObjectService?WSDL

Logical Business Objects

- CRM : Territory Management : Sales Territory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Custom Business Object*

Operations

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*
- *createEntity*
- *getEntity*
- *updateEntity*
- *deleteEntity*
- *findEntity*
- *mergeEntity*

- *processEntity*

getDfltObjAttrHints

Retrieves the user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on the service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name which is the internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Retrieves the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Retrieves the list of service data objects defined on the service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	The list of service data objects defined on the service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

createEntity

Creates an Oracle Fusion territory management custom object record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A required input parameter of the createEntity web service method. It includes the attribute values that the records will be created with.
objectName	string	A required input parameter of the createEntity web service method. Use the API name of the custom object you want to create.

Response Payload

Element Name	Type	Description
result	anyType	The full set of attributes and child entities of the record.

getEntity

Retrieves a single record of an Oracle Fusion territory management custom object based on the unique identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
keyValue	string	A required input parameter of the getEntity web service method. Includes the row identifier of the record you want to query for.
objectName	string	A required input parameter of the getEntity web service method. Use the API name of the custom object you want to query for.

Response Payload

Element Name	Type	Description
result	anyType	The full set of attributes and child entities of the record.

updateEntity

Updates a set of records of the Oracle Fusion territory management custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A required input parameter of the updateEntity method. All records matching the IDs specified in the input object are updated with the corresponding input attribute values that are specified.
objectName	string	A required input parameter of the updateEntity web service method. Use the API name of the custom object you want to update.

Response Payload

Element Name	Type	Description
result	anyType	Returns the updated set of records.

deleteEntity

Deletes a set of records of an Oracle Fusion territory management custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A required input parameter of the deleteEntity Web service method. All records matching the input attribute values specified in this input object are deleted.
objectName	string	A required input parameter of the deleteEntity Web service method. Use the API name of the custom object you want to delete.

Response Payload

Element Name	Type	Description
result	void	The deleteEntity web service method returns void.

findEntity

Retrieves a set of Oracle Fusion territory management custom object records based on a specified criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	A required input parameter of the findEntity web service method. Includes optional search criteria, sort filter, and attributes to be excluded when returning the set of records. Also includes the option to return any of the custom object's child entities.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	This input parameter is not applicable to the findEntity web service method.
objectName	string	A required input parameter of the findEntity web service method. Use the API name of the custom object you want to query for.

Response Payload

Element Name	Type	Description
result	anyType	The return value of the findEntity web service method. Includes the full set of attributes and child entities of the records.

mergeEntity

Method not available.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	Parameter not available.
objectName	string	Parameter not available.

Response Payload

Element Name	Type	Description
result	anyType	Parameter not available.

processEntity

Method not available.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Parameter not available.
object	anyType	Parameter not available.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Parameter not available.
objectName	string	Parameter not available.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	anyType	Parameter not available.

Custom Business Object

A service to create, update, delete, or find custom business objects created in the Oracle Fusion CRM application. A custom business object stores extended information for an Oracle Fusion business object.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/custom/extnService/}CustomReferenceService

Service WSDL URL: https://servername/crmService/CustomReferenceService?WSDL

Logical Business Objects

- CRM : CRM Application Composer : CRM Extensible Object

Operations

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*
- *invokeObjectFunction*
- *createEntity*
- *getEntity*
- *updateEntity*
- *deleteEntity*
- *findEntity*
- *mergeEntity*
- *processEntity*

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create,

Element Name	Type	Description
		update, merge, and delete operations can be performed on the object.

invokeObjectFunction

invoke custom object row function.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
row	anyType	DataObject used to invoke the script
viewName	string	Custom Object type name
scriptName	string	row function name
params	anyType	row function parameters

Response Payload

Element Name	Type	Description
result	anyType	DataObject

createEntity

Create operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject created for the custom object.

getEntity

Get operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
keyValue	string	A list of key values for identifying the custom object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject identified by the keyValue.

updateEntity

Update operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be updated. The DataObject must include key fields for identifying the updated record, as well as the fields to be updated.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject updated for the custom object.

deleteEntity

Delete operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be deleted. The DataObject must include key fields for identifying the deleted record.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	void	DataObject that is deleted.

findEntity

Find operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	List of DataObjects identified by the findCriteria.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Search control.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObjects found

mergeEntity

merge with existing custom object if exist, create new object if does not exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be merged. The DataObject must include key fields for identifying the record, as well as the fields to be merged.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject result from the merge

processEntity

batch process for custom object operation

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Operation name
object	anyType	DataObjects to be batch processed
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	process control
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject result list

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
processEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea
getEntityList	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
updateEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea
getEntity	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
deleteEntity	ZCX_DELETE_CUSTOM_OBJECT_PRIV	DELETE custom object resources (WorkArea)	PermissionSet to DELETE for custom object WorkArea
findEntity	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
getDfltObjAttrHints	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
createEntity	ZCX_CREATE_CUSTOM_OBJECT_PRIV	CREATE custom object resources (WorkArea)	PermissionSet to CREATE for custom object WorkArea
getServiceLastUpdateTime	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
mergeEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea

Sales Territory Dimension Service

Service to operate on territory dimension and territory dimension member business objects. It can be used by third-party applications to perform standard query operations on territory dimension and territory dimension member business objects.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/territories/dimensionPublicService/}TerritoryDimensionPublicService

Service WSDL URL: https://servername/crmService/TerritoryDimensionPublicService?WSDL

Logical Business Objects

- CRM : Territory Management : Sales Territory Dimension

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Sales Territory Dimension Member*
Handles	*Sales Territory Dimension Member Translation*
Handles	*Sales Territory Dimension Translation*
Handles	*Sales Territory Dimension*

Operations

- *getTerritoryDimension*
- *findTerritoryDimension*
- *getTerritoryDimensionMember*
- *findTerritoryDimensionMember*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getTerritoryDimension

Retrieves territory dimension by the specified territory dimension identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
terrDimensionId	long	The identifier of the territory dimension to be retrieved.

Response Payload

Element Name	Type	Description
result	*Sales Territory Dimension*	The territory dimension record retrieved by the method.

findTerritoryDimension

Retrieves the territory dimensions for a given query criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria values to retrieve the records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The control value that indicates whether to retrieve translations or not.

Response Payload

Element Name	Type	Description
result	*Sales Territory Dimension*	The list of territory dimension objects matching the criteria.

getTerritoryDimensionMember

Retrieves the territory dimension member by a specified territory dimension member identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
terrDimMemberId	long	The identifier of the territory dimension member to be retrieved.

Response Payload

Element Name	Type	Description
result	*Sales Territory Dimension Member*	The sales territory dimension member record.

findTerritoryDimensionMember

Retrieves the territory dimension members for a given query criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria values to retrieve the records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The control value that indicates whether to retrieve the translations or not.

Response Payload

Element Name	Type	Description
result	*Sales Territory Dimension Member*	The list of territory dimension member objects matching the criteria.

getDfltObjAttrHints

Retrieves the user interface hints, such as the service data object label and the object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name which is the internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Retrieves the list of service data objects defined on the service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on the service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create,

Element Name	Type	Description
		update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MOT_MANAGE_SALES_ TERRITORY_PRIV	Manage Sales Territory	Allows managing of sales territories. A Territory is the jurisdiction of responsibility of a sales representative over a set of sales accounts.
All Operations	MOT_MANAGE_SALES_ TERRITORY_SETUP_PRIV	Manage Sales Territory Setup	Allows defining and managing of sales territory lookups, profile options, flexfields, and dimension data.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOT_MANAGE_SALES_ TERRITORY_SETUP_PRIV	ORA_MOT_TERRITORY_ MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
MOT_MANAGE_SALES_ TERRITORY_PRIV	ORA_MOT_TERRITORY_ MANAGEMENT_ ADMINISTRATION_DUTY	Territory Management Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
MOT_MANAGE_SALES_ TERRITORY_PRIV	ORA_MOT_TERRITORY_ MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
MOT_MANAGE_SALES_ TERRITORY_PRIV	ORA_MOT_TERRITORY_ MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MOT_TERRITORY_ MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_EXPORT_ MANAGEMENT_DUTY	Quota Export Management	Manages bulk export of all sales territory quota related objects.
ORA_MOT_TERRITORY_ MANAGEMENT_DUTY	ORA_MOT_QUOTA_ MANAGEMENT_DUTY	Quota Management	Manages sales territory quotas and territory quota formulas. Additional duties include incentive compensation goal management, user and roles management, and party information inquiry.
ORA_MOT_TERRITORY_ MANAGEMENT_ ADMINISTRATION_DUTY	ORA_MOT_QUOTA_ MANAGEMENT_ ADMINISTRATION_DUTY	Quota Management Administration	Manages sales territory quotas, quota setups, territory quota formulas, spread formulas, and seasonality groups, and can view quota plans. Additional duties include incentive compensation goal management, user and roles management, and party information inquiry.
ORA_MOT_TERRITORY_ MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_ MANAGEMENT_SETUP_DUTY	Quota Management Setup	Manages sales territory quota setup, quota plans, prediction and spread formula parameters, and seasonality groups. Runs sales territory quota synchronization and sales quota plan activation and completion processes. Additional duties include party information inquiry.
ORA_MOT_TERRITORY_ MANAGEMENT_ ADMINISTRATION_DUTY	ORA_MOT_TERRITORY_ MANAGEMENT_EXPORT_ IMPORT_DUTY	Territory Management Export Import	Manages sales territory export and import. Provides users with the ability to export territory data, modify it offline and import.
ORA_MOT_TERRITORY_ MANAGEMENT_DUTY	ORA_MOT_TERRITORY_ MANAGEMENT_EXPORT_ IMPORT_DUTY	Territory Management Export Import	Manages sales territory export and import. Provides users with the ability to export territory data, modify it offline and import.
ORA_MOT_TERRITORY_ MANAGEMENT_SETUP_DUTY	ORA_MOT_TERRITORY_ MANAGEMENT_T2P_MIGRATION_ DUTY	Territory Management T2P Migration	Manages sales territory export and import. Provides users with the ability to export territory data from a test environment and import into production.

Sales Territory Dimension

The details of the territory dimension. This information includes key attributes of the territory dimension and the dimension parameters.

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/territories/dimensionPublicService/}TerritoryDimension

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Territory Dimension Translation*
Handled by	*Sales Territory Dimension Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	Indicates whether the dimension is active or inactive.
Description	string	The free text description of the record.
DimensionCode	string	The type of dimension such as 'GEO', 'PRODUCT' and so on. The value for this column will come from a lookup.
Name	string	The name of the sales territory dimension.
PartitionId	long	The identifier of the dimension partition.
PartitionTypeCode	string	The type of the partition for the sales territory.
TerrDimensionId	long	The identifier of the territory dimension. • Primary Key
TerritoryDimensionTranslationService	*Sales Territory Dimension Translation*	The translated details of the territory dimension name and description.

Sales Territory Dimension Member

The details of the territory dimension member. This information includes key attributes of a territory dimension member.

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/territories/dimensionPublicService/}TerritoryDimensionMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Territory Dimension Member Translation*
Handled by	*Sales Territory Dimension Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	Indicates if the member is active or not.
Description	string	The free text description of the record.
IntegrationId	string	The common member identifier between Oracle Business Intelligence (OBI), Territory Management, and Cube.
Name	string	The name of the territory dimension member.
ParentDimMemberName	string	The name of the parent territory dimension member.
ParentTerrDimMemberId	long	The identifier of the parent territory dimension member.
PartitionId	long	The identifier of the dimension partition.
PartitionTypeCode	string	The type of the partition for the territory dimension member.

Name	Type	Description
SequenceHigh	long	The high sequence number for the dimension member.
SequenceLow	long	The low sequence number for the dimension member.
SortOrder	long	The sort order number for the dimension members.
TerrDimMemberId	long	The identifier for the territory dimension member. • Primary Key
TerrDimensionCode	string	The type of dimension such as 'GEO', 'PRODUCT', and so on. The value for this attribute will come from a lookup.
TerrDimensionId	long	The identifier of the territory dimension identifier.
TerritoryDimensionMemberTranslationService	*Sales Territory Dimension Member Translation*	The translated details of the territory dimension member name and description.
TypeCode	string	The type of members. The accepted values are 'NORMAL', 'UNSPECIFIED', and 'OTHERS'. All members except for OTHERS and UNSPECIFIED are marked as NORMAL.

Sales Territory Dimension Member Translation

The language translations of the territory dimension members.

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/territories/dimensionPublicService/}TerritoryDimensionMemberTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Territory Dimension Member*

Relationship Type	Object or Service
Handled by	*Sales Territory Dimension Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Description	string	The free text description of the record.
Language	string	The code of the language to which the contents of the translatable columns are translated. • Primary Key
Name	string	The name of the territory dimension member.
SourceLang	string	The code of the language in which the contents of the translatable columns were originally created.
TerrDimMemberId	long	The identifier of the territory dimension member. • Primary Key

Sales Territory Dimension Translation

The language translations of the territory dimensions.

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/territories/dimensionPublicService/}TerritoryDimensionTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Territory Dimension*
Handled by	*Sales Territory Dimension Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Description	string	The free text description of the record.
Language	string	The language into which the contents of the translatable columns are translated. • Primary Key
Name	string	The name of the sales territory dimension.
SourceLang	string	The language in which the contents of the translatable columns were originally created.
TerrDimensionId	long	The identifier of the territory dimension. • Primary Key

Sales Territory Proposal Service

Service to operate on territory proposal business objects. It can be used by third-party applications to perform standard and custom operations on the territory proposal business objects.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/oracle/apps/sales/territoryMgmt/territories/territoryService/}TerritoryProposalPublicService

Service WSDL URL: https://servername/crmService/TerritoryProposalPublicService?WSDL

Logical Business Objects

- CRM : Territory Management : Sales Territory Proposal

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Sales Territory Coverage Dimension*

Relationship Type	Object or Service
Handles	*Sales Territory Coverage*
Handles	*Sales Territory Proposal*
Handles	*Sales Territory Line of Business*
Handles	*Sales Territory*
Handles	*Sales Territory Resource*
Handles	*Sales Territory Inherited Dimension*
Handles	*Sales Territory Coverage Dimension Value*

Operations

- *reopenProposal*
- *requestProposalActivation*
- *getProposal*
- *createProposal*
- *updateProposal*
- *deleteProposal*
- *findProposals*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

reopenProposal

Reopens a territory proposal and changes the proposal status to 'DRAFT'.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
terrProposalId	long	The identifier of the proposal that needs to be reopened.

Response Payload

Element Name	Type	Description
result	void	The reopenProposal web service method returns void.

requestProposalActivation

Puts the proposal activation in the activation queue by date and changes the proposal status to 'PENDING ACTIVATION'.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
terrProposalId	long	The identifier of the proposal that needs to be activated.

Response Payload

Element Name	Type	Description
result	void	The requestProposalActivation web service method returns void.

getProposal

Retrieves territory proposal by the specified territory proposal ID (only Proposal attributes are returned).

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
terrProposalId	long	Identifier of the proposal to be retrieved.

Response Payload

Element Name	Type	Description
result	*Sales Territory Proposal*	The proposal object retrieved by the getProposal method.

createProposal

Creates a new territory proposal record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryProposalService	*Sales Territory Proposal*	The attributes of the territory proposal.

Response Payload

Element Name	Type	Description
result	*Sales Territory Proposal*	Returns the new territory proposal record.

updateProposal

Updates an existing territory proposal record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryProposalService	*Sales Territory Proposal*	The attributes of the territory proposal.

Response Payload

Element Name	Type	Description
result	*Sales Territory Proposal*	Returns the updated territory proposal record.

deleteProposal

Deletes a territory proposal record. It also deletes territories added to or created in the proposal being deleted. This is a private method and is for internal use only.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryProposalService	*Sales Territory Proposal*	The attributes of the territory proposal.

Response Payload

Element Name	Type	Description
result	void	The deleteProposal web service method returns void.

findProposals

Retrieves only proposals for a given query criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria values to retrieve the records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The control value that indicates whether to retrieve translations or not.

Response Payload

Element Name	Type	Description
result	*Sales Territory Proposal*	The list of proposal objects for a given query criteria.

getDfltObjAttrHints

Retrieves the user interface hints, such as the service data object label and the object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on the service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name which is the internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Retrieves the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Retrieves the list of service data objects defined on the service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on the service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create,

Element Name	Type	Description
		update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MOT_MANAGE_SALES_TERRITORY_PROPOSAL_PRIV	Manage Sales Territory Proposal	Allows managing of sales territory proposals, for example proposal name, description, and activation date.
findProposals	MOT_VIEW_SALES_TERRITORY_PRIV	View Sales Territory	Allows viewing of sales territories. A Territory is the jurisdiction of responsibility of a sales representative over a set of sales accounts.
getProposal	MOT_VIEW_SALES_TERRITORY_PRIV	View Sales Territory	Allows viewing of sales territories. A Territory is the jurisdiction of responsibility of a sales representative over a set of sales accounts.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOT_VIEW_SALES_TERRITORY_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_ADMINISTRATION_DUTY	Territory Management Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
MOT_VIEW_SALES_TERRITORY_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
MOT_VIEW_SALES_TERRITORY_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOT_MANAGE_SALES_ TERRITORY_PROPOSAL_PRIV	ORA_MOT_TERRITORY_ MANAGEMENT_ ADMINISTRATION_DUTY	Territory Management Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
MOT_MANAGE_SALES_ TERRITORY_PROPOSAL_PRIV	ORA_MOT_TERRITORY_ MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
MOT_MANAGE_SALES_ TERRITORY_PROPOSAL_PRIV	ORA_MOT_TERRITORY_ MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
MOT_MANAGE_SALES_ TERRITORY_PROPOSAL_PRIV	ORA_MOT_TERRITORY_ MANAGEMENT_ENTERPRISE_ ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MOT_TERRITORY_ MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_EXPORT_ MANAGEMENT_DUTY	Quota Export Management	Manages bulk export of all sales territory quota related objects.
ORA_MOT_TERRITORY_ MANAGEMENT_DUTY	ORA_MOT_QUOTA_ MANAGEMENT_DUTY	Quota Management	Manages sales territory quotas and territory quota formulas. Additional duties include incentive compensation goal management, user and roles management, and party information inquiry.
ORA_MOT_TERRITORY_ MANAGEMENT_ ADMINISTRATION_DUTY	ORA_MOT_QUOTA_ MANAGEMENT_ ADMINISTRATION_DUTY	Quota Management Administration	Manages sales territory quotas, quota setups, territory quota formulas, spread formulas, and seasonality groups, and can view quota plans. Additional duties include incentive compensation goal management, user and roles management, and party information inquiry.
ORA_MOT_TERRITORY_ MANAGEMENT_ENTERPRISE_ ADMINISTRATION_DUTY	ORA_MOT_QUOTA_ MANAGEMENT_ENTERPRISE_ ADMINISTRATION_DUTY	Quota Management Enterprise Administration	Manages sales territory quotas and territory quota formulas. Additional duties include incentive compensation goal management, user and roles management, and quota management setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_MANAGEMENT_SETUP_DUTY	Quota Management Setup	Manages sales territory quota setup, quota plans, prediction and spread formula parameters, and seasonality groups. Runs sales territory quota synchronization and sales quota plan activation and completion processes. Additional duties include party information inquiry.
ORA_MOT_TERRITORY_MANAGEMENT_ADMINISTRATION_DUTY	ORA_MOT_TERRITORY_MANAGEMENT_EXPORT_IMPORT_DUTY	Territory Management Export Import	Manages sales territory export and import. Provides users with the ability to export territory data, modify it offline and import.
ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	ORA_MOT_TERRITORY_MANAGEMENT_EXPORT_IMPORT_DUTY	Territory Management Export Import	Manages sales territory export and import. Provides users with the ability to export territory data, modify it offline and import.
ORA_MOT_TERRITORY_MANAGEMENT_DUTY	ORA_MOT_TERRITORY_MANAGEMENT_EXPORT_IMPORT_DUTY	Territory Management Export Import	Manages sales territory export and import. Provides users with the ability to export territory data, modify it offline and import.
ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_TERRITORY_MANAGEMENT_T2P_MIGRATION_DUTY	Territory Management T2P Migration	Manages sales territory export and import. Provides users with the ability to export territory data from a test environment and import into production.

Sales Territory

The various versions of a sales territory where each version record contains most of the key attributes of a territory. Most of the sales territory object components are child entities to a sales territory version, for example, territory rules, territory rule boundaries, territory rule boundary values, and territory resources.

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/territories/territoryService/}Territory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Territory Rule*
Contains	*Sales Territory Line of Business*
Contains	*Sales Territory Resource*
Contains	*Sales Territory Inherited Dimension*
Contained by	*Sales Territory Proposal*
Handled by	*Sales Territory Service*
Handled by	*Sales Territory Proposal Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ApplyOptionalValidationFlag	boolean	This is an obsolete attribute.
CoverageModel	string	Indicates if the dimensions of the territory are based on account attributes or partner attributes.
DeleteFlag	boolean	Indicates whether the user has access to delete the record. If the value is True, then the user has the access. The default value is False.
Description	string	The free text description of the record.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EligibleForQuotaFlag	boolean	Indicates whether the territory is going to change during a territory realignment. If the value is True, then the territory is unlikely to change during a major realignment and therefore a quota can be entered against the proposed definition.

Name	Type	Description
ForecastParticipationCode	string	The code for the forecast participation.
ForecastedByParentTerritoryFlag	boolean	Indicates if the forecast for the territory is made by its parent territory.
LatestVersionFlag	boolean	Indicates the latest active version of territory.
Name	string	The name of the sales territory.
OrganizationId	long	The unique identifier of the organization.
OrganizationName	string	The name of the party when the party type is Organization.
Owner	string	The owner of the sales territory.
OwnerOrgId	long	The identifier of the owner's organization.
OwnerResourceId	long	The identifier of the resource from CRM Foundation (JTF) resources.
ParentTerritoryId	long	The identifier of the parent sales territory.
PartnerId	long	The unique identifier of the partner.
PartnerName	string	The name of the partner associated with the territory.
PartnerProgramId	long	The specific program that a partner is participating in.
ProgramName	string	The name of the partner program to which the partner is enrolled.
ReviseQuotaFlag	boolean	Indicates whether a submitted quota needs to be revised.
RevisionDescription	string	The description of the reason for revising the quota.
RevisionReason	string	The user-defined reason for revising the quota.
SourceTerrId	long	The identifier of the territory from which the dimensions are inherited.

Name	Type	Description
SourceTerrLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the source territory was last updated. This attribute is related to the inheritance of dimensions by recipient territories from source territories.
SourceTerrName	string	The name of the territory from which the selected dimensions are inherited.
SourceTerrVersionId	long	The unique identifier of the source territory version.
StageCode	string	This is an obsolete attribute.
StatusCode	string	The pre-defined code used to indicate the status.
TerrProposalId	long	The identifier of the territory proposal.
TerritoryFunctionCode	string	Business function associated with the territory
TerritoryId	long	The unique identifier of the sales territory.
TerritoryInheritedDimension	*Sales Territory Inherited Dimension*	The dimension the recipient territory is inheriting from the source territory.
TerritoryLevel	long	The level of the territory in territory hierarchy.
TerritoryLineOfBusiness	*Sales Territory Line of Business*	Identifies the line of business that a territory is associated with. Each territory can be associated with single , multiple (or All) , or no line of business.
TerritoryNumber	string	The unique alternate identification number for the territory.
TerritoryResource	*Sales Territory Resource*	The list of sales territory resource objects.
TerritoryRule	*Sales Territory Rule*	The unique identifier of the territory rule.
TerritoryVersionId	long	The unique identifier of territory version. • Primary Key
TypeCode	string	The code for the type of sales territory.
UniqueTerritoryNumber	string	Unique identification number for this territory

Name	Type	Description
UpdateFlag	boolean	Indicates whether the user has access to update the record. If the value is True, then the user has the access. The default value is False.

Sales Territory Rule

An entity that organizes territory dimensions in the form of rules and enables territory definitions that can be either simple territories defined by a single rule or complex ones with multiple rules. This entity, along with territory rule boundary value, stores the dimensions of the territory in an expression form.

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/territories/territoryService/}TerritoryRule

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Territory Rule Boundary*
Contained by	*Sales Territory*
Handled by	*Sales Territory Service*
Handled by	*Sales Territory Proposal Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
RuleNumber	long	A unique number within a territory definition.
RuleOperatorCode	string	The code for identifying whether the coverage adds to or removes from the territory's jurisdiction. The accepted values are: EXCLUSION (for rule type EXCLUSION and PARTNER_EXCLUSION) and INCLUSION (for all other rule types, such as REGULAR, INCLUSION, PARTNER_REGULAR, PARTNER_INCLUSION, and INHERITANCE_OVERRIDE)

Name	Type	Description
RuleTypeCode	string	The code for the territory coverage type. If the territory coverage model is sales account centric, the accepted values are: REGULAR (for coverage based on sales account dimensionality or named accounts), INCLUSION (for manually included account coverage), and EXCLUSION (for manually excluded account coverage). If the territory coverage model is partner centric, the accepted values are: PARTNER_REGULAR (for coverage based on partner dimensionality), PARTNER_INCLUSION (for manually included partner coverage), and PARTNER_EXCLUSION (for manually excluded partner coverage). In case of inheritance, if the coverage is for a recipient territory, then the accepted value is INHERITANCE_OVERRIDE which indicates that the coverage overrides some of the inherited dimensionality.
TerrRuleId	long	The unique identifier of the territory rule. • Primary Key
TerritoryRuleBoundary1	*Sales Territory Rule Boundary*	The list of territory rule boundary objects.
TerritoryVersionId	long	The unique identifier of the territory version.

Sales Territory Rule Boundary

An entity associated with a territory rule boundary value to store the dimensions of the territory in an expression form. Dimension members are evaluated additively and the values within a dimension member are evaluated as choices.

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/territories/territoryService/}TerritoryRuleBoundary

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Territory Coverage Dimension Value*
Contained by	*Sales Territory Rule*
Handled by	*Sales Territory Service*

Relationship Type	Object or Service
Handled by	*Sales Territory Proposal Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Dimension	string	The name of the sales territory dimension.
TerrDimensionCode	string	The code for the sales territory dimension.
TerrRuleBoundaryId	long	The unique identifier of the territory rule boundary. • Primary Key
TerrRuleId	long	The identifier of the sales territory rule.
TerritoryRuleBndryValue1	*Sales Territory Rule Boundary Value*	The territory rule boundary value object.

Sales Territory Rule Boundary Value

The actual values of the dimensions for the territory.

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/territories/territoryService/}TerritoryRuleBndryValue

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Territory Rule Boundary*
Handled by	*Sales Territory Service*
Handled by	*Sales Territory Proposal Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddrElementAttribute1	string	Additional address element to support flexible address format.
AddrElementAttribute2	string	Additional address element to support flexible address format.
AddrElementAttribute3	string	Additional address element to support flexible address format.
AddrElementAttribute4	string	Additional address element to support flexible address format.
AddrElementAttribute5	string	Additional address element to support flexible address format.
AddressCity	string	City.
AddressCountry	string	Country.
AddressCounty	string	County.
AddressPostalCode	string	Postal Code.
AddressProvince	string	Province.
AddressState	string	State.
DimensionMember	string	The name of the territory dimension member.
DimensionMemberHigh	string	The name of the territory dimension member with a high sequence number.
IncludeHierarchyFlag	boolean	Indicates whether the dimension member is included along with its hierarchy or not.
TerrDimHighIntgId	string	The common member identifier for Oracle Business Intelligence (OBI), Territory Management, and Cube.
TerrDimIntgId	string	The common member identifier for Oracle Business Intelligence (OBI), Territory

Name	Type	Description
		Management, and Cube having a high sequence number.
TerrDimensionCode	string	The code for the sales territory dimension.
TerrRuleBndryValueId	long	The unique identifier of the territory rule boundary value. • Primary Key
TerrRuleBoundaryId	long	The identifier of the territory rule boundary.

Sales Territory Inherited Dimension

The dimensions that the recipient territory will inherit from its source territory.

QName: {http://xmlns.oracle.com/oracle/apps/sales/territoryMgmt/territories/territoryService/}TerritoryInheritedDimension

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Territory*
Handled by	*Sales Territory Service*
Handled by	*Sales Territory Proposal Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
TerrDimensionCode	string	The code of the dimension that is being inherited.
TerrInheritedDimensionId	long	The identifier of the territory inherited dimension. • Primary Key

Name	Type	Description
TerritoryVersionId	long	The unique identifier of the version of the recipient territory.

Sales Territory Line of Business

The lines of business associated with a territory.

QName: {http://xmlns.oracle.com/oracle/apps/sales/territoryMgmt/territories/territoryService/}TerritoryLineOfBusiness

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Territory*
Handled by	*Sales Territory Service*
Handled by	*Sales Territory Proposal Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
LobCode	string	The code for the territory line of business.
Meaning	string	The meaning of the territory line of business.
TerrLobId	long	The unique identifier of the territory line of business. • Primary Key
TerritoryVersionId	long	The unique identifier of the version of the territory.

Sales Territory Proposal

The details of the request for the proposed territory change. This information includes purpose, initiator of the request, and status. A proposal can impact multiple territories that are owned by the initiator of the territory proposal.

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/territories/territoryService/}TerritoryProposal

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Territory*
Handled by	*Sales Territory Proposal Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActFailureReasonCode	string	The failure code for a proposal activation.
ActivationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the proposal is activated.
DeleteFlag	boolean	Access Level Indicator For Delete
Description	string	The free text description of the record.
Name	string	The name of the sales territory proposal.
Owner	string	The display name for the initiator of the proposal.
OwnerId	long	The resource who initiated the proposal, typically the owner of the territory.
PartitionCode	string	The code to identify whether or not the proposal is a error correction proposal for territories that were made invalid by dimension or member changes. Some accepted values are, Stage, Production, and so on.

Name	Type	Description
ProposalNumber	string	The unique identification number of the proposal.
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusCode	string	The pre-defined code used to indicate the status.
TerrProposalId	long	The identifier of the territory proposal. • Primary Key
TerritoryService	*Sales Territory*	The list of sales territory objects.
UpdateFlag	boolean	Access Level Indicator For Update

Sales Territory Resource

The resources allocated to a territory. For example, the sales representative that owns the territory.

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/territories/territoryService/}TerritoryResource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Territory*
Handled by	*Sales Territory Service*
Handled by	*Sales Territory Proposal Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdministratorFlag	boolean	Indicates whether the resource is an administrator of the territory.
FunctionCode	string	The function of the resource in the territory.
ManageForecastFlag	boolean	Indicates whether a territory resource has been given the responsibility to manage the territory forecast on behalf of the owner of the territory.
Manager	string	The name of the manager for the resource.
OrganizationName	string	The name of the party when the party type is Organization.
ReportsTo	string	The name of the resource to which the resource reports to.
ResourceId	long	The unique identifier of the resource.
ResourceName	string	The name of the sales territory resource.
ResourceOrgId	long	The identifier of the organization to which the resource belongs.
RoleName	string	The role name associated with the resource.
TerrResourceId	long	The identifier of the territory resource. • Primary Key
TerritoryVersionId	long	The identifier of the territory version.

Sales Territory Service

Service to operate on territory business objects. It can be used by third-party applications to perform standard and custom operations on territory business objects.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/oracle/apps/sales/territoryMgmt/territories/territoryService/}TerritoryPublicService

Service WSDL URL: https://servername/crmService/TerritoryPublicService?WSDL

Logical Business Objects

- CRM : Territory Management : Sales Territory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Sales Territory Rule Boundary*
Handles	*Sales Territory Rule*
Handles	*Sales Territory Line of Business*
Handles	*Sales Territory*
Handles	*Sales Territory Resource*
Handles	*Sales Territory Inherited Dimension*
Handles	*Sales Territory Rule Boundary Value*

Operations

- *deleteTerritoryFromProposal*
- *moveTerritoriesInProposal*
- *transformTerritoryUserKeysToIDs*
- *addExistingTerritoryToProposal*
- *addExistingTerritoryToProposalReturnsTerritory*
- *getTerritory*
- *addNewTerritoryToProposal*
- *updateTerritoryInProposal*
- *mergeTerritoryInProposal*
- *findTerritories*
- *deleteTerritoryInheritedDimension*
- *deleteTerritoryResource*
- *createTerritoryRuleBndryValue*
- *deleteTerritoryRuleBndryValue*
- *processTerritoryRuleBoundaryValue*

- *deleteTerritoryRuleBoundary*
- *deleteTerritoryLineOfBusiness*
- *deleteTerritoryRule*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

deleteTerritoryFromProposal

Deletes an existing territory from a proposal. This is a private method and is for internal use only.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryId	long	The identifier of the territory to be deleted.
territoryProposalId	long	The identifier of the proposal from which the territory is deleted.

Response Payload

Element Name	Type	Description
result	void	The deleteTerritoryFromProposal web service method returns void.

moveTerritoriesInProposal

Moves a territory from one location in the hierarchy to another.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
mvTerritoryIds	long	The list of identifiers for territories being moved.
dstTerritoryId	long	The territory identifier of the new parent territory.
proposalId	long	The identifier of the proposal in which the territories are moved.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	void	The moveTerritoriesInProposal web service method returns void.

transformTerritoryUserKeysToIDs

Transforms the territory user keys to identifiers.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryService	*Sales Territory*	The attributes of the sales territory object.

Response Payload

Element Name	Type	Description
result	*Sales Territory*	The attributes of the sales territory object.

addExistingTerritoryToProposal

Adds an existing territory to a proposal.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryId	long	The identifier of the territory to be added.
territoryProposalId	long	The identifier of the proposal in which territory is added.

Response Payload

Element Name	Type	Description
result	void	The addExistingTerritoryToProposal web service method returns void.

addExistingTerritoryToProposalReturnsTerritory

Adds an existing territory to a proposal and returns the territory information.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryId	long	The identifier of the territory to be added.
territoryProposalId	long	The identifier of the proposal in which the territory is added.

Response Payload

Element Name	Type	Description
result	*Sales Territory*	The attributes of the sales territory object.

getTerritory

Retrieves the territory by the primary key territory version ID. The Territory object includes all attributes of territory, territory rule, rule boundaries, boundary values, and resources.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryVersionId	long	The identifier of the territory version.

Response Payload

Element Name	Type	Description
result	*Sales Territory*	The attributes of the sales territory object.

addNewTerritoryToProposal

Adds a new sales territory to a proposal.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryService	*Sales Territory*	The attributes of the sales territory object.

Response Payload

Element Name	Type	Description
result	*Sales Territory*	The attributes of the sales territory object.

updateTerritoryInProposal

Updates a territory that was added to a proposal.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryService	*Sales Territory*	The attributes of the sales territory object.

Response Payload

Element Name	Type	Description
result	*Sales Territory*	The attributes of the sales territory object.

mergeTerritoryInProposal

Creates territory if it does not exist. Updates the territory if it exists.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryService	*Sales Territory*	Attributes of the sales territory object.

Response Payload

Element Name	Type	Description
result	*Sales Territory*	Attributes of the sales territory object.

findTerritories

Find territories for a given query criteria. The Territory object includes all attributes of territory, territory rule, rule boundaries, boundary values, and resources.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria values to retrieve the records.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The control value that indicates whether to retrieve translations or not.

Response Payload

Element Name	Type	Description
result	*Sales Territory*	The list of the sales territory objects.

deleteTerritoryInheritedDimension

Deletes a territory inherited dimension record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryInheritedDimension	*Sales Territory Inherited Dimension*	The attributes of the territory inherited dimension object.

Response Payload

Element Name	Type	Description
result	void	The deleteTerritoryInheritedDimension web service method returns void.

deleteTerritoryResource

Deletes a sales territory resource record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryResource	*Sales Territory Resource*	The attributes of the territory resource object.

Response Payload

Element Name	Type	Description
result	void	The deleteTerritoryResource web service method returns void.

createTerritoryRuleBndryValue

Creates a specific member for a specific dimension specified for a territory.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryRuleBndryValue	*Sales Territory Rule Boundary Value*	The attributes of territory rule boundary value object.

Response Payload

Element Name	Type	Description
result	*Sales Territory Rule Boundary Value*	The attributes of territory rule boundary value object.

Element Name	Type	Description

deleteTerritoryRuleBndryValue

Removes a specific member for a specific dimension specified for a territory.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryRuleBndryValue	*Sales Territory Rule Boundary Value*	The attributes of territory rule boundary value object.

Response Payload

Element Name	Type	Description
result	void	The deleteTerritoryRuleBndryValue web service method returns void.

processTerritoryRuleBoundaryValue

Processes a list of territory rule boundary value objects via a CRUD command. This is used to perform bulk processing.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	The type of CRUD operation to be performed.
territoryRuleBndryValue	*Sales Territory Rule Boundary Value*	The list of rule boundary value objects on which the CRUD operation needs to be performed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	The control for the process. For example, do we continue if there is an error during the process or not.

Response Payload

Element Name	Type	Description
result	*Sales Territory Rule Boundary Value*	The list of territory rule boundary value objects.

deleteTerritoryRuleBoundary

Removes all members for a specific dimension specified for a territory. This implies that the territory covers "any" member for that dimension.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryRuleBoundary	*Sales Territory Rule Boundary*	The attributes of the territory rule boundary object.

Response Payload

Element Name	Type	Description
result	void	The deleteTerritoryRuleBoundary web service method returns void.

deleteTerritoryLineOfBusiness

Deletes a territory line of business record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryLineOfBusiness	*Sales Territory Line of Business*	The territory line of business attributes.

Response Payload

Element Name	Type	Description
result	void	The deleteTerritoryLineOfBusiness web service method returns void.

deleteTerritoryRule

Deletes the specified territory rule record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
territoryRule	*Sales Territory Rule*	The attributes of the territory rule object.

Response Payload

Element Name	Type	Description
result	void	The deleteTerritoryRule web service method returns void.

getDfltObjAttrHints

Retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on the service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name which is an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Retrieves the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Retrieves the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	The list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MOT_MANAGE_SALES_TERRITORY_PRIV	Manage Sales Territory	Allows managing of sales territories. A Territory is the jurisdiction of responsibility of a sales representative over a set of sales accounts.
findTerritories	MOT_VIEW_SALES_TERRITORY_PRIV	View Sales Territory	Allows viewing of sales territories. A Territory is the jurisdiction

Operation Name	Privilege Code	Privilege Name	Privilege Description
			of responsibility of a sales representative over a set of sales accounts.
getTerritory	MOT_VIEW_SALES_TERRITORY_PRIV	View Sales Territory	Allows viewing of sales territories. A Territory is the jurisdiction of responsibility of a sales representative over a set of sales accounts.
transformTerritoryUserKeysToIDs	MOT_VIEW_SALES_TERRITORY_PRIV	View Sales Territory	Allows viewing of sales territories. A Territory is the jurisdiction of responsibility of a sales representative over a set of sales accounts.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MOT_VIEW_SALES_TERRITORY_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_ADMINISTRATION_DUTY	Territory Management Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
MOT_VIEW_SALES_TERRITORY_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
MOT_VIEW_SALES_TERRITORY_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
MOT_MANAGE_SALES_TERRITORY_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_ADMINISTRATION_DUTY	Territory Management Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
MOT_MANAGE_SALES_TERRITORY_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
MOT_MANAGE_SALES_TERRITORY_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_EXPORT_MANAGEMENT_DUTY	Quota Export Management	Manages bulk export of all sales territory quota related objects.
ORA_MOT_TERRITORY_MANAGEMENT_DUTY	ORA_MOT_QUOTA_MANAGEMENT_DUTY	Quota Management	Manages sales territory quotas and territory quota formulas. Additional duties include incentive compensation goal management, user and roles management, and party information inquiry.
ORA_MOT_TERRITORY_MANAGEMENT_ADMINISTRATION_DUTY	ORA_MOT_QUOTA_MANAGEMENT_ADMINISTRATION_DUTY	Quota Management Administration	Manages sales territory quotas, quota setups, territory quota formulas, spread formulas, and seasonality groups, and can view quota plans. Additional duties include incentive compensation goal management, user and roles management, and party information inquiry.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_MANAGEMENT_SETUP_DUTY	Quota Management Setup	Manages sales territory quota setup, quota plans, prediction and spread formula parameters, and seasonality groups. Runs sales territory quota synchronization and sales quota plan activation and completion processes. Additional duties include party information inquiry.
ORA_MOT_TERRITORY_MANAGEMENT_ADMINISTRATION_DUTY	ORA_MOT_TERRITORY_MANAGEMENT_EXPORT_IMPORT_DUTY	Territory Management Export Import	Manages sales territory export and import. Provides users with the ability to export territory data, modify it offline and import.
ORA_MOT_TERRITORY_MANAGEMENT_DUTY	ORA_MOT_TERRITORY_MANAGEMENT_EXPORT_IMPORT_DUTY	Territory Management Export Import	Manages sales territory export and import. Provides users with the ability to export territory data, modify it offline and import.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_TERRITORY_MANAGEMENT_T2P_MIGRATION_DUTY	Territory Management T2P Migration	Manages sales territory export and import. Provides users with the ability to export territory data from a test environment and import into production.

Sales Territory

The various versions of a sales territory where each version record contains most of the key attributes of a territory. Most of the sales territory object components are child entities to a sales territory version, for example, territory rules, territory rule boundaries, territory rule boundary values, and territory resources.

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/territories/territoryService/}Territory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Territory Rule*
Contains	*Sales Territory Line of Business*
Contains	*Sales Territory Resource*
Contains	*Sales Territory Inherited Dimension*
Contained by	*Sales Territory Proposal*
Handled by	*Sales Territory Service*
Handled by	*Sales Territory Proposal Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ApplyOptionalValidationFlag	boolean	This is an obsolete attribute.
CoverageModel	string	Indicates if the dimensions of the territory are based on account attributes or partner attributes.
DeleteFlag	boolean	Indicates whether the user has access to delete the record. If the value is True, then the user has the access. The default value is False.
Description	string	The free text description of the record.

Name	Type	Description
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EligibleForQuotaFlag	boolean	Indicates whether the territory is going to change during a territory realignment. If the value is True, then the territory is unlikely to change during a major realignment and therefore a quota can be entered against the proposed definition.
ForecastParticipationCode	string	The code for the forecast participation.
ForecastedByParentTerritoryFlag	boolean	Indicates if the forecast for the territory is made by its parent territory.
LatestVersionFlag	boolean	Indicates the latest active version of territory.
Name	string	The name of the sales territory.
OrganizationId	long	The unique identifier of the organization.
OrganizationName	string	The name of the party when the party type is Organization.
Owner	string	The owner of the sales territory.
OwnerOrgId	long	The identifier of the owner's organization.
OwnerResourceId	long	The identifier of the resource from CRM Foundation (JTF) resources.
ParentTerritoryId	long	The identifier of the parent sales territory.
PartnerId	long	The unique identifier of the partner.
PartnerName	string	The name of the partner associated with the territory.
PartnerProgramId	long	The specific program that a partner is participating in.

Name	Type	Description
ProgramName	string	The name of the partner program to which the partner is enrolled.
ReviseQuotaFlag	boolean	Indicates whether a submitted quota needs to be revised.
RevisionDescription	string	The description of the reason for revising the quota.
RevisionReason	string	The user-defined reason for revising the quota.
SourceTerrId	long	The identifier of the territory from which the dimensions are inherited.
SourceTerrLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the source territory was last updated. This attribute is related to the inheritance of dimensions by recipient territories from source territories.
SourceTerrName	string	The name of the territory from which the selected dimensions are inherited.
SourceTerrVersionId	long	The unique identifier of the source territory version.
StageCode	string	This is an obsolete attribute.
StatusCode	string	The pre-defined code used to indicate the status.
TerrProposalId	long	The identifier of the territory proposal.
TerritoryFunctionCode	string	Business function associated with the territory
TerritoryId	long	The unique identifier of the sales territory.
TerritoryInheritedDimension	*Sales Territory Inherited Dimension*	The dimension the recipient territory is inheriting from the source territory.
TerritoryLevel	long	The level of the territory in territory hierarchy.
TerritoryLineOfBusiness	*Sales Territory Line of Business*	Identifies the line of business that a territory is associated with. Each territory can be associated with single , multiple (or All) , or no line of business.

Name	Type	Description
TerritoryNumber	string	The unique alternate identification number for the territory.
TerritoryResource	*Sales Territory Resource*	The list of sales territory resource objects.
TerritoryRule	*Sales Territory Rule*	The unique identifier of the territory rule.
TerritoryVersionId	long	The unique identifier of territory version. • Primary Key
TypeCode	string	The code for the type of sales territory.
UniqueTerritoryNumber	string	Unique identification number for this territory
UpdateFlag	boolean	Indicates whether the user has access to update the record. If the value is True, then the user has the access. The default value is False.

Sales Territory Inherited Dimension

The dimensions that the recipient territory will inherit from its source territory.

QName: {http://xmlns.oracle.com/oracle/apps/sales/territoryMgmt/territories/territoryService/}TerritoryInheritedDimension

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Territory*
Handled by	*Sales Territory Service*
Handled by	*Sales Territory Proposal Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
TerrDimensionCode	string	The code of the dimension that is being inherited.
TerrInheritedDimensionId	long	The identifier of the territory inherited dimension. • Primary Key
TerritoryVersionId	long	The unique identifier of the version of the recipient territory.

Sales Territory Line of Business

The lines of business associated with a territory.

QName: {http://xmlns.oracle.com/oracle/apps/sales/territoryMgmt/territories/territoryService/}TerritoryLineOfBusiness

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Territory*
Handled by	*Sales Territory Service*
Handled by	*Sales Territory Proposal Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
LobCode	string	The code for the territory line of business.
Meaning	string	The meaning of the territory line of business.
TerrLobId	long	The unique identifier of the territory line of business.

Name	Type	Description
		• Primary Key
TerritoryVersionId	long	The unique identifier of the version of the territory.

Sales Territory Resource

The resources allocated to a territory. For example, the sales representative that owns the territory.

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/territories/territoryService/}TerritoryResource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Territory*
Handled by	*Sales Territory Service*
Handled by	*Sales Territory Proposal Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdministratorFlag	boolean	Indicates whether the resource is an administrator of the territory.
FunctionCode	string	The function of the resource in the territory.
ManageForecastFlag	boolean	Indicates whether a territory resource has been given the responsibility to manage the territory forecast on behalf of the owner of the territory.
Manager	string	The name of the manager for the resource.
OrganizationName	string	The name of the party when the party type is Organization.

Name	Type	Description
ReportsTo	string	The name of the resource to which the resource reports to.
ResourceId	long	The unique identifier of the resource.
ResourceName	string	The name of the sales territory resource.
ResourceOrgId	long	The identifier of the organization to which the resource belongs.
RoleName	string	The role name associated with the resource.
TerrResourceId	long	The identifier of the territory resource. • Primary Key
TerritoryVersionId	long	The identifier of the territory version.

Sales Territory Rule

An entity that organizes territory dimensions in the form of rules and enables territory definitions that can be either simple territories defined by a single rule or complex ones with multiple rules. This entity, along with territory rule boundary value, stores the dimensions of the territory in an expression form.

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/territories/territoryService/}TerritoryRule

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Territory Rule Boundary*
Contained by	*Sales Territory*
Handled by	*Sales Territory Service*
Handled by	*Sales Territory Proposal Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
RuleNumber	long	A unique number within a territory definition.
RuleOperatorCode	string	The code for identifying whether the coverage adds to or removes from the territory's jurisdiction. The accepted values are: EXCLUSION (for rule type EXCLUSION and PARTNER_EXCLUSION) and INCLUSION (for all other rule types, such as REGULAR, INCLUSION, PARTNER_REGULAR, PARTNER_INCLUSION, and INHERITANCE_OVERRIDE)
RuleTypeCode	string	The code for the territory coverage type. If the territory coverage model is sales account centric, the accepted values are: REGULAR (for coverage based on sales account dimensionality or named accounts), INCLUSION (for manually included account coverage), and EXCLUSION (for manually excluded account coverage). If the territory coverage model is partner centric, the accepted values are: PARTNER_REGULAR (for coverage based on partner dimensionality), PARTNER_INCLUSION (for manually included partner coverage), and PARTNER_EXCLUSION (for manually excluded partner coverage). In case of inheritance, if the coverage is for a recipient territory, then the accepted value is INHERITANCE_OVERRIDE which indicates that the coverage overrides some of the inherited dimensionality.
TerrRuleId	long	The unique identifier of the territory rule. • Primary Key
TerritoryRuleBoundary1	*Sales Territory Rule Boundary*	The list of territory rule boundary objects.
TerritoryVersionId	long	The unique identifier of the territory version.

Sales Territory Rule Boundary

An entity associated with a territory rule boundary value to store the dimensions of the territory in an expression form. Dimension members are evaluated additively and the values within a dimension member are evaluated as choices.

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/territories/territoryService/}TerritoryRuleBoundary

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Territory Coverage Dimension Value*
Contained by	*Sales Territory Rule*
Handled by	*Sales Territory Service*
Handled by	*Sales Territory Proposal Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Dimension	string	The name of the sales territory dimension.
TerrDimensionCode	string	The code for the sales territory dimension.
TerrRuleBoundaryId	long	The unique identifier of the territory rule boundary. • Primary Key
TerrRuleId	long	The identifier of the sales territory rule.
TerritoryRuleBndryValue1	*Sales Territory Rule Boundary Value*	The territory rule boundary value object.

Sales Territory Rule Boundary Value

The actual values of the dimensions for the territory.

QName: {http://xmlns.oracle.com/apps/sales/territoryMgmt/territories/territoryService/}TerritoryRuleBndryValue

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Territory Rule Boundary*
Handled by	*Sales Territory Service*
Handled by	*Sales Territory Proposal Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddrElementAttribute1	string	Additional address element to support flexible address format.
AddrElementAttribute2	string	Additional address element to support flexible address format.
AddrElementAttribute3	string	Additional address element to support flexible address format.
AddrElementAttribute4	string	Additional address element to support flexible address format.
AddrElementAttribute5	string	Additional address element to support flexible address format.
AddressCity	string	City.
AddressCountry	string	Country.
AddressCounty	string	County.
AddressPostalCode	string	Postal Code.
AddressProvince	string	Province.
AddressState	string	State.
DimensionMember	string	The name of the territory dimension member.
DimensionMemberHigh	string	The name of the territory dimension member with a high sequence number.

Name	Type	Description
IncludeHierarchyFlag	boolean	Indicates whether the dimension member is included along with its hierarchy or not.
TerrDimHighIntgId	string	The common member identifier for Oracle Business Intelligence (OBI), Territory Management, and Cube.
TerrDimIntgId	string	The common member identifier for Oracle Business Intelligence (OBI), Territory Management, and Cube having a high sequence number.
TerrDimensionCode	string	The code for the sales territory dimension.
TerrRuleBndryValueId	long	The unique identifier of the territory rule boundary value. • Primary Key
TerrRuleBoundaryId	long	The identifier of the territory rule boundary.

Search Marketing Campaign Data Upload

Service to upload marketing campaign data from various search engine vendors into the Oracle Fusion Marketing schema.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/oracle/apps/marketing/searchMarketing/model/}SearchMarketingModelService

Service WSDL URL: https://servername/crmService/SearchMarketingModelService?WSDL

Logical Business Objects

- CRM : Marketing : Search Marketing Campaign

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Search Marketing Ad Group Summary*

Relationship Type	Object or Service
Handles	*Search Marketing Account Result*
Handles	*Search Marketing Campaign Summary*
Handles	*Search Marketing Campaign Result*
Handles	*Search Marketing Keywords Result*
Handles	*Search Marketing Ad Result*
Handles	*Search Marketing Keyword Summary*
Handles	*Search Marketing Ad Group Result*
Handles	*Search Marketing Ad Summary*

Operations

- *processCampaignSummaryReport*
- *processAccountPerformanceReport*
- *processCampaignPerformanceReport*
- *processAdGroupsSummaryReport*
- *processAdGroupPerformanceReport*
- *processAdsSummaryReport*
- *processAdPerformanceReport*
- *processKeywordsSummaryReport*
- *processKeywordPerformanceReport*
- *processWebToLead*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

processCampaignSummaryReport

A web service method that uploads Campaign summary data from Google Adwords.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
request	*Search Marketing Campaign Summary*	A required parameter of the processCampaignSummaryReport web service method. The records matching the set of attribute criteria are transferred.

Response Payload

Element Name	Type	Description
result	string	The return value of the processCampaignSummaryReport web service method. It includes a set of Campaign ID's with appropriate status.

processAccountPerformanceReport

A web service method that uploads Account performance data from Google Adwords.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
request	*Search Marketing Account Result*	A required parameter of the processAccountPerformanceReport web service method. The records matching the set of attribute criteria are transferred.

Response Payload

Element Name	Type	Description
result	string	The return value of the processAccountPerformanceReport web service method. It includes a set of Connection ID's with appropriate status.

processCampaignPerformanceReport

A web service method that uploads Campaign performance data from Google Adwords.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
request	*Search Marketing Campaign Result*	A required parameter of the processCampaignPerformanceReport web service method. The records matching the set of attribute criteria are transferred.

Response Payload

Element Name	Type	Description
result	string	The return value of the processCampaignPerformanceReport web service method. It includes a set of Campaign ID's with appropriate status.

processAdGroupsSummaryReport

A web service method that uploads Ad-group summary data from Google Adwords.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
request	*Search Marketing Ad Group Summary*	A required parameter of the processAdGroupsSummaryReport web service method. The records matching the set of attribute criteria are transferred.

Response Payload

Element Name	Type	Description
result	string	The parameter is not applicable for the method processAdGroupsSummaryReport.

processAdGroupPerformanceReport

A web service method that uploads Ad-group performance data from Google Adwords.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
request	*Search Marketing Ad Group Result*	A required parameter of the processAdGroupsPerformanceReport web service method. The records matching the set of attribute criteria are transferred.

Response Payload

Element Name	Type	Description
result	string	The return value of the processAdGroupsPerformanceReport web service method. It includes a set of Ad-group ID's with appropriate status.

processAdsSummaryReport

A web service method that uploads Ads summary data from Google Adwords.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
request	*Search Marketing Ad Summary*	A required parameter of the processAdsSummaryReport web service method. The records matching the set of attribute criteria are transferred.

Response Payload

Element Name	Type	Description
result	string	The return value of the processAdsSummaryReport web service method. It includes a set of Ad ID's with appropriate status.

processAdPerformanceReport

A web service method that uploads Ads performance data from Google Adwords.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
request	*Search Marketing Ad Result*	A required parameter of the processAdPerformanceReport web service method. The records matching the set of attribute criteria are transferred.

Response Payload

Element Name	Type	Description
result	string	The return value of the processAdPerformanceReport web service method. It includes a set of Ad ID's with appropriate status.

processKeywordsSummaryReport

A web service method that uploads keywords summary data from Google Adwords.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
request	*Search Marketing Keyword Summary*	A required parameter of the processKeywordsSummaryReport web service method. The records matching the set of attribute criteria are transferred.

Response Payload

Element Name	Type	Description
result	string	The return value of the processKeywordsSummaryReport web service method. It includes a set of Keyword ID's with appropriate status.

processKeywordPerformanceReport

A web service method that uploads keyword performance data from Google Adwords.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
request	*Search Marketing Keywords Result*	A required parameter of the processKeywordPerformanceReport web service method. The records matching the set of attribute criteria are transferred.

Response Payload

Element Name	Type	Description
result	string	The return value of the processKeywordPerformanceReport web service method. It includes a set of Keyword ID's with appropriate status.

processWebToLead

A web service method that allows creation of Oracle Fusion Lead Object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
firstName	string	A required parameter of the processWebToLead web service method. The first name captures personal information of the generated lead.
lastName	string	An optional parameter of the processWebToLead web service method. The last name is part of the personal details of the generated lead.
emailAddress	string	An optional parameter of the processWebToLead web service method. The email address captures specific contact information of the generated lead.
phoneNumber	string	A required parameter of the processWebToLead web service method. The phone number captures specific contact information of the generated lead.
address1	string	An optional parameter of the processWebToLead web service method. The street address captures specific location information of the generated lead.

Element Name	Type	Description
address2	string	An optional parameter of the processWebToLead web service method. The extended address captures specific location information of the generated lead.
city	string	An optional parameter of the processWebToLead Web Service. The city captures specific location information of the generated lead.
state	string	An optional parameter of the processWebToLead web service method. The state captures specific location information of the generated lead.
zip	string	An optional parameter of the processWebToLead web service method. The zip code captures specific location information of the generated lead.
country	string	An optional parameter of the processWebToLead web service method. The country captures specific location information of the generated lead.
fusionPartyId	string	A required parameter of the processWebToLead web service method. The party ID captures party information of the generated lead.
fusionContactId	string	A required parameter of the processWebToLead web service method. The contact ID captures contact information of the generated lead.
fusionRelationshipId	string	A required parameter of the processWebToLead web service method. The relationship ID captures relationship information of the generated lead.
semCampaignId	string	A required parameter of the processWebToLead web service method. The campaign ID defines the relationship between generated lead & campaign.
semAdgroupId	string	An optional parameter of the processWebToLead web service method. The ad group ID defines the relationship between ad group & generated lead.
semKeywords	string	An optional parameter of the processWebToLead web service method. This captures the keywords associated with the campaign.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	void	The parameter is not applicable for the method processWebToLead.

getDfltObjAttrHints

A web service method to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

A web service method that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

A web service method to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	MKT_RUN_SEARCH_MARKETING_CAMPAIGN_SCHEDULER_PRIV	Run Search Marketing Campaign Scheduler	Allows scheduling and monitoring the process that schedules marketing search engine campaign execution activities.
All Operations	MKT_CREATE_SEARCH_MARKETING_CAMPAIGN_PRIV	Create Search Marketing Campaign	Allows creating search engine marketing campaigns.
All Operations	MKT_VIEW_SEARCH_MARKETING_CAMPAIGN_PRIV	View Search Marketing Campaign	Allows viewing search engine campaigns and monitoring results.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
MKT_RUN_SEARCH_MARKETING_CAMPAIGN_SCHEDULER_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
MKT_RUN_SEARCH_MARKETING_CAMPAIGN_SCHEDULER_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
MKT_RUN_SEARCH_MARKETING_CAMPAIGN_SCHEDULER_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
MKT_CREATE_SEARCH_MARKETING_CAMPAIGN_PRIV	ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
MKT_CREATE_SEARCH_MARKETING_CAMPAIGN_PRIV	ORA_MKT_MARKETING_MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			estimations, product definitions, and return on investment calculations.
MKT_CREATE_SEARCH_ MARKETING_CAMPAIGN_PRIV	ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
MKT_VIEW_SEARCH_ MARKETING_CAMPAIGN_PRIV	ORA_MKT_CORPORATE_ MARKETING_MANAGER_JOB	Corporate Marketing Manager	Develops and executes marketing strategies, translating customer needs from varied industries and markets into clear value propositions and actionable marketing programs. Communicates the corporate marketing message, manages the corporate marketing budget for allocation to marketing activities, and follows through the complete marketing life cycle to measure results.
MKT_VIEW_SEARCH_ MARKETING_CAMPAIGN_PRIV	ORA_MKT_MARKETING_ MANAGER_JOB	Sales Marketing Manager	Coordinates marketing messaging content, pricing, segmentation, communication channels, and launch activities for marketing campaigns. Contributes to sales lead pipeline process and estimations, product definitions, and return on investment calculations.
MKT_VIEW_SEARCH_ MARKETING_CAMPAIGN_PRIV	ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			intended recipients of marketing messages.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_EXECUTION_MANAGEMENT_DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_ MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_CORPORATE_ MARKETING_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_ RECOMMENDATION_ANALYSIS_ DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_ MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_CORPORATE_ MARKETING_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_ PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_DUTY	Sales Lead Qualification	Qualifies sales leads to determine the sales readiness of the lead.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_MKL_SALES_LEAD_QUALIFICATION_SUPERVISION_DUTY	Sales Lead Qualification Supervision	Qualifies sales leads to determine the sales readiness of all the leads in your reporting hierarchy.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_MARKETING_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_MKT_CORPORATE_MARKETING_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Search Marketing Account Result

The accounts for which search marketing campaign data is uploaded.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/searchMarketing/model/}MktSemWSAccountResults

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Search Marketing Campaign Data Upload*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountCurrencyCode	string	Currency associated with the Google AdWords Account.
AverageCPC	decimal	Average cost per click recorded for a specific date for a specific Google AdWords Account.
AverageCPM	decimal	Average cost of 1000 impressions recorded for a specific date for a specific Google AdWords Account.
AveragePosition	decimal	Average ad placement position recorded for a specific date for a specific Google AdWords Account.
CTR	decimal	Click through rate recorded for a specific date for a specific Google AdWords Account.
Clicks	decimal	Number of clicks recorded for a specific date for a specific Google AdWords Account.

Name	Type	Description
ClientAccountEmail	string	Email address associated with the Google AdWords Account.
ClientAccountId	long	The identifier of the Google AdWords Account. • Primary Key
Cost	decimal	Cost recorded for a specific date for a specific Google AdWords Account.
Date	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date recorded on the daily report that includes search marketing campaign performance metrics for a specific Google AdWords Account. • Primary Key
Impressions	decimal	Number of impressions recorded for a specific date for a specific Google AdWords Account.

Search Marketing Ad Group Result

The advertisement groups associated with search marketing campaigns.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/searchMarketing/model/}MktSemWSAdgroupsResults

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Search Marketing Campaign Data Upload*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountCurrencyCode	string	Currency associated with the Google AdWords Account used to configure the Google AdWords Ad Group.

Name	Type	Description
AdGroupId	string	Ad Group ID associated with the Ad Group created in Google AdWords for search marketing campaigns.
AdGroupName	string	Ad Group Name associated with the Ad Group created in Google for search marketing campaigns.
AverageCPC	decimal	Average cost per click recorded for a specific date for a specific Ad Group.
AverageCPM	decimal	Average cost of 1000 impressions recorded for a specific date for an Ad Group or a search keyword.
AveragePosition	decimal	Average ad placement position recorded for a specific date for a specific Google AdWords Ad Group.
CTR	decimal	Click through rate recorded for a specific date for a specific Google AdWords Ad Group.
CampaignId	long	The unique identifier for the campaign.
Clicks	decimal	Number of clicks recorded for a specific date for a specific Google AdWords Ad Group.
ClientAccountEmail	string	Email address associated with the Google AdWords Account.
Cost	decimal	Cost recorded for a specific date for a specific Google AdWords Ad Group.
Date	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date recorded on the daily report that includes search marketing campaign performance metrics for a specific Google AdWords Ad Group. • Primary Key
FusionAdgroupId	long	Google AdWords Ad Group identifier generated by Fusion Marketing. • Primary Key
Impressions	decimal	Number of impressions recorded for a specific date for a specific Google AdWords Ad Group.
Status	string	The status of the record.

Search Marketing Ad Group Summary

The summary data for advertisement groups associated with search marketing campaigns.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/searchMarketing/model/}MktSemWSCampaignAdgroupsSummary

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Search Marketing Campaign Data Upload*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountCurrencyCode	string	Currency associated with the Google AdWords Account used to configure these Google AdWords Ad Groups.
AdGroupId	string	Ad Group ID associated with the Ad Group created in Google AdWords for search marketing campaigns.
AdGroupName	string	Ad Group Name associated with the Ad Group created in Google for search marketing campaigns.
AverageCPC	decimal	Average cost per click recorded for a specific date for a specific Ad Group.
AverageCPM	decimal	Average cost of 1000 impressions recorded for a specific date for these Google AdWords Ad Groups.
AveragePosition	decimal	Average ad placement position recorded for a specific date for these Google AdWords Ad Groups.
CTR	decimal	Click through rate recorded for a specific date for a specific Google AdWords Ad Group.

Name	Type	Description
CampaignId	long	The unique identifier for the campaign.
Clicks	decimal	Number of clicks recorded for a specific date for a specific Google AdWords Ad Group.
ClientAccountEmail	string	Email address associated with the Google AdWords Account.
Cost	decimal	Cost recorded for a specific date for a specific Google AdWords Ad Group.
FusionAdGroupId	long	Google AdWords Ad Group identifier generated by Fusion Marketing. • Primary Key
Impressions	decimal	Number of impressions recorded for a specific date for a specific Google AdWords Ad Group.
Status	string	The status of the record.

Search Marketing Ad Result

The details of advertisements associated with search marketing campaigns.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/searchMarketing/model/}MktSemWSAdsResults

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Search Marketing Campaign Data Upload*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountCurrencyCode	string	Currency associated with the Google AdWords Account used to configure the Google AdWords Ad.
AdGroupId	long	Ad Group ID associated with the Ad created in Google AdWords for search marketing campaigns.
AverageCPC	decimal	Average cost per click recorded for a specific date for a specific Ad.
AverageCPM	decimal	Average cost of 1000 impressions recorded for a specific date for a specific Google AdWords Ad.
AveragePosition	decimal	Average ad placement position recorded for a specific date for a specific Google AdWords Ad.
CTR	decimal	Click through rate recorded for a specific date for a specific Google AdWords Ad.
CampaignId	long	The unique identifier for the campaign.
Clicks	decimal	Number of clicks recorded for a specific date for a specific Google AdWords Ad.
ClientAccountEmail	string	Email address associated with the Google AdWords Account.
Cost	decimal	Cost recorded for a specific date for a specific Google AdWords Ad.
Date	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date recorded on the daily report that includes search marketing campaign performance metrics for a specific Google AdWords Ad. • Primary Key
Description1	string	The description of the first line of Google AdWords Ad.
Description2	string	The description of the second line of Google AdWords Ad.
FusionAdId	long	Google AdWords Ad identifier generated by Fusion Marketing. • Primary Key

Name	Type	Description
Id	string	Google AdWords Ad identifier provided by Google.
Impressions	decimal	Number of impressions recorded for a specific date for a specific Google AdWords Ad.
Status	string	The status of the record.
URL	string	The destination URL associated with a specific Google AdWords ad.

Search Marketing Ad Summary

The summary data for advertisements associated with search marketing campaigns.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/searchMarketing/model/}MktSemWSCampaignAdsSummary

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Search Marketing Campaign Data Upload*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountCurrencyCode	string	Currency associated with the Google AdWords Account used to configure these Google AdWords Ads.
AdGroupId	long	Ad Group ID associated with the Ad created in Google AdWords for search marketing campaigns.
AdType	string	Ad Type associated with the Ad created in Google AdWords for search marketing campaigns.

Name	Type	Description
CampaignId	long	The unique identifier for the campaign.
ClientAccountEmail	string	Email address associated with the Google AdWords Account.
Description1	string	The description of the first line of Google AdWords Ad.
Description2	string	The description of the second line of Google AdWords Ad.
DisplayURL	string	The display URL of the Google AdWords Ad.
FusionAdId	long	Google AdWords Ad identifier generated by Fusion Marketing. • Primary Key
Headline	string	The headline of Google AdWords Ad.
Id	string	Google AdWords Ad identifier provided by Google.
Status	string	The status of the record.
URL	string	The destination URL associated with a specific Google AdWords ad.

Search Marketing Campaign Result

The results of the marketing campaigns.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/searchMarketing/model/}MktSemWSCampaignResultRequest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Search Marketing Campaign Data Upload*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountCurrencyCode	string	Currency associated with the Google AdWords Account used to configure these search marketing campaigns.
AverageCPC	decimal	Average cost per click recorded for a specific date for a specific search marketing campaign.
AverageCPM	decimal	Average cost of 1000 impressions recorded for a specific date for a specific Google AdWords search marketing campaign.
AveragePosition	decimal	Average ad placement position recorded for a specific date for a specific Google AdWords search marketing campaign.
CTR	decimal	Click through rate recorded for a specific date for a specific Google AdWords search marketing campaign.
Clicks	decimal	Number of clicks recorded for a specific date for a specific Google AdWords search marketing campaign.
ClientAccountEmail	string	Email address associated with the Google AdWords Account.
Cost	decimal	Cost recorded for a specific date for a specific Google AdWords search marketing campaign.
Date	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date recorded on the daily report that includes search marketing campaign performance metrics for a specific Google AdWords search marketing campaign. • Primary Key
FusionCampaignId	long	Google AdWords search marketing campaign identifier generated by Fusion Marketing. • Primary Key

Name	Type	Description
Id	string	Google AdWords search marketing campaign identifier provided by Google.
Impressions	decimal	Number of impressions recorded for a specific date for a specific Google AdWords search marketing campaign.
Name	string	The name of the Google AdWords search marketing campaign.
Status	string	The status of the record.

Search Marketing Campaign Summary

The summary data for searching marketing campaigns.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/searchMarketing/model/}MktSemWSCampaignSummaryRequest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Search Marketing Campaign Data Upload*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountCurrencyCode	string	Currency associated with the Google AdWords Account used to configure search marketing campaigns.
Amount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The budget amount associated with the search marketing campaigns created under a specific Google AdWords Account.
AverageCPC	decimal	Average cost per click recorded for a specific date for these search marketing campaigns.

Name	Type	Description
AverageCPM	decimal	Average cost of 1000 impressions recorded for a specific date for these Google AdWords search marketing campaigns.
AveragePosition	decimal	Average ad placement position recorded for a specific date for these Google AdWords search marketing campaigns.
CTR	decimal	Click through rate recorded for a specific date for a specific Google AdWords search marketing campaign.
Clicks	decimal	Number of clicks recorded for a specific date for a specific Google AdWords search marketing campaign.
ClientAccountEmail	string	Email address associated with the Google AdWords Account.
Cost	decimal	Cost recorded for a specific date for a specific Google AdWords search marketing campaign.
FusionCampaignId	long	Google AdWords search marketing campaign identifier generated by Fusion Marketing. • Primary Key
Id	string	Google AdWords search marketing campaign identifier provided by Google.
Impressions	decimal	Number of impressions recorded for a specific date for a specific Google AdWords search marketing campaign.
Name	string	The name of the Google AdWords search marketing campaign.
Status	string	The status of the record.

Search Marketing Keyword Summary

The summary data of keywords associated with marketing campaigns.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/searchMarketing/model/}MktSemWSCampaignKeywordsSummary

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Search Marketing Campaign Data Upload*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountCurrencyCode	string	Currency associated with the Google AdWords Account used to configure these search keywords for search marketing campaigns.
AdGroupId	long	Ad Group ID associated with the search keyword created in Google AdWords for search marketing campaigns.
AverageCPC	decimal	Average cost per click recorded for a specific date for search keywords.
AverageCPM	decimal	Average cost of 1000 impressions recorded for a specific date for these Google AdWords search keywords.
AveragePosition	decimal	Average ad placement position recorded for a specific date for these Google AdWords search keywords.
CTR	decimal	Click through rate recorded for a specific date for a specific Google AdWords search keyword.
CampaignId	long	The unique identifier for the campaign.
Clicks	decimal	Number of clicks recorded for a specific date for a specific Google AdWords search keyword.
ClientAccountEmail	string	Email address associated with the Google AdWords Account.
Cost	decimal	Cost recorded for a specific date for a specific Google AdWords search keyword.

Name	Type	Description
FusionKeywordId	long	Google AdWords search keyword identifier generated by Fusion Marketing. • Primary Key
Id	string	Google AdWords search keyword identifier provided by Google.
Impressions	decimal	Number of impressions recorded for a specific date for a specific Google AdWords search keyword.
KeywordText	string	The Google AdWords search keyword text.
Status	string	The status of the record.
isNegative	string	Indicates whether a given keyword is negative. Adding a negative keyword to an ad group or campaign means that the ads do not show for searches containing that term.

Search Marketing Keywords Result

The keywords associated with marketing campaigns.

QName: {http://xmlns.oracle.com/oracle/apps/marketing/searchMarketing/model/}MktSemWSKeywordResults

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Search Marketing Campaign Data Upload*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountCurrencyCode	string	Currency associated with the Google AdWords Account used to configure this search keyword for search marketing campaigns.

Name	Type	Description
AdGroupId	string	Ad Group ID associated with the search keyword created in Google AdWords for search marketing campaigns.
AverageCPC	decimal	Average cost per click recorded for a specific date for a specific search keyword.
AverageCPM	decimal	Average cost of 1000 impressions recorded for a specific date for a specific Google AdWords search keyword.
AveragePosition	decimal	Average ad placement position recorded for a specific date for a specific Google AdWords search keyword.
CTR	decimal	Click through rate recorded for a specific date for a specific Google AdWords search keyword.
CampaignId	string	The unique identifier for the campaign.
Clicks	decimal	Number of clicks recorded for a specific date for a specific Google AdWords search keyword.
ClientAccountEmail	string	Email address associated with the Google AdWords Account.
Cost	decimal	Cost recorded for a specific date for a specific Google AdWords search keyword.
Date	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date recorded on the daily report that includes search marketing campaign performance metrics for a specific Google AdWords search keyword. • Primary Key
FusionKeywordId	long	Google AdWords search keyword identifier generated by Fusion Marketing. • Primary Key
Id	string	Google AdWords search keyword identifier provided by Google.
Impressions	decimal	Number of impressions recorded for a specific date for a specific Google AdWords search keyword.

Name	Type	Description
KeywordStatus	string	The status of a given keyword for a campaign. It is generally the same status as Google Adwords Campaign to which the keyword is associated.
KeywordText	string	The Google AdWords search keyword.

Service Custom Business Object (Deprecated)

A service to create, update, delete, or find custom business objects created in the Oracle Fusion Service application. A custom business object stores extended information for an Oracle Fusion business object

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/custExtn/extnService/}SvcMgmtCustomObjectService

Service WSDL URL: https://servername/crmService/SvcMgmtCustomObjectService?WSDL

Logical Business Objects

- CRM : Service : Service Request

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Custom Business Object*

Operations

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*
- *createEntity*
- *getEntity*
- *updateEntity*
- *deleteEntity*
- *findEntity*
- *mergeEntity*

- *processEntity*

getDfltObjAttrHints

Get object attribute hint operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	viewName parameter
localeName	string	localeName parameter

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	return parameter

getServiceLastUpdateTime

Get last update time operation for a custom object.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last updated time of the service as return parameter.

getEntityList

Get list operation for a custom object.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	Entity List as return parameter.

createEntity

Create operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	Data object to be created. The data object must include key fields for identifying the created record, as well as the required fields.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	Data object created for the custom object.

getEntity

Get operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
keyValue	string	A list of key values for identifying the custom object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	Data object identified by the keyValue.

updateEntity

Update operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	Data object to be updated. The data object must include key fields for identifying the updated record, as well as the fields to be updated.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	

deleteEntity

Delete operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	Data object to be deleted. The data object must include key fields for identifying the deleted record.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	void	

findEntity

Find operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	List of data objects identified by the findCriteria.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Search control.
objectName	string	Search criteria for looking up custom object records.

Response Payload

Element Name	Type	Description
result	anyType	Custom object type name.

mergeEntity

Merge operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	
objectName	string	

Response Payload

Element Name	Type	Description
result	anyType	

processEntity

Process operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	
object	anyType	
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	
objectName	string	

Response Payload

Element Name	Type	Description
result	anyType	

Custom Business Object

A service to create, update, delete, or find custom business objects created in the Oracle Fusion CRM application. A custom business object stores extended information for an Oracle Fusion business object.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/custom/extnService/}CustomReferenceService

Service WSDL URL: https://servername/crmService/CustomReferenceService?WSDL

Logical Business Objects

- CRM : CRM Application Composer : CRM Extensible Object

Operations

- *getDfltObjAttrHints*

- *getServiceLastUpdateTime*
- *getEntityList*
- *invokeObjectFunction*
- *createEntity*
- *getEntity*
- *updateEntity*
- *deleteEntity*
- *findEntity*
- *mergeEntity*
- *processEntity*

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

invokeObjectFunction

invoke custom object row function.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
row	anyType	DataObject used to invoke the script
viewName	string	Custom Object type name
scriptName	string	row function name
params	anyType	row function parameters

Response Payload

Element Name	Type	Description
result	anyType	DataObject

createEntity

Create operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject created for the custom object.

getEntity

Get operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
keyValue	string	A list of key values for identifying the custom object.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject identified by the keyValue.

updateEntity

Update operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be updated. The DataObject must include key fields for identifying the updated record, as well as the fields to be updated.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject updated for the custom object.

deleteEntity

Delete operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be deleted. The DataObject must include key fields for identifying the deleted record.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	void	DataObject that is deleted.

findEntity

Find operation for a custom object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	List of DataObjects identified by the findCriteria.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Search control.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObjects found

mergeEntity

merge with existing custom object if exist, create new object if does not exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
object	anyType	DataObject to be merged. The DataObject must include key fields for identifying the record, as well as the fields to be merged.
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject result from the merge

processEntity

batch process for custom object operation

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Operation name
object	anyType	DataObjects to be batch processed
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	process control
objectName	string	Custom object type name.

Response Payload

Element Name	Type	Description
result	anyType	DataObject result list

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
processEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea
getEntityList	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
updateEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea

Operation Name	Privilege Code	Privilege Name	Privilege Description
getEntity	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
deleteEntity	ZCX_DELETE_CUSTOM_OBJECT_PRIV	DELETE custom object resources (WorkArea)	PermissionSet to DELETE for custom object WorkArea
findEntity	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
getDfltObjAttrHints	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
createEntity	ZCX_CREATE_CUSTOM_OBJECT_PRIV	CREATE custom object resources (WorkArea)	PermissionSet to CREATE for custom object WorkArea
getServiceLastUpdateTime	ZCX_READ_CUSTOM_OBJECT_PRIV	READ custom object resources (WorkArea)	PermissionSet to READ for custom object WorkArea
mergeEntity	ZCX_UPDATE_CUSTOM_OBJECT_PRIV	UPDATE custom object resources (WorkArea)	PermissionSet to UPDATE for custom object WorkArea

Service Request Service

A service to create, update, get, find, or delete service requests. Access to this SOAP service is restricted only for use by the Oracle Integration Cloud Service.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/srMgmt/srMgmtService/}ServiceRequestService

Service WSDL URL: https://servername/crmService/ServiceRequestService?WSDL

Logical Business Objects

- CRM : Service : Service Request

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Internal Service Request*

Relationship Type	Object or Service
Handles	*Milestone History*
Handles	*Service Request Contact*
Handles	*SR Social Post*
Handles	*SR Message Social Post*
Handles	*Service Request Resource*
Handles	*Milestone*
Handles	*Service Request Resource Team*
Handles	*Interaction Reference*
Handles	*Milestone Configuration*
Handles	*Service Request Reference*
Handles	*HR Help Desk Request*
Handles	*Message*
Handles	*Service Request*

Operations

- *handleDeletedSocialPost*
- *handleNewSocialPost*
- *getServiceRequest*
- *createServiceRequest*
- *updateServiceRequest*
- *deleteServiceRequest*
- *mergeServiceRequest*
- *findServiceRequest*
- *findServiceRequestSRListByStripeCdVC*
- *getSrMessage*
- *createSrMessage*

- *updateSrMessage*
- *deleteSrMessage*
- *mergeSrMessage*
- *getSrContactMember*
- *deleteSrContactMember*
- *getSrResourceMemberResource*
- *deleteSrResourceMemberResource*
- *getSrReference*
- *deleteSrReference*
- *findSrSocialPost*
- *findSrMessageSocialPost*
- *getHRHelpDeskRequest*
- *createHRHelpDeskRequest*
- *updateHRHelpDeskRequest*
- *deleteHRHelpDeskRequest*
- *mergeHRHelpDeskRequest*
- *findHRHelpDeskRequest*
- *getInternalServiceRequest*
- *createInternalServiceRequest*
- *updateInternalServiceRequest*
- *deleteInternalServiceRequest*
- *mergeInternalServiceRequest*
- *findInternalServiceRequest*

handleDeletedSocialPost

Handles the deleted post event.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
postId	long	The primary key of the post being deleted.

Response Payload

Element Name	Type	Description
result	void	

handleNewSocialPost

Handles the new social post event.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
postId	long	The primary key of the social post being created.

Response Payload

Element Name	Type	Description
result	void	

getServiceRequest

Queries a single service request record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
srId	long	The service request ID.

Response Payload

Element Name	Type	Description
result	*Service Request*	A service request that matches the inbound parameters.

createServiceRequest

Creates a single service request record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceRequest	*Service Request*	The service request to be created.

Response Payload

Element Name	Type	Description
result	*Service Request*	The service request created.

updateServiceRequest

Updates a single service request record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceRequest	*Service Request*	The service request to be updated.

Response Payload

Element Name	Type	Description
result	*Service Request*	The updated service request.

deleteServiceRequest

Delete a single service request record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceRequest	*Service Request*	The service request record to be deleted.

Response Payload

Element Name	Type	Description
result	void	nothing.

mergeServiceRequest

Updates a single service request record if one exists; otherwise, creates a new service record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceRequest	*Service Request*	The service request record to be updated.

Response Payload

Element Name	Type	Description
result	*Service Request*	The updated service request record.

findServiceRequest

Queries a list of service requests based on a filter criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to query the list of service requests.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Not currently used.

Response Payload

Element Name	Type	Description
result	*Service Request*	A list of service requests that satisfy the inbound parameters.

findServiceRequestSRListByStripeCdVC

Queries a list of service requests for a specific stripe.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to query the list of service requests.
BindStripeCd	string	The application stripe code.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Not currently used.

Response Payload

Element Name	Type	Description
result	*Service Request*	A list of service requests that satisfy the inbound criteria.

getSrMessage

Queries a single service request message record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
messageId	long	The service request message ID.

Response Payload

Element Name	Type	Description
result	*Message*	The service request message that matches the inbound parameter.

createSrMessage

Creates a single service request message record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
srMessage	*Message*	The service request message to be created.

Response Payload

Element Name	Type	Description
result	*Message*	The service request message created.

updateSrMessage

Updates a single Service request message record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
srMessage	*Message*	The service request message to be updated.

Response Payload

Element Name	Type	Description
result	*Message*	The updated service request message.

deleteSrMessage

Deletes a service request message record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
srMessage	*Message*	The service request message to be deleted.

Response Payload

Element Name	Type	Description
result	void	nothing.

mergeSrMessage

Updates a single sr message record if one exists; otherwise, creates a new sr message record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
srMessage	*Message*	The service request message record to be updated.

Response Payload

Element Name	Type	Description
result	*Message*	The updated service request message record.

getSrContactMember

Queries a single service request contact record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
memberId	long	The ID of the service request contact member.

Response Payload

Element Name	Type	Description
result	*Service Request Contact*	The service request contact member that matches the inbound parameter.

deleteSrContactMember

Deletes a single service request contact record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
srContactMember	*Service Request Contact*	The service request contact member to be deleted.

Response Payload

Element Name	Type	Description
result	void	nothing.

getSrResourceMemberResource

Queries a single service request resource record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
memberId	long	The ID of the service request resource.

Response Payload

Element Name	Type	Description
result	*Service Request Resource*	The service request resource that matches the inbound parameter.

deleteSrResourceMemberResource

Deletes a single service request resource record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
srResourceMemberResource	*Service Request Resource*	The service request resource record to be deleted.

Response Payload

Element Name	Type	Description
result	void	nothing.

getSrReference

Queries a single service request reference record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
referenceId	long	The ID of the service request reference.

Response Payload

Element Name	Type	Description
result	*Service Request Reference*	The service request reference that matches the inbound parameter.

deleteSrReference

Deletes a service request reference record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
srReference	*Service Request Reference*	The service request reference record to be deleted.

Response Payload

Element Name	Type	Description
result	void	nothing.

findSrSocialPost

Queries a list of social posts corresponding to the service requests.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to query the results.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Not currently used.

Response Payload

Element Name	Type	Description
result	*SR Social Post*	A list of social posts corresponding to the service requests.

findSrMessageSocialPost

Queries a list of social posts corresponding to the service request messages.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to query the results.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Not currently used.

Response Payload

Element Name	Type	Description
result	*SR Message Social Post*	A list of social posts corresponding to the service request messages.

getHRHelpDeskRequest

Queries a single service request record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
srId	long	The service request ID.

Response Payload

Element Name	Type	Description
result	*HR Help Desk Request*	A service request that matches the inbound parameters.

createHRHelpDeskRequest

Creates a single service request record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceRequest_HRHD	*HR Help Desk Request*	The service request to be created.

Response Payload

Element Name	Type	Description
result	*HR Help Desk Request*	The service request created.

updateHRHelpDeskRequest

Updates a single service request record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceRequest_HRHD	*HR Help Desk Request*	The service request to be updated.

Response Payload

Element Name	Type	Description
result	*HR Help Desk Request*	The updated service request.

deleteHRHelpDeskRequest

Delete a single service request record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceRequest_HRHD	*HR Help Desk Request*	The service request record to be deleted.

Response Payload

Element Name	Type	Description
result	void	nothing.

mergeHRHelpDeskRequest

Updates a single service request record if one exists; otherwise, creates a new service record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceRequest_HRHD	*HR Help Desk Request*	The service request record to be updated.

Response Payload

Element Name	Type	Description
result	*HR Help Desk Request*	The updated service request record.

findHRHelpDeskRequest

Queries a list of service requests based on a filter criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to query the list of service requests.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Not currently used.

Response Payload

Element Name	Type	Description
result	*HR Help Desk Request*	A list of service requests that satisfy the inbound parameters.

getInternalServiceRequest

Queries a single service request record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
srId	long	The service request ID.

Response Payload

Element Name	Type	Description
result	*Internal Service Request*	A service request that matches the inbound parameters.

createInternalServiceRequest

Creates a single service request record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceRequest_ISR	*Internal Service Request*	The service request to be created.

Response Payload

Element Name	Type	Description
result	*Internal Service Request*	The service request created.

updateInternalServiceRequest

Updates a single service request record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceRequest_ISR	*Internal Service Request*	The service request to be updated.

Response Payload

Element Name	Type	Description
result	*Internal Service Request*	The updated service request.

deleteInternalServiceRequest

Delete a single service request record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceRequest_ISR	*Internal Service Request*	The service request record to be deleted.

Response Payload

Element Name	Type	Description
result	void	nothing.

mergeInternalServiceRequest

Updates a single service request record if one exists; otherwise, creates a new service record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
serviceRequest_ISR	*Internal Service Request*	The service request record to be updated.

Response Payload

Element Name	Type	Description
result	*Internal Service Request*	The updated service request record.

findInternalServiceRequest

Queries a list of service requests based on a filter criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to query the list of service requests.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Not currently used.

Response Payload

Element Name	Type	Description
result	*Internal Service Request*	A list of service requests that satisfy the inbound parameters.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getServiceRequest	SVC_CREATE_SR_PRIV	Create Service Request	Allows creation of a service request
getServiceRequest	SVC_VIEW_SR_USING_REST_PRIV	Use REST Service to View Service Request	Allows viewing of service requests using REST API.
getServiceRequest	SVC_DELETE_SR_PRIV	Delete Service Request	Allows deleting of service request
getServiceRequest	SVC_EDIT_SR_PRIV	Edit Service Request	Allows editing of a service request
getServiceRequest	SVC_VIEW_SR_PRIV	View Service Request	Allows viewing of service request(s).
getServiceRequest	SVC_VIEW_HELPDESK_SR_PRIV	View Help Desk Service Request	Allows viewing of Help Desk service request details.
deleteInternalServiceRequest	SVC_DELETE_ISR_SR_PRIV	Delete Internal Service Request	Allows deleting of an ISR service request.

Operation Name	Privilege Code	Privilege Name	Privilege Description
createInternalServiceRequest	SVC_CREATE_ISR_SR_PRIV	Create Internal Service Request	Allows creation of an ISR service request.
createInternalServiceRequest	SVC_VIEW_AGENT_ISR_HD_PRIV	View Agent Internal Help Desk	Allows viewing of ISR Agent Help Desk.
findInternalServiceRequest	SVC_CREATE_ISR_SR_PRIV	Create Internal Service Request	Allows creation of an ISR service request.
findInternalServiceRequest	SVC_EDIT_ISR_SR_PRIV	Edit Internal Service Request	Allows editing of an ISR service request.
findInternalServiceRequest	SVC_VIEW_ISR_SR_PRIV	View Internal Service Request	Allows viewing of ISR service request(s).
findInternalServiceRequest	SVC_DELETE_ISR_SR_PRIV	Delete Internal Service Request	Allows deleting of an ISR service request.
findInternalServiceRequest	SVC_VIEW_AGENT_ISR_HD_PRIV	View Agent Internal Help Desk	Allows viewing of ISR Agent Help Desk.
mergeHRHelpDeskRequest	SVC_VIEW_AGENT_HR_HD_PRIV	View Agent HR Help Desk	Allows viewing of HR Agent Help Desk.
findSrMessageSocialPost	SVC_MANAGE_SOCIAL_POST_PRIV	Manage Social Post	Allows create, update, delete and view of social posts
createHRHelpDeskRequest	SVC_VIEW_AGENT_HR_HD_PRIV	View Agent HR Help Desk	Allows viewing of HR Agent Help Desk.
createHRHelpDeskRequest	SVC_CREATE_HR_SR_PRIV	Create HR Service Request	Allows creation of an HR service request.
createSrMessage	SVC_EDIT_ISR_SR_PRIV	Edit Internal Service Request	Allows editing of an ISR service request.
createSrMessage	SVC_EDIT_SR_PRIV	Edit Service Request	Allows editing of a service request
createSrMessage	SVC_EDIT_HR_SR_PRIV	Edit HR Service Request	Allows editing of an HR service request.
createSrMessage	SVC_CREATE_SR_USING_REST_PRIV	Use REST Service to Create Service Request	Allows creation of a service request using REST API.
deleteServiceRequest	SVC_DELETE_SR_PRIV	Delete Service Request	Allows deleting of service request

Operation Name	Privilege Code	Privilege Name	Privilege Description
mergeInternalServiceRequest	SVC_VIEW_AGENT_ISR_HD_PRIV	View Agent Internal Help Desk	Allows viewing of ISR Agent Help Desk.
deleteHRHelpDeskRequest	SVC_DELETE_HR_SR_PRIV	Delete HR Service Request	Allows deleting of an HR service request.
deleteSrResourceMemberResource	SVC_DELETE_HR_SR_PRIV	Delete HR Service Request	Allows deleting of an HR service request.
deleteSrResourceMemberResource	SVC_MANAGE_HR_SR_TEAM_MEMBERS_PRIV	Manage HR SR Team Members	Allows adding/removing a team member from an HR service request.
deleteSrResourceMemberResource	SVC_EDIT_ISR_SR_PRIV	Edit Internal Service Request	Allows editing of an ISR service request.
deleteSrResourceMemberResource	SVC_DELETE_SR_PRIV	Delete Service Request	Allows deleting of service request
deleteSrResourceMemberResource	SVC_EDIT_SR_PRIV	Edit Service Request	Allows editing of a service request
deleteSrResourceMemberResource	SVC_EDIT_HR_SR_PRIV	Edit HR Service Request	Allows editing of an HR service request.
deleteSrResourceMemberResource	SVC_DELETE_ISR_SR_PRIV	Delete Internal Service Request	Allows deleting of an ISR service request.
deleteSrResourceMemberResource	SVC_MANAGE_SR_TEAM_MEMBERS_PRIV	Manage SR Team Member	Allows adding/removing a team member to a SR
deleteSrResourceMemberResource	SVC_MANAGE_ISR_SR_TEAM_MEMBERS_PRIV	Manage Internal SR Team Members	Allows adding/removing a team member from an ISR service request.
findServiceRequest	SVC_CREATE_SR_PRIV	Create Service Request	Allows creation of a service request
findServiceRequest	SVC_VIEW_SR_USING_REST_PRIV	Use REST Service to View Service Request	Allows viewing of service requests using REST API.
findServiceRequest	SVC_DELETE_SR_PRIV	Delete Service Request	Allows deleting of service request
findServiceRequest	SVC_EDIT_SR_PRIV	Edit Service Request	Allows editing of a service request
findServiceRequest	SVC_VIEW_SR_PRIV	View Service Request	Allows viewing of service request(s).

Operation Name	Privilege Code	Privilege Name	Privilege Description
findServiceRequest	SVC_VIEW_HELPDESK_SR_PRIV	View Help Desk Service Request	Allows viewing of Help Desk service request details.
getSrReference	SVC_DELETE_HR_SR_PRIV	Delete HR Service Request	Allows deleting of an HR service request.
getSrReference	SVC_CREATE_ISR_SR_PRIV	Create Internal Service Request	Allows creation of an ISR service request.
getSrReference	SVC_DELETE_SR_PRIV	Delete Service Request	Allows deleting of service request
getSrReference	SVC_VIEW_SR_USING_REST_PRIV	Use REST Service to View Service Request	Allows viewing of service requests using REST API.
getSrReference	SVC_EDIT_ISR_SR_PRIV	Edit Internal Service Request	Allows editing of an ISR service request.
getSrReference	SVC_VIEW_ISR_SR_PRIV	View Internal Service Request	Allows viewing of ISR service request(s).
getSrReference	SVC_VIEW_SR_PRIV	View Service Request	Allows viewing of service request(s).
getSrReference	SVC_VIEW_HR_SR_PRIV	View HR Service Request	Allows viewing of HR service request(s).
getSrReference	SVC_CREATE_HR_SR_PRIV	Create HR Service Request	Allows creation of an HR service request.
getSrReference	SVC_CREATE_SR_PRIV	Create Service Request	Allows creation of a service request
getSrReference	SVC_EDIT_SR_PRIV	Edit Service Request	Allows editing of a service request
getSrReference	SVC_DELETE_ISR_SR_PRIV	Delete Internal Service Request	Allows deleting of an ISR service request.
getSrReference	SVC_EDIT_HR_SR_PRIV	Edit HR Service Request	Allows editing of an HR service request.
getSrReference	SVC_VIEW_HELPDESK_SR_PRIV	View Help Desk Service Request	Allows viewing of Help Desk service request details.
getSrReference	SVC_VIEW_KNOWLEDGE_IN_SR_PRIV	View Knowledge within Service Request	Allows viewing of knowledge base components within the service request UI.

Operation Name	Privilege Code	Privilege Name	Privilege Description
deleteSrReference	SVC_DELETE_HR_SR_PRIV	Delete HR Service Request	Allows deleting of an HR service request.
deleteSrReference	SVC_EDIT_ISR_SR_PRIV	Edit Internal Service Request	Allows editing of an ISR service request.
deleteSrReference	SVC_DELETE_SR_PRIV	Delete Service Request	Allows deleting of service request
deleteSrReference	SVC_EDIT_SR_PRIV	Edit Service Request	Allows editing of a service request
deleteSrReference	SVC_EDIT_HR_SR_PRIV	Edit HR Service Request	Allows editing of an HR service request.
deleteSrReference	SVC_DELETE_ISR_SR_PRIV	Delete Internal Service Request	Allows deleting of an ISR service request.
handleNewSocialPost	SVC_MANAGE_SOCIAL_POST_PRIV	Manage Social Post	Allows create, update, delete and view of social posts
getSrResourceMemberResource	SVC_DELETE_HR_SR_PRIV	Delete HR Service Request	Allows deleting of an HR service request.
getSrResourceMemberResource	SVC_CREATE_ISR_SR_PRIV	Create Internal Service Request	Allows creation of an ISR service request.
getSrResourceMemberResource	SVC_DELETE_SR_PRIV	Delete Service Request	Allows deleting of service request
getSrResourceMemberResource	SVC_EDIT_ISR_SR_PRIV	Edit Internal Service Request	Allows editing of an ISR service request.
getSrResourceMemberResource	SVC_VIEW_ISR_SR_PRIV	View Internal Service Request	Allows viewing of ISR service request(s).
getSrResourceMemberResource	SVC_VIEW_SR_PRIV	View Service Request	Allows viewing of service request(s).
getSrResourceMemberResource	SVC_VIEW_HR_SR_PRIV	View HR Service Request	Allows viewing of HR service request(s).
getSrResourceMemberResource	SVC_MANAGE_SR_TEAM_MEMBERS_PRIV	Manage SR Team Member	Allows adding/removing a team member to a SR
getSrResourceMemberResource	SVC_CREATE_HR_SR_PRIV	Create HR Service Request	Allows creation of an HR service request.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getSrResourceMemberResource	SVC_MANAGE_ISR_SR_TEAM_MEMBERS_PRIV	Manage Internal SR Team Members	Allows adding/removing a team member from an ISR service request.
getSrResourceMemberResource	SVC_CREATE_SR_PRIV	Create Service Request	Allows creation of a service request
getSrResourceMemberResource	SVC_MANAGE_HR_SR_TEAM_MEMBERS_PRIV	Manage HR SR Team Members	Allows adding/removing a team member from an HR service request.
getSrResourceMemberResource	SVC_EDIT_SR_PRIV	Edit Service Request	Allows editing of a service request
getSrResourceMemberResource	SVC_DELETE_ISR_SR_PRIV	Delete Internal Service Request	Allows deleting of an ISR service request.
getSrResourceMemberResource	SVC_EDIT_HR_SR_PRIV	Edit HR Service Request	Allows editing of an HR service request.
getSrResourceMemberResource	SVC_VIEW_SR_TEAM_PRIV	View Service Request Team	Allows viewing of service request team tab and its contents.
getSrResourceMemberResource	SVC_VIEW_HELPDESK_SR_PRIV	View Help Desk Service Request	Allows viewing of Help Desk service request details.
updateSrMessage	SVC_EDIT_ISR_SR_PRIV	Edit Internal Service Request	Allows editing of an ISR service request.
updateSrMessage	SVC_EDIT_SR_PRIV	Edit Service Request	Allows editing of a service request
updateSrMessage	SVC_EDIT_SR_USING_REST_PRIV	Use REST Service to Edit Service Request	Allows editing a service request using REST API.
updateSrMessage	SVC_EDIT_HR_SR_PRIV	Edit HR Service Request	Allows editing of an HR service request.
getSrMessage	SVC_DELETE_HR_SR_PRIV	Delete HR Service Request	Allows deleting of an HR service request.
getSrMessage	SVC_DELETE_SR_PRIV	Delete Service Request	Allows deleting of service request
getSrMessage	SVC_VIEW_SR_USING_REST_PRIV	Use REST Service to View Service Request	Allows viewing of service requests using REST API.
getSrMessage	SVC_EDIT_ISR_SR_PRIV	Edit Internal Service Request	Allows editing of an ISR service request.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getSrMessage	SVC_CREATE_ISR_SR_PRIV	Create Internal Service Request	Allows creation of an ISR service request.
getSrMessage	SVC_VIEW_ISR_SR_PRIV	View Internal Service Request	Allows viewing of ISR service request(s).
getSrMessage	SVC_VIEW_SR_PRIV	View Service Request	Allows viewing of service request(s).
getSrMessage	SVC_VIEW_HR_SR_PRIV	View HR Service Request	Allows viewing of HR service request(s).
getSrMessage	SVC_CREATE_HR_SR_PRIV	Create HR Service Request	Allows creation of an HR service request.
getSrMessage	SVC_CREATE_SR_PRIV	Create Service Request	Allows creation of a service request
getSrMessage	SVC_EDIT_SR_PRIV	Edit Service Request	Allows editing of a service request
getSrMessage	SVC_DELETE_ISR_SR_PRIV	Delete Internal Service Request	Allows deleting of an ISR service request.
getSrMessage	SVC_EDIT_HR_SR_PRIV	Edit HR Service Request	Allows editing of an HR service request.
getSrMessage	SVC_VIEW_HELPDESK_SR_PRIV	View Help Desk Service Request	Allows viewing of Help Desk service request details.
getHRHelpDeskRequest	SVC_DELETE_HR_SR_PRIV	Delete HR Service Request	Allows deleting of an HR service request.
getHRHelpDeskRequest	SVC_EDIT_HR_SR_PRIV	Edit HR Service Request	Allows editing of an HR service request.
getHRHelpDeskRequest	SVC_VIEW_HR_SR_PRIV	View HR Service Request	Allows viewing of HR service request(s).
getHRHelpDeskRequest	SVC_VIEW_AGENT_HR_HD_PRIV	View Agent HR Help Desk	Allows viewing of HR Agent Help Desk.
getHRHelpDeskRequest	SVC_CREATE_HR_SR_PRIV	Create HR Service Request	Allows creation of an HR service request.
handleDeletedSocialPost	SVC_MANAGE_SOCIAL_POST_PRIV	Manage Social Post	Allows create, update, delete and view of social posts

Operation Name	Privilege Code	Privilege Name	Privilege Description
deleteSrContactMember	SVC_DELETE_HR_SR_PRIV	Delete HR Service Request	Allows deleting of an HR service request.
deleteSrContactMember	SVC_EDIT_ISR_SR_PRIV	Edit Internal Service Request	Allows editing of an ISR service request.
deleteSrContactMember	SVC_DELETE_SR_PRIV	Delete Service Request	Allows deleting of service request
deleteSrContactMember	SVC_EDIT_SR_PRIV	Edit Service Request	Allows editing of a service request
deleteSrContactMember	SVC_EDIT_HR_SR_PRIV	Edit HR Service Request	Allows editing of an HR service request.
deleteSrContactMember	SVC_DELETE_ISR_SR_PRIV	Delete Internal Service Request	Allows deleting of an ISR service request.
findSrSocialPost	SVC_MANAGE_SOCIAL_POST_PRIV	Manage Social Post	Allows create, update, delete and view of social posts
updateHRHelpDeskRequest	SVC_EDIT_HR_SR_PRIV	Edit HR Service Request	Allows editing of an HR service request.
updateHRHelpDeskRequest	SVC_VIEW_AGENT_HR_HD_PRIV	View Agent HR Help Desk	Allows viewing of HR Agent Help Desk.
createServiceRequest	SVC_CREATE_SR_PRIV	Create Service Request	Allows creation of a service request
createServiceRequest	SVC_CREATE_SR_USING_REST_PRIV	Use REST Service to Create Service Request	Allows creation of a service request using REST API.
mergeSrMessage	SVC_EDIT_ISR_SR_PRIV	Edit Internal Service Request	Allows editing of an ISR service request.
mergeSrMessage	SVC_EDIT_SR_PRIV	Edit Service Request	Allows editing of a service request
mergeSrMessage	SVC_EDIT_SR_USING_REST_PRIV	Use REST Service to Edit Service Request	Allows editing a service request using REST API.
mergeSrMessage	SVC_EDIT_HR_SR_PRIV	Edit HR Service Request	Allows editing of an HR service request.
getSrContactMember	SVC_DELETE_HR_SR_PRIV	Delete HR Service Request	Allows deleting of an HR service request.
getSrContactMember	SVC_DELETE_SR_PRIV	Delete Service Request	Allows deleting of service request

Operation Name	Privilege Code	Privilege Name	Privilege Description
getSrContactMember	SVC_EDIT_ISR_SR_PRIV	Edit Internal Service Request	Allows editing of an ISR service request.
getSrContactMember	SVC_CREATE_ISR_SR_PRIV	Create Internal Service Request	Allows creation of an ISR service request.
getSrContactMember	SVC_VIEW_ISR_SR_PRIV	View Internal Service Request	Allows viewing of ISR service request(s).
getSrContactMember	SVC_VIEW_SR_PRIV	View Service Request	Allows viewing of service request(s).
getSrContactMember	SVC_VIEW_HR_SR_PRIV	View HR Service Request	Allows viewing of HR service request(s).
getSrContactMember	SVC_CREATE_HR_SR_PRIV	Create HR Service Request	Allows creation of an HR service request.
getSrContactMember	SVC_CREATE_SR_PRIV	Create Service Request	Allows creation of a service request
getSrContactMember	SVC_EDIT_SR_PRIV	Edit Service Request	Allows editing of a service request
getSrContactMember	SVC_DELETE_ISR_SR_PRIV	Delete Internal Service Request	Allows deleting of an ISR service request.
getSrContactMember	SVC_EDIT_HR_SR_PRIV	Edit HR Service Request	Allows editing of an HR service request.
getSrContactMember	SVC_VIEW_HELPDESK_SR_PRIV	View Help Desk Service Request	Allows viewing of Help Desk service request details.
mergeServiceRequest	SVC_EDIT_SR_PRIV	Edit Service Request	Allows editing of a service request
mergeServiceRequest	SVC_EDIT_SR_USING_REST_PRIV	Use REST Service to Edit Service Request	Allows editing a service request using REST API.
updateInternalServiceRequest	SVC_EDIT_ISR_SR_PRIV	Edit Internal Service Request	Allows editing of an ISR service request.
updateInternalServiceRequest	SVC_VIEW_AGENT_ISR_HD_PRIV	View Agent Internal Help Desk	Allows viewing of ISR Agent Help Desk.
findServiceRequestSRListByStripeC	SVC_DELETE_HR_SR_PRIV	Delete HR Service Request	Allows deleting of an HR service request.
findServiceRequestSRListByStripeC	SVC_DELETE_SR_PRIV	Delete Service Request	Allows deleting of service request

Operation Name	Privilege Code	Privilege Name	Privilege Description
findServiceRequestSRListByStripeC	SVC_EDIT_ISR_SR_PRIV	Edit Internal Service Request	Allows editing of an ISR service request.
findServiceRequestSRListByStripeC	SVC_CREATE_ISR_SR_PRIV	Create Internal Service Request	Allows creation of an ISR service request.
findServiceRequestSRListByStripeC	SVC_VIEW_ISR_SR_PRIV	View Internal Service Request	Allows viewing of ISR service request(s).
findServiceRequestSRListByStripeC	SVC_VIEW_SR_PRIV	View Service Request	Allows viewing of service request(s).
findServiceRequestSRListByStripeC	SVC_VIEW_HR_SR_PRIV	View HR Service Request	Allows viewing of HR service request(s).
findServiceRequestSRListByStripeC	SVC_CREATE_HR_SR_PRIV	Create HR Service Request	Allows creation of an HR service request.
findServiceRequestSRListByStripeC	SVC_CREATE_SR_PRIV	Create Service Request	Allows creation of a service request
findServiceRequestSRListByStripeC	SVC_EDIT_SR_PRIV	Edit Service Request	Allows editing of a service request
findServiceRequestSRListByStripeC	SVC_DELETE_ISR_SR_PRIV	Delete Internal Service Request	Allows deleting of an ISR service request.
findServiceRequestSRListByStripeC	SVC_EDIT_HR_SR_PRIV	Edit HR Service Request	Allows editing of an HR service request.
findServiceRequestSRListByStripeC	SVC_VIEW_HELPDESK_SR_PRIV	View Help Desk Service Request	Allows viewing of Help Desk service request details.
getInternalServiceRequest	SVC_CREATE_ISR_SR_PRIV	Create Internal Service Request	Allows creation of an ISR service request.
getInternalServiceRequest	SVC_EDIT_ISR_SR_PRIV	Edit Internal Service Request	Allows editing of an ISR service request.
getInternalServiceRequest	SVC_VIEW_ISR_SR_PRIV	View Internal Service Request	Allows viewing of ISR service request(s).
getInternalServiceRequest	SVC_DELETE_ISR_SR_PRIV	Delete Internal Service Request	Allows deleting of an ISR service request.
getInternalServiceRequest	SVC_VIEW_AGENT_ISR_HD_PRIV	View Agent Internal Help Desk	Allows viewing of ISR Agent Help Desk.

Operation Name	Privilege Code	Privilege Name	Privilege Description
updateServiceRequest	SVC_EDIT_SR_PRIV	Edit Service Request	Allows editing of a service request
updateServiceRequest	SVC_EDIT_SR_USING_REST_PRIV	Use REST Service to Edit Service Request	Allows editing a service request using REST API.
findHRHelpDeskRequest	SVC_DELETE_HR_SR_PRIV	Delete HR Service Request	Allows deleting of an HR service request.
findHRHelpDeskRequest	SVC_EDIT_HR_SR_PRIV	Edit HR Service Request	Allows editing of an HR service request.
findHRHelpDeskRequest	SVC_VIEW_HR_SR_PRIV	View HR Service Request	Allows viewing of HR service request(s).
findHRHelpDeskRequest	SVC_VIEW_AGENT_HR_HD_PRIV	View Agent HR Help Desk	Allows viewing of HR Agent Help Desk.
findHRHelpDeskRequest	SVC_CREATE_HR_SR_PRIV	Create HR Service Request	Allows creation of an HR service request.
deleteSrMessage	SVC_DELETE_HR_SR_PRIV	Delete HR Service Request	Allows deleting of an HR service request.
deleteSrMessage	SVC_EDIT_ISR_SR_PRIV	Edit Internal Service Request	Allows editing of an ISR service request.
deleteSrMessage	SVC_DELETE_SR_PRIV	Delete Service Request	Allows deleting of service request
deleteSrMessage	SVC_EDIT_SR_PRIV	Edit Service Request	Allows editing of a service request
deleteSrMessage	SVC_EDIT_HR_SR_PRIV	Edit HR Service Request	Allows editing of an HR service request.
deleteSrMessage	SVC_DELETE_ISR_SR_PRIV	Delete Internal Service Request	Allows deleting of an ISR service request.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_DELETE_SR_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_DELETE_SR_PRIV	ORA_SVC_HELPDESK_ ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
SVC_CREATE_HR_SR_PRIV	ORA_SVC_HR_SR_CREATION	HR Service Request Creation	Users requesting Next Gen support to resolve their HR related questions and issues.
SVC_CREATE_HR_SR_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_CREATE_HR_SR_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
SVC_CREATE_HR_SR_PRIV	ORA_SVC_HR_SR_ ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
SVC_MANAGE_HR_SR_TEAM_ MEMBERS_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_MANAGE_HR_SR_TEAM_ MEMBERS_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
SVC_MANAGE_HR_SR_TEAM_ MEMBERS_PRIV	ORA_SVC_HR_SR_ ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
SVC_MANAGE_ISR_SR_TEAM_ MEMBERS_PRIV	ORA_SVC_INTERNAL_HELPDESK_ SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_MANAGE_ISR_SR_TEAM_MEMBERS_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_MANAGE_ISR_SR_TEAM_MEMBERS_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
SVC_VIEW_HELPDESK_SR_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
SVC_VIEW_HELPDESK_SR_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_VIEW_HELPDESK_SR_PRIV	ORA_SVC_HELPDESK_SR_CREATION	HR Help Desk Service Request Creation	Employee requesting support to resolve their HCM related questions and issues.
SVC_VIEW_HELPDESK_SR_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
SVC_VIEW_ISR_SR_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_CREATION	Internal Service Request Creation	Users requesting support to resolve their Internal related questions and issues.
SVC_VIEW_ISR_SR_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
SVC_VIEW_ISR_SR_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_VIEW_ISR_SR_PRIV	ORA_MNT_MAINTENANCE_MANAGER_JOB	Maintenance Manager	Individual responsible for ensuring effective maintenance programs

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			are in place and overseeing completion of maintenance tasks.
SVC_VIEW_ISR_SR_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
SVC_VIEW_HR_SR_PRIV	ORA_SVC_HR_SR_CREATION	HR Service Request Creation	Users requesting Next Gen support to resolve their HR related questions and issues.
SVC_VIEW_HR_SR_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_VIEW_HR_SR_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
SVC_VIEW_HR_SR_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
SVC_DELETE_HR_SR_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
SVC_VIEW_SR_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_VIEW_SR_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
SVC_VIEW_SR_PRIV	ORA_RCL_FIELD_SERVICE_ADMINISTRATOR_JOB	Field Service Administrator	Individual responsible for the administration of field service logistics.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_VIEW_SR_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
SVC_VIEW_SR_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
SVC_VIEW_SR_PRIV	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
SVC_VIEW_SR_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
SVC_VIEW_SR_PRIV	ORA_RCL_FIELD_SERVICE_TECHNICIAN_DUTY_CRM	Field Service Technician	Individual responsible for the duty of field service logistics.
SVC_CREATE_SR_USING_REST_PRIV	ORA_SVC_CUSTOMER_SELF_SERVICE_USAGE	Customer Self-Service Usage	A duty role that allows various self-service capabilities such as creating, viewing and editing owned service requests.
SVC_CREATE_SR_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
SVC_CREATE_SR_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_CREATE_SR_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_CREATE_SR_PRIV	ORA_SVC_HELPDESK_SR_CREATION	HR Help Desk Service Request Creation	Employee requesting support to resolve their HCM related questions and issues.
SVC_CREATE_SR_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_CREATE_SR_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
SVC_CREATE_SR_PRIV	ORA_SVC_HELPDESK_ ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
SVC_CREATE_SR_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
SVC_CREATE_SR_PRIV	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
SVC_CREATE_SR_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
SVC_EDIT_ISR_SR_PRIV	ORA_SVC_INTERNAL_HELPDESK_ SR_CREATION	Internal Service Request Creation	Users requesting support to resolve their Internal related questions and issues.
SVC_EDIT_ISR_SR_PRIV	ORA_SVC_INTERNAL_HELPDESK_ SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
SVC_EDIT_ISR_SR_PRIV	ORA_SVC_INTERNAL_HELPDESK_ ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_EDIT_ISR_SR_PRIV	ORA_MNT_MAINTENANCE_ MANAGER_JOB	Maintenance Manager	Individual responsible for ensuring effective maintenance programs are in place and overseeing completion of maintenance tasks.
SVC_EDIT_ISR_SR_PRIV	ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
SVC_VIEW_AGENT_ISR_HD_PRIV	ORA_SVC_INTERNAL_HELPDESK_ SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_VIEW_AGENT_ISR_HD_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_VIEW_AGENT_ISR_HD_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
SVC_VIEW_SR_TEAM_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
SVC_VIEW_SR_TEAM_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_VIEW_SR_TEAM_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_VIEW_SR_TEAM_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
SVC_VIEW_SR_TEAM_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
SVC_VIEW_SR_TEAM_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
SVC_VIEW_SR_TEAM_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_VIEW_SR_TEAM_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
SVC_VIEW_SR_USING_REST_PRIV	ORA_SVC_CUSTOMER_SELF_SERVICE_USAGE	Customer Self-Service Usage	A duty role that allows various self-service capabilities such as creating, viewing and editing owned service requests.
SVC_VIEW_SR_USING_REST_PRIV	ORA_RCL_FIELD_SERVICE_ADMINISTRATOR_JOB	Field Service Administrator	Individual responsible for the administration of field service logistics.
SVC_VIEW_SR_USING_REST_PRIV	ORA_MNT_MAINTENANCE_TECHNICIAN_JOB	Maintenance Technician	Individual responsible for the execution and completion of any maintenance tasks, and reporting materials and resources used during the maintenance activity.
SVC_VIEW_SR_USING_REST_PRIV	ORA_MNT_MAINTENANCE_MANAGER_JOB	Maintenance Manager	Individual responsible for ensuring effective maintenance programs are in place and overseeing completion of maintenance tasks.
SVC_VIEW_SR_USING_REST_PRIV	ORA_RCL_FIELD_SERVICE_TECHNICIAN_DUTY_CRM	Field Service Technician	Individual responsible for the duty of field service logistics.
SVC_VIEW_AGENT_HR_HD_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_VIEW_AGENT_HR_HD_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
SVC_VIEW_AGENT_HR_HD_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
SVC_EDIT_HR_SR_PRIV	ORA_SVC_HR_SR_CREATION	HR Service Request Creation	Users requesting Next Gen support to resolve their HR related questions and issues.
SVC_EDIT_HR_SR_PRIV	ORA_SVC_HR_SR_ANALYSIS	HR Service Request Analysis	Manages a group of Next Gen HR Help Desk agents. Can view Next Gen HR service requests, activities,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_EDIT_HR_SR_PRIV	ORA_SVC_HR_SR_MANAGEMENT	HR Service Request Management	Manages all aspects of the Next Gen HR Help Desk Service Request object.
SVC_EDIT_HR_SR_PRIV	ORA_SVC_HR_SR_ADMINISTRATION	HR Service Request Administration	Manages all aspects of Next Gen HR service requests. In addition, can manage queues and administer the Next Gen HR Help Desk service application, including setup.
SVC_DELETE_ISR_SR_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
SVC_CREATE_ISR_SR_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_CREATION	Internal Service Request Creation	Users requesting support to resolve their Internal related questions and issues.
SVC_CREATE_ISR_SR_PRIV	ORA_SVC_INTERNAL_HELPDESK_SR_MANAGEMENT	Internal Service Request Management	Manages all aspects of the Internal Help Desk Service Request object.
SVC_CREATE_ISR_SR_PRIV	ORA_SVC_INTERNAL_HELPDESK_ANALYSIS	Internal Service Request Analysis	Manages a group of Internal Help Desk agents. Can view Internal service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_CREATE_ISR_SR_PRIV	ORA_MNT_MAINTENANCE_MANAGER_JOB	Maintenance Manager	Individual responsible for ensuring effective maintenance programs are in place and overseeing completion of maintenance tasks.
SVC_CREATE_ISR_SR_PRIV	ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	Internal Service Request Administration	Manages all aspects of Internal service requests. In addition, can manage queues and administer the Internal Help Desk service application, including setup.
SVC_MANAGE_SR_TEAM_MEMBERS_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_MANAGE_SR_TEAM_MEMBERS_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_MANAGE_SR_TEAM_MEMBERS_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_MANAGE_SR_TEAM_MEMBERS_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
SVC_MANAGE_SR_TEAM_MEMBERS_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
SVC_MANAGE_SR_TEAM_MEMBERS_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
SVC_MANAGE_SR_TEAM_MEMBERS_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
SVC_MANAGE_SR_TEAM_MEMBERS_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
SVC_EDIT_SR_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.
SVC_EDIT_SR_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_EDIT_SR_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_EDIT_SR_PRIV	ORA_SVC_HELPDESK_SR_CREATION	HR Help Desk Service Request Creation	Employee requesting support to resolve their HCM related questions and issues.
SVC_EDIT_SR_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
SVC_EDIT_SR_PRIV	ORA_RCL_FIELD_SERVICE_ADMINISTRATOR_JOB	Field Service Administrator	Individual responsible for the administration of field service logistics.
SVC_EDIT_SR_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
SVC_EDIT_SR_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
SVC_EDIT_SR_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
SVC_EDIT_SR_PRIV	ORA_SVC_SR_PARTNER_USER	Service Request Partner User	Individual from the partner organization requesting for support to resolve their questions and issues.
SVC_EDIT_SR_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
SVC_EDIT_SR_USING_REST_PRIV	ORA_SVC_CUSTOMER_SELF_SERVICE_USAGE	Customer Self-Service Usage	A duty role that allows various self-service capabilities such as creating, viewing and editing owned service requests.
SVC_EDIT_SR_USING_REST_PRIV	ORA_RCL_FIELD_SERVICE_ADMINISTRATOR_JOB	Field Service Administrator	Individual responsible for the administration of field service logistics.
SVC_VIEW_KNOWLEDGE_IN_SR_PRIV	ORA_SVC_HELPDESK_SR_MANAGEMENT	HR Help Desk Service Request Management	Manages all aspects of the HR Help Desk Service Request object.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_VIEW_KNOWLEDGE_IN_SR_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_VIEW_KNOWLEDGE_IN_SR_PRIV	ORA_SVC_HELPDESK_ANALYSIS	HR Help Desk Analysis	Manages group of HR Help Desk agents. Can view service requests, activities, and attachments. Monitors metrics and overall resource balancing, critical service requests, service level agreements.
SVC_VIEW_KNOWLEDGE_IN_SR_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
SVC_VIEW_KNOWLEDGE_IN_SR_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
SVC_VIEW_KNOWLEDGE_IN_SR_PRIV	ORA_SVC_HELPDESK_ADMINISTRATION	HR Help Desk Administration	Manage all aspects of the HCM help desk service requests. In addition can manage queues and administer the HCM help desk service application, including setup.
SVC_VIEW_KNOWLEDGE_IN_SR_PRIV	ORA_SVC_SR_CHANNEL_USER	Service Request Channel User	Manages all aspects of the Service Request related to partner accounts
SVC_VIEW_KNOWLEDGE_IN_SR_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
SVC_MANAGE_SOCIAL_POST_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_MANAGE_SOCIAL_POST_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
SVC_MANAGE_SOCIAL_POST_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_SVC_INTERNAL_HELP_DESK_ENGAGEMENT_CHANNEL_ADMINISTRATOR	Internal Help Desk Engagement Channel Application Administrator	Individual responsible for monitoring and administration of the supervisor dashboard for Internal Help Desk.
ORA_MNT_MAINTENANCE_MANAGER_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_MNT_MAINTENANCE_TECHNICIAN_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_MNT_MAINTENANCE_MANAGER_JOB	ORA_MNT_MAINTENANCE_TECHNICIAN_JOB	Maintenance Technician	Individual responsible for the execution and completion of any maintenance tasks, and reporting materials and resources used during the maintenance activity.
ORA_MNT_MAINTENANCE_MANAGER_JOB	ORA_MNT_MANAGE_ENTERPRISE_ASSETS_DUTY_CRM	Manage Enterprise Assets	Provides access to Edit Asset UI including the view UIs in the history tab in the Edit Asset UI
ORA_MNT_MAINTENANCE_MANAGER_JOB	ORA_MNT_MANAGE_SUPPLIER_WARRANTY_DUTY_CRM	Manage Supplier Warranty	Provides manage access to Supplier Warranty feature including the access to REST resources
ORA_MNT_MAINTENANCE_MANAGER_JOB	ORA_POR_REQUISITION_SELF_SERVICE_USER_DUTY_CRM	Requisition Self Service User	Manages requisitions including creating, searching, and viewing requisitions, creating noncatalog requests, creating requisitions with one-time locations, and changing deliver-to locations on requisition lines.
ORA_SVC_INTERNAL_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_HELPDESK_ADMINISTRATION	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_HR_SR_ ADMINISTRATION	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_HR_SR_ ADMINISTRATION	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_SVC_INTERNAL_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HELPDESK_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_HR_SR_ ADMINISTRATION	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.
ORA_MNT_MAINTENANCE_ TECHNICIAN_JOB	ORA_MNT_VIEW_ENTERPRISE_ ASSETS_DUTY_CRM	View Enterprise Assets	Provides access to the View Asset UI including the view UIs in the history tab within the View Asset UI
ORA_MNT_MAINTENANCE_ TECHNICIAN_JOB	ORA_MNT_VIEW_SUPPLIER_ WARRANTY_DUTY_CRM	View Supplier Warranty	Provides View access to Supplier Warranty feature including the get access to REST resources

HR Help Desk Request

Header level information about a request from a customer for service from the time the customer makes the request until the request is resolved. For example, if a customer has an issue with their laptop battery draining too fast, the details of the customer and the issue they are facing is stored in the service request header.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/srMgmt/helpDeskService/}HRHelpDeskRequest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Service Request Contact*
Contains	*Milestone*
Contains	*Message*
Contains	*Service Request Resource Team*
Extends	*Service Request*
Handled by	*Service Request Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
HRHelpDeskRequestContacts	*Service Request Contact*	The list of contacts associated to the serivce request.
HRHelpDeskRequestMessages	*Message*	The list of service request messages.
HRHelpDeskRequestResourceTeamMembers	*Service Request Resource Team*	The list of resource team members associated to the serivce request.
HRHelpDeskRequestSrMilestone	*Milestone*	Indicates the milestone associated with the service request.

Service Request

Header level information about a request from a customer for service from the time the customer makes the request until the request is resolved. For example, if a customer has an issue with their laptop battery draining too fast, the details of the customer and the issue they are facing is stored in the service request header.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/srMgmt/base/}BaseRequest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*HR Help Desk Request*
Extended by	*Internal Service Request*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AffectedPartyPersonId	long	Indicates the contact person ID of the party affected in the service request
AffectedPartyPersonName	string	Indicates the display name of the affected party person in the service request
AssigneeEmailAddress	string	The email address of the assignee
AssigneeFormattedAddress	string	Formatted Address of the SR Assignee.
AssigneeFormattedPhoneNumber	string	Indicates the phone number of the resource to whom the service request is assigned.
AssigneePartyId	long	The unique party object ID of the service request assignee.
AssigneePersonName	string	The email address of the assignee.
AssigneeResourceId	long	The ID of the resource (for example, a support engineer) assigned to the service request.
AssigneeTimezone	string	The time zone of the assignee associated with the service request.

Name	Type	Description
AssistedByHumanFlag	boolean	
BUOrgId	long	The unique ID of the business unit name associated to the service request.
BusinessUnitName	string	The name of the business unit associated to the service request
CategoryId	long	The unique ID of the service request category.
CategoryName	string	The name of the category associated to the service request.
ChannelId	long	Indicates the service request channel.
ChannelTypeCd	string	Indicates the channel type.
ChannelTypeCdMeaning	string	Indicates the display value corresponding to the channel type lookup code for the service request.
ClosedDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the service request was closed (if closed).
ComplianceFlag	boolean	Indicates the compliance status of the milestone.
CorpCurrencyCode	string	The corporate currency code.
CreatedBy	string	The user who created the service request.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request was created.
CriticalFlag	boolean	Indicates whether the service request is critical. If critical, the value is Y, else the value is N.
CurcyConvRateType	string	The corporate currency conversion rate type.
CurrencyCode	string	The currency code.
DeleteFlag	boolean	This flag controls if the user has access to delete the record

Name	Type	Description
DueDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the due date of the milestone.
FirstTransferDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the first transfer of the service request.
HandledByAIFlag	boolean	
HeaderFlag	boolean	Indicates if the current milestone should be saved on the service request header.
IBAssetDescription	string	Indicates the Install Base asset description of the service request.
IBAssetId	long	The Unique ID of the associated Install Base asset record.
IBAssetNumber	string	Indicates the Installed Base asset number of the service request.
IBAssetSerialNumber	string	Indicates the Install Base asset serial number of the service request.
InternalPriorityCd	string	Indicates the internal priority of the service request.
InventoryItemId	long	The unique ID of the product associated to the service request.
InventoryOrgId	long	The unique ID of the organization of the product that is associated with the service request.
LanguageCd	string	The customer's preferred language for the service request.
LastReopenDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request was last reopened.
LastResolvedDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request was resolved.
LastTransferDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the last transfer of the service request.
LastTransferredBy	string	Indicates the user who last transferred the service request.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request was last updated.
LastUpdateLogin	string	The application login id of the user who last updated the service request.
LastUpdatedBy	string	The user who last updated the service request.
LastUpdatedByDisplayName	string	The display name of the user who last updated the service request.
LastUpdatedByEmailAddress	string	Indicates the e-mail address of the person who last updated the service request.
LastUpdatedByPartyId	long	Indicates the Party ID of the person who last updated the service request.
MilestoneConfigId	long	The unique ID of the milestone configuration associated with the service request.
MilestoneLabel	string	User defined name for the milestone.
MilestoneStatusCd	string	Indicates the status of the milestone.
NetworkTypeCd	string	Indicates the type of social network.
OpenDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the service request was reported by the customer.
OriginalSystemReference	string	The reference to the service request record in the original system from which service request was imported (if imported).
OwnerTypeCd	string	Indicates the type of the service request owner. For example, the owner of the service request may be a customer or a partner.
PrimaryContactDoNotContactFlag	boolean	Indicates that the primary contact of the service request does not want to be contacted.
PrimaryContactEmailAddress	string	Indicates the e-mail of the primary contact associated with the service request.
PrimaryContactFormattedAddress	string	Indicates the formatted address of the primary contact of the service request.

Name	Type	Description
PrimaryContactFormattedPhoneNumber	string	Indicates the service request primary contact's formatted phone number
PrimaryContactPartyId	long	The unique ID of the contact who intially reported the service request. The contact is also the primary contact of the service request.
PrimaryContactPartyName	string	Indicates the name of the service request primary contact.
PrimaryContactPersonId	long	The Person ID of the contact who intially reported the service request. The contact is also the primary contact of the service request.
PrimaryContactPreferredContactMethod	string	Indicates the preferred contact method of the primary contact of the service request.
ProblemCd	string	Indicates the problem code of the service request.
ProblemDescription	string	The service request's problem description/ statement and the steps to reproduce the issue.
ProdGroupId	long	The unique identifire of the product group associated to the service request.
ProdGroupName	string	The name of the product group associated to the service request.
ProductItemDescription	string	The description of the product associated with the service request.
ProductItemNumber	string	The product number/code of the product associated with the service request.
ProductItemOrgId	long	Indicates the product organization.
Queue	*oracle.apps.crm.service.svcMgmt.model.queueSe*	
QueueId	long	The unique ID of the queue to which the service request is assigned.
QueueName	string	The name of the queue associated to the service request.
RecordSet	string	Used by REST API to run saved searches.

Name	Type	Description
ReportedByEmailAddress	string	Indicates the e-mail address of the person who reported the service request.
ReportedByFormattedPhoneNumber	string	Indicates the formatted phone number of the person who reported the service request.
ReportedByPartyId	long	The user who created the service request in the system.
ReportedByPartyName	string	Reported By Party Name
ReportedByPartyUniqueName	string	The unique name of the user who created the service request.
ResolutionCd	string	Indicates the resolution code of the service request.
ResolutionCdMeaning	string	Indicates the display value corresponding to the resolution lookup code for the service request.
ResolveDescription	string	Indicates how the service request has been resolved.
ResolveOutcomeCd	string	Indicates the outcome of a service request resolution.
ResolveOutcomeCdMeaning	string	Indicates the display value corresponding to the resolution outcome lookup code for the service request.
ResolvedBy	string	Indicates the user who resolved the service request.
ResolvedByAIFlag	boolean	
ResolvedByPartyId	long	The unique identifier of the user who resolved this service request.
ScheduleId	long	The unique identifier of the current schedule associated with the service request.
ServiceZoneId	long	The unique identifier of the service zone for the service request.
ServiceZoneName	string	Indicates the service region of the service request.

Name	Type	Description
SeverityCd	string	Indicates the severity of the service request.
SeverityCdMeaning	string	Indicates the display value corresponding to the severity lookup code for the service request.
SeverityColorCd	string	Indicates the color code for the severity of the service requet
SeverityRank	int	Indicates the numeric code of the service request severity.
SourceCd	string	Indicates how the service request was created in the application.
SrCreatedBy	string	The user who created the service request.
SrId	long	The unique ID of the service request record. • Primary Key
SrLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request was last updated.
SrLastUpdateLogin	string	The application login id of the user who last updated the service request.
SrLastUpdatedBy	string	The user who last updated the service request.
SrLastUpdatedByPartyName	string	
SrMilestoneId	long	The unique ID of the milestone associated to the service request.
SrNumber	string	The unique number that is used to identify a service request. You can customize the service requestNumber to a format that is best suitable to your oragnizational requirements.
StatusCd	string	Indicates the status code of the service request.
StatusCdMeaning	string	Indicates the display value corresponding to the status lookup code for the service request.
StatusTypeCd	string	Indicates the status type of the service request.
StatusTypeCdMeaning	string	Indicates the display value corresponding to the status type lookup code for the service request.

Name	Type	Description
StripeCd	string	Indicates the application context of the service request.
SurveyResponseDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the response to this survey was submitted to the survey vendor.
SurveySentDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when survey was last sent for this service request.
TimeRemaining	string	Indicates the time remaining in the milestone
TimezoneCode	string	The service request time zone used for computing the milestone due date.
Title	string	A brief title of the service request.
TransferCount	long	Count showing how many times a service request has been transferred.
TransferNote	string	This field contains information about transfer note.
TransferReasonCd	string	Lookup code that indicates the transfer reason.
UniqueExternalSystemReference	string	The unique alternative identifier of the service request in the original reference system. Use this column to store the identifier of the service request in the external application you are integrating with.
UpdateFlag	boolean	This flag controls if the user has access to update the record
WarnedFlag	boolean	Indicates that the milestone passed the warning threshold.
contacts	*Service Request Contact*	The list of contacts associated to the serivce request.
messages	*Message*	The list of service request messages.
resourceMembers	*Service Request Resource*	The list of resources associated to the service request.
resourceTeams	*Service Request Resource Team*	The list of resource teams associated to the service request

Name	Type	Description
srInteractionReferences	*Interaction Reference*	Indicates the list of interaction references for a service request.
srMilestone	*Milestone*	Indicates the milestone associated with the service request.
srReferences	*Service Request Reference*	The list of other objects associated to the service request. E.g. Knowledge articles.

Interaction Reference

The reference to the interaction for a service request.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/srMgmt/srMgmtService/}SrInteractionReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Service Request*
Handled by	*Service Request Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountPartyId	long	Indicates the ID of the account associated with the interaction.
AccountPartyUniqueName	string	Account name associated with the interaction.
ChannelDisplayName	string	The display name of the channel that is populated in the interaction.
ChannelId	long	Indicates the ID of the interaction channel.

Name	Type	Description
ChannelTypeCd	string	The channel type of the interaction.
ContactPartyId	long	Indicates the ID of the contact person with whom the agent is interacting.
ContactPartyUniqueName	string	Indicates the customer contact for the interaction.
CreatedBy	string	The user who created the interaction.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the interaction was created.
DeleteFlag	boolean	Indicates if the record can be deleted.
Description	string	Indicates description of the interaction.
DirectionCd	string	The direction of the interaction.
EndTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the time when the interaction ended.
InteractionId	long	Indicates the ID of the interaction.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the interaction was last updated.
LastUpdateLogin	string	The application login id of the user who last updated the interaction.
LastUpdatedBy	string	The user who last updated the interaction.
OriginalSystemReference	string	Indicates the original system reference for the interaction.
OwnerResourceId	long	Indicates the ID of the agent who owns the interaction.
OwnerResourcePartyUniqueName	string	Indicates the resource, which is an internal interaction owner such as a service agent, associated with the interaction.
ParentInteractionId	long	Indicates the interaction ID for a parent interaction.

Name	Type	Description
Payload	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	Indicates the payload of the interaction.
QueueId	long	Indicates the ID of the interaction queue.
QueueName	string	The name of the queue in the interaction.
ReferenceId	long	Indicates the ID of the reference relationship. • Primary Key
StartTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The start time of the interaction.
StatusCd	string	Indicates the interaction status.
StripeCd	string	Indicates the application context of the interaction.
TopLevelFlag	boolean	Indicates whether the interaction is a top level interaction.
UpdateFlag	boolean	Indicates if the record can be updated.

Internal Service Request

Header level information about a request from a customer for service from the time the customer makes the request until the request is resolved. For example, if a customer has an issue with their laptop battery draining too fast, the details of the customer and the issue they are facing is stored in the service request header.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/srMgmt/helpDeskService/}InternalServiceRequest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Service Request Contact*
Contains	*Milestone*
Contains	*Message*

Relationship Type	Object or Service
Contains	*Service Request Resource Team*
Extends	*Service Request*
Handled by	*Service Request Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
InternalServiceRequestContacts	*Service Request Contact*	The list of contacts associated to the serivce request.
InternalServiceRequestMessages	*Message*	The list of service request messages.
InternalServiceRequestResourceTeamMembers	*Service Request Resource Team*	The list of resource team members associated to the serivce request.
InternalServiceRequestSrMilestone	*Milestone*	Indicates the milestone associated with the service request.
ReferenceObjectId	long	Indicates the ERP expense item.
ReferenceObjectPuid	string	Indicates the expense report number for ERP.
ReferenceObjectType	string	Indicates the ERP expense type objects.

Service Request

Header level information about a request from a customer for service from the time the customer makes the request until the request is resolved. For example, if a customer has an issue with their laptop battery draining too fast, the details of the customer and the issue they are facing is stored in the service request header.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/srMgmt/base/}BaseRequest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Extended by	*HR Help Desk Request*
Extended by	*Internal Service Request*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AffectedPartyPersonId	long	Indicates the contact person ID of the party affected in the service request
AffectedPartyPersonName	string	Indicates the display name of the affected party person in the service request
AssigneeEmailAddress	string	The email address of the assignee
AssigneeFormattedAddress	string	Formatted Address of the SR Assignee.
AssigneeFormattedPhoneNumber	string	Indicates the phone number of the resource to whom the service request is assigned.
AssigneePartyId	long	The unique party object ID of the service request assignee.
AssigneePersonName	string	The email address of the assignee.
AssigneeResourceId	long	The ID of the resource (for example, a support engineer) assigned to the service request.
AssigneeTimezone	string	The time zone of the assignee associated with the service request.
AssistedByHumanFlag	boolean	
BUOrgId	long	The unique ID of the business unit name associated to the service request.
BusinessUnitName	string	The name of the business unit associated to the service request
CategoryId	long	The unique ID of the service request category.

Name	Type	Description
CategoryName	string	The name of the category associated to the service request.
ChannelId	long	Indicates the service request channel.
ChannelTypeCd	string	Indicates the channel type.
ChannelTypeCdMeaning	string	Indicates the display value corresponding to the channel type lookup code for the service request.
ClosedDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the service request was closed (if closed).
ComplianceFlag	boolean	Indicates the compliance status of the milestone.
CorpCurrencyCode	string	The corporate currency code.
CreatedBy	string	The user who created the service request.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request was created.
CriticalFlag	boolean	Indicates whether the service request is critical. If critical, the value is Y, else the value is N.
CurcyConvRateType	string	The corporate currency conversion rate type.
CurrencyCode	string	The currency code.
DeleteFlag	boolean	This flag controls if the user has access to delete the record
DueDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the due date of the milestone.
FirstTransferDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the first transfer of the service request.
HandledByAIFlag	boolean	
HeaderFlag	boolean	Indicates if the current milestone should be saved on the service request header.

Name	Type	Description
IBAssetDescription	string	Indicates the Install Base asset description of the service request.
IBAssetId	long	The Unique ID of the associated Install Base asset record.
IBAssetNumber	string	Indicates the Installed Base asset number of the service request.
IBAssetSerialNumber	string	Indicates the Install Base asset serial number of the service request.
InternalPriorityCd	string	Indicates the internal priority of the service request.
InventoryItemId	long	The unique ID of the product associated to the service request.
InventoryOrgId	long	The unique ID of the organization of the product that is associated with the service request.
LanguageCd	string	The customer's preferred language for the service request.
LastReopenDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request was last reopened.
LastResolvedDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request was resolved.
LastTransferDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the last transfer of the service request.
LastTransferredBy	string	Indicates the user who last transferred the service request.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request was last updated.
LastUpdateLogin	string	The application login id of the user who last updated the service request.
LastUpdatedBy	string	The user who last updated the service request.
LastUpdatedByDisplayName	string	The display name of the user who last updated the service request.

Name	Type	Description
LastUpdatedByEmailAddress	string	Indicates the e-mail address of the person who last updated the service request.
LastUpdatedByPartyId	long	Indicates the Party ID of the person who last updated the service request.
MilestoneConfigId	long	The unique ID of the milestone configuration associated with the service request.
MilestoneLabel	string	User defined name for the milestone.
MilestoneStatusCd	string	Indicates the status of the milestone.
NetworkTypeCd	string	Indicates the type of social network.
OpenDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the service request was reported by the customer.
OriginalSystemReference	string	The reference to the service request record in the original system from which service request was imported (if imported).
OwnerTypeCd	string	Indicates the type of the service request owner. For example, the owner of the service request may be a customer or a partner.
PrimaryContactDoNotContactFlag	boolean	Indicates that the primary contact of the service request does not want to be contacted.
PrimaryContactEmailAddress	string	Indicates the e-mail of the primary contact associated with the service request.
PrimaryContactFormattedAddress	string	Indicates the formatted address of the primary contact of the service request.
PrimaryContactFormattedPhoneNumber	string	Indicates the service request primary contact's formatted phone number
PrimaryContactPartyId	long	The unique ID of the contact who intially reported the service request. The contact is also the primary contact of the service request.
PrimaryContactPartyName	string	Indicates the name of the service request primary contact.

Name	Type	Description
PrimaryContactPersonId	long	The Person ID of the contact who intially reported the service request. The contact is also the primary contact of the service request.
PrimaryContactPreferredContactMethod	string	Indicates the preferred contact method of the primary contact of the service request.
ProblemCd	string	Indicates the problem code of the service request.
ProblemDescription	string	The service request's problem description/ statement and the steps to reproduce the issue.
ProdGroupId	long	The unique identifire of the product group associated to the service request.
ProdGroupName	string	The name of the product group associated to the service request.
ProductItemDescription	string	The description of the product associated with the service request.
ProductItemNumber	string	The product number/code of the product associated with the service request.
ProductItemOrgId	long	Indicates the product organization.
Queue	*oracle.apps.crm.service.svcMgmt.model.queueSe*	
QueueId	long	The unique ID of the queue to which the service request is assigned.
QueueName	string	The name of the queue associated to the service request.
RecordSet	string	Used by REST API to run saved searches.
ReportedByEmailAddress	string	Indicates the e-mail address of the person who reported the service request.
ReportedByFormattedPhoneNumber	string	Indicates the formatted phone number of the person who reported the service request.
ReportedByPartyId	long	The user who created the service request in the system.

Name	Type	Description
ReportedByPartyName	string	Reported By Party Name
ReportedByPartyUniqueName	string	The unique name of the user who created the service request.
ResolutionCd	string	Indicates the resolution code of the service request.
ResolutionCdMeaning	string	Indicates the display value corresponding to the resolution lookup code for the service request.
ResolveDescription	string	Indicates how the service request has been resolved.
ResolveOutcomeCd	string	Indicates the outcome of a service request resolution.
ResolveOutcomeCdMeaning	string	Indicates the display value corresponding to the resolution outcome lookup code for the service request.
ResolvedBy	string	Indicates the user who resolved the service request.
ResolvedByAIFlag	boolean	
ResolvedByPartyId	long	The unique identifier of the user who resolved this service request.
ScheduleId	long	The unique identifier of the current schedule associated with the service request.
ServiceZoneId	long	The unique identifier of the service zone for the service request.
ServiceZoneName	string	Indicates the service region of the service request.
SeverityCd	string	Indicates the severity of the service request.
SeverityCdMeaning	string	Indicates the display value corresponding to the severity lookup code for the service request.
SeverityColorCd	string	Indicates the color code for the severity of the service requet

Name	Type	Description
SeverityRank	int	Indicates the numeric code of the service request severity.
SourceCd	string	Indicates how the service request was created in the application.
SrCreatedBy	string	The user who created the service request.
SrId	long	The unique ID of the service request record. • Primary Key
SrLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request was last updated.
SrLastUpdateLogin	string	The application login id of the user who last updated the service request.
SrLastUpdatedBy	string	The user who last updated the service request.
SrLastUpdatedByPartyName	string	
SrMilestoneId	long	The unique ID of the milestone associated to the service request.
SrNumber	string	The unique number that is used to identify a service request. You can customize the service requestNumber to a format that is best suitable to your oragnizational requirements.
StatusCd	string	Indicates the status code of the service request.
StatusCdMeaning	string	Indicates the display value corresponding to the status lookup code for the service request.
StatusTypeCd	string	Indicates the status type of the service request.
StatusTypeCdMeaning	string	Indicates the display value corresponding to the status type lookup code for the service request.
StripeCd	string	Indicates the application context of the service request.
SurveyResponseDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the response to this survey was submitted to the survey vendor.

Name	Type	Description
SurveySentDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when survey was last sent for this service request.
TimeRemaining	string	Indicates the time remaining in the milestone
TimezoneCode	string	The service request time zone used for computing the milestone due date.
Title	string	A brief title of the service request.
TransferCount	long	Count showing how many times a service request has been transferred.
TransferNote	string	This field contains information about transfer note.
TransferReasonCd	string	Lookup code that indicates the transfer reason.
UniqueExternalSystemReference	string	The unique alternative identifier of the service request in the original reference system. Use this column to store the identifier of the service request in the external application you are integrating with.
UpdateFlag	boolean	This flag controls if the user has access to update the record
WarnedFlag	boolean	Indicates that the milestone passed the warning threshold.
contacts	*Service Request Contact*	The list of contacts associated to the serivce request.
messages	*Message*	The list of service request messages.
resourceMembers	*Service Request Resource*	The list of resources associated to the service request.
resourceTeams	*Service Request Resource Team*	The list of resource teams associated to the service request
srInteractionReferences	*Interaction Reference*	Indicates the list of interaction references for a service request.
srMilestone	*Milestone*	Indicates the milestone associated with the service request.

Name	Type	Description
srReferences	*Service Request Reference*	The list of other objects associated to the service request. E.g. Knowledge articles.

Message

This object stores information about every communication update to the Service request, both from the internal agent and from the customer. An example stored message could be: We have credited your account for the value of the call. You should see a credit in your next monthly bill. We have notified the billing department about the issue. This issue should not recur.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/srMgmt/srMgmtService/}SrMessage

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Message*
Contained by	*HR Help Desk Request*
Contained by	*Message*
Contained by	*Internal Service Request*
Contained by	*Service Request*
Handled by	*Service Request Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AlLogLevelCd	string	
ChannelId	long	The unique ID of the channel.

Name	Type	Description
ChannelTypeCd	string	Indicates the channel type. For example, email, phone, social, etc.
CreatedBy	string	The user who created the message.
CreatedByEmailAddress	string	Indicates the e-mail ID of the person who created the service request message.
CreatedByPartyId	string	Indicates the party ID of the person who created the service request message.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the message was created.
DeleteFlag	boolean	This flag controls if the user has access to delete the record
FeedFlag	boolean	
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the message was last updated.
LastUpdateLogin	string	The user who last updated the message.
LastUpdatedBy	string	The user who last updated the message.
MessageContent	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	Indicates the content of the service request message.
MessageCreatedBy	string	The user who created the message in the original source system. This is applicable if the service request message was imported from another system.
MessageExpandingState	int	Indicates the message expanding state.
MessageId	long	The unique ID of the service request message. • Primary Key
MessageLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The last updated date of the message in the original source system. This is applicable if the service request message was imported from another system.
MessageLastUpdateLogin	string	The login of the user who last updated the message in the original source system. This is

Name	Type	Description
		applicable if the service request message was imported from another system.
MessageLastUpdatedBy	string	The user who last updated the message in the original source system. This is applicable if the service request message was imported from another system.
MessageNumber	string	Indicates the service request message number.
MessageSubTypeCd	string	The service request message subtype.
MessageTypeCd	string	Indicates the message type. The accepted values are Response, Customer Entry, System Note, System Response, and Internal Note.
NetworkTypeCd	string	Indicates the type of social network.
NotificationProcessingStatusCd	string	Indicates the notification processing status code.
NotificationRetryCount	int	Indicates the notification retry count.
ObjectId	long	Indicates the object ID.
OriginalSystemReference	string	The ID of the message record in the original source system from where the message was imported. This is applicable if the service request message was imported from another system.
OriginationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date the message was created in the original source system. This is applicable if the service request message was imported from another system.
ParentMessageId	long	Indicates the parent service request message ID.
PartyName	string	The party name of the user who posted the message. The user can be an internal resource or a customer contact.
PostedByPartyId	long	The unique ID of the user who the posted the message. The user can be an internal resource or a customer contact.
PrivateInformationFlag	boolean	Indicates whether the message contains private information.

Name	Type	Description
ProcessingId	long	Indicates the processing ID.
ProcessingStatusCd	string	Indicates the processing status of the message. The accepted values are Ready, Processing, Error, and Success.
ReplyToMessageId	long	Indicates the customer message ID to which the agent is replying to.
RichTextFlag	boolean	Indicates whether the message content is in rich text format. If the format is rich text, then the value is Y, else the value is N.
RootMessageId	long	Indicates the identifier of the root message.
RootThreadCount	long	Indicates the number of messages under a root message in a service request.
RootThreadLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the latest updated date for all messages under the root message in a service request.
RootThreadMessageLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date when all messages under the root message in a service request were last updated.
SentDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the message was sent.
SocialPrivateFlag	boolean	Indicates if the service request was created from a private social post.
SourceCd	string	Indicates the source of the message.
SrBUOrgId	long	The identifier of the business unit associated with the service request.
SrId	long	The unique ID of the service request to which the message is associated.
SrInlineAttachmentIds	string	Indicates the list of inline attachments associated with the service request
SrStripeCd	string	The application stripe of the service request.

Name	Type	Description
StatusCd	string	Indicates the status of the message. The accepted values are Draft, Committed, and Corrected.
Subject	string	Indicates the subject of the service request message.
TemplateName	string	Indicates the name of the template that is used for outbound communication of the message.
ThreadCount	long	Indicates the number of threads in a service request message.
ThreadHierarchyLevel	int	Indicates the thread hierarchy level.
ThreadId	long	The unique ID of the service request message thread.
ThreadLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date the thread was last updated.
ThreadMessageLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date when the thread message was last updated.
UpdateFlag	boolean	This flag controls if the user has access to update the record
VisibilityCd	string	Indicates the privacy level of the message. The accepted values are Internal and External. Null value indicates that the message is External.
childMessages	*Message*	The list of child messages for a given service request message.

Milestone

The milestones that are set in the lifecycle of a service request, such as first response time of 24 hours for a customer with Gold coverage, and a resolution time of 3 days for service requests with severity level 2.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/srMgmt/srMgmtService/}SrMilestone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Milestone History*
Contains	*Milestone Configuration*
Contained by	*HR Help Desk Request*
Contained by	*Internal Service Request*
Contained by	*Service Request*
Handled by	*Service Request Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	Indicates whether the service request milestone is active.
AgentCompletedFlag	boolean	Indicates whether agent marked the milestone as complete.
Comments	string	Indicates customer or agent comments.
CompletionDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the completion date of the milestone.
ComplianceFlag	boolean	Indicates the compliance status of the milestone.
CoverageId	long	The unique identifier for the coverage record.
CoverageSourceCd	string	Indicates the source of the subscription coverage.
CoverageSourceCdMeaning	string	Indicates the display value corresponding to the coverage source lookup code.
CreatedBy	string	Created By
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the record was created.

Name	Type	Description
DelayTime	long	Indicates the time between the due date and the completion date.
DeleteFlag	boolean	This flag controls if the user has access to delete the record
DueDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the due date of the milestone.
EntitlementId	long	The unique ID of the entitlement record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the record was last updated.
LastUpdateLogin	string	Last Update Login
LastUpdatedBy	string	Last Updated By
MilestoneConfig	*Milestone Configuration*	The configuration of the service request milestone.
MilestoneConfigId	long	The unique ID of the milestone configuration record.
MilestoneLabel	string	Name of the milestone.
MilestoneStatusCd	string	Indicates the status of the milestone.
MilestoneStatusCdMeaning	string	Indicates the display value corresponding to the status lookup code for the milestone.
PauseConditionLabel	string	Indicates when the milestone pauses.
SrAssigneePartyId	long	The unique party object ID of the service request assignee.
SrId	long	The unique ID of the service request record.
SrMilestoneHistory	*Milestone History*	The list of changes in the service request milestone status.
SrMilestoneId	long	The unique ID of the service request milestone record. • Primary Key

Name	Type	Description
StartConditionLabel	string	Indicates when the milestone starts.
StopConditionLabel	string	Indicates when the milestone completes.
SubscriptionCoveragePuid	string	Indicates the public unique identifier of the subscription standard coverage.
SubscriptionNumber	string	Indicates the subscription number associated with the standard coverage.
TimeLeftOnceUnpaused	long	Time left, in minutes, to complete the milestone after it is restored from the paused state.
TimeRemaining	string	Indicates the time remaining in the milestone.
UpdateFlag	boolean	This flag controls if the user has access to update the record
WarnedFlag	boolean	Indicates if the milestone passed the warning threshold.
WarningDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the milestone passed the warning threshold.

Milestone Configuration

Configuration details for the milestone, such as name, type, start, pause, and stop conditions.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/milestoneService/}MilestoneConfig

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Milestone*
Handled by	*Service Request Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AllowAgentCompletionFlag	boolean	Allow Agent to mark milestone as complete
AllowDueDateOverrideFlag	boolean	Allow Agent to override milestone due date
BUOrgId	long	The unique ID of the business unit name associated to the Milestone Config.
BusinessUnitIdFK	long	Business Unit Id Foreign Key
BusinessUnitName	string	The name of the business unit associated to the Milestone Configuration
BusinessUnitNameTransientForLOV	string	Business Unit Name used in LOV
CreatedBy	string	Created By
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Creation Date
DeletedFlag	boolean	Deleted Flag
DisabledFlag	boolean	Disabled Flag
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last Update Date
LastUpdateLogin	string	Last Update Login
LastUpdatedBy	string	Last Updated By
MilestoneCode	string	Milestone Code
MilestoneConfigId	long	Milestone ConfigId • Primary Key
MilestoneLabel	string	Milestone Label
MilestoneType	string	Milestone type

Name	Type	Description
MilestoneTypeMeaning	string	Indicates the display value corresponding to the milestone type lookup code.
ObjectName	string	The name of the object associated to the Milestone Configuration
ObjectNameMeaning	string	Indicates the display value corresponding to the object name lookup code.
PauseCondition	string	Pause Condition
PauseConditionLabel	string	Pause Condition Label
StartCondition	string	Start Condition
StartConditionLabel	string	start Condition Label
StopCondition	string	Stop Condition
StopConditionLabel	string	Stop Condition Label
ThresholdCode	string	Threshold Code
TzPreferenceCd	string	Indicates the object that will be used to override the time zone from the coverage.
TzPreferenceMeaning	string	Indicates the display value corresponding to the time zone object lookup code.

Milestone History

The history of changes in the milestone status for a service request, such as a list of time entries for when the milestone tracking is started, paused, marked as complete, or restarted.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/srMgmt/srMgmtService/}SrMilestoneHistory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Milestone*
Handled by	*Service Request Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccumulatedTimeInStatus	long	Indicates the total time the service request milestone spent in the status.
Comments	string	Indicates agent comments
CreatedBy	string	Created By
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the record was created.
EndTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the milestone exited the status.
HistoryId	long	The unique ID of the milestone history record. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the record was last updated.
LastUpdateLogin	string	The session login associated with the user who last updated the record.
LastUpdatedBy	string	Last Updated By
MilestoneStatusCd	string	Indicates the status of the milestone.
OverriddenDueDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates overridden due date
SrMilestoneId	long	The unique ID of the service request milestone record.
StartTime	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time when the milestone status was changed.

Name	Type	Description

SR Message Social Post

The relationship between service request message and the social post.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/srMgmt/srMgmtService/}SrMessageSocialPost

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Service Request Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
MessageId	long	The unique ID of the service request message. • Primary Key
ObjectId	long	The ID of the service request or service request message associated with the social post.
ObjectTypeCd	string	The type of object associated with the social post
ParentMessageId	long	Parent ID of service request message record.
PostId	long	The unique ID of the social post record.
PostParentPostId	string	The unique ID of the current post's parent post.
PostPostId	string	The unique ID of the current post returned by the social network.
SourcePostIdPrimary	string	The primary source post id of the social post record

Name	Type	Description
SourcePostIdSecondary	string	The secondary source post id of the social post record
SourcePostIdTertiary	string	The tertiary source post id of the social post record
SrId	long	The unique ID of the service request record.
ViaId	long	The unique ID of the channel via record.

SR Social Post

The relationship between service request and the social post.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/srMgmt/srMgmtService/}SrSocialPost

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Service Request Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ObjectId	long	The ID of the service request associated with the social post.
ObjectTypeCd	string	The type of object associated with the social post record
PostId	long	The unique ID of the social post record.
PostParentPostId	string	The unique ID of the current post's parent post.

Name	Type	Description
PostPostId	string	The unique ID of the current post returned by the social network.
SourcePostIdPrimary	string	The primary source post id of the social post record
SourcePostIdSecondary	string	The secondary source post id of the social post record
SourcePostIdTertiary	string	The tertiary source post id of the social post record
SrId	long	The unique ID of the service request record. • Primary Key
SrNumber	string	The unique reference number of the service request record.
StatusCd	string	The status of the service request associated with the social post
Title	string	Title of the service request record.
ViaId	long	The unique ID of the channel via record.

Service Request

Header level information about a request from a customer for service from the time the customer makes the request until the request is resolved. For example, if a customer has an issue with their laptop battery draining too fast, the details of the customer and the issue they are facing is stored in the service request header.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/srMgmt/srMgmtService/}ServiceRequest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Service Request Contact*
Contains	*Milestone*

Relationship Type	Object or Service
Contains	*Service Request Resource*
Contains	*Service Request Reference*
Contains	*Message*
Contains	*Service Request Resource Team*
Contains	*Interaction Reference*
Handled by	*Service Request Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountPartyEmailAddress	string	Indicates the e-mail ID of the account on the service request.
AccountPartyFormattedPhoneNumber	string	Indicates the formatted phone number of the account on the service request.
AccountPartyId	long	The unique party object ID of the account associated to the service request.
AccountPartyName	string	The party name associated with the account.
AccountPartyPreferredContactMethod	string	Indicates the preferred contact method of the account on the service request.
AccountPartyUniqueName	string	The unique party name associated with the account.
AffectedPartyPersonId	long	Indicates the contact person ID of the party affected in the service request
AffectedPartyPersonName	string	Indicates the display name of the affected party person in the service request
AssetId	long	The unique ID of the asset associated to the service request.

Name	Type	Description
AssetNumber	string	The Asset Number of the asset that is associated to the service request
AssetSerialNumber	string	The serial number of the asset that is associated to the service request.
AssigneeEmailAddress	string	The email address of the assignee
AssigneeFormattedAddress	string	Formatted Address of the SR Assignee.
AssigneeFormattedPhoneNumber	string	Indicates the phone number of the resource to whom the service request is assigned.
AssigneePartyId	long	The unique party object ID of the service request assignee.
AssigneePersonName	string	The email address of the assignee.
AssigneeResourceId	long	The ID of the resource (for example, a support engineer) assigned to the service request.
AssigneeTimezone	string	The time zone of the assignee associated with the service request.
AssistedByHumanFlag	boolean	
BUOrgId	long	The unique ID of the business unit name associated to the service request.
BillToCustomerAccountDescription	string	The description of the customer account to be billed for work performed on the service request.
BillToCustomerAccountId	long	The customer account to be billed for work performed on the service request.
BillToCustomerAccountNumber	string	The PUID for the customer account to be billed for work performed on the service request.
BillToCustomerAccountSiteId	long	The customer account site to be billed for work performed on the service request.
BillToCustomerAccountSiteUsageNumber	string	The PUID for the customer account site bill-to usage.

Name	Type	Description
BillToCustomerId	long	The customer to be billed for work performed on the service request.
BillToCustomerName	string	The name of the customer to be billed for work performed on the service request.
BillToCustomerNumber	string	The PUID for the customer to be billed for work performed on the service request.
BillToPartySiteFormattedAddress	string	The formatted address for the customer site to be billed for work performed on the service request.
BillToPartySiteId	long	The address of the customer site to be billed for work performed on the service request.
BillToPartySiteLocationId	long	The location of the customer site to be billed for work performed on the service request.
BillToPartySiteName	string	The name of the customer site to be billed for work performed on the service request.
BillToPartySiteNumber	string	The PUID for the customer site to be billed for work performed on the service request.
BusinessUnitName	string	The name of the business unit associated to the service request
CaseId	long	Indicates the case to which this service request has been associated.
CategoryId	long	The unique ID of the service request category.
CategoryName	string	The name of the category associated to the service request.
ChannelId	long	Indicates the service request channel.
ChannelTypeCd	string	Indicates the channel type.
ChannelTypeCdMeaning	string	Indicates the display value corresponding to the channel type lookup code for the service request.
ClosedDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the service request was closed (if closed).

Name	Type	Description
ComplianceFlag	boolean	Indicates the compliance status of the milestone.
CorpCurrencyCode	string	The corporate currency code.
CreatedBy	string	The user who created the service request.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request was created.
CriticalFlag	boolean	Indicates whether the service request is critical. If critical, the value is Y, else the value is N.
CurcyConvRateType	string	The corporate currency conversion rate type.
CurrencyCode	string	The currency code.
DeleteFlag	boolean	This flag controls if the user has access to delete the record
DueDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the due date of the milestone.
FirstTransferDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the first transfer of the service request.
HandledByAIFlag	boolean	
HeaderFlag	boolean	Indicates if the current milestone should be saved on the service request header.
IBAssetDescription	string	Indicates the Install Base asset description of the service request.
IBAssetId	long	The Unique ID of the associated Install Base asset record.
IBAssetLocation	string	The formatted address of the installed base asset of the service request.
IBAssetLocationType	string	Indicates the type of location of the asset of the service request.
IBAssetNumber	string	Indicates the Installed Base asset number of the service request.

Name	Type	Description
IBAssetSerialNumber	string	Indicates the Install Base asset serial number of the service request.
InternalPriorityCd	string	Indicates the internal priority of the service request.
InventoryItemId	long	The unique ID of the product associated to the service request.
InventoryOrgId	long	The unique ID of the organization of the product that is associated with the service request.
LanguageCd	string	The customer's preferred language for the service request.
LastReopenDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request was last reopened.
LastResolvedDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request was resolved.
LastTransferDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Indicates the date and time of the last transfer of the service request.
LastTransferredBy	string	Indicates the user who last transferred the service request.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request was last updated.
LastUpdateLogin	string	The application login id of the user who last updated the service request.
LastUpdatedBy	string	The user who last updated the service request.
LastUpdatedByDisplayName	string	The display name of the user who last updated the service request.
LastUpdatedByEmailAddress	string	Indicates the e-mail address of the person who last updated the service request.
LastUpdatedByPartyId	long	Indicates the Party ID of the person who last updated the service request.
LoyMemberId	long	The unique ID of the loyalty membership.

Name	Type	Description
LoyMemberName	string	The member name of the loyalty membership.
MilestoneConfigId	long	The unique ID of the milestone configuration associated with the service request.
MilestoneLabel	string	User defined name for the milestone.
MilestoneStatusCd	string	Indicates the status of the milestone.
NetworkTypeCd	string	Indicates the type of social network.
OpenDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the service request was reported by the customer.
OriginalSystemReference	string	The reference to the service request record in the original system from which service request was imported (if imported).
OwnerTypeCd	string	Indicates the type of the service request owner. For example, the owner of the service request may be a customer or a partner.
PartnerAccountPartyId	long	The unique party object ID of the partner account associated with the service request.
PartnerAccountPartyName	string	The party name associated with the partner.
PartnerAccountPartyUniqueName	string	The unique party name associated with the partner.
PrimaryContactDoNotContactFlag	boolean	Indicates that the primary contact of the service request does not want to be contacted.
PrimaryContactEmailAddress	string	Indicates the e-mail of the primary contact associated with the service request.
PrimaryContactFormattedAddress	string	Indicates the formatted address of the primary contact of the service request.
PrimaryContactFormattedPhoneNumber	string	Indicates the service request primary contact's formatted phone number
PrimaryContactPartyId	long	The unique ID of the contact who intially reported the service request. The contact is also the primary contact of the service request.

Name	Type	Description
PrimaryContactPartyName	string	Indicates the name of the service request primary contact.
PrimaryContactPartyUniqueName	string	The unique party name associated with the primary contact.
PrimaryContactPersonId	long	The Person ID of the contact who intially reported the service request. The contact is also the primary contact of the service request.
PrimaryContactPreferredContactMethod	string	Indicates the preferred contact method of the primary contact of the service request.
ProblemCd	string	Indicates the problem code of the service request.
ProblemDescription	string	The service request's problem description/ statement and the steps to reproduce the issue.
ProdGroupId	long	The unique identifire of the product group associated to the service request.
ProdGroupName	string	The name of the product group associated to the service request.
ProductItemDescription	string	The description of the product associated with the service request.
ProductItemNumber	string	The product number/code of the product associated with the service request.
ProductItemOrgId	long	Indicates the product organization.
PurchaseOrder	string	Indicates the purchase order associated with the service request.
QueueId	long	The unique ID of the queue to which the service request is assigned.
QueueName	string	The name of the queue associated to the service request.
RecordSet	string	Used by REST API to run saved searches.
ReportedByEmailAddress	string	Indicates the e-mail address of the person who reported the service request.

Name	Type	Description
ReportedByFormattedPhoneNumber	string	Indicates the formatted phone number of the person who reported the service request.
ReportedByPartyId	long	The user who created the service request in the system.
ReportedByPartyName	string	Reported By Party Name
ReportedByPartyUniqueName	string	The unique name of the user who created the service request.
ResolutionCd	string	Indicates the resolution code of the service request.
ResolutionCdMeaning	string	Indicates the display value corresponding to the resolution lookup code for the service request.
ResolveDescription	string	Indicates how the service request has been resolved.
ResolveOutcomeCd	string	Indicates the outcome of a service request resolution.
ResolveOutcomeCdMeaning	string	Indicates the display value corresponding to the resolution outcome lookup code for the service request.
ResolvedBy	string	Indicates the user who resolved the service request.
ResolvedByAIFlag	boolean	
ResolvedByPartyId	long	The unique identifier of the user who resolved this service request.
ScheduleId	long	The unique identifier of the current schedule associated with the service request.
ServiceProfileId	long	The service profile associated with the service request.
ServiceProfileName	string	The name of the service profile associated with the service request.
ServiceProfileNumber	string	The PUID for the service profile associated with the service request.

Name	Type	Description
ServiceProfilePartySiteId	long	The address of the service profile associated with the service request.
ServiceProfilePartySiteLocationId	long	The location of the service profile associated with the service request.
ServiceProfilePartySiteName	string	The name of the address of the service profile associated with the service request.
ServiceProfilePartySiteNumber	string	The PUID of the address of the service profile associated with the service request.
ServiceProfileSiteFormattedAddress	string	The formatted address of the service profile associated with the service request.
ServiceZoneId	long	The unique identifier of the service zone for the service request.
ServiceZoneName	string	Indicates the service region of the service request.
SeverityCd	string	Indicates the severity of the service request.
SeverityCdMeaning	string	Indicates the display value corresponding to the severity lookup code for the service request.
SeverityColorCd	string	Indicates the color code for the severity of the service requet
SeverityRank	int	Indicates the numeric code of the service request severity.
SocialPrivateFlag	boolean	Indicates if the service request was created from a private social post.
SourceCd	string	Indicates how the service request was created in the application.
SrCreatedBy	string	The user who created the service request.
SrId	long	The unique ID of the service request record. • Primary Key
SrLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request was last updated.

Name	Type	Description
SrLastUpdateLogin	string	The application login id of the user who last updated the service request.
SrLastUpdatedBy	string	The user who last updated the service request.
SrLastUpdatedByPartyName	string	
SrMilestoneId	long	The unique ID of the milestone associated to the service request.
SrNumber	string	The unique number that is used to identify a service request. You can customize the service requestNumber to a format that is best suitable to your oragnizational requirements.
StatusCd	string	Indicates the status code of the service request.
StatusCdMeaning	string	Indicates the display value corresponding to the status lookup code for the service request.
StatusTypeCd	string	Indicates the status type of the service request.
StatusTypeCdMeaning	string	Indicates the display value corresponding to the status type lookup code for the service request.
StripeCd	string	Indicates the application context of the service request.
SurveyResponseDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the response to this survey was submitted to the survey vendor.
SurveySentDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when survey was last sent for this service request.
TimeRemaining	string	Indicates the time remaining in the milestone
TimezoneCode	string	The service request time zone used for computing the milestone due date.
Title	string	A brief title of the service request.
TransferCount	long	Count showing how many times a service request has been transferred.
TransferNote	string	This field contains information about transfer note.

Name	Type	Description
TransferReasonCd	string	Lookup code that indicates the transfer reason.
UniqueExternalSystemReference	string	The unique alternative identifier of the service request in the original reference system. Use this column to store the identifier of the service request in the external application you are integrating with.
UpdateFlag	boolean	This flag controls if the user has access to update the record
WarnedFlag	boolean	Indicates that the milestone passed the warning threshold.
contacts	*Service Request Contact*	The list of contacts associated to the serivce request.
messages	*Message*	The list of service request messages.
resourceMembers	*Service Request Resource*	The list of resources associated to the service request.
resourceTeams	*Service Request Resource Team*	The list of resource teams associated to the service request
srInteractionReferences	*Interaction Reference*	Indicates the list of interaction references for a service request.
srMilestone	*Milestone*	Indicates the milestone associated with the service request.
srReferences	*Service Request Reference*	The list of other objects associated to the service request. E.g. Knowledge articles.

Service Request Contact

A list of customer contacts associated with a service request. For example, the contact for a corporate customer requesting support for software installation may be the organization's IT manager. Agents communicate service request resolutions or other information with contacts. Communication channels include e-mail, Twitter accounts, and telephone.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/srMgmt/srMgmtService/}SrContactMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*HR Help Desk Request*
Contained by	*Internal Service Request*
Contained by	*Service Request*
Handled by	*Service Request Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessLevelCd	string	Indicates the service request access granted to the contact.
AccountName	string	Indicates the primary account of the service request contact.
ContactEmailAddress	string	The email address of the party associated with the contact.
ContactFormattedPhoneNumber	string	The formatted phone number of the party associated with the contact.
ContactPartyName	string	Indicates the name of a service request contact.
ContactPreferredContactMethod	string	The preferred contact method of the party associated with the contact.
ContactTypeCd	string	Indicates the contact type of the service request contact.
ContactUniqueName	string	The unique party name associated with the contact.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the record was created.
DeleteFlag	boolean	This flag controls if the user has access to delete the record
DoNotContactFlag	boolean	Indicates that the contact of the service request does not want to be contacted.
FormattedAddress	string	Indicates the formatted address of the service request contact.
JobTitle	string	Indicates the job title of the service request contact.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the record was last updated.
LastUpdateLogin	string	The application login id of the user who last update the contacts object associated with the service request.
LastUpdatedBy	string	The user who last updated the record.
MemberId	long	The unique ID of the contact. • Primary Key
PartyId	long	The unique party ID of the contact.
PersonId	long	The unique person ID of the contact.
PrimaryContactFlag	boolean	Indicates if the contact is the primary contact for the service request. If yes, the value is True, else the value is False.
RelationTypeCd	string	The relationship with the contact in context of the service request. For example, Alternate, Follower, Third_Party, and so on.
SrId	long	The unique ID of the associated service request.
UpdateFlag	boolean	This flag controls if the user has access to update the record

Service Request Reference

The relationship between a service sequest and other objects such as, knowledge base articles and other service requests. Example object attributes include service request identifier, object type, relationship type and object identifier.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/srMgmt/srMgmtService/}SrReferences

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Service Request*
Handled by	*Service Request Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ArticleId	string	Indicates the ID of the referenced article.
ArticleLocale	string	Indicates the locale of the knowledge management article.
CreatedBy	string	The user who added the reference to the service request.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request reference was created.
DeleteFlag	boolean	This flag controls if the user has access to delete the record
DocumentId	string	Indicates the document identifier associated with the referenced article.
HelpfulFlag	boolean	Indicates whether the service request reference was helpful.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	the application login associated with the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LinkedFlag	boolean	Indicates whether the reference is linked with the service request.
ObjectId	long	Indicates the ID of the object referenced to the service request.
ObjectTypeCd	string	Indicates the object type of the reference object.
ObjectVersionNumber	int	Indicates the object version number of the service request reference record.
ReferenceId	long	Indicates the ID of the current reference record. • Primary Key
RelationTypeCd	string	Indicates the relationship type between the service request and the referenced object.
ResolutionCd	string	Indicates if the referenced object helps in resolving the service request.
SharedFlag	boolean	Indicates whether the service request reference is shared with the customer.
SrId	long	Indicates the ID of the service request.
Subject	string	Indicates the title of the referenced object.
UpdateFlag	boolean	This flag controls if the user has access to update the record

Service Request Resource

A list of employees or partners, such as service representatives, service managers, or product managers, who are associated with a service request. Multiple service request resources may be involved in resolving a service request.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/srMgmt/srMgmtService/}SrResourceMemberResource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Service Request*
Handled by	*Service Request Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who added the resource as a member of the service request.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request resource member was created.
DeleteFlag	boolean	This flag controls if the user has access to delete the record
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service request resource member record was last updated.
LastUpdateLogin	string	The application login associated with the user who last updated the service request resource member.
LastUpdatedBy	string	The user who last updated the service request resource member record.
MemberId	long	A unique ID of the service request resource member. • Primary Key
ObjectId	long	The unique ID of the individual resource added as service request resource member.
ObjectTypeCd	string	Indicates if the resource is an individual or a team.

Name	Type	Description
OwnerFlag	boolean	Indicates if the service request is assiged to the resource member. If yes, the value is True, else the value is False.
PartyUniqueName	string	The unique name of the individual resource added as service request resource member.
ResourceEmailAddress	string	The email address of the resource member.
ResourceFormattedAddress	string	Formatted Address of the SR Resource Member.
ResourceFormattedPhoneNumber	string	The formatted phone number of the resource member.
ResourceName	string	The name of the individual resource added as service request resource member.
SrId	long	The unique ID of the service request.
UpdateFlag	boolean	This flag controls if the user has access to update the record
UserGUID	string	A globally unique ID of the resouce added as the service request resource member.
UserId	long	The user ID of the resource added as the service request resource member.
Username	string	The user name of the resoource member.

Service Request Resource Team

A list of employee or partner teams associated with a service request. Multiple resource teams may be involved in resolving a service request.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/srMgmt/srMgmtService/}SrResourceMemberTeam

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*HR Help Desk Request*
Contained by	*Internal Service Request*
Contained by	*Service Request*
Handled by	*Service Request Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the record was last updated.
LastUpdateLogin	string	The session login associated with the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MemberId	long	The ID of the service request team record. • Primary Key
ObjectId	long	The ID of the resource team associated with the service request.
ObjectTypeCd	string	Indicates the type of resource associated with the service request: Resource or Resource Team.
ResourceTeamTeamDescription	string	The description of the resource team.
ResourceTeamTeamId	long	The ID of the resource team associated to the service request.
ResourceTeamTeamName	string	The name of the resource team associated to the service request.

Name	Type	Description
ResourceTeamTeamNumber	string	The resource team number.
SrId	long	The unique ID of the service request record.

Social Post

A service to create, update, get, find, or delete social posts. Access to this SOAP service is restricted only for use by the Oracle Integration Cloud Service.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/model/socialService/}SocialService

Service WSDL URL: https://servername/crmService/SocialService?WSDL

Logical Business Objects

- CRM : Service : Social Post

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Tag*
Handles	*Social Post*
Handles	*Social User*
Handles	*URLs*

Operations

- *getSocialPost*
- *createSocialPost*
- *updateSocialPost*
- *deleteSocialPost*

- *findSocialPost*
- *processSocialPost*
- *getSocialUser*
- *createSocialUser*
- *mergeSocialUser*
- *findSocialUser*
- *processSocialUser*

getSocialPost

Queries a single social post record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
postId	long	The unique ID of the social post.

Response Payload

Element Name	Type	Description
result	*Social Post*	A social post record that matches the inbound parameters.

createSocialPost

Creates a social post record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
socialPost	*Social Post*	The social post to be created.

Response Payload

Element Name	Type	Description
result	*Social Post*	The created social post record.

updateSocialPost

Update a social post.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
socialPost	*Social Post*	The social post to be updated.

Response Payload

Element Name	Type	Description
result	*Social Post*	The updated social post record.

deleteSocialPost

Delete a social post.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
socialPost	*Social Post*	The social post to be deleted.

Response Payload

Element Name	Type	Description
result	void	nothing.

findSocialPost

Queries a list of social posts based on a filter criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to query the list of social posts.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Not currently used.

Response Payload

Element Name	Type	Description
result	*Social Post*	A list of social posts that satisfy the inbound criteria.

processSocialPost

Processes a list of social post records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Type of operation to be performed on the social posts. Example Create.
socialPost	*Social Post*	List of social posts.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Parameters that control the bulk operation.

Response Payload

Element Name	Type	Description
result	*Social Post*	List of updated social posts.

getSocialUser

Queries a single social user record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
userId	long	he unique ID of the social user.

Response Payload

Element Name	Type	Description
result	*Social User*	A social user record that matches the inbound parameters.

createSocialUser

Creates a social user record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
socialUser	*Social User*	The social user to be created.

Response Payload

Element Name	Type	Description
result	*Social User*	The created social user record.

mergeSocialUser

Merge a social user.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
socialUser	*Social User*	Social User

Response Payload

Element Name	Type	Description
result	*Social User*	A social user record after the merge.

findSocialUser

Queries a list of social users based on a filter criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to query the list of social users.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Not currently used.

Response Payload

Element Name	Type	Description
result	*Social User*	A list of social users that satisfy the inbound criteria.

processSocialUser

Processes a list of social user records.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Type of operation to be performed on the social users. Example Create.
socialUser	*Social User*	List of social users.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Parameters that control the bulk operation.

Response Payload

Element Name	Type	Description
result	*Social User*	List of updated social users.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	SVC_MANAGE_SOCIAL_POST_PRIV	Manage Social Post	Allows create, update, delete and view of social posts

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_MANAGE_SOCIAL_POST_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_MANAGE_SOCIAL_POST_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
SVC_MANAGE_SOCIAL_POST_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description

Social Post

An object that stores the details of the social post received from the Oracle Social Cloud application to be reviewed and responded to , by the customer service personnel. An example of a social post from Twitter is: oracle_support E-mail responses from our agent are not being received by our customers. Is the e-mail server down?

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/model/socialService/}SocialPost

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Tag*
Contains	*URLs*
Handled by	*Social Post*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CanRespondFlag	boolean	Indicates if a social post can be responded to.
CreatedBy	string	The user who created the social post.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the social post was created.
DeletedFlag	boolean	Indicates if the social post was deleted.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the message was last updated.
LastUpdateLogin	string	The session login associated with the user who last updated the message.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the service request.
ObjectId	long	Indicates the identifier of the business object associated with the social post.
ObjectTypeCd	string	Indicates the business object associated with the social post, such as SVC_SERVICE_REQUESTS or SVC_SR_MESSAGES.
ObjectVersionNumber	int	Indicates the object version number of the social post.
PostChannelCd	string	Indicates the social network on which the post was made.
PostContent	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	The content of the social post made by the customer on the social network.
PostContentString	string	The content of the social post made by the customer on the social network in string data type.
PostDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date the social post was made.
PostId	long	The unique ID of the social post record. • Primary Key
PostMessageTypeCd	string	Indicates if the message is public or private.
PostParentPostId	string	The unique ID of the current post's parent post.
PostPostId	string	The unique ID of the current post returned by the social network.
PostSubChannelName	string	The name of the channel on which the customer made the social post. E.g. the deploying company facebook fan page name or twitter handle.
PostURL	string	Indicates the url of the social post.
PostUser	string	Indicates the user name of the post author on the corresponding social network.
ProcessingMessage	string	Indicates the processed social post message

Name	Type	Description
ProcessingStatusCd	string	Indicates whether the social post has been processed successfully or not.
SocialPostTags	*Tag*	The list of social post tags.
SocialUserId	long	Indicates the user's social ID on the social network.
SourceCd	string	Indicates the source system from which the social post was received. E.g. SRM
SourcePostIdPrimary	string	The primary ID of the post in the source system.
SourcePostIdSecondary	string	The second ID of the post in the source system.
SourcePostIdTertiary	string	The third ID of the post in the source system.
socialPostUrls	*URLs*	The list of URLs associated with a social post.

Social User

An object that stores the details of the social post received from the Oracle Social Cloud application to be reviewed and responded to , by the customer service personnel. An example of a social post from Twitter is: oracle_support E-mail responses from our agent are not being received by our customers. Is the e-mail server down?

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/model/socialService/}SocialUser

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Social Post*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Lists who created the row of data
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Date the row of data was created
FollowerCount	long	Indicates the number of followers that the user has on the social network.
ImageURL	string	Indicates the URL of the profile image of the social user.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The application displays the date that the record was last edited.
LastUpdateLogin	string	System attribute that captures the session login information, such as user or account name, of the user who accesses an application.
LastUpdatedBy	string	The application displays the identity of the user who last edited the record.
ObjectVersionNumber	int	System attribute that captures the incremental version number for an object.
ProfileURL	string	Indicates the profile url of the social user.
SocialNetworkCd	string	Indicates the social network, such as Twitter and Facebook.
SocialNetworkUserId	string	Indicates the user's id on the social network.
SocialNetworkUserName	string	Indicates the user's name as shown on the social network.
UserId	long	Indicates the social user identifier. • Primary Key

Tag

This object stores tags associated to the service objects like social post and service requests. An example for a tag is Customer_Churn or Billing.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/model/socialService/}SocialPostTag

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Social Post*
Handled by	*Social Post*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Tag	string	Indicates the tag associated with an object.
TagId	long	Indicates the tag identifier.
TagRefId	long	Indicates the tag reference identifier. • Primary Key

URLs

This object stores URLs associated to the service objects like social post and service requests. An example for a URL is a link to a photo sent by a customer along with a social post.

QName: {http://xmlns.oracle.com/apps/crm/service/svcMgmt/model/socialService/}SocialPostUrl

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Social Post*
Handled by	*Social Post*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Url	string	Indicates the URL associated with an object.
UrlId	long	Indicates the URL ID. • Primary Key

Source Information Technology System

A definition of the different information technology systems deployed by a company and a cross reference of trading community information between those systems and Oracle Fusion.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/sourceSystemService/applicationModule/}SourceSystemService

Service WSDL URL: https://servername/crmService/FoundationSourceSystemService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Source Information Technology System Setup

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Source System*
Handles	*Trading Community Source System Translation*
Handles	*Trading Community Original System Mapping*

Operations

- *getSourceSystem*

- *createSourceSystem*
- *updateSourceSystem*
- *deleteSourceSystem*
- *mergeSourceSystem*
- *findSourceSystem*
- *getOriginalSystemByCode*
- *processSourceSystem*
- *processCSSourceSystem*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getSourceSystem

The Get operation for trading community source system.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
origSystemId	long	The unique identifier of the original system.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/sourceSystemService/}OriginalSystemResult	The trading community source system that matches the inbound key attributes.

createSourceSystem

The Create operation for trading community source system.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
originalSystem	*Trading Community Source System*	The trading community source system to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/sourceSystemService/}OriginalSystemResult	The result of the operation that includes the successfully created trading community source system and a list of warning or information messages.

updateSourceSystem

The Update operation for trading community source system.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
originalSystem	*Trading Community Source System*	The trading community source system to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/sourceSystemService/}OriginalSystemResult	The result of the operation that includes the successfully updated trading community source system and a list of warning or information messages.

deleteSourceSystem

The Delete operation for trading community source system.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
originalSystem	*Trading Community Source System*	The trading community source system to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergeSourceSystem

The Merge operation for trading community source system. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
originalSystem	*Trading Community Source System*	The trading community source system to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/sourceSystemService/}OriginalSystemResult	The result of the operation that includes the successfully merged trading community source system and a list of warning or information messages.

findSourceSystem

The Find operation for trading community source system.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Trading Community Source System*	The result of the operation that includes a list of trading community source system that satisfy the inbound criteria and any warning or information messages.

getOriginalSystemByCode

The Get operation for trading community source system.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
BindOrigSystem	string	The unique code identifying the original system.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/sourceSystemService/}OriginalSystemResult	The result of the operation that includes a list of trading community source system that satisfy the inbound criteria and any warning or information messages.

processSourceSystem

The Bulk load operation for trading community source system.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action to perform, such as create, update, merge, or delete.

Element Name	Type	Description
originalSystem	*Trading Community Source System*	A list of trading community source systems to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Trading Community Source System*	The result of the operation that includes a list of trading community source system that were successfully processed and any warning or information messages.

processCSSourceSystem

An operation to apply the changes back to the data source for trading community source system.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object to represent the changes.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created and updated data objects, and all warning and information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name; an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used to evaluate the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined for this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for the service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
processCSSourceSystem	HZ_MANAGE_TRADING_COMMUNITY_ORIGINAL_SYSTEM_PRIV	Manage Trading Community Original System	Allows the update of original system information.
getSourceSystem	HZ_MANAGE_TRADING_COMMUNITY_ORIGINAL_SYSTEM_PRIV	Manage Trading Community Original System	Allows the update of original system information.
mergeSourceSystem	HZ_MANAGE_TRADING_COMMUNITY_ORIGINAL_SYSTEM_PRIV	Manage Trading Community Original System	Allows the update of original system information.
updateSourceSystem	HZ_MANAGE_TRADING_COMMUNITY_ORIGINAL_SYSTEM_PRIV	Manage Trading Community Original System	Allows the update of original system information.
deleteSourceSystem	HZ_MANAGE_TRADING_COMMUNITY_ORIGINAL_SYSTEM_PRIV	Manage Trading Community Original System	Allows the update of original system information.
getOriginalSystemByCode	HZ_MANAGE_TRADING_COMMUNITY_ORIGINAL_SYSTEM_PRIV	Manage Trading Community Original System	Allows the update of original system information.
findSourceSystem	HZ_MANAGE_TRADING_COMMUNITY_ORIGINAL_SYSTEM_PRIV	Manage Trading Community Original System	Allows the update of original system information.

Operation Name	Privilege Code	Privilege Name	Privilege Description
createSourceSystem	HZ_MANAGE_TRADING_COMMUNITY_ORIGINAL_SYSTEM_PRIV	Manage Trading Community Original System	Allows the update of original system information.
processSourceSystem	HZ_MANAGE_TRADING_COMMUNITY_ORIGINAL_SYSTEM_PRIV	Manage Trading Community Original System	Allows the update of original system information.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_ORIGINAL_SYSTEM_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
HZ_MANAGE_TRADING_COMMUNITY_ORIGINAL_SYSTEM_PRIV	ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	Customer Maintenance Segregated	Maintains customer related data except the creation and management of customers.
HZ_MANAGE_TRADING_COMMUNITY_ORIGINAL_SYSTEM_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_MANAGE_TRADING_COMMUNITY_ORIGINAL_SYSTEM_PRIV	ORA_DOO_ORCHESTRATION_INFRASTRUCTURE_ADMINISTRATION_DUTY_CRM	Orchestration Infrastructure Administration	Allows access to administrative pages and functions for the orchestration infrastructure elements that can be used by other applications.
HZ_MANAGE_TRADING_COMMUNITY_ORIGINAL_SYSTEM_PRIV	ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	Customer Maintenance	Defines and maintains Receivables attributes of customer accounts and customer account sites.
HZ_MANAGE_TRADING_COMMUNITY_ORIGINAL_SYSTEM_PRIV	ORA_WSH_SHIPPING_ADMINISTRATION_DUTY_CRM	Shipping Administration	Manages all setup tasks necessary to implement and maintain Oracle Fusion Shipping.
HZ_MANAGE_TRADING_COMMUNITY_ORIGINAL_SYSTEM_PRIV	ORA_EGI_PRODUCT_HUB_ADMINISTRATION_DUTY_CRM	Product Hub Administration	Administers tasks required to setup Oracle Fusion Product Hub. Duty role includes all setup duty roles available for this product and inherits setup duty roles from Oracle Fusion Product and Catalog Management.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_ COMMUNITY_ORIGINAL_SYSTEM_ PRIV	ORA_RCS_SUPPLY_CHAIN_ APPLICATION_ADMINISTRATOR_ JOB	Supply Chain Application Administrator	Individual responsible for supply chain application administration. Collaborates with supply chain application users to maintain consistent application setup, rules, and access.
HZ_MANAGE_TRADING_ COMMUNITY_ORIGINAL_SYSTEM_ PRIV	ORA_DOO_ORDER_ ORCHESTRATION_ ADMINISTRATION_DUTY_CRM	Order Orchestration Administration	Allows access to order orchestration or order promising setup tasks.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_WSH_SHIPPING_ ADMINISTRATION_DUTY_CRM	ORA_WSH_CARRIER_ MANAGEMENT_DUTY_CRM	Carrier Management	Manages setup of carriers including defining carriers, carrier contacts, and shipping methods.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZPM_CHANNEL_MANAGER_ DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_OKC_CONTRACT_ AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_OKC_CONTRACT_ AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_	ORA_OKC_CONTRACT_SEARCH_ VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_IBY_CUSTOMER_PAYMENT_INSTRUMENT_MANAGEMENT_DUTY_CRM	Customer Payment Instrument Management	Manages customer bank accounts and credit cards and other payment details.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_RCS_SUPPLY_CHAIN_APPLICATION_ADMINISTRATOR_JOB	ORA_FUN_ENTERPRISE_STRUCTURES_ADMINISTRATION_DUTY_CRM	Enterprise Structures Administration	Administer all enterprise structure related setup objects including charts of accounts, calendars, currencies, ledgers, legal entities, legal jurisdictions and business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_RCS_SUPPLY_CHAIN_APPLICATION_ADMINISTRATOR_JOB	ORA_RCL_FIELD_SERVICE_ADMINISTRATOR_JOB	Field Service Administrator	Individual responsible for the administration of field service logistics.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_WSH_SHIPPING_ADMINISTRATION_DUTY_CRM	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_RCS_SUPPLY_CHAIN_APPLICATION_ADMINISTRATOR_JOB	ORA_INV_INVENTORY_ADMINISTRATION_DUTY_CRM	Inventory Administration	Configures all setup-related activities for inventory management.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_RCS_SUPPLY_CHAIN_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_RCS_SUPPLY_CHAIN_APPLICATION_ADMINISTRATOR_JOB	ORA_DOO_ORCHESTRATION_INFRASTRUCTURE_ADMINISTRATION_DUTY_CRM	Orchestration Infrastructure Administration	Allows access to administrative pages and functions for the orchestration infrastructure elements that can be used by other applications.
ORA_RCS_SUPPLY_CHAIN_APPLICATION_ADMINISTRATOR_JOB	ORA_DOO_ORDER_ORCHESTRATION_ADMINISTRATION_DUTY_CRM	Order Orchestration Administration	Allows access to order orchestration or order promising setup tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_ZX_REGISTRATION_PII_DUTY_CRM	Party Taxpayer Identifier PII	View personally identifiable information for tax registration number of type taxpayer ID.
ORA_DOO_ORCHESTRATION_INFRASTRUCTURE_ADMINISTRATION_DUTY_CRM	ORA_MSP_PLANNING_ADMINISTRATION_DUTY_CRM	Planning Administration	Configures and manages planning set up, data collection and order promising server processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_DOO_ORDER_ORCHESTRATION_ADMINISTRATION_DUTY_CRM	ORA_MSP_PLANNING_ADMINISTRATION_DUTY_CRM	Planning Administration	Configures and manages planning set up, data collection and order promising server processes.
ORA_RCS_SUPPLY_CHAIN_APPLICATION_ADMINISTRATOR_JOB	ORA_CZ_PRODUCT_CONFIGURATOR_MANAGER_JOB	Product Configurator Manager	Individual responsible for the creation and maintenance of configuration models.
ORA_RCS_SUPPLY_CHAIN_APPLICATION_ADMINISTRATOR_JOB	ORA_EGI_PRODUCT_HUB_ADMINISTRATION_DUTY_CRM	Product Hub Administration	Administers tasks required to setup Oracle Fusion Product Hub. Duty role includes all setup duty roles available for this product and inherits setup duty roles from Oracle Fusion Product and Catalog Management.
ORA_EGI_PRODUCT_HUB_ADMINISTRATION_DUTY_CRM	ORA_EGP_PRODUCT_MODEL_ADMINISTRATION_DUTY_CRM	Product Model Administration	Administers tasks required to setup Oracle Fusion Product Model. Duty role includes all setup duty roles available for this product.
ORA_RCS_SUPPLY_CHAIN_APPLICATION_ADMINISTRATOR_JOB	ORA_RCV_RECEIVING_ADMINISTRATION_DUTY_CRM	Receiving Administration	Configures receiving parameters to specify default receiving options for an inventory organization.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_RCS_SUPPLY_CHAIN_APPLICATION_ADMINISTRATOR_JOB	ORA_WSH_SHIPPING_ADMINISTRATION_DUTY_CRM	Shipping Administration	Manages all setup tasks necessary to implement and maintain Oracle Fusion Shipping.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_RCS_SUPPLY_CHAIN_APPLICATION_ADMINISTRATOR_JOB	ORA_RCS_SCM_COMMON_VIEW_WEB_SERVICE_DUTY_CRM	Supply Chain Common View Web Service	Provides view only web service access to supply chain common to perform activities such as viewing inventory organizations, plant parameters, carriers and units of measure list of values.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Trading Community Original System Mapping

The information about the mapping among source systems and objects that are imported from the system.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/sourceSystemService/}OriginalSystemMapping

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Source System*
Handled by	*Source Information Technology System*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MultiOsrFlag	boolean	Y or N indicates whether or not multiple source identifiers from the same source system are allowed to be mapped to one OWNER_TABLE_ID.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name. • Primary Key
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column. • Primary Key
Status	string	The status of the record.

Trading Community Source System

An external system from which data can be imported into the trading community registry.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/sourceSystemService/}OriginalSystem

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Source System Translation*
Contains	*Trading Community Original System Mapping*
Handled by	*Source Information Technology System*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
EnableForAssetFlag	boolean	Flag indicates whether a source system is enabled for use in assets products; Y indicates enabled for use and N indicates not enabled for use.
EnableForItemsFlag	boolean	Flag to indicate that the source system can be used to import item records.
EnableForPlanningFlag	boolean	Flag to indicate that the source system can be used to import planning records.
EnableForTcaFlag	boolean	Flag to indicate that the source system can be used to import trading community records.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OrigSystem	string	The source system name.
OrigSystemId	long	The identifier for the source system. • Primary Key
OrigSystemName	string	The source system name.
OrigSystemType	string	The source system type.
OriginalSystemMapping	*Trading Community Original System Mapping*	Mapping of the source system to the trading community entities.
OriginalSystemTranslation	*Trading Community Source System Translation*	Translated source system.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Trading Community Source System Translation

The source system information in a local language.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/sourceSystemService/}OriginalSystemTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Source System*
Handled by	*Source Information Technology System*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
Language	string	Indicates the code of the language into which the contents of the translatable columns are translated. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystemId	long	Source system identifier. • Primary Key
OrigSystemName	string	Source system name.
SourceLang	string	Indicates the code of the language in which the contents of the translatable columns were originally created.

Source Information Technology System Reference

A definition of references between source system records and those in the trading community registry. For example, a person with the identifier 1001 is a reference to a contact with identifier 1000 that was imported from the Siebel CRM system.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReferenceService

Service WSDL URL: https://servername/crmService/OriginalSystemReferenceService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Group
- CRM : Trading Community Model : Trading Community Group
- CRM : Trading Community Model : Trading Community Group

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Original System Mapping Identifier Additional Information*
Handles	*Source System Reference*

Operations

- *getOriginalSystemReference*
- *createOriginalSystemReference*
- *updateOriginalSystemReference*
- *deleteOriginalSystemReference*
- *mergeOriginalSystemReference*
- *findOriginalSystemReference*
- *findOwnerTableIdByReference*
- *processOriginalSystemReference*
- *processCSOriginalSystemReference*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*

- *getEntityList*

getOriginalSystemReference

The Get operation for the trading community original system reference identifier.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
origSystemReferenceId	long	The get operation for the trading community source system reference.

Response Payload

Element Name	Type	Description
result	*Source System Reference*	The trading community original system reference that matches the inbound key attributes.

createOriginalSystemReference

The Create operation for the trading community original system reference.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
originalSystemReference	*Source System Reference*	The create operation for the trading community source system reference.

Response Payload

Element Name	Type	Description
result	*Source System Reference*	The result of the operation that includes the successfully created trading community source system reference and a list of warning or information messages.

updateOriginalSystemReference

The Update operation for the trading community original system reference.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
originalSystemReference	*Source System Reference*	The trading community original system reference to be updated.

Response Payload

Element Name	Type	Description
result	*Source System Reference*	The result of the operation that includes the successfully updated trading community original system reference and a list of warning or information messages.

deleteOriginalSystemReference

The Delete operation for the trading community original system reference.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
originalSystemReference	*Source System Reference*	The trading community original system reference to be deleted.

Response Payload

Element Name	Type	Description
result	void	A list of warning or information messages encountered when the object was deleted.

mergeOriginalSystemReference

The Merge operation for the trading community original system reference. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
originalSystemReference	*Source System Reference*	The trading community original system reference to be merged.

Response Payload

Element Name	Type	Description
result	*Source System Reference*	The result of the operation that includes the successfully merged trading community original system reference and a list of warning or information messages.

findOriginalSystemReference

The Find operation for the trading community original system reference.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Source System Reference*	A list of trading community original system reference that satisfy the inbound criteria.

findOwnerTableIdByReference

The Get reference information based on Original System Reference for 3rd party application.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
OrigSystem	string	The unique code of the original system.
OriginalSystemReference	string	The unique identifier of the original system reference.
OwnerTableName	string	The trading community table name for which the reference information is being searched.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Source System Reference*	The trading community original system mapping identifier that matches the inbound key attributes.

processOriginalSystemReference

The Bulk load operation for the trading community original system reference.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action to perform, such as create, update, merge, or delete.
originalSystemReference	*Source System Reference*	A list of the trading community original system references to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Source System Reference*	The result of the operation that includes a list of trading community original system reference that were successfully processed and any warning or information messages.

processCSOriginalSystemReference

An operation to apply the changes back to the data source for the trading community original system reference.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object to represent the changes.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created and updated data objects, and all warning and information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name; an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used to evaluate the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined for this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for the service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create,

Element Name	Type	Description
		update, merge, and delete operations can be performed on the object.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*
Contained by	*Location Details*
Contained by	*Household*
Contained by	*Contact Preference*
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*
Contained by	*Trading Community Address Purpose*
Contained by	*Telex*

Relationship Type	Object or Service
Contained by	*Phone*
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*
Contained by	*Trading Community Person Details*
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*
Contained by	*Trading Community Customer Account Site Use*
Contained by	*Relationship*
Contained by	*Electronic Data Interchange*
Contained by	*Trading Community Customer Account or Site Role*
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Subscription

Subscription External Service

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/subscriptions/subscriptionManagement/subscriptionIntegrationService/}SubscriptionIntegrationService

Service WSDL URL: https://servername/crmService/SubscriptionIntegrationService?WSDL

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Subscription*
Handles	*Sales Credit*
Handles	*Subscription Product*
Handles	*Subscription Charge Tier*
Handles	*Subscription Bill Lines*
Handles	*Subscription Party*
Handles	*Bill Line*
Handles	*Subscription Charge Adjustment*
Handles	*Subscription Product Descriptive Flexfield*
Handles	*Subscription Bill Adjustment*
Handles	*Subscription Descriptive Flexfield*
Handles	*Subscription Bill Lines*
Handles	*Charge*

Operations

- *getEligibleBillLines*
- *getSubscriptions*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getEligibleBillLines

Get Eligible BillLine to process Third party Invoice

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
subscriptionNumber	string	Subscription Number

Response Payload

Element Name	Type	Description
result	*Subscription Bill Lines*	BillLine and Sales Credit for a given Subscription Number

getSubscriptions

Get operation for Subscription SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
subscriptionId	long	Subscription Id

Response Payload

Element Name	Type	Description
result	*Subscription*	Result of the operation includes the successfully retrieved Subscription SDO

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.

Element Name	Type	Description
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getSubscriptions	OSS_VIEW_SUBSCRIPTION_PRIV	View Subscription	View a subscription
getEligibleBillLines	OSS_VIEW_SUBSCRIPTION_PRIV	View Subscription	View a subscription

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
OSS_VIEW_SUBSCRIPTION_PRIV	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
OSS_VIEW_SUBSCRIPTION_PRIV	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_EXTERNAL_DUTY	Subscription Search and View Access External	Searches and views subscriptions for the assigned business units. Duty role for a consuming team. This duty role does not have access to work area.
OSS_VIEW_SUBSCRIPTION_PRIV	ORA_OSS_SUBSCRIPTION_AUTHORING_EXTERNAL_DUTY	Subscription Authoring External	Authors subscriptions. Duty role for a consuming team. This duty role does not have access to work area.
OSS_VIEW_SUBSCRIPTION_PRIV	ORA_OSS_SUBSCRIPTION_AMENDMENT_EXTERNAL_DUTY	Subscription Amendment External	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval. Duty role for a consuming team. This duty role does not have access to work area.
OSS_VIEW_SUBSCRIPTION_PRIV	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
OSS_VIEW_SUBSCRIPTION_PRIV	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
OSS_VIEW_SUBSCRIPTION_PRIV	ORA_OSS_ALL_SUBCRIPTIONS_MGMT_WEBSERV_DUTY	All Subscriptions Management Web Service	Web service duty that manages all subscriptions irrespective of business units.
OSS_VIEW_SUBSCRIPTION_PRIV	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.

Bill Line

Bill Lines View Object

QName: {http://xmlns.oracle.com/apps/subscriptions/subscriptionManagement/subscriptionService/}BillLines

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Subscription Bill Adjustment*
Contained by	*Subscription Product*
Handled by	*Subscription*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdhocBillLineFlag	boolean	Adhoc BillLine Flag
Amount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Bill Line Amount
BatchTag	string	Batch Tag
BillInstanceNumber	long	Bill Instance Number
BillLineId	long	Bill Line Id • Primary Key
BillLinePuid	string	Bill Line Puid
BillingPeriod	decimal	Billing Period
ChargeDefinition	string	Charge Definition
ChargeId	long	Charge Id
ChargeName	string	Charge Name
ChargePeriod	decimal	Charge Period
ChargePuid	string	Charge Puid
CorpCurrencyCode	string	Corp Currency Code
CoveredLevelId	long	Covered Level Id
CreatedBy	string	Created By
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Creation Date
CurcyConvRateType	string	Currency Conversion Rate Type
CurrencyCode	string	Currency Code
CustomerTrxTypeSequenceId	long	Customer Transaction Type Sequence Id

Name	Type	Description
DateBilledFrom	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date Billed From
DateBilledTo	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date Billed To
DateToInterface	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date To Interface
InterfacedFlag	boolean	Interfaced Flag
InvoiceBillLineId	long	Invoice Bill Line Id
InvoiceText	string	Invoice Text
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last Update Date
LastUpdateLogin	string	Last Update Login
LastUpdatedBy	string	Last Updated By
ListPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	List Price
ManualFlag	boolean	Manual Flag
MilestoneEventId	long	Milestone Event Id
MilestoneEventName	string	Milestone Event Name
MilestoneEventPuid	string	Milestone Event Puid
ObjectVersionNumber	int	Object Version Number
PricingError	string	Pricing Error
RecurringFlag	boolean	Recurring Flag
RevenueAdjustmentFromDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Revenue Adjustment From Date
RevenueAdjustmentToDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Revenue Adjustment To Date

Name	Type	Description
RevenueLineId	long	Revenue Line Id
RevenueOption	string	Revenue Option
RevenuePeriod	string	Revenue Period
RevisionRevenueLineId	long	Revision Revenue Line Id
SentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Sent Date
SubscriptionId	long	Subscription Id
SubscriptionProductId	long	Subscription Product Id
SummarizedBillLineId	long	Summarized Bill Line ID
TransactionAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Transaction Amount
TransactionClass	string	Transaction Class
TransactionClassMeaning	string	Transaction Class Meaning
TransactionDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Transaction Date
TransactionNumber	string	Transaction Number
TransactionTax	decimal	Transaction Tax
UsageAcquiredFlag	boolean	Usage Acquired Flag
UsageCaptureDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Usage Capture Date
UsageFlag	boolean	Usage Flag
UsagePricedFlag	boolean	Usage Priced Flag
UsageProfileFlag	boolean	Usage Profile Flag

Name	Type	Description
UsageQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	Usage Quantity
UsageRatingProcess	string	Usage Rating Process
VersionType	string	Version Type
billAdjustments	*Subscription Bill Adjustment*	Bill Adjustments

Charge

Subscription Charges View Object

QName: {http://xmlns.oracle.com/apps/subscriptions/subscriptionManagement/subscriptionService/}Charges

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Subscription Charge Adjustment*
Contains	*Subscription Charge Tier*
Contained by	*Subscription Product*
Handled by	*Subscription*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Allowance	decimal	Charge Allowance
BatchTag	string	Batch Tag
BillLineId	long	Bill Line Id

Name	Type	Description
BillingFreq	string	Billing Frequency
BillingFreqName	string	Billing Frequency Name
BlockSize	decimal	Block Size
CanAdjustFlag	boolean	Can Adjust Flag
ChargeAppliesTo	string	Charge Applies To
ChargeCurrency	string	Charge Currency
ChargeDefinition	string	Charge Definition
ChargeDefinitionName	string	Charge Definition Name
ChargeId	long	Charge Id • Primary Key
ChargeName	string	Charge Name
ChargePuid	string	Charge Puid
ChargeSubtype	string	Charge Subtype
ChargeType	string	Charge Type
CorpCurrencyCode	string	Corp Currency Code
CoveredLevelId	long	Covered Level Id
CreatedBy	string	Created By
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Creation Date
CurcyConvRateType	string	Currency Conversion Rate Type
EnableProration	string	Enable Proration
ExternalKey	string	External Key

Name	Type	Description
ExternalParentKey	string	External Parent Key
InvoiceRuleName	string	Invoicing Rule Name
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last Update Date
LastUpdateLogin	string	Last Update Login
LastUpdatedBy	string	Last Updated By
MilestoneBillingFlag	boolean	Milestone Billing Flag
MilestoneRevenueFlag	boolean	Milestone Revenue Flag
MilestoneTemplateId	long	Milestone Template Id
MilestoneTemplateName	string	Milestone Template Name
ObjectVersionNumber	int	Object Version Number
ParentEntity	string	Parent Entity
ParentEntityId	long	Parent Entity Id
PrePaymentNumber	long	Pre Payment Number
PricePeriodicity	string	Price Periodicity
PricePeriodicityName	string	Price Periodicity Name
PriceType	string	Price Type
PricedQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	Priced Quantity
PricedQuantityUOM	string	Priced Quantity UOM
PrimaryFlag	boolean	Primary Flag
RollupFlag	boolean	Rollup Flag

Name	Type	Description
SequenceNumber	long	Sequence Number
SubscriptionId	long	Subscription Id
SubscriptionProductId	long	Subscription Product Id
TierType	string	Tier Type
TieredFlag	boolean	Tiered Flag
TieredPricingHeaderId	long	Tiered Pricing Header Id
UnitListPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Unit List Price
UsagePriceLockFlag	boolean	Usage Price Lock Flag
VersionType	string	Version Type
adjustments	*Subscription Charge Adjustment*	Charge Adjustments
chargeTiers	*Subscription Charge Tier*	Charge Tiers

Sales Credit

Sales Credit View Object

QName: {http://xmlns.oracle.com/apps/subscriptions/subscriptionManagement/subscriptionIntegrationService/}EligibleBillLinesSalesCredits

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Subscription Bill Lines*
Contained by	*Subscription Bill Lines*

Relationship Type	Object or Service
Handled by	*Subscription*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillLineId	long	Bill Lines Id
EligibleBillLinesExt	*Subscription Bill Lines*	Extensible Attributes
OrgId	long	Org Id
ResourceSalesrepId	long	SalesReps Id • Primary Key
SalesCreditPercentSplit	long	Sales Credit percentage Split
SalesCreditTypeId	long	Sales Credit Type

Subscription

Subscriptions View Object

QName: {http://xmlns.oracle.com/apps/subscriptions/subscriptionManagement/subscriptionService/}Subscriptions

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Subscription Descriptive Flexfield*
Contains	*Subscription Product*
Contains	*Subscription Party*
Handled by	*Subscription*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountingRuleId	long	Accouting Rule Id
AccountingRuleName	string	Accounting Rule Name
ApprovalNote	string	Approval Note
ApprovedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Approved Date
AssigneeId	long	Assignee Id
AssigneeType	string	Assignee Type
AsyncFlag	boolean	Async Flag
BatchTag	string	Batch Tag
BillOnDay	decimal	Bill On Day
BillService	string	Bill Service
BillServiceName	string	Bill Service Name
BillToAccountDescription	string	Bill To Account Description
BillToAccountId	long	Bill To Account Id
BillToAccountNumber	string	Bill To Account Number
BillToAddress	string	Bill To Address
BillToContactId	long	Bill-to Contact
BillToContactName	string	Bill-to Contact

Name	Type	Description
BillToParty	string	Bill To Party
BillToPartyId	long	Bill-to Customer
BillToPartyName	string	Bill-to Customer
BillToSite	string	Bill To Site
BillToSiteUseId	long	Bill To Site Used Id
BillingDateCode	string	Billing Date Code
BillingDateName	string	Billing Date Name
BillingFrequency	string	Billing Frequency
BillingFrequencyName	string	Billing Frequency Name
BillingOffsetDays	int	Billing Offset Days
BillingSystem	string	Billing System
BusinessUnitId	long	Business Unit Id
BusinessUnitName	string	Business Unit Name
CalculatedCreditAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Calculated Credit Amount
CancelReason	string	Cancel Reason
CanceledAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Canceled Amount
CanceledDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Canceled Date
CloseCreditMethod	string	Close Credit Method
ClosedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Closed Amount

Name	Type	Description
ClosedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Closed Date
CommunicationChannel	string	Communication Channel
CorpCurrencyCode	string	Corp Currency Code
CorrelationId	string	Correlation Id
CreatedBy	string	Created By
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Creation Date
CreditedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Credited Amount
CurcyConvRateType	string	Currency Conversion Rate Type
Currency	string	Currency of the subscription
CurrencyConversionRate	string	Cuurency Conversion Rate
CurrencyConversionRateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Currency Conversion Rate Date
CurrencyConversionRateType	string	Currency Conversion Rate Type
CurrencyName	string	Currency Name
CustomerAcceptance	string	Customer Acceptance
CustomerTrxTypeSequenceId	long	Customer Transaction Type Sequence Id
DaysBeforeExpiry	long	Days Before Expiry
DaysBeforeExpiryUsed	string	Days Before Expiry Used
DefaultLanguage	string	Default Language
DefinitionOrganizationId	long	Definition Organization Id
Description	string	Subscription Description

Name	Type	Description
DocumentFiscalClassification	string	Document Fiscal Classification
Duration	long	Subscription Duration
EnableRenewalRemindersFlag	boolean	Enable Renewal Reminders
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	End Date
EstimatedTax	decimal	Estimated Tax
ExemptCertificateNumber	string	Exempt Certificate Number
ExemptReason	string	Exempt Reason
ExemptReasonMeaning	string	Exempt Reason Meaning
GenerateBillingSchedule	string	Generate Billing Schedule
InstrAssignmentId	long	Instrument Assignment Id
InternalApproval	string	Internal Approval
InvoicedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Invoiced Amount
InvoicingRuleId	long	Invoicing Rule Id
InvoicingRuleName	string	Invoicing Rule Name
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last Update Date
LastUpdateLogin	string	Last Update Login
LastUpdatedBy	string	Last Updated By
LayoutTemplate	string	Layout Template
LegalEntityId	long	Legal Entity Id
LegalEntityName	string	Legal Entity Name

Name	Type	Description
LockedFlagReadOnly	string	Locked Flag Read Only
MatrixId	long	Matrix Id
MinimumRenewalDurationUsed	long	Minimum Renewal Duration Used
MinimumRenewalPeriodUsed	string	Minimum Renewal Period Used
NegotiationLanguage	string	Negotiation Language
NotificationTemplateId	long	Notification Template Id
OverrideCreditAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Override Credit Amount
PONumber	string	PO Number
PartialPeriodStart	string	Partial Period Start
PartialPeriodType	string	Partial Period Type
PaymentMethod	string	Payment Method
PaymentMethodName	string	Payment Method Name
PaymentTermsId	long	Payment Terms Id
PaymentTermsName	string	Payment Terms Name
Period	string	Subscription Period
PerpetualFlag	boolean	Perpetual Flag
PriceAdjustmentPercentUsed	decimal	Price Adjustment Percent Used
PriceAdjustmentTypeUsed	string	Renewal Price Adjustment Used
PricedOnDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Priced On Date
PricingError	string	Pricing Error

Name	Type	Description
PricingSegment	string	Pricing Segment
PricingSegmentExplanation	string	Pricing Segment Explanation
PricingStrategyExplanation	string	Pricing Strategy Explanation
PricingStrategyId	long	Pricing Strategy Id
PricingSystem	string	Pricing System
PrimaryPartyId	long	Primary Party Id
PrimaryPartyName	string	Primary Party Name
PrimarySalesPerson	long	Primary Sales Person
PrimarySalesRepresentative	string	Primary Sales Representative
QuoteAccount	string	Quote Account
QuoteAddress	string	Quote Address
QuoteEmail	string	Quote Email
QuoteFax	string	Quote Fax
QuoteOrganization	string	Quote Organization
QuotePhone	string	Quote Phone
QuoteToCcEmail	string	Quote To Cc Email
QuoteToContact	string	Quote To Contact
QuoteToContactId	long	Quote To Contact Id
QuoteToContactNumber	string	Quote To Contact Number
RenewPerpetuallyFlag	boolean	Renew Perpetually Flag
RenewalCustomerAcceptance	string	Renewal Customer Acceptance

Name	Type	Description
RenewalDuration	long	Renewal Duration
RenewalDurationPeriod	string	Renewal Duration Period
RenewalDurationPeriodName	string	Renewal Duration Period Name
RenewalInternalApproval	string	Renewal Internal Approval
RenewalPaymentMethodName	string	Renewal Payment Method Name
RenewalPriceAdjustmentBasis	string	Renewal Price Adjustment Basis
RenewalPriceAdjustmentPercent	decimal	Renewal Price Adjustment Percent
RenewalPriceAdjustmentType	string	Renewal Price Adjustment Type
RenewalPricingMethodUsed	string	Renewal Pricing Method Used
RenewalProcess	string	Renewal Process
RenewalProcessUsed	string	Renewal Process Used
RenewalSubscriptionProfileId	long	Renewal Subscription Profile Id
RenewalTemplateId	long	Renewal Template Id
RenewedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Renewed Date
RetainSubsOnRenewFlag	boolean	Retain Subs On Renew Flag
SalesOrderId	long	Sales Order Id
SalesOrderNumber	string	Sales Order Number
SegmentExplanationMessage	string	Segment Explanation Message
ShipToAccountDescription	string	Ship-to Account Description
ShipToAccountId	long	Ship-to Account

Name	Type	Description
ShipToAccountNumber	string	Ship-to Account
ShipToContactId	long	Ship-to Contact
ShipToContactName	string	Ship-to Contact
ShipToContactPartyId	long	Ship-to Contact
ShipToParty	long	Ship To Party
ShipToPartyName	string	Ship To Party Name
ShipToPartySiteId	long	Ship To Party Site Id
ShipToSite	string	Ship To Site
ShortDescription	string	Short Description
SkipConsolidationFlag	boolean	Skip Consolidation Flag
SourceKey	string	Source Key
SourceNumber	string	Source Number
SourceSystem	string	Source System
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Start Date
StateTransitionFlowState	string	State Transistion Flow State
Status	string	Subscription Status
SubscriptionId	long	Subscription Id • Primary Key
SubscriptionInvoiceText	string	Subscription Invoice Text
SubscriptionNumber	string	Subscription Number
SubscriptionProfileId	long	Subscription Profile Id

Name	Type	Description
SubscriptionProfileName	string	Subscription Profile Name
SuppressedCreditAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Suppressed Credit Amount
SystemAction	string	System Action
SystemActionDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	System Action Date
SystemActionObject	string	System Action Object
SystemActionObjectKey	string	System Action Object Key
SystemActionRequestId	long	System Action Request Id
SystemActionStatus	string	System Action Status
TaskId	string	Task Id
TaxClassificationCode	string	Tax Classification Code
TaxClassificationMeaning	string	Tax Classification Meaning
TaxExemptionHandling	string	Tax Exemption Handling
TaxExemptionHandlingName	string	Tax Exemption Handling Name
TermsLayoutTemplate	string	Terms Layout Template
TotalContractValue	decimal	Total Contract Value
TransactionTypeName	string	Transaction Type Name
TrxnExtensionId	long	Transaction Extension Id
UsageCreditedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Usage Credited Amount
UsageInvoicedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Usage Invoiced Amount

Name	Type	Description
UsageSuppressedCreditAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	usage Suppressed Credit Amount
ValidationStatus	string	Validation Status
VersionDescription	string	Version Description
WareHouseName	string	Warehouse
WarehouseId	long	Warehouse
WireNumber	string	Wire Number
flexFields	*Subscription Descriptive Flexfield*	Subscription Flex Fields
parties	*Subscription Party*	Subscription Parties
products	*Subscription Product*	Subscription Products

Subscription Bill Adjustment

Bill Line Adjustments View Object

QName: {http://xmlns.oracle.com/apps/subscriptions/subscriptionManagement/subscriptionService/}BillLineAdjustments

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Bill Line*
Handled by	*Subscription*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdjustmentAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Adjustment Amount
AdjustmentBasis	string	Adjustment Basis
AdjustmentCategoryCode	string	Adjustment Category Code
AdjustmentName	string	Adjustment Name
AdjustmentStepSequenceNumber	decimal	Adjustment Step Sequence Number
AdjustmentType	string	Adjustment Type
AdjustmentValue	decimal	Adjustment Value
AutoAdjustmentFlag	boolean	Auto Adjustment Flag
BillAdjustmentId	long	Bill Adjustment Id • Primary Key
BillAdjustmentPuid	string	Bill Adjustment Puid
BillLineId	long	Bill Line Id
ChargeAdjustmentId	long	Charge Adjustment Id
ChargeAdjustmentPuid	string	Charge Adjustment Puid
ChargeKey	string	Charge Key
CreatedBy	string	Created By
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Creation Date
EffectiveDayFrom	decimal	Effective Date From
EffectiveDayTo	decimal	Effective Date To
EffectiveMonthFrom	decimal	Effective Month From
EffectiveMonthTo	decimal	Effective Month To

Name	Type	Description
Effectivity	string	Adjustment Effectivity
IsStatusNotDraft	string	Is Status Not Draft
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last Update Date
LastUpdateLogin	string	Last Update Login
LastUpdatedBy	string	Last Updated By
NumberOfPeriods	decimal	Number Of Periods
ObjectVersionNumber	int	Object Version Number
PERPeriodFlag	boolean	Per Period Flag
PERQuantityFlag	boolean	Per Quantity Flag
PeriodFrom	decimal	Period From
PeriodUntil	decimal	Period Until
Reason	string	Adjustment Reason
RevenueAdjustmentFromDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Revenue Adjustment From Date
RevenueAdjustmentToDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Revenue Adjustment To Date
RevenueOption	string	Revenue Option
RevenuePeriod	string	Revenue Period
SequenceNumber	decimal	Sequence Number
SubscriptionId	long	Subscription Id
SubscriptionProductId	long	Subscription Product Id

Name	Type	Description
ValidFrom	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Valid From
ValidUntil	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Valid Until

Subscription Bill Lines

Eligible Bill Lines View Object

QName: {http://xmlns.oracle.com/apps/subscriptions/subscriptionManagement/subscriptionIntegrationService/}EligibleBillLines

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Sales Credit*
Contains	*Subscription Bill Lines*
Handled by	*Subscription*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountingRuleDuration	long	Accounting Rule Duration
Amount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Ammount
AssetPUID	string	Asset PUID
BatchSourceName	string	Batch Source Name
BillLineId	long	BillLines Id

Name	Type	Description
		• Primary Key
BillLinePUID	string	Bill PUID
BillingScheduleNumber	long	Billing Schedule Number
ConversionDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Conversion Date
ConversionRate	long	Conversion Rate
ConversionType	string	Conversion Type
CreditMethodForAccountRule	string	Credit Method For Account
CurrencyCode	string	Currency Code
CustomerTrxTypeName	string	Customer txn Type Name
Description	string	Invoice Message
EligibleBillLinesExt	*Subscription Bill Lines*	Extensible Fields Record
EligibleBillLinesSalesCredits	*Sales Credit*	Sales Credits Record
InventoryItemId	long	Inventory Item Id
InvoicingRuleId	long	Invoice Rule Id
LegalEntityId	long	Legal Entity Id
LineType	string	Line Type
OrgId	long	Org ID
OrigSystemBillAddressId	long	Org System Bill Address Id
OrigSystemBillCustomerId	long	Org System Bill customer Id
OrigSystemShipPartyId	long	Org System Ship To Party Id
OrigSystemShipPartySiteId	long	Org System ShipParty Site Id

Name	Type	Description
PaymentSetId	long	Payment Set Id
PaymentTermsId	long	Payment Terms Id
PaymentTermsName	string	Payment Terms Name
ProductPUID	string	Product PUID
PurchaseOrder	string	Purchase Order
Quantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	Product Quantity
ReceiptMethodName	string	Receopt Method Name
ReferenceLineId	long	Reference Line Id
RevenueLineNumber	long	Revenue Line Number
RuleEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Rule End Date
RuleStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Rule Start Date
SalesOrder	string	Sales Order Name
SubscriptionNumber	string	Subscription Number
SubscriptionProductNumber	string	Subscription Product Number
TaxCode	string	Tax Code
TaxExempt	string	Tax Ememption
TaxExemptNumber	string	Tax Exempt Number
TaxExemptReasonCode	string	Tax Exempt Reason Code
TrxClass	string	Trx Class

Name	Type	Description
TrxDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Trx Date
UOMCode	string	UOM Code

Subscription Bill Lines

Extensible View Object

QName: {http://xmlns.oracle.com/apps/subscriptions/subscriptionManagement/subscriptionIntegrationService/}EligibleBillLinesExt

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Subscription Bill Lines*
Contained by	*Sales Credit*
Handled by	*Subscription*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributeName	string	Attribute Name • Primary Key
AttributeValue	string	Attribute Value
BillLineId	long	Bill Line Id
ResourceSalesrepId	long	SalesRep Id

Subscription Charge Adjustment

Charge Adjustments View Object

QName: {http://xmlns.oracle.com/apps/subscriptions/subscriptionManagement/subscriptionService/}ChargeAdjustments

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Charge*
Handled by	*Subscription*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdjustmentBasis	string	Adjustment Basis
AdjustmentCategoryCode	string	Adjustment Category Code
AdjustmentCurrency	string	Adjustment Currency
AdjustmentName	string	Adjustment Name
AdjustmentPricingError	string	Adjustment Pricing Error
AdjustmentStepSequenceNumber	decimal	Adjustment Step Sequence Number
AdjustmentType	string	Adjustment Type
AdjustmentValue	decimal	Adjustment Value
AutoAdjustmentFlag	boolean	Auto Adjustment Flag
BasisEnableFlag	boolean	Basis Enable Flag

Name	Type	Description
ChargeAdjustmentId	long	Charge Adjustment Id • Primary Key
ChargeAdjustmentPuid	string	Charge Adjustment Puid
ChargeDefinition	string	Charge Definition
ChargeExternalKey	string	Charge External Key
ChargeId	long	Charge Id
ChargeParentEntity	string	Charge Parent Entity
ChargeParentEntityId	long	Charge Parent Entity Id
ChargeRollupFlag	boolean	Charge Rollup Flag
CreatedBy	string	Created By
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Creation Date
EffectiveDayFrom	decimal	Effective Day From
EffectiveDayTo	decimal	Effective Day To
EffectiveMonthFrom	decimal	Effective Month From
EffectiveMonthTo	decimal	Effective Month To
Effectivity	string	Adjustment Effectivity
IsEditableFlag	boolean	Is Editable Flag
IsStatusNotDraft	string	Is Status Not Draft
IsUserCreated	string	Is User Created
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last Update Date

Name	Type	Description
LastUpdateLogin	string	Last Update Login
LastUpdatedBy	string	Last Updated By
NumberOfPeriods	decimal	Number Of Periods
ObjectVersionNumber	int	Object Version Number
PeriodFrom	decimal	Period From
PeriodUntil	decimal	Period Until
PricePeriodicity	string	Price Periodicity
Reason	string	Adjustment Reason
SequenceNumber	int	Sequence Number
SubscriptionId	long	Subscription Id
SubscriptionProductId	long	Subscription Product Id
UsageUnitOfMeasure	string	Usage Unit of Measure
ValidFrom	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Valid From
ValidUntil	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Valid Until
VersionType	string	Version Type
chargePriceType	string	Charge Price Type

Subscription Charge Tier

Charge Tiers View Object

QName: {http://xmlns.oracle.com/apps/subscriptions/subscriptionManagement/subscriptionService/}ChargeTiers

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Charge*
Handled by	*Subscription*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalNumberFive	decimal	Additional Number FIve
AdditionalNumberFour	decimal	Additional Number Four
AdditionalNumberOne	decimal	Additional Number One
AdditionalNumberSix	decimal	Additional Number Six
AdditionalNumberThree	decimal	Additional Number Three
AdditionalNumberTwo	decimal	Additional Number Two
AdditionalTextOne	string	Additional Text One
AdditionalTextTwo	string	Additional Text Two
AdditionalTimestampOne	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Additional TImestamp One
AdditionalTimestampThree	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Additional Timestamp Three
AdditionalTimestampTwo	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Additional TImestamp Two
AddtionalTextThree	string	Additional Text Three
BlockSize	decimal	Block Size

Name	Type	Description
ChargeId	long	Charge Id
ChargeTierId	long	Charge Tier Id • Primary Key
ChargeTierPuid	string	Charge Tier Puid
CreatedBy	string	Created By
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Creation Date
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last Update Date
LastUpdateLogin	string	Last Update Login
LastUpdatedBy	string	Last Updated By
ListPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	List Price
ObjectVersionNumber	int	Object Version Number
PriceFormat	string	Price Format
SequenceNumber	decimal	Sequence Number
SourceObjectId	long	Source Object Id
SubscriptionId	long	Subscription Id
SubscriptionProductId	long	Subscription Product Id
TierFrom	decimal	Tier From
TierTo	decimal	Tier To

Subscription Descriptive Flexfield

Subscription Flexfields View Object

QName: {http://xmlns.oracle.com/apps/flex/subscriptions/subscriptionManagement/subscriptionFlex/}SubscriptionsDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Subscription*
Handled by	*Subscription*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
SubscriptionId	long	Subscription Header Flexfield ID. • Primary Key
_FLEX_NumOfSegments	int	Descriptive Flexfield: number of segments.
__FLEX_Context	string	Descriptive Flexfield: structure definition of the user descriptive flexfield.
__FLEX_Context_DisplayValue	string	Descriptive Flexfield: display name for structure definition of the user descriptive flexfield.

Subscription Party

Subscription Parties View Object

QName: {http://xmlns.oracle.com/apps/subscriptions/subscriptionManagement/subscriptionService/}Parties

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Subscription*
Handled by	*Subscription*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Created By
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Creation Date
InternalFlag	boolean	Internal Flag
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last Update Date
LastUpdateLogin	string	Last Update Login
LastUpdatedBy	string	Last Updated By
ObjectVersionNumber	int	Object Version Number
PartyId	long	Party Id
PartyPuid	string	Party Puid
PartyRole	string	Party Role
PrimaryFlag	boolean	Primary Flag
SignedBy	string	Signed By
SignedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Signed Date

Name	Type	Description
SignerRole	string	Signer Role
SubscriptionId	long	Subscription Id
SubscriptionPartyId	long	Subscription Party Id • Primary Key
VersionType	string	Version Type

Subscription Product

Subscription Products View Object

QName: {http://xmlns.oracle.com/apps/subscriptions/subscriptionManagement/subscriptionService/}Products

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Subscription Product Descriptive Flexfield*
Contains	*Charge*
Contains	*Bill Line*
Contained by	*Subscription*
Handled by	*Subscription*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountingRuleId	long	Accounting Rule Id

Name	Type	Description
AccountingRuleName	string	Accounting Rule Name
AmendCreditMethod	string	Amend Credit Method
AmendCreditMethodName	string	Amend Credit Method Name
AmendDescription	string	Amend Description
AmendEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Amend Effective Date
AmendReason	string	Amend Reason
AmendReasonName	string	Amend Reason Name
AsyncFlag	boolean	Async Flag
BalanceFirstPartialPeriodOption	string	Option to follow for balance management for First Partial Period.
BalanceLastPartialPeriodOption	string	Option to follow for balance management for Last Partial Period.
BalanceTerminatedPartialPeriodOption	string	Option to follow for balance management for Terminated Partial Period.
BatchTag	string	Batch Tag
BillOnDay	decimal	Bill On Day
BillOnDayUsed	decimal	Bill On Day Used
BillToAccountDescription	string	Bill To Account Description
BillToAccountId	long	Bill To Account Id
BillToAccountNumber	string	Bill To Account Number
BillToAddress	string	Bill To Address
BillToContactId	long	Bill-to Contact
BillToContactName	string	Bill-to Contact

Name	Type	Description
BillToContactNumber	string	Bill-to Contact
BillToParty	string	Bill To Party
BillToPartyId	long	Bill-to Customer
BillToPartyName	string	Bill-to Contact
BillToSite	string	Bill To Site
BillToSiteUseId	long	Bill To Site Use Id
BillingDateCode	string	Billing Date Code
BillingDateCodeUsed	string	Billing Date Code Used
BillingDateName	string	Billing Date Name
BillingFrequency	string	Billing Frequency
BillingFrequencyName	string	Billing Frequency Name
BillingFrequencyUsed	string	Billing Frequency Used
BillingOffsetDays	int	Billing Offset Days
BillingOffsetDaysUsed	int	Billing Offset Days Used
CalculatedCreditAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Calculated Credit Amount
CancelReason	string	Cancel Reason
CancelSetId	long	Cancel Set Id
CanceledAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Canceled Amount
CanceledDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Canceled Date
CloseCreditMethod	string	Close Credit Method

Name	Type	Description
CloseReason	string	Close Reason
CloseSetId	long	Close Set Id
ClosedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Closed Amount
ClosedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Closed Date
CodeUOM	string	Code UOM
CorpCurrencyCode	string	Corp Currency Code
CoverageScheduleId	long	Coverage Scheduled
CreatedBy	string	Created By
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Creation Date
CreditedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Credited Amount
CurcyConvRateType	string	Currency Conversion Rate Type
Currency	string	Product Currency
CurrencyPrecision	int	Currency Precision
DefaultRevenueAction	string	Default Revenue Action
DefinitionOrganizationId	long	Definition Organization Id
Description	string	Product Description
DocumentTypeId	long	Document Type Id
DurationQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	Duration Quantity
EnablePricingTermsFlag	boolean	Enable Pricing Terms Flag

Name	Type	Description
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	End Date
EstimatedTax	decimal	Estimated Tax
ExemptCertificateNumber	string	Exempt Certificate Number
ExemptReason	string	Exempt Reason
ExternalAssetKey	string	External Asset Key
ExternalParentAssetKey	string	External Parent Asset Key
ExternalPriceBookName	string	External Price Book Name
ExternalPriceListId	string	External Price List Id
ExternalRootAssetKey	string	External Root Asset Key
GenBillSchReqdFlag	boolean	Generate Bill Schedule Required Flag
GenerateBillingSchedule	string	Generate Billing Schedule
GroupingRuleNumberUsed	string	Grouping Rule Number Used
InstrAssignmentId	long	Instr Assignment Id
InventoryItemId	long	Inventory Item Id
InventoryItemIdUOM	long	Inventory Item Id UOM
InvoiceList	anyType	Invoice List
InvoiceText	string	Invoice Text
InvoicedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Invoiced Amount
InvoicingRuleId	long	Invoicing Rule Id
InvoicingRuleIdUsed	long	Invoicing Rule Id Used

Name	Type	Description
InvoicingRuleName	string	Invoicing Rule Name
IsProductCreatedFromAmendFlag	boolean	Is Product Created From Amend Flag
ItemNumber	string	Item Number
ItemUnitOfMeasure	string	Item Unit Of Measure
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Last Update Date
LastUpdateLogin	string	Last Update Login
LastUpdatedBy	string	Last Updated By
LineNumber	string	Line Number
MilestoneBasedChargeFlag	boolean	Milestone Based Charge Flag
MonthlyRecurringRevenue	decimal	Monthly Recurring Revenue
NextBillStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Next Bill Start Date
NextPricingDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Next Pricing Date
ObjectVersionNumber	int	Object Version Number
OganizationIdUOM	long	Organization Id UOM
OldStatus	string	Old Status
OnetimeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Ont time Amount
OrderFulfillLineId	long	Order Fulfill Line Id
OrderFulfillLineNumber	int	Order Fulfill Line Number
OrganizationId	long	Organization Id

Name	Type	Description
OutputTaxClassification	string	Output Tax Classification
OverrideCreditAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Override Credit Amount
OverridePricelistFlag	boolean	Override Pricelist Flag
PONumber	string	PO Number
PaymentMethod	string	Payment Method
PaymentMethodName	string	Payment Method Name
PaymentTermsId	long	Payment Terms Id
PaymentTermsName	string	Payment Terms Name
Period	string	Product Period
PerpetualFlag	boolean	Perpetual Flag
PrePaymentNumber	long	Pre Payment Number
PriceAsOf	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Price As Of
PriceDuringBillingFlag	boolean	Price During Billing Flag
PriceItemQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	Price Item Quantity
PriceItemUOM	string	Price Item UOM
PriceListId	long	Price List Id
PriceListName	string	Price List Name
PriceTransactionOn	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Price Transaction On
PriceUOM	string	Price UOM
PriceUnitOfMeasure	string	Price Unit Of Measure

Name	Type	Description
PricingError	string	Pricing Error
PricingTermsAdjustmentPCT	decimal	Pricing Terms Adjustment PCT
PricingTermsDuration	decimal	Pricing Terms Duration
PricingTermsPeriod	string	Pricing Terms Period
PricingTermsPricingMethod	string	Pricing Terms Pricing Method
PricingTermsStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Pricing Terms Start Date
PricingTermsType	string	Pricing Terms Type
ProductFiscClassification	string	Product Fisc Classification
ProductName	string	Product Name
ProductTotal	decimal	Product Total
ProductType	string	Product Type
Quantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	Product Quantity
RecurringAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Recurring Amount
Relationships	*oracle.apps.subscriptions.subscriptionManageme*	Product Relationships
RenewPerpetuallyFlag	boolean	Renew Perpetually Flag
RenewalDuration	long	Renewal Duration
RenewalDurationPeriod	string	Renewal Duration Period
RenewalDurationPeriodName	string	Renewal Duration Period Name
RenewalPaymentMethodName	string	Renewal Payment Method Name
RenewalType	string	Renewal Type

Name	Type	Description
RenewedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Renewed Date
RetainSubsOnRenewFlag	boolean	Retain Subs On Renew Flag
RevenueOption	string	Revenue Option
SalesOrderId	long	Sales Order Id
SalesOrderLineNumber	string	Sales Order Line Number
SalesOrderNumber	string	Sales Order Number
SalesProductType	string	Sales Product Type
ShipToAccountDescription	string	Ship-to Account Description
ShipToAccountId	long	Ship-to Account
ShipToAccountNumber	string	Ship-to Account
ShipToContactId	long	Ship-to Contact
ShipToContactName	string	Ship-to Contact
ShipToContactNumber	string	Ship-to Contact
ShipToContactPartyId	long	Ship-to Contact
ShipToPartyId	long	Ship To Party Id
ShipToPartyName	string	Ship To Party Name
ShipToPartySiteId	long	Ship To Party Site Id
ShipToPartySiteName	string	Ship To Party Site Name
SourceKey	string	Source Key
SourceLineKey	string	Source Line Key

Name	Type	Description
SourceLineNumber	string	Source Line Number
SourceNumber	string	Source Number
SourceSystem	string	Source System
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Start Date
Status	string	Product Status
StatusLookupCode	string	Status Lookup Code
StatusLookupType	string	Status Lookup Type
StatusMeaning	string	Status Meaning
SubscriptionId	long	Subscription Id
SubscriptionNumber	string	Subscription Number
SubscriptionProductId	long	Subscription Product Id • Primary Key
SubscriptionProductPuid	string	Subscription Product Puid
SummarizedBillingFlag	boolean	Summarized Billing Flag
SuppressedCreditAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Suppressed Credit Amount
TaxClassificationMeaning	string	Tax Classification Meaning
TaxError	string	Tax Error
TaxExemptionHandling	string	Tax Exemption Handling
TaxExemptionHandlingName	string	Tax Exemption Handling Name
TotalContractValue	decimal	Total Contract Value
TransactionTypeName	string	Transaction Type Name

Name	Type	Description
TrxBusinessCategory	string	Trx Business Category
TrxnExtensionId	long	Trxn Extension Id
UnitPrice	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Unit Price
UpfrontBillingPeriod	string	Indicates date to be considered for billing the first bill when upfront billing is selected.
UpfrontBillingPeriodName	string	Indicates date to be considered for billing the first bill when upfront billing is selected.
UpfrontBillingTrigger	string	Indicates term to be considered for billing the first bill when upfront billing is selected.
UpfrontBillingTriggerName	string	Indicates term to be considered for billing the first bill when upfront billing is selected.
UsageCreditedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Usage Credited Amount
UsageInvoicedAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Usage Invoiced Amount
UsageSuppressedCreditAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Usage Suppressed Credit Amount
ValidationStatus	string	Validation Status
VersionType	string	Version Type
WareHouseName	string	Warehouse
WarehouseId	long	Warehouse
WireNumber	string	Wire Number
billLines	*Bill Line*	Product Bill Lines
charges	*Charge*	Product Charges
flexFields	*Subscription Product Descriptive Flexfield*	Product Flex Fields

Name	Type	Description

Subscription Product Descriptive Flexfield

Subscription Product Flexfields View Object

QName: {http://xmlns.oracle.com/apps/flex/subscriptions/subscriptionManagement/subscriptionProductFlex/}ProductsDFF

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Subscription Product*
Handled by	*Subscription*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
SubscriptionProductId	long	Subscription Product Flexfield ID. • Primary Key
_FLEX_NumOfSegments	int	Descriptive Flexfield: number of segments.
__FLEX_Context	string	Descriptive Flexfield: structure definition of the user descriptive flexfield.
__FLEX_Context_DisplayValue	string	Descriptive Flexfield: display name for structure definition of the user descriptive flexfield.

Trading Community Classification

A categorization of trading community members based on any criterion. For example, Dell is a high technology company and Larry is a high net worth person.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/classificationService/applicationModule/}ClassificationService

Service WSDL URL: https://servername/crmService/FoundationClassificationService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Classification

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Classification Category*
Handles	*Trading Community Category Use*

Operations

- *getClassCategory*
- *createClassCategory*
- *updateClassCategory*
- *deleteClassCategory*
- *mergeClassCategory*
- *findClassCategory*
- *processClassCategory*
- *processCSClassCategory*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getClassCategory

The Get operation for the trading community classification category.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
classCategory	string	The class category that belongs to the group. For example, Public classifications such as US SIC, NACE, NAICS or custom classes.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/classificationService/}ClassCategoryResult	The trading community classification category that matches the inbound key attributes.

createClassCategory

The Create operation for the trading community classification category.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
classCategory	*Trading Community Classification Category*	The trading community classification category to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/classificationService/}ClassCategoryResult	The result of the operation that includes the successfully created trading community classification category and a list of warning or information messages.

updateClassCategory

The Update operation for the trading community classification category.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
classCategory	*Trading Community Classification Category*	The trading community classification category to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/classificationService/}ClassCategoryResult	The result of the operation that includes the successfully updated trading community classification category and a list of warning or information messages.

deleteClassCategory

The Delete operation for the trading community classification category.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
classCategory	*Trading Community Classification Category*	The trading community classification category to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergeClassCategory

The Merge operation for the trading community classification category. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
classCategory	*Trading Community Classification Category*	The trading community classification category to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/classificationService/}ClassCategoryResult	The result of the operation that includes the successfully merged trading community classification category and a list of warning or information messages.

findClassCategory

The Find operation for the trading community classification category.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Trading Community Classification Category*	The result of the operation that includes a list of trading community classification categories that satisfy the inbound criteria and any warning or information messages.

processClassCategory

The Bulk Load operation for the trading community classification category.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action to perform, such as create, update, merge, or delete.
classCategory	*Trading Community Classification Category*	A list of trading community classification category to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Trading Community Classification Category*	The result of the operation that includes a list of trading community classification categories that were successfully processed and any warning or information messages.

processCSClassCategory

An operation to apply the changes back to the data source for trading community classification category.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object to represent the changes.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created and updated data objects, and all warning and information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList o the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name; an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used to evaluate the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined for this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for the service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getClassCategory	HZ_MANAGE_TRADING_COMMUNITY_CLASSIFICATION_CATEGORY_PRIV	Manage Trading Community Classification Category	Allows the specification of classification categories used to classify or group organizations and persons in your business community. The classification model lets you record complex, real-life categories in which entities can be grouped, such as industry classification.
processCSClassCategory	HZ_MANAGE_TRADING_COMMUNITY_CLASSIFICATION_CATEGORY_PRIV	Manage Trading Community Classification Category	Allows the specification of classification categories used to classify or group organizations and persons in your business community. The classification model lets you record complex, real-life categories in which entities can be grouped, such as industry classification.
findClassCategory	HZ_MANAGE_TRADING_COMMUNITY_CLASSIFICATION_CATEGORY_PRIV	Manage Trading Community Classification Category	Allows the specification of classification categories used to classify or group organizations and persons in your business community. The classification model lets you record complex, real-life categories in which entities can be grouped, such as industry classification.

Operation Name	Privilege Code	Privilege Name	Privilege Description
mergeClassCategory	HZ_MANAGE_TRADING_COMMUNITY_CLASSIFICATION_CATEGORY_PRIV	Manage Trading Community Classification Category	Allows the specification of classification categories used to classify or group organizations and persons in your business community. The classification model lets you record complex, real-life categories in which entities can be grouped, such as industry classification.
deleteClassCategory	HZ_MANAGE_TRADING_COMMUNITY_CLASSIFICATION_CATEGORY_PRIV	Manage Trading Community Classification Category	Allows the specification of classification categories used to classify or group organizations and persons in your business community. The classification model lets you record complex, real-life categories in which entities can be grouped, such as industry classification.
updateClassCategory	HZ_MANAGE_TRADING_COMMUNITY_CLASSIFICATION_CATEGORY_PRIV	Manage Trading Community Classification Category	Allows the specification of classification categories used to classify or group organizations and persons in your business community. The classification model lets you record complex, real-life categories in which entities can be grouped, such as industry classification.
createClassCategory	HZ_MANAGE_TRADING_COMMUNITY_CLASSIFICATION_CATEGORY_PRIV	Manage Trading Community Classification Category	Allows the specification of classification categories used to classify or group organizations and persons in your business community. The classification model lets you record complex, real-life categories in which entities can be grouped, such as industry classification.
processClassCategory	HZ_MANAGE_TRADING_COMMUNITY_CLASSIFICATION_CATEGORY_PRIV	Manage Trading Community Classification Category	Allows the specification of classification categories used to classify or group organizations and persons in your business community. The classification model lets you record complex, real-life categories in which entities can be grouped, such as industry classification.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_CLASSIFICATION_CATEGORY_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
HZ_MANAGE_TRADING_COMMUNITY_CLASSIFICATION_CATEGORY_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_MANAGE_TRADING_COMMUNITY_CLASSIFICATION_CATEGORY_PRIV	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
HZ_MANAGE_TRADING_COMMUNITY_CLASSIFICATION_CATEGORY_PRIV	ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	Channel Administrator	Executes Oracle Partnership Management setup tasks.
HZ_MANAGE_TRADING_COMMUNITY_CLASSIFICATION_CATEGORY_PRIV	ORA_ZX_TAX_ADMINISTRATION_DUTY_CRM	Tax Administration	Sets up transaction tax content including regime to rate configuration, rules, tax determinants, configuration options and party tax profiles.
HZ_MANAGE_TRADING_COMMUNITY_CLASSIFICATION_CATEGORY_PRIV	ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	Channel Partner Portal Administrator	Maintains customer-specific changes of all partner portal pages, external, internal, and anonymous pages.
HZ_MANAGE_TRADING_COMMUNITY_CLASSIFICATION_CATEGORY_PRIV	ORA_ZX_WHT_ADMINISTRATION_DUTY_CRM	Withholding Tax Administration	Sets up withholding tax content including regime to rate configuration, rules, tax determinants, configuration options and party tax profiles.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZX_TAX_ADMINISTRATION_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_UTILIZATION_DUTY	MDF Utilization	Creates and manages MDF requests and claims for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_PARTNER_ADMINISTRATION_DUTY	Opportunity Partner Administration	Administers all aspects of the application, including some setup. This role is for partner administrators.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ADMINISTRATOR_DASHBOARD_DUTY	Partner Administrator Dashboard	Executes transactional items within the partner dashboard when belongs to an approved partner organization. This role is for an administrator.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_MANAGMENT_AS_PARTNER_DUTY	Partner Management as Partner Administrator	Manages the partner account for their partner organization, including managing members, users, and profile information. This role is for the partner administrator.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_EXPORT_MANAGEMENT_DUTY	Quota Export Management	Manages bulk export of all sales territory quota related objects.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_QUOTA_MANAGEMENT_SETUP_DUTY	Quota Management Setup	Manages sales territory quota setup, quota plans, prediction and spread formula parameters, and seasonality groups. Runs sales territory quota synchronization and sales quota plan activation and completion processes. Additional duties include party information inquiry.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZPM_SALES_CHANGE_HISTORY_INQUIRY_DUTY_FOR_CHANNEL_SALES	Sales Change History Inquiry for Channel Sales	View change history of marketing and partner business objects for members within the channel sales organization.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZX_TAX_ADMINISTRATION_DUTY_CRM	ORA_POZ_SUPPLIER_PROFILE_INQUIRY_DUTY_CRM	Supplier Profile Inquiry	View supplier profile information.
ORA_ZX_WHT_ADMINISTRATION_DUTY_CRM	ORA_POZ_SUPPLIER_PROFILE_INQUIRY_DUTY_CRM	Supplier Profile Inquiry	View supplier profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	ORA_MOT_TERRITORY_MANAGEMENT_T2P_MIGRATION_DUTY	Territory Management T2P Migration	Manages sales territory export and import. Provides users with the ability to export territory data from a test environment and import into production.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZPM_CHANNEL_PARTNER_PORTAL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZPM_CHANNEL_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Trading Community Category Use

Rules that stipulate how a classification category can be used to classify any object.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/classificationService/}ClassCategoryUse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Classification Category*
Handled by	*Trading Community Classification*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalWhereClause	string	Helps restrict the set of instances in the owner table from which the classification will apply.

Name	Type	Description
ClassCategory	string	Public classifications such as US SIC, NACE, NAICS or custom classes. • Primary Key
ColumnName	string	Column from the OWNER_TABLE that applies to classification. For example, HZ_PARTIES.PARTY_ID.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerTable	string	Table that the classification will apply to. For example, the HZ_PARTIES table. • Primary Key

Trading Community Classification Category

The classification category or scheme that can be used to classify trading community members.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/classificationService/}ClassCategory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Category Use*
Handled by	*Trading Community Classification*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AllowLeafNodeOnlyFlag	boolean	Y or N indicates whether or not the instances of those entities associated with this particular CLASS_CATEGORY can only be assigned to leaf node class codes of that particular CLASS_CATEGORY.
AllowMultiAssignFlag	boolean	Y or N indicates whether codes under this category can be assigned to an object more than once or not.
ClassCategory	string	Class category that belongs to the group. For example, public classifications such as US SIC, NACE, NAICS or custom classes. • Primary Key
ClassCategoryDescription	string	Description of the classification category.
ClassCategoryMeaning	string	Descriptive name for the classification category.
ClassCategoryUse	*Trading Community Category Use*	The purpose for which the classification category will be used.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
LkupTypeOwnerId	long	Identifies the owner of the class category.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Trading Community Customer Account

A financial arrangement that a person or organization has with deploying company to buy products and services. For example, John buys an account at Amazon and Dell buys an account at Oracle.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/applicationModule/}CustomerAccountService

Service WSDL URL: https://servername/crmService/CustomerAccountService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Customer Account

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Customer Account Site Use Additional Information*
Handles	*Trading Community Customer Account or Site Role Responsibility Additional Information*
Handles	*Trading Community Customer Account Site*

Relationship Type	Object or Service
Handles	*Trading Community Customer Account or Site Role Additional Information*
Handles	*Trading Community Original System Mapping Identifier Additional Information*
Handles	*Source System Reference*
Handles	*Trading Community Customer Account Site Use*
Handles	*Trading Community Customer Account SDO Additional Information*
Handles	*Trading Community Customer Account or Site Role*
Handles	*Trading Community Customer Billing Account Site Global Descriptive Flexfield SDO*
Handles	*Trading Community Customer Account Relationship*
Handles	*Trading Community Customer Billing Account Global Descriptive Flexfield Object*
Handles	*Trading Community Customer Billing Account*
Handles	*Trading Community Customer Account Relationship Additional Information*
Handles	*Trading Community Customer Account Site Additional Information*
Handles	*Trading Community Customer Account or Site Role Responsibility*

Operations

- *getCustomerAccount*
- *createCustomerAccount*
- *updateCustomerAccount*
- *deleteCustomerAccount*
- *mergeCustomerAccount*
- *findCustomerAccount*
- *getCustomerAccountByOriginalSystemReference*
- *processCustomerAccount*
- *processCSCustomerAccount*
- *getCustomerAccountSiteUseByKey*
- *findCustomerAccountSiteUse*

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getCustomerAccount

The Get operation for the trading community customer account SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
customerAccountId	long	The unique identifier of the account created for a party.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/}CustomerAccountRes	The trading community customer account SDO that matches the inbound key attributes.

createCustomerAccount

The Create operation for the trading community customer account SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
customerAccount	*Trading Community Customer Billing Account*	The Trading Community Customer Account SDO to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/}CustomerAccountRes	The result of the operation that includes the successfully created trading community customer account SDO and a list of warning or information messages.

updateCustomerAccount

The Update operation for the trading community customer account SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
customerAccount	*Trading Community Customer Billing Account*	The Trading Community Customer Account SDO to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/}CustomerAccountRes	The result of the operation that includes the successfully updated trading community customer account SDO and a list of warning or information messages.

deleteCustomerAccount

The Delete operation for the trading community customer account SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
customerAccount	*Trading Community Customer Billing Account*	The Trading Community Customer Account SDO to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergeCustomerAccount

The Merge operation for the trading community customer account SDO. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
customerAccount	*Trading Community Customer Billing Account*	The Trading Community Customer Account SDO to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/}CustomerAccountRes	The result of the operation that includes the successfully merged trading community customer account SDO and a list of warning or information messages.

findCustomerAccount

The Find operation for the trading community customer account SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Trading Community Customer Billing Account*	The result of the operation that includes a list of trading community customer account SDO that satisfy the inbound criteria and any warning or information messages.

getCustomerAccountByOriginalSystemReference

The Get operation for trading community customer account filtered by the source system reference.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindOrigSystem	string	The unique code of the original system.
bindOrigSystemReference	string	The unique identifier of the original system reference.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/}CustomerAccountRes	The result of the operation that includes a list of Trading Community Classification Category for the given the source system reference that are successfully processed and any warning or information messages.

processCustomerAccount

The Bulk load operation for the trading community customer account SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what actions were performed, such as Create, Update, Merge, or Delete.
customerAccount	*Trading Community Customer Billing Account*	A list of trading community customer account SDOs to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Trading Community Customer Billing Account*	The result of the operation that includes a list of trading community customer account SDO that are successfully processed and any warning or information messages.

processCSCustomerAccount

An operation to apply the changes back to the data source for the trading community customer account SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object used to represent the changes that were made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created/updated data objects, and all warning and informational messages.

getCustomerAccountSiteUseByKey

The Get operation for trading community customer account site use.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
siteUseId	long	The unique identifier of the site.

Response Payload

Element Name	Type	Description
result	*Trading Community Customer Account Site Use*	The trading community customer account site use that matches the inbound key attributes.

findCustomerAccountSiteUse

The Find operation for trading community customer account site use.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Trading Community Customer Account Site Use*	A list of trading community customer account sites that satisfy the inbound criteria.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.

Element Name	Type	Description
localeName	string	The locale used when evaluating the locale-based user interface hints. The localeName is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and The Delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getCustomerAccountSiteUseByKey	HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	View Customer Account	Allows the viewing of customer account information.
getCustomerAccount	HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	View Customer Account	Allows the viewing of customer account information.
findCustomerAccountSiteUse	HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	View Customer Account	Allows the viewing of customer account information.
findCustomerAccount	HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	View Customer Account	Allows the viewing of customer account information.
createCustomerAccount	HZ_ENTER_CUSTOMER_ACCOUNT_PRIV	Enter Customer Account	Allows the update of customer account information. If assigning, also assign the ability to view the customer account.
processCustomerAccount	HZ_UPDATE_CUSTOMER_ACCOUNT_PRIV	Update Customer Account	Allows the update of customer account information. If assigning, also assign the ability to view the customer account.
processCustomerAccount	HZ_ENTER_CUSTOMER_ACCOUNT_PRIV	Enter Customer Account	Allows the update of customer account information. If assigning, also assign the ability to view the customer account.
getCustomerAccountByOriginalSyst	HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	View Customer Account	Allows the viewing of customer account information.
processCSCustomerAccount	HZ_UPDATE_CUSTOMER_ACCOUNT_PRIV	Update Customer Account	Allows the update of customer account information. If assigning, also assign the ability to view the customer account.
processCSCustomerAccount	HZ_ENTER_CUSTOMER_ACCOUNT_PRIV	Enter Customer Account	Allows the update of customer account information. If assigning, also assign the ability to view the customer account.
deleteCustomerAccount	HZ_REMOVE_CUSTOMER_ACCOUNT_PRIV	Remove Customer Account	Allows the removal of customer accounts. If assigning, also assign

Operation Name	Privilege Code	Privilege Name	Privilege Description
			the ability to view the customer account.
mergeCustomerAccount	HZ_UPDATE_CUSTOMER_ACCOUNT_PRIV	Update Customer Account	Allows the update of customer account information. If assigning, also assign the ability to view the customer account.
mergeCustomerAccount	HZ_ENTER_CUSTOMER_ACCOUNT_PRIV	Enter Customer Account	Allows the update of customer account information. If assigning, also assign the ability to view the customer account.
updateCustomerAccount	HZ_UPDATE_CUSTOMER_ACCOUNT_PRIV	Update Customer Account	Allows the update of customer account information. If assigning, also assign the ability to view the customer account.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_UPDATE_CUSTOMER_ACCOUNT_PRIV	ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	Customer Maintenance Segregated	Maintains customer related data except the creation and management of customers.
HZ_UPDATE_CUSTOMER_ACCOUNT_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_UPDATE_CUSTOMER_ACCOUNT_PRIV	ORA_IEX_COLLECTIONS_AGENT_DUTY_CRM	Collections Management Basic	Allows user to perform activities in Collections.
HZ_UPDATE_CUSTOMER_ACCOUNT_PRIV	ORA_FUN_INTERCO_TRANSACTION_ENTRY_DUTY_CRM	Intercompany Transactions Entry	Create, update, approve, reject intercompany transactions and batches.
HZ_UPDATE_CUSTOMER_ACCOUNT_PRIV	ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	Customer Maintenance	Defines and maintains Receivables attributes of customer accounts and customer account sites.
HZ_UPDATE_CUSTOMER_ACCOUNT_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_UPDATE_CUSTOMER_ACCOUNT_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			identification, and duplicate resolution.
HZ_REMOVE_CUSTOMER_ACCOUNT_PRIV	ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	Customer Maintenance Segregated	Maintains customer related data except the creation and management of customers.
HZ_REMOVE_CUSTOMER_ACCOUNT_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_REMOVE_CUSTOMER_ACCOUNT_PRIV	ORA_IEX_COLLECTIONS_AGENT_DUTY_CRM	Collections Management Basic	Allows user to perform activities in Collections.
HZ_REMOVE_CUSTOMER_ACCOUNT_PRIV	ORA_FUN_INTERCO_TRANSACTION_ENTRY_DUTY_CRM	Intercompany Transactions Entry	Create, update, approve, reject intercompany transactions and batches.
HZ_REMOVE_CUSTOMER_ACCOUNT_PRIV	ORA_ATC_SUBSCRIPTION_ACCOUNT_ADMIN_DUTY	Subscription Account Administration	Has full administration ability to manage Subscription and Customer Accounts and Profiles.
HZ_REMOVE_CUSTOMER_ACCOUNT_PRIV	ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	Customer Maintenance	Defines and maintains Receivables attributes of customer accounts and customer account sites.
HZ_REMOVE_CUSTOMER_ACCOUNT_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_REMOVE_CUSTOMER_ACCOUNT_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_PJF_PROJECT_ADMINISTRATOR_JOB	Project Administrator	Assists the project manager with the administrative functions of a project, particularly the functions related to collecting and entering information into the project application.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_FOR_CRM_CRM	Contract View Access Across All Contracts for CRM	Views all contracts across an enterprise.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_DOO_ORCHESTRATION_ORDER_MONITORING_DUTY_CRM	Orchestration Order Monitoring	Allows access to tasks mainly related to monitoring fulfillment processing and taking action on orchestration orders.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_RCV_RECEIVING_ADMINISTRATION_DUTY_CRM	Receiving Administration	Configures receiving parameters to specify default receiving options for an inventory organization.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_ATC_SELF_SERVICE_SUBSCRIPTION_ACCOUNT_MANAGEMENT	Self-Service Subscription Account Management	Customer management of subscription services quoted, ordered, and provisioned. Manage customer profiles for service delivery and billing.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_ATC_SUBSCRIPTION_ACCOUNT_ADMIN_DUTY	Subscription Account Administration	Has full administration ability to manage Subscription and Customer Accounts and Profiles.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_PJF_PROJECT_ACCOUNTANT_JOB	Project Accountant	Manages and analyzes the collection, recording, and allocation of project costs and revenue. Ensures accurate project profit and loss calculations. Analyzes budgets and actual costs. Communicates financial performance to program managers and project executives.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_RCV_SHIPMENT_MANAGEMENT_AS_SUPPLIER_DUTY_CRM	Shipment Management Supplier-Facing	Manages inbound shipments, creates and uploads advance shipment notices and advance shipment billing notices.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_FUN_INTERCO_TRANSACTION_VIEW_DUTY_CRM	Intercompany Transaction Inquiry	Views intercompany transactions and batches.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_MSP_PLANNING_ADMINISTRATION_DUTY_CRM	Planning Administration	Configures and manages planning set up, data collection and order promising server processes.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_RCV_RECEIVING_AGENT_JOB	Receiving Agent	Performs receiving activities such as receiving expected shipment lines, inspecting received lines, correcting received lines, and managing returns.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY_CRM	Contract Management Across All Contracts Web Service	Permits an application using the CRM application ID to manage contracts across all business units.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_DOO_ORCHESTRATION_ORDER_MANAGEMENT_DUTY_CRM	Orchestration Order Management	Allows access to all tasks related to scheduling, holds management, monitoring, workbench interaction, and overall processing of orchestration orders.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_ATC_SELF_SERVICE_SUBSCRIPTION_ACCOUNT_VIEWER	Self-Service Subscription Account Viewer	Customer view of subscription services quoted, ordered, and provisioned. View customer profiles for service delivery and billing.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_EXTERNAL_DUTY	Subscription Search and View Access External	Searches and views subscriptions for the assigned business units. Duty role for a consuming team. This duty role does not have access to work area.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_PJF_PROJECT_MANAGEMENT_DUTY_ABSTRACT	Project Management Duty	Manages individual projects and is not assigned the project manager job role. Performs web service operations to create and update projects, tasks, resources, and associated attributes. Manages the integration between Oracle Fusion Project Foundation and Oracle Fusion Project Management.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_CST_COST_ACCOUNTANT_JOB	Cost Accountant	Performs cost and management accounting functions.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_OKC_GRANT_CONTRACT_SEARCH_VIEW_DUTY_CRM	Grant Contract Search and View Access	Searches and views grant contracts for the assigned business units.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_IEX_COLLECTIONS_AGENT_DUTY_CRM	Collections Management Basic	Allows user to perform activities in Collections.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_FUN_INTERCO_TRANSACTION_ENTRY_DUTY_CRM	Intercompany Transactions Entry	Create, update, approve, reject intercompany transactions and batches.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_DOS_SUPPLY_CHAIN_OPERATIONS_MANAGER_JOB	Supply Chain Operations Manager	Individual responsible for coordinating and monitoring the activities associated with executing and managing supply orders.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	Business Practices Director	Defines and manages sales or procurement contract policies and standards. Ensures all corporate contracts conform to established guidelines and best practices.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_ATC_SUBSCRIPTION_ACCOUNT_VIEWER	Subscription Account Viewer	Has the same scope of visibility as the Subscription Account Management duty, but can only view or read data.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_RCV_RECEIVING_MANAGEMENT_DUTY_CRM	Receiving Management	Manages outstanding work in the warehouse and resolves exceptions.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_ATC_SUBSCRIPTION_ACCOUNT_MANAGEMENT	Subscription Account Management	Manages subscription services quoted, ordered, and provisioned to customers. Maintains customer profiles for service delivery and billing.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_RCV_PUT_AWAY_MANAGEMENT_DUTY_CRM	Put Away Management	Performs put away of received lines into inventory or receiving.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_FOM_ORDER_ENTRY_SPECIALIST_JOB	Order Entry Specialist	Individual who is responsible for creating new orders, updating existing orders, and creating order returns.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	Grants Department Administrator	Assists the principal investigator with the administrative functions of an award and its related projects, particularly with data collection and data entry tasks for one or more departments within the enterprise.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_DOS_SUPPLY_REQUESTS_MANAGEMENT_DUTY_CRM	Supply Requests Management	Allows to create, view, manage supply requests and supply exceptions.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_DOO_ORCHESTRATION_ORDER_SCHEDULING_DUTY_CRM	Orchestration Order Scheduling	Allows access to tasks mainly related to scheduling actions on orchestration orders.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_PJF_PRINCIPAL_INVESTIGATOR_JOB	Principal Investigator	Controls and monitors the technical direction and academic quality of research projects such as laboratory studies or clinical trials. Ensures that projects comply with the terms, conditions, and policies defined by the sponsor and the institution. Owns ultimate responsibility for the management of the sponsored research award, especially in cases where funding is obtained from federal agencies such as the NIH or NSF.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_PJF_PROJECT_BILLING_SPECIALIST_JOB	Project Billing Specialist	Job role that supports the project billing related requirements in a business
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_FOS_SUPPLY_CHAIN_CONTROLLER_JOB	Supply Chain Controller	Individual responsible for providing operational controller leadership and guidance to both Finance and Supply Chain Operations leaders

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			in complex, global supply chain organizations. Responsibilities include implementation of effective global supply chain procedures and controls to ensure compliance with the legal inter-company policies the company has put in place, while ensuring goods are flowing to the customer in the most efficient manner possible.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_AR_RECEIVABLE_INQUIRY_DUTY_CRM	Receivables Inquiry	Manages the review of customer account activities where updating is not appropriate.
HZ_VIEW_CUSTOMER_ACCOUNT_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
HZ_ENTER_CUSTOMER_ACCOUNT_PRIV	ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	Customer Maintenance Segregated	Maintains customer related data except the creation and management of customers.
HZ_ENTER_CUSTOMER_ACCOUNT_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_ENTER_CUSTOMER_ACCOUNT_PRIV	ORA_IEX_COLLECTIONS_AGENT_DUTY_CRM	Collections Management Basic	Allows user to perform activities in Collections.
HZ_ENTER_CUSTOMER_ACCOUNT_PRIV	ORA_FUN_INTERCO_TRANSACTION_ENTRY_DUTY_CRM	Intercompany Transactions Entry	Create, update, approve, reject intercompany transactions and batches.
HZ_ENTER_CUSTOMER_ACCOUNT_PRIV	ORA_ATC_SUBSCRIPTION_ACCOUNT_ADMIN_DUTY	Subscription Account Administration	Has full administration ability to manage Subscription and Customer Accounts and Profiles.
HZ_ENTER_CUSTOMER_ACCOUNT_PRIV	ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	Customer Maintenance	Defines and maintains Receivables attributes of customer accounts and customer account sites.
HZ_ENTER_CUSTOMER_ACCOUNT_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_ENTER_CUSTOMER_ACCOUNT_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_ENTER_CUSTOMER_ACCOUNT_PRIV	ORA_ATC_SUBSCRIPTION_ACCOUNT_MANAGEMENT	Subscription Account Management	Manages subscription services quoted, ordered, and provisioned to customers. Maintains customer profiles for service delivery and billing.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_PJF_PRINCIPAL_INVESTIGATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_TEAM_DUTY_CRM	Contract Amendment Team	Amends approved contracts honoring team access. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_PJF_PRINCIPAL_INVESTIGATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_TEAM_DUTY_CRM	Contract Search and View Access Team	Searches and views contracts for the assigned business units by honoring team access.
ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_SALES_PARTY_REVIEW_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_FUN_INTERCO_TRANSACTION_ENTRY_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_FUN_INTERCO_TRANSACTION_VIEW_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_IBY_CUSTOMER_PAYMENT_INSTRUMENT_MANAGEMENT_DUTY_CRM	Customer Payment Instrument Management	Manages customer bank accounts and credit cards and other payment details.
ORA_FUN_INTERCO_TRANSACTION_ENTRY_DUTY_CRM	ORA_GL_GENERAL_LEDGER_REPORTING_DUTY_CRM	General Ledger Reporting	Provides access to all balances and transaction inquiry and reporting privileges for General Ledger.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	ORA_OKC_GRANT_CONTRACT_SEARCH_VIEW_DUTY_CRM	Grant Contract Search and View Access	Searches and views grant contracts for the assigned business units.
ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_DOO_ORCHESTRATION_ORDER_MANAGEMENT_DUTY_CRM	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_CST_COST_ACCOUNTANT_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_DOS_SUPPLY_CHAIN_OPERATIONS_MANAGER_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_FOS_SUPPLY_CHAIN_CONTROLLER_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY_CRM	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_FOM_ORDER_ENTRY_SPECIALIST_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_FUN_INTERCO_TRANSACTION_ENTRY_DUTY_CRM	ORA_GL_JOURNAL_ENTRY_DUTY_CRM	Journal Management	Creates journal entries and allocations.
ORA_PJF_GRANTS_DEPARTMENT_ADMINISTRATOR_JOB	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.
ORA_OKC_BUSINESS_PRACTICES_DIRECTOR_JOB	ORA_PON_NEGOTIATION_VIEWING_DUTY_CRM	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_MANAGEMENT_DUTY_CRM	ORA_PON_NEGOTIATION_VIEWING_DUTY_CRM	Negotiation Viewing	View the negotiation summary and details pages.
ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	ORA_PON_NEGOTIATION_VIEWING_DUTY_CRM	Negotiation Viewing	View the negotiation summary and details pages.
ORA_DOS_SUPPLY_CHAIN_OPERATIONS_MANAGER_JOB	ORA_DOO_ORCHESTRATION_INFRASTRUCTURE_ADMINISTRATION_DUTY_CRM	Orchestration Infrastructure Administration	Allows access to administrative pages and functions for the orchestration infrastructure elements that can be used by other applications.
ORA_DOO_ORCHESTRATION_ORDER_MANAGEMENT_DUTY_CRM	ORA_MSP_ORDER_PROMISING_MANAGEMENT_DUTY_CRM	Order Promising Management	Manages order promising activities, including the scheduling and rescheduling of order fulfillment lines, and reviews data related to promising fulfillment lines.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_ZX_REGISTRATION_PII_DUTY_CRM	Party Taxpayer Identifier PII	View personally identifiable information for tax registration number of type taxpayer ID.
ORA_FUN_INTERCO_TRANSACTION_ENTRY_DUTY_CRM	ORA_AP_PAYABLES_INVOICE_INQUIRY_DUTY_CRM	Payables Invoice Inquiry	Views Oracle Fusion Payables invoices.
ORA_FUN_INTERCO_TRANSACTION_VIEW_DUTY_CRM	ORA_AP_PAYABLES_INVOICE_INQUIRY_DUTY_CRM	Payables Invoice Inquiry	Views Oracle Fusion Payables invoices.
ORA_PJF_PROJECT_BILLING_SPECIALIST_JOB	ORA_PJB_PROJECT_CONTRACT_INVOICE_MANAGEMENT_DUTY_CRM	Project Contract Invoice Management	Perform tasks related to managing project contract invoices, billing events and billing transaction exceptions.
ORA_RCV_RECEIVING_AGENT_JOB	ORA_RCV_RECEIVING_TRANSACTION_MAINTENANCE_DUTY_CRM	Receiving Transaction Maintenance	Maintains receiving transactions such as inspecting received lines, creating and matching unordered receipts.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_PJF_PROJECT_ACCOUNTANT_JOB	ORA_XLA_SUBLEDGER_ACCOUNTING_MANAGER_DUTY_CRM	Subledger Accounting Manager	Creates accounting for transactions, reviews journal entries, and runs account analysis, journal entries, and period close exceptions reports.
ORA_FUN_INTERCO_TRANSACTION_ENTRY_DUTY_CRM	ORA_XLA_SUBLEDGER_ACCOUNTING_REPORTING_DUTY_CRM	Subledger Accounting Reporting	Runs all subledger accounting reports, and reviews journal entries.
ORA_CST_COST_ACCOUNTANT_JOB	ORA_XLA_SUBLEDGER_ACCOUNTING_REPORTING_DUTY_CRM	Subledger Accounting Reporting	Runs all subledger accounting reports, and reviews journal entries.
ORA_PJF_PROJECT_ACCOUNTANT_JOB	ORA_XLA_SUBLEDGER_ACCOUNTING_REPORTING_DUTY_CRM	Subledger Accounting Reporting	Runs all subledger accounting reports, and reviews journal entries.
ORA_DOS_SUPPLY_REQUESTS_MANAGEMENT_DUTY_CRM	ORA_POZ_SUPPLIER_PROFILE_INQUIRY_DUTY_CRM	Supplier Profile Inquiry	View supplier profile information.
ORA_DOS_SUPPLY_CHAIN_OPERATIONS_MANAGER_JOB	ORA_POZ_SUPPLIER_PROFILE_INQUIRY_DUTY_CRM	Supplier Profile Inquiry	View supplier profile information.
ORA_FOS_SUPPLY_CHAIN_CONTROLLER_JOB	ORA_POZ_SUPPLIER_PROFILE_INQUIRY_DUTY_CRM	Supplier Profile Inquiry	View supplier profile information.
ORA_FOS_SUPPLY_CHAIN_CONTROLLER_JOB	ORA_POZ_PROFILE_INQUIRY_AS_SUPPLIER_DUTY_CRM	Supplier Profile Inquiry as Supplier	Views non-bank account related supplier profile information as a supplier.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*
Contained by	*Location Details*
Contained by	*Household*
Contained by	*Contact Preference*
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*
Contained by	*Trading Community Address Purpose*
Contained by	*Telex*
Contained by	*Phone*
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*
Contained by	*Trading Community Customer Account Site Use*
Contained by	*Relationship*
Contained by	*Electronic Data Interchange*
Contained by	*Trading Community Customer Account or Site Role*
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.

Name	Type	Description
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Trading Community Customer Account Relationship

The relationship between two customer accounts. For example, one account could be the Bill To account for another.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/}CustomerAccountRelationship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Customer Account Relationship Additional Information*
Contained by	*Trading Community Customer Billing Account*
Handled by	*Trading Community Customer Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillToFlag	boolean	The Bill-To customer account.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CustAcctRelationshipInformation	*Trading Community Customer Account Relationship Additional Information*	The customer account relationship information.
CustomerAccountId	long	The identifier of the first customer account in a relationship. Foreign key to the HZ_CUST_ACCOUNTS table.
CustomerAccountRelateId	long	The customer account relationship identifier. This attribute is the primary key. • Primary Key
CustomerReciprocalFlag	boolean	Indicates if this relationship is reciprocal or not. If the value is True, then the relationship is reciprocal.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
RelatedCustomerAccountId	long	The identifier of the second customer account in a relationship. Foreign key to the HZ_CUST_ACCOUNTS_ALL table.
RelationshipType	string	The revenue accounting code for the RELATIONSHIP_TYPE column in the AR_LOOKUPS table.
RequestId	long	A system-generated read-only attribute used by the application framework.
SetCode	string	The reference data set for the customer account relationship.
SetId	long	Identifies a set of reference data shared across business units and other entities. Also known as Reference Data Sets, they are used to filter reference data in transactional UIs.
ShipToFlag	boolean	The Ship-To customer account.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Trading Community Customer Account Relationship Additional Information

The relationship between two customer accounts. For example, one account could be the ship-to account for another.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountRel/}CustAcctRelationshpInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Customer Account Relationship*
Handled by	*Trading Community Customer Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CustAcctRelateId	long	The customer account relationship identifier. This attribute is the primary key. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Customer Account Additional Information

The customer account or customer billing account. For example, account 12345 is a customer account for ABC Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/}CustAcctInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Customer Billing Account*
Handled by	*Trading Community Customer Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CustAccountId	long	The unique identifier for the account created for a party. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Customer Account Site

An address associated with a customer account.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/}CustomerAccountSite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Trading Community Customer Account Site Use*
Contains	*Trading Community Customer Account Site Additional Information*
Contains	*Trading Community Customer Billing Account Site Global Descriptive Flexfield SDO*
Contains	*Trading Community Customer Account or Site Role*
Contained by	*Trading Community Customer Billing Account*
Handled by	*Trading Community Customer Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillToIndicator	string	Indicates if this is a Bill-To site. Y for a Bill-To site, P for the primary Bill-To site, and N for a site that is not a Bill-To site.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CustAccountSiteGdf	*Trading Community Customer Billing Account Site Global Descriptive Flexfield SDO*	Customer Account Address Regional Information
CustAcctSiteInformation	*Trading Community Customer Account Site Additional Information*	The customer account address information.
CustomerAccountContact	*Trading Community Customer Account or Site Role*	The customer account contact associated with the account address.
CustomerAccountId	long	The identifier for a customer account. Foreign key to the HZ_CUST_ACCOUNTS table.
CustomerAccountSiteId	long	The customer site identifier. • Primary Key
CustomerAccountSiteUse	*Trading Community Customer Account Site Use*	The customer account address use associated with the account address.
CustomerCategoryCode	string	The user-definable category. The lookup type is ADDRESS_CATEGORY.
EceTpLocationCode	string	Stores the EDI location code. It should be unique for a customer. The column accepts free-form text.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
KeyAccountFlag	boolean	The key account for sales representatives.
Language	string	The operating language for account sites.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MarketIndicator	string	Indicates if this is a marketing site. Y for a Marketing site, P for the primary Marketing site, and N for a site that is not a Marketing site.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
RequestId	long	A system-generated read-only attribute used by the application framework.
SetCode	string	The unique code to identify the reference data set for the account address.
SetId	long	Identifies a set of reference data shared across business units and other entities. Also known as Reference Data Sets, they are used to filter reference data in transactional UIs.
ShipToIndicator	string	Indicates if this is a Ship-To site. Y for a Ship-To site, P for the primary Ship-To site, and N for a site that is not a Ship-To site.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TpHeaderId	long	The trading partner header identifier.
TranslatedCustomerName	string	The customer name in the language used at the account site.

Trading Community Customer Account Site Additional Information

An address associated with a customer account.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSite/}CustAcctSiteInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Customer Account Site*
Handled by	*Trading Community Customer Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CustAcctSiteId	long	The customer site identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Customer Account Site Use

The purpose or use of a customer account site.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/}CustomerAccountSiteUse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Customer Account Site Use Additional Information*
Contains	*Source System Reference*
Contained by	*Trading Community Customer Account Site*
Handled by	*Trading Community Customer Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BillToSiteUseId	long	The Bill-To site use identifier.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CustAcctSiteUseInformation	*Trading Community Customer Account Site Use Additional Information*	The customer account address use information.
CustomerAccountSiteId	long	The identifier for the customer account site. Foreign key to the HZ_CUST_ACCT_SITES_ALL table.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FinchrgReceivablesTrxId	long	Identifies receivables activity that are used for finance charges.
GSAIndicator	string	Indicates if this is a US federal agency supported by the General Services

Name	Type	Description
		Administration (GSA). If the value is True, then this is an organization served by the GSA.
LastAccrueChargeDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The last date that accrued finance charges were computed for this site.
LastUnaccrueChargeDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The last date that unaccrued finance charges were computed for this site.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Location	string	The site use identifier.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PaymentTermId	long	The payment term identifier.
PrimaryFlag	boolean	Indicates if this site is the primary site for this customer account. If the value is True, then this site is the primary customer contact site.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SecondLastAccrueChargeDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The next-to-last date that accrued finance charges were computed for this site.
SecondLastUnaccrueChrgDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The next-to-last date that unaccrued finance charges were computed for this site.
SetId	long	Identifies a set of reference data shared across business units and other entities. Also known as reference data sets, they are used to filter reference data in transactional UIs.

Name	Type	Description
SiteUseCode	string	The business purpose assigned to customer site account, such as Bill-To, Market, and Statements.
SiteUseId	long	The site use identifier. • Primary Key
SortPriority	int	The sort priority information.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TaxClassification	string	Classifies Bill-To site to tax group codes. Foreign key to the AR_LOOKUPS table (AR_TAX_CLASSIFICATION) used in AR_VAT_TAX (TAX_CLASSIFICATION) indexes.
TaxCode	string	The tax code associated with this site.
TaxHeaderLevelFlag	boolean	Used by Oracle Sales Compensation.
TaxReference	string	The taxpayer identification number.
TaxRoundingRule	string	The tax rounding rule information.
TerritoryId	long	The territory identifier.

Trading Community Customer Account Site Use Additional Information

The purpose or use associated with a customer account site.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSiteUse/}CustAcctSiteUseInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Customer Account Site Use*
Handled by	*Trading Community Customer Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
SiteUseId	long	The site use identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Customer Account or Site Role

The contact person for a customer account.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/}CustomerAccountContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Customer Account or Site Role Additional Information*
Contains	*Source System Reference*
Contains	*Trading Community Customer Account or Site Role Responsibility*
Contained by	*Trading Community Customer Account Site*
Contained by	*Trading Community Customer Billing Account*

Relationship Type	Object or Service
Handled by	*Trading Community Customer Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPersonId	long	Contains denormalized value based on PartyId and Relationship_Id.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CustAcctContactInformation	*Trading Community Customer Account or Site Role Additional Information*	The customer account contact information.
CustomerAccountContactRole	*Trading Community Customer Account or Site Role Responsibility*	The role or responsibility of the customer account contact.
CustomerAccountId	long	The customer account identifier. Foreign key to the HZ_CUST_ACCOUNTS table.
CustomerAccountRoleId	long	The unique identifier for the role played by the party in the customer account. • Primary Key
CustomerAccountSiteId	long	The customer account site identifier. Foreign key to the HZ_CUST_ACCT_SITES_ALL table.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PrimaryFlag	boolean	Indicates if this party occupies the primary role for this account. Y for a party in the primary role for this account, N for all other parties.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
RoleType	string	The lookup for type of role a party performs.
SourceCode	string	The promotion that was used to make the party a customer.
Status	string	The status of the record.

Trading Community Customer Account or Site Role Additional Information

The contact person associated with a customer account.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountContact/}CustAcctContactInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Customer Account or Site Role*
Handled by	*Trading Community Customer Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CustAccountRoleId	long	The unique identifier for the role played by the party in the customer account. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Customer Account or Site Role Responsibility

The customer account contact person's role or responsibility information. For example a contact person could be the shipping contact for an account.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/}CustomerAccountContactRole

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Customer Account or Site Role Responsibility Additional Information*
Contained by	*Trading Community Customer Account or Site Role*
Handled by	*Trading Community Customer Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CustAcctContactRoleInformation	*Trading Community Customer Account or Site Role Responsibility Additional Information*	The customer account contact role information.
CustomerAccountRoleId	long	Foreign key to the HZ_CUST_ACCOUNT_ROLES table.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OrigSystemReference	string	The identifier for the record from the original system.
PrimaryFlag	boolean	Indicates if this is the primary role responsibility of a party in an account. Y for a primary role, N for a role that is not a primary responsibility.
RequestId	long	A system-generated read-only attribute used by the application framework.
ResponsibilityId	long	The identifier of the responsibility for the party related to the role that the party plays in the account. • Primary Key
ResponsibilityType	string	The lookup for responsibility type.
StatusCode	string	The pre-defined code used to indicate the status.

Trading Community Customer Account or Site Role Responsibility Additional Information

The customer account contact person's role or responsibility information. For example a contact person could be the shipping contact for an account.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountContactRole/}CustAcctContactRoleInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Customer Account or Site Role Responsibility*
Handled by	*Trading Community Customer Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ResponsibilityId	long	The identifier of the responsibility for the party related to the role that the party plays in the account. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Customer Billing Account

The customer account or billing account associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/}CustomerAccount

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Customer Account Site*

Relationship Type	Object or Service
Contains	*Trading Community Customer Account Relationship*
Contains	*Trading Community Customer Billing Account Global Descriptive Flexfield Object*
Contains	*Source System Reference*
Contains	*Trading Community Customer Account Additional Information*
Contains	*Trading Community Customer Account or Site Role*
Handled by	*Trading Community Customer Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountEstablishedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the customer account was originally established through either an Oracle Application or a legacy system.
AccountName	string	The description chosen by external party (but can be entered internally on behalf on the customer).
AccountNumber	string	The account number.
AccountTerminationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the customer account was originally terminated through either an Oracle Application or a legacy system.
ArrivalsetsIncludeLinesFlag	boolean	Indicates if lines include arrival sets. Y for lines included on arrival sets, N for lines not automatically included in arrival sets.
AutopayFlag	boolean	Indicates Autopay.
Comments	string	The comments for the record.
CoterminateDayMonth	string	Identifies the date when services ordered by the customer will end. Values for this column will take the form DD-MON.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CustAccountGdf	*Trading Community Customer Billing Account Global Descriptive Flexfield Object*	Customer Account Regional Information
CustAcctInformation	*Trading Community Customer Account Additional Information*	The customer account information.
CustomerAccountContact	*Trading Community Customer Account or Site Role*	The customer account contact information.
CustomerAccountId	long	The unique identifier for the account created for a party. Primary Key for the table. • Primary Key
CustomerAccountRelationship	*Trading Community Customer Account Relationship*	The customer account relationship information.
CustomerAccountSite	*Trading Community Customer Account Site*	The customer account address information.
CustomerClassCode	string	The customer class identifier. For example, an account created for a reseller or educational customers would have a customer_class_code as reseller or education.
CustomerType	string	The receivables lookup code for the CUSTOMER_TYPE attribute. I for internal customers, R for revenue generating external customers.
DateTypePreference	string	The preference for ship or arrival dates.
DepositRefundMethod	string	The refund method.
HeldBillExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The held bill expiration date.
HoldBillFlag	boolean	Indicates if the bill receivable should be held or not. If the value is True, then the bill receivables should be held.
LastBatchId	long	The last active batch.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
NpaNumber	string	Identifies an account with a Number Plan Area (NPA) used in telecommunications.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
SellingPartyId	long	The identifier of the party entering a business relationship as a seller. A selling party can be an individual or an organization. The Selling Party represents the external facing organization with which the customer is doing business, and is not necessarily a legal entity or an operating unit. Its usage within the ebusiness suite will be phased: Phase 1:Products can join to HZ_PARTIES using the SELLING_PARTY_ID to retrieve the PARTY_NAME for use in a UI. e.g. a call center application may run on behalf of several internal organizations - displaying the selling party will allow the user to see context for the customer Phase 2:Products can use SELLING_PARTY_ID as a filtering mechanism. e.g. a profile controls the selling_party_id that a user has access to. The UI would then show accounts matching this party.
SourceCode	string	The promotion that was used to make the party a customer.
Status	string	The status of the record.

Name	Type	Description
StatusUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The last status update date.
TaxCode	string	The tax code for the customer.
TaxHeaderLevelFlag	boolean	Indicates if item is tax header or a line item. Y for records that are headers for tax purposes, N for records that are lines.
TaxRoundingRule	string	The tax amount rounding rule.

Trading Community Customer Billing Account Global Descriptive Flexfield Object

A customer account or billing account global descriptive flexfield object.

QName: {http://xmlns.oracle.com/apps/flex/cdm/foundation/parties/custAccountGdf/}CustAccountGdf

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Customer Billing Account*
Handled by	*Trading Community Customer Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CustAccountId	long	Unique identifier for the account created for a Party. Primary Key for the table • Primary Key
_FLEX_NumOfSegments	int	Number of segments for customer account global descriptive flexfield object

Name	Type	Description
__FLEX_Context	string	Context for customer account global descriptive flexfield object
__FLEX_Context_DisplayValue	string	Context display value for customer account global descriptive flexfield object.

Trading Community Customer Billing Account Site Global Descriptive Flexfield SDO

A customer account or billing account site global descriptive flexfield object.

QName: {http://xmlns.oracle.com/apps/flex/cdm/foundation/parties/custAccountSiteGdf/}CustAccountSiteGdf

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Customer Account Site*
Handled by	*Trading Community Customer Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CustAcctSiteId	long	Customer site identifier. • Primary Key
_FLEX_NumOfSegments	int	Number of segments for customer account site global descriptive flexfield object
__FLEX_Context	string	Context for customer account site global descriptive flexfield object
__FLEX_Context_DisplayValue	string	Context display value for customer account site global descriptive flexfield object.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Group

A group represents households or other similar party group entities such as Families, Banking and Insurance Services, and Wealth Management Groups.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/applicationModule/}GroupService

Service WSDL URL: https://servername/crmService/GroupService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Group

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Additional Household Name*
Handles	*Trading Community Original System Mapping Identifier Additional Information*
Handles	*Classification Assignment*
Handles	*Source System Reference*
Handles	*Relationship*
Handles	*Telex*
Handles	*Trading Community Address Purpose*
Handles	*Financial Profile*
Handles	*Web*
Handles	*Trading Community Address Additional Information*
Handles	*Usage Assignment*
Handles	*Email Domain*
Handles	*Instant Messaging*
Handles	*Email*
Handles	*Customer Contact Responsibility*
Handles	*Address*
Handles	*Customer Contact Profile*
Handles	*Trading Community Relationship Additional Information*
Handles	*Electronic File Transfer*

Relationship Type	Object or Service
Handles	*Contact Preference*
Handles	*Contact Language*
Handles	*Phone*
Handles	*Certification*
Handles	*Trading Community Organization Contact Additional Information*
Handles	*Additional Identifier*
Handles	*Household*
Handles	*Trading Community Contact Point Additional Information*
Handles	*Preference*

Operations

- *getGroup*
- *createGroup*
- *updateGroup*
- *deleteGroup*
- *mergeGroup*
- *findGroup*
- *getGroupsFilteredByPartyUsageCode*
- *getGroupByOriginalSystemReference*
- *getGroupsFilteredByPartyUsageFilterRuleCode*
- *processGroup*
- *processCSGroup*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getGroup

The Get operation for the trading community group details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	The unique identifier of the party.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}GroupResult	The trading community group details that matches the inbound key attributes.

createGroup

The Create operation for the trading community group details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
groupParty	*Household*	The trading community group details to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}GroupResult	The result of the operation that includes the successfully created trading community groups details and a list of warning or information messages.

updateGroup

The Update operation for the trading community group details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
groupParty	*Household*	The trading community group details to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}GroupResult	The result of the operation that includes the successfully updated trading community group details and a list of warning or information messages.

deleteGroup

The Delete operation for the trading community group details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
groupParty	*Household*	The trading community group details to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergeGroup

The Merge operation for the trading community group details. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
groupParty	*Household*	The trading community group details to be merged.

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}GroupResult	The result of the operation that includes the successfully merged trading community group details and a list of warning or information messages.

findGroup

The Find operation for the trading community group details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Household*	The result of the operation that includes a list of trading community group details that satisfy the inbound criteria and any warning or information messages.

getGroupsFilteredByPartyUsageCode

The Get operation for trading community group filtered by the party usage.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyUsageCode	string	The code identifying the party usage used to filter a group.
bindEffectivedate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The effective date to filter a group.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}GroupResult	The trading community group details that matches the inbound party usage code.

getGroupByOriginalSystemReference

The Get operation for trading community Group filtered by the source system reference.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindOrigSystem	string	The unique code identifying the original system.
bindOrigSystemReference	string	The unique identifier of the original system reference.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}GroupResult	The trading community group details that are filtered by the source system reference provided.

getGroupsFilteredByPartyUsageFilterRuleCode

The Get operation for trading community group filtered by the party usage filter rule.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyUsageFrCode	string	The party usage filter rule used to filter a group.
bindEffectivedate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The effective date to filter a group.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}GroupResult	The trading community group details that were filtered by the party usage filter rule provided.

processGroup

The Bulk load operation for the trading community group details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action to perform, such as create, update, merge, or delete.
groupParty	*Household*	The trading community group details to be processed.

Element Name	Type	Description
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Household*	The result of the operation that includes a list of trading community group details that were successfully processed and any warning or information messages.

processCSGroup

An operation to apply the changes back to the data source for the trading community group details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object to represent the changes.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created and updated data objects, and all warning and information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name; an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used to evaluate the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for the service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	HZ_MANAGE_TRADING_COMMUNITY_GROUP_DETAILS_PRIV	Manage Trading Community Group Details	

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_GROUP_DETAILS_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_MANAGE_TRADING_COMMUNITY_GROUP_DETAILS_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
HZ_MANAGE_TRADING_COMMUNITY_GROUP_DETAILS_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_MANAGE_TRADING_COMMUNITY_GROUP_DETAILS_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_GROUP_DETAILS_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_MANAGE_TRADING_COMMUNITY_GROUP_DETAILS_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
HZ_MANAGE_TRADING_COMMUNITY_GROUP_DETAILS_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
HZ_MANAGE_TRADING_COMMUNITY_GROUP_DETAILS_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
HZ_MANAGE_TRADING_COMMUNITY_GROUP_DETAILS_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_HZ_RESOURCE_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_ COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_ CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_ AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_ AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_ VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_ VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Additional Household Name

An additional name associated with a group. For example, the phonetic name of a group.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}AdditionalGroupName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Household*
Handled by	*Trading Community Group*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Identify the name as preferred name for this party within this name type. Possible values are 'Y' and 'N'. Default is 'N'.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameId	long	Unique Identifier of Party Name. • Primary Key
PartyNameType	string	The type of party name.
PreferredFlag	boolean	The flag which Identifies the name as preferred name for this party within this name type. Possible values are 'Y' and 'N'. Default is 'N'.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TransliterationLang	string	Used to capture the language used for the name.

Additional Identifier

An additional identifier of a trading community member, such as driver's license number or passport number.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}AdditionalPartyId

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*

Relationship Type	Object or Service
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
ExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expiration date for the identifier. It may be NULL, and does not apply to all types of identifiers.
IssueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date in which the Identifier was issued. It may be NULL and does not apply to all types of identifiers.
IssuingAuthorityName	string	The issuing authority name.
IssuingAuthorityPartyId	long	The unique identifier of the issuing authority.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyIdentifierId	long	The unique identifier of the party identifier. • Primary Key
PartyIdentifierType	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.
PartyIdentifierType1	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.
PartyIdentifierValue	string	The value of the party identifier.
PartyName	string	The name of the party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StateProvince	string	The province of the address.
StatusCode	string	The pre-defined code used to indicate the status.

Address

An address of a trading community member, such as Oracle Corporation is located at 500 Oracle Parkway, Redwood Shores, CA.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Telex*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contains	*Trading Community Address Additional Information*
Contains	*Email*
Contains	*Electronic File Transfer*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AddressExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the location is no longer valid.
AddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines that are used in Japan.
AddressStyle	string	Style of the address.
Addressee	string	The information of the addressee.
City	string	The name of the city.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.

Name	Type	Description
ContactPreferenceExistFlag	boolean	Indicator to specify if the contact is primary contact for the party.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	The name of the country.
Country1	string	The attribute country1 is not used.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
DoNotValidateFlag	boolean	Indicator to specify that a particular location is not eligible for address validation irrespective of the current validation.
Eft	*Electronic File Transfer*	The electronic file transfer information for the party.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.

Name	Type	Description
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedAddress	string	The formatted read-only address.
FormattedLocaleAddress	string	The formatted read-only local address.
FormattedMultilineAddress	string	The formatted multi line address of the party site.
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
HouseType	string	Indicates the building type.
IdentifyingAddressFlag	boolean	Indicator to specify the identifying address for the party. Y stands for the indentifying site and N stands for sites that are not the indentifying site.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
Language	string	The operating language for the party site.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	The latitude of the party address.
LocationDirections	string	Directions to the location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
LocationLanguage	string	The operating language for the locations.

Name	Type	Description
Longitude	decimal	The longitude of the party address.
Mailstop	string	A user-defined code to indicate a mail drop point within the organization.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary address of the contact irrespective of the context. Y stands for primary address and N stands for all others.
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	Stores the doing-business_as (DBA) party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameDivision	string	Stores the division party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameLegal	string	Stores the legal party name for a party site. This column is used to store FSIO related legal party name attribute.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteInformation	*Trading Community Address Additional Information*	The party address information.
PartySiteName	string	The user-defined name for the site.

Name	Type	Description
PartySiteNumber	string	The party site number of the address.
PartySiteType	string	Stores the party site type and is based on the lookup. Currently this is either null or one-time.
PartySiteUse	*Trading Community Address Purpose*	The information of the party address usage.
PartyUsageCode	string	The usage context of a party's contact point.
Phone	*Phone*	The phone information for the entity.
Position	string	The primary direction such as north or east that is used to access the location.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four digit extension to the United States postal ZIP code.
Province	string	The name of the province.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The Telex information associated with the party.
UsageCode	string	The usage code is not used.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	The standardized status code describing the results of the validation.

Name	Type	Description
Web	*Web*	The web information related to the record.

Certification

The certification information of a trading community member, such as a full ISO 9001 registered firm.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}Certification

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CertificationId	long	The unique identifier for certification. • Primary Key
CertificationName	string	The name of the certification such as ISO9000 and GMP001.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrentStatus	string	The name for the status of the certification. For example, applied for, granted, or expired.
ExpiresOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification expires.
Grade	string	The level or grade of certification provided by the ISSUED_BY_AUTHORITY. For example, founding member, gold, fully certified, and partially certified.
IssuedByAuthority	string	The name of the certifying authority.
IssuedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification was issued.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Name	Type	Description

Classification Assignment

The classification code assigned to a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CodeAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Sales Competitor*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Reference*
Handled by	*Sales Reference Customer*
Handled by	*Company and User Registration*
Handled by	*Sales Party*
Handled by	*Sales Competitor Service*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party Territory service*
Handled by	*Sales Party Resource Service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassCategory	string	The name of the classification category.
ClassCode	string	The code of the classification.
CodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an object. It is primary key and system generated. • Primary Key
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableKey1	string	The first column of the alphanumeric or multi-part foreign key.
OwnerTableKey2	string	The second column of the alphanumeric or multi-part foreign key.
OwnerTableKey3	string	The third column of the alphanumeric or multi-part foreign key.
OwnerTableKey4	string	The fourth column of the alphanumeric or multi-part foreign key.
OwnerTableKey5	string	The fifth column of the alphanumeric or multi-part foreign key.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PrimaryFlag	boolean	Indicator that specifies if this is the primary class code of a class category for the organization. Y stands for the primary class code and N stands for all others.
Rank	decimal	Ranks classes if multiple classes are assigned to a party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.

Name	Type	Description
Status	string	The status of the record.

Contact Language

The languages known information of a trading community member. For example, Mary Smith can speak both Spanish and English but can only read and write English.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PersonLanguage

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Handled by	*Trading Community Group*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LanguageName	string	The standard name for a language. For example, Spanish, Mandarin, or American English. Foreign key to the FND_LANGUAGES table.
LanguageUseReferenceId	long	The unique identifier of the language use reference. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
NativeLanguageFlag	boolean	Indicator to specify if the language is the declared native language of a person. Y stands for a declared native language and N stands for all other languages.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PrimaryLanguageIndicator	string	Indicates if this is the primary language used by a person in day-to-day transactions. Y stands for the primary language and N stands for other languages.
ReadsLevel	string	The user-defined level number or name to indicate the ability to read a language.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
SpeaksLevel	string	The user-defined level number or name to indicate the ability to speak a language.
SpokenComprehensionLevel	string	The code to indicate comprehension of a spoken language.
Status	string	The status of the record.
WritesLevel	string	The user-defined level number or name to indicate the ability to write in a language.

Contact Preference

The contact preference of the trading community member. For example, do not call Joe Smith between 10 a.m. and 12 noon on weekdays.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}ContactPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Electronic Data Interchange*
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Household*
Contained by	*Phone*
Contained by	*Telex*
Contained by	*Web*

Relationship Type	Object or Service
Contained by	*Contact Address*
Contained by	*Electronic File Transfer*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactLevelTable	string	The table that stores the contact level of the contact preference, and uses the SUBJECT_ TABLE lookup. The list of accepted values

Name	Type	Description
		are HZ_PARTIES, HZ_PARTIES_SITES, or HZ_CONTACT_POINTS.
ContactLevelTableId	long	The foreign key to the table specified in CONTACT_LEVEL_TABLE column. The list of accepted values are PARTY_ID from HZ_PARTIES table, CONTACT_POINT_ID from HZ_CONTACT_POINTS table, or PARTY_SITE_ID from HZ_PARTY_SITES table.
ContactPreferenceId	long	The unique identifier for the contact preference. • Primary Key
ContactType	string	The contact party type that defines whether the contact is a sales account, a prospect, a contact, or any other user-defined party type. The default value is CUSTOMER. A list of accepted values is defined in the lookup CONTACT_TYPE.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaximumNoOfInteractUOMCode	string	The period of time during which the maximum number of interactions applies. Uses the MAX_NO_OF_INTERACT_UOM_CODE lookup.
MaximumNoOfInteractions	decimal	The number of times you can use this contact point. The period of time that this number applies is stored in the MAX_NO_OF_INTERACT_UOM_CODE column.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PreferenceCode	string	Indicates whether to use a particular contact method. The list of accepted values are defined in the PREFERENCE_CODE lookup.
PreferenceEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes inactive.
PreferenceEndTimeHR	int	The hour part of time when the contact preference becomes inactive. The time is recorded in the 24 hour format.
PreferenceEndTimeMi	int	The minutes part of the time when the contact preference becomes inactive.
PreferenceStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes active.
PreferenceStartTimeHR	int	The hour part of time when the contact preference becomes active. The time is recorded in the 24 hour format.
PreferenceStartTimeMi	int	The minutes part of the time when the contact preference becomes active.
PreferenceTopicType	string	The appropriate subjects to send the party that the preference is created for. The list of accepted values are defined in the PREFERENCE_TOPIC_TYPE lookup.
PreferenceTopicTypeCode	string	The code of the preference topic type.
PreferenceTopicTypeId	long	The unique identifier of the preference topic type.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
RequestedBy	string	Indicates if the permission or restriction was created internally or requested by the party. The list of accepted values are defined in the REQUESTED_BY lookup.

Name	Type	Description
Status	string	The status of the record.

Customer Contact Profile

The person who functions as a contact for an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Organization Contact Additional Information*
Contains	*Customer Contact Responsibility*
Contains	*Source System Reference*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
ContactFormattedAddress	string	The formatted version of the contact address.
ContactFormattedMultilineAddress	string	The formatted multiline version of the contact address.
ContactName	string	The name of the contact.
ContactNumber	string	The user-defined identification number for this contact.
ContactPartyId	long	The unique identifier of the contact.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerEmailAddress	string	The e-mail address of the customer this contact person belongs to.
CustomerName	string	The name of the customer.
CustomerPartyId	long	The unique identifier of the customer this contact person belongs to.

Name	Type	Description
CustomerPartyNumber	string	The alternate unique identifier of the customer this contact person belongs to.
CustomerUniqueName	string	The unique name of the customer. For an Organization, the value is a concatenation of unique_name_alias and suffix. For a Person, the value is a concatenation of person_name and suffix.
DecisionMakerFlag	boolean	Indicates if this contact is a decision maker. If the value is True, then the contact is a decision maker.
Department	string	The free form text used to name the department for the contact.
DepartmentCode	string	The department code for the contact. A list of accepted values is defined in the lookup DEPARTMENT_TYPE.
EmailAddress	string	The email address associated with the record.
FormattedAddress	string	The formatted address information.
FormattedPhoneNumber	string	The formatted phone number.
JobTitle	string	The free form text for job title.
JobTitleCode	string	The code given to the job title.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The unique identifier of the organization contact. • Primary Key

Name	Type	Description
OrgContactInformation	*Trading Community Organization Contact Additional Information*	The information of the organization contact.
OrganizationContactRole	*Customer Contact Responsibility*	The role of the contact in the organization.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyRelationshipId	long	The unique identifier of the relationship of the party.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteName	string	The address associated with the party site.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonCertReasonCode	string	The reason for the organization's current certification level assignment. A list of accepted values is defined using the lookup HZ_PARTY_CERT_REASON.
PersonCertificationLevel	string	The certification level of a organization. A list of accepted values is defined in the lookup HZ_PARTY_CERT_LEVEL.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLanguageName	string	The language name associated with the person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.

Name	Type	Description
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.
PersonPreviousLastName	string	The previous last name of a person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.
Rank	string	The rank associated with this customer contact.
ReferenceUseFlag	boolean	Indicates if this contact can be used as a reference. If the value is Y, then the contact can be used as a reference.
RequestId	long	A system-generated read-only attribute used by the application framework.
SalesAffinityCode	string	The affinity of a contact to the deploying organization. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_AFFINITY_CODE.

Name	Type	Description
SalesAffinityComments	string	The comments about the contact's affinity to the deploying organization.
SalesBuyingRoleCode	string	The roles played by a contact in the buying process, for example, decision maker or supporting role. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_BUY_ROLE_CODE.
SalesInfluenceLevelCode	string	The influence of the contact has on the deploying organization. A list of accepted values are defined in the lookup HZ_SLS_CNTCT_INFLUENCE_LVL_CD.
Salutation	string	The size of the household this person is a part of.
WebUrl	string	The web URL of contact point.

Customer Contact Responsibility

The role or responsibility of an organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContactRole

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Customer Contact Profile*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The organization contact identifier. Foreign key to the HZ_ORG_CONTACTS table.
OrgContactRoleId	long	The unique contact role identifier. It is primary key and system generated. • Primary Key

Name	Type	Description
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PrimaryContactPerRoleType	string	Indicates if the contact is the primary contact for the role. Y stands for primary contact and N stands for a contact that is not the primary contact for the role type. The default value is N.
PrimaryFlag	boolean	Indicator that specifies if this is the primary role for the contact. Y stands for primary role and N stands for a non-primary role for the contact. The default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
RoleLevel	string	The role level of the contact. For example, executive, department head, or middle manager.
RoleType	string	The role performed by a contact.
Status	string	The status of the record.

Electronic File Transfer

The electronic funds transfer information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Eft

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*

Relationship Type	Object or Service
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.

Name	Type	Description
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EFTPrintingProgramId	long	The printing program identifier.
EFTSWIFTCode	string	The EFT swift code information.
EFTTransmissionProgramId	long	The transmission program identifier.
EFTUserNumber	string	The number that identifies you as a user of electronic funds transfer service for your bank or clearing organization.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

E-Mail

The e-mail address associated with a trading community member. For example, john.doe@oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Email

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The preferred format for e-mail addressed to this address such as HTML or ASCII. A list of accepted values is defined using the lookup EMAIL_FORMAT.
EmailInformation	*Trading Community Contact Point Additional Information*	The additional information about the e-mail.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row

Name	Type	Description
		is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary e-mail of the associated object. If the value is True, then this is the primary e-mail. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.

Name	Type	Description
Status	string	The status of the record.

E-Mail Domain

The domain of the e-mail address associated with a trading community member. For example, ABC Corporation has CORP and BUSINESS e-mail domains.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}EmailDomain

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DomainName	string	The actual or non-reversed domain name of the organization for display purpose.
EmailDomainId	long	The sequence generated unique identifier. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
Status	string	The status of the record.
TransposedDomain	string	The reversed domain name for the purposes of searching.

Financial Profile

The financial details of a trading community member, such as bank account information that was obtained as part of a credit evaluation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}FinancialProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessAuthorityDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when access to the information in the account was granted.
AccessAuthorityGranted	string	Indicates whether access to information in a financial account was granted. If the value is True, then the access has been granted.

Name	Type	Description
BalanceAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The reported balance on an account. The balance can be a positive number, negative number, or zero.
BalanceVerifiedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the account balance was verified.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FinancialAccountNumber	string	The alternate unique identifier of the financial account.
FinancialAccountType	string	The short name that classifies the financial accounts. For example, savings, checking, home loan, personal loan, trading, and so on.
FinancialOrgType	string	The classification of financial organizations. For example, bank, savings and loan, private lender, building society and so on.
FinancialOrganizationName	string	The name of the financial organization that holds the account.
FinancialProfileId	long	The unique identifier of the party's financial profile. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value

Name	Type	Description
		of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Household

The trading community group information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/groupService/}Group

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Additional Household Name*
Contains	*Classification Assignment*
Contains	*Source System Reference*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Web*
Contains	*Contact Preference*
Contains	*Phone*
Contains	*Contact Language*
Contains	*Certification*

Relationship Type	Object or Service
Contains	*Usage Assignment*
Contains	*Additional Identifier*
Contains	*E-Mail Domain*
Contains	*Instant Messaging*
Contains	*E-Mail*
Contains	*Address*
Contains	*Preference*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Trading Community Group*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalGroupName	*Additional Household Name*	Additional name associated with the group.

Name	Type	Description
AdditionalPartyId	*Additional Identifier*	Additional Identifier for the group.
AnnualExpenses	long	Household annual expenses.
AnnualIncome	long	The value for annual income.
AverageAge	long	Household average age.
Certification	*Certification*	Certification information associated with the group.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
CertificationReasonCode	string	Reason for group party's current certification level assignment. HZ_PARTY_CERT_REASON lookup type.
Child0to6Number	long	The number of children between 0 and 6 years.
Child13to18Number	long	The number of children between 13 and 18 years.
Child7to12Number	long	The number of children between 7 and 12 years.
CodeAssignment	*Classification Assignment*	Classification code assigned to the group.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DependentsNumber	long	The number of dependents.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	Not Used.
EffectiveSequence	int	Not Used.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
Email	*E-Mail*	The email address associated with the record.
EmailDomain	*E-Mail Domain*	Email domain information for the group.
FinancialProfile	*Financial Profile*	Financial Profile information of the group.
GroupName	string	Name of this group.
GroupSize	long	Size of the group.
GroupType	string	The party type can only be person, organization, group.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MedianAge	long	The age of the median.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	Preference information of the group.
PartySite	*Address*	Address information associated with the group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	Party usage assigned to the group.
PersonLanguage	*Contact Language*	Language information associated with a group.
Phone	*Phone*	The phone information for the entity.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonEmail	string	The E-Mail of the preferred contact person.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredContactPersonName	string	The name of the preferred contact person.
PreferredContactPersonPhone	string	The phone number of the preferred contact person.
PreferredContactPersonURL	string	The URL of the preferred contact person.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.

Name	Type	Description
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the primary address.
PrimaryAddressCountry	string	The country for the primary address.
PrimaryAddressCounty	string	The country of the primary address.
PrimaryAddressLine1	string	Line one of the primary address.
PrimaryAddressLine2	string	Line two of the primary address.
PrimaryAddressLine3	string	Line three of the primary address.
PrimaryAddressLine4	string	Line four of the primary address.
PrimaryAddressLocationId	long	The unique identification number for the primary address location.
PrimaryAddressPartySiteId	long	The unique identifier for the primary address party site.
PrimaryAddressPostalCode	string	The postal code of the primary address.
PrimaryAddressProvince	string	The province of the primary address.
PrimaryAddressState	string	The state of the primary address.
PrimaryEmail	string	Primary E-Mail Address of the Group.
PrimaryEmailId	long	Primary E-Mail ID.
PrimaryFormattedAddress	string	Primary formatted address for the group.
PrimaryFormattedMultilineAddress	string	Primary formatted multiline address for the group.

Name	Type	Description
PrimaryFormattedPhoneNumber	string	Primary formatted phone number for the group.
PrimaryLanguage	string	Standard name for a primary language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The unique identification number for the primary phone.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	Primary URL.
PrimaryWebId	long	Primary Web ID.
ProfileCreatedBy	string	The user who created the row.
ProfileCreatedByModule	string	The module that created the profile.
ProfileCreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time of the creation of the row.
ProfileLastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time of the last update of the row.
ProfileLastUpdateLogin	string	The session login associated to the user who last updated the row.
ProfileLastUpdatedBy	string	The user who last updated the row.

Name	Type	Description
Relationship	*Relationship*	Relationship information for the group.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.
SuffixOverriddenFlag	boolean	This will have Y if the suffix is overridden by user N if not.
UniqueNameSuffix	string	System generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
WealthAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Household wealth amount or net worth.
Web	*Web*	The web information related to the record.

Instant Messaging

The instant messaging information of a trading community member, such as the AOL identifier or Yahoo Messenger information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}InstantMessaging

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key

Name	Type	Description
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessagingAddress	string	The instant messaging information address.
InstantMessagingInformation	*Trading Community Contact Point Additional Information*	The instant messaging information related to the record.
InstantMessengerType	string	The type of the instant messenger type.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
OverallPrimaryFlag	boolean	Indicates whether this is the primary instant messaging Id of the associated object. If the value is True, then this is the primary instant messaging Id. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Phone

The phone number associated with a trading community member. For example, the phone number for Oracle Corporation is 650-506-6000.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Phone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Contact Address*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*

Relationship Type	Object or Service
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FormattedPhoneNumber	string	The formatted phone number.
LastContactDtTime	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time of last contact placed to this contact point.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PagerTypeCode	string	The PAGER_TYPE_CODE column stores the lookup code for the type of pager. The type of pager determines how the page is received. For example, tone, number, alphanumeric or two-way alphanumeric.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCallingCalendar	string	The name or code for a calling calendar used with this telephone number. This attribute is no longer used in Fusion applications.

Name	Type	Description
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The additional number addressed after initial connection to an internal telephone system.
PhoneInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community phone.
PhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound, or outbound.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RawPhoneNumber	string	The unformatted telephone number.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TimezoneCode	string	The foreign key to FND_TIMEZONES_B.TIMEZONE_CODE.
TransposedPhoneNumber	string	This column stores the concatenation of PHONE_COUNTRY_CODE, PHONE_AREA_CODE, and PHONE_NUMBER in reverse order. For example, if PHONE_COUNTRY_CODE=1, PHONE_AREA_CODE=650 and PHONE_NUMBER=5065747, this column stores

Name	Type	Description
		74756050561. This column is used for building an index to search for any combination of the above three columns.

Preference

The preferences of a trading community member. For example, a member may prefer that the transaction currency is the US dollar.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalValue1	string	The additional preference value.
AdditionalValue2	string	The additional preference value.
AdditionalValue3	string	The additional preference value.
AdditionalValue4	string	The additional preference value.
AdditionalValue5	string	The additional preference value.
Category	string	A preference category is used to logically group one or more preference codes in a particular user interface. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Module	string	The program that creates the preference. For example, TCA MOBILE CUSTOMER DIRECTORY.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PartyPreferenceId	long	The unique identifier of the party preference. • Primary Key

Name	Type	Description
PreferenceCode	string	A preference code determines if a preference is a single value or a multiple value preference. The preference code is validated by the HZ_PREFERENCE lookup. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
ValueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The preference value when the data type is DATE.
ValueName	string	A user-defined alias for a preference value.
ValueNumber	decimal	The preference value when the data type is NUMBER.
ValueVarchar2	string	The preference value when the data type is VARCHAR2.

Relationship

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}Relationship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Address*
Contains	*Instant Messaging*
Contains	*Web*

Relationship Type	Object or Service
Contains	*Usage Assignment*
Contains	*Trading Community Relationship Additional Information*
Contains	*Customer Contact Profile*
Contains	*Source System Reference*
Contains	*Email*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalInformation1	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type. For operating unit and legal entity to bank relationships, column stores communication agreement ID, which identifies agreement between payer and bank on type of EDIFACT documents that can be sent for processing payments.
AdditionalInformation10	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation11	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation12	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation13	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation14	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation15	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation16	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation17	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation18	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation19	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation2	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation20	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation21	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation22	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation23	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation24	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation25	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation26	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation27	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation28	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation29	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation3	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation30	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation4	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation5	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation6	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation7	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation8	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation9	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.

Name	Type	Description
DirectionCode	string	The code of the relationship direction. The list of accepted values are defined in the lookup DIRECTION_CODE.
Email	*E-Mail*	The email address associated with the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectEmailAddress	string	The e-mail address of the object party in the relationship.
ObjectId	long	The unique identifier of the object party in this relationship.
ObjectPartyName	string	The name of the object party in this relationship.
ObjectTableName	string	The source table name of the object party in this relationship.
ObjectType	string	The object type of the relationship.
ObjectUsageCode	string	The usage code of object party in the relationship.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationContact	*Customer Contact Profile*	The organization contact information.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyName	string	The name of the party.
PartySite	*Address*	The party site associated with the relationship.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the relationship.
PercentageOwnership	decimal	The percentage of the child entity owned by the parent entity.
Phone	*Phone*	The phone information for the entity.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.
RelationshipCode	string	The code for a forward or a backward relationship. A list of accepted relationship values is defined in the lookup PARTY_RELATIONS_TYPE.
RelationshipId	long	The relationship identifier for the record.
RelationshipInformation	*Trading Community Relationship Additional Information*	The relationship type information.
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key
RelationshipType	string	The relationship type name. For example, CUSTOMER_SUPPLIER. A list of valid relationship types is defined in the lookup HZ_RELATIONSHIP_TYPE.
RequestId	long	A system-generated read-only attribute used by the application framework.
Role	string	The role between the subject and object party in this relationship.

Name	Type	Description
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
SubjectEmailAddress	string	The e-mail address of the subject party in relationship.
SubjectId	long	The unique identifier of the subject in this relationship.
SubjectPartyUsageAssignment	*Usage Assignment*	The usage assignment of the subject party in the relationship.
SubjectTableName	string	The source table of the subject.
SubjectType	string	The subject type of the relationship.
SubjectUsageCode	string	The usage code of subject party in the relationship.
Web	*Web*	The web information related to the record.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*
Contained by	*Location Details*
Contained by	*Household*

Relationship Type	Object or Service
Contained by	*Contact Preference*
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*
Contained by	*Trading Community Address Purpose*
Contained by	*Telex*
Contained by	*Phone*
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*
Contained by	*Trading Community Person Details*
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*
Contained by	*Trading Community Customer Account Site Use*
Contained by	*Relationship*
Contained by	*Electronic Data Interchange*

Relationship Type	Object or Service
Contained by	*Trading Community Customer Account or Site Role*
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.

Name	Type	Description
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Telex

The telex number information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Telex

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary telex of the associated object. If the value is True, then this is the primary telex. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.

Name	Type	Description
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TelexNumber	string	The telex reference number (usually a telephone number) of the organization.

Trading Community Address Additional Information

The address information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/}PartySiteInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Address Purpose

The purpose of an address, such as Business, Home, or Ship To.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySiteUse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date at the start of the date range within which the row is active.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
IntegrationKey	string	The integration key is not used.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteUseId	long	The unique identifier of the party site used. • Primary Key
PrimaryPerType	string	Indicates if this is the primary use for the site. Y stands for the primary site and N stands for all other sites.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
SiteUseType	string	The site use type associated with the address.
Status	string	The status of the record.

Trading Community Contact Point Additional Information

The contact point for a trading community member like phone or e-mail. For example 650-506-6000 is the phone number for Oracle Corporation, john.doe@example.com is the e-mail address for John Doe.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/}ContactPointInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Phone*
Contained by	*Web*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointType	string	The type of the contact point.
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Organization Contact Additional Information

The additional information about the organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/orgContact/}OrganizationContactInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Customer Contact Profile*

Relationship Type	Object or Service
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrgContactId	long	The unique identifier of the organization contact. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Relationship Additional Information

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/relationship/}RelationshipInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Relationship*
Handled by	*Trading Community Group*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Usage Assignment

The party usage assigned to a trading community member. For example, John Doe is a contact of ABC Corporation and XYZ Corporation is a supplier.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyUsageAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Party Usage Assignment Service*
Handled by	*Trading Community Party Information*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
PartyUsageCode	string	The usage context of a party's contact point.
PartyUsgAssignmentId	long	The unique identifier of the party usage assignment. • Primary Key
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Web

The Web information associated with a trading community member. For example, Oracle's address on the Web is www.oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Web

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N stands for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.

Name	Type	Description
PrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
URL	string	The destination URL associated with a specific Google AdWords ad.
WebInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community Web.
WebType	string	The prefix class to a Web address. Typically, this is either FTP or HTTP.

Trading Community Information Format for Name and Address

A format for name and address used to store and display trading community information. For example, John Doe can be formatted as Doe, John.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/styleFormatService/}StyleFormatService

Service WSDL URL: https://servername/crmService/StyleFormatService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Information Format

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Style Format Layout*
Handles	*Trading Community Style Format Translation*
Handles	*Trading Community Style Format Layout Translation*
Handles	*Trading Community Style Format Locale*
Handles	*Trading Community Style Format*
Handles	*Trading Community Style Translation*
Handles	*Trading Community Style Format Variation*
Handles	*Trading Community Style*

Operations

- *getStyle*
- *createStyle*
- *updateStyle*
- *deleteStyle*
- *mergeStyle*
- *findStyle*
- *processStyle*
- *processCSStyle*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getStyle

The Get operation for trading community style.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
styleCode	string	The get operation for the trading community style for the given style code.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/styleFormatService/}StyleResult	The trading community style that matches the inbound key attributes.

createStyle

The Create operation for trading community style.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
style	*Trading Community Style*	The trading community style to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/styleFormatService/}StyleResult	The result of the operation that includes the successfully created trading community style and a list of warning or information messages.

updateStyle

The Update operation for trading community style.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
style	*Trading Community Style*	The trading community style to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/styleFormatService/}StyleResult	The result of the operation that includes the successfully created trading community style and a list of warning or information messages.

deleteStyle

The Delete operation for trading community style.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
style	*Trading Community Style*	The trading community style to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergeStyle

The Merge operation for trading community style. It performs an update if the object exists, or an insert if the object doesn't exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
style	*Trading Community Style*	The trading community style to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/styleFormatService/}StyleResult	The result of the operation that includes the successfully merged trading community style and a list of warning or information messages.

findStyle

The Find operation for trading community style.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Trading Community Style*	The result of the operation that includes a list of trading community style that satisfy the inbound criteria and any warning or information messages.

processStyle

The Bulk load operation for trading community style.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action to perform, such as create, update, merge, or delete.
style	*Trading Community Style*	The list trading community style to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there

Element Name	Type	Description
		are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Trading Community Style*	The result of the operation that includes a list of trading community style that were successfully processed and any warning or information messages.

processCSStyle

An operation to apply the changes back to the data source for trading community style.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object to represent the changes.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created or updated data objects, and all warning and information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name; an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used to evaluate the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined for this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for the service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
processStyle	HZ_MANAGE_TRADING_COMMUNITY_NAME_FORMAT_PRIV	Manage Trading Community Name Format	Allows the specification of how customer names appear in the application, such as the sequence of first name and last name.
deleteStyle	HZ_MANAGE_TRADING_COMMUNITY_NAME_FORMAT_PRIV	Manage Trading Community Name Format	Allows the specification of how customer names appear in the application, such as the sequence of first name and last name.
updateStyle	HZ_MANAGE_TRADING_COMMUNITY_NAME_FORMAT_PRIV	Manage Trading Community Name Format	Allows the specification of how customer names appear in the application, such as the sequence of first name and last name.
findStyle	HZ_MANAGE_TRADING_COMMUNITY_NAME_FORMAT_PRIV	Manage Trading Community Name Format	Allows the specification of how customer names appear in the application, such as the sequence of first name and last name.
mergeStyle	HZ_MANAGE_TRADING_COMMUNITY_NAME_FORMAT_PRIV	Manage Trading Community Name Format	Allows the specification of how customer names appear in the application, such as the sequence of first name and last name.
createStyle	HZ_MANAGE_TRADING_COMMUNITY_NAME_FORMAT_PRIV	Manage Trading Community Name Format	Allows the specification of how customer names appear in the application, such as the sequence of first name and last name.
getStyle	HZ_MANAGE_TRADING_COMMUNITY_NAME_FORMAT_PRIV	Manage Trading Community Name Format	Allows the specification of how customer names appear in the application, such as the sequence of first name and last name.

Operation Name	Privilege Code	Privilege Name	Privilege Description
processCSStyle	HZ_MANAGE_TRADING_COMMUNITY_NAME_FORMAT_PRIV	Manage Trading Community Name Format	Allows the specification of how customer names appear in the application, such as the sequence of first name and last name.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_NAME_FORMAT_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
HZ_MANAGE_TRADING_COMMUNITY_NAME_FORMAT_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Trading Community Style

The style that uniquely identifies a particular manner or situation for which an entity (address, person name) is to be formatted such as list name, postal address, or bill of lading address.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/styleFormatService/}Style

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Style Format*
Contains	*Trading Community Style Translation*
Handled by	*Trading Community Information Format for Name and Address*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DatabaseObjectName	string	The object for which the style is being defined for.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
StyleCode	string	Code to uniquely identify a style that uniquely identifies a particular manner or situation for which an entity is to be formatted. • Primary Key
StyleCodeTransient	string	Transient style code value.
StyleFormat	*Trading Community Style Format*	Format information in which a name or an address is displayed or rendered for data entry.
StyleName	string	Name of a style that uniquely identifies a particular manner or situation for which an entity is to be formatted.
StyleTranslation	*Trading Community Style Translation*	Language specific style information.

Trading Community Style Format

The format in which a name or an address is displayed or rendered for data entry such as United States postal address format or Canadian postal address format.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/styleFormatService/}StyleFormat

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Style Format Translation*
Contains	*Trading Community Style Format Locale*
Contains	*Trading Community Style Format Variation*
Contained by	*Trading Community Style*
Handled by	*Trading Community Information Format for Name and Address*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
StyleCode	string	Unique code to identify a name or address style.
StyleFormatCode	string	Unique code for style format. • Primary Key
StyleFormatLocale	*Trading Community Style Format Locale*	Location and language specific format.
StyleFormatName	string	Description or comments for style format.
StyleFormatTranslation	*Trading Community Style Format Translation*	Language specific style format information.

Name	Type	Description
StyleFormatVariation	*Trading Community Style Format Variation*	Information about variation in style formats.

Trading Community Style Format Layout

The layout specifies the manner in which name and address elements are displayed or rendered for data entry for a given style format. For example, the first name of a person should be displayed before last name or a street address should be displayed on the first line.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/styleFormatService/}StyleFormatLayout

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Style Format Layout Translation*
Contained by	*Trading Community Style Format Variation*
Contained by	*Trading Community Style Format Locale*
Handled by	*Trading Community Information Format for Name and Address*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttributeCode	string	The component or attribute being laid out.
BlankLinesAfter	int	The number of blank lines to display after the last attribute on a line.
BlankLinesBefore	int	The number of blank lines to display before the first attribute on a line.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DelimiterAfter	string	One or more characters to be placed after the attribute if the attribute is not null.
DelimiterBefore	string	One or more characters to be placed before attribute if attribute is not null.
DisplaySize	int	The maximum display size of the attribute.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LineNumber	int	Line that attribute should be formatted on.
MandatoryFlag	boolean	Flag to indicate if an attribute is mandatory for layout or not.
Position	int	The position on the line that attribute should be placed.
Prompt	string	Label used when displaying the address components.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
StyleFmtLayoutId	long	Unique identifier for style format layout. • Primary Key
StyleFormatCode	string	The style format for variation.
StyleFormatLayoutTranslation	*Trading Community Style Format Layout Translation*	Language specific style format layout information.
TransformFunction	string	Identifies PL/SQL function with optional parameters that must be called to transform attribute.

Name	Type	Description
UppercaseFlag	boolean	A flag to indicate whether attribute should be translated to uppercase.
UseInitialFlag	boolean	A flag to indicate whether only initial character of attribute should be used.
VariationNumber	int	A sequential number within style format to identify variation.

Trading Community Style Format Layout Translation

The language specific or translatable attributes for style format layout such as prompts.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/styleFormatService/}StyleFormatLayoutTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Style Format Layout*
Handled by	*Trading Community Information Format for Name and Address*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Language	string	Indicates the code of the language into which the contents of the translatable columns are translated. • Primary Key

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
Prompt	string	Attribute prompt specific to location, for example Zip Code for US and Postcode for UK.
SourceLang	string	Indicates the code of the language in which the contents of the translatable columns were originally created.
StyleFmtLayoutId	long	Sequence generated unique identifier for style format layout row. • Primary Key

Trading Community Style Format Locale

The country and language for which the style format is applicable such as Canada and French.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/styleFormatService/}StyleFormatLocale

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Style Format Layout*
Contained by	*Trading Community Style Format*
Handled by	*Trading Community Information Format for Name and Address*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LanguageCode	string	Identifies language for location.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
StyleCode	string	Identifies style that format belongs to.
StyleFmtLocaleId	long	The unique identifier for style format location. • Primary Key
StyleFormatCode	string	Identifies style format for location.
StyleFormatLayout	*Trading Community Style Format Layout*	Name of the style format layout.
TerritoryCode	string	Identifies territory for location.

Name	Type	Description
TerritoryCode1	string	Identifies territory for location.
TerritoryShortName	string	Identifies the territory for a location.

Trading Community Style Format Translation

The language specific or translatable attributes for style format such as the format name.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/styleFormatService/}StyleFormatTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Style Format*
Handled by	*Trading Community Information Format for Name and Address*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
Language	string	Indicates the code of the language into which the contents of the translatable columns are translated. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
SourceLang	string	Indicates the code of the language in which the contents of the translatable columns were originally created.
StyleFormatCode	string	Unique code for style format. • Primary Key
StyleFormatName	string	Description or comments for style format.

Trading Community Style Format Variation

The variations of a style format for a given locale such as a French mailing address when mailing to countries within Europe and French mailing address when mailing to countries outside of Europe.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/styleFormatService/}StyleFormatVariation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Style Format Layout*
Contained by	*Trading Community Style Format*
Handled by	*Trading Community Information Format for Name and Address*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
SelectionCondition	string	SQL condition to evaluate whether variation should be used or not.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
StyleFormatCode	string	Identifies style format that variation applies to. • Primary Key
StyleFormatLayout	*Trading Community Style Format Layout*	Name of the style format layout.
VariationNumber	int	Sequential number within style format to identify variation. • Primary Key
VariationRank	int	Rank or sequence that variations should be checked in to determine the one that applies.

Trading Community Style Translation

The language specific or translatable attributes of a style such as the style name.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/styleFormatService/}StyleTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Style*
Handled by	*Trading Community Information Format for Name and Address*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
Language	string	Indicates the code of the language into which the contents of the translatable columns are translated. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row

Name	Type	Description
		is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
SourceLang	string	Indicates the code of the language in which the contents of the translatable columns were originally created.
StyleCode	string	Unique code for style. • Primary Key
StyleName	string	Descriptive style name.

Trading Community Information Format for Phone

A format for phones used to store and display trading community phone information. For example, Oracle's phone number could be formatted as 1 (650) 506 7000.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/phoneFormatService/}PhoneFormatService

Service WSDL URL: https://servername/crmService/PhoneFormatService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Information Format

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Mobile Phone Prefix*
Handles	*Trading Community Phone Format*
Handles	*Phone Area Code*
Handles	*Phone Country Code*

Operations

- *getPhoneCountryCode*
- *createPhoneCountryCode*
- *updatePhoneCountryCode*
- *deletePhoneCountryCode*
- *mergePhoneCountryCode*
- *findPhoneCountryCode*
- *processPhoneCountryCode*
- *processCSPhoneCountryCode*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getPhoneCountryCode

The Get operation for country codes of phone numbers.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
phoneCountryCodeId	long	The unique identifier of the area codes of phone numbers.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/phoneFormatService/}PhoneCountryCodeResul	The country code of phone numbers that matches the inbound key attributes.

createPhoneCountryCode

The Create operation for country codes of phone numbers.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
phoneCountryCode	*Phone Country Code*	The country code of phone numbers to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/phoneFormatService/}PhoneCountryCodeResult	The result of the operation that includes the successfully created phone country code and a list of warning or information messages.

updatePhoneCountryCode

The Update operation for country codes of phone numbers.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
phoneCountryCode	*Phone Country Code*	The country code of phone numbers to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/phoneFormatService/}PhoneCountryCodeResult	The result of the operation that includes the successfully updated phone country code and a list of warning or information messages.

deletePhoneCountryCode

The Delete operation for country codes of phone numbers.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
phoneCountryCode	*Phone Country Code*	The country code of phone numbers to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergePhoneCountryCode

The Merge operation for country codes of phone numbers. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
phoneCountryCode	*Phone Country Code*	The country code of phone numbers to be merged..

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/phoneFormatService/}PhoneCountryCodeResul	The result of the operation that includes the successfully merged phone country codes and a list of warning or information messages.

findPhoneCountryCode

The Find operation for country codes of phone numbers.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Phone Country Code*	The Result of the operation that includes a list of phone country codes that satisfy the inbound criteria and any warning or information messages.

processPhoneCountryCode

The Bulk Load operation for country codes of phone numbers.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action to perform, such as create, update, merge, or delete.
phoneCountryCode	*Phone Country Code*	A list of phone number country codes to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Phone Country Code*	The result of the operation that includes a list of phone country codes that were successfully processed and any warning or information messages.

processCSPhoneCountryCode

An operation to apply the changes back to the data source for Phone Country Code.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object to represent the changes.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created and updated data objects, and all warning and information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name; an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used to evaluate the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined for this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for the service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
processPhoneCountryCode	HZ_MANAGE_TRADING_COMMUNITY_CONTACT_POINT_PRIV	Manage Trading Community Telephone Numbering Plan	Allows the specification of country specific phone numbering plans, which define parameters such as the country codes, the area codes and the length of phone numbers.

Operation Name	Privilege Code	Privilege Name	Privilege Description
findPhoneCountryCode	HZ_MANAGE_TRADING_COMMUNITY_CONTACT_POINT_PRIV	Manage Trading Community Telephone Numbering Plan	Allows the specification of country specific phone numbering plans, which define parameters such as the country codes, the area codes and the length of phone numbers.
mergePhoneCountryCode	HZ_MANAGE_TRADING_COMMUNITY_CONTACT_POINT_PRIV	Manage Trading Community Telephone Numbering Plan	Allows the specification of country specific phone numbering plans, which define parameters such as the country codes, the area codes and the length of phone numbers.
processCSPhoneCountryCode	HZ_MANAGE_TRADING_COMMUNITY_CONTACT_POINT_PRIV	Manage Trading Community Telephone Numbering Plan	Allows the specification of country specific phone numbering plans, which define parameters such as the country codes, the area codes and the length of phone numbers.
updatePhoneCountryCode	HZ_MANAGE_TRADING_COMMUNITY_CONTACT_POINT_PRIV	Manage Trading Community Telephone Numbering Plan	Allows the specification of country specific phone numbering plans, which define parameters such as the country codes, the area codes and the length of phone numbers.
createPhoneCountryCode	HZ_MANAGE_TRADING_COMMUNITY_CONTACT_POINT_PRIV	Manage Trading Community Telephone Numbering Plan	Allows the specification of country specific phone numbering plans, which define parameters such as the country codes, the area codes and the length of phone numbers.
getPhoneCountryCode	HZ_MANAGE_TRADING_COMMUNITY_CONTACT_POINT_PRIV	Manage Trading Community Telephone Numbering Plan	Allows the specification of country specific phone numbering plans, which define parameters such as the country codes, the area codes and the length of phone numbers.
deletePhoneCountryCode	HZ_MANAGE_TRADING_COMMUNITY_CONTACT_POINT_PRIV	Manage Trading Community Telephone Numbering Plan	Allows the specification of country specific phone numbering plans, which define parameters such as the country codes, the area codes and the length of phone numbers.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_CONTACT_POINT_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			consistent financial application setup, rules, and access.
HZ_MANAGE_TRADING_ COMMUNITY_CONTACT_POINT_ PRIV	ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZPM_CHANNEL_MANAGER_ DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_OKC_CONTRACT_ AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_OKC_CONTRACT_ AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_OKC_CONTRACT_SEARCH_ VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_OKC_CONTRACT_SETUP_ DUTY_CRM	Contract Setup	Contract Setup

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Phone Area Code

An area code detail that can be associated with a trading community member's phone number. For example area code for Oracle Corporation is 650.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/phoneFormatService/}PhoneAreaCode

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Phone Country Code*
Handled by	*Trading Community Information Format for Phone*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AreaCode	string	Telephone area code.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
PhoneAreaCodeId	long	Unique identifier for the Phone area codes. • Primary Key
PhoneCountryCode	string	The country code prefix for the phone number.
TerritoryCode	string	Territory or country of the area code.
TimezoneCode	string	Foreign key to FND_TIMEZONES_B.TIMEZONE_CODE.

Phone Country Code

The country code detail that can be associated with a trading community member's phone number. For example country code for Oracle Corporation is 1.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/phoneFormatService/}PhoneCountryCode

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Mobile Phone Prefix*
Contains	*Trading Community Phone Format*
Contains	*Phone Area Code*
Handled by	*Trading Community Information Format for Phone*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AreaCodeLength	decimal	Number of fixed area code digits.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
IntlPrefix	string	International telephone number prefix.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MobilePrefix	*Trading Community Mobile Phone Prefix*	Prefixes for mobile phone numbers.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PhoneAreaCode	*Phone Area Code*	The area code prefix for the phone number.
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneCountryCodeId	long	Unique identifier for the Phone area codes. • Primary Key
PhoneFormat	*Trading Community Phone Format*	Format associated with phone numbers.
PhoneLength	decimal	Number of fixed telephone number digits.
TerritoryCode	string	Foreign key to the FND_TERRITORIES.TERRITORY_CODE.
TimezoneCode	string	Foreign key to FND_TIMEZONES_B.TIMEZONE_CODE.
TrunkPrefix	string	Long distance telephone number prefix.
ValidationProc	string	PL/SQL validation procedure for telephone numbers of this country.

Trading Community Mobile Phone Prefix

The mobile phone number's prefix and carrier information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/phoneFormatService/}MobilePrefix

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Phone Country Code*
Handled by	*Trading Community Information Format for Phone*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Carrier	string	Indicates the carrier information or network information for a mobile prefix.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MobilePrefix	string	Mobile telephone number prefix. • Primary Key

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PhoneCountryCode	string	The country code prefix for the phone number.
TerritoryCode	string	Territory or country of the mobile prefix. • Primary Key

Trading Community Phone Format

The display format for a phone number. For example, specifying 999-999-9999 as the default format for a US phone number.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/phoneFormatService/}PhoneFormat

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Phone Country Code*
Handled by	*Trading Community Information Format for Phone*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AreaCodeSize	long	Size of the area code. Specify the size as 0 if the area code is not included in the phone number.
CountryCodeDisplayFlag	boolean	Indicates if the country code must be displayed with the phone number. Y for displaying the country code, N for not displaying the country code. The default value is N.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
FormatName	string	Descriptive name of the telephone number format style.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PhoneFormatId	long	Unique identifier for the Phone formats. • Primary Key
PhoneFormatStyle	string	Format style for the phone number.
TerritoryCode	string	Foreign key from the HZ_TERRITORIES.TERRITORY_CODE.

Trading Community Location

A postal address, for example, 500 Oracle Parkway, Redwood Shores, CA 94065, USA or Oracle Parkway, Thames Valley Park (TVP), Reading, Berkshire, and RG6 1RA.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/applicationModule/}LocationService

Service WSDL URL: https://servername/crmService/FoundationPartiesLocationService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Location

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Original System Mapping Identifier Additional Information*
Handles	*Trading Community Location Profile Additional Information*
Handles	*Source System Reference*
Handles	*Location Profile*
Handles	*Location Details*
Handles	*Location Locale*

Operations

- *getNearByLocations*
- *getLocation*
- *createLocation*
- *updateLocation*
- *deleteLocation*
- *mergeLocation*
- *findLocation*
- *getLocationByOriginalSystemReference*
- *processLocation*
- *processCSLocation*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getNearByLocations

The Find operation for the trading community classification category.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
latitude	decimal	The latitude of the location.
longitude	decimal	The longitude of the location.
distance	decimal	The distance from the input location.
unitOfMeasure	string	The unit of measure of the distance.

Response Payload

Element Name	Type	Description
result	*Location Details*	The collection of the trading community location SDO that matches the inbound key attributes.

getLocation

The Get operation of the trading community location SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
locationId	long	The unique identifier of the location.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/}LocationResult	The trading community location SDO that matches the inbound key attributes.

createLocation

The Create operation of the trading community location SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
location	*Location Details*	The trading community location SDO to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/}LocationResult	The result of the operation that includes the successfully created trading community location SDO and a list of warning or information messages.

updateLocation

The Update operation of the trading community location SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
location	*Location Details*	The trading community location SDO to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/}LocationResult	The result of the operation that includes the successfully updated trading community location SDO and a list of warning or information messages.

deleteLocation

The Delete operation of the trading community location SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
location	*Location Details*	The trading community location SDO to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergeLocation

The Merge operation of the trading community location SDO. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
location	*Location Details*	The trading community location SDO to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/}LocationResult	The result of the operation that includes the successfully merged trading community location SDO and a list of warning or information messages.

findLocation

The Find operation of the trading community location SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The Find control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Location Details*	The result of the operation that includes a list of the trading community location SDO that satisfy the inbound criteria and any warning or information messages.

getLocationByOriginalSystemReference

The Get operation for trading community location filtered by the source system reference.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindOrigSystem	string	The unique code of the original system.
bindOrigSystemReference	string	The unique identifier of the original system reference.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The Find control. Not currently used.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/}LocationResult	The Get operation for trading community location filtered by the source system reference.

processLocation

The Bulk load operation of the trading community location SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what actions were performed, such as Create, Update, Merge, or Delete.
location	*Location Details*	A list of the trading community location SDO to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Location Details*	The result of the operation that includes a list of the trading community location SDO that were successfully processed and any warning or information messages.

processCSLocation

An operation to apply the changes back to the data source of the trading community location SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object used to represent the changes that were made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created and updated data objects, and all warning and informational messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating the locale-based user interface hints. The localeName is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get a list of service data objects defined for the service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for this service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and The Delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getLocationByOriginalSystemRefere	HZ_VIEW_TRADING_COMMUNITY_LOCATION_PRIV	View Trading Community Location	Allows the invocation of location web services.
processLocation	HZ_UPDATE_TRADING_COMMUNITY_LOCATION_PRIV	Update Trading Community Location	Allows the update of the organization location information. If assigning, also assign the ability to view the trading community location.
processLocation	HZ_ENTER_TRADING_COMMUNITY_LOCATION_PRIV	Enter Trading Community Location	Allows the invocation of location web services. If assigning, also assign the ability to view the trading community location.
deleteLocation	HZ_REMOVE_TRADING_COMMUNITY_LOCATION_PRIV	Remove Trading Community Location	Allows the removal of locations. If assigning, also assign the ability to view the trading community location.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getNearByLocations	HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	View Trading Community Location	Allows the invocation of location web services.
findLocation	HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	View Trading Community Location	Allows the invocation of location web services.
getLocation	HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	View Trading Community Location	Allows the invocation of location web services.
processCSLocation	HZ_UPDATE_TRADING_ COMMUNITY_LOCATION_PRIV	Update Trading Community Location	Allows the update of the organization location information. If assigning, also assign the ability to view the trading community location.
processCSLocation	HZ_ENTER_TRADING_ COMMUNITY_LOCATION_PRIV	Enter Trading Community Location	Allows the invocation of location web services. If assigning, also assign the ability to view the trading community location.
mergeLocation	HZ_UPDATE_TRADING_ COMMUNITY_LOCATION_PRIV	Update Trading Community Location	Allows the update of the organization location information. If assigning, also assign the ability to view the trading community location.
mergeLocation	HZ_ENTER_TRADING_ COMMUNITY_LOCATION_PRIV	Enter Trading Community Location	Allows the invocation of location web services. If assigning, also assign the ability to view the trading community location.
updateLocation	HZ_UPDATE_TRADING_ COMMUNITY_LOCATION_PRIV	Update Trading Community Location	Allows the update of the organization location information. If assigning, also assign the ability to view the trading community location.
createLocation	HZ_ENTER_TRADING_ COMMUNITY_LOCATION_PRIV	Enter Trading Community Location	Allows the invocation of location web services. If assigning, also assign the ability to view the trading community location.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_HEQ_APPLICANT_JOB	Applicant	Individual applying for admissions to a higher education institution, such as a college or university.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			The role would be assigned to a user prior to being accepted After acceptance they would become a student.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_HEY_STUDENT_RECRUITER_ JOB	Student Recruiter	Individual responsible for recruiting prospective students.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_HER_ACADEMIC_ COORDINATOR_JOB	Academic Coordinator	Individual responsible for managing the academic offerings of a school or department within a university, including: marketing and promoting the program, recruiting students, and creating, approving, and maintaining programs and course offerings, instructor assignments and hiring, and so on.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_ ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCH_TRADING_ COMMUNITY_DATA_STEWARD_ JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_ REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			builds pipeline, manages leads and opportunities and performs sales forecasting.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_HRC_HUMAN_CAPITAL_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Human Capital Management Application Administrator	Configures the Oracle Fusion Global Human Resources application and has access to all duty roles necessary to implement the Compensation, Workforce Deployment, and Workforce Development offerings.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_HEY_STUDENT_SERVICES_ MANAGER_JOB	Student Services Manager	Manages student services and personal information.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_HEY_ORGANIZATION_ DETAIL_MAINTENANCE_DUTY_ CRM	(OBSOLETE) Organization Detail Maintenance	This duty role has been obsoleted. Do not use.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_IEX_COLLECTIONS_AGENT_ DUTY_CRM	Collections Management Basic	Allows user to perform activities in Collections.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_HES_STUDENT_ SPONSORSHIP_ADMINISTRATOR_ JOB	Student Sponsorship Administrator	Individual responsible for managing the administration of student sponsorship agreements.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_HEQ_ADMISSIONS_ COORDINATOR_JOB	Admissions Coordinator	Individual responsible for coordinating student admissions.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_HEQ_ADMISSIONS_ MANAGER_JOB	Admissions Manager	Individual responsible for managing the operations of the student admissions office.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_HER_REGISTRAR_JOB	Registrar	Provides leadership to plan, organize, and manage all of the activities related to the Records and Registration Department, including serving as the official authorized keeper of the university's student records in a higher education setting.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_HES_BURSAR_JOB	Bursar	Manages all student receivable activities, including defining policy and controls, establishing processes and procedures, resolving issues, monitoring and analyzing accounts receivable balances, and creating reports and business intelligence.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_HEY_STUDENT_JOB	Student	Enrolls in a program of study and pays the fees.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_RESTRICTED_ USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_HEQ_ADMISSIONS_ APPLICATION_MAINTENANCE_ DUTY_CRM	(OBSOLETE) Admissions Application Maintenance	This duty role has been obsoleted. Do not use.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_POR_REQUISITION_SELF_ SERVICE_USER_DUTY_CRM	Requisition Self Service User	Manages requisitions including creating, searching, and viewing requisitions, creating noncatalog requests, creating requisitions with one-time locations, and changing deliver-to locations on requisition lines.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
HZ_VIEW_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_UPDATE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_HRC_HUMAN_CAPITAL_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Human Capital Management Application Administrator	Configures the Oracle Fusion Global Human Resources application and has access to all duty roles necessary to implement the Compensation, Workforce Deployment, and Workforce Development offerings.
HZ_UPDATE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
HZ_UPDATE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_UPDATE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_UPDATE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_ ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
HZ_UPDATE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCH_TRADING_ COMMUNITY_DATA_STEWARD_ JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_UPDATE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
HZ_UPDATE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_ REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
HZ_UPDATE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			assists salespersons in closing deals.
HZ_UPDATE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
HZ_UPDATE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
HZ_ENTER_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_HRC_HUMAN_CAPITAL_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Human Capital Management Application Administrator	Configures the Oracle Fusion Global Human Resources application and has access to all duty roles necessary to implement the Compensation, Workforce Deployment, and Workforce Development offerings.
HZ_ENTER_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
HZ_ENTER_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_ENTER_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_ENTER_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_ ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_ENTER_TRADING_COMMUNITY_LOCATION_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_ENTER_TRADING_COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
HZ_ENTER_TRADING_COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
HZ_ENTER_TRADING_COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
HZ_ENTER_TRADING_COMMUNITY_LOCATION_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
HZ_ENTER_TRADING_COMMUNITY_LOCATION_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
HZ_REMOVE_TRADING_COMMUNITY_LOCATION_PRIV	ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Human Capital Management Application Administrator	Configures the Oracle Fusion Global Human Resources application and has access to all duty roles necessary to implement the Compensation, Workforce Deployment, and Workforce Development offerings.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_REMOVE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
HZ_REMOVE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_REMOVE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_REMOVE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_ ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
HZ_REMOVE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCH_TRADING_ COMMUNITY_DATA_STEWARD_ JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_REMOVE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
HZ_REMOVE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_ REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
HZ_REMOVE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
HZ_REMOVE_TRADING_ COMMUNITY_LOCATION_PRIV	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
HZ_REMOVE_TRADING_COMMUNITY_LOCATION_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_BEN_BENEFITS_IMPLEMENTATION_DUTY_CRM	Benefits Management Implementer	Manages benefits implementation setup using the Oracle Fusion Functional Setup Manager.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_HER_ACADEMIC_COORDINATOR_JOB	ORA_IBY_CUSTOMER_PAYMENT_INSTRUMENT_MANAGEMENT_DUTY_CRM	Customer Payment Instrument Management	Manages customer bank accounts and credit cards and other payment details.
ORA_HES_BURSAR_JOB	ORA_IBY_CUSTOMER_PAYMENT_INSTRUMENT_MANAGEMENT_DUTY_CRM	Customer Payment Instrument Management	Manages customer bank accounts and credit cards and other payment details.
ORA_HER_REGISTRAR_JOB	ORA_IBY_CUSTOMER_PAYMENT_INSTRUMENT_MANAGEMENT_DUTY_CRM	Customer Payment Instrument Management	Manages customer bank accounts and credit cards and other payment details.
ORA_HEQ_ADMISSIONS_COORDINATOR_JOB	ORA_IBY_CUSTOMER_PAYMENT_INSTRUMENT_MANAGEMENT_DUTY_CRM	Customer Payment Instrument Management	Manages customer bank accounts and credit cards and other payment details.
ORA_HEQ_ADMISSIONS_MANAGER_JOB	ORA_IBY_CUSTOMER_PAYMENT_INSTRUMENT_MANAGEMENT_DUTY_CRM	Customer Payment Instrument Management	Manages customer bank accounts and credit cards and other payment details.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_READ_ONLY_DUTY	Lead Registration Processing Read Only	Read Only role for Lead Registration Processing Duty.
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_PER_USER_NAME_CREATION_AND_LINKING_DUTY_CRM	Link User Name to Person	Creates a new user name or links an existing user name for a person.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			submit deal registrations and view updates.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_PAY_PAYROLL_IMPLEMENTATION_DUTY_CRM	Payroll Implementation	Manages complete payroll setup and maintenance.
ORA_HRC_HUMAN_CAPITAL_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_PAY_PAYROLL_IMPLEMENTATION_VIEW_DUTY_CRM	Payroll Implementation View	Views complete payroll setup.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			products or events to specific customers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_READ_ONLY_DUTY	Personal Campaign Management Read Only	Read Only role for Personal Campaign Management Duty.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_READ_ONLY_DUTY	Product Recommendation Analysis Read Only	Read Only role for Product Recommendation Analysis Duty
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_READ_ONLY_DUTY	Sales Forecasting Management Read Only	Read Only role for Sales Forecasting Management Duty.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_READ_ONLY_DUTY	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			duties include view access to other customer and sales lead features.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_READ_ONLY_DUTY	Territory Management Read Only	Read Only role for Territory Management Duty.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Location Details

The details about a geographical or physical location. For example, 500 Oracle Parkway, Redwood Shores, CA 94065.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/}Location

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Location Profile Additional Information*
Contains	*Location Locale*
Contains	*Source System Reference*
Contains	*Location Profile*
Handled by	*Trading Community Location*
Handled by	*Company and User Registration*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddrElementAttribute1	string	The additional address element to support flexible address format.
AddrElementAttribute2	string	The additional address element to support flexible address format.
AddrElementAttribute3	string	The additional address element to support flexible address format.
AddrElementAttribute4	string	The additional address element to support flexible address format.
AddrElementAttribute5	string	The additional address element to support flexible address format.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AddressEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address becomes effective.
AddressExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address is no longer active.
AddressLinesPhonetic	string	The phonetic or kana representation of the Kanji address lines (used in Japan).
AddressStyle	string	The context value for Flexible Address Format descriptive flex field. Do not use this column, join to the FND_TERRITORIES table via COUNTRY = TERRITORY_CODE to retrieve the address style for the country.
Building	string	The specific building name or number at a given address.
City	string	The name of the city.
CliiCode	string	Common Language Location Identifier (CLLI) code.

Name	Type	Description
Comments	string	The comments for the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
Description	string	The free text description of the record.
Distance	decimal	The distance from the input location.
DoNotValidateFlag	boolean	Indicates that a particular location should not validated, regardless of the current validation status code. If the value is Yes, then the location is not validated. The default is No.
EffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the location becomes valid.
FaLocationId	long	Foreign key to the FA_LOCATIONS table.
FloorNumber	string	The floor number of the address.
GeometryStatusCode	string	The spatial data integration status for given location.
HouseType	string	Indicates the building type for the building in the address. A list of valid values are defined in the lookup HZ_HOUSE_TYPE.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
Language	string	The language used in the location.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	The latitude information for the address. The latitude information for the location is used for spatial proximity and containment purposes.
LocationDirections	string	The directions to the address location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table. • Primary Key
LocationInformation	*Trading Community Location Profile Additional Information*	The detailed information about the location.
LocationLocale	*Location Locale*	The location or address information in the local language.
LocationProfile	*Location Profile*	The profile information of the location.
Longitude	decimal	The longitude information for the address. The longitude information for the location is used for spatial proximity and containment purposes.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
Position	string	The primary direction such as North or East that is used to access the location.

Name	Type	Description
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four-digit extension to the United States Postal ZIP code for the address.
Province	string	The name of the province.
RequestId	long	A system-generated read-only attribute used by the application framework.
SalesTaxGeocode	string	The US Sales Tax Jurisdiction code. This provides a Jurisdiction Code (also called as Geocode) defined by either Vertex or Taxware. This value is passed as a ship-to location jurisdiction code to the tax partner API.
SalesTaxInsideCityLimits	string	Indicates if the location is inside the boundary of a city. Used to calculate state and local taxes in the United States. If the value is 1, then the location is within city limits.
ShortDescription	string	The short description of the location.
State	string	The name of the state.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TimezoneCode	string	The code of the time zone for the location.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	A standardized status code describing the results of the validation. The value is internally set by system during address cleansing.

Location Locale

The details about a location or address in the local language.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/}LocationLocale

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Location Details*
Handled by	*Trading Community Location*
Handled by	*Company and User Registration*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddrElementAttribute1	string	The additional address element to support flexible address format.
AddrElementAttribute2	string	The additional address element to support flexible address format.
AddrElementAttribute3	string	The additional address element to support flexible address format.
AddrElementAttribute4	string	The additional address element to support flexible address format.
AddrElementAttribute5	string	The additional address element to support flexible address format.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
Building	string	The specific building name or number at a given address in the local language.

Name	Type	Description
City	string	The name of the city.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FloorNumber	string	The floor number of the address in the local language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four-digit extension to the United States Postal ZIP code for the address.
Province	string	The name of the province.
State	string	The name of the state.
TransliterationLang	string	The language used to define the address elements of the location. The list of accepted values are defined in the FND_LANGUAGES.LANGUAGE_COD lookup.

Location Profile

The profile information of a location.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/}LocationProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Location Details*
Handled by	*Trading Community Location*
Handled by	*Company and User Registration*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddrElementAttribute1	string	The additional address element to support flexible address format.
AddrElementAttribute2	string	The additional address element to support flexible address format.
AddrElementAttribute3	string	The additional address element to support flexible address format.
AddrElementAttribute4	string	The additional address element to support flexible address format.
AddrElementAttribute5	string	The additional address element to support flexible address format.
Address1	string	The first line of the address.
Address2	string	The second line of the address.

Name	Type	Description
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
Building	string	The specific building name or number at a given address.
City	string	The name of the city.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	Indicates whether the row has the latest change in the day. If the value is True, then this row has the latest change in the day.
EffectiveSequence	int	The order of the different changes made during the day. The lowest value represents the earliest change in the day.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
FloorNumber	string	The floor number of the address.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
LocationProfileId	long	The unique Identifier for a location profile. • Primary Key
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PostalCode	string	The postal code element of the address.
Province	string	The name of the province.
RequestId	long	A system-generated read-only attribute used by the application framework.
State	string	The name of the state.
ValidationSstFlag	boolean	Indicates if the location information has been validated. If the value is Y, then the location has been validated.
ValidationStatusCode	string	A standardized status code describing the results of the validation. The value is internally set by system during address cleansing.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*

Relationship Type	Object or Service
Contained by	*Location Details*
Contained by	*Household*
Contained by	*Contact Preference*
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*
Contained by	*Trading Community Address Purpose*
Contained by	*Telex*
Contained by	*Phone*
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*
Contained by	*Trading Community Person Details*
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*
Contained by	*Trading Community Customer Account Site Use*

Relationship Type	Object or Service
Contained by	*Relationship*
Contained by	*Electronic Data Interchange*
Contained by	*Trading Community Customer Account or Site Role*
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*

Relationship Type	Object or Service
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key

Name	Type	Description
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Trading Community Location Profile Additional Information

The physical location information of a trading community member. For example 300 Oracle Parkway, Redwood Shore, CA.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/location/}LocationInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Location Details*
Handled by	*Trading Community Location*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*

Relationship Type	Object or Service
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.

Name	Type	Description
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Member Name and Identifier

A configuration of name and identifier types that is associated with trading community members. For example, legal name, DBA name, passport number, and driver's license number.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/nameAndIdTypeService/applicationModule/}NameAndIdTypeService

Service WSDL URL: https://servername/crmService/NameAndIdTypeService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Member Name and Identifier Setup

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Additional Name and Identifier Type*
Handles	*Trading Community Additional Name and Identifier Type Translation*

Operations

- *getNameAndIdType*
- *createNameAndIdType*
- *updateNameAndIdType*
- *deleteNameAndIdType*
- *mergeNameAndIdType*
- *findNameAndIdType*
- *processNameAndIdType*
- *processCSNameAndIdType*

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getNameAndIdType

The Get operation for trading community additional name and identifier type.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
typeCode	string	The Get operation for the trading community additional name and the identifier type for the type code provided as input.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/nameAndIdTypeService/}NameAndIdTypeResult	The trading community additional name and the identifier type that matches the inbound key attributes.

createNameAndIdType

The Create operation for trading community additional name and identifier type.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
nameAndIdType	*Trading Community Additional Name and Identifier Type*	The trading community additional name and identifier type to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/nameAndIdTypeService/}NameAndIdTypeResult	The result of the operation that includes the successfully created trading community additional name and identifier type and a list of warning or information messages.

updateNameAndIdType

The Update operation for trading community additional name and identifier type.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
nameAndIdType	*Trading Community Additional Name and Identifier Type*	The trading community additional name and identifier type to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/nameAndIdTypeService/}NameAndIdTypeResult	The result of the operation that includes the successfully updated trading community additional name and identifier type and a list of warning or information messages.

deleteNameAndIdType

The Delete operation for trading community additional name and identifier type.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
nameAndIdType	*Trading Community Additional Name and Identifier Type*	The trading community additional name and identifier type to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergeNameAndIdType

The Merge operation for the trading community additional name and the identifier type. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
nameAndIdType	*Trading Community Additional Name and Identifier Type*	The trading community additional name and identifier type to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/nameAndIdTypeService/}NameAndIdTypeResult	The result of the operation that includes the successfully merged trading community additional name and identifier type and a list of warning or information messages.

findNameAndIdType

The Find operation for trading community additional name and identifier type.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Trading Community Additional Name and Identifier Type*	The result of the operation that includes a list of trading community additional name and identifier type that satisfy the inbound criteria and any warning or information messages.

processNameAndIdType

The Bulk Load operation for trading community additional name and identifier type.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action to perform, such as create, update, merge, or delete.
nameAndIdType	*Trading Community Additional Name and Identifier Type*	A list of trading community additional name and identifier type to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Trading Community Additional Name and Identifier Type*	The result of the operation that includes a list of trading community additional name and identifier type that were successfully processed and any warning or information messages.

processCSNameAndIdType

An operation to apply the changes back to the data source for the trading community additional name and the identifier type.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object to represent the changes.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created and updated data objects, and all warning and information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name; an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used to evaluate the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

Element Name	Type	Description

getEntityList

An operation to get the list of service data objects defined for this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for the service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
deleteNameAndIdType	HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_IDENTIFIER_PRIV	Manage Trading Community Member Name and Identifier Setup for Identifier	Allows the specification of additional identifier types for organizations and persons in your business community, such as passport number and social security number.
deleteNameAndIdType	HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_NAME_PRIV	Manage Trading Community Member Name and Identifier Setup for Name	Allows the specification of additional name types for organizations and persons in your business community, such as Doing Business As Name and Legal Name.
getNameAndIdType	HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_IDENTIFIER_PRIV	Manage Trading Community Member Name and Identifier Setup for Identifier	Allows the specification of additional identifier types for organizations and persons in your business community, such as passport number and social security number.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getNameAndIdType	HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_NAME_PRIV	Manage Trading Community Member Name and Identifier Setup for Name	Allows the specification of additional name types for organizations and persons in your business community, such as Doing Business As Name and Legal Name.
mergeNameAndIdType	HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_IDENTIFIER_PRIV	Manage Trading Community Member Name and Identifier Setup for Identifier	Allows the specification of additional identifier types for organizations and persons in your business community, such as passport number and social security number.
mergeNameAndIdType	HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_NAME_PRIV	Manage Trading Community Member Name and Identifier Setup for Name	Allows the specification of additional name types for organizations and persons in your business community, such as Doing Business As Name and Legal Name.
findNameAndIdType	HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_IDENTIFIER_PRIV	Manage Trading Community Member Name and Identifier Setup for Identifier	Allows the specification of additional identifier types for organizations and persons in your business community, such as passport number and social security number.
findNameAndIdType	HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_NAME_PRIV	Manage Trading Community Member Name and Identifier Setup for Name	Allows the specification of additional name types for organizations and persons in your business community, such as Doing Business As Name and Legal Name.
processCSNameAndIdType	HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_IDENTIFIER_PRIV	Manage Trading Community Member Name and Identifier Setup for Identifier	Allows the specification of additional identifier types for organizations and persons in your business community, such as passport number and social security number.
processCSNameAndIdType	HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_NAME_PRIV	Manage Trading Community Member Name and Identifier Setup for Name	Allows the specification of additional name types for organizations and persons in your business community, such as Doing Business As Name and Legal Name.
processNameAndIdType	HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_IDENTIFIER_PRIV	Manage Trading Community Member Name and Identifier Setup for Identifier	Allows the specification of additional identifier types for organizations and persons in your business community, such as passport number and social security number.

Operation Name	Privilege Code	Privilege Name	Privilege Description
processNameAndIdType	HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_NAME_PRIV	Manage Trading Community Member Name and Identifier Setup for Name	Allows the specification of additional name types for organizations and persons in your business community, such as Doing Business As Name and Legal Name.
updateNameAndIdType	HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_IDENTIFIER_PRIV	Manage Trading Community Member Name and Identifier Setup for Identifier	Allows the specification of additional identifier types for organizations and persons in your business community, such as passport number and social security number.
updateNameAndIdType	HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_NAME_PRIV	Manage Trading Community Member Name and Identifier Setup for Name	Allows the specification of additional name types for organizations and persons in your business community, such as Doing Business As Name and Legal Name.
createNameAndIdType	HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_IDENTIFIER_PRIV	Manage Trading Community Member Name and Identifier Setup for Identifier	Allows the specification of additional identifier types for organizations and persons in your business community, such as passport number and social security number.
createNameAndIdType	HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_NAME_PRIV	Manage Trading Community Member Name and Identifier Setup for Name	Allows the specification of additional name types for organizations and persons in your business community, such as Doing Business As Name and Legal Name.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_NAME_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_NAME_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_IDENTIFIER_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
HZ_MANAGE_TRADING_COMMUNITY_MEMBER_NAME_AND_IDENTIFIER_SETUP_FOR_IDENTIFIER_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Trading Community Additional Name and Identifier Type

An additional name and identifier type that can be associated with a trading community member. For example, a passport number for a person or a D-U-N-S number for an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/nameAndIdTypeService/}NameAndIdType

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Additional Name and Identifier Type Translation*
Handled by	*Trading Community Member Name and Identifier*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
NameAndIdTypeTranslation	*Trading Community Additional Name and Identifier Type Translation*	Language specific name or identifier type.
NameTypeIndicator	string	Qualifier to indicate name or identifier.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TypeCode	string	Unique identifier for the party identifier and name type. • Primary Key
TypeName	string	Unique name for the name or identifier type.
TypeOfParty	string	The party type that the name or identifier is associated with.
UniqueWithinTypeFlag	boolean	Flag to indicate if this is unique within this type.

Trading Community Additional Name and Identifier Type Translation

An additional name or identifier type in a local language. For example, configure local language name in French or an alias in Japanese.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/nameAndIdTypeService/}NameAndIdTypeTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Additional Name and Identifier Type*
Handled by	*Trading Community Member Name and Identifier*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
Language	string	Indicates the code of the language into which the contents of the translatable columns are translated. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
SourceLang	string	Indicates the code of the language in which the contents of the translatable columns were originally created.

Name	Type	Description
TypeCode	string	Foreign key to _B table. • Primary Key
TypeName	string	Used for display. Needs to be unique.

Trading Community Member Usage

A configuration of information regarding how each trading community member is used in the deploying company's business processes. For example, usages could be customer and supplier.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyUsageService/applicationModule/}PartyUsageService

Service WSDL URL: https://servername/crmService/PartyUsageService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Member Usage Setup

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Party Usage*
Handles	*Trading Community Party Usage Filter Rule*
Handles	*Trading Community Party Usage Filter Rule Translation*
Handles	*Trading Community Party Usage Rule*
Handles	*Trading Community Party Usage Translation*
Handles	*Trading Community Party Usage Filter Rule Soft Exclusion*
Handles	*Trading Community Party Usage Filter Rule Member*

Operations

- *getPartyUsage*
- *createPartyUsage*
- *updatePartyUsage*
- *deletePartyUsage*
- *mergePartyUsage*
- *findPartyUsage*
- *processPartyUsage*
- *processCSPartyUsage*
- *getPartyUsageFilterRule*
- *createPartyUsageFilterRule*
- *updatePartyUsageFilterRule*
- *deletePartyUsageFilterRule*
- *mergePartyUsageFilterRule*
- *findPartyUsageFilterRule*
- *processPartyUsageFilterRule*
- *processCSPartyUsageFilterRule*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getPartyUsage

The Get operation for trading community party usage.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsageCode	string	The get operation of the trading community party usage for the given party usage code.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/partyUsageService/}PartyUsageResult	The trading community party usage that matches the inbound key attributes.

createPartyUsage

The Create operation for trading community party usage.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsage	*Trading Community Party Usage*	The trading community party usage to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/partyUsageService/}PartyUsageResult	The result of the operation that includes the successfully created trading community party usage and a list of warning or information messages.

updatePartyUsage

The Update operation for trading community party usage.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsage	*Trading Community Party Usage*	The trading community party usage to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/partyUsageService/}PartyUsageResult	The result of the operation that includes the successfully updated trading community party usage and a list of warning or information messages.

deletePartyUsage

The Delete operation for trading community party usage.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsage	*Trading Community Party Usage*	The trading community party usage to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergePartyUsage

The Merge operation for the trading community party usage. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsage	*Trading Community Party Usage*	The trading community party usage to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/partyUsageService/}PartyUsageResult	The result of the operation that includes a list of trading community additional name and identifier type that were successfully merged and any warning or information messages.

findPartyUsage

The Find operation for trading community party usage.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Trading Community Party Usage*	The result of the operation that includes a list of trading community party usage that satisfy the inbound criteria and any warning or information messages.

processPartyUsage

The Bulk Load operation for trading community party usage.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action to perform, such as create, update, merge, or delete.
partyUsage	*Trading Community Party Usage*	A list of trading community party usage to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Trading Community Party Usage*	The result of the operation that includes a list of trading community additional name and identifier type that were successfully processed and any warning or information messages.

processCSPartyUsage

An operation to apply the changes back to the data source for trading community party usage.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object to represent the changes.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created and updated data objects, and all warning and information messages.

getPartyUsageFilterRule

The Get operation for trading community party usage filter rule.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsageFrId	long	The get operation of the trading community party usage filter rule for the given party usage filter rule identifier.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/partyUsageService/}PartyUsageFilterRuleResult	The trading community party usage filter rule that matches the inbound key attributes.

createPartyUsageFilterRule

The Create operation for trading community party usage filter rule.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsageFilterRule	*Trading Community Party Usage Filter Rule*	The trading community party usage filter rule to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/partyUsageService/}PartyUsageFilterRuleResult	The result of the operation that includes the successfully created trading community party usage filter rule and a list of warning or information messages.

updatePartyUsageFilterRule

The Update operation for trading community party usage filter rule.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsageFilterRule	*Trading Community Party Usage Filter Rule*	The trading community party usage filter rule to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/partyUsageService/}PartyUsageFilterRuleResult	The result of the operation that includes the successfully updated trading community party usage filter rule and a list of warning or information messages.

deletePartyUsageFilterRule

The Delete operation for trading community party usage filter rule.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsageFilterRule	*Trading Community Party Usage Filter Rule*	The trading community party usage filter rule to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when deleting the object.

mergePartyUsageFilterRule

The Merge operation for trading community party usage filter rule. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsageFilterRule	*Trading Community Party Usage Filter Rule*	The trading community party usage filter rule to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/partyUsageService/}PartyUsageFilterRuleResult	The result of the operation that includes the successfully merged trading community party usage filter rule and a list of warning or information messages.

findPartyUsageFilterRule

The Find operation for trading community party usage filter rule.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Trading Community Party Usage Filter Rule*	The result of the operation that includes a list of trading community party usage filter rule that satisfy the inbound criteria and any warning or information messages.

processPartyUsageFilterRule

The Bulk Load operation for trading community party usage filter rule.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action to perform, such as create, update, merge, or delete.
partyUsageFilterRule	*Trading Community Party Usage Filter Rule*	A list of the trading community party usage filter rules to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Trading Community Party Usage Filter Rule*	The result of the operation that includes a list of trading community party usage filter rule that were successfully processed and any warning or information messages.

processCSPartyUsageFilterRule

An operation to apply the changes back to the data source for trading community party usage filter rule.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object to represent the changes.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created and updated data objects, and all warning and information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name; an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used to evaluate the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined for this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for the service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getPartyUsageFilterRule	HZ_MANAGE_TRADING_COMMUNITY_PARTY_USAGE_FILTER_RULE_INFORMATION_PRIV	Manage Trading Community Party Usage Filter Rule Information	Allows the specification of filter rules to include or exclude usages for searching parties.
processCSPartyUsageFilterRule	HZ_MANAGE_TRADING_COMMUNITY_PARTY_USAGE_FILTER_RULE_INFORMATION_PRIV	Manage Trading Community Party Usage Filter Rule Information	Allows the specification of filter rules to include or exclude usages for searching parties.
findPartyUsage	HZ_MANAGE_TRADING_COMMUNITY_PARTY_USAGE_PRIV	Manage Trading Community Party Usage	Allows the specification of party usages for persons or organizations. Define rules for usage availability when defining parties, and as the party transitions through a lifecycle.
processCSPartyUsage	HZ_MANAGE_TRADING_COMMUNITY_PARTY_USAGE_PRIV	Manage Trading Community Party Usage	Allows the specification of party usages for persons or organizations. Define rules for usage availability when defining parties, and as the party transitions through a lifecycle.
findPartyUsageFilterRule	HZ_MANAGE_TRADING_COMMUNITY_PARTY_USAGE_FILTER_RULE_INFORMATION_PRIV	Manage Trading Community Party Usage Filter Rule Information	Allows the specification of filter rules to include or exclude usages for searching parties.
updatePartyUsageFilterRule	HZ_MANAGE_TRADING_COMMUNITY_PARTY_USAGE_FILTER_RULE_INFORMATION_PRIV	Manage Trading Community Party Usage Filter Rule Information	Allows the specification of filter rules to include or exclude usages for searching parties.
getPartyUsage	HZ_MANAGE_TRADING_COMMUNITY_PARTY_USAGE_PRIV	Manage Trading Community Party Usage	Allows the specification of party usages for persons or organizations. Define rules for usage availability when defining parties, and as the party transitions through a lifecycle.
deletePartyUsage	HZ_MANAGE_TRADING_COMMUNITY_PARTY_USAGE_PRIV	Manage Trading Community Party Usage	Allows the specification of party usages for persons or organizations. Define rules for usage availability when defining parties, and as the party transitions through a lifecycle.
updatePartyUsage	HZ_MANAGE_TRADING_COMMUNITY_PARTY_USAGE_PRIV	Manage Trading Community Party Usage	Allows the specification of party usages for persons or organizations. Define rules for usage availability when defining parties, and as the party transitions through a lifecycle.
mergePartyUsage	HZ_MANAGE_TRADING_COMMUNITY_PARTY_USAGE_PRIV	Manage Trading Community Party Usage	Allows the specification of party usages for persons or

Operation Name	Privilege Code	Privilege Name	Privilege Description
			organizations. Define rules for usage availability when defining parties, and as the party transitions through a lifecycle.
deletePartyUsageFilterRule	HZ_MANAGE_TRADING_ COMMUNITY_PARTY_USAGE_ FILTER_RULE_INFORMATION_PRIV	Manage Trading Community Party Usage Filter Rule Information	Allows the specification of filter rules to include or exclude usages for searching parties.
createPartyUsageFilterRule	HZ_MANAGE_TRADING_ COMMUNITY_PARTY_USAGE_ FILTER_RULE_INFORMATION_PRIV	Manage Trading Community Party Usage Filter Rule Information	Allows the specification of filter rules to include or exclude usages for searching parties.
processPartyUsageFilterRule	HZ_MANAGE_TRADING_ COMMUNITY_PARTY_USAGE_ FILTER_RULE_INFORMATION_PRIV	Manage Trading Community Party Usage Filter Rule Information	Allows the specification of filter rules to include or exclude usages for searching parties.
createPartyUsage	HZ_MANAGE_TRADING_ COMMUNITY_PARTY_USAGE_PRIV	Manage Trading Community Party Usage	Allows the specification of party usages for persons or organizations. Define rules for usage availability when defining parties, and as the party transitions through a lifecycle.
processPartyUsage	HZ_MANAGE_TRADING_ COMMUNITY_PARTY_USAGE_PRIV	Manage Trading Community Party Usage	Allows the specification of party usages for persons or organizations. Define rules for usage availability when defining parties, and as the party transitions through a lifecycle.
mergePartyUsageFilterRule	HZ_MANAGE_TRADING_ COMMUNITY_PARTY_USAGE_ FILTER_RULE_INFORMATION_PRIV	Manage Trading Community Party Usage Filter Rule Information	Allows the specification of filter rules to include or exclude usages for searching parties.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_ COMMUNITY_PARTY_USAGE_PRIV	ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
HZ_MANAGE_TRADING_ COMMUNITY_PARTY_USAGE_PRIV	ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_PARTY_USAGE_FILTER_RULE_INFORMATION_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
HZ_MANAGE_TRADING_COMMUNITY_PARTY_USAGE_FILTER_RULE_INFORMATION_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Trading Community Party Usage

The usage associated with a trading community member. For example, a customer or a contact usage.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyUsageService/}PartyUsage

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Party Usage Rule*
Contains	*Trading Community Party Usage Translation*
Handled by	*Trading Community Member Usage*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyUsageAssignmentDescription	string	The description of the business event that drives the party usage assignment.
PartyUsageAssignmentRule	*Trading Community Party Usage Rule*	Rule for assignment for a party usage.
PartyUsageCode	string	The usage context of a party's contact point. • Primary Key
PartyUsageName	string	Name of the party usage.
PartyUsageTranslation	*Trading Community Party Usage Translation*	Language specific party usage.
PartyUsageType	string	Party type that the usage pertains to.
PartyUsageUnassignmentDescription	string	The description of the business event that drives the party usage unassignment.
RelationshipCausesAssignmentFlag	boolean	Flag to indicate if usage can be assigned to a party by a create relationship event.
RestrictManualAssignFlag	boolean	Indicates if usage can be assigned only implicitly through identified business events and not directly through other features.
RestrictManualUpdateFlag	boolean	Indicates if usage can be updated only implicitly through identified business events and not directly through other features.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
UncondAssignFlag	boolean	Flag to indicate whether the assignment can be done from UI/Bulk Import by directly exposing the usages.

Name	Type	Description

Trading Community Party Usage Filter Rule

The filter rule that is a collection of related party usages. For example, a filter rule called All Organization Contacts includes sales contact, supplier contact, and so on.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyUsageService/}PartyUsageFilterRule

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Party Usage Filter Rule Translation*
Contains	*Trading Community Party Usage Filter Rule Member*
Handled by	*Trading Community Member Usage*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CompiledStatus	string	Indicator of whether or not the compiled sql is up to date.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyUsageFRTranslation	*Trading Community Party Usage Filter Rule Translation*	The language specific party usage filter rule translation.
PartyUsageFilterRuleMember	*Trading Community Party Usage Filter Rule Member*	The member of the party usage filter rule.
PartyUsageFrCode	string	The code for the party usage filter rule.
PartyUsageFrId	long	The identifier for the party usage filter rule. • Primary Key
PartyUsageFrName	string	Name of the party usage filter rule.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Trading Community Party Usage Filter Rule Member

The party usage that is a member in a filter rule by being included in the filter rule definition. For example, a rule could include customers and suppliers, but exclude partners.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyUsageService/}PartyUsageFilterRuleMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Party Usage Filter Rule Soft Exclusion*
Contained by	*Trading Community Party Usage Filter Rule*

Relationship Type	Object or Service
Handled by	*Trading Community Member Usage*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyUsageAsgSelCrteria	string	The selection criteria for the party usage assignment. Indicates if the selection includes active, not active, or both types of party usage assignments.
PartyUsageCode	string	The usage context of a party's contact point.
PartyUsageFilterRuleSoftExclusion	*Trading Community Party Usage Filter Rule Soft Exclusion*	A soft excluded party usage in a filter rule.
PartyUsageFrId	long	The identifier for the party usage filter rule.
PartyUsageFrMemId	long	The member identifier for the party usage filter rule. • Primary Key
PartyUsageFrMemType	string	The member types for the party usage filter rule.

Trading Community Party Usage Filter Rule Soft Exclusion

The rule that stipulates soft exclusions from a party usage filter rule. For example a partner contact can be excluded from a filter rule meant for customer contacts.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyUsageService/}PartyUsageFilterRuleSoftExclusion

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Party Usage Filter Rule Member*
Handled by	*Trading Community Member Usage*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyUsageCode	string	The usage context of a party's contact point.

Name	Type	Description
PartyUsageFrId	long	Unique identifier for the party usage filter rule.
PartyUsageFrMemId	long	The member Identifier for the party usage filter rule.
SoftExclusionId	long	The identifier for the party usage filter rule soft exclusion. • Primary Key

Trading Community Party Usage Filter Rule Translation

The filter rule information in a local language.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyUsageService/}PartyUsageFRTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Party Usage Filter Rule*
Handled by	*Trading Community Member Usage*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
Language	string	Indicates the code of the language into which the contents of the translatable columns are translated.

Name	Type	Description
		• Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyUsageFrId	long	The identifier for the party usage filter rule. • Primary Key
PartyUsageFrName	string	Name of the party usage filter rule.
SourceLang	string	Indicates the code of the language in which the contents of the translatable columns were originally created.

Trading Community Party Usage Rule

The rule that stipulates how party usages should be assigned to a trading community member. For example, the organization contact usage should be assigned on creation of a relationship between a person and any organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyUsageService/}PartyUsageAssignmentRule

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Party Usage*
Handled by	*Trading Community Member Usage*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateFrom	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date from which party usage rule is effective.
DateTo	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date from which party usage rule is invalid.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyUsageCode	string	The usage context of a party's contact point.
PartyUsageRuleId	long	Unique identifier for a party usage rule. • Primary Key
PartyUsageRuleType	string	Party usage rule type. Validated against HZ_PARTY_USAGE_RULE_TYPE lookup. See table description for seeded types.
RelatedPartyUsageCode	string	Unique code for the related party usage. Populated when rule type is cannot coexist or transition.

Trading Community Party Usage Translation

The party usage information in a local language.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyUsageService/}PartyUsageTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Party Usage*
Handled by	*Trading Community Member Usage*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
Language	string	Indicates the code of the language into which the contents of the translatable columns are translated. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row

Name	Type	Description
		is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyUsageAssignmentDescription	string	Description of the business event that drives assignment.
PartyUsageCode	string	The usage context of a party's contact point. • Primary Key
PartyUsageName	string	Descriptive party usage name.
PartyUsageUnassignmentDescription	string	Description of the business event that drives unassignment.
SourceLang	string	Indicates the code of the language in which the contents of the translatable columns were originally created.

Trading Community Organization

A company or organization such as Oracle or Dell that is registered in some jurisdiction and can enter into a business relationship with other legal entities.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule/}OrganizationService

Service WSDL URL: https://servername/crmService/FoundationPartiesOrganizationService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Organization

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Original System Mapping Identifier Additional Information*

Relationship Type	Object or Service
Handles	*Classification Assignment*
Handles	*Source System Reference*
Handles	*Relationship*
Handles	*Telex*
Handles	*Trading Community Address Purpose*
Handles	*Financial Profile*
Handles	*Web*
Handles	*Trading Community Address Additional Information*
Handles	*Usage Assignment*
Handles	*E-Mail Domain*
Handles	*Instant Messaging*
Handles	*Additional Account Name*
Handles	*E-Mail*
Handles	*Customer Contact Responsibility*
Handles	*Electronic Data Interchange*
Handles	*Customer Contact Profile*
Handles	*Address*
Handles	*Trading Community Relationship Additional Information*
Handles	*Electronic File Transfer*
Handles	*Financial Report*
Handles	*Credit Rating*

Relationship Type	Object or Service
Handles	*Contact Preference*
Handles	*Phone*
Handles	*Trading Community Organization Profile Additional Information*
Handles	*Trading Community Organization Contact Additional Information*
Handles	*Certification*
Handles	*Additional Identifier*
Handles	*Trading Community Contact Point Additional Information*
Handles	*Financial Number*
Handles	*Trading Community Organization Details*
Handles	*Account*
Handles	*Preference*

Operations

- *getOrganizationProfile*
- *getOrganization*
- *createOrganization*
- *updateOrganization*
- *deleteOrganization*
- *mergeOrganization*
- *findOrganization*
- *getOrganizationsFilteredByPartyUsageFilterRuleCode*
- *getOrganizationsFilteredByPartyUsageCode*
- *getOrganizationByOriginalSystemReference*
- *processOrganization*
- *processCSOrganization*
- *updateOrganizationProfile*
- *mergeOrganizationProfile*
- *findOrganizationProfile*

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getOrganizationProfile

The Get operation for trading community organization profile. You can query the organization profile with the party ID using this operation.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
PartyId	long	The unique identifier of the party.

Response Payload

Element Name	Type	Description
result	*Account*	The trading community organization profile that matches the inbound key attributes.

getOrganization

The Get operation for the trading community organization details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	The unique identifier of the party.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationPartyResult	The trading community organization details that matches the inbound key attributes.

createOrganization

The Create operation for the trading community organization details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
organizationParty	*Trading Community Organization Details*	The trading community organization details to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationPartyResult	The result of the operation that includes the successfully created trading community organization details and a list of warning or information messages.

updateOrganization

The Update operation for the trading community organization details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
organizationParty	*Trading Community Organization Details*	The trading community organization details to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationPartyResult	The result of the operation that includes the successfully updated trading community organization details and a list of warning or information messages.

deleteOrganization

The Delete operation for the trading community organization details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
organizationParty	*Trading Community Organization Details*	The trading community organization details to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergeOrganization

The Merge operation for trading community organization details. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
organizationParty	*Trading Community Organization Details*	The trading community organization details to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationPartyResult	The result of the operation that includes the successfully merged trading community organization details and a list of warning or information messages.

findOrganization

The Find operation for trading community organization details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Trading Community Organization Details*	The result of the operation that includes a list of trading community organization details that satisfy the inbound criteria and any warning or information messages encountered during the invocation.

getOrganizationsFilteredByPartyUsageFilterRuleCode

The Get operation for trading community organization filtered by party usage filter rule.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyUsageFrCode	string	The party usage filter rule used to filter an organization.
bindEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The effective date to filter the party usages associated with the organization.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationPartyResult	The trading community organization details that are filtered by the party usage filter rule provided.

getOrganizationsFilteredByPartyUsageCode

The Get operation for trading community organization filtered by party usage.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyUsageCode	string	The party usage code used to filter organizations.
bindEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The effective date to filter the party usages associated with the organization.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationPartyResult	The trading community organization details that matches the inbound party usage code.

getOrganizationByOriginalSystemReference

The Get operation for trading community organization filtered by the source system reference.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindOrigSystem	string	The unique code of the original system.
bindOrigSystemReference	string	The unique identifier of the original system reference.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationPartyResult	The trading community organization details that are filtered by The source system reference provided.

processOrganization

The Bulk load operation for trading community organization details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what actions were performed, such as Create, Update, Merge, or Delete.
organizationParty	*Trading Community Organization Details*	A list of the trading community organization details to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Trading Community Organization Details*	The result of the operation that includes a list of trading community organization details that are successfully processed and any warning or information messages encountered during the invocation.

processCSOrganization

An operation to apply the changes back to the data source for trading community organization details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object used to represent the changes that were made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created and updated data objects, and all warning and informational messages.

updateOrganizationProfile

The Update operation for trading community organization profile. You can update the organization profile with party ID using this operation.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
organizationDVO	*Account*	The trading community organization profile to be updated.

Response Payload

Element Name	Type	Description
result	*Account*	The result of the operation that includes the successfully updated trading community organization profile and a list of warning or information messages.

mergeOrganizationProfile

The Merge operation for trading community organization profile. You can update the organization profile with party ID using this operation.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
organizationDVO	*Account*	The trading community organization profile to be merged.

Response Payload

Element Name	Type	Description
result	*Account*	The result of the operation that includes the successfully merged trading community organization profiles and a list of warning or information messages.

findOrganizationProfile

The Find operation for trading community organization profile.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	The Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Account*	The result of the operation that includes a list of trading community organization profiles that satisfy the inbound criteria and any warning or information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used when evaluating the locale-based user interface hints. The localeName is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and the Delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getOrganizationsFilteredByPartyUsa	HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	View Trading Community Organization	Allows exporting, searching, and viewing of organization details such as addresses, classifications, identifiers, and names.
createOrganization	HZ_ENTER_TRADING_COMMUNITY_ORGANIZATION_INFORMATION_PRIV	Enter Trading Community Organization Information	Allows the specification of organization information.
All Operations	HZ_ENTER_TRADING_COMMUNITY_ORGANIZATION_INFORMATION_PRIV	Enter Trading Community Organization Information	Allows the specification of organization information.
getOrganization	HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	View Trading Community Organization	Allows exporting, searching, and viewing of organization details such as addresses, classifications, identifiers, and names.
updateOrganization	HZ_UPDATE_TRADING_COMMUNITY_ORGANIZATION_PRIV	Update Trading Community Organization	Allows the update of the organization relationship information. If assigning, also assign the ability to view the trading community organization relationship.
deleteOrganization	HZ_REMOVE_TRADING_COMMUNITY_ORGANIZATION_PRIV	Remove Trading Community Organization	Allows the removal of organizations. If assigning, also assign the ability to view the trading community organization.

Operation Name	Privilege Code	Privilege Name	Privilege Description
findOrganization	HZ_VIEW_TRADING_ COMMUNITY_ORGANIZATION_ PRIV	View Trading Community Organization	Allows exporting, searching, and viewing of organization details such as addresses, classifications, identifiers, and names.
processCSOrganization	HZ_UPDATE_TRADING_ COMMUNITY_ORGANIZATION_ PRIV	Update Trading Community Organization	Allows the update of the organization relationship information. If assigning, also assign the ability to view the trading community organization relationship.
processCSOrganization	HZ_ENTER_TRADING_ COMMUNITY_ORGANIZATION_ INFORMATION_PRIV	Enter Trading Community Organization Information	Allows the specification of organization information.
getOrganizationByOriginalSystemR	HZ_VIEW_TRADING_ COMMUNITY_ORGANIZATION_ PRIV	View Trading Community Organization	Allows exporting, searching, and viewing of organization details such as addresses, classifications, identifiers, and names.
mergeOrganization	HZ_UPDATE_TRADING_ COMMUNITY_ORGANIZATION_ PRIV	Update Trading Community Organization	Allows the update of the organization relationship information. If assigning, also assign the ability to view the trading community organization relationship.
mergeOrganization	HZ_ENTER_TRADING_ COMMUNITY_ORGANIZATION_ INFORMATION_PRIV	Enter Trading Community Organization Information	Allows the specification of organization information.
getOrganizationsFilteredByPartyUsa	HZ_VIEW_TRADING_ COMMUNITY_ORGANIZATION_ PRIV	View Trading Community Organization	Allows exporting, searching, and viewing of organization details such as addresses, classifications, identifiers, and names.
processOrganization	HZ_UPDATE_TRADING_ COMMUNITY_ORGANIZATION_ PRIV	Update Trading Community Organization	Allows the update of the organization relationship information. If assigning, also assign the ability to view the trading community organization relationship.
processOrganization	HZ_ENTER_TRADING_ COMMUNITY_ORGANIZATION_ INFORMATION_PRIV	Enter Trading Community Organization Information	Allows the specification of organization information.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_UPDATE_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	Cash Positioning and Forecasting Management	Manages cash positioning and forecasting, including performing deep-dive analyses of cash flows from various sources.
HZ_UPDATE_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_UPDATE_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_CE_CASH_MANAGEMENT_ADMINISTRATION_DUTY_CRM	Cash Management Administration	Sets up system parameters, lookups, profile options, and descriptive flexfields. Examples include cash pooling setups, bank account, and reconciliation matching rules.
HZ_UPDATE_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
HZ_UPDATE_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_UPDATE_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_FOM_ORDER_ENTRY_SPECIALIST_JOB	Order Entry Specialist	Individual who is responsible for creating new orders, updating existing orders, and creating order returns.
HZ_UPDATE_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_UPDATE_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_EGP_REDWOOD_MANAGE_ITEM_DUTY_CRM	Manage Item Redwood	Allows users to create and edit item details.
HZ_REMOVE_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_REMOVE_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_REMOVE_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			identification, and duplicate resolution.
HZ_REMOVE_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_EGP_REDWOOD_MANAGE_ITEM_DUTY_CRM	Manage Item Redwood	Allows users to create and edit item details.
HZ_ENTER_TRADING_COMMUNITY_ORGANIZATION_INFORMATION_PRIV	ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	Cash Positioning and Forecasting Management	Manages cash positioning and forecasting, including performing deep-dive analyses of cash flows from various sources.
HZ_ENTER_TRADING_COMMUNITY_ORGANIZATION_INFORMATION_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_ENTER_TRADING_COMMUNITY_ORGANIZATION_INFORMATION_PRIV	ORA_CE_CASH_MANAGEMENT_ADMINISTRATION_DUTY_CRM	Cash Management Administration	Sets up system parameters, lookups, profile options, and descriptive flexfields. Examples include cash pooling setups, bank account, and reconciliation matching rules.
HZ_ENTER_TRADING_COMMUNITY_ORGANIZATION_INFORMATION_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
HZ_ENTER_TRADING_COMMUNITY_ORGANIZATION_INFORMATION_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_ENTER_TRADING_COMMUNITY_ORGANIZATION_INFORMATION_PRIV	ORA_PSC_BILLING_ENTRY_DUTY_CRM	PSC Billing Specialist	Allows users to perform billing duties.
HZ_ENTER_TRADING_COMMUNITY_ORGANIZATION_INFORMATION_PRIV	ORA_FOM_ORDER_ENTRY_SPECIALIST_JOB	Order Entry Specialist	Individual who is responsible for creating new orders, updating existing orders, and creating order returns.
HZ_ENTER_TRADING_COMMUNITY_ORGANIZATION_INFORMATION_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_ENTER_TRADING_COMMUNITY_ORGANIZATION_INFORMATION_PRIV	ORA_EGP_REDWOOD_MANAGE_ITEM_DUTY_CRM	Manage Item Redwood	Allows users to create and edit item details.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_ENTER_TRADING_COMMUNITY_ORGANIZATION_INFORMATION_PRIV	ORA_PSC_BILLING_ADMINSTRATION_DUTY_CRM	PSC Manage Billing Activities Role	Allows users to mange billing activities.
HZ_ENTER_TRADING_COMMUNITY_ORGANIZATION_INFORMATION_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	Customer Maintenance Segregated	Maintains customer related data except the creation and management of customers.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_MNT_VIEW_SUPPLIER_WARRANTY_DUTY_CRM	View Supplier Warranty	Provides View access to Supplier Warranty feature including the get access to REST resources
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_WSH_CREATE_OUTBOUND_SHIPMENT_REQUEST_PWA_DUTY_CRM	Create Outbound Shipment Request Using Responsive Shipping	Create outbound shipment request using the responsive shipping application.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_WSH_SHIPPING_ADMINISTRATION_DUTY_CRM	Shipping Administration	Manages all setup tasks necessary to implement and maintain Oracle Fusion Shipping.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_CJM_CUSTOMER_CHANNEL_PROGRAM_MANAGEMENT_DUTY_CRM	Customer Channel Program Management	Manages customer programs and manual adjustments.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_EGP_REDWOOD_VIEW_ITEM_DUTY_CRM	View Item Redwood	Allows users to view item details.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_SCH_PURCHASE_PRICING_MANAGER_JOB	Purchase Pricing Manager	A purchase pricing manager is responsible for understanding all pricing options available to an organization and being able to associate the correct landed cost for procurement of a given product. They will review all types of pricing agreements including pricing negotiated by a third party on their behalf or locally negotiated pricing.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_RCL_FIELD_SERVICE_TECHNICIAN_DUTY_CRM	Field Service Technician	Individual responsible for the duty of field service logistics.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_RCL_FIELD_SERVICE_ADMINISTRATOR_JOB	Field Service Administrator	Individual responsible for the administration of field service logistics.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	Customer Maintenance	Defines and maintains Receivables attributes of customer accounts and customer account sites.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_IEX_COLLECTIONS_AGENT_DUTY_CRM	Collections Management Basic	Allows user to perform activities in Collections.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_WSH_CREATE_PICK_WAVE_PWA_DUTY_CRM	Create Pick Wave Using Responsive Shipping	Create pick waves using the responsive shipping application.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_WSH_DELIVERY_PROCESSING_DUTY_CRM	Shipment Processing	Processes and confirms shipments and shipment lines. Records shipping costs and generates shipping related reports.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_EGP_REDWOOD_MANAGE_ITEM_DUTY_CRM	Manage Item Redwood	Allows users to create and edit item details.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_MNT_MANAGE_SUPPLIER_WARRANTY_DUTY_CRM	Manage Supplier Warranty	Provides manage access to Supplier Warranty feature including the access to REST resources
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_RCL_DEPOT_REPAIR_MANAGER_JOB	Depot Repair Manager	Individual responsible for managing the planning, logistics, repair execution, shipping, and billing for the repair of parts and products.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_CJM_CHANNEL_CLAIMS_MANAGEMENT_DUTY_CRM	Channel Claims Management	Manages customer claims.
HZ_VIEW_TRADING_COMMUNITY_ORGANIZATION_PRIV	ORA_FOS_SUPPLY_CHAIN_CONTROLLER_JOB	Supply Chain Controller	Individual responsible for providing operational controller leadership and guidance to both Finance and Supply Chain Operations leaders in complex, global supply chain organizations. Responsibilities include implementation of effective global supply chain procedures and controls to ensure compliance with the legal inter-company policies the company has put in place, while ensuring goods are flowing to the customer in the most efficient manner possible.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_HZ_RESOURCE_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_WSH_SHIPPING_ADMINISTRATION_DUTY_CRM	ORA_WSH_CARRIER_MANAGEMENT_DUTY_CRM	Carrier Management	Manages setup of carriers including defining carriers, carrier contacts, and shipping methods.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_CE_CASH_MANAGEMENT_ADMINISTRATION_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_IBY_CUSTOMER_PAYMENT_INSTRUMENT_MANAGEMENT_DUTY_CRM	Customer Payment Instrument Management	Manages customer bank accounts and credit cards and other payment details.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_IBY_DISBURSEMENT_PROCESS_MANAGEMENT_DUTY_CRM	Disbursement Process Management	Assigns payment process attributes to documents payable, resolves document and payment validation errors, and reviews proposed payments. Views items that were rejected or removed from a payment process request.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_WSH_SHIPPING_ADMINISTRATION_DUTY_CRM	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_FOS_SUPPLY_CHAIN_CONTROLLER_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_FOM_ORDER_ENTRY_SPECIALIST_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_ZX_REGISTRATION_PII_DUTY_CRM	Party Taxpayer Identifier PII	View personally identifiable information for tax registration number of type taxpayer ID.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_XLA_SUBLEDGER_ACCOUNTING_MANAGER_DUTY_CRM	Subledger Accounting Manager	Creates accounting for transactions, reviews journal entries, and runs account analysis, journal entries, and period close exceptions reports.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_XLA_SUBLEDGER_ACCOUNTING_REPORTING_DUTY_CRM	Subledger Accounting Reporting	Runs all subledger accounting reports, and reviews journal entries.
ORA_SCH_PURCHASE_PRICING_MANAGER_JOB	ORA_POZ_SUPPLIER_PROFILE_INQUIRY_DUTY_CRM	Supplier Profile Inquiry	View supplier profile information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_FOS_SUPPLY_CHAIN_CONTROLLER_JOB	ORA_POZ_SUPPLIER_PROFILE_INQUIRY_DUTY_CRM	Supplier Profile Inquiry	View supplier profile information.
ORA_FOS_SUPPLY_CHAIN_CONTROLLER_JOB	ORA_POZ_PROFILE_INQUIRY_AS_SUPPLIER_DUTY_CRM	Supplier Profile Inquiry as Supplier	Views non-bank account related supplier profile information as a supplier.
ORA_EGP_REDWOOD_VIEW_ITEM_DUTY_CRM	ORA_RCS_SCM_COMMON_VIEW_WEB_SERVICE_DUTY_CRM	Supply Chain Common View Web Service	Provides view only web service access to supply chain common to perform activities such as viewing inventory organizations, plant parameters, carriers and units of measure list of values.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Account

An organization account and its profile information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Organization Profile Additional Information*
Contained by	*Sales Account*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Alias	string	The organization alias name.
AnalysisFy	string	The fiscal year that the financial information is based on.
BankCode	string	Identifies the bank in several countries, typically for regulatory purposes.
BankOrBranchNumber	string	Stores bank number for banks and branch number for bank branches. Primarily stores ABA number for US bank branches.
BranchCode	string	Identifies the bank branch in several countries, typically for regulatory purposes.
BranchFlag	boolean	Indicates if this is a branch location. If the value is True, then this is a branch location.
BusinessReport	{http://xmlns.oracle.com/adf/svc/types/}base64Binary-DataHandler	Dun and Bradstreet business information report.
BusinessScope	string	The physical class of business in which a business participates. For example, local, national, or international.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CeoTitle	string	The formal title of the chief executive officer.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Comments	string	The comments for the record.
CongDistCode	string	The U.S. Congressional district code for the account.
ContentSourceNumber	string	The content source number is not used.

Name	Type	Description
ControlYr	decimal	The year when current ownership gained control of the organization.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CorporationClass	string	The taxation classification for corporation entities such as Chapter S in the US.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CurrentFiscalYearPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its current fiscal year.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DataCloudStatus	string	Specifies the enrichment status of the person.
DbRating	string	The Dun & Bradstreet credit rating.
Disadv8aInd	string	Indicates whether the organization is considered disadvantaged by the US government under Title 8A. If the value is Yes, the organization is considered disadvantaged under Title 8A. The default value is No.
DisplayedDUNSPartyIdentifier	long	Dun and Bradstreet does not maintain data for the branch offices of companies that are located beyond North America. Data is only maintained for the company headquarters. If the data pertains only to company headquarters, the headquarters PARTY_ID is stored. If the data pertains to a branch office, the branch PARTY_ID is stored.

Name	Type	Description
DoNotConfuseWith	string	Indicates existence of similarly named businesses.
DomesticUltimateDUNSNumberC	string	DUNS Number for the Domestic Ultimate, which is the highest family member in the same country as the business entity. A subject can be its own Domestic Ultimate.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	The effective latest change is not used.
EffectiveSequence	int	The effective sequence is not used.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
EmployeesAtPrimaryAddress	string	The number of employees at the referenced address.
EmployeesAtPrimaryAddressEstimation	string	Indicates the calculation of employees at the primary address as estimated.
EmployeesAtPrimaryAddressMinimum	string	Indicates the calculation of employees at the primary address as minimum.
EmployeesAtPrimaryAddressText	string	The number of employees at the referenced address that cannot be mapped to a number.
EmployeesTotal	decimal	The total number of employees.
EnquiryDUNS	string	The identifier used to query the Dun and Bradstreet data. If a location is a branch, then in some countries the headquarters DUNS number is used to do the query. Otherwise it is the same as the DUNS number.
ExportInd	string	Indicates whether the organization is an exporter. If the value is Y, then the organization is an exporter. The default value is N.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services

Name	Type	Description
		Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
GlobalUltimateDUNSNumberC	string	DUNS Number for the Global Ultimate, which is the highest family member in the same country as the business entity as you proceed further on this branch of the tree. A case can be its own ultimate.
GrowthStrategyDescription	string	The description of the growth strategy.
HQBranchIndicator	string	The status of this site, such as HQ, a branch, or a single location. A list of accepted values are defined in the lookup type HQ_BRANCH_IND.
HomeCountry	string	The home country associated with the party.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
ImportInd	string	Indicates whether the organization is an importer. If the value is Y, then the organization is an importer. The default value is N.
IncorpYear	int	The year that the business was formally incorporated.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LaborSurplusInd	string	Indicates whether the organization operates in an area with a labor surplus. If the value is Y, then the organization operates in an area with a labor surplus. The default value is N.
LastEnrichmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was last enriched in DaaS.

Name	Type	Description
LastSourceUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated by the source system.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdateSourceSystem	string	The source system that last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LegalStatus	string	The legal structure of the organization such as partnership, corporation, and so on.
LineOfBusiness	string	The type of business activities performed at this site.
LocalActivityCode	string	The local activity classification code.
LocalActivityCodeType	string	The local activity classification code type identifier.
LocalBusIdenType	string	The most common business identifiers in a country such as Chamber of Commerce Number in Italy, Government Registration Number in Taiwan. A list of accepted values are defined in the lookup type LOCAL_BUS_IDEN_TYPE.
LocalBusIdentifier	string	The primary identifier assigned to a businesses by a government agency such as Chamber of Commerce, or other authority. It is often used by countries other than USA.
MinorityOwnedInd	string	Indicates whether the organization is primarily owned by ethnic or racial minorities. If the value is Y, then the organization is owned by ethnic or racial minorities. The default value is N.
MinorityOwnedType	string	The type of minority-owned firm.
MissionStatement	string	The corporate charter of organization in user-defined text format.
NextFyPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its next fiscal year.

Name	Type	Description
OobInd	string	Indicates whether the organization is out of business. If the value is Y, then the organization is out of business. The default value is N.
OrgInformation	*Trading Community Organization Profile Additional Information*	The information of the organization.
OrganizationName	string	The name of the party when the party type is Organization.
OrganizationProfileId	long	The unique identifier of the organization profile. • Primary Key
OrganizationSize	string	Size of an organization based on revenue, number of employees, and so on.
OrganizationType	string	Not used in Fusion V1.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
ParentDUNSNumberC	string	Parent is a corporation that owns more than 50 percent capital stock of another corporation. The parent company can also be a subsidiary of another corporation. If the parent also has branches, then it is headquarters and also parent company. Headquarters is a business establishment that has branches or divisions reporting to it, and is financially responsible for those branches or divisions. If the headquarters has more than 50 percent of capital stock owned by another corporation, then it is also a subsidiary. If it owns more than 50 percent of capital stock of another corporation, then it is also a parent.
ParentSubInd	string	Indicates whether the organization is a parent or subsidiary.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix.

Name	Type	Description
		For Person, it is concatenation of person_name and suffix.
PreferredContactEmailAddress	string	The e-mail address of the primary contact person of the organization.
PreferredContactFormattedPhoneNumber	string	The formatted phone number of the primary contact person of the organization.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactName	string	The name of the primary contact person of the organization.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the identifying address.
PrimaryAddressCountry	string	The country listed in the TERRITORY_CODE column of the FND_TERRITORY table for the identifying address.
PrimaryAddressCounty	string	The county of the Identifying address.
PrimaryAddressLine1	string	The first line of the identifying address.
PrimaryAddressLine2	string	The second line of the Identifying address.
PrimaryAddressLine3	string	The third line of the Identifying address.

Name	Type	Description
PrimaryAddressLine4	string	The fourth line of the Identifying address.
PrimaryAddressPostalCode	string	The postal code of the identifying address.
PrimaryAddressProvince	string	The province of the identifying address.
PrimaryAddressState	string	The state of the Identifying address.
PrimaryEmailAddress	string	The e-mail address of the organization.
PrimaryEmailId	long	The primary e-mail contact point ID of the organization.
PrimaryFormattedPhoneNumber	string	The primary telephone number formatted in the local format of the organization.
PrimaryLanguage	string	The standard name for a language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The primary contact point phone ID of the organization.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	The primary uniform resource locator.
PrimaryWebId	long	The unique identifier of the primary uniform resource locator.

Name	Type	Description
PrincipalName	string	The Name of the highest ranking person in the company.
PrincipalTitle	string	The title of the highest ranking person in the organization.
Pronunciation	string	The pronunciation of the organization.
PublicPrivateOwnershipFlag	boolean	Indicator to specify if the organization is privately owned. Y stands for a privately owned organization and N stands for a publicly owned organization.
RegistrationType	string	Indicates the registration type of the organization.
RentOwnInd	string	Indicates if this account owns or rents the place of business. A list of valid values for rent, own, and lease are defined in the lookup OWN_RENT_IND.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The standard industry classification (SIC) code.
SICCodeType	string	The version of the standard industry classification (SIC) code.
SeblUserKeyLoc	string	The location of the account, optional part of the user primary key.
SmallBusInd	string	Indicates whether the organization is considered as a small business. If the value is Y, then the organization is considered as a small business. The default value is N.
Status	string	The status of the record.
StockSymbol	string	The corporate stock symbol such as ORCL.
SuffixOverriddenFlag	boolean	Indicator to specify that the attribute has Y if the suffix is overridden by user and N otherwise. Default value is N.
ThirdPartyFlag	boolean	Indicator that tracks if a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. Y

Name	Type	Description
		stands for a third party relationship, N stands for a direct relationship. If Oracle Service is installed, the third party field in the Customers window is required.
TotalEmployeesEstimatedIndicator	string	Indicates if the employee total is estimated. The accepted values are defined in the lookup type TOTAL_EMP_EST_IND.
TotalEmployeesInd	string	Indicates if subsidiaries are included in the calculation of total employees. The accepted values are defined in the lookup type TOTAL_EMPLOYEES_INDICATOR.
TotalEmployeesMinimumIndicator	string	Indicates if the number is a minimum, maximum, or average number of total employees. The accepted values are defined in the lookup type TOTAL_EMP_MIN_IND.
TotalEmployeesText	string	The total number of employees in text format.
TotalPaymentAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The total number of payment experiences.
TradingPartnerIdentifier	string	One column to store the FSIO related trading partner codes. It stores alpha numeric values and also addresses the Fed vs. Non-Fed attribute requirement.
UniqueNameAlias	string	The name as identified by the users to internally recognize the organization.
UniqueNameSuffix	string	Identifies system generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
WomanOwnedInd	string	Indicates whether the organization is primarily owned by women. If the value is Y, then the organization is primarily owned by women. The default value is N.
YearEstablished	int	The year when the organization began doing business.

Additional Account Name

An additional name of an organization, such as a legal name or a DBA name.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}AdditionalOrganizationName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Indicator to specify the preferred additional name for the organization.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameId	long	The unique identifier of the party name. It is primary Key and system generated. • Primary Key
PartyNameType	string	The type of the name. It is a value defined by the additional party name and identifier type entity. The party type must be consistent with the party type that the PARTY_NAME_TYPE can be applied to.
PreferredFlag	boolean	Indicator to specify the name as preferred name for this party within the name type. Possible values are Y and N. Default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Name	Type	Description
TransliterationLang	string	Used to identify the language for the name. It is validated against FND_LANGUAGES.LANGUAGE_CODE. Default value is the Session Language.

Additional Identifier

An additional identifier of a trading community member, such as driver's license number or passport number.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}AdditionalPartyId

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
ExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expiration date for the identifier. It may be NULL, and does not apply to all types of identifiers.
IssueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date in which the Identifier was issued. It may be NULL and does not apply to all types of identifiers.
IssuingAuthorityName	string	The issuing authority name.
IssuingAuthorityPartyId	long	The unique identifier of the issuing authority.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.

Name	Type	Description
PartyIdentifierId	long	The unique identifier of the party identifier. • Primary Key
PartyIdentifierType	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.
PartyIdentifierType1	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.
PartyIdentifierValue	string	The value of the party identifier.
PartyName	string	The name of the party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StateProvince	string	The province of the address.
StatusCode	string	The pre-defined code used to indicate the status.

Address

An address of a trading community member, such as Oracle Corporation is located at 500 Oracle Parkway, Redwood Shores, CA.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*

Relationship Type	Object or Service
Contains	*Trading Community Address Purpose*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Telex*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contains	*Trading Community Address Additional Information*
Contains	*Email*
Contains	*Electronic File Transfer*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AddressExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the location is no longer valid.
AddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines that are used in Japan.
AddressStyle	string	Style of the address.
Addressee	string	The information of the addressee.
City	string	The name of the city.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
ContactPreferenceExistFlag	boolean	Indicator to specify if the contact is primary contact for the party.

Name	Type	Description
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	The name of the country.
Country1	string	The attribute country1 is not used.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
DoNotValidateFlag	boolean	Indicator to specify that a particular location is not eligible for address validation irrespective of the current validation.
Eft	*Electronic File Transfer*	The electronic file transfer information for the party.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.

Name	Type	Description
FormattedAddress	string	The formatted read-only address.
FormattedLocaleAddress	string	The formatted read-only local address.
FormattedMultilineAddress	string	The formatted multi line address of the party site.
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
HouseType	string	Indicates the building type.
IdentifyingAddressFlag	boolean	Indicator to specify the identifying address for the party. Y stands for the indentifying site and N stands for sites that are not the indentifying site.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
Language	string	The operating language for the party site.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	The latitude of the party address.
LocationDirections	string	Directions to the location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
LocationLanguage	string	The operating language for the locations.
Longitude	decimal	The longitude of the party address.

Name	Type	Description
Mailstop	string	A user-defined code to indicate a mail drop point within the organization.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary address of the contact irrespective of the context. Y stands for primary address and N stands for all others.
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	Stores the doing-business_as (DBA) party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameDivision	string	Stores the division party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameLegal	string	Stores the legal party name for a party site. This column is used to store FSIO related legal party name attribute.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteInformation	*Trading Community Address Additional Information*	The party address information.
PartySiteName	string	The user-defined name for the site.
PartySiteNumber	string	The party site number of the address.

Name	Type	Description
PartySiteType	string	Stores the party site type and is based on the lookup. Currently this is either null or one-time.
PartySiteUse	*Trading Community Address Purpose*	The information of the party address usage.
PartyUsageCode	string	The usage context of a party's contact point.
Phone	*Phone*	The phone information for the entity.
Position	string	The primary direction such as north or east that is used to access the location.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four digit extension to the United States postal ZIP code.
Province	string	The name of the province.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The Telex information associated with the party.
UsageCode	string	The usage code is not used.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	The standardized status code describing the results of the validation.
Web	*Web*	The web information related to the record.

Certification

The certification information of a trading community member, such as a full ISO 9001 registered firm.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}Certification

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CertificationId	long	The unique identifier for certification. • Primary Key
CertificationName	string	The name of the certification such as ISO9000 and GMP001.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrentStatus	string	The name for the status of the certification. For example, applied for, granted, or expired.
ExpiresOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification expires.
Grade	string	The level or grade of certification provided by the ISSUED_BY_AUTHORITY. For example, founding member, gold, fully certified, and partially certified.
IssuedByAuthority	string	The name of the certifying authority.
IssuedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification was issued.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Classification Assignment

The classification code assigned to a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CodeAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Sales Competitor*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Reference*
Handled by	*Sales Reference Customer*
Handled by	*Company and User Registration*
Handled by	*Sales Party*
Handled by	*Sales Competitor Service*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party Territory service*
Handled by	*Sales Party Resource Service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassCategory	string	The name of the classification category.
ClassCode	string	The code of the classification.
CodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an object. It is primary key and system generated. • Primary Key
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableKey1	string	The first column of the alphanumeric or multi-part foreign key.
OwnerTableKey2	string	The second column of the alphanumeric or multi-part foreign key.
OwnerTableKey3	string	The third column of the alphanumeric or multi-part foreign key.
OwnerTableKey4	string	The fourth column of the alphanumeric or multi-part foreign key.
OwnerTableKey5	string	The fifth column of the alphanumeric or multi-part foreign key.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PrimaryFlag	boolean	Indicator that specifies if this is the primary class code of a class category for the organization. Y stands for the primary class code and N stands for all others.
Rank	decimal	Ranks classes if multiple classes are assigned to a party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Contact Preference

The contact preference of the trading community member. For example, do not call Joe Smith between 10 a.m. and 12 noon on weekdays.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}ContactPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Electronic Data Interchange*
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Household*
Contained by	*Phone*
Contained by	*Telex*
Contained by	*Web*
Contained by	*Contact Address*
Contained by	*Electronic File Transfer*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactLevelTable	string	The table that stores the contact level of the contact preference, and uses the SUBJECT_TABLE lookup. The list of accepted values are HZ_PARTIES, HZ_PARTIES_SITES, or HZ_CONTACT_POINTS.
ContactLevelTableId	long	The foreign key to the table specified in CONTACT_LEVEL_TABLE column. The list of accepted values are PARTY_ID from HZ_PARTIES table, CONTACT_POINT_ID from HZ_CONTACT_POINTS table, or PARTY_SITE_ID from HZ_PARTY_SITES table.
ContactPreferenceId	long	The unique identifier for the contact preference. • Primary Key
ContactType	string	The contact party type that defines whether the contact is a sales account, a prospect, a contact, or any other user-defined party

Name	Type	Description
		type. The default value is CUSTOMER. A list of accepted values is defined in the lookup CONTACT_TYPE.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaximumNoOfInteractUOMCode	string	The period of time during which the maximum number of interactions applies. Uses the MAX_NO_OF_INTERACT_UOM_CODE lookup.
MaximumNoOfInteractions	decimal	The number of times you can use this contact point. The period of time that this number applies is stored in the MAX_NO_OF_INTERACT_UOM_CODE column.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PreferenceCode	string	Indicates whether to use a particular contact method. The list of accepted values are defined in the PREFERENCE_CODE lookup.
PreferenceEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes inactive.
PreferenceEndTimeHR	int	The hour part of time when the contact preference becomes inactive. The time is recorded in the 24 hour format.

Name	Type	Description
PreferenceEndTimeMi	int	The minutes part of the time when the contact preference becomes inactive.
PreferenceStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes active.
PreferenceStartTimeHR	int	The hour part of time when the contact preference becomes active. The time is recorded in the 24 hour format.
PreferenceStartTimeMi	int	The minutes part of the time when the contact preference becomes active.
PreferenceTopicType	string	The appropriate subjects to send the party that the preference is created for. The list of accepted values are defined in the PREFERENCE_TOPIC_TYPE lookup.
PreferenceTopicTypeCode	string	The code of the preference topic type.
PreferenceTopicTypeId	long	The unique identifier of the preference topic type.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
RequestedBy	string	Indicates if the permission or restriction was created internally or requested by the party. The list of accepted values are defined in the REQUESTED_BY lookup.
Status	string	The status of the record.

Credit Rating

The trading community member's credit rating information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CreditRating

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AverageHighCredit	decimal	The average of all the high credit experiences.
BankruptcyInd	string	Indicates if open bankruptcy exists. Y stands for any open bankruptcy that exists and N stands for no open bankruptcy.
BusinessDiscontinued	string	The business discontinued at the listed location. Prompts reader to contact D and B customer service center if any business is operating.

Name	Type	Description
ClaimsInd	string	Indicates if open claims, legal claims, liens, protested bills, or any equivalent information exists. Y stands for availability of information and N stands for no information.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRatingId	long	The unique identifier of the credit rating. • Primary Key
CreditRiskScoreExplain	string	Explains numeric credit risk score that estimates the risk of delinquent payment over the next 12 months.
CreditScore	string	Indicates the risk of delinquent payments.
CreditScoreAge	decimal	Indicates the age of the credit score expressed in months.
CreditScoreClass	decimal	The date when the credit score was calculated.
CreditScoreCommentary	string	The lookup for explanation codes in the CREDIT_SCORE column.
CreditScoreCommentary10	string	Indicates comments about the credit score.
CreditScoreCommentary2	string	Indicates comments about the credit score.
CreditScoreCommentary3	string	Indicates comments about the credit score.
CreditScoreCommentary4	string	Indicates comments about the credit score.
CreditScoreCommentary5	string	Indicates comments about the credit score.
CreditScoreCommentary6	string	Indicates comments about the credit score.

Name	Type	Description
CreditScoreCommentary7	string	Indicates comments about the credit score.
CreditScoreCommentary8	string	Indicates comments about the credit score.
CreditScoreCommentary9	string	Indicates comments about the credit score.
CreditScoreDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the credit score was calculated.
CreditScoreIncdDefault	decimal	Indicates the probability expressed as a percentage of delinquency for a score range or class.
CreditScoreNatlPercentile	decimal	Indicates the relative credit rating of a business compared to all businesses whose credit ratings are included in the local country database.
CreditScoreOverrideCode	string	Indicates why no score was calculated or why score is equal to zero in the US.
CriminalProceedingInd	string	Indicates if criminal proceedings exist. Y stands for availability of information and N stands for no information.
DebarmentInd	string	Indicates whether the company is debarred from doing business with government agencies. Y stands for company debarred and N stands for not debarred.
DebarmentsCount	decimal	The count of filings by government agencies in the United States that prohibit the party from entering into contracts or transactions with those agencies.
DebarmentsDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date of the most recent filing to prohibit the party from entering into contracts or transactions with a government agency in the United States.
DelqPmtPctgForAllFirms	decimal	Specifies a delinquency percentage for all firms.
DelqPmtRngPrcnt	decimal	Specifies a delinquency percentage for credit score range.
Description	string	The free text description of the record.
DetHistoryInd	string	The code that indicates if detrimental information exists for the party and whether

Name	Type	Description
		complete details exist on management and party. Y stands for availability of information and N stands for no information.
DisasterInd	string	Indicates if information exists about disasters such as fires, hurricanes, and so on. Y stands for availability of information and N stands for no information.
FailureScore	string	For US, the failure risk class, 1 through 5. For Canada , the stability score that indicates risk of business closure, 1 through 10. For Australia, the percentile failure score.
FailureScoreAge	decimal	The failure score age in months.
FailureScoreClass	decimal	1 through 5 to indicate risk of financial stress for a customer account. 1 for a business with greatest risk and 5 for a business with least risk.
FailureScoreCommentary	string	The comments related to failure score.
FailureScoreCommentary10	string	The comments related to failure score.
FailureScoreCommentary2	string	The comments related to failure score.
FailureScoreCommentary3	string	The comments related to failure score.
FailureScoreCommentary4	string	The comments related to failure score.
FailureScoreCommentary5	string	The comments related to failure score.
FailureScoreCommentary6	string	The comments related to failure score.
FailureScoreCommentary7	string	The comments related to failure score.
FailureScoreCommentary8	string	The comments related to failure score.
FailureScoreCommentary9	string	The comments related to failure score.
FailureScoreDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the failure score was calculated.
FailureScoreIncdDefault	decimal	Probability, in percentage, of failure for score range of class.

Name	Type	Description
FailureScoreNatnlPercentile	decimal	The national percentile that reflects the relative ranking of a company among all scored companies in the local country database.
FailureScoreOverrideCode	string	In Europe, code for the reason for variance between the D and B rating and the failure score. In the US, code for the reason why no score was calculated, or why the score is zero.
FinclEmbtInd	string	Indicates if open bankruptcy, receivership liquidation, or any equivalent information exists. Y stands for availability of information and N stands for no information.
FinclLglEventInd	string	Indicates if special events such as financial embarrassment and legal filings exist. Y stands for availability of information and N stands for no information.
GlobalFailureScore	string	The global score for the risk of business default.
HighCredit	decimal	Maximum credit ever extended to the organization.
HighRngDelqScr	decimal	Specifies the high end of the range of the commercial credit score.
JudgementInd	string	Indicates if open judgments exist. Y stands for any open judgment that exists and N stands for no open judgments.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LienInd	string	Indicates if open liens exist. Y stands for any open lien that exists and N stands for no open liens.
LowRngDelqScr	decimal	Specifies the low end of the range of the commercial credit score.
MaximumCreditCurrencyCode	string	The currency used to denominate the MAXIMUM_CREDIT_RECOMMENDATION column.

Name	Type	Description
MaximumCreditRecommendationAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Maximum credit limit recommended for the currency specified in the MAXIMUM_CREDIT_CURRENCY_CODE column.
NegvPmtExpl	string	The conditional comment generated when negative payments are present.
NoTradeInd	string	Indicates that no trade experiences exist. Y stands for any trade experience that exists and N stands for no trade experience.
NumberParentBankruptcyConversions	decimal	The number of bankruptcy conversions by the parent.
NumberParentBankruptcyFiling	decimal	The number of bankruptcies filed by the parent.
NumberSpecialEvent	decimal	The number of occurrences of the special events.
NumberTradeExperiences	decimal	The number of trade experiences.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OprgSpecificationEvntInd	string	Indicates if information exists about operational changes such as name changes, management changes, change of control, moves, and so on. Y stands for availability of information and N stands for no information.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OtherSpecificationEvntInd	string	Indicates if special events exist that are not otherwise specified.
ParentHQBankruptcyInd	string	Indicates if parent (P) or headquarters (H) are entered into bankruptcy.
PartyId	long	The unique identifier of the contact party.
PaydexComment	string	Additional paydex information.

Name	Type	Description
PaydexFirmComment	string	Comment on the paydex score for the organization.
PaydexFirmDays	string	The number of days used in the paydex score.
PaydexIndustryComment	string	Comment on the paydex score for the industry.
PaydexIndustryDays	string	The number of days used in the paydex score for the industry.
PaydexNorm	string	Median or average Paydex score for the industry.
PaydexScore	string	Paydex score for the previous 12 months payment history.
PaydexThreeMonthsAgo	string	Paydex score three months ago.
PrntBkcyChapterConv	string	The change of bankruptcy type.
PrntBkcyConvDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the bankruptcy converted from one type to another.
PrntBkcyFilgChapter	decimal	The chapter number of the bankruptcy filed by the parent under the US uniform commercial code.
PrntBkcyFilgDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The bankruptcy filing date of the parent.
PrntBkcyFilgType	string	The type of bankruptcy filed by the parent.
PubRecExpl	string	The conditional comment generated if suits, liens, and judgments exist.
RatedAsOfDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the rating was acquired.
Rating	string	The rating number or code of the rating company.
RatingOrganization	string	The name of the credit rating organization.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
SecuredFlngInd	string	Indicates if open secured filings such as UCC filings, secured charges or mortgages pledging, or any equivalent information exists. Y stands for availability of information and N stands for no information.
SlowTradeExpl	string	The conditional comment generated when paydex score indicates that slow trade experiences are present.
SpecialEventComment	string	The comment generated if special event section exists.
SpecialEventText	string	The narrative of the special event.
SpecialEventUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the special event was updated.
Status	string	The status of the record.
SuitInd	string	Indicates if open suits exist. Y stands for any open suit that exists and N stands for no open suits.

Customer Contact Profile

The person who functions as a contact for an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Organization Contact Additional Information*
Contains	*Customer Contact Responsibility*
Contains	*Source System Reference*
Contained by	*Relationship*

Relationship Type	Object or Service
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
ContactFormattedAddress	string	The formatted version of the contact address.
ContactFormattedMultilineAddress	string	The formatted multiline version of the contact address.
ContactName	string	The name of the contact.
ContactNumber	string	The user-defined identification number for this contact.
ContactPartyId	long	The unique identifier of the contact.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerEmailAddress	string	The e-mail address of the customer this contact person belongs to.
CustomerName	string	The name of the customer.
CustomerPartyId	long	The unique identifier of the customer this contact person belongs to.
CustomerPartyNumber	string	The alternate unique identifier of the customer this contact person belongs to.
CustomerUniqueName	string	The unique name of the customer. For an Organization, the value is a concatenation of unique_name_alias and suffix. For a Person, the value is a concatenation of person_name and suffix.
DecisionMakerFlag	boolean	Indicates if this contact is a decision maker. If the value is True, then the contact is a decision maker.
Department	string	The free form text used to name the department for the contact.
DepartmentCode	string	The department code for the contact. A list of accepted values is defined in the lookup DEPARTMENT_TYPE.
EmailAddress	string	The email address associated with the record.
FormattedAddress	string	The formatted address information.
FormattedPhoneNumber	string	The formatted phone number.

Name	Type	Description
JobTitle	string	The free form text for job title.
JobTitleCode	string	The code given to the job title.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The unique identifier of the organization contact. • Primary Key
OrgContactInformation	*Trading Community Organization Contact Additional Information*	The information of the organization contact.
OrganizationContactRole	*Customer Contact Responsibility*	The role of the contact in the organization.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyRelationshipId	long	The unique identifier of the relationship of the party.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteName	string	The address associated with the party site.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonCertReasonCode	string	The reason for the organization's current certification level assignment. A list of accepted

Name	Type	Description
		values is defined using the lookup HZ_PARTY_CERT_REASON.
PersonCertificationLevel	string	The certification level of a organization. A list of accepted values is defined in the lookup HZ_PARTY_CERT_LEVEL.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLanguageName	string	The language name associated with the person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.
PersonPreviousLastName	string	The previous last name of a person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.

Name	Type	Description
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.
Rank	string	The rank associated with this customer contact.
ReferenceUseFlag	boolean	Indicates if this contact can be used as a reference. If the value is Y, then the contact can be used as a reference.
RequestId	long	A system-generated read-only attribute used by the application framework.
SalesAffinityCode	string	The affinity of a contact to the deploying organization. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_AFFINITY_CODE.
SalesAffinityComments	string	The comments about the contact's affinity to the deploying organization.
SalesBuyingRoleCode	string	The roles played by a contact in the buying process, for example, decision maker or supporting role. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_BUY_ROLE_CODE.
SalesInfluenceLevelCode	string	The influence of the contact has on the deploying organization. A list of accepted values are defined in the lookup HZ_SLS_CNTCT_INFLUENCE_LVL_CD.
Salutation	string	The size of the household this person is a part of.
WebUrl	string	The web URL of contact point.

Customer Contact Responsibility

The role or responsibility of an organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContactRole

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Customer Contact Profile*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The organization contact identifier. Foreign key to the HZ_ORG_CONTACTS table.
OrgContactRoleId	long	The unique contact role identifier. It is primary key and system generated. • Primary Key
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PrimaryContactPerRoleType	string	Indicates if the contact is the primary contact for the role. Y stands for primary contact and N stands for a contact that is not the primary contact for the role type. The default value is N.
PrimaryFlag	boolean	Indicator that specifies if this is the primary role for the contact. Y stands for primary role and N stands for a non-primary role for the contact. The default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
RoleLevel	string	The role level of the contact. For example, executive, department head, or middle manager.

Name	Type	Description
RoleType	string	The role performed by a contact.
Status	string	The status of the record.

E-Mail

The e-mail address associated with a trading community member. For example, john.doe@oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Email

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The preferred format for e-mail addressed to this address such as HTML or ASCII. A list of accepted values is defined using the lookup EMAIL_FORMAT.
EmailInformation	*Trading Community Contact Point Additional Information*	The additional information about the e-mail.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary e-mail of the associated object. If the value is True, then this is the primary e-mail. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.

Name	Type	Description
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

E-Mail Domain

The domain of the e-mail address associated with a trading community member. For example, ABC Corporation has CORP and BUSINESS e-mail domains.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}EmailDomain

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*

Relationship Type	Object or Service
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DomainName	string	The actual or non-reversed domain name of the organization for display purpose.
EmailDomainId	long	The sequence generated unique identifier. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
Status	string	The status of the record.
TransposedDomain	string	The reversed domain name for the purposes of searching.

Electronic Data Interchange

The electronic data interchange information associated with a trading community member. For example, the details of standard codes and payment methods that are to be used for data interchange.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Edi

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*

Relationship Type	Object or Service
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EDIEceTpLocationCode	string	The trading partner location code for EDI Gateway.
EDIIdNumber	string	The EDI trading partner number for the supplier site.
EDIPaymentFormat	string	Indicates type of information being transmitted with the funds if using EDI_PAYMENT_METHOD ACH. The list of accepted values are CCD, CCP, CHZ, CTX, PPD, and PPP.
EDIPaymentMethod	string	Indicates how a payment is to be made through EDI. The list of accepted values are ACH and BOP.

Name	Type	Description
EDIRemittanceInstruction	string	Indicates who will send the remittance advice. The list of accepted values are Banks or Payables systems.
EDIRemittanceMethod	string	Indicates how remittance advice are sent to the supplier.
EDITpHeaderId	long	The unique identifier of the EDI transaction header.
EDITransactionHandling	string	The ANSI standard code for EDI transaction type.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary EDI of the associated object. If the value is True, then this is the primary EDI. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.

Name	Type	Description
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Electronic File Transfer

The electronic funds transfer information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Eft

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*

Relationship Type	Object or Service
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.

Name	Type	Description
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EFTPrintingProgramId	long	The printing program identifier.
EFTSWIFTCode	string	The EFT swift code information.
EFTTransmissionProgramId	long	The transmission program identifier.
EFTUserNumber	string	The number that identifies you as a user of electronic funds transfer service for your bank or clearing organization.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Financial Number

The financial report numbers of a trading community member, such as assets, liabilities, and cash balance.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}FinancialNumber

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Financial Report*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FinancialNumber	decimal	The value for the financial number. For example, the FINANCIAL_NUMBER_NAME column could have a numerical value of 3,000,000,000 for annual sales.
FinancialNumberCurrency	string	The ISO currency code for the financial number.
FinancialNumberId	long	The unique identifier of the financial number. • Primary Key
FinancialNumberName	string	A text field that lets you assign a descriptive name to a financial report item. For example, gross annual sales, profit, and net annual sales. A user-defined lookup.

Name	Type	Description
FinancialReportId	long	The unique identifier of the financial report.
FinancialUnitsApplied	decimal	The order of magnitude (tens, hundreds, thousands, and so on) used for the FINANCIAL_ NUMBER column.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ProjectedActualCode	string	Indicates if the projected amount is projected or actual. The list of accepted values are P and A. The default value is A.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Financial Profile

The financial details of a trading community member, such as bank account information that was obtained as part of a credit evaluation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}FinancialProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessAuthorityDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when access to the information in the account was granted.
AccessAuthorityGranted	string	Indicates whether access to information in a financial account was granted. If the value is True, then the access has been granted.
BalanceAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The reported balance on an account. The balance can be a positive number, negative number, or zero.
BalanceVerifiedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the account balance was verified.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FinancialAccountNumber	string	The alternate unique identifier of the financial account.

Name	Type	Description
FinancialAccountType	string	The short name that classifies the financial accounts. For example, savings, checking, home loan, personal loan, trading, and so on.
FinancialOrgType	string	The classification of financial organizations. For example, bank, savings and loan, private lender, building society and so on.
FinancialOrganizationName	string	The name of the financial organization that holds the account.
FinancialProfileId	long	The unique identifier of the party's financial profile. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Financial Report

The financial report information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}FinancialReport

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Financial Number*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AuditInd	string	Indicates if the financial reports are audited. If the value is True, then the financial reports have been audited.
ConsolidatedInd	string	Indicates if the financial reports are consolidated. If the value is C, then the reports are consolidated.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateReportIssued	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the financial report was published.
DocumentReference	string	The unique reference number such as passport number or naturalization reference number associated with DOCUMENT_TYPE.
EstimatedInd	string	Indicates whether the financial reports provide estimated data. If the value is True, then the financial reports provide the data.
FinalInd	string	Indicates whether the financial reports are the final closing statements for a business that has ceased operations. If the value is True, then the reports are final closing statements.
FinancialNumber	*Financial Number*	The number that indicates a financial value like annual sales.
FinancialReportId	long	The unique identifier for a financial report. • Primary Key
FiscalInd	string	Indicates whether the financial reports cover a fiscal twelve-month accounting period. If the value is Y, then the financial report covers a twelve-month fiscal period.
ForecastInd	string	Indicates whether the financial reports display forecasts or future projections. If the value is Y, then the financial report displays forecasts.
IssuedPeriod	string	The period covered by the financial report. For example, fiscal year 1999, 1998, and so on.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
OpeningInd	string	Indicates whether the financial reports are the opening statements for a business. If the value is Y, then the financial statements are opening statements.
PartyId	long	The unique identifier of the contact party.
ProformaInd	string	Indicates if the financial reports are pro forma numbers. If the value is Y, then the financial reports are pro forma numbers.
QualifiedInd	string	Indicates whether the financial reports include qualifying remarks from auditors about the fairness and accuracy of the numbers. If the value is Y, then the report is qualified by auditors.
ReportEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The end date of the report, used instead of Issued Period.
ReportStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The start date of the report, used instead of Issued Period.
RequestId	long	A system-generated read-only attribute used by the application framework.
RequiringAuthority	string	The name of the primary organization that requires this financial report. For example, auditors, the Federal Trade Commission, or the Internal Revenue Service.
RestatedInd	string	Indicates whether the financial reports include data that was corrected after the original financial reports. If the value is Y, then the report has been corrected.
SignedByPrincipalsInd	string	Indicates whether the financial reports were signed by the principals of the organization. If the value is Y, then the reports are signed.
Status	string	The status of the record.
TrialBalanceInd	string	Indicates whether the financial reports include trial balance numbers. If the value is Y, then the financial report includes trial balance numbers.
TypeOfFinancialReport	string	A name for the financial report. For example, 10K report, Annual Report, or Shareholder's Special Report.

Name	Type	Description
UnbalancedInd	string	Indicates whether the financial reports include balance sheet accounts that do not balance. If the value is Y, then report includes unbalanced balance sheet accounts.
WhUdpateId	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the record was entered or changed in a data warehouse.

Instant Messaging

The instant messaging information of a trading community member, such as the AOL identifier or Yahoo Messenger information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}InstantMessaging

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessagingAddress	string	The instant messaging information address.
InstantMessagingInformation	*Trading Community Contact Point Additional Information*	The instant messaging information related to the record.
InstantMessengerType	string	The type of the instant messenger type.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary instant messaging Id of the associated object. If the value is True, then this is the primary instant messaging Id. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.

Name	Type	Description
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Phone

The phone number associated with a trading community member. For example, the phone number for Oracle Corporation is 650-506-6000.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Phone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*

Relationship Type	Object or Service
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Contact Address*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FormattedPhoneNumber	string	The formatted phone number.
LastContactDtTime	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time of last contact placed to this contact point.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.

Name	Type	Description
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PagerTypeCode	string	The PAGER_TYPE_CODE column stores the lookup code for the type of pager. The type of pager determines how the page is received. For example, tone, number, alphanumeric or two-way alphanumeric.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCallingCalendar	string	The name or code for a calling calendar used with this telephone number. This attribute is no longer used in Fusion applications.
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The additional number addressed after initial connection to an internal telephone system.
PhoneInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community phone.
PhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound, or outbound.

Name	Type	Description
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RawPhoneNumber	string	The unformatted telephone number.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TimezoneCode	string	The foreign key to FND_TIMEZONES_B.TIMEZONE_CODE.
TransposedPhoneNumber	string	This column stores the concatenation of PHONE_COUNTRY_CODE, PHONE_AREA_CODE, and PHONE_NUMBER in reverse order. For example, if PHONE_COUNTRY_CODE=1, PHONE_AREA_CODE=650 and PHONE_NUMBER=5065747, this column stores 74756050561. This column is used for building an index to search for any combination of the above three columns.

Preference

The preferences of a trading community member. For example, a member may prefer that the transaction currency is the US dollar.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalValue1	string	The additional preference value.
AdditionalValue2	string	The additional preference value.
AdditionalValue3	string	The additional preference value.

Name	Type	Description
AdditionalValue4	string	The additional preference value.
AdditionalValue5	string	The additional preference value.
Category	string	A preference category is used to logically group one or more preference codes in a particular user interface. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Module	string	The program that creates the preference. For example, TCA MOBILE CUSTOMER DIRECTORY.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PartyPreferenceId	long	The unique identifier of the party preference. • Primary Key
PreferenceCode	string	A preference code determines if a preference is a single value or a multiple value preference. The preference code is validated by the HZ_PREFERENCE lookup. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active),

Name	Type	Description
		'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
ValueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The preference value when the data type is DATE.
ValueName	string	A user-defined alias for a preference value.
ValueNumber	decimal	The preference value when the data type is NUMBER.
ValueVarchar2	string	The preference value when the data type is VARCHAR2.

Relationship

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}Relationship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Address*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Usage Assignment*
Contains	*Trading Community Relationship Additional Information*
Contains	*Customer Contact Profile*
Contains	*Source System Reference*

Relationship Type	Object or Service
Contains	*Email*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalInformation1	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type. For operating unit and legal entity to bank relationships, column stores communication agreement ID, which identifies agreement between payer and bank on type of EDIFACT documents that can be sent for processing payments.

Name	Type	Description
AdditionalInformation10	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation11	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation12	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation13	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation14	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation15	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation16	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation17	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation18	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation19	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation2	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation20	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation21	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation22	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation23	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation24	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation25	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation26	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation27	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation28	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation29	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation3	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation30	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation4	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation5	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation6	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation7	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation8	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation9	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DirectionCode	string	The code of the relationship direction. The list of accepted values are defined in the lookup DIRECTION_CODE.
Email	*E-Mail*	The email address associated with the record.

Name	Type	Description
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectEmailAddress	string	The e-mail address of the object party in the relationship.
ObjectId	long	The unique identifier of the object party in this relationship.
ObjectPartyName	string	The name of the object party in this relationship.
ObjectTableName	string	The source table name of the object party in this relationship.
ObjectType	string	The object type of the relationship.
ObjectUsageCode	string	The usage code of object party in the relationship.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationContact	*Customer Contact Profile*	The organization contact information.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyName	string	The name of the party.
PartySite	*Address*	The party site associated with the relationship.

Name	Type	Description
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the relationship.
PercentageOwnership	decimal	The percentage of the child entity owned by the parent entity.
Phone	*Phone*	The phone information for the entity.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.
RelationshipCode	string	The code for a forward or a backward relationship. A list of accepted relationship values is defined in the lookup PARTY_RELATIONS_TYPE.
RelationshipId	long	The relationship identifier for the record.
RelationshipInformation	*Trading Community Relationship Additional Information*	The relationship type information.
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key
RelationshipType	string	The relationship type name. For example, CUSTOMER_SUPPLIER. A list of valid relationship types is defined in the lookup HZ_RELATIONSHIP_TYPE.
RequestId	long	A system-generated read-only attribute used by the application framework.
Role	string	The role between the subject and object party in this relationship.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
SubjectEmailAddress	string	The e-mail address of the subject party in relationship.

Name	Type	Description
SubjectId	long	The unique identifier of the subject in this relationship.
SubjectPartyUsageAssignment	*Usage Assignment*	The usage assignment of the subject party in the relationship.
SubjectTableName	string	The source table of the subject.
SubjectType	string	The subject type of the relationship.
SubjectUsageCode	string	The usage code of subject party in the relationship.
Web	*Web*	The web information related to the record.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*
Contained by	*Location Details*
Contained by	*Household*
Contained by	*Contact Preference*
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*

Relationship Type	Object or Service
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*
Contained by	*Trading Community Address Purpose*
Contained by	*Telex*
Contained by	*Phone*
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*
Contained by	*Trading Community Person Details*
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*
Contained by	*Trading Community Customer Account Site Use*
Contained by	*Relationship*
Contained by	*Electronic Data Interchange*
Contained by	*Trading Community Customer Account or Site Role*
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*

Relationship Type	Object or Service
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Telex

The telex number information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Telex

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Relationship Type	Object or Service
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary telex of the associated object. If the value is True, then this is the primary telex. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TelexNumber	string	The telex reference number (usually a telephone number) of the organization.

Trading Community Address Additional Information

The address information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/}PartySiteInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Address Purpose

The purpose of an address, such as Business, Home, or Ship To.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySiteUse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*

Relationship Type	Object or Service
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date at the start of the date range within which the row is active.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
IntegrationKey	string	The integration key is not used.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteUseId	long	The unique identifier of the party site used. • Primary Key
PrimaryPerType	string	Indicates if this is the primary use for the site. Y stands for the primary site and N stands for all other sites.
RequestId	long	A system-generated read-only attribute used by the application framework.
SiteUseType	string	The site use type associated with the address.
Status	string	The status of the record.

Trading Community Contact Point Additional Information

The contact point for a trading community member like phone or e-mail. For example 650-506-6000 is the phone number for Oracle Corporation, john.doe@example.com is the e-mail address for John Doe.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/}ContactPointInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Phone*
Contained by	*Web*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointType	string	The type of the contact point.
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Organization Contact Additional Information

The additional information about the organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/orgContact/}OrganizationContactInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Customer Contact Profile*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrgContactId	long	The unique identifier of the organization contact. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Organization Details

The information about an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/}OrganizationParty

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*

Relationship Type	Object or Service
Contains	*Address*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Classification Assignment*
Contains	*Usage Assignment*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Phone*
Contains	*Email Domain*
Contains	*Telex*
Contains	*Additional Identifier*
Contains	*Account*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contains	*Financial Report*
Contains	*Certification*
Contains	*Electronic Data Interchange*
Contains	*Email*
Contains	*Preference*
Contains	*Additional Account Name*
Contains	*Electronic File Transfer*

Relationship Type	Object or Service
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalOrganizationName	*Additional Account Name*	The additional name associated with the organization.
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.

Name	Type	Description
Address4	string	The fourth line of the address.
AnalysisFy	string	The fiscal year that the financial information is based on.
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.
CeoName	string	The name of the chief executive officer. It is the denormalized value of the CEO_NAME in HZ_ORGANIZATION_PROFILES.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information associated with the organization.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the organization.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating for the organization.

Name	Type	Description
CurrentFiscalYearPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its current fiscal year.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
Edi	*Electronic Data Interchange*	The electronic data interchange information for the organization.
Eft	*Electronic File Transfer*	The electronic file transfer information for the organization.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.
EmployeesTotal	decimal	The total number of employees.
FinancialProfile	*Financial Profile*	The financial profile information of the organization.
FinancialReport	*Financial Report*	The financial report information of the organization.
FiscalYearendMonth	string	The month when the fiscal year ends for the organization.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
GroupType	string	The type of the group.
HQBranchIndicator	string	The status of this site, such as HQ, a branch, or a single location. A list of accepted values are defined in the lookup type HQ_BRANCH_IND.
HomeCountry	string	The home country associated with the party.

Name	Type	Description
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MissionStatement	string	The corporate charter of organization in user-defined text format.
NextFyPotentialRevenueAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated revenues that can be earned by the organization during its next fiscal year.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationProfile	*Account*	The information about the partner organization.
OrganizationSize	string	The size of the organization based on its revenue, number of employees, and so on.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	The preference mentioned in the organization details.
PartySite	*Address*	The party site associated with the organization.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the organization.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_

Name	Type	Description
		PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPointId	long	The unique identifier of the primary e-mail.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPointId	long	The unique identifier of the primary phone contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPointId	long	The unique identifier of the primary URL contact point.
PrincipalName	string	The Name of the highest ranking person in the company.
Province	string	The name of the province.
Relationship	*Relationship*	The relationship information of the organization.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The telex information of the organization.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the Third Party field in the Customers window is mandatory.
TradingPartnerIdentifier	string	The FSIO related trading partner codes.
URL	string	The destination URL associated with a specific Google AdWords ad.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
Web	*Web*	The web information related to the record.
YearEstablished	int	The year when the organization began doing business.

Trading Community Organization Profile Additional Information

The additional profile information about an organization, such as the organization type.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/organization/}OrganizationInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Sales Cloud Account*
Contained by	*Account*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Sales Cloud Account*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrganizationProfileId	long	The unique identifier of the organization profile. • Primary Key

Name	Type	Description
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*

Relationship Type	Object or Service
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Relationship Additional Information

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/relationship/}RelationshipInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Usage Assignment

The party usage assigned to a trading community member. For example, John Doe is a contact of ABC Corporation and XYZ Corporation is a supplier.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyUsageAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Party Usage Assignment Service*
Handled by	*Trading Community Party Information*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
PartyUsageCode	string	The usage context of a party's contact point.
PartyUsgAssignmentId	long	The unique identifier of the party usage assignment.

Name	Type	Description
		• Primary Key
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Web

The Web information associated with a trading community member. For example, Oracle's address on the Web is www.oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Web

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*

Relationship Type	Object or Service
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N stands for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.

Name	Type	Description
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
URL	string	The destination URL associated with a specific Google AdWords ad.
WebInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community Web.
WebType	string	The prefix class to a Web address. Typically, this is either FTP or HTTP.

Trading Community Party Information

A framework to assign party usages to trading community members. For example, John Doe is assigned a usage to indicate he is a sales account contact and ABC Corporation is assigned a usage to indicate that it is a supplier.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/applicationModule/}PartyInformationService

Service WSDL URL: https://servername/crmService/PartyInformationService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Group
- CRM : Trading Community Model : Trading Community Group
- CRM : Trading Community Model : Trading Community Group

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Previous version is	*Trading Community Party Usage Assignment Service*
Handles	*Usage Assignment*

Operations

- *assignPartyUsage*
- *endPartyUsageAssignment*
- *findPartyUsageAssignment*
- *findPartyUsageAssignmentgetUsageAssignmentByPartyIdCodeDate*
- *findPartyUsageAssignmentPartyUsageAssgnOneWaySyncVOCriteria*
- *findPartyUsageAssignmentPartyUsageAssignRoleProvVOCriteria*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

assignPartyUsage

The Create operation for the trading community party usage assignment SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsageAssignment	*Usage Assignment*	The trading community party usage assignment SDO to be created.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The trading community party usage assignment SDO to be updated.

endPartyUsageAssignment

The Update operation for the trading community party usage assignment SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsageAssignment	*Usage Assignment*	The trading community party usage assignment SDO to be updated.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes the successfully updated trading community party usage Assignment SDO and a list of warning or information messages.

findPartyUsageAssignment

The Find operation for the trading community party usage assignment SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes a list of trading community party usage Assignment SDO that satisfy the inbound criteria and any warning or information messages.

findPartyUsageAssignmentgetUsageAssignmentByPartyIdCodeDate

The Find operation for the Party Usage assigned to a trading community Organization or trading community Person.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyId	long	The unique identifier of the trading community organization or the trading community person that needs to be verified along with the party usage code for a given date.
bindPartyUsageCode	string	The code to filter the party usages associated with the trading community organization or the trading community person.
bindEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The effective date used to filter the party usages associated with the trading community organization or the trading community person.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes the successfully created trading community party usage Assignment SDO and a list of warning or information messages.

findPartyUsageAssignmentPartyUsageAssgnOneWaySyncVOCriteria

Verifies if the party is an external contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyId	long	The unique identifier of the party that needs to be verified.
bindEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The effective date used to filter the party usages associated with the party.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes a list of trading community party usage Assignment SDO that satisfy the inbound criteria and any warning or information messages.

findPartyUsageAssignmentPartyUsageAssignRoleProvVOCriteria

Verifies if the party is an employee or contingent worker for a given date.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyId	long	The unique identifier of the party that needs to be verified.
bindStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The date when the employee or contingent worker record starts.
bindEndDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The date when employee or contingent worker record ends.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes the successfully created trading community party usage Assignment SDO and a list of warning or information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name; an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used to evaluate the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined for this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for the service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
endPartyUsageAssignment	HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
endPartyUsageAssignment	HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.

Operation Name	Privilege Code	Privilege Name	Privilege Description
findPartyUsageAssignment	HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
findPartyUsageAssignment	HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
findPartyUsageAssignmentPartyUsa	HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
findPartyUsageAssignmentPartyUsa	HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
assignPartyUsage	HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
assignPartyUsage	HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
findPartyUsageAssignmentPartyUsa	HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
findPartyUsageAssignmentPartyUsa	HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
findPartyUsageAssignmentgetUsag	HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.

Operation Name	Privilege Code	Privilege Name	Privilege Description
findPartyUsageAssignmentgetUsag	HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	Cash Positioning and Forecasting Management	Manages cash positioning and forecasting, including performing deep-dive analyses of cash flows from various sources.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_CE_CASH_MANAGEMENT_ADMINISTRATION_DUTY_CRM	Cash Management Administration	Sets up system parameters, lookups, profile options, and descriptive flexfields. Examples include cash pooling setups, bank account, and reconciliation matching rules.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_RCL_FIELD_SERVICE_ADMINISTRATOR_JOB	Field Service Administrator	Individual responsible for the administration of field service logistics.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	ORA_ZBS_SALES_ ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	ORA_ZCH_TRADING_ COMMUNITY_DATA_STEWARD_ JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	ORA_ZBS_SALES_ REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_HZ_RESOURCE_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_CE_CASH_MANAGEMENT_ADMINISTRATION_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_IBY_DISBURSEMENT_PROCESS_MANAGEMENT_DUTY_CRM	Disbursement Process Management	Assigns payment process attributes to documents payable, resolves document and payment validation errors, and reviews proposed payments. Views items that were rejected or removed from a payment process request.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			budgeted funds for marketing activities.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_ AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ EXECUTION_MANAGEMENT_ DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ CHANNEL_ADMINISTRATION_ DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_ SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_ SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_ SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_ SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_ SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_ TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_ TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_ TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_XLA_SUBLEDGER_ACCOUNTING_MANAGER_DUTY_CRM	Subledger Accounting Manager	Creates accounting for transactions, reviews journal entries, and runs account analysis, journal entries, and period close exceptions reports.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_XLA_SUBLEDGER_ACCOUNTING_REPORTING_DUTY_CRM	Subledger Accounting Reporting	Runs all subledger accounting reports, and reviews journal entries.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Trading Community Party Usage Assignment Service

A framework to assign party usages to trading community members. For example, John Doe is assigned a usage to indicate he is a sales account contact and ABC Corporation is assigned a usage to indicate that it is a supplier. This service is deprecated and is replaced with New Service PartyInformationService. Internal Name oracle.apps.cdm.foundation.parties.partyService.PartyInformationService.

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/applicationModule/}PartyInfoService

Service WSDL URL: https://servername/crmService/PartyInfoService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Group
- CRM : Trading Community Model : Trading Community Group
- CRM : Trading Community Model : Trading Community Group

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Trading Community Party Information*
Handles	*Usage Assignment*

Operations

- *assignPartyUsage*
- *endPartyUsageAssignment*
- *findPartyUsageAssignment*
- *findPartyUsageAssignmentgetUsageAssignmentByPartyIdCodeDate*
- *findPartyUsageAssignmentPartyUsageAssgnOneWaySyncVOCriteria*
- *findPartyUsageAssignmentPartyUsageAssignRoleProvVOCriteria*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

assignPartyUsage

The Create operation for the trading community party usage assignment SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsageAssignment	*Usage Assignment*	The trading community party usage assignment SDO to be created.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes the successfully created trading community party usage Assignment SDO and a list of warning or information messages.

endPartyUsageAssignment

The Update operation for the trading community party usage assignment SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsageAssignment	*Usage Assignment*	The trading community party usage assignment SDO to be updated.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes the successfully updated trading community party usage Assignment SDO and a list of warning or information messages.

findPartyUsageAssignment

The Find operation for the trading community party usage assignment SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes a list of trading community party usage Assignment SDO that satisfy the inbound criteria and any warning or information messages.

findPartyUsageAssignmentgetUsageAssignmentByPartyIdCodeDate

The Find operation for the party usage assigned to a trading community organization or trading community person.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyId	long	The unique identifier of the trading community organization or the trading community person

Element Name	Type	Description
		that needs to be verified along with the party usage code for a given date.
bindPartyUsageCode	string	The code to filter the party usages associated with the trading community organization or the trading community person.
bindEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The effective date used to filter the party usages associated with the trading community organization or the trading community person.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes the successfully created trading community party usage Assignment SDO and a list of warning or information messages.

findPartyUsageAssignmentPartyUsageAssgnOneWaySyncVOCriteria

Verifies if the party is an external contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyId	long	The unique identifier of the party that needs to be verified.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes a list of trading community party usage Assignment

Element Name	Type	Description
		SDO that satisfy the inbound criteria and any warning or information messages.

findPartyUsageAssignmentPartyUsageAssignRoleProvVOCriteria

Verifies if the party is an employee or contingent worker for a given date.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyId	long	The unique identifier of the party that needs to be verified.
bindStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the employee or contingent worker record starts.
bindEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when employee or contingent worker record ends.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes the successfully created trading community party usage Assignment SDO and a list of warning or information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name; an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used to evaluate the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined for this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for the service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create,

Element Name	Type	Description
		update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
endPartyUsageAssignment	HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
endPartyUsageAssignment	HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
findPartyUsageAssignment	HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
findPartyUsageAssignment	HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
findPartyUsageAssignmentPartyUsa	HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
findPartyUsageAssignmentPartyUsa	HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
assignPartyUsage	HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the

Operation Name	Privilege Code	Privilege Name	Privilege Description
			trading community organization usage assignment.
assignPartyUsage	HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
findPartyUsageAssignmentPartyUsa	HZ_MANAGE_TRADING_ COMMUNITY_ORGANIZATION_ USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
findPartyUsageAssignmentPartyUsa	HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
findPartyUsageAssignmentgetUsag	HZ_MANAGE_TRADING_ COMMUNITY_ORGANIZATION_ USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
findPartyUsageAssignmentgetUsag	HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_ COMMUNITY_ORGANIZATION_ USAGE_ASSIGNMENT_PRIV	ORA_CE_CASH_POSITION_AND_ FORECAST_MANAGEMENT_ DUTY_CRM	Cash Positioning and Forecasting Management	Manages cash positioning and forecasting, including performing deep-dive analyses of cash flows from various sources.
HZ_MANAGE_TRADING_ COMMUNITY_ORGANIZATION_ USAGE_ASSIGNMENT_PRIV	ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_MANAGE_TRADING_ COMMUNITY_ORGANIZATION_ USAGE_ASSIGNMENT_PRIV	ORA_CE_CASH_MANAGEMENT_ ADMINISTRATION_DUTY_CRM	Cash Management Administration	Sets up system parameters, lookups, profile options, and descriptive flexfields. Examples include cash pooling setups,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			bank account, and reconciliation matching rules.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_RCL_FIELD_SERVICE_ADMINISTRATOR_JOB	Field Service Administrator	Individual responsible for the administration of field service logistics.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	ORA_ZBS_SALES_ REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_HZ_RESOURCE_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_CE_CASH_MANAGEMENT_ADMINISTRATION_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_IBY_DISBURSEMENT_PROCESS_MANAGEMENT_DUTY_CRM	Disbursement Process Management	Assigns payment process attributes to documents payable, resolves document and payment validation errors, and reviews proposed payments. Views items that were rejected or removed from a payment process request.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ EXECUTION_MANAGEMENT_ DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ CHANNEL_ADMINISTRATION_ DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_ SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_XLA_SUBLEDGER_ACCOUNTING_MANAGER_DUTY_CRM	Subledger Accounting Manager	Creates accounting for transactions, reviews journal entries, and runs account analysis, journal entries, and period close exceptions reports.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_XLA_SUBLEDGER_ACCOUNTING_REPORTING_DUTY_CRM	Subledger Accounting Reporting	Runs all subledger accounting reports, and reviews journal entries.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Usage Assignment

The party usage assigned to a trading community member. For example, John Doe is a contact of ABC Corporation and XYZ Corporation is a supplier.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyUsageAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Party Usage Assignment Service*
Handled by	*Trading Community Party Information*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
PartyUsageCode	string	The usage context of a party's contact point.
PartyUsgAssignmentId	long	The unique identifier of the party usage assignment. • Primary Key
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Trading Community Party Usage Assignment Service (Deprecated)

A framework to assign party usages to trading community members. For example, John Doe is assigned a usage to indicate he is a sales account contact and ABC Corporation is assigned a usage to indicate that it is a supplier. This service is deprecated and is replaced with New Service PartyInformationService. Internal Name oracle.apps.cdm.foundation.parties.partyService.PartyInformationService.

Life Cycle Status: Deprecated. This service is deprecated and replaced by .

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/applicationModule/}PartyInfoService

Service WSDL URL: https://servername/crmService/PartyInfoService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Group
- CRM : Trading Community Model : Trading Community Group
- CRM : Trading Community Model : Trading Community Group

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Next version is	*Trading Community Party Information*
Handles	*Usage Assignment*

Operations

- *assignPartyUsage*
- *endPartyUsageAssignment*

- *findPartyUsageAssignment*
- *findPartyUsageAssignmentgetUsageAssignmentByPartyIdCodeDate*
- *findPartyUsageAssignmentPartyUsageAssgnOneWaySyncVOCriteria*
- *findPartyUsageAssignmentPartyUsageAssignRoleProvVOCriteria*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

assignPartyUsage

The Create operation for the trading community party usage assignment SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsageAssignment	*Usage Assignment*	The trading community party usage assignment SDO to be created.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes the successfully created trading community party usage Assignment SDO and a list of warning or information messages.

endPartyUsageAssignment

The Update operation for the trading community party usage assignment SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsageAssignment	*Usage Assignment*	The trading community party usage assignment SDO to be updated.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes the successfully updated trading community party usage Assignment SDO and a list of warning or information messages.

findPartyUsageAssignment

The Find operation for the trading community party usage assignment SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes a list of trading community party usage Assignment SDO that satisfy the inbound criteria and any warning or information messages.

findPartyUsageAssignmentgetUsageAssignmentByPartyIdCodeDate

The Find operation for the party usage assigned to a trading community organization or trading community person.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyId	long	The unique identifier of the trading community organization or the trading community person that needs to be verified along with the party usage code for a given date.

Element Name	Type	Description
bindPartyUsageCode	string	The code to filter the party usages associated with the trading community organization or the trading community person.
bindEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The effective date used to filter the party usages associated with the trading community organization or the trading community person.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes the successfully created trading community party usage Assignment SDO and a list of warning or information messages.

findPartyUsageAssignmentPartyUsageAssgnOneWaySyncVOCriteria

Verifies if the party is an external contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyId	long	The unique identifier of the party that needs to be verified.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes a list of trading community party usage Assignment

Element Name	Type	Description
		SDO that satisfy the inbound criteria and any warning or information messages.

findPartyUsageAssignmentPartyUsageAssignRoleProvVOCriteria

Verifies if the party is an employee or contingent worker for a given date.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyId	long	The unique identifier of the party that needs to be verified.
bindStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the employee or contingent worker record starts.
bindEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when employee or contingent worker record ends.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes the successfully created trading community party usage Assignment SDO and a list of warning or information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name; an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used to evaluate the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined for this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for the service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create,

Element Name	Type	Description
		update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
endPartyUsageAssignment	HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
endPartyUsageAssignment	HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
findPartyUsageAssignment	HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
findPartyUsageAssignment	HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
findPartyUsageAssignmentPartyUsa	HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
findPartyUsageAssignmentPartyUsa	HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
assignPartyUsage	HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the

Operation Name	Privilege Code	Privilege Name	Privilege Description
			trading community organization usage assignment.
assignPartyUsage	HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
findPartyUsageAssignmentPartyUsa	HZ_MANAGE_TRADING_ COMMUNITY_ORGANIZATION_ USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
findPartyUsageAssignmentPartyUsa	HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
findPartyUsageAssignmentgetUsag	HZ_MANAGE_TRADING_ COMMUNITY_ORGANIZATION_ USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
findPartyUsageAssignmentgetUsag	HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_ COMMUNITY_ORGANIZATION_ USAGE_ASSIGNMENT_PRIV	ORA_CE_CASH_POSITION_AND_ FORECAST_MANAGEMENT_ DUTY_CRM	Cash Positioning and Forecasting Management	Manages cash positioning and forecasting, including performing deep-dive analyses of cash flows from various sources.
HZ_MANAGE_TRADING_ COMMUNITY_ORGANIZATION_ USAGE_ASSIGNMENT_PRIV	ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_MANAGE_TRADING_ COMMUNITY_ORGANIZATION_ USAGE_ASSIGNMENT_PRIV	ORA_CE_CASH_MANAGEMENT_ ADMINISTRATION_DUTY_CRM	Cash Management Administration	Sets up system parameters, lookups, profile options, and descriptive flexfields. Examples include cash pooling setups,

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			bank account, and reconciliation matching rules.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_RCL_FIELD_SERVICE_ADMINISTRATOR_JOB	Field Service Administrator	Individual responsible for the administration of field service logistics.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	ORA_ZBS_SALES_ REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_HZ_RESOURCE_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_CE_CASH_MANAGEMENT_ADMINISTRATION_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_IBY_DISBURSEMENT_PROCESS_MANAGEMENT_DUTY_CRM	Disbursement Process Management	Assigns payment process attributes to documents payable, resolves document and payment validation errors, and reviews proposed payments. Views items that were rejected or removed from a payment process request.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ EXECUTION_MANAGEMENT_ DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ CHANNEL_ADMINISTRATION_ DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_ SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_ ORGANIZATION_ ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_ HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_XLA_SUBLEDGER_ACCOUNTING_MANAGER_DUTY_CRM	Subledger Accounting Manager	Creates accounting for transactions, reviews journal entries, and runs account analysis, journal entries, and period close exceptions reports.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_XLA_SUBLEDGER_ACCOUNTING_REPORTING_DUTY_CRM	Subledger Accounting Reporting	Runs all subledger accounting reports, and reviews journal entries.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Trading Community Party Information

A framework to assign party usages to trading community members. For example, John Doe is assigned a usage to indicate he is a sales account contact and ABC Corporation is assigned a usage to indicate that it is a supplier.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/applicationModule/}PartyInformationService

Service WSDL URL: https://servername/crmService/PartyInformationService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Group
- CRM : Trading Community Model : Trading Community Group
- CRM : Trading Community Model : Trading Community Group

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Previous version is	*Trading Community Party Usage Assignment Service*
Handles	*Usage Assignment*

Operations

- *assignPartyUsage*
- *endPartyUsageAssignment*
- *findPartyUsageAssignment*
- *findPartyUsageAssignmentgetUsageAssignmentByPartyIdCodeDate*
- *findPartyUsageAssignmentPartyUsageAssgnOneWaySyncVOCriteria*
- *findPartyUsageAssignmentPartyUsageAssignRoleProvVOCriteria*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

assignPartyUsage

The Create operation for the trading community party usage assignment SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsageAssignment	*Usage Assignment*	The trading community party usage assignment SDO to be created.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The trading community party usage assignment SDO to be updated.

endPartyUsageAssignment

The Update operation for the trading community party usage assignment SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyUsageAssignment	*Usage Assignment*	The trading community party usage assignment SDO to be updated.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes the successfully updated trading community party usage Assignment SDO and a list of warning or information messages.

findPartyUsageAssignment

The Find operation for the trading community party usage assignment SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes a list of trading community party usage Assignment SDO that satisfy the inbound criteria and any warning or information messages.

findPartyUsageAssignmentgetUsageAssignmentByPartyIdCodeDate

The Find operation for the Party Usage assigned to a trading community Organization or trading community Person.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyId	long	The unique identifier of the trading community organization or the trading community person that needs to be verified along with the party usage code for a given date.
bindPartyUsageCode	string	The code to filter the party usages associated with the trading community organization or the trading community person.
bindEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The effective date used to filter the party usages associated with the trading community organization or the trading community person.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes the successfully created trading community party usage Assignment SDO and a list of warning or information messages.

findPartyUsageAssignmentPartyUsageAssgnOneWaySyncVOCriteria

Verifies if the party is an external contact.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyId	long	The unique identifier of the party that needs to be verified.
bindEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The effective date used to filter the party usages associated with the party.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes a list of trading community party usage Assignment SDO that satisfy the inbound criteria and any warning or information messages.

findPartyUsageAssignmentPartyUsageAssignRoleProvVOCriteria

Verifies if the party is an employee or contingent worker for a given date.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyId	long	The unique identifier of the party that needs to be verified.
bindStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The date when the employee or contingent worker record starts.
bindEndDate	{http://xmlns.oracle.com/adf/svc/types/}dateDate	The date when employee or contingent worker record ends.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Usage Assignment*	The result of the operation that includes the successfully created trading community party usage Assignment SDO and a list of warning or information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name; an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used to evaluate the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined for this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for the service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
endPartyUsageAssignment	HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
endPartyUsageAssignment	HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
findPartyUsageAssignment	HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the

Operation Name	Privilege Code	Privilege Name	Privilege Description
			trading community organization usage assignment.
findPartyUsageAssignment	HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
findPartyUsageAssignmentPartyUsa	HZ_MANAGE_TRADING_ COMMUNITY_ORGANIZATION_ USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
findPartyUsageAssignmentPartyUsa	HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
assignPartyUsage	HZ_MANAGE_TRADING_ COMMUNITY_ORGANIZATION_ USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
assignPartyUsage	HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
findPartyUsageAssignmentPartyUsa	HZ_MANAGE_TRADING_ COMMUNITY_ORGANIZATION_ USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
findPartyUsageAssignmentPartyUsa	HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability to view the trading community person usage assignment.
findPartyUsageAssignmentgetUsag	HZ_MANAGE_TRADING_ COMMUNITY_ORGANIZATION_ USAGE_ASSIGNMENT_PRIV	Manage Trading Community Organization Usage Assignment	Allows the assignment of usages to an organization. If assigning, also assign the ability to view the trading community organization usage assignment.
findPartyUsageAssignmentgetUsag	HZ_MANAGE_TRADING_ COMMUNITY_PERSON_USAGE_ ASSIGNMENT_PRIV	Manage Trading Community Person Usage Assignment	Allows the specification of party usage assignment to a person. If assigning, also assign the ability

Operation Name	Privilege Code	Privilege Name	Privilege Description
			to view the trading community person usage assignment.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	Cash Positioning and Forecasting Management	Manages cash positioning and forecasting, including performing deep-dive analyses of cash flows from various sources.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_CE_CASH_MANAGEMENT_ADMINISTRATION_DUTY_CRM	Cash Management Administration	Sets up system parameters, lookups, profile options, and descriptive flexfields. Examples include cash pooling setups, bank account, and reconciliation matching rules.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_RCL_FIELD_SERVICE_ADMINISTRATOR_JOB	Field Service Administrator	Individual responsible for the administration of field service logistics.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_MANAGE_TRADING_COMMUNITY_ORGANIZATION_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
HZ_MANAGE_TRADING_COMMUNITY_PERSON_USAGE_ASSIGNMENT_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_HZ_RESOURCE_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_CE_CASH_MANAGEMENT_ADMINISTRATION_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_IBY_DISBURSEMENT_PROCESS_MANAGEMENT_DUTY_CRM	Disbursement Process Management	Assigns payment process attributes to documents payable, resolves document and payment validation errors, and reviews proposed payments. Views items that were rejected or removed from a payment process request.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ EXECUTION_MANAGEMENT_ DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			of appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			submit deal registrations and view updates.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			sales lead generation and predictive model learning.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			and relationship information inquiries.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_XLA_SUBLEDGER_ACCOUNTING_MANAGER_DUTY_CRM	Subledger Accounting Manager	Creates accounting for transactions, reviews journal entries, and runs account analysis, journal entries, and period close exceptions reports.
ORA_CE_CASH_POSITION_AND_FORECAST_MANAGEMENT_DUTY_CRM	ORA_XLA_SUBLEDGER_ACCOUNTING_REPORTING_DUTY_CRM	Subledger Accounting Reporting	Runs all subledger accounting reports, and reviews journal entries.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Usage Assignment

The party usage assigned to a trading community member. For example, John Doe is a contact of ABC Corporation and XYZ Corporation is a supplier.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyUsageAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Party Usage Assignment Service*
Handled by	*Trading Community Party Information*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*

Relationship Type	Object or Service
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
PartyUsageCode	string	The usage context of a party's contact point.
PartyUsgAssignmentId	long	The unique identifier of the party usage assignment. • Primary Key
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Trading Community Person Information

An individual who either directly enters into a business relationship or represents an organization in a business relationship. For example, John Doe, Mary Doe who works at Oracle.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/}PersonService

Service WSDL URL: https://servername/crmService/FoundationPartiesPersonService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Person

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Additional Contact Name*
Handles	*Trading Community Original System Mapping Identifier Additional Information*
Handles	*Classification Assignment*
Handles	*Source System Reference*
Handles	*Relationship*
Handles	*Telex*
Handles	*Trading Community Address Purpose*
Handles	*Financial Profile*
Handles	*Web*
Handles	*Contact*
Handles	*Trading Community Address Additional Information*
Handles	*Employment History*
Handles	*Work Class*
Handles	*Usage Assignment*
Handles	*E-Mail Domain*
Handles	*Instant Messaging*
Handles	*Education*
Handles	*E-Mail*
Handles	*Customer Contact Responsibility*
Handles	*Customer Contact Profile*
Handles	*Address*

Relationship Type	Object or Service
Handles	*Trading Community Relationship Additional Information*
Handles	*Contact Interest*
Handles	*Electronic File Transfer*
Handles	*Contact Address*
Handles	*Trading Community Person Details*
Handles	*Credit Rating*
Handles	*Trading Community Person Profile Additional Information*
Handles	*Contact Preference*
Handles	*Phone*
Handles	*Contact Language*
Handles	*Trading Community Organization Contact Additional Information*
Handles	*Certification*
Handles	*Additional Identifier*
Handles	*Trading Community Contact Point Additional Information*
Handles	*Citizenship*
Handles	*Preference*

Operations

- *getPersonProfile*
- *addFavoriteContact*
- *removeFavoriteContact*
- *getNearByContacts*
- *getNearByContactsByLocationId*
- *getPerson*

- *createPerson*
- *updatePerson*
- *deletePerson*
- *mergePerson*
- *findPerson*
- *getPersonByOriginalSystemReference*
- *getPersonsFilteredByPartyUsageCode*
- *getPersonsFilteredByPartyUsageFilterRuleCode*
- *processPerson*
- *processCSPerson*
- *updatePersonProfile*
- *mergePersonProfile*
- *findPersonProfile*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getPersonProfile

The Get operation for trading community person profile. You can query the profile with party ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
PartyId	long	The unique identifier of the party.

Response Payload

Element Name	Type	Description
result	*Contact*	The trading community person profile that matches the inbound key attributes.

addFavoriteContact

Adds the key contact for the user.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contactPartyId	long	The unique identifier of the contact party.
userName	string	The user for which the key contact was stored.

Response Payload

Element Name	Type	Description
result	void	void

removeFavoriteContact

Removes the key contact for the user.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
contactPartyId	long	The party ID of the person to be removed from key contacts.
userName	string	The user for which the key contact was removed.

Response Payload

Element Name	Type	Description
result	void	void

getNearByContacts

The Get operation for trading community person profile. You can query the person profile with latitude, longitude, distance and unit of measure.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
latitude	decimal	The latitude of the location.
longitude	decimal	The longitude of the location.
distance	decimal	The distance from the input location.
unitOfMeasure	string	The unit of measure of the distance.

Response Payload

Element Name	Type	Description
result	*Contact*	The collection of trading community person profiles that matches the inbound key attributes.

getNearByContactsByLocationId

The Get operation for trading community person profile. You can query the person profile with location ID, distance, and unit of measure.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
locationId	long	The unique identifier of the location.
distance	decimal	The distance from the input location.
unitOfMeasure	string	The unit of measure of the distance.

Response Payload

Element Name	Type	Description
result	*Contact*	The collection of trading community person profile that matches the inbound key attributes.

getPerson

The Get operation for the trading community person details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	The unique identifier of the party.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonResult	The trading community person details that matches the inbound key attributes.

createPerson

The Create operation for the trading community person details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
personParty	*Trading Community Person Details*	The trading community person details to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonResult	The result of the operation that includes the successfully created trading community person details and a list of warning or information messages.

updatePerson

The Update operation for the trading community person details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
personParty	*Trading Community Person Details*	The trading community person details to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonResult	The result of the operation that includes the successfully updated trading community person details and a list of warning or information messages.

deletePerson

The Delete operation for the trading community person details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
personParty	*Trading Community Person Details*	The trading community person details to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergePerson

The Merge operation for trading community person details. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
personParty	*Trading Community Person Details*	The trading community person details to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonResult	The result of the operation that includes the successfully merged trading community person details and a list of warning or information messages.

findPerson

The Find operation for trading community person details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Trading Community Person Details*	The result of the operation that includes a list of trading community person details that satisfy the inbound criteria and any warning or information messages encountered during the invocation.

getPersonByOriginalSystemReference

The Get operation for trading community person filtered by the source system reference.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindOrigSystem	string	The unique code of the original system.
bindOrigSystemReference	string	The unique identifier of the original system reference.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonResult	The trading community person details that matches the inbound party usage code.

getPersonsFilteredByPartyUsageCode

The Get operation for trading community person filtered by the party usage.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyUsageCode	string	The party usage code used to filter users.
bindEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The effective date to filter the party usages associated with the person.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonResult	The trading community person details that matches the inbound party usage code.

getPersonsFilteredByPartyUsageFilterRuleCode

The Get operation for trading community person filtered by the party usage filter rule.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
bindPartyUsageFrCode	string	The party usage filter rule used to filter a person.
bindEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The effective date to filter the party usages associated with the person.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonResult	The trading community person details that matches the inbound party usage filter rule code.

processPerson

The Bulk load operation for trading community person details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what actions were performed, such as Create, Update, Merge, or Delete.

Element Name	Type	Description
personParty	*Trading Community Person Details*	A list of the trading community person details to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Trading Community Person Details*	The result of the operation that includes a list of trading community person details that are successfully processed and any warning or information messages encountered during the invocation.

processCSPerson

An operation to apply the changes back to the data source for trading community person details.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object used to represent the changes that were made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created and updated data objects, and all warning and informational messages.

updatePersonProfile

The Update operation for trading community person profile. You can update the profile with the party ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
personDVO	*Contact*	The trading community person profile to be updated.

Response Payload

Element Name	Type	Description
result	*Contact*	The result of the operation that includes the successfully updated trading community person profile and a list of warning or information messages.

mergePersonProfile

The Update operation for trading community person profile. You can update the profile with the party ID.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
personDVO	*Contact*	The trading community person profile to be merged.

Response Payload

Element Name	Type	Description
result	*Contact*	The result of the operation that includes the successfully merged trading community person profile and a list of warning or information messages.

findPersonProfile

The Find operation for trading community person profile.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Contact*	The result of the operation that includes a list of trading community person profile that satisfy the inbound criteria and any warning or information messages encountered during the invocation.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used when evaluating the locale-based user interface hints. The localeName is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and the Delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
deletePerson	HZ_REMOVE_TRADING_ COMMUNITY_PERSON_PRIV	Remove Trading Community Person	Allows the removal of persons.
processPerson	HZ_UPDATE_TRADING_ COMMUNITY_PERSON_PRIV	Update Trading Community Person	Allows the update of person information. If assigning, also assign the ability to view the trading community person.
processPerson	HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	Enter Trading Community Person	Allows the specification of person information. If assigning, also assign the ability to view the trading community person.
removeFavoriteContact	HZ_UPDATE_TRADING_ COMMUNITY_PERSON_PRIV	Update Trading Community Person	Allows the update of person information. If assigning, also assign the ability to view the trading community person.
removeFavoriteContact	HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	Enter Trading Community Person	Allows the specification of person information. If assigning, also assign the ability to view the trading community person.
getNearByContacts	HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	View Trading Community Person	Allows exporting, searching, and viewing of person details such as addresses, classifications, identifiers, and names.
findPerson	HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	View Trading Community Person	Allows exporting, searching, and viewing of person details such as addresses, classifications, identifiers, and names.
getPerson	HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	View Trading Community Person	Allows exporting, searching, and viewing of person details such as addresses, classifications, identifiers, and names.
updatePerson	HZ_UPDATE_TRADING_ COMMUNITY_PERSON_PRIV	Update Trading Community Person	Allows the update of person information. If assigning, also assign the ability to view the trading community person.
getNearByContactsByLocationId	HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	View Trading Community Person	Allows exporting, searching, and viewing of person details such as addresses, classifications, identifiers, and names.
All Operations	HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	Enter Trading Community Person	Allows the specification of person information. If assigning, also assign the ability to view the trading community person.

Operation Name	Privilege Code	Privilege Name	Privilege Description
mergePerson	HZ_UPDATE_TRADING_ COMMUNITY_PERSON_PRIV	Update Trading Community Person	Allows the update of person information. If assigning, also assign the ability to view the trading community person.
mergePerson	HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	Enter Trading Community Person	Allows the specification of person information. If assigning, also assign the ability to view the trading community person.
getPersonByOriginalSystemReferen	HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	View Trading Community Person	Allows exporting, searching, and viewing of person details such as addresses, classifications, identifiers, and names.
processCSPerson	HZ_UPDATE_TRADING_ COMMUNITY_PERSON_PRIV	Update Trading Community Person	Allows the update of person information. If assigning, also assign the ability to view the trading community person.
processCSPerson	HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	Enter Trading Community Person	Allows the specification of person information. If assigning, also assign the ability to view the trading community person.
getPersonsFilteredByPartyUsageCo	HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	View Trading Community Person	Allows exporting, searching, and viewing of person details such as addresses, classifications, identifiers, and names.
addFavoriteContact	HZ_UPDATE_TRADING_ COMMUNITY_PERSON_PRIV	Update Trading Community Person	Allows the update of person information. If assigning, also assign the ability to view the trading community person.
addFavoriteContact	HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	Enter Trading Community Person	Allows the specification of person information. If assigning, also assign the ability to view the trading community person.
createPerson	HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	Enter Trading Community Person	Allows the specification of person information. If assigning, also assign the ability to view the trading community person.
getPersonsFilteredByPartyUsageFilt	HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	View Trading Community Person	Allows exporting, searching, and viewing of person details such as addresses, classifications, identifiers, and names.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_UPDATE_TRADING_COMMUNITY_PERSON_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_UPDATE_TRADING_COMMUNITY_PERSON_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
HZ_UPDATE_TRADING_COMMUNITY_PERSON_PRIV	ORA_ZCH_DATA_STEWARD_MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_UPDATE_TRADING_COMMUNITY_PERSON_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
HZ_UPDATE_TRADING_COMMUNITY_PERSON_PRIV	ORA_FOM_ORDER_ENTRY_SPECIALIST_JOB	Order Entry Specialist	Individual who is responsible for creating new orders, updating existing orders, and creating order returns.
HZ_UPDATE_TRADING_COMMUNITY_PERSON_PRIV	ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_UPDATE_TRADING_COMMUNITY_PERSON_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
HZ_UPDATE_TRADING_COMMUNITY_PERSON_PRIV	ORA_ZBS_SALES_REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
HZ_UPDATE_TRADING_COMMUNITY_PERSON_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_UPDATE_TRADING_ COMMUNITY_PERSON_PRIV	ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
HZ_REMOVE_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_REMOVE_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_REMOVE_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZCH_TRADING_ COMMUNITY_DATA_STEWARD_ JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	ORA_FOM_ORDER_ENTRY_ SPECIALIST_JOB	Order Entry Specialist	Individual who is responsible for creating new orders, updating existing orders, and creating order returns.
HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZBS_SALES_ ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZCH_TRADING_ COMMUNITY_DATA_STEWARD_ JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.
HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	ORA_PSC_BILLING_ ADMINSTRATION_DUTY_CRM	PSC Manage Billing Activities Role	Allows users to mange billing activities.
HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZBS_SALES_ REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	ORA_PSC_BILLING_ENTRY_DUTY_ CRM	PSC Billing Specialist	Allows users to perform billing duties.
HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.
HZ_ENTER_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			has limited access to customers and contacts.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_AR_CUSTOMER_ MAINTENANCE_SEGREGATED_ DUTY_CRM	Customer Maintenance Segregated	Maintains customer related data except the creation and management of customers.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_JV_JOINT_VENTURE_ ACCOUNTING_MANAGER_JOB	Joint Venture Accounting Manager	Individual responsible for overseeing all functions related to managing joint ventures.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_JV_JOINT_VENTURE_ APPLICATION_ADMINISTRATOR_ JOB	Joint Venture Application Administrator	Superuser responsible for administering all aspects of the joint venture application.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_WSH_SHIPPING_ ADMINISTRATION_DUTY_CRM	Shipping Administration	Manages all setup tasks necessary to implement and maintain Oracle Fusion Shipping.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_EGP_REDWOOD_VIEW_ ITEM_DUTY_CRM	View Item Redwood	Allows users to view item details.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	Data Steward Manager	Manages customer data stewards and has additional privileges including assigning requests.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZBS_SALES_ ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_JV_JOINT_VENTURE_ ACCOUNTANT_JOB	Joint Venture Accountant	Individual responsible for maintaining joint venture terms and managing the processing of joint venture transactions.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZCH_TRADING_ COMMUNITY_DATA_STEWARD_ JOB	Customer Data Steward	Performs customer data management activities including data import, cleansing, duplicate identification, and duplicate resolution.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZBS_SALES_VP_JOB	Sales VP	Manages sales managers within the organization. Responsible for account planning, territory and quota management, and managing sales forecasts for the territory.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZBS_SALES_ REPRESENTATIVE_JOB	Sales Representative	Represents the business to sell its products. Maintains relationships with customers and contacts, builds pipeline, manages leads and opportunities and performs sales forecasting.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZBS_SALES_MANAGER_JOB	Sales Manager	Manages salespersons within the organization. Generates revenue within a territory, builds pipeline, manages territory forecasts, and assists salespersons in closing deals.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_RCL_FIELD_SERVICE_ TECHNICIAN_DUTY_CRM	Field Service Technician	Individual responsible for the duty of field service logistics.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_ZBS_SALES_RESTRICTED_ USER_JOB	Sales Restricted User	Has the same scope of visibility as the Sales Manager role to application data but can only view or read most of that data. The ability to create, update or delete data is restricted to notes, activities, attachments and reports.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_AR_CUSTOMER_ MAINTENANCE_DUTY_CRM	Customer Maintenance	Defines and maintains Receivables attributes of customer accounts and customer account sites.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_IEX_COLLECTIONS_AGENT_ DUTY_CRM	Collections Management Basic	Allows user to perform activities in Collections.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_RCL_FIELD_SERVICE_ ADMINISTRATOR_JOB	Field Service Administrator	Individual responsible for the administration of field service logistics.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_EGP_REDWOOD_MANAGE_ ITEM_DUTY_CRM	Manage Item Redwood	Allows users to create and edit item details.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_FOS_SUPPLY_CHAIN_ CONTROLLER_JOB	Supply Chain Controller	Individual responsible for providing operational controller leadership and guidance to both Finance and Supply Chain Operations leaders in complex, global supply chain organizations. Responsibilities include implementation of effective global supply chain

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			procedures and controls to ensure compliance with the legal inter-company policies the company has put in place, while ensuring goods are flowing to the customer in the most efficient manner possible.
HZ_VIEW_TRADING_ COMMUNITY_PERSON_PRIV	ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_DATA_STEWARD_ MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ REPRESENTATIVE_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_RESTRICTED_ USER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_HZ_RESOURCE_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_WSH_SHIPPING_ADMINISTRATION_DUTY_CRM	ORA_WSH_CARRIER_MANAGEMENT_DUTY_CRM	Carrier Management	Manages setup of carriers including defining carriers, carrier contacts, and shipping methods.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OKC_CONTRACT_REQUEST_AUTHORING_DUTY_CRM	Contract Request Authoring	Authors contract request, uploads relevant documents and provides sufficient information to assignee to create contract.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			to messages, change a reply to ready to send status and delete a message.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_CONV_MESSAGE_MANAGEMENT	Conversation Message Management	Has basic conversation message management capabilities such as create messages and reply to messages. Would not be able to change a reply to ready to send status or delete a message.
ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_IBY_CUSTOMER_PAYMENT_INSTRUMENT_MANAGEMENT_DUTY_CRM	Customer Payment Instrument Management	Manages customer bank accounts and credit cards and other payment details.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_WSH_SHIPPING_ADMINISTRATION_DUTY_CRM	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_MANAGER_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_VP_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_FOS_SUPPLY_CHAIN_CONTROLLER_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_FOM_ORDER_ENTRY_SPECIALIST_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_READ_ONLY_DUTY	Lead Registration Processing Read Only	Read Only role for Lead Registration Processing Duty.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ EXECUTION_MANAGEMENT_ DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_DUTY	Opportunity Sales Manager	Manages all aspects of the application. This role is for sales managers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_MANAGER_READ_ONLY_DUTY	Opportunity Sales Manager Read Only	Read Only role for Opportunity Sales Manager Duty.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_DUTY	Opportunity Sales Representative	Manages or views all aspects of the application. This role is for salespersons.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_SALES_REPRESENTATIVE_READ_ONLY_DUTY	Opportunity Sales Representative Read Only	Read Only role for Opportunity Sales Representative Duty.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.
ORA_ZBS_SALES_VP_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_DUTY	Opportunity Territory Resource	Manages all aspects of the application. This role is for resources whose territories are on the opportunity territory team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOO_OPPORTUNITY_TERRITORY_RESOURCE_READ_ONLY_DUTY	Opportunity Territory Resource Read Only	Read Only role for Opportunity Territory Resource Duty.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_ZX_REGISTRATION_PII_DUTY_CRM	Party Taxpayer Identifier PII	View personally identifiable information for tax registration number of type taxpayer ID.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_VP_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_READ_ONLY_DUTY	Personal Campaign Management Read Only	Read Only role for Personal Campaign Management Duty.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_VP_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_READ_ONLY_DUTY	Product Recommendation Analysis Read Only	Read Only role for Product Recommendation Analysis Duty
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_VP_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZSF_SALES_FORECASTING_DUTY	Sales Forecasting	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_VP_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_DUTY	Sales Forecasting Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing subordinates forecasts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZSF_SALES_FORECASTING_MANAGEMENT_READ_ONLY_DUTY	Sales Forecasting Management Read Only	Read Only role for Sales Forecasting Management Duty.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_VP_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_READ_ONLY_DUTY	Sales Lead Follow Up Management Read Only	Read Only role for Sales Lead Follow Up Management Duty.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_READ_ONLY_DUTY	Sales Lead Follow Up Read Only	Read Only role for Sales Lead Follow Up Duty
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_VP_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_READ_ONLY_DUTY	Sales Party Management Read Only	Read Only role for Sales Party Management Duty.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_MANAGER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_VP_JOB	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_JV_JOINT_VENTURE_ACCOUNTANT_JOB	ORA_XLA_SUBLEDGER_ACCOUNTING_MANAGER_DUTY_CRM	Subledger Accounting Manager	Creates accounting for transactions, reviews journal entries, and runs account analysis,

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			journal entries, and period close exceptions reports.
ORA_JV_JOINT_VENTURE_ACCOUNTING_MANAGER_JOB	ORA_XLA_SUBLEDGER_ACCOUNTING_REPORTING_DUTY_CRM	Subledger Accounting Reporting	Runs all subledger accounting reports, and reviews journal entries.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_MANAGER_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_VP_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_FOS_SUPPLY_CHAIN_CONTROLLER_JOB	ORA_POZ_SUPPLIER_PROFILE_INQUIRY_DUTY_CRM	Supplier Profile Inquiry	View supplier profile information.
ORA_FOS_SUPPLY_CHAIN_CONTROLLER_JOB	ORA_POZ_PROFILE_INQUIRY_AS_SUPPLIER_DUTY_CRM	Supplier Profile Inquiry as Supplier	Views non-bank account related supplier profile information as a supplier.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_EGP_REDWOOD_VIEW_ITEM_DUTY_CRM	ORA_RCS_SCM_COMMON_VIEW_WEB_SERVICE_DUTY_CRM	Supply Chain Common View Web Service	Provides view only web service access to supply chain common to perform activities such as viewing inventory organizations, plant parameters, carriers and units of measure list of values.
ORA_ZBS_SALES_MANAGER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_VP_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZBS_SALES_RESTRICTED_USER_JOB	ORA_MOT_TERRITORY_MANAGEMENT_READ_ONLY_DUTY	Territory Management Read Only	Read Only role for Territory Management Duty.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_DATA_STEWARD_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_TRADING_COMMUNITY_DATA_STEWARD_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZBS_SALES_MANAGER_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_REPRESENTATIVE_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data
ORA_ZBS_SALES_VP_JOB	ORA_ZCA_VIEW_CX_AI_AGENTS	View CX AI Agents	This role allows at run-time UI to access agent meta data

Additional Contact Name

An additional name of a person, such as the maiden name or alias.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}AdditionalPersonName

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPreferredFlag	boolean	Indicator to specify the preferred additional name of a person.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNameId	long	The unique identifier of the party name ID. It is primary key and system generated. • Primary Key
PartyNameType	string	The type of the name. It is a value defined by the additional party name and identifier type entity. The party type must be consistent with the party type that the PARTY_NAME_TYPE can be applied to.
PersonAcademicTitle	string	Used to specify the academic title for a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field degree in HL7.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	Used to specify the last name prefix such as fon, van, and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_PREFIX in HZ_PERSON_PROFILES is used. It corresponds to the field Last Name Prefix in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	Used to specify the name suffix such as junior, senior, the third, and so on for a person. It is used in the same way the homonymous field in

Name	Type	Description
		HZ_PERSON_PROFILES is used. It corresponds to the field Suffix in HL7.
PersonPreNameAdjunct	string	Used to specify the name prefix such as Mr., Ms, Dr, and so on for a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Prefix in HL7. It is validated against lookup CONTACT_TITLE.
PersonPreviousLastName	string	Used to specify the previous last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It has no mapping in HL7.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PreferredFlag	boolean	Indicator to specify the name as preferred name for the party within the name type. Possible values are Y and N. Default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TransliterationLang	string	Used to specify the language used for the name. It is validated against FND_LANGUAGES.LANGUAGE_CODE. Default value is the Session Language.

Additional Identifier

An additional identifier of a trading community member, such as driver's license number or passport number.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}AdditionalPartyId

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Country	string	The name of the country.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Description	string	The free text description of the record.
ExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The expiration date for the identifier. It may be NULL, and does not apply to all types of identifiers.
IssueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date in which the Identifier was issued. It may be NULL and does not apply to all types of identifiers.
IssuingAuthorityName	string	The issuing authority name.
IssuingAuthorityPartyId	long	The unique identifier of the issuing authority.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyIdentifierId	long	The unique identifier of the party identifier. • Primary Key
PartyIdentifierType	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.
PartyIdentifierType1	string	Indicates the type for the current identifier. The list of accepted values are defined in the lookup TYPE_CODE of HZ_NAME_AND_ID_TYPE_B. The party type should be consistent with the party type that the PARTY_IDENTIFIER_TYPE can be applied to.

Name	Type	Description
PartyIdentifierValue	string	The value of the party identifier.
PartyName	string	The name of the party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StateProvince	string	The province of the address.
StatusCode	string	The pre-defined code used to indicate the status.

Address

An address of a trading community member, such as Oracle Corporation is located at 500 Oracle Parkway, Redwood Shores, CA.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Telex*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contains	*Trading Community Address Additional Information*

Relationship Type	Object or Service
Contains	*Email*
Contains	*Electronic File Transfer*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Address1	string	The first line of the address.
Address2	string	The second line of the address.
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
AddressExpirationDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the location is no longer valid.
AddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines that are used in Japan.
AddressStyle	string	Style of the address.
Addressee	string	The information of the addressee.
City	string	The name of the city.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
ContactPreferenceExistFlag	boolean	Indicator to specify if the contact is primary contact for the party.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
Country	string	The name of the country.
Country1	string	The attribute country1 is not used.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
DateValidated	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the address was last validated.
DoNotValidateFlag	boolean	Indicator to specify that a particular location is not eligible for address validation irrespective of the current validation.
Eft	*Electronic File Transfer*	The electronic file transfer information for the party.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedAddress	string	The formatted read-only address.
FormattedLocaleAddress	string	The formatted read-only local address.
FormattedMultilineAddress	string	The formatted multi line address of the party site.
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
HouseType	string	Indicates the building type.
IdentifyingAddressFlag	boolean	Indicator to specify the identifying address for the party. Y stands for the indentifying site and N stands for sites that are not the indentifying site.

Name	Type	Description
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
Language	string	The operating language for the party site.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Latitude	decimal	The latitude of the party address.
LocationDirections	string	Directions to the location.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
LocationLanguage	string	The operating language for the locations.
Longitude	decimal	The longitude of the party address.
Mailstop	string	A user-defined code to indicate a mail drop point within the organization.
ObjectVersionNumber1	int	The attribute is used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was last queried.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary address of the contact irrespective of the context. Y stands for primary address and N stands for all others.
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	Stores the doing-business_as (DBA) party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameDivision	string	Stores the division party name for a party site. This column is used to store FSIO related legal party name attribute.
PartyNameLegal	string	Stores the legal party name for a party site. This column is used to store FSIO related legal party name attribute.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteInformation	*Trading Community Address Additional Information*	The party address information.
PartySiteName	string	The user-defined name for the site.
PartySiteNumber	string	The party site number of the address.
PartySiteType	string	Stores the party site type and is based on the lookup. Currently this is either null or one-time.
PartySiteUse	*Trading Community Address Purpose*	The information of the party address usage.
PartyUsageCode	string	The usage context of a party's contact point.
Phone	*Phone*	The phone information for the entity.
Position	string	The primary direction such as north or east that is used to access the location.
PostalCode	string	The postal code element of the address.
PostalPlus4Code	string	The four digit extension to the United States postal ZIP code.

Name	Type	Description
Province	string	The name of the province.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
State	string	The name of the state.
Status	string	The status of the record.
Telex	*Telex*	The Telex information associated with the party.
UsageCode	string	The usage code is not used.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.
ValidationStatusCode	string	The standardized status code describing the results of the validation.
Web	*Web*	The web information related to the record.

Certification

The certification information of a trading community member, such as a full ISO 9001 registered firm.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}Certification

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CertificationId	long	The unique identifier for certification. • Primary Key
CertificationName	string	The name of the certification such as ISO9000 and GMP001.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurrentStatus	string	The name for the status of the certification. For example, applied for, granted, or expired.

Name	Type	Description
ExpiresOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification expires.
Grade	string	The level or grade of certification provided by the ISSUED_BY_AUTHORITY. For example, founding member, gold, fully certified, and partially certified.
IssuedByAuthority	string	The name of the certifying authority.
IssuedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the certification was issued.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Citizenship

The citizenship information about a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Citizenship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*

Relationship Type	Object or Service
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BirthOrSelected	string	Indicates if the citizenship was granted by being born in the country or by naturalization.
CitizenshipId	long	The unique citizenship identifier of a person. • Primary Key
CountryCode	string	The ISO code of the country from which a person claims citizenship.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DateDisowned	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when an individual renounced citizenship. This is usually a self-declared date that might not match a legal effective date.
DateRecognized	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the country granted citizenship to the individual. For a native-born person, this date is typically the person's date of birth.
DocumentReference	string	The unique reference number such as passport number or naturalization reference number associated with DOCUMENT_TYPE.

Name	Type	Description
DocumentType	string	The class of document that confirms citizenship. For example, a passport, or naturalization papers.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Classification Assignment

The classification code assigned to a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CodeAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Sales Competitor*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Reference*
Handled by	*Sales Reference Customer*
Handled by	*Company and User Registration*
Handled by	*Sales Party*
Handled by	*Sales Competitor Service*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party Territory service*
Handled by	*Sales Party Resource Service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassCategory	string	The name of the classification category.
ClassCode	string	The code of the classification.

Name	Type	Description
CodeAssignmentId	long	The unique identifier of the assignment of an industrial classification code to an object. It is primary key and system generated. • Primary Key
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableKey1	string	The first column of the alphanumeric or multi-part foreign key.
OwnerTableKey2	string	The second column of the alphanumeric or multi-part foreign key.
OwnerTableKey3	string	The third column of the alphanumeric or multi-part foreign key.
OwnerTableKey4	string	The fourth column of the alphanumeric or multi-part foreign key.

Name	Type	Description
OwnerTableKey5	string	The fifth column of the alphanumeric or multi-part foreign key.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PrimaryFlag	boolean	Indicator that specifies if this is the primary class code of a class category for the organization. Y stands for the primary class code and N stands for all others.
Rank	decimal	Ranks classes if multiple classes are assigned to a party.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Contact

The profile information of the trading community person. The profile includes information such as marital status and additional name.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Person Profile Additional Information*
Contained by	*Trading Community Person Details*
Contained by	*Sales Account*

Relationship Type	Object or Service
Contained by	*Loyalty Member*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Loyalty Member Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Alias	string	Person alias name.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Comments	string	The comments for the record.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DataCloudStatus	string	The enrichment status of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.
DateOfDeath	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person died.
DeceasedFlag	boolean	Y or N indicates whether the person is deceased or not.
DeclaredEthnicity	string	The declared ethnicity of the person.
Department	string	The free form text used to name the department.
DepartmentCode	string	The list of values for possible department codes.
Distance	decimal	The distance from the input location.
DoNotCallFlag	boolean	Indicator to specify if the user can send mail to the person or not.
DoNotContactFlag	boolean	Indicator to specify if the user can contact the person through phone, e-mail, or mail or not.
DoNotEmailFlag	boolean	Indicator to specify if the user can send e-mail to the person or not.
DoNotMailFlag	boolean	Indicator to specify if the user can send mail to the person or not.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveLatestChange	string	The date effective entity. Y indicates that this row represents the latest change in the day.

Name	Type	Description
EffectiveSequence	int	The date effective entity. Indicates the order of different changes made during a day. The lowest value represents the earliest change in the day.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
FavoriteContactFlag	boolean	Indicator to specify if the person is key contact.
Gender	string	The gender details such as male, female, or unknown of the person.
HeadOfHouseholdFlag	boolean	The head of household indicator is not used.
HouseholdIncomeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The household income amount is not used.
HouseholdSize	decimal	The household size is not used.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
JobTitle	string	The free form text for the job title.
JobTitleCode	string	The code given to the job title.
LastContactDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the contact was last contacted.
LastEnrichmentDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was last enriched in DaaS.
LastKnownGPS	string	The geophysical location that is, GPS point last reported for the person.
LastSourceUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated by the source application.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdateSourceSystem	string	The source application that last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person.
MaritalStatusEffectiveDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the marital status of the person changed.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party.
PartyNumber	string	The unique identification number for the party.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PersonAcademicTitle	string	The academic title that is part of the name of a person such as Dr. Jane Smith.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonInformation	*Trading Community Person Profile Additional Information*	The information of the person.
PersonInitials	string	The Initials of the name.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_ PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.

Name	Type	Description
PersonLastNamePrefix	string	Used to identify the Last name prefix such as fon, van and so on for a person. It is used in the same way the new field PERSON_LAST_NAME_PREFIX in HZ_PERSON_PROFILES is used. Corresponds to the field, Last Name Prefix in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonName	string	The combination of title, first, middle, last, and suffix names.
PersonNameSuffix	string	Indicates the place in a family structure. For example, III in Tom Jones III.
PersonPreNameAdjunct	string	Salutary introduction such as Mr., Herr, and so on.
PersonPreviousLastName	string	The previous last or surname of the person.
PersonProfileId	long	The unique identifier of the person profile. • Primary Key
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PersonalIncomeAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The estimated gross annual income of the person.
PlaceOfBirth	string	The place where the person was born, including city and country.
PreferredContactEmail	string	The preferred contact e-mail of the person.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactName	string	The preferred contact name of the person.

Name	Type	Description
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredContactPhone	string	The preferred contact phone of the person.
PreferredContactURL	string	The preferred contact uniform resource locator of the person.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryAddressCity	string	The city of the identifying address.
PrimaryAddressCountry	string	The country listed in the TERRITORY_CODE column of the FND_TERRITORY table for the identifying address.
PrimaryAddressCounty	string	The county of the identifying address.
PrimaryAddressLatitude	decimal	The primary address latitude information for the location for spatial proximity and containment purposes.
PrimaryAddressLine1	string	The first line of the identifying address.
PrimaryAddressLine2	string	The second line of the identifying address.
PrimaryAddressLine3	string	The third line of the identifying address.
PrimaryAddressLine4	string	The fourth line of the identifying address.
PrimaryAddressLocationId	long	The primary address location ID.

Name	Type	Description
PrimaryAddressLongitude	decimal	The primary address longitude information for the location for spatial proximity and containment purposes.
PrimaryAddressPostalCode	string	The postal code of the identifying address.
PrimaryAddressProvince	string	The province of the identifying address.
PrimaryAddressState	string	The state of the identifying address.
PrimaryCustomerId	long	The customer party identifier of a primary customer for a given person. There should be a valid relationship between the person and the customer.
PrimaryCustomerName	string	The customer party name of a primary customer for a given person. There should be a valid relationship between the person and the customer.
PrimaryCustomerRelationshipId	long	The unique identifier of the primary customer relationship.
PrimaryEmailAddress	string	The e-mail address of the person.
PrimaryEmailId	long	The primary contact point e-mail ID of the person.
PrimaryFormattedAddress	string	The primary formatted address of the person.
PrimaryFormattedPhoneNumber	string	The primary telephone number formatted in the local format of the person.
PrimaryLanguage	string	The standard name for a language.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneId	long	The primary contact point phone ID of the person.

Name	Type	Description
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURL	string	The uniform resource locator.
PrimaryWebId	long	The unique identifier of the primary uniform resource locator.
Pronunciation	string	The person pronunciation.
RentOwnInd	string	Indicates if the person rents or owns his or her residence. Lookup values include rent, own, lease, and so on.
RequestId	long	A system-generated read-only attribute used by the application framework.
SalesAffinityCode	string	The affinity of a person towards the deploying organization.
SalesBuyingRoleCode	string	The role of a person in the buying process.
Salutation	string	The phrase used to address a party in any correspondence.
Status	string	The status of the record.
SuffixOverriddenFlag	boolean	This attribute has Y if the suffix is overridden by user and N if not. Default value is N.
UniqueNameSuffix	string	Identifies system generated or manually overridden suffix.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.

Contact Address

The address of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PersonPartySite

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Trading Community Address Purpose*
Contains	*Contact Preference*
Contains	*Source System Reference*
Contains	*Trading Community Address Additional Information*
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Addressee	string	The information of the addressee in the contact address.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DUNSNumberC	string	The nine-digit identification number that is assigned to business entities by Dun and Bradstreet.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
GlobalLocationNumber	string	The global location number that uniquely identifies each location in a trading partners enterprise.
IdentifyingAddressFlag	boolean	Indicates whether this is the identifying address for the party. If the value is Y, then this is the identifying address for the party.
Language	string	The language used in the contact's location.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LocationId	long	The identifier of the location. It is the foreign key to the HZ_LOCATIONS table.
Mailstop	string	A user-defined code to indicate a mail drop point within their organization.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary address of the associated object. If the value is True, then this is the primary address. The default value is False.
PartyId	long	The unique identifier of the contact party.
PartyNameDba	string	The doing-business_as (DBA) party name for a party site.
PartyNameDivision	string	The division of the party name for a party site.
PartyNameLegal	string	The legal party name for a party site.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
PartySiteName	string	The address associated with the party site.
PartySiteNumber	string	The alternate identifier of the party site.
PartySiteType	string	The type of the party site.
PartySiteUse	*Trading Community Address Purpose*	Indicates the use of the party site.
PartyUsageCode	string	The usage context of a party's contact point.
PersonPartySiteInformation	*Trading Community Address Additional Information*	The party site information of the person.
Phone	*Phone*	The phone information for the entity.
RelationshipId	long	The relationship identifier for the record.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Contact Interest

The interests of the trading community member, such as baseball, sports car, or painting.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}PersonInterest

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
InterestName	string	A text field that lets you assign a descriptive name to an interest. For example, pets, dogs, baseball, or sports car racing.
InterestTypeCode	string	A code to classify interests for evaluation.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LevelOfInterest	string	The user-defined level number or name to rate the amount of interest in the activity. For example, high, medium, or low.
LevelOfParticipation	string	The user-defined level number or name to indicate if the person participates and to what extent.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PersonInterestId	long	The unique identifier of interests of the person. • Primary Key
RequestId	long	A system-generated read-only attribute used by the application framework.
Since	{http://xmlns.oracle.com/adf/svc/types/}date-Date	An approximate date from which the person was involved with the activity.

Name	Type	Description
SportIndicator	string	Indicates if the activity is a sport. Y stands for sports and N stands for non-sport activities.
Status	string	The status of the record.
SubInterestTypeCode	string	A code to classify subinterests of the interest type code.
Team	string	Any team the person likes to watch or play for.

Contact Language

The languages known information of a trading community member. For example, Mary Smith can speak both Spanish and English but can only read and write English.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PersonLanguage

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Handled by	*Trading Community Group*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LanguageName	string	The standard name for a language. For example, Spanish, Mandarin, or American English. Foreign key to the FND_LANGUAGES table.
LanguageUseReferenceId	long	The unique identifier of the language use reference. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
NativeLanguageFlag	boolean	Indicator to specify if the language is the declared native language of a person. Y stands for a declared native language and N stands for all other languages.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PrimaryLanguageIndicator	string	Indicates if this is the primary language used by a person in day-to-day transactions. Y stands

Name	Type	Description
		for the primary language and N stands for other languages.
ReadsLevel	string	The user-defined level number or name to indicate the ability to read a language.
RequestId	long	A system-generated read-only attribute used by the application framework.
SpeaksLevel	string	The user-defined level number or name to indicate the ability to speak a language.
SpokenComprehensionLevel	string	The code to indicate comprehension of a spoken language.
Status	string	The status of the record.
WritesLevel	string	The user-defined level number or name to indicate the ability to write in a language.

Contact Preference

The contact preference of the trading community member. For example, do not call Joe Smith between 10 a.m. and 12 noon on weekdays.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}ContactPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Electronic Data Interchange*
Contained by	*E-Mail*
Contained by	*Instant Messaging*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Phone*
Contained by	*Telex*
Contained by	*Web*
Contained by	*Contact Address*
Contained by	*Electronic File Transfer*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactLevelTable	string	The table that stores the contact level of the contact preference, and uses the SUBJECT_TABLE lookup. The list of accepted values are HZ_PARTIES, HZ_PARTIES_SITES, or HZ_CONTACT_POINTS.
ContactLevelTableId	long	The foreign key to the table specified in CONTACT_LEVEL_TABLE column. The list of accepted values are PARTY_ID from HZ_PARTIES table, CONTACT_POINT_ID from HZ_CONTACT_POINTS table, or PARTY_SITE_ID from HZ_PARTY_SITES table.
ContactPreferenceId	long	The unique identifier for the contact preference. • Primary Key
ContactType	string	The contact party type that defines whether the contact is a sales account, a prospect, a contact, or any other user-defined party type. The default value is CUSTOMER. A list of accepted values is defined in the lookup CONTACT_TYPE.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaximumNoOfInteractUOMCode	string	The period of time during which the maximum number of interactions applies. Uses the MAX_NO_OF_INTERACT_UOM_CODE lookup.
MaximumNoOfInteractions	decimal	The number of times you can use this contact point. The period of time that this

Name	Type	Description
		number applies is stored in the MAX_NO_OF_INTERACT_UOM_CODE column.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PreferenceCode	string	Indicates whether to use a particular contact method. The list of accepted values are defined in the PREFERENCE_CODE lookup.
PreferenceEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes inactive.
PreferenceEndTimeHR	int	The hour part of time when the contact preference becomes inactive. The time is recorded in the 24 hour format.
PreferenceEndTimeMi	int	The minutes part of the time when the contact preference becomes inactive.
PreferenceStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the contact preference becomes active.
PreferenceStartTimeHR	int	The hour part of time when the contact preference becomes active. The time is recorded in the 24 hour format.
PreferenceStartTimeMi	int	The minutes part of the time when the contact preference becomes active.
PreferenceTopicType	string	The appropriate subjects to send the party that the preference is created for. The list of accepted values are defined in the PREFERENCE_TOPIC_TYPE lookup.
PreferenceTopicTypeCode	string	The code of the preference topic type.
PreferenceTopicTypeId	long	The unique identifier of the preference topic type.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
RequestedBy	string	Indicates if the permission or restriction was created internally or requested by the party. The list of accepted values are defined in the REQUESTED_BY lookup.
Status	string	The status of the record.

Credit Rating

The trading community member's credit rating information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}CreditRating

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Trading Community Person Details*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AverageHighCredit	decimal	The average of all the high credit experiences.
BankruptcyInd	string	Indicates if open bankruptcy exists. Y stands for any open bankruptcy that exists and N stands for no open bankruptcy.
BusinessDiscontinued	string	The business discontinued at the listed location. Prompts reader to contact D and B customer service center if any business is operating.
ClaimsInd	string	Indicates if open claims, legal claims, liens, protested bills, or any equivalent information exists. Y stands for availability of information and N stands for no information.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRatingId	long	The unique identifier of the credit rating. • Primary Key
CreditRiskScoreExplain	string	Explains numeric credit risk score that estimates the risk of delinquent payment over the next 12 months.
CreditScore	string	Indicates the risk of delinquent payments.
CreditScoreAge	decimal	Indicates the age of the credit score expressed in months.

Name	Type	Description
CreditScoreClass	decimal	The date when the credit score was calculated.
CreditScoreCommentary	string	The lookup for explanation codes in the CREDIT_SCORE column.
CreditScoreCommentary10	string	Indicates comments about the credit score.
CreditScoreCommentary2	string	Indicates comments about the credit score.
CreditScoreCommentary3	string	Indicates comments about the credit score.
CreditScoreCommentary4	string	Indicates comments about the credit score.
CreditScoreCommentary5	string	Indicates comments about the credit score.
CreditScoreCommentary6	string	Indicates comments about the credit score.
CreditScoreCommentary7	string	Indicates comments about the credit score.
CreditScoreCommentary8	string	Indicates comments about the credit score.
CreditScoreCommentary9	string	Indicates comments about the credit score.
CreditScoreDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the credit score was calculated.
CreditScoreIncdDefault	decimal	Indicates the probability expressed as a percentage of delinquency for a score range or class.
CreditScoreNatlPercentile	decimal	Indicates the relative credit rating of a business compared to all businesses whose credit ratings are included in the local country database.
CreditScoreOverrideCode	string	Indicates why no score was calculated or why score is equal to zero in the US.
CriminalProceedingInd	string	Indicates if criminal proceedings exist. Y stands for availability of information and N stands for no information.
DebarmentInd	string	Indicates whether the company is debarred from doing business with government agencies. Y stands for company debarred and N stands for not debarred.

Name	Type	Description
DebarmentsCount	decimal	The count of filings by government agencies in the United States that prohibit the party from entering into contracts or transactions with those agencies.
DebarmentsDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date of the most recent filing to prohibit the party from entering into contracts or transactions with a government agency in the United States.
DelqPmtPctgForAllFirms	decimal	Specifies a delinquency percentage for all firms.
DelqPmtRngPrcnt	decimal	Specifies a delinquency percentage for credit score range.
Description	string	The free text description of the record.
DetHistoryInd	string	The code that indicates if detrimental information exists for the party and whether complete details exist on management and party. Y stands for availability of information and N stands for no information.
DisasterInd	string	Indicates if information exists about disasters such as fires, hurricanes, and so on. Y stands for availability of information and N stands for no information.
FailureScore	string	For US, the failure risk class, 1 through 5. For Canada , the stability score that indicates risk of business closure, 1 through 10. For Australia, the percentile failure score.
FailureScoreAge	decimal	The failure score age in months.
FailureScoreClass	decimal	1 through 5 to indicate risk of financial stress for a customer account. 1 for a business with greatest risk and 5 for a business with least risk.
FailureScoreCommentary	string	The comments related to failure score.
FailureScoreCommentary10	string	The comments related to failure score.
FailureScoreCommentary2	string	The comments related to failure score.
FailureScoreCommentary3	string	The comments related to failure score.
FailureScoreCommentary4	string	The comments related to failure score.

Name	Type	Description
FailureScoreCommentary5	string	The comments related to failure score.
FailureScoreCommentary6	string	The comments related to failure score.
FailureScoreCommentary7	string	The comments related to failure score.
FailureScoreCommentary8	string	The comments related to failure score.
FailureScoreCommentary9	string	The comments related to failure score.
FailureScoreDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the failure score was calculated.
FailureScoreIncdDefault	decimal	Probability, in percentage, of failure for score range of class.
FailureScoreNatnlPercentile	decimal	The national percentile that reflects the relative ranking of a company among all scored companies in the local country database.
FailureScoreOverrideCode	string	In Europe, code for the reason for variance between the D and B rating and the failure score. In the US, code for the reason why no score was calculated, or why the score is zero.
FinclEmbtInd	string	Indicates if open bankruptcy, receivership liquidation, or any equivalent information exists. Y stands for availability of information and N stands for no information.
FinclLglEventInd	string	Indicates if special events such as financial embarrassment and legal filings exist. Y stands for availability of information and N stands for no information.
GlobalFailureScore	string	The global score for the risk of business default.
HighCredit	decimal	Maximum credit ever extended to the organization.
HighRngDelqScr	decimal	Specifies the high end of the range of the commercial credit score.
JudgementInd	string	Indicates if open judgments exist. Y stands for any open judgment that exists and N stands for no open judgments.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LienInd	string	Indicates if open liens exist. Y stands for any open lien that exists and N stands for no open liens.
LowRngDelqScr	decimal	Specifies the low end of the range of the commercial credit score.
MaximumCreditCurrencyCode	string	The currency used to denominate the MAXIMUM_CREDIT_RECOMMENDATION column.
MaximumCreditRecommendationAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	Maximum credit limit recommended for the currency specified in the MAXIMUM_CREDIT_CURRENCY_CODE column.
NegvPmtExpl	string	The conditional comment generated when negative payments are present.
NoTradeInd	string	Indicates that no trade experiences exist. Y stands for any trade experience that exists and N stands for no trade experience.
NumberParentBankruptcyConversions	decimal	The number of bankruptcy conversions by the parent.
NumberParentBankruptcyFiling	decimal	The number of bankruptcies filed by the parent.
NumberSpecialEvent	decimal	The number of occurrences of the special events.
NumberTradeExperiences	decimal	The number of trade experiences.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OprgSpecificationEvntInd	string	Indicates if information exists about operational changes such as name changes, management

Name	Type	Description
		changes, change of control, moves, and so on. Y stands for availability of information and N stands for no information.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OtherSpecificationEvntInd	string	Indicates if special events exist that are not otherwise specified.
ParentHQBankruptcyInd	string	Indicates if parent (P) or headquarters (H) are entered into bankruptcy.
PartyId	long	The unique identifier of the contact party.
PaydexComment	string	Additional paydex information.
PaydexFirmComment	string	Comment on the paydex score for the organization.
PaydexFirmDays	string	The number of days used in the paydex score.
PaydexIndustryComment	string	Comment on the paydex score for the industry.
PaydexIndustryDays	string	The number of days used in the paydex score for the industry.
PaydexNorm	string	Median or average Paydex score for the industry.
PaydexScore	string	Paydex score for the previous 12 months payment history.
PaydexThreeMonthsAgo	string	Paydex score three months ago.
PrntBkcyChapterConv	string	The change of bankruptcy type.
PrntBkcyConvDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the bankruptcy converted from one type to another.
PrntBkcyFilgChapter	decimal	The chapter number of the bankruptcy filed by the parent under the US uniform commercial code.
PrntBkcyFilgDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The bankruptcy filing date of the parent.

Name	Type	Description
PrntBkcyFilgType	string	The type of bankruptcy filed by the parent.
PubRecExpl	string	The conditional comment generated if suits, liens, and judgments exist.
RatedAsOfDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the rating was acquired.
Rating	string	The rating number or code of the rating company.
RatingOrganization	string	The name of the credit rating organization.
RequestId	long	A system-generated read-only attribute used by the application framework.
SecuredFlngInd	string	Indicates if open secured filings such as UCC filings, secured charges or mortgages pledging, or any equivalent information exists. Y stands for availability of information and N stands for no information.
SlowTradeExpl	string	The conditional comment generated when paydex score indicates that slow trade experiences are present.
SpecialEventComment	string	The comment generated if special event section exists.
SpecialEventText	string	The narrative of the special event.
SpecialEventUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the special event was updated.
Status	string	The status of the record.
SuitInd	string	Indicates if open suits exist. Y stands for any open suit that exists and N stands for no open suits.

Customer Contact Profile

The person who functions as a contact for an organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContact

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Organization Contact Additional Information*
Contains	*Customer Contact Responsibility*
Contains	*Source System Reference*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
ContactFormattedAddress	string	The formatted version of the contact address.

Name	Type	Description
ContactFormattedMultilineAddress	string	The formatted multiline version of the contact address.
ContactName	string	The name of the contact.
ContactNumber	string	The user-defined identification number for this contact.
ContactPartyId	long	The unique identifier of the contact.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
CustomerEmailAddress	string	The e-mail address of the customer this contact person belongs to.
CustomerName	string	The name of the customer.
CustomerPartyId	long	The unique identifier of the customer this contact person belongs to.
CustomerPartyNumber	string	The alternate unique identifier of the customer this contact person belongs to.
CustomerUniqueName	string	The unique name of the customer. For an Organization, the value is a concatenation of unique_name_alias and suffix. For a Person, the value is a concatenation of person_name and suffix.

Name	Type	Description
DecisionMakerFlag	boolean	Indicates if this contact is a decision maker. If the value is True, then the contact is a decision maker.
Department	string	The free form text used to name the department for the contact.
DepartmentCode	string	The department code for the contact. A list of accepted values is defined in the lookup DEPARTMENT_TYPE.
EmailAddress	string	The email address associated with the record.
FormattedAddress	string	The formatted address information.
FormattedPhoneNumber	string	The formatted phone number.
JobTitle	string	The free form text for job title.
JobTitleCode	string	The code given to the job title.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The unique identifier of the organization contact. • Primary Key
OrgContactInformation	*Trading Community Organization Contact Additional Information*	The information of the organization contact.
OrganizationContactRole	*Customer Contact Responsibility*	The role of the contact in the organization.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyRelationshipId	long	The unique identifier of the relationship of the party.
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteName	string	The address associated with the party site.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.
PersonCertReasonCode	string	The reason for the organization's current certification level assignment. A list of accepted values is defined using the lookup HZ_PARTY_CERT_REASON.
PersonCertificationLevel	string	The certification level of a organization. A list of accepted values is defined in the lookup HZ_PARTY_CERT_LEVEL.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLanguageName	string	The language name associated with the person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".

Name	Type	Description
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.
PersonPreviousLastName	string	The previous last name of a person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.
Rank	string	The rank associated with this customer contact.
ReferenceUseFlag	boolean	Indicates if this contact can be used as a reference. If the value is Y, then the contact can be used as a reference.
RequestId	long	A system-generated read-only attribute used by the application framework.
SalesAffinityCode	string	The affinity of a contact to the deploying organization. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_AFFINITY_CODE.
SalesAffinityComments	string	The comments about the contact's affinity to the deploying organization.
SalesBuyingRoleCode	string	The roles played by a contact in the buying process, for example, decision maker or supporting role. A list of accepted values is defined in the lookup HZ_SLS_CNTCT_BUY_ROLE_CODE.

Name	Type	Description
SalesInfluenceLevelCode	string	The influence of the contact has on the deploying organization. A list of accepted values are defined in the lookup HZ_SLS_CNTCT_INFLUENCE_LVL_CD.
Salutation	string	The size of the household this person is a part of.
WebUrl	string	The web URL of contact point.

Customer Contact Responsibility

The role or responsibility of an organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}OrganizationContactRole

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Customer Contact Profile*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*

Relationship Type	Object or Service
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrgContactId	long	The organization contact identifier. Foreign key to the HZ_ORG_CONTACTS table.
OrgContactRoleId	long	The unique contact role identifier. It is primary key and system generated. • Primary Key
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
PrimaryContactPerRoleType	string	Indicates if the contact is the primary contact for the role. Y stands for primary contact and N stands for a contact that is not the primary contact for the role type. The default value is N.
PrimaryFlag	boolean	Indicator that specifies if this is the primary role for the contact. Y stands for primary role and N stands for a non-primary role for the contact. The default value is N.
RequestId	long	A system-generated read-only attribute used by the application framework.
RoleLevel	string	The role level of the contact. For example, executive, department head, or middle manager.
RoleType	string	The role performed by a contact.
Status	string	The status of the record.

E-Mail

The e-mail address associated with a trading community member. For example, john.doe@oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Email

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*

Relationship Type	Object or Service
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key

Name	Type	Description
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
EmailFormat	string	The preferred format for e-mail addressed to this address such as HTML or ASCII. A list of accepted values is defined using the lookup EMAIL_FORMAT.
EmailInformation	*Trading Community Contact Point Additional Information*	The additional information about the e-mail.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary e-mail of the associated object. If the value is True, then this is the primary e-mail. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

E-Mail Domain

The domain of the e-mail address associated with a trading community member. For example, ABC Corporation has CORP and BUSINESS e-mail domains.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}EmailDomain

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DomainName	string	The actual or non-reversed domain name of the organization for display purpose.
EmailDomainId	long	The sequence generated unique identifier. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
Status	string	The status of the record.
TransposedDomain	string	The reversed domain name for the purposes of searching.

Education

The trading community person's education information. For example, a person may have attended the University of California from 1995 to 1999 and received an undergraduate degree in Computer Science with a GPA of 4.0.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Education

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CourseMajor	string	The primary area of study.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DegreeReceived	string	The abbreviation for the degree. For example, BA, BSc, MBA, MSc, PhD, and Gd (graduate diploma).
EducationId	long	The unique identifier of the education record. • Primary Key
LastDateAttended	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The year and month when a person last attended the educational institution.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.

Name	Type	Description
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
PartyId	long	The unique identifier of the contact party.
RequestId	long	A system-generated read-only attribute used by the application framework.
SchoolAttendedName	string	The name of the school.
SchoolPartyId	long	The party identifier of the school.
StartDateAttended	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the attendance of a person starts.
Status	string	The status of the record.
TypeOfSchool	string	The classification of the educational organization. For example, high school, college, university, or professional school. Note that the classification of schools varies among different cultures.

Electronic File Transfer

The electronic funds transfer information of a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Eft

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*

Relationship Type	Object or Service
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EFTPrintingProgramId	long	The printing program identifier.
EFTSWIFTCode	string	The EFT swift code information.
EFTTransmissionProgramId	long	The transmission program identifier.
EFTUserNumber	string	The number that identifies you as a user of electronic funds transfer service for your bank or clearing organization.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context.

Name	Type	Description
		Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Employment History

The employment history information of a trading community member. For example, John Doe was a Vice President at Business World from 2001 to 2007 and President at World of Business from 2007 to 2009.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}EmploymentHistory

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Work Class*
Contained by	*Trading Community Person Details*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the employment officially began.
Branch	string	The military branch code.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmployedAsTitle	string	Job position title assigned by an employer.
EmployedAsTitleCode	string	The code for the job title. If title cannot be represented by a code, then the EMPLOYED_AS_TITLE column must be used.

Name	Type	Description
EmployedByDivisionName	string	The common name of a division or an organization at which the person was employed.
EmployedByNameCompany	string	The name of the organization at which the person was employed. Note that the name must not include the division name.
EmployedByPartyId	long	The party identifier of the employer for situations in which the employer is represented as a party.
EmploymentHistoryId	long	The unique employment history identifier. • Primary Key
EmploymentTypeCode	string	Indicates whether the employment is part-time or full-time.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FacultyPositionFlag	boolean	Indicator Y or N to specify whether the position is a faculty position or not.
FractionOfTenure	decimal	The fraction of tenure.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MilitaryRank	string	The rank of the person in the branch.
PartyId	long	The unique identifier of the contact party.
ReasonForLeaving	string	The free format text that describes the reason for leaving.
RequestId	long	A system-generated read-only attribute used by the application framework.
Responsibility	string	Job responsibility of the person.

Name	Type	Description
Served	string	Indicates where the person performed military service.
Station	string	Indicates the station name.
Status	string	The status of the record.
SupervisorName	string	The full name of the manager of the person.
TenureCode	string	The type of tenure for faculty positions.
WeeklyWorkHours	decimal	The usual number of hours worked per week.
WorkClass	*Work Class*	The custom-defined classification information about job title and work experience of a person.

Financial Profile

The financial details of a trading community member, such as bank account information that was obtained as part of a credit evaluation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}FinancialProfile

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*

Relationship Type	Object or Service
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccessAuthorityDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when access to the information in the account was granted.
AccessAuthorityGranted	string	Indicates whether access to information in a financial account was granted. If the value is True, then the access has been granted.
BalanceAmount	{http://xmlns.oracle.com/adf/svc/types/}AmountType	The reported balance on an account. The balance can be a positive number, negative number, or zero.
BalanceVerifiedOnDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the account balance was verified.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
FinancialAccountNumber	string	The alternate unique identifier of the financial account.
FinancialAccountType	string	The short name that classifies the financial accounts. For example, savings, checking, home loan, personal loan, trading, and so on.

Name	Type	Description
FinancialOrgType	string	The classification of financial organizations. For example, bank, savings and loan, private lender, building society and so on.
FinancialOrganizationName	string	The name of the financial organization that holds the account.
FinancialProfileId	long	The unique identifier of the party's financial profile. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.

Instant Messaging

The instant messaging information of a trading community member, such as the AOL identifier or Yahoo Messenger information.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}InstantMessaging

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Relationship Type	Object or Service
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessagingAddress	string	The instant messaging information address.
InstantMessagingInformation	*Trading Community Contact Point Additional Information*	The instant messaging information related to the record.
InstantMessengerType	string	The type of the instant messenger type.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary instant messaging Id of the associated object. If the value is True, then this is the primary instant messaging Id. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.

Name	Type	Description
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.

Phone

The phone number associated with a trading community member. For example, the phone number for Oracle Corporation is 650-506-6000.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Phone

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Marketing Response*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Contact Address*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*

Relationship Type	Object or Service
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
FormattedPhoneNumber	string	The formatted phone number.
LastContactDtTime	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date and time of last contact placed to this contact point.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.

Name	Type	Description
PagerTypeCode	string	The PAGER_TYPE_CODE column stores the lookup code for the type of pager. The type of pager determines how the page is received. For example, tone, number, alphanumeric or two-way alphanumeric.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PhoneAreaCode	string	The area code prefix for the phone number.
PhoneCallingCalendar	string	The name or code for a calling calendar used with this telephone number. This attribute is no longer used in Fusion applications.
PhoneCountryCode	string	The country code prefix for the phone number.
PhoneExtension	string	The additional number addressed after initial connection to an internal telephone system.
PhoneInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community phone.
PhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound, or outbound.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator to specify if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RawPhoneNumber	string	The unformatted telephone number.
RelationshipId	long	The relationship identifier for the record.

Name	Type	Description
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TimezoneCode	string	The foreign key to FND_TIMEZONES_B.TIMEZONE_CODE.
TransposedPhoneNumber	string	This column stores the concatenation of PHONE_COUNTRY_CODE, PHONE_AREA_CODE, and PHONE_NUMBER in reverse order. For example, if PHONE_COUNTRY_CODE=1, PHONE_AREA_CODE=650 and PHONE_NUMBER=5065747, this column stores 74756050561. This column is used for building an index to search for any combination of the above three columns.

Preference

The preferences of a trading community member. For example, a member may prefer that the transaction currency is the US dollar.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyPreference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*

Relationship Type	Object or Service
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalValue1	string	The additional preference value.
AdditionalValue2	string	The additional preference value.
AdditionalValue3	string	The additional preference value.
AdditionalValue4	string	The additional preference value.
AdditionalValue5	string	The additional preference value.
Category	string	A preference category is used to logically group one or more preference codes in a particular user interface. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Module	string	The program that creates the preference. For example, TCA MOBILE CUSTOMER DIRECTORY.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PartyPreferenceId	long	The unique identifier of the party preference. • Primary Key
PreferenceCode	string	A preference code determines if a preference is a single value or a multiple value preference. The preference code is validated by the HZ_PREFERENCE lookup. The combination of CATEGORY and PREFERENCE_CODE identifies a preference.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
ValueDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The preference value when the data type is DATE.
ValueName	string	A user-defined alias for a preference value.
ValueNumber	decimal	The preference value when the data type is NUMBER.
ValueVarchar2	string	The preference value when the data type is VARCHAR2.

Relationship

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/}Relationship

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Phone*
Contains	*Address*
Contains	*Instant Messaging*
Contains	*Web*
Contains	*Usage Assignment*
Contains	*Trading Community Relationship Additional Information*
Contains	*Customer Contact Profile*
Contains	*Source System Reference*
Contains	*Email*
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*

Relationship Type	Object or Service
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalInformation1	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type. For operating unit and legal entity to bank relationships, column stores communication agreement ID, which identifies agreement between payer and bank on type of EDIFACT documents that can be sent for processing payments.
AdditionalInformation10	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation11	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation12	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation13	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation14	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation15	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation16	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation17	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation18	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation19	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation2	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation20	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation21	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation22	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation23	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation24	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation25	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.

Name	Type	Description
AdditionalInformation26	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation27	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation28	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation29	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation3	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation30	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation4	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation5	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation6	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation7	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation8	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
AdditionalInformation9	string	The extensible attribute used for application-specific functionality. The column values depend on relationship type.
Comments	string	The comments for the record.

Name	Type	Description
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DirectionCode	string	The code of the relationship direction. The list of accepted values are defined in the lookup DIRECTION_CODE.
Email	*E-Mail*	The email address associated with the record.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectEmailAddress	string	The e-mail address of the object party in the relationship.
ObjectId	long	The unique identifier of the object party in this relationship.
ObjectPartyName	string	The name of the object party in this relationship.

Name	Type	Description
ObjectTableName	string	The source table name of the object party in this relationship.
ObjectType	string	The object type of the relationship.
ObjectUsageCode	string	The usage code of object party in the relationship.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrganizationContact	*Customer Contact Profile*	The organization contact information.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyName	string	The name of the party.
PartySite	*Address*	The party site associated with the relationship.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the relationship.
PercentageOwnership	decimal	The percentage of the child entity owned by the parent entity.
Phone	*Phone*	The phone information for the entity.
PreferredContactFlag	boolean	Indicates if this contact person is primary contact for the customer.
PrimaryCustomerFlag	boolean	Indicates if this customer is primary customer for the contact.
RelationshipCode	string	The code for a forward or a backward relationship. A list of accepted relationship values is defined in the lookup PARTY_ RELATIONS_TYPE.
RelationshipId	long	The relationship identifier for the record.
RelationshipInformation	*Trading Community Relationship Additional Information*	The relationship type information.

Name	Type	Description
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key
RelationshipType	string	The relationship type name. For example, CUSTOMER_SUPPLIER. A list of valid relationship types is defined in the lookup HZ_RELATIONSHIP_TYPE.
RequestId	long	A system-generated read-only attribute used by the application framework.
Role	string	The role between the subject and object party in this relationship.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
SubjectEmailAddress	string	The e-mail address of the subject party in relationship.
SubjectId	long	The unique identifier of the subject in this relationship.
SubjectPartyUsageAssignment	*Usage Assignment*	The usage assignment of the subject party in the relationship.
SubjectTableName	string	The source table of the subject.
SubjectType	string	The subject type of the relationship.
SubjectUsageCode	string	The usage code of subject party in the relationship.
Web	*Web*	The web information related to the record.

Source System Reference

The name of external source system where the trading community information is imported from.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}OriginalSystemReference

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Original System Mapping Identifier Additional Information*
Contained by	*Location Details*
Contained by	*Household*
Contained by	*Contact Preference*
Contained by	*Classification Assignment*
Contained by	*Contact Address*
Contained by	*Address*
Contained by	*Trading Community Organization Details*
Contained by	*Instant Messaging*
Contained by	*E-Mail*
Contained by	*Trading Community Customer Billing Account*
Contained by	*Additional Contact Name*
Contained by	*Trading Community Address Purpose*
Contained by	*Telex*
Contained by	*Phone*
Contained by	*Customer Contact Responsibility*
Contained by	*Additional Identifier*
Contained by	*Additional Account Name*
Contained by	*Trading Community Person Details*

Relationship Type	Object or Service
Contained by	*Credit Rating*
Contained by	*Trading Community Customer Account Site*
Contained by	*Trading Community Customer Account Site Use*
Contained by	*Relationship*
Contained by	*Electronic Data Interchange*
Contained by	*Trading Community Customer Account or Site Role*
Contained by	*Web*
Contained by	*Customer Contact Profile*
Contained by	*Electronic File Transfer*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*

Relationship Type	Object or Service
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OldOrigSystemReference	string	The old source system reference that is being replaced.

Name	Type	Description
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OrigSystemReferenceId	long	The unique identifier for original system reference. • Primary Key
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
ReasonCode	string	The reason that this type of contact should or should not be made. The list of accepted values are defined in the REASON_CODE lookup.
RequestId	long	A system-generated read-only attribute used by the application framework.
SourceSystemRefInformation	*Trading Community Original System Mapping Identifier Additional Information*	The source system reference information.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Status	string	The status of the record.

Telex

The telex number information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Telex

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key

Name	Type	Description
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicates whether this is the primary telex of the associated object. If the value is True, then this is the primary telex. The default value is False.
OwnerTableId	long	The unique identifier for a record in the owner table.

Name	Type	Description
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicates whether this is the primary contact point of the associated object. If the value is True, then this is the primary contact point. The default value is False.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
TelexNumber	string	The telex reference number (usually a telephone number) of the organization.

Trading Community Address Additional Information

The address information associated with a trading community member.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/}PartySiteInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.

Name	Type	Description
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Address Purpose

The purpose of an address, such as Business, Home, or Ship To.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartySiteUse

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Source System Reference*
Contained by	*Contact Address*
Contained by	*Address*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*

Relationship Type	Object or Service
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
BeginDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date at the start of the date range within which the row is active.
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
IntegrationKey	string	The integration key is not used.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.

Name	Type	Description
PartySiteId	long	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PartySiteUseId	long	The unique identifier of the party site used. • Primary Key
PrimaryPerType	string	Indicates if this is the primary use for the site. Y stands for the primary site and N stands for all other sites.
RequestId	long	A system-generated read-only attribute used by the application framework.
SiteUseType	string	The site use type associated with the address.
Status	string	The status of the record.

Trading Community Contact Point Additional Information

The contact point for a trading community member like phone or e-mail. For example 650-506-6000 is the phone number for Oracle Corporation, john.doe@example.com is the e-mail address for John Doe.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/}ContactPointInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*E-Mail*
Contained by	*Instant Messaging*
Contained by	*Phone*
Contained by	*Web*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointType	string	The type of the contact point.
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Organization Contact Additional Information

The additional information about the organization contact.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/orgContact/}OrganizationContactInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Customer Contact Profile*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrgContactId	long	The unique identifier of the organization contact. • Primary Key

Name	Type	Description
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Original System Mapping Identifier Additional Information

The unique identifier for the trading community party, associated with the address, from the external source system reference.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/}SourceSystemRefInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Source System Reference*
Handled by	*Sales Reference Customer*
Handled by	*Trading Community Location*
Handled by	*Trading Community Customer Account*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Competitor Service*
Handled by	*Source Information Technology System Reference*
Handled by	*Trading Community Person Information*
Handled by	*Trading Community Group*

Relationship Type	Object or Service
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Marketing Response Service*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
OrigSystemRefId	long	Sequentially generated identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Person Details

The information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}Person

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Credit Rating*
Contains	*Citizenship*
Contains	*Contact Language*
Contains	*Instant Messaging*
Contains	*Employment History*
Contains	*Web*
Contains	*Classification Assignment*
Contains	*Usage Assignment*
Contains	*Relationship*
Contains	*Financial Profile*
Contains	*Contact Interest*
Contains	*Contact*
Contains	*Additional Contact Name*
Contains	*Phone*
Contains	*Education*
Contains	*Email Domain*
Contains	*Additional Identifier*
Contains	*Contact Preference*
Contains	*Source System Reference*
Contains	*Certification*
Contains	*Contact Address*

Relationship Type	Object or Service
Contains	*Email*
Contains	*Preference*
Extended by	*Partner Members*
Contained by	*Sales Party*
Contained by	*Sales Party Resource*
Contained by	*My Sales Account*
Contained by	*Sales Account*
Contained by	*Sales Party Territory*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalPartyId	*Additional Identifier*	The additional identifier associated with the organization or person.
AdditionalPersonName	*Additional Contact Name*	The additional name of the person.
Address1	string	The first line of the address.
Address2	string	The second line of the address.

Name	Type	Description
Address3	string	The third line of the address.
Address4	string	The fourth line of the address.
CategoryCode	string	The code of the category to which the person belongs. A list of accepted values is defined in the lookup type CUSTOMER_CATEGORY.
CertReasonCode	string	The reason for the organization party's current certification level assignment as indicated by the HZ_PARTY_CERT_REASON lookup type.
Certification	*Certification*	The certification information for the person.
CertificationLevel	string	The certification level the organization party as indicated in the HZ_PARTY_CERT_LEVEL lookup type.
Citizenship	*Citizenship*	The citizenship information of a person.
City	string	The name of the city.
CodeAssignment	*Classification Assignment*	The classification code assigned to the person.
Comments	string	The comments for the record.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
Country	string	The name of the country.
County	string	The name of the county.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CreditRating	*Credit Rating*	The credit rating of the person.
DateOfBirth	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date when the person was born.

Name	Type	Description
Education	*Education*	The education information of the person.
Email	*E-Mail*	The email address associated with the record.
EmailAddress	string	The email address associated with the record.
EmailDomain	*E-Mail Domain*	The domain name of the email address.
EmploymentHistory	*Employment History*	The employment history information of a person.
FinancialProfile	*Financial Profile*	The financial profile information of a person.
GSAIndicatorFlag	boolean	Indicates whether organization is a US federal agency supported by the General Services Administration (GSA). If the value is Y, then the organization is supported by GSA. The default value is N. If this attribute is not explicitly mentioned in the payload while creating an account, then the value of this attribute is set to null.
Gender	string	The gender of the person, such as male, female, and unknown. A list of accepted values is defined in the lookup HZ_GENDER.
IdenAddrLocationId	long	The unique identifier of the location of the identifying address.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
InstantMessaging	*Instant Messaging*	The instant messaging information related to the record.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JgzzFiscalCode	string	The taxpayer identification number. It can be the unique identifier of the person or organization. It can also be the SSN or income taxpayer ID in US, fiscal code or NIF in Europe.
LanguageName	string	The standard name for the language.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
MaritalStatus	string	The marital status of the person. A list of accepted values is defined in the lookup MARITAL_STATUS.
MissionStatement	string	The corporate charter of organization in user-defined text format.
OrigSystemReference	string	The identifier for the record from the original system.
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
PartyId	long	The unique identifier of the contact party. • Primary Key
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PartyPreference	*Preference*	The preference mentioned in the person details.
PartySite	*Contact Address*	The party site associated with the person.
PartyType	string	The party type of the contact. The party type can only be Person, Organization, or Group.
PartyUniqueName	string	This is a derived column. For Organization, it is concatenation of unique_name_alias and suffix. For Person, it is concatenation of person_name and suffix.
PartyUsageAssignment	*Usage Assignment*	The party usage assigned to the person.
PersonAcademicTitle	string	The part of the person's title that denotes the academic qualification, such as Dr. Jane Smith.

Name	Type	Description
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonInterest	*Contact Interest*	The interest information associated with a person.
PersonLanguage	*Contact Language*	The language information associated with a person.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The prefix for the last name of a person, such as fon, van. For example, if a person's name is Hans Van, the last name of the person is captured using this attribute.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The place in a family structure. For example, in "Tom Jones III", the "III".
PersonPreNameAdjunct	string	The preferred name adjacency of a resource.
PersonPreviousLastName	string	The previous last name of a person.
PersonProfile	*Contact*	The profile information of the person.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonTitle	string	The professional or family title. For example, Don or The Right Honorable.
Phone	*Phone*	The phone information for the entity.
PostalCode	string	The postal code element of the address.

Name	Type	Description
PreferredContactMethod	string	The preferred contact method for a person or organization. It is validated against lookup HZ_PREFERRED_CONTACT_METHOD.
PreferredContactPersonId	long	The PARTY_ID of a preferred contact for a given party. There should be a valid relationship.
PreferredFunctionalCurrency	string	The preferred functional currency for the person or organization. The denormalized value of the PREF_FUNCTIONAL_CURRENCY in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
PreferredName	string	The denormalized value of the PARTY_NAME field in HZ_ADDTNL_PARTY_NAMES identified by PREFERRED_NAME_ID.
PreferredNameId	long	The foreign key to PARTY_NAME_ID in HZ_ADDTNL_PARTY_NAMES. It contains the ID of the referred name for the party. If it is NULL the Profile Name will be used as preferred name. By default the value is NULL.
PrimaryEmailContactPTId	long	The unique identifier of the primary e-mail.
PrimaryPhoneAreaCode	string	The area code within a country code.
PrimaryPhoneContactPTId	long	The unique identifier of the primary phone contact point.
PrimaryPhoneCountryCode	string	The international country code for a telephone number. For example, it is 33 for France.
PrimaryPhoneExtension	string	The additional number required after initial connection to an internal telephone system.
PrimaryPhoneLineType	string	The lookup code for the type of phone line. For example, general, fax, inbound or outbound, and so on.
PrimaryPhoneNumber	string	The telephone number in local format. The number should not include country code, area code, or extension.
PrimaryPhonePurpose	string	The contact point type, such as business or personal.
PrimaryURLContactPTId	long	The unique identifier of the primary URL contact point.

Name	Type	Description
Province	string	The name of the province.
Relationship	*Relationship*	The relationship information of the person.
RequestId	long	A system-generated read-only attribute used by the application framework.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
Salutation	string	The size of the household this person is a part of.
SourceSystem	string	The source system name where the record originated.
SourceSystemReferenceValue	string	The identifier for the record from an external source system.
SourceSystemUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the source system information was last updated.
State	string	The name of the state.
Status	string	The status of the record.
ThirdPartyFlag	boolean	Indicates whether a party has a direct relationship with the organization using Oracle Receivables or through a third party vendor. If the value is Y, then the party is a third party relationship. If Oracle Service is installed, the Third Party field in the Customers window is mandatory.
URL	string	The destination URL associated with a specific Google AdWords ad.
UserGUID	string	The "light weight" user Global Unique Id. Light Weight users defined in the Extended Security (XS) System.
ValidatedFlag	boolean	Indicates whether the entity was validated. If the value is Y then the entity was validated.

Name	Type	Description
Web	*Web*	The web information related to the record.

Trading Community Person Profile Additional Information

The additional information about a trading community person.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/}PersonInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Contact*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Loyalty Member Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
PersonProfileId	long	The unique identifier of the person profile. • Primary Key

Name	Type	Description
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Relationship Additional Information

The relationship between two trading community members. For example, John Doe is the spouse of Jane Doe or Michael Smith is a contact of Oracle Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/relationship/}RelationshipInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
RelationshipRecId	long	The unique identifier of the contact's relationship record. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Usage Assignment

The party usage assigned to a trading community member. For example, John Doe is a contact of ABC Corporation and XYZ Corporation is a supplier.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/}PartyUsageAssignment

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Person Details*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Trading Community Party Usage Assignment Service*
Handled by	*Trading Community Party Information*

Relationship Type	Object or Service
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Comments	string	The comments for the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EffectiveEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the end of the date range within which the row is effective.
EffectiveStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date at the beginning of the date range within which the row is effective.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyId	long	The unique identifier of the contact party.
PartyUsageCode	string	The usage context of a party's contact point.
PartyUsgAssignmentId	long	The unique identifier of the party usage assignment. • Primary Key
RequestId	long	A system-generated read-only attribute used by the application framework.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.

Web

The Web information associated with a trading community member. For example, Oracle's address on the Web is www.oracle.com.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/}Web

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Contact Point Additional Information*
Contains	*Source System Reference*
Contains	*Contact Preference*
Contained by	*Trading Community Person Details*
Contained by	*Partner*
Contained by	*Household*
Contained by	*Trading Community Organization Details*
Contained by	*Address*
Contained by	*Relationship*
Handled by	*Trading Community Group*
Handled by	*Deal Registration Service*
Handled by	*Trading Community Organization*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Marketing Response Service*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Partner Service*
Handled by	*Partner Program Enrollment Service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ContactPointId	long	The unique primary key identifier for the contact point. • Primary Key
ContactPointPurpose	string	The purpose of the contact point.
ContactPointType	string	The type of the contact point.
ContactPreference	*Contact Preference*	The contact preference associated with the record.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. This date is inclusive and the status of the entity is dependent on this.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
OrigSystem	string	The source system name.
OrigSystemReference	string	The identifier for the record from the original system.

Name	Type	Description
OriginalSystemReference	*Source System Reference*	The identifier for the record from the original system.
OverallPrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact irrespective of the context. Y stands for primary contact and N stands for all others.
OwnerTableId	long	The unique identifier for a record in the owner table.
OwnerTableName	string	The Trading Community Architecture (TCA) tables that have source system reference column.
PartyName	string	The name of the party.
PartyUsageCode	string	The usage context of a party's contact point.
PrimaryByPurpose	string	Indicates whether this is the primary contact point of the contact point purpose for the party or site. The value Y indicates that the contact point is the primary contact point. A party or site can have only one contact point with value Y.
PrimaryFlag	boolean	Indicator that specifies if this is the primary contact point of the contact point type for referenced party, site, or location. Y stands for primary contact and N for all others.
RelationshipId	long	The relationship identifier for the record.
RequestId	long	A system-generated read-only attribute used by the application framework.
StartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. This date is inclusive and the status of an entity is dependent on this.
Status	string	The status of the record.
URL	string	The destination URL associated with a specific Google AdWords ad.
WebInformation	*Trading Community Contact Point Additional Information*	The additional information for the trading community Web.

Name	Type	Description
WebType	string	The prefix class to a Web address. Typically, this is either FTP or HTTP.

Work Class

The custom-defined classification of information about a person's job title and work experience.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/}WorkClass

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Employment History*
Handled by	*Sales Account Service*
Handled by	*Sales Party*
Handled by	*Company and User Registration*
Handled by	*Sales Party Resource Service*
Handled by	*Sales Party Territory service*
Handled by	*Trading Community Person Information*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmploymentHistoryId	long	The foreign key to the HZ_EMPLOYMENT_HISTORY table.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LevelOfExperience	string	The user-defined rating for the level of experience in the class of work. For example, journeyman, trainee, or exposure.
RequestId	long	A system-generated read-only attribute used by the application framework.
Status	string	The status of the record.
WorkClassId	long	The unique identifier for the class of work. • Primary Key
WorkClassName	string	The user-determined classification for work. For example, bricklayer, doctor, lawyer, programmer, or minister of health.

Trading Community Real Time Data Quality

A service for real-time match and cleanse data quality operations. The match operation finds duplicate organizations, persons, or locations and cleanses to validate and standardize addresses.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/dataQuality/realTime/publicModel/}DQRealTimeService

Service WSDL URL: https://servername/crmService/DQRealTimeService?WSDL

Logical Business Objects

- CRM

- CRM

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Data Quality Cleanse Address*
Handles	*Trading Community Data Quality Address*
Handles	*Trading Community Data Quality Match Location*
Handles	*Trading Community Data Quality Location*
Handles	*Trading Community Data Quality Configuration*
Handles	*Trading Community Data Quality Person*
Handles	*Trading Community Data Quality Organization*
Handles	*Trading Community Data Quality Match Organization*
Handles	*Trading Community Data Quality Match Person*

Operations

- *matchOrganization*
- *matchPerson*
- *matchLocation*
- *cleanseAddress*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

matchOrganization

Matching operation for organization party.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
input	*Trading Community Data Quality Match Organization*	The organization party for which the match needs to be performed.

Response Payload

Element Name	Type	Description
result	*Trading Community Data Quality Match Organization*	Results of the matched organization parties.

matchPerson

Matching operation for person party.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
input	*Trading Community Data Quality Match Person*	The person party details for which the match needs to be performed.

Response Payload

Element Name	Type	Description
result	*Trading Community Data Quality Match Person*	Results of the matched person parties.

matchLocation

Matching operation for location object.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
input	*Trading Community Data Quality Match Location*	The location object for which the match needs to be performed.

Response Payload

Element Name	Type	Description
result	*Trading Community Data Quality Match Location*	Results of the matched locations.

cleanseAddress

Address validation and standardization operation for the entered address.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
input	*Trading Community Data Quality Cleanse Address*	The address to be cleansed.

Response Payload

Element Name	Type	Description
result	*Trading Community Data Quality Cleanse Address*	Results of the cleansed address.

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
cleanseAddress	ZCQ_CLEANSE_TRADING_COMMUNITY_DATA_REAL_TIME_PRIV	Cleanse Trading Community Data Real-Time	Allows validating and standardizing of addresses against the country-specific postal reference files in real time
matchPerson	ZCQ_MATCH_TRADING_COMMUNITY_DATA_REAL_TIME_PRIV	Match Trading Community Data Real-Time	Allows performing real-time matching of trading community entities such as organization, person, and location to find potential duplicates that may exist in the registry along with a match score.
matchLocation	ZCQ_MATCH_TRADING_COMMUNITY_DATA_REAL_TIME_PRIV	Match Trading Community Data Real-Time	Allows performing real-time matching of trading community entities such as organization, person, and location to find potential duplicates that may exist in the registry along with a match score.
matchOrganization	ZCQ_MATCH_TRADING_COMMUNITY_DATA_REAL_TIME_PRIV	Match Trading Community Data Real-Time	Allows performing real-time matching of trading community entities such as organization, person, and location to find potential duplicates that may exist in the registry along with a match score.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCQ_CLEANSE_TRADING_COMMUNITY_DATA_REAL_TIME_PRIV	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ZCQ_MATCH_TRADING_COMMUNITY_DATA_REAL_TIME_PRIV	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.

Trading Community Data Quality Address

An object representing a set of attributes that is used to provide values of the address to be cleansed such as street address, city, postal code, or country.

QName: {http://xmlns.oracle.com/apps/cdm/dataQuality/realTime/publicModel/}DataQualityAddress

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Data Quality Cleanse Address*
Handled by	*Trading Community Real Time Data Quality*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddressLine1	string	The first line of the street address.
AddressLine2	string	The second line of the street address.
AddressLine3	string	The third line of the street address.
AddressLine4	string	The fourth line of the street address.
City	string	The name of the city.
Country	string	The name of the country.
CountryISO2	string	A two-letter country code defined in ISO 3166-1.
CountrySubEntity	string	The geopolitical division within the country such as Province, State, and so on.
DataQualityRecordType	string	The type of record such as Driver, Candidate, and so on.
DataQualityRequestId	string	The consumer provided identifier for grouping the Driver and Candidate records, when more than one Driver Record is passed.
DataQualitySubRequestId	string	The input attribute provided by the service consumer. Each input record should have a unique identifier within the service request which is echoed back in the result records for correlation purpose.

Name	Type	Description
DependentLocality	string	An administrative or geopolitical level below city or locality.
DoubleDependentLocality	string	An administrative or geopolitical level below the dependent locality.
LocationIdentifier	string	The unique identifier for the location.
PostalCode	string	The postal code element of the address.
PostalPlusCode	string	The extension to the postal code such as the 4 digit code for United States ZIP code.
ResultCode	string	The code returned by the data quality service indicating the status of the service call such as ERRORED, SUCCESS, and so on.
ResultMessage	string	A return attribute which provides more details on the status of the service call.
SubProvince	string	The largest administrative level or division of a state or province. For example, for United states, this would map to county such as Dade county in Florida or Suffolk country in New York.

Trading Community Data Quality Cleanse Address

An object representing a set of attributes that is used to provide values to cleanse or validate an address such as the address elements and the cleansing configuration code.

QName: {http://xmlns.oracle.com/apps/cdm/dataQuality/realTime/publicModel/}DataQualityAddressService

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Data Quality Address*
Contains	*Trading Community Data Quality Configuration*

Relationship Type	Object or Service
Handled by	*Trading Community Real Time Data Quality*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConfigCode	string	The configuration code defined in the Fusion Data Quality application for matching or cleansing operations and usage.
DataQualityAddress	*Trading Community Data Quality Address*	The Data Quality configuration parameter name-value pairs for overwriting parameter values associated with the configuration code per runtime request.
DataQualityParam	*Trading Community Data Quality Configuration*	A return attribute which provides more details on the status of the service call.
DataQualityRequestId	string	The consumer provided identifier for grouping the Driver and Candidate records, when more than one Driver Record is passed.
ErrorCode	string	The code returned by the data quality service informing the status of the service call such as ERRORED, SUCCESS, and so on.
Message	string	The person object attributes used by the data quality real-time matching service.

Trading Community Data Quality Configuration

An object representing a set of attributes that is used to provide data quality configuration values such as match tolerance, default country, threads hold, or maximum number of return records.

QName: {http://xmlns.oracle.com/apps/cdm/dataQuality/realTime/publicModel/}DataQualityParam

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Data Quality Match Organization*
Contained by	*Trading Community Data Quality Match Location*
Contained by	*Trading Community Data Quality Match Person*
Contained by	*Trading Community Data Quality Cleanse Address*
Handled by	*Trading Community Real Time Data Quality*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
DataQualityRequestId	string	The consumer provided identifier for grouping the Driver and Candidate records, when more than one Driver record is passed.
DataQualitySubRequestId	string	The output attribute whose value is echoed back in the result records for correlation purpose.
ParamName	string	The name of the parameter for overwriting the pre-defined configuration values per runtime request.
ParamValue	string	The value of the parameter for overwriting the pre-defined configuration values per runtime request.

Trading Community Data Quality Location

An object representing a set of attributes that is used to provide values of the location for which potential matches are returned such as street address, city, or postal code.

QName: {http://xmlns.oracle.com/apps/cdm/dataQuality/realTime/publicModel/}DataQualityLocation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Data Quality Match Location*
Handled by	*Trading Community Real Time Data Quality*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AddressEffectiveDate	string	The date when the postal address for this location becomes valid.
AddressExpirationDate	string	The date when the postal address for this location becomes invalid.
AddressLine1	string	The first line of the street address.
AddressLine2	string	The second line of the street address.
AddressLine3	string	The third line of the street address.
AddressLine4	string	The fourth line of the street address.
City	string	The name of the city.
Country	string	The name of the country.
CountrySubEntity	string	The geopolitical level below the country such as Province or State.
County	string	The name of the county.
CustomAttribute1	string	A custom attribute for the location object or its child entities to be used in location matching.
CustomAttribute10	string	A custom attribute for location object or its child entities to be used in location matching.
CustomAttribute2	string	A custom attribute for the location object or its child entities to be used in location matching.
CustomAttribute3	string	A custom attribute for the location object or its child entities to be used in location matching.

Name	Type	Description
CustomAttribute4	string	A custom attribute for the location object or its child entities to be used in location matching.
CustomAttribute5	string	A custom attribute for the location object or its child entities to be used in location matching.
CustomAttribute6	string	A custom attribute for the location object or its child entities to be used in location matching.
CustomAttribute7	string	A custom attribute for the location object or its child entities to be used in location matching.
CustomAttribute8	string	A custom attribute for the location object or its child entities to be used in location matching.
CustomAttribute9	string	A custom attribute for the location object or its child entities to be used in location matching.
DataQualityRecordType	string	The type of record such as Driver, Candidate, and so on.
DataQualityRequestId	string	The consumer provided identifier for grouping the Driver and Candidate records, when more than one Driver record is passed.
DataQualityScore	string	A value between 1 and 100 that indicates the quality of the match, where 100 indicates the best match.
DataQualitySubRequestId	string	The input attribute provided by the service consumer. Each input record should have a unique identifier within the service request which is echoed back in the result records for correlation purpose.
GeometryStatusCode	string	The spatial data integration status for the location.
HouseType	string	The type of the building.
LocationIdentifier	string	The unique identifier for the location.
PartySiteName	string	The name given to the party address.
PhoneticAddressLines	string	The phonetic or Kana representation of the Kanji address lines (used in Japan).

Name	Type	Description
Position	string	The primary direction such as North or East that is used to access the location.
PostalCode	string	The postal code element of the address.
Province	string	The name of the province.
ResultCode	string	The code returned by the data quality service indicating the status of the service call such as ERRORED, SUCCESS, and so on.
ResultMessage	string	A return attribute which provides more details on the status of the service call.
SalesTaxGeocode	string	The United States sales tax jurisdiction code.

Trading Community Data Quality Match Location

An object representing a set of attributes that is used to provide values needed to find potential location matches such as address attributes and location matching configuration code.

QName: {http://xmlns.oracle.com/apps/cdm/dataQuality/realTime/publicModel/}DataQualityLocationService

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Data Quality Configuration*
Contains	*Trading Community Data Quality Location*
Handled by	*Trading Community Real Time Data Quality*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConfigCode	string	The configuration code defined in the Fusion Data Quality application for matching or cleansing operations and usage.
DataQualityLocation	*Trading Community Data Quality Location*	The location object attributes used by the data quality real-time matching service for location matching.
DataQualityParam	*Trading Community Data Quality Configuration*	The Data Quality configuration parameter name-value pairs for overwriting parameter values associated with the configuration code per runtime request.
DataQualityRequestId	string	A consumer provided identifier that will be echoed back in the response message for correlation purpose.
ErrorCode	string	The code returned by the data quality service informing the status of the service call such as ERRORED, SUCCESS, and so on.
Message	string	A return attribute which provides more details on the status of the service call.

Trading Community Data Quality Match Organization

An object representing a set of attributes that is used to provide values needed to find potential organization matches such as the organization matching attributes and the organization matching configuration code.

QName: {http://xmlns.oracle.com/apps/cdm/dataQuality/realTime/publicModel/}DataQualityOrgService

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Data Quality Configuration*
Contains	*Trading Community Data Quality Organization*
Handled by	*Trading Community Real Time Data Quality*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConfigCode	string	The configuration code defined in the Fusion Data Quality application for matching or cleansing operations and usage.
DataQualityOrg	*Trading Community Data Quality Organization*	The organization object attributes used by the data quality real-time matching service.
DataQualityParam	*Trading Community Data Quality Configuration*	The Data Quality configuration parameter name-value pairs for overwriting parameter values associated with the configuration code per runtime request.
DataQualityRequestId	string	The consumer provided identifier for grouping the Driver and Candidate records, when more than one Driver record is passed.
ErrorCode	string	The code returned by the data quality service informing the status of the service call such as ERRORED, SUCCESS, and so on.
Message	string	A return attribute which provides more details on the status of the service call.

Trading Community Data Quality Match Person

An object representing a set of attributes that is used to provide values needed to find potential person matches such as person matching configuration code and person matching attributes.

QName: {http://xmlns.oracle.com/apps/cdm/dataQuality/realTime/publicModel/}DataQualityPersonService

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Data Quality Configuration*
Contains	*Trading Community Data Quality Person*

Relationship Type	Object or Service
Handled by	*Trading Community Real Time Data Quality*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ConfigCode	string	The configuration code defined in the Fusion Data Quality application for matching or cleansing operations and usage.
DataQualityParam	*Trading Community Data Quality Configuration*	The Data Quality configuration parameter name-value pairs for overwriting parameter values associated with the configuration code per runtime request.
DataQualityPerson	*Trading Community Data Quality Person*	The person object attributes used by the data quality real-time matching service.
DataQualityRequestId	string	The consumer provided identifier for grouping the Driver and Candidate records, when more than one Driver Record is passed.
ErrorCode	string	The code returned by the data quality service informing the status of the service call such as ERRORED, SUCCESS, and so on.
Message	string	A return attribute which provides more details on the status of the service call.

Trading Community Data Quality Organization

An object representing a set of attributes that is used to provide values of the organization for which potential matches are returned such as organization name, stock symbol, DUNS number.

QName: {http://xmlns.oracle.com/apps/cdm/dataQuality/realTime/publicModel/}DataQualityOrg

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Data Quality Match Organization*
Handled by	*Trading Community Real Time Data Quality*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalPartyIdentifierId1	string	The unique identifier for the additional organization identifier record.
AdditionalPartyIdentifierId2	string	The unique identifier for the additional organization identifier record.
AdditionalPartyIdentifierId3	string	The unique identifier for the additional organization identifier record.
AddressIdentifier	string	The unique identifier for the location.
AddressLine1	string	The first line of the street address.
AddressLine2	string	The second line of the street address.
AddressLine3	string	The third line of the street address.
AddressLine4	string	The fourth line of the street address.
City	string	The name of the city.
ContactName	string	The name of the primary contact for the account.
ContactPointIdentifier	string	The unique identifier for party contact point record.
Country	string	The name of the country.
CountrySubEntity	string	The state or province name in the organization address.
County	string	The name of the county.

Name	Type	Description
CustomAttribute1	string	A custom attribute for the organization object or its child entities to be used in organization matching.
CustomAttribute10	string	A custom attribute for the organization object or its child entities to be used in organization matching.
CustomAttribute2	string	A custom attribute for the organization object or its child entities to be used in organization matching.
CustomAttribute3	string	A custom attribute for the organization object or its child entities to be used in organization matching.
CustomAttribute4	string	A custom attribute for the organization object or its child entities to be used in organization matching.
CustomAttribute5	string	A custom attribute for the organization object or its child entities to be used in organization matching.
CustomAttribute6	string	A custom attribute for the organization object or its child entities to be used in organization matching.
CustomAttribute7	string	A custom attribute for the organization object or its child entities to be used in organization matching.
CustomAttribute8	string	A custom attribute for the organization object or its child entities to be used in organization matching.
CustomAttribute9	string	A custom attribute for the organization object or its child entities to be used in organization matching.
DUNSNumber	string	The D-U-N-S number in VARCHAR format. This attribute value not restricted to nine digit D-U-N-S number.
DataQualityRecordType	string	The type of record such as Driver, Candidate, and so on.

Name	Type	Description
DataQualityRequestId	string	The consumer provided identifier for grouping the Driver and the Candidate records, when more than one Driver record is passed.
DataQualityScore	string	A value between 1 and 100 that indicates the quality of the match, where 100 indicates the best match.
DataQualitySubRequestId	string	The input attribute provided by the service consumer. Each input record should have a unique identifier within the service request which is echoed back in the result records for correlation purpose.
EmailDomainId	string	The unique identifier of the organization email.
OrganizationIdentifier	string	The unique identifier for the organization.
OrganizationIdentifierId1	string	The additional identifier for the organization.
OrganizationIdentifierId2	string	The additional identifier for the organization.
OrganizationIdentifierId3	string	The additional identifier for the organization.
OrganizationName	string	The name of the party when the party type is Organization.
OrganizationProfileId	string	The unique identifier of the organization profile.
OrganizationType	string	This attribute is not used in Fusion Version 1.
PartySiteId	string	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PhoneExtension	string	The phone extension of the organization phone.
PhoneLineType	string	The type of phone line. For example, general, fax, inbound, or outbound.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PhoneticAddressLines	string	The phonetic or Kana representation of the Kanji address lines (used in Japan).

Name	Type	Description
PostalCode	string	The postal code element of the address.
PostalPlusCode	string	The extension of the postal code such as the 4 digit code for United States ZIP code.
Province	string	The name of the province.
RegistryIdentifier	string	The unique number for the organization that maps to the party number in the party foundation model.
ResultCode	string	The code returned by the data quality service indicating the status of the service call such as ERRORED, SUCCESS, and so on.
ResultMessage	string	A return attribute which provides more details on the status of the service call.
SICCode	string	The Standard Industry Classification (SIC) code.
SICCodeType	string	The version of Standard Industry Classification (SIC) code.
StockSymbol	string	The corporate stock symbol such as ORCL.
TaxRegistrationNumber	string	The taxpayer identification number, often the unique identifier of the person or the organization. For example, the Social Security Number (SSN) or the income taxpayer ID in US, the fiscal code or NIF in Europe, and so on.
TradingPartnerIdentifier	string	The Financial Systems Integration Office (FSIO) trading partner code. This attribute fulfills the need for the "Fed vs. Non-Fed" attribute.
YearEstablished	string	The year when the organization began doing business.
YearIncorporated	string	The year when the business was incorporated.
eMailDomain	string	The email domain information for the organization.

Trading Community Data Quality Person

An object representing a set of attributes that is used to provide values of the person for which potential matches are returned such as first name or last name.

QName: {http://xmlns.oracle.com/apps/cdm/dataQuality/realTime/publicModel/}DataQualityPerson

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Data Quality Match Person*
Handled by	*Trading Community Real Time Data Quality*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AdditionalPartyIdentifierId1	string	The unique identifier for the additional person identification record.
AdditionalPartyIdentifierId2	string	The unique identifier for the additional person identification record.
AdditionalPartyIdentifierId3	string	The unique identifier for the additional person identification record.
AddressIdentifier	string	The unique identifier for the location address.
AddressLine1	string	The first line of the street address.
AddressLine2	string	The second line of the street address.
AddressLine3	string	The third line of the street address.
AddressLine4	string	The fourth line of the street address.
City	string	The name of the city.

Name	Type	Description
ContactPointIdentifier	string	Unique record identifier for a person party contact point in the Fusion instance.
Country	string	The name of the country.
CountrySubEntity	string	The geopolitical division within the country such as Province, State, and so on.
County	string	The name of the county.
CustomAttribute1	string	A custom attribute for the person object or its child entities to be used in person matching.
CustomAttribute10	string	A custom attribute for the person object or its child entities to be used in person matching.
CustomAttribute2	string	A custom attribute for the person object or its child entities to be used in person matching.
CustomAttribute3	string	A custom attribute for the person object or its child entities to be used in person matching.
CustomAttribute4	string	A custom attribute for the person object or its child entities to be used in person matching.
CustomAttribute5	string	A custom attribute for the person object or its child entities to be used in person matching.
CustomAttribute6	string	A custom attribute for the person object or its child entities to be used in person matching.
CustomAttribute7	string	A custom attribute for the person object or its child entities to be used in person matching.
CustomAttribute8	string	A custom attribute for the person object or its child entities to be used in person matching.
CustomAttribute9	string	A custom attribute for the person object or its child entities to be used in person matching.
DataQualityRecordType	string	The type of record such as Driver, Candidate, and so on.
DataQualityRequestId	string	The consumer provided identifier for grouping the Driver and Candidate records, when more than one Driver Record is passed.

Name	Type	Description
DataQualityScore	string	A value between 1 and 100 that indicates the quality of the match, where 100 indicates the best match.
DataQualitySubRequestId	string	The input attribute provided by the service consumer. Each input record should have a unique identifier within the service request which is echoed back in the result records for correlation purpose.
DateofBirth	string	The date on which the person was born.
DateofDeath	string	The date on which the person died.
DeclaredEthnicity	string	The declared ethnicity of the person.
Email	string	The email address associated with the record.
EmailId	string	The unique record identifier of the email associated with the person.
Gender	string	The gender of the person such as Male, Female, or Unknown.
HouseType	string	The type of building or house.
LanguageName	string	The standard name for a language.
PartySiteId	string	The identifier for the party site. It is the foreign key to the HZ_PARTY_SITES table.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonIdentifier	string	The unique identifier of the person record.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.

Name	Type	Description
PersonName	string	The name of the person. It is the concatenation of the person's title, first name, middle name, and last name.
PersonProfileId	string	The identifier for the person profile.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PersonalIdentification1	string	The value of a chosen personal identifier.
PersonalIdentification2	string	The value of a chosen personal identifier.
PersonalIdentification3	string	The value of a chosen personal identifier.
PhoneExtension	string	The extension to the phone number for the person.
PhoneLineType	string	The type of phone line. For example, general, fax, inbound, or outbound.
PhoneNumber	string	The telephone number in the local format. The number should not include area code, country code, or extension.
PhoneticAddressLines	string	The phonetic or Kana representation of the Kanji address lines (used in Japan).
PlaceofBirth	string	The place where the person was born, typically, the city and the country of birth.
PostalCode	string	The postal code element of the address.
PostalPlusCode	string	The extension of the postal code such as the 4 digit code for United States ZIP code.
Province	string	The name of the province.
RegistryIdentifier	string	The unique identifier number of a party.
ResultCode	string	The code returned by the data quality service indicating the status of the service call such as ERRORED, SUCCESS, and so on.

Name	Type	Description
ResultMessage	string	A return attribute which provides more details on the status of the service call.
Salutation	string	The phrase used to address a party in any correspondence.
TaxRegistrationNumber	string	The taxpayer identification number, often the unique identifier of the person or the organization. For example, the Social Security Number (SSN) or the income taxpayer ID in US, the fiscal code or NIF in Europe, and so on.

Trading Community Relationship Type Service

A configuration of relationship types that could be used to connect trading community members. For example, spouse of and partner of.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipTypeService/applicationModule/}RelationshipTypeService

Service WSDL URL: https://servername/crmService/RelationshipTypeService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Relationship Setup

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Relationship Type*

Operations

- *getRelationshipType*
- *createRelationshipType*
- *updateRelationshipType*

- *deleteRelationshipType*
- *mergeRelationshipType*
- *findRelationshipType*
- *processRelationshipType*
- *processCSRelationshipType*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getRelationshipType

The Get operation for the trading community relationship type.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
relationshipTypeId	long	The unique identifier of the relationship type.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipTypeService/}RelationshipTypeResul	The trading community relationship type that matches the inbound key attributes.

createRelationshipType

The Create operation for the trading community relationship type.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
relationshipType	*Trading Community Relationship Type*	The trading community relationship type to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipTypeService/}RelationshipTypeResul	The result of the operation that includes the successfully created trading community relationship type and a list of warning or information messages.

updateRelationshipType

The Update operation for the trading community relationship type.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
relationshipType	*Trading Community Relationship Type*	The trading community relationship type to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipTypeService/}RelationshipTypeResul	The result of the operation that includes the successfully updated trading community relationship type and a list of warning or information messages.

deleteRelationshipType

The Delete operation for the trading community relationship type.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
relationshipType	*Trading Community Relationship Type*	The trading community relationship type to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergeRelationshipType

The Merge operation for the trading community relationship type. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
relationshipType	*Trading Community Relationship Type*	The trading community relationship type to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipTypeService/}RelationshipTypeResul	The result of the operation that includes the successfully merged trading community relationship type and a list of warning or information messages.

findRelationshipType

The Find operation for the trading community relationship type.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Trading Community Relationship Type*	The result of the operation that includes a list of trading community relationship types that satisfy the inbound criteria and any warning or information messages.

processRelationshipType

The Bulk Load operation for the trading community relationship type.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action to perform, such as create, update, merge, or delete.
relationshipType	*Trading Community Relationship Type*	A list of the trading community relationship types to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Trading Community Relationship Type*	The result of the operation that includes the successfully processed trading community relationship type and a list of warning or information messages.

processCSRelationshipType

An operation to apply the changes back to the data source for trading community relationship type.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object to represent the changes.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk operation behavior, such as whether valid data is committed if there are other invalid data in the same batch, and whether the outbound contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created and updated data objects, and all warning and information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name; an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used to evaluate the locale-based user interface hints. The locale name is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in the ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined for this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined for the service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
createRelationshipType	HZ_MANAGE_TRADING_COMMUNITY_RELATIONSHIP_TYPE_PRIV	Manage Trading Community Relationship Type	Allows the specification of relationship types that can be created between organizations and persons in the business community, such as contact of and competitor of.

Operation Name	Privilege Code	Privilege Name	Privilege Description
getRelationshipType	HZ_MANAGE_TRADING_COMMUNITY_RELATIONSHIP_TYPE_PRIV	Manage Trading Community Relationship Type	Allows the specification of relationship types that can be created between organizations and persons in the business community, such as contact of and competitor of.
findRelationshipType	HZ_MANAGE_TRADING_COMMUNITY_RELATIONSHIP_TYPE_PRIV	Manage Trading Community Relationship Type	Allows the specification of relationship types that can be created between organizations and persons in the business community, such as contact of and competitor of.
processCSRelationshipType	HZ_MANAGE_TRADING_COMMUNITY_RELATIONSHIP_TYPE_PRIV	Manage Trading Community Relationship Type	Allows the specification of relationship types that can be created between organizations and persons in the business community, such as contact of and competitor of.
deleteRelationshipType	HZ_MANAGE_TRADING_COMMUNITY_RELATIONSHIP_TYPE_PRIV	Manage Trading Community Relationship Type	Allows the specification of relationship types that can be created between organizations and persons in the business community, such as contact of and competitor of.
mergeRelationshipType	HZ_MANAGE_TRADING_COMMUNITY_RELATIONSHIP_TYPE_PRIV	Manage Trading Community Relationship Type	Allows the specification of relationship types that can be created between organizations and persons in the business community, such as contact of and competitor of.
processRelationshipType	HZ_MANAGE_TRADING_COMMUNITY_RELATIONSHIP_TYPE_PRIV	Manage Trading Community Relationship Type	Allows the specification of relationship types that can be created between organizations and persons in the business community, such as contact of and competitor of.
updateRelationshipType	HZ_MANAGE_TRADING_COMMUNITY_RELATIONSHIP_TYPE_PRIV	Manage Trading Community Relationship Type	Allows the specification of relationship types that can be created between organizations and persons in the business community, such as contact of and competitor of.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_RELATIONSHIP_TYPE_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
HZ_MANAGE_TRADING_COMMUNITY_RELATIONSHIP_TYPE_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_CHANNEL_ADMINISTRATION_DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Trading Community Relationship Type

The role or relationship type that a trading community member plays in its relationship with another. For example, contact of or subsidiary of.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipTypeService/}RelationshipType

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Trading Community Relationship Type Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AllowCircularRelationships	string	Indicates if circular relationships are allowed using this relationship type.
AllowRelateToSelfFlag	boolean	Indicates if a party can be related to itself.
BackwardRelationshipCode	string	The backward relationship code used to describe relationships. For example, SUPPLIER_OF.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DirectionCode	string	Validated by DIRECTION_CODE lookup type. P for Parent, C for Child, and N for Not Directional.
ForwardRelationshipCode	string	The forward relationship code used to describe relationships. For example, CUSTOMER_OF.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectRolePlural	string	Plural value of relationship role for the object party.
ObjectRoleSingular	string	Singular value of relationship role for the object party.
ObjectType	string	Object type of the relationship type.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
RelationshipType	string	The relationship type name. For example, CUSTOMER_SUPPLIER.
RelationshipTypeId	long	Relationship type identifier. • Primary Key
Role	string	Unique relationship role lookup code based on relationship type and phrase. In the HZ_RELATIONSHIP_ROLE lookup type meaning is the plural role and description is the singular role.
Status	string	The status of the record.
SubjectRoleMeaning	string	Description of the relationship role for the subject party.

Name	Type	Description
SubjectRolePlural	string	Plural value of relationship role for the subject party.
SubjectRoleSingular	string	Singular value of relationship role for the subject party.
SubjectType	string	Subject type of the relationship type.

Trading Community Resolution Request

The service used to send a request electronically or as a document to resolve potential duplicate information. The request may attempt to resolve duplicate parties in the system or to resolve duplicate detail information for a party.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/hubBase/publicModel/endUserMerge/}DuplicateResolutionRequestService

Service WSDL URL: https://servername/crmService/DuplicateResolutionRequestService?WSDL

Logical Business Objects

- CRM : Trading Community Hub : Trading Community Duplicate Resolution Request

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Merge Result*
Handles	*Trading Community Merge Request*

Operations

- *createPartyMergeRequest*
- *createMergeRequest*
- *getMergeResult*
- *getDfltObjAttrHints*

- *getServiceLastUpdateTime*
- *getEntityList*

createPartyMergeRequest

Creates a merge duplicate resolution request for immediate processing for parties which are not sales accounts or pending data steward review and approval. Requests can be entered for review if Fusion Customer Hub is configured and request entry privilege was granted. Requests can be submitted for immediate processing if the request submission privilege was granted and the User Merge Request profile option is set to Process Without Approval.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
mergedRecordList	string	A list of party identifiers to be merged. Child entities of the non-master parties are transferred to the master party and non-master parties are inactivated. At least two party identifiers must be specified.
status	string	Indicates the status of the request to be created. Recommended that this parameter be left unspecified. Used for backward compatibility.
masterId	string	Identifier of the master party. If the master party is not specified and cannot be determined automatically, the request will be entered for review to choose a master party.

Response Payload

Element Name	Type	Description
result	string	Reference to the newly created party merge duplicate resolution request.

createMergeRequest

Creates a merge duplicate resolution request for immediate processing or pending data steward review and approval. Requests can be entered for review if Fusion Customer Hub is configured and request entry privilege was granted. Requests can be submitted for immediate processing if the request submission privilege was granted and the User Merge Request profile option is set to Process Without Approval.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
record	*Trading Community Merge Request*	Master and the non master records that need to be merged.

Response Payload

Element Name	Type	Description
result	*Trading Community Merge Result*	Returns the status of the merge request such as pending, submitted or error along with the duplicate resolution request identifier.

getMergeResult

Retrieves the status of a duplicate resolution request which was created using the Create Merge Request method.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
record	*Trading Community Merge Request*	The duplicate resolution request information such as request identifier.

Response Payload

Element Name	Type	Description
result	*Trading Community Merge Result*	The status of the duplicate resolution request such as completed, rejected, errored along with the record level details in case of errors or violation of agreement rules.

getDfltObjAttrHints

Retrieves user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

Returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

Gets the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create,

Element Name	Type	Description
		update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
All Operations	ZCH_ENTER_TRADING_COMMUNITY_MERGE_REQUEST_PRIV	Enter Trading Community Merge Request	Allows the creation of a manual merge request by searching and selecting the duplicate person or organization records to merge.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
ZCH_ENTER_TRADING_COMMUNITY_MERGE_REQUEST_PRIV	ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	Customer Maintenance Segregated	Maintains customer related data except the creation and management of customers.
ZCH_ENTER_TRADING_COMMUNITY_MERGE_REQUEST_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ZCH_ENTER_TRADING_COMMUNITY_MERGE_REQUEST_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
ZCH_ENTER_TRADING_COMMUNITY_MERGE_REQUEST_PRIV	ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	Customer Maintenance	Defines and maintains Receivables attributes of customer accounts and customer account sites.
ZCH_ENTER_TRADING_COMMUNITY_MERGE_REQUEST_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			well as appointments, interactions, and customer contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_FUN_CUSTOMER_ACCOUNT_INQUIRY_DUTY_CRM	Customer Account Inquiry	View customer account details.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_IBY_CUSTOMER_PAYMENT_INSTRUMENT_MANAGEMENT_DUTY_CRM	Customer Payment Instrument Management	Manages customer bank accounts and credit cards and other payment details.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_ZX_REGISTRATION_PII_DUTY_CRM	Party Taxpayer Identifier PII	View personally identifiable information for tax registration number of type taxpayer ID.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_AR_CUSTOMER_MAINTENANCE_SEGREGATED_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Trading Community Merge Request

An object representing a set of attributes that is used to provide values for the parties and the child entities to be merged.

QName: {http://xmlns.oracle.com/apps/cdm/hubBase/publicModel/endUserMerge/}MergeRequestData

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Trading Community Resolution Request*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Master	string	The entity type for the master in Fusion such as HZ_PARTIES, HZ_PARTY_SITES. If this attribute is specified, then do not specify the non-master or the request in the same service data object.
NonMaster	string	The entity type for the non-master record in Fusion such as HZ_PARTIES and HZ_PARTY_SITES. If this attribute is specified, do not specify the master or the request in the same service data object.
Request	string	The duplicate resolution request entity in Fusion such as ZCH_DEDUP_REQUEST. If this attribute is specified, do not specify the master or the non-master in the same object.
SourceSystem	string	The source system name where the record originated.
SourceSystemReference	string	The identifier of the master or the non-master in the source system and the Fusion identifier for request entity.

Trading Community Merge Result

An object representing a set of attributes that is returned by the get merge results operation.

QName: {http://xmlns.oracle.com/apps/cdm/hubBase/publicModel/endUserMerge/}MergeResultData

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handled by	*Trading Community Resolution Request*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
Master	string	The entity type for the non-master record in Fusion such as HZ_PARTIES, HZ_PARTY_SITES.

Name	Type	Description
		If this attribute is specified, do not specify the non-master or the request in the same service data object.
NonMaster	string	The entity type for the non-master record in Fusion such as HZ_PARTIES, HZ_PARTY_SITES. If this attribute is specified, do not specify the master or the request in the same service data object.
RecordStatusCode	string	The status code of the master or the non-master records for the merge request. This does not apply to the request entity.
RecordStatusMessage	string	The detailed status message for the master or the non-master records in the merge request. This does not apply to the request entity.
Request	string	The duplicate resolution request entity in Fusion such as HZ_DEDUP_REQUEST.
RequestStatusCode	string	The status code duplicate resolution request such as Completed, Errored, Processing, and so on.
RequestStatusMessage	string	The detailed message for the status of the duplicate resolution request.
SourceSystem	string	The source system name where the record originated.
SourceSystemReference	string	The identifier of the master or the non-master in the source system and the Fusion identifier for the request entity.

Trading Community Resource

A trading community member that can be assigned a work object. For example, employee John Smith or partner contact Jack Brown.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/applicationModule/}ResourceService

Service WSDL URL: https://servername/crmService/ResourceServiceV2?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Resource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Resource Organization Member Role Assignment*
Handles	*Resource Role Assignment*
Handles	*Primary Resource Organization by Usage*
Handles	*Resource*
Handles	*Resource Team Member*
Handles	*Trading Community Resource Team Member Role Assignment*
Handles	*Resource Organization Member*

Operations

- *processResourceRoleProvisioning*
- *terminateResource*
- *getResource*
- *createResource*
- *updateResource*
- *deleteResource*
- *mergeResource*
- *findResource*
- *processResource*
- *processCSResource*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

processResourceRoleProvisioning

Process the resource role provisioning for Trading Community Resource

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourcePartyId	long	Process the resource role provisioning for Trading Community Resource filtered by the resource identifier provided.

Response Payload

Element Name	Type	Description
result	void	

terminateResource

An operation to terminate or remove from usage a Trading Community Resource

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	An operation to terminate the Trading Community Resource filtered by the resource identifier provided.

Response Payload

Element Name	Type	Description
result	void	

getResource

Get operation for Trading Community Resource Profile

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceProfileId	long	Unique identifier for the Resource Profile. Primary Key.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceResult	Trading Community Resource Profile that matches the inbound key attributes.

createResource

Create operation for Trading Community Resource Profile

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resource	*Resource*	Trading Community Resource Profile to be created

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceResult	Result of the operation includes the successfully created Trading Community Resource Profile and/or a list of warnings or informational messages.

updateResource

Update operation for Trading Community Resource Profile

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resource	*Resource*	Trading Community Resource Profile to be updated

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceResult	Result of the operation includes the successfully updated Trading Community Resource Profile and/or a list of warnings or informational messages.

deleteResource

Delete operation for Trading Community Resource Profile

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resource	*Resource*	Trading Community Resource Profile to be deleted

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warnings or informational messages encountered when deleting the object.

mergeResource

Merge operation for Trading Community Resource Profile. It will perform an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resource	*Resource*	Trading Community Resource Profile to be merged

Element Name	Type	Description

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceResult	Result of the operation includes the successfully merged Trading Community Resource Profile and/or a list of warnings or informational messages.

findResource

Find operation for Trading Community Resource Profile

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, etc.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Resource*	Result of the operation including a list of Trading Community Resource Profile that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

processResource

Bulk load operation for Trading Community Resource Profile

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action shall be performed, such as Create, Update, Merge, or Delete
resource	*Resource*	A list of Trading Community Resource Profile to be processed
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Resource*	Result of the operation including a list of Trading Community Resource Profile that are successfully processed and any warnings or informational messages encountered during the invocation.

processCSResource

An operation to apply the changes back to the data source for Trading Community Resource Profile

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	Result of the operation including a list of created/updated data objects, and all warning and informational messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

Element Name	Type	Description

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
createResource	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be associated to leads, opportunities, and territories and given sales credits or compensated for that work.
updateResource	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be associated to leads, opportunities, and territories and given sales credits or compensated for that work.
deleteResource	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be associated to leads, opportunities, and territories and given sales

Operation Name	Privilege Code	Privilege Name	Privilege Description
			credits or compensated for that work.
processCSResource	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be associated to leads, opportunities, and territories and given sales credits or compensated for that work.
processResource	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be associated to leads, opportunities, and territories and given sales credits or compensated for that work.
findResource	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be associated to leads, opportunities, and territories and given sales credits or compensated for that work.
findResource	HZ_VIEW_TRADING_ COMMUNITY_RESOURCE_ DETAILS_PRIV	View Trading Community Resource Details	Allows viewing of resource basic information, such as name, primary phone, primary address, and primary e-mail.
mergeResource	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be associated to leads, opportunities, and territories and given sales credits or compensated for that work.
getResource	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be associated to leads, opportunities, and territories and given sales credits or compensated for that work.
getResource	HZ_VIEW_TRADING_ COMMUNITY_RESOURCE_ DETAILS_PRIV	View Trading Community Resource Details	Allows viewing of resource basic information, such as name, primary phone, primary address, and primary e-mail.
terminateResource	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or

Operation Name	Privilege Code	Privilege Name	Privilege Description
			partner members who are to be associated to leads, opportunities, and territories and given sales credits or compensated for that work.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	ORA_ATC_OFFER_MANAGEMENT_ DUTY	Offer Management	Creates and manages catalogs, categories, product offers including attributes, components, rules, terms, pricing, catalog assignments and lifecycle statuses
HZ_VIEW_TRADING_ COMMUNITY_RESOURCE_ DETAILS_PRIV	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
HZ_VIEW_TRADING_ COMMUNITY_RESOURCE_ DETAILS_PRIV	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
HZ_VIEW_TRADING_ COMMUNITY_RESOURCE_ DETAILS_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
HZ_VIEW_TRADING_ COMMUNITY_RESOURCE_ DETAILS_PRIV	ORA_ZCM_PARTNER_SALES_ PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
HZ_VIEW_TRADING_ COMMUNITY_RESOURCE_ DETAILS_PRIV	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
			well as appointments, interactions, and customer contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_HZ_RESOURCE_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_HZRESOURCE_ADMINISTRATOR_DUTY	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Primary Resource Organization by Usage

The primary organization by usage for a resource. For example, ABC 20 is the primary sales organization and ABC 30 is the primary marketing organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourcePrimaryOrganization

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Resource*
Handled by	*Trading Community Resource*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassificationCode	string	Obsolete
ClassificationId	long	Obsolete
CreatedBy	string	Obsolete
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Obsolete
DeleteFlag	boolean	Obsolete
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Obsolete
LastUpdateLogin	string	Obsolete
LastUpdatedBy	string	Obsolete
ObjectVersionNumber	int	Obsolete
PartyId	long	Obsolete
PrimaryOrgId	long	Obsolete
ResourcePrimaryOrgRecId	long	Obsolete • Primary Key

Resource

A front office person. For example, sales persons or partner members can be tagged as resources.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}Resource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Primary Resource Organization by Usage*
Contains	*Resource Role Assignment*
Contains	*Resource Team Member*
Contains	*Resource Organization Member*
Handled by	*Trading Community Resource*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttachmentEntityName	string	Not Used.
Company	string	Name of the Company that this resource belongs to
CorpCurrencyCode	string	Corporate Currency Code This attribute is used by CRM Extensibility framework
CreatedBy	string	Who column: indicates the user who created the row.
CreatedByModule	string	Created By Module. Look up of type HZ_CREATED_BY_MODULES in HZ_LOOKUPS table.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
CurcyConvRateType	string	Currency Conversion Rate Type This attribute is used by CRM Extensibility framework
CurrencyCode	string	Currency Code This attribute is used by CRM Extensibility framework
DepartmentMeaning	string	Department for this resource if it is employee
EmailAddress	string	E-mail address
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date at which the resource becomes inactive
FormattedAddress	string	Primary Formatted address for the resource
FormattedPhoneNumber	string	Primary Formatted phone number for the resource
IdenAddrPartySiteId	long	Identifier Address PartySite Id
ImageURL	string	Not Used.
InternalFlag	boolean	Internal Flag
JobMeaning	string	Job for this resource if it is employee
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
Manager	string	Name of the manager for this resource
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether

Name	Type	Description
		another session has updated the row since it was queried.
Organizations	string	Name of Organizations this resource is member of
PartyId	long	Identifier for the party. Foreign key to the HZ_PARTIES PARTY_ID.
PartyName	string	Name of the Party
PartyNumber	string	Unique identification number for this party
PersonFirstName	string	Peron First Name
PersonLastName	string	Peron LastName
PersonLastNamePrefix	string	Resource Peron Last name
PersonMiddleName	string	Peron Middle Name.
PersonNameSuffix	string	Peron Name suffix
PersonPreNameAdjunct	string	Person Preferred Name adjacency
PersonPreviousLastName	string	perin Previous flag mage
PersonSecondLastName	string	peron secind last name
RequestId	long	Enterprise Service Scheduler: indicates the request ID of the job that created or last updated the row.
ResourceOrganizationMember	*Resource Organization Member*	The organization associated with a resource.
ResourcePrimaryOrg	string	Primary organizations for this resource
ResourcePrimaryOrganization	*Primary Resource Organization by Usage*	The primary organization associated with a resource.
ResourceProfileId	long	Unique identifier for the Resource Profile. Primary Key. • Primary Key

Name	Type	Description
ResourceRoleAssign	*Resource Role Assignment*	Role assigned to a resource.
ResourceTeamMember	*Resource Team Member*	The team associated with a resource.
ResourceType	string	Type of Resource ex employee
Roles	string	Resource roles assigned to this resource
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date at which the resource becomes active
Teams	string	Name of Teams this resource is member of
TimezoneCode	string	Foreign key to FND_TIMEZONES_B.TIMEZONE_CODE
URL	string	Primary URL for the resource
Usage	string	Read only party usage for resource party
UserAccountActiveFlag	boolean	Indicates if the resource has active user account or not
Username	string	Name of the user account associated with this resource

Resource Organization Member

A resource that is a member of an organization. For example, Joe Smith is a sales representative in the sales organization of ABC Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceOrganizationMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Resource Organization Member Role Assignment*

Relationship Type	Object or Service
Contained by	*Resource*
Handled by	*Trading Community Resource*
Handled by	*Trading Community Resource Organization*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DeleteFlag	boolean	Delete Flag. Indicates whether this member is logically deleted or not.
GroupId	long	Resource Group identifier foreign key to JTF_RS_GROUPS.
GroupMemberId	long	Resource Group Member identifier • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
ResourceId	long	Resource identifier. Foreign key to HZ_PARTIES.

Name	Type	Description
ResourceOrgMemberRoleAssign	*Trading Community Resource Organization Member Role Assignment*	Role assigned to a resource in the context of an organization membership.

Resource Role Assignment

A resource role assigned to a resource. For example, Joe Smith is assigned a sales representative role.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceRoleAssign

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Resource*
Contained by	*Trading Community Resource Roles Setup SDO*
Handled by	*Trading Community Resource*
Handled by	*Trading Community Resource Role*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DeleteFlag	boolean	Delete Flag indicates whether this record is logically deleted or not?
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date this role-resource becomes inactive

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
RoleId	long	Role identifier (foreign key to JTF_RS_ROLES)
RoleRelateId	long	Role Relation identifier (PK) • Primary Key
RoleResourceId	long	Resource identifier (foreign key to HZ_PARTIES) or (foreign key to JTF_RS_GROUPS_MEMBERS or (foreign key to JTF_RS_TEAM_MEMBERS)
RoleResourceType	string	Resource type. (lookup type: JTF_RS_ ROLE_ RES_TYPE)
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date this role-resource becomes active

Resource Team Member

A resource that forms part of a team.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceTeamMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Resource Team Member Role Assignment*
Contained by	*Trading Community Resource Team SDO*
Contained by	*Resource*
Handled by	*Trading Community Resource*
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DeleteFlag	boolean	Delete Flag indicates whether this record is logically deleted or not?
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
ResourceTeamMemberRoleAssign	*Trading Community Resource Team Member Role Assignment*	Role assignment for a resource team member.
ResourceType	string	Type of the resource

Name	Type	Description
TeamId	long	Resource Team identifier (foreign key to JTF_RS_TEAMS)
TeamMemberId	long	Resource Team Member identifier • Primary Key
TeamResourceId	long	A team member can be a Resource or a Resource Organization.

Trading Community Resource Organization Member Role Assignment

A role the resource plays within an organization. For example, sales manager or call center agent.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceOrgMemberRoleAssign

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Resource Organization Member*
Handled by	*Trading Community Resource*
Handled by	*Trading Community Resource Organization*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.

Name	Type	Description
DeleteFlag	boolean	Delete Flag indicates whether this record is logically deleted or not?
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date this role-resource becomes inactive
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
RoleId	long	Role identifier (foreign key to JTF_RS_ROLES)
RoleRelateId	long	Role Relation identifier (PK) • Primary Key
RoleResourceId	long	Resource identifier (foreign key to HZ_PARTIES) or (foreign key to JTF_RS_GROUPS_MEMBERS or (foreign key to JTF_RS_TEAM_MEMBERS)
RoleResourceType	string	Resource type. (lookup type: JTF_RS_ ROLE_RES_TYPE)
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date this role-resource becomes active

Trading Community Resource Team Member Role Assignment

A role to indicates a team member performs within a team. For example, Sales Manager, Call Center Agent, Project Lead.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceTeamMemberRoleAssign

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Resource Team Member*
Handled by	*Trading Community Resource*
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DeleteFlag	boolean	Delete Flag indicates whether this record is logically deleted or not?
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date this role-resource becomes inactive
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether

Name	Type	Description
		another session has updated the row since it was queried.
RoleId	long	Role identifier (foreign key to JTF_RS_ROLES)
RoleRelateId	long	Role Relation identifier (PK) • Primary Key
RoleResourceId	long	Resource identifier (foreign key to HZ_PARTIES) or (foreign key to JTF_RS_GROUPS_MEMBERS or (foreign key to JTF_RS_TEAM_MEMBERS)
RoleResourceType	string	Resource type. (lookup type: JTF_RS_ ROLE_ RES_TYPE)
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date this role-resource becomes active

Trading Community Resource

A trading community member that can be assigned a work object. For example, employee John Smith or partner contact Jack Brown.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/applicationModule/}ResourceService

Service WSDL URL: https://servername/crmService/FoundationResourcesResourceService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Resource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Resource Team Member Role Assignment*
Handles	*Resource*

Relationship Type	Object or Service
Handles	*Trading Community Resource Organization Member Role Assignment*
Handles	*Resource Team Member*
Handles	*Resource Role Assignment*
Handles	*Resource Organization Member*
Handles	*Primary Resource Organization by Usage*

Operations

- *processResourceRoleProvisioning*
- *terminateResource*
- *getResource*
- *createResource*
- *updateResource*
- *deleteResource*
- *mergeResource*
- *findResource*
- *processResource*
- *processCSResource*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

processResourceRoleProvisioning

Process of the resource role provisioning of the trading community resource.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourcePartyId	long	Processes the resource role provisioning for trading community resource filtered by the resource identifier.

Response Payload

Element Name	Type	Description
result	void	void

terminateResource

An operation to terminate or remove from usage a trading community resource.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
partyId	long	An operation to terminate the Trading Community Resource filtered by the resource identifier.

Response Payload

Element Name	Type	Description
result	void	void

getResource

The Get operation for the trading community resource profile.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceProfileId	long	The unique identifier of the resource profile.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceResult	The trading community resource profile that matches the inbound key attributes.

Element Name	Type	Description

createResource

The Create operation for the trading community resource profile.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resource	*Resource*	The trading community resource profile to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceResult	The result of the operation that includes the successfully created trading community resource profile and a list of warning or information messages.

updateResource

The Update operation for the trading community resource profile.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resource	*Resource*	The trading community resource profile to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceResult	The result of the operation that includes the successfully updated trading community resource profile and a list of warning or information messages.

deleteResource

The Delete operation for the trading community resource profile.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resource	*Resource*	The trading community resource profile to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergeResource

The Merge operation for the trading community resource profile. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resource	*Resource*	The trading community resource profile to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceResult	The result of the operation that includes the successfully merged trading community resource profile and a list of warning or information messages.

findResource

The Find operation for the trading community resource profile.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Resource*	The result of the operation that includes a list of trading community resource profile that satisfy the inbound criteria and any warning or information messages.

processResource

The Bulk load operation for the trading community resource profile.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what actions were performed, such as Create, Update, Merge, or Delete.
resource	*Resource*	A list of the trading community resource profiles to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Resource*	The result of the operation that includes a list of trading community resource profile that are successfully processed and any warning or information messages.

processCSResource

An operation to apply the changes back to the data source for the trading community resource profile.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object used to represent the changes that were made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created/updated data objects, and all warning and informational messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value

Element Name	Type	Description
		of the name element from the getEntityList operation response payload.
localeName	string	The locale used when evaluating the locale-based user interface hints. The localeName is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and The Delete operations can be performed on the object.

Element Name	Type	Description

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
createResource	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be associated to leads, opportunities, and territories and given sales credits or compensated for that work.
updateResource	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be associated to leads, opportunities, and territories and given sales credits or compensated for that work.
deleteResource	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be associated to leads, opportunities, and territories and given sales credits or compensated for that work.
processCSResource	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be associated to leads, opportunities, and territories and given sales credits or compensated for that work.
processResource	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be associated to leads, opportunities, and territories and given sales credits or compensated for that work.
findResource	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be

Operation Name	Privilege Code	Privilege Name	Privilege Description
			associated to leads, opportunities, and territories and given sales credits or compensated for that work.
findResource	HZ_VIEW_TRADING_ COMMUNITY_RESOURCE_ DETAILS_PRIV	View Trading Community Resource Details	Allows viewing of resource basic information, such as name, primary phone, primary address, and primary e-mail.
mergeResource	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be associated to leads, opportunities, and territories and given sales credits or compensated for that work.
getResource	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be associated to leads, opportunities, and territories and given sales credits or compensated for that work.
getResource	HZ_VIEW_TRADING_ COMMUNITY_RESOURCE_ DETAILS_PRIV	View Trading Community Resource Details	Allows viewing of resource basic information, such as name, primary phone, primary address, and primary e-mail.
terminateResource	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	Manage Trading Community Resource	Allows the specification of resources for any employees or partner members who are to be associated to leads, opportunities, and territories and given sales credits or compensated for that work.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_PRIV	ORA_ATC_OFFER_MANAGEMENT_ DUTY	Offer Management	Creates and manages catalogs, categories, product offers including attributes, components, rules, terms, pricing, catalog assignments and lifecycle statuses

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_VIEW_TRADING_COMMUNITY_RESOURCE_DETAILS_PRIV	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
HZ_VIEW_TRADING_COMMUNITY_RESOURCE_DETAILS_PRIV	ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
HZ_VIEW_TRADING_COMMUNITY_RESOURCE_DETAILS_PRIV	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
HZ_VIEW_TRADING_COMMUNITY_RESOURCE_DETAILS_PRIV	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
HZ_VIEW_TRADING_COMMUNITY_RESOURCE_DETAILS_PRIV	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_HZ_RESOURCE_ABSTRACT	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_OKC_ALL_BUSINESS_UNITS_CONTRACT_INQUIRY_DUTY_CRM	Contract View Access Across All Contracts	Views all contracts across an enterprise.
ORA_HZRESOURCE_ADMINISTRATOR_DUTY	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_ZCM_SALES_PARTY_REVIEW_DUTY	Sales Party Review	Allows resources read-only access to sales parties information such as manage customer work area and all sales party duties. Additional duties include view access to other customer and sales lead features.
ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCM_MKTG_SALES_PARTY_MANAGEMENT_DUTY	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Primary Resource Organization by Usage

The primary organization by usage for a resource. For example, ABC 20 is the primary sales organization and ABC 30 is the primary marketing organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourcePrimaryOrganization

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Resource*
Handled by	*Trading Community Resource*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ClassificationCode	string	Obsolete
ClassificationId	long	Obsolete
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
PartyId	long	The unique identifier of the contact party.
PrimaryOrgId	long	Obsolete
ResourcePrimaryOrgRecId	long	Obsolete • Primary Key

Resource

The front office person. For example, sales persons or partner members can be tagged as resources.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}Resource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Resource Team Member*
Contains	*Resource Role Assignment*

Relationship Type	Object or Service
Contains	*Resource Organization Member*
Contains	*Primary Resource Organization by Usage*
Handled by	*Trading Community Resource*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AttachmentEntityName	string	Not Used.
Company	string	The name of the company that this resource belongs to.
CorpCurrencyCode	string	The corporate currency code associated with the record. This attribute is used by CRM Extensibility framework.
CreatedBy	string	The user who created the record.
CreatedByModule	string	The module that created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
CurcyConvRateType	string	The currency conversion rate associated with the record. This attribute is used by CRM Extensibility framework.
CurrencyCode	string	The currency code. This attribute is used by CRM Extensibility framework.
DeptMeaning	string	The department for this resource if it is employee.
EmailAddress	string	The email address associated with the record.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
FormattedAddress	string	The primary formatted address for the resource.

Name	Type	Description
FormattedPhoneNumber	string	The formatted phone number.
IdenAddrPartySiteId	long	The unique identifier of the party site of the identifying address.
ImageURL	string	Not Used.
InternalFlag	boolean	The denormalized value of the INTERNAL_FLAG in HZ_PERSON_PROFILES/HZ_ORGANIZATION_PROFILES.
JobMeaning	string	The job for this resource if it is employee.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
Manager	string	The name of the manager for this resource.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
Organizations	string	The name of organizations that this resource is a member of.
PartyId	long	The unique identifier of the contact party.
PartyName	string	The name of the party.
PartyNumber	string	The unique identification number for the party.
PersonFirstName	string	The first name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Given Name in HL7.
PersonLastName	string	The last name of a person. It is used in the same way the homonymous field in HZ_

Name	Type	Description
		PERSON_PROFILES is used. It corresponds to the field Family Name in HL7.
PersonLastNamePrefix	string	The resource person's last name prefix.
PersonMiddleName	string	The middle name of a person. It is used in the same way the homonymous field in HZ_PERSON_PROFILES is used. It corresponds to the field Middle Initial or Name in HL7.
PersonNameSuffix	string	The person's name suffix.
PersonPreNameAdjunct	string	Person Preferred Name adjacency.
PersonPreviousLastName	string	The person's previous last name.
PersonSecondLastName	string	The second last name for a person. In some cultures it is not uncommon to have double last names. It is used in the same way the field PERSON_SECOND_LAST_NAME in HZ_PERSON_PROFILES is used.
PrimaryOrganization	string	The primary organizations for this resource.
RequestId	long	A system-generated read-only attribute used by the application framework.
ResourceOrgRoleCode	string	Code value for the role assigned to a resource.
ResourceOrgRoleName	string	The role that defines the function of the resource in an organization or hierarchy.
ResourceOrganizationMember	*Resource Organization Member*	The organization associated with a resource.
ResourcePrimaryOrganization	*Primary Resource Organization by Usage*	The primary organization associated with a resource.
ResourceProfileId	long	The unique identifier for the resource profile. Primary Key. • Primary Key
ResourceRoleAssign	*Resource Role Assignment*	The role assigned to a resource.
ResourceTeamMember	*Resource Team Member*	The team associated with a resource.
ResourceType	string	The type of resource. For example, employee.

Name	Type	Description
Roles	string	The resource roles assigned to this resource.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
Teams	string	The name of teams that this resource is a member of.
TimezoneCode	string	Foreign key to FND_TIMEZONES_B.TIMEZONE_CODE.
Url	string	The primary URL for the resource.
Usage	string	The read-only party usage for the resource party.
UserAccountActiveFlag	boolean	Indicates if the resource has active user account or not.
Username	string	The name of the user account associated with this resource.

Resource Organization Member

The resource that is a member of an organization. For example, Joe Smith is a sales representative in the sales organization of ABC Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceOrganizationMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Resource Organization Member Role Assignment*
Contained by	*Resource*
Handled by	*Trading Community Resource*

Relationship Type	Object or Service
Handled by	*Trading Community Resource Organization*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
GroupId	long	The resource group identifier foreign key to JTF_RS_GROUPS.
GroupMemberId	long	The resource group member identifier. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ResourceId	long	The unique identifier of the resource.
ResourceOrgMemberRoleAssign	*Trading Community Resource Organization Member Role Assignment*	The role assigned to a resource in the context of an organization membership.

Resource Role Assignment

The resource role assigned to a resource. For example, Joe Smith is assigned a sales representative role.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceRoleAssign

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Resource*
Contained by	*Trading Community Resource Roles Setup*
Handled by	*Trading Community Resource Role*
Handled by	*Trading Community Resource*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.

Name	Type	Description
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
RoleId	long	The role identifier (foreign key to JTF_RS_ROLES).
RoleRelateId	long	The role relation identifier (PK). • Primary Key
RoleResourceId	long	The resource identifier (foreign key to HZ_PARTIES) or (foreign key to JTF_RS_GROUPS_MEMBERS or (foreign key to JTF_RS_TEAM_MEMBERS).
RoleResourceType	string	The resource type. (lookup type: JTF_RS_ROLE_RES_TYPE).
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.

Resource Team Member

The resource that forms part of a team.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceTeamMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Resource Team Member Role Assignment*
Contained by	*Resource*
Contained by	*Trading Community Resource Team*
Handled by	*Trading Community Resource*

Relationship Type	Object or Service
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ResourceTeamMemberRoleAssign	*Trading Community Resource Team Member Role Assignment*	The role assignment for a resource team member.
ResourceType	string	The type of the resource.
TeamId	long	The resource team identifier (foreign key to JTF_RS_TEAMS).
TeamMemberId	long	The resource team member identifier. • Primary Key
TeamResourceId	long	A team member can be a resource or a resource organization.

Trading Community Resource Organization Member Role Assignment

The role the resource plays within an organization. For example, sales manager or call center agent.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceOrgMemberRoleAssign

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Resource Organization Member*
Handled by	*Trading Community Resource*
Handled by	*Trading Community Resource Organization*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.

Name	Type	Description
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
RoleId	long	The role identifier (foreign key to JTF_RS_ROLES).
RoleRelateId	long	The role relation identifier (PK). • Primary Key
RoleResourceId	long	The resource identifier (foreign key to HZ_PARTIES) or (foreign key to JTF_RS_GROUPS_MEMBERS or (foreign key to JTF_RS_TEAM_MEMBERS).
RoleResourceType	string	The resource type. (lookup type: JTF_RS_ROLE_RES_TYPE).
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.

Trading Community Resource Team Member Role Assignment

The role to indicates a team member performs within a team. For example, Sales Manager, Call Center Agent, Project Lead.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceTeamMemberRoleAssign

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Resource Team Member*
Handled by	*Trading Community Resource*
Handled by	*Trading Community Resource Team*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
RoleId	long	The role identifier (foreign key to JTF_RS_ROLES).
RoleRelateId	long	The role relation identifier. This attribute is a primary key. • Primary Key
RoleResourceId	long	The resource identifier (foreign key to HZ_PARTIES) or (foreign key to JTF_RS_GROUPS_MEMBERS or (foreign key to JTF_RS_TEAM_MEMBERS).
RoleResourceType	string	The resource type. (lookup type: JTF_RS_ROLE_RES_TYPE).

Name	Type	Description
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.

Trading Community Resource Organization

An organizational unit whose membership is composed of resources. Resource organizations are usually hierarchically structured to form an organizational hierarchy and they are used to model sales organizations, service organizations, et cetera. This object is not available for Oracle Fusion upgrade nor is it available for use by Oracle Fusion application teams.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceOrganizationService

Service WSDL URL: https://servername/crmService/ResourceOrganizationServiceV2?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Resource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Resource Organization Member Role Assignment*
Handles	*Resource Organization Member*

Operations

- *getResourceOrganizationMember*
- *createResourceOrganizationMember*
- *updateResourceOrganizationMember*
- *deleteResourceOrganizationMember*
- *mergeResourceOrganizationMember*
- *findResourceOrganizationMember*
- *processResourceOrganizationMember*
- *processCSResourceOrganizationMember*

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getResourceOrganizationMember

Get operation for Trading Community Resource Organization Member

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
groupMemberId	long	Resource Group Member identifier

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceOrganizationMeml	Trading Community Resource Organization Member that matches the inbound key attributes.

createResourceOrganizationMember

Create operation for Trading Community Resource Organization Member

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceOrganizationMember	*Resource Organization Member*	Trading Community Resource Organization Member to be created

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceOrganizationMeml	Result of the operation includes the successfully created Trading Community Resource Organization Member and/or a list of warnings or informational messages.

updateResourceOrganizationMember

Update operation for Trading Community Resource Organization Member

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceOrganizationMember	*Resource Organization Member*	Trading Community Resource Organization Member to be updated

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceOrganizationMeml	Result of the operation includes the successfully updated Trading Community Resource Organization Member and/or a list of warnings or informational messages.

deleteResourceOrganizationMember

Delete operation for Trading Community Resource Organization Member

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceOrganizationMember	*Resource Organization Member*	Trading Community Resource Organization Member to be deleted

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warnings or informational messages encountered when deleting the object.

mergeResourceOrganizationMember

Merge operation for Trading Community Resource Organization Member. It will perform an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceOrganizationMember	*Resource Organization Member*	Trading Community Resource Organization Member to be merged

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceOrganizationMeml	Result of the operation includes the successfully merged Trading Community Resource Organization Member and/or a list of warnings or informational messages.

findResourceOrganizationMember

Find operation for Trading Community Resource Organization Member

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, etc.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Resource Organization Member*	Result of the operation including a list of Trading Community Resource Organization Member that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

processResourceOrganizationMember

Bulk load operation for Trading Community Resource Organization Member

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action shall be performed, such as Create, Update, Merge, or Delete
resourceOrganizationMember	*Resource Organization Member*	A list of Trading Community Resource Organization Member to be processed
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Resource Organization Member*	Result of the operation including a list of Trading Community Resource Organization Member that are successfully processed and any warnings or informational messages encountered during the invocation.

processCSResourceOrganizationMember

An operation to apply the changes back to the data source for Trading Community Resource Organization Member

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	Result of the operation including a list of created/updated data objects, and all warning and informational messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

Element Name	Type	Description

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
deleteResourceOrganizationMembe	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ORGANIZATION_MEMBERSHIPS_PRIV	Manage Trading Community Resource Organization Memberships	Allows the specification of resource organization members. If assigning, also assign the ability to view the trading community resource organization memberships.
getResourceOrganizationMember	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ORGANIZATION_MEMBERSHIPS_PRIV	Manage Trading Community Resource Organization Memberships	Allows the specification of resource organization members. If assigning, also assign the ability to view the trading community resource organization memberships.
processResourceOrganizationMemb	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ORGANIZATION_MEMBERSHIPS_PRIV	Manage Trading Community Resource Organization Memberships	Allows the specification of resource organization members. If assigning, also assign the ability to view the trading community resource organization memberships.

Operation Name	Privilege Code	Privilege Name	Privilege Description
findResourceOrganizationMember	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ ORGANIZATION_MEMBERSHIPS_ PRIV	Manage Trading Community Resource Organization Memberships	Allows the specification of resource organization members. If assigning, also assign the ability to view the trading community resource organization memberships.
processCSResourceOrganizationMe	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ ORGANIZATION_MEMBERSHIPS_ PRIV	Manage Trading Community Resource Organization Memberships	Allows the specification of resource organization members. If assigning, also assign the ability to view the trading community resource organization memberships.
mergeResourceOrganizationMembe	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ ORGANIZATION_MEMBERSHIPS_ PRIV	Manage Trading Community Resource Organization Memberships	Allows the specification of resource organization members. If assigning, also assign the ability to view the trading community resource organization memberships.
updateResourceOrganizationMemb	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ ORGANIZATION_MEMBERSHIPS_ PRIV	Manage Trading Community Resource Organization Memberships	Allows the specification of resource organization members. If assigning, also assign the ability to view the trading community resource organization memberships.
createResourceOrganizationMembe	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ ORGANIZATION_MEMBERSHIPS_ PRIV	Manage Trading Community Resource Organization Memberships	Allows the specification of resource organization members. If assigning, also assign the ability to view the trading community resource organization memberships.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ ORGANIZATION_MEMBERSHIPS_ PRIV	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	ORA_PER_MANAGE_USER_AND_ ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description

Resource Organization Member

A resource that is a member of an organization. For example, Joe Smith is a sales representative in the sales organization of ABC Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceOrganizationMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Resource Organization Member Role Assignment*
Contained by	*Resource*
Handled by	*Trading Community Resource*
Handled by	*Trading Community Resource Organization*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DeleteFlag	boolean	Delete Flag. Indicates whether this member is logically deleted or not.
GroupId	long	Resource Group identifier foreign key to JTF_RS_GROUPS.
GroupMemberId	long	Resource Group Member identifier

Name	Type	Description
		• Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
ResourceId	long	Resource identifier. Foreign key to HZ_PARTIES.
ResourceOrgMemberRoleAssign	*Trading Community Resource Organization Member Role Assignment*	Role assigned to a resource in the context of an organization membership.

Trading Community Resource Organization Member Role Assignment

A role the resource plays within an organization. For example, sales manager or call center agent.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceOrgMemberRoleAssign

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Resource Organization Member*
Handled by	*Trading Community Resource*
Handled by	*Trading Community Resource Organization*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DeleteFlag	boolean	Delete Flag indicates whether this record is logically deleted or not?
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date this role-resource becomes inactive
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
RoleId	long	Role identifier (foreign key to JTF_RS_ROLES)
RoleRelateId	long	Role Relation identifier (PK) • Primary Key
RoleResourceId	long	Resource identifier (foreign key to HZ_PARTIES) or (foreign key to JTF_RS_GROUPS_MEMBERS or (foreign key to JTF_RS_TEAM_MEMBERS)
RoleResourceType	string	Resource type. (lookup type: JTF_RS_ ROLE_ RES_TYPE)

Name	Type	Description
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date this role-resource becomes active

Trading Community Resource Organization

An organizational unit whose membership is composed of resources. Resource organizations are usually hierarchically structured to form an organizational hierarchy and they are used to model sales organizations, service organizations, et cetera. This object is not available for Oracle Fusion upgrade nor is it available for use by Oracle Fusion application teams.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceOrganizationService

Service WSDL URL: https://servername/crmService/ResourceOrganizationService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Resource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Resource Organization Member Role Assignment*
Handles	*Resource Organization Member*

Operations

- *getResourceOrganizationMemberVO*
- *createResourceOrganizationMemberVO*
- *updateResourceOrganizationMemberVO*
- *deleteResourceOrganizationMemberVO*
- *mergeResourceOrganizationMemberVO*
- *findResourceOrganizationMemberVO*
- *processResourceOrganizationMemberVO*

- *processCSResourceOrganizationMemberVO*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getResourceOrganizationMemberVO

The Get operation for the trading community resource organization member.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
groupMemberId	long	The unique identifier of the resource group member.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceOrganizationMember	The trading community resource organization member that matches the inbound key attributes.

createResourceOrganizationMemberVO

The Create operation for the trading community resource organization member.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceOrganizationMemberVO	*Resource Organization Member*	The trading community resource organization member to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceOrganizationMember	The result of the operation that includes the successfully created trading community resource organization member and a list of warning or information messages.

Element Name	Type	Description

updateResourceOrganizationMemberVO

The Update operation for the trading community resource organization member.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceOrganizationMemberVO	*Resource Organization Member*	The trading community resource organization member to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceOrganizationMember	The result of the operation that includes the successfully updated trading community resource organization member and a list of warning or information messages.

deleteResourceOrganizationMemberVO

The Delete operation for the trading community resource organization member.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceOrganizationMemberVO	*Resource Organization Member*	The trading community resource organization member to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergeResourceOrganizationMemberVO

The Merge operation for the trading community resource organization member. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceOrganizationMemberVO	*Resource Organization Member*	The trading community resource organization member to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceOrganizationMember	The result of the operation that includes the successfully merged trading community resource organization member and a list of warning or information messages.

findResourceOrganizationMemberVO

The Find operation for the trading community resource organization member.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Resource Organization Member*	The result of the operation that includes a list of trading community resource organization member that satisfy the inbound criteria and any warning or information messages.

processResourceOrganizationMemberVO

The Bulk load operation for the trading community resource organization member.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what actions were performed, such as Create, Update, Merge, or Delete.
resourceOrganizationMemberVO	*Resource Organization Member*	A list of the trading community resource organization numbers to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Resource Organization Member*	The result of the operation that includes a list of trading community resource organization member that are successfully processed and any warning or information messages.

processCSResourceOrganizationMemberVO

An operation to apply the changes back to the data source for the trading community resource organization member.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object used to represent the changes that were made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created/updated data objects, and all warning and information messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used when evaluating the locale-based user interface hints. The localeName is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and The Delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
mergeResourceOrganizationMembe	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ORGANIZATION_MEMBERSHIPS_PRIV	Manage Trading Community Resource Organization Memberships	Allows the specification of resource organization members. If assigning, also assign the ability to view the trading community resource organization memberships.
deleteResourceOrganizationMembe	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ORGANIZATION_MEMBERSHIPS_PRIV	Manage Trading Community Resource Organization Memberships	Allows the specification of resource organization members. If assigning, also assign the ability to view the trading community resource organization memberships.
getResourceOrganizationMemberV(	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ORGANIZATION_MEMBERSHIPS_PRIV	Manage Trading Community Resource Organization Memberships	Allows the specification of resource organization members. If assigning, also assign the ability to view the trading

Operation Name	Privilege Code	Privilege Name	Privilege Description
			community resource organization memberships.
createResourceOrganizationMembe	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ ORGANIZATION_MEMBERSHIPS_ PRIV	Manage Trading Community Resource Organization Memberships	Allows the specification of resource organization members. If assigning, also assign the ability to view the trading community resource organization memberships.
processResourceOrganizationMemb	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ ORGANIZATION_MEMBERSHIPS_ PRIV	Manage Trading Community Resource Organization Memberships	Allows the specification of resource organization members. If assigning, also assign the ability to view the trading community resource organization memberships.
findResourceOrganizationMemberV	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ ORGANIZATION_MEMBERSHIPS_ PRIV	Manage Trading Community Resource Organization Memberships	Allows the specification of resource organization members. If assigning, also assign the ability to view the trading community resource organization memberships.
processCSResourceOrganizationMe	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ ORGANIZATION_MEMBERSHIPS_ PRIV	Manage Trading Community Resource Organization Memberships	Allows the specification of resource organization members. If assigning, also assign the ability to view the trading community resource organization memberships.
updateResourceOrganizationMemb	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ ORGANIZATION_MEMBERSHIPS_ PRIV	Manage Trading Community Resource Organization Memberships	Allows the specification of resource organization members. If assigning, also assign the ability to view the trading community resource organization memberships.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ ORGANIZATION_MEMBERSHIPS_ PRIV	ORA_HZRESOURCE_ ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_HZRESOURCE_ADMINISTRATOR_DUTY	ORA_PER_MANAGE_USER_AND_ROLES_DUTY_CRM	Manage Users	Creates and updates users and assigns roles to users.

Resource Organization Member

The resource that is a member of an organization. For example, Joe Smith is a sales representative in the sales organization of ABC Corporation.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceOrganizationMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Resource Organization Member Role Assignment*
Contained by	*Resource*
Handled by	*Trading Community Resource*
Handled by	*Trading Community Resource Organization*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
GroupId	long	The resource group identifier foreign key to JTF_RS_GROUPS.
GroupMemberId	long	The resource group member identifier.

Name	Type	Description
		• Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ResourceId	long	The unique identifier of the resource.
ResourceOrgMemberRoleAssign	*Trading Community Resource Organization Member Role Assignment*	The role assigned to a resource in the context of an organization membership.

Trading Community Resource Organization Member Role Assignment

The role the resource plays within an organization. For example, sales manager or call center agent.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceOrgMemberRoleAssign

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Resource Organization Member*
Handled by	*Trading Community Resource*
Handled by	*Trading Community Resource Organization*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
RoleId	long	The role identifier (foreign key to JTF_RS_ROLES).
RoleRelateId	long	The role relation identifier (PK). • Primary Key
RoleResourceId	long	The resource identifier (foreign key to HZ_PARTIES) or (foreign key to JTF_RS_GROUPS_MEMBERS or (foreign key to JTF_RS_TEAM_MEMBERS).
RoleResourceType	string	The resource type. (lookup type: JTF_RS_ROLE_RES_TYPE).
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.

Trading Community Resource Role

A trading community member that can be assigned a work object. For example, employee John Smith or partner contact Jack Brown.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/applicationModule/}ResourceRoleService

Service WSDL URL: https://servername/crmService/ResourceRoleServiceV2?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Resource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Resource Role Assignment*
Handles	*Trading Community Resource Roles Setup Additional Information*
Handles	*Trading Community Resource Job Role*
Handles	*Trading Community Resource Roles Setup SDO*
Handles	*Trading Community Resource Role Translation*

Operations

- *getResourceRole*
- *createResourceRole*
- *updateResourceRole*
- *deleteResourceRole*
- *mergeResourceRole*
- *findResourceRole*
- *processResourceRole*
- *processCSResourceRole*

- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getResourceRole

Get operation for Trading Community Resource Roles Setup SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
roleId	long	Get operation for Trading Community Resource Roles Setup filtered by the role identifier provided.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceRoleResult	Trading Community Resource Roles Setup SDO that matches the inbound key attributes.

createResourceRole

Create operation for Trading Community Resource Roles Setup SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceRole	*Trading Community Resource Roles Setup SDO*	Trading Community Resource Roles Setup SDO to be created

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceRoleResult	Result of the operation includes the successfully created Trading Community Resource Roles Setup SDO and/or a list of warnings or informational messages.

updateResourceRole

Update operation for Trading Community Resource Roles Setup SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceRole	*Trading Community Resource Roles Setup SDO*	Trading Community Resource Roles Setup SDO to be updated

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceRoleResult	Result of the operation includes the successfully updated Trading Community Resource Roles Setup SDO and/or a list of warnings or informational messages.

deleteResourceRole

Delete operation for Trading Community Resource Roles Setup SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceRole	*Trading Community Resource Roles Setup SDO*	Trading Community Resource Roles Setup SDO to be deleted

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warnings or informational messages encountered when deleting the object.

mergeResourceRole

Merge operation for Trading Community Resource Roles Setup SDO. It will perform an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceRole	*Trading Community Resource Roles Setup SDO*	Trading Community Resource Roles Setup SDO to be merged

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceRoleResult	Result of the operation includes the successfully merged Trading Community Resource Roles Setup SDO and/or a list of warnings or informational messages.

findResourceRole

Find operation for Trading Community Resource Roles Setup SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, etc.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Trading Community Resource Roles Setup SDO*	Result of the operation including a list of Trading Community Resource Roles Setup SDO that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

processResourceRole

Bulk load operation for Trading Community Resource Roles Setup SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action shall be performed, such as Create, Update, Merge, or Delete
resourceRole	*Trading Community Resource Roles Setup SDO*	A list of Trading Community Resource Roles Setup SDO to be processed
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Trading Community Resource Roles Setup SDO*	Result of the operation including a list of Trading Community Resource Roles Setup SDO that are successfully processed and any warnings or informational messages encountered during the invocation.

processCSResourceRole

An operation to apply the changes back to the data source for Trading Community Resource Roles Setup SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	Result of the operation including a list of created/updated data objects, and all warning and informational messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

Element Name	Type	Description

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getResourceRole	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ROLE_PRIV	Manage Trading Community Resource Role	Allows the specification of resource roles which indicate the resource function and which usually correspond to a set of jobs. Roles are used to facilitate assignment of appropriate resources, and to derive reporting relationship within an organization.
processCSResourceRole	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ROLE_PRIV	Manage Trading Community Resource Role	Allows the specification of resource roles which indicate the resource function and which usually correspond to a set of jobs. Roles are used to facilitate assignment of appropriate resources, and to derive reporting relationship within an organization.
createResourceRole	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ROLE_PRIV	Manage Trading Community Resource Role	Allows the specification of resource roles which indicate the resource function and which usually correspond to a set of jobs. Roles

Operation Name	Privilege Code	Privilege Name	Privilege Description
			are used to facilitate assignment of appropriate resources, and to derive reporting relationship within an organization.
processResourceRole	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ROLE_ PRIV	Manage Trading Community Resource Role	Allows the specification of resource roles which indicate the resource function and which usually correspond to a set of jobs. Roles are used to facilitate assignment of appropriate resources, and to derive reporting relationship within an organization.
findResourceRole	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ROLE_ PRIV	Manage Trading Community Resource Role	Allows the specification of resource roles which indicate the resource function and which usually correspond to a set of jobs. Roles are used to facilitate assignment of appropriate resources, and to derive reporting relationship within an organization.
updateResourceRole	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ROLE_ PRIV	Manage Trading Community Resource Role	Allows the specification of resource roles which indicate the resource function and which usually correspond to a set of jobs. Roles are used to facilitate assignment of appropriate resources, and to derive reporting relationship within an organization.
deleteResourceRole	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ROLE_ PRIV	Manage Trading Community Resource Role	Allows the specification of resource roles which indicate the resource function and which usually correspond to a set of jobs. Roles are used to facilitate assignment of appropriate resources, and to derive reporting relationship within an organization.
mergeResourceRole	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ROLE_ PRIV	Manage Trading Community Resource Role	Allows the specification of resource roles which indicate the resource function and which usually correspond to a set of jobs. Roles are used to facilitate assignment of appropriate resources, and to derive reporting relationship within an organization.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ROLE_PRIV	ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.
HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ROLE_PRIV	ORA_AR_RECEIVABLES_ADMINISTRATION_DUTY_CRM	Receivables Administration	Manages Receivables setup activities.
HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ROLE_PRIV	ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ROLE_PRIV	ORA_ZBS_SALES_ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ROLE_PRIV	ORA_IEX_COLLECTIONS_MANAGER_DUTY_CRM	Collections Management Advanced	Allows user to perform activities in Collections.
HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ROLE_PRIV	ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_AR_RECEIVABLES_ADMINISTRATION_DUTY_CRM	ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	Customer Maintenance	Defines and maintains Receivables attributes of customer accounts and customer account sites.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_EXECUTION_MANAGEMENT_DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ CHANNEL_ADMINISTRATION_ DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_MOO_OPPORTUNITY_ CHANNEL_ADMINISTRATION_ DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_ACCOUNT_REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_AR_RECEIVABLES_ADMINISTRATION_DUTY_CRM	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_AR_RECEIVABLES_ADMINISTRATION_DUTY_CRM	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZCM_SALES_PARTY_ MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_SVC_SERVICE_ AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_AR_RECEIVABLES_ADMINISTRATION_DUTY_CRM	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Resource Role Assignment

A resource role assigned to a resource. For example, Joe Smith is assigned a sales representative role.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceRoleAssign

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Resource*
Contained by	*Trading Community Resource Roles Setup SDO*
Handled by	*Trading Community Resource*
Handled by	*Trading Community Resource Role*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DeleteFlag	boolean	Delete Flag indicates whether this record is logically deleted or not?
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date this role-resource becomes inactive
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
RoleId	long	Role identifier (foreign key to JTF_RS_ROLES)
RoleRelateId	long	Role Relation identifier (PK) • Primary Key
RoleResourceId	long	Resource identifier (foreign key to HZ_PARTIES) or (foreign key to JTF_RS_GROUPS_MEMBERS or (foreign key to JTF_RS_TEAM_MEMBERS)
RoleResourceType	string	Resource type. (lookup type: JTF_RS_ ROLE_ RES_TYPE)
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date this role-resource becomes active

Trading Community Resource Job Role

A relationship between the roles and the job information of the resource.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceJobRole

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Resource Roles Setup SDO*
Handled by	*Trading Community Resource Role*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
JobId	long	Job Identifier from PER_JOBS
JobRoleId	long	Job Role Identifier. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.

Name	Type	Description
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
RoleId	long	Role Identifier from JTF_RS_ROLES_B

Trading Community Resource Role Translation

The resource role information in a local language.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceRoleTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Resource Roles Setup SDO*
Handled by	*Trading Community Resource Role*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
Language	string	Indicates the code of the language into which the contents of the translatable columns are translated. • Primary Key

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
RoleDescription	string	Resource Role Description
RoleId	long	Unique role identifier • Primary Key
RoleName	string	Resource Role name
SourceLang	string	Indicates the code of the language in which the contents of the translatable columns were originally created.

Trading Community Resource Roles Setup Additional Information

The role or function performed by a resource. For example sales representative or marketing administrator.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/flex/role/}RoleInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Resource Roles Setup SDO*
Contained by	*Trading Community Resource Roles Setup*

Relationship Type	Object or Service
Handled by	*Trading Community Resource Role*
Handled by	*Trading Community Resource Role*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
RoleId	long	The unique role identifier. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Resource Roles Setup SDO

A configuration of roles that can be used to indicate the function of a resource. For example sales representative or marketing administrator.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceRole

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Resource Role Assignment*
Contains	*Trading Community Resource Roles Setup Additional Information*
Contains	*Trading Community Resource Job Role*
Contains	*Trading Community Resource Role Translation*
Handled by	*Trading Community Resource Role*

Relationship Type	Object or Service

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	Flag to indicate if role is active.
AdministratorFlag	boolean	Flag indicating if this role is an administrator role or not.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
LeadFlag	boolean	Flag indicating if this role is a leader role or not.
ManagerFlag	boolean	Flag indicating if this role is a manager role or not.
MemberFlag	boolean	Flag indicating if this role is a member role or not.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
ResourceJobRole	*Trading Community Resource Job Role*	Job role associated with the role.
ResourceRoleAssign	*Resource Role Assignment*	Resource role assignment.

Name	Type	Description
ResourceRoleInformation	*Trading Community Resource Roles Setup Additional Information*	Resource role information.
ResourceRoleTranslation	*Trading Community Resource Role Translation*	Language specific resource role.
RoleCode	string	Unqiue code for a resource role.
RoleDescription	string	Description for role.
RoleId	long	Unique identifier for the role. • Primary Key
RoleName	string	Resource role name.
RoleTypeCode	string	Role type identifier.
SeededFlag	boolean	Flag indicating pre-defined role types.

Trading Community Resource Role

A trading community member that can be assigned a work object. For example, employee John Smith or partner contact Jack Brown.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/applicationModule/}ResourceRoleService

Service WSDL URL: https://servername/crmService/ResourceRoleService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Resource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Resource Roles Setup Additional Information*
Handles	*Trading Community Resource Role Translation*
Handles	*Trading Community Resource Job Role*
Handles	*Resource Role Assignment*
Handles	*Trading Community Resource Roles Setup SDO*

Operations

- *getResourceRole*
- *createResourceRole*
- *updateResourceRole*
- *deleteResourceRole*
- *mergeResourceRole*
- *findResourceRole*
- *processResourceRole*
- *processCSResourceRole*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getResourceRole

The Get operation for the trading community resource roles setup SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
roleId	long	The Get operation of the trading community resource roles setup filtered by the role identifier.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceRoleResult	The trading community resource roles setup SDO that matches the inbound key attributes.

createResourceRole

The Create operation for the trading community resource roles setup SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceRole	*Trading Community Resource Roles Setup*	The trading community resource roles setup SDO to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceRoleResult	The result of the operation that includes the successfully created trading community resource roles setup SDO and a list of warning or information messages.

updateResourceRole

The Update operation for the trading community resource roles setup SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceRole	*Trading Community Resource Roles Setup*	The trading community resource roles setup SDO to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceRoleResult	The result of the operation that includes the successfully updated trading community resource roles setup SDO and a list of warning or information messages.

deleteResourceRole

The Delete operation for the trading community resource roles setup SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceRole	*Trading Community Resource Roles Setup*	The trading community resource roles setup SDO to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergeResourceRole

The Merge operation for the trading community resource roles setup SDO. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceRole	*Trading Community Resource Roles Setup*	The trading community resource roles setup SDO to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceRoleResult	The result of the operation that includes the successfully merged trading community resource roles setup SDO and a list of warning or information messages.

findResourceRole

The Find operation for the trading community resource roles setup SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Trading Community Resource Roles Setup*	The result of the operation that includes a list of trading community resource roles setup SDO that satisfy the inbound criteria and any warning or information messages.

processResourceRole

The Bulk load operation for the trading community resource roles setup SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what actions were performed, such as Create, Update, Merge, or Delete.
resourceRole	*Trading Community Resource Roles Setup*	A list of the trading community resource roles setup SDOs to be processed.

Element Name	Type	Description
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Trading Community Resource Roles Setup*	The result of the operation that includes a list of trading community resource roles setup SDO that are successfully processed and any warning or information messages.

processCSResourceRole

An operation to apply the changes back to the data source for the trading community resource roles setup SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object used to represent the changes that were made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created and updated data objects, and all warning and informational messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used when evaluating the locale-based user interface hints. The localeName is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and The Delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
getResourceRole	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ROLE_PRIV	Manage Trading Community Resource Role	Allows the specification of resource roles which indicate the resource function and which usually correspond to a set of jobs. Roles are used to facilitate assignment of appropriate resources, and to derive reporting relationship within an organization.
processCSResourceRole	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ROLE_PRIV	Manage Trading Community Resource Role	Allows the specification of resource roles which indicate the resource function and which usually correspond to a set of jobs. Roles are used to facilitate assignment of appropriate resources, and to derive reporting relationship within an organization.
createResourceRole	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ROLE_PRIV	Manage Trading Community Resource Role	Allows the specification of resource roles which indicate the resource function and which usually correspond to a set of jobs. Roles are used to facilitate assignment of appropriate resources, and to derive reporting relationship within an organization.
processResourceRole	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_ROLE_PRIV	Manage Trading Community Resource Role	Allows the specification of resource roles which indicate the resource function and which usually correspond to a set of jobs. Roles are used to facilitate assignment of appropriate resources, and to

Operation Name	Privilege Code	Privilege Name	Privilege Description
			derive reporting relationship within an organization.
findResourceRole	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ROLE_ PRIV	Manage Trading Community Resource Role	Allows the specification of resource roles which indicate the resource function and which usually correspond to a set of jobs. Roles are used to facilitate assignment of appropriate resources, and to derive reporting relationship within an organization.
updateResourceRole	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ROLE_ PRIV	Manage Trading Community Resource Role	Allows the specification of resource roles which indicate the resource function and which usually correspond to a set of jobs. Roles are used to facilitate assignment of appropriate resources, and to derive reporting relationship within an organization.
deleteResourceRole	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ROLE_ PRIV	Manage Trading Community Resource Role	Allows the specification of resource roles which indicate the resource function and which usually correspond to a set of jobs. Roles are used to facilitate assignment of appropriate resources, and to derive reporting relationship within an organization.
mergeResourceRole	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ROLE_ PRIV	Manage Trading Community Resource Role	Allows the specification of resource roles which indicate the resource function and which usually correspond to a set of jobs. Roles are used to facilitate assignment of appropriate resources, and to derive reporting relationship within an organization.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ROLE_ PRIV	ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	Customer Relationship Management Application Administrator	Individual responsible for customer relationship management application administration. Collaborates with customer relationship management application users to maintain consistent financial application setup, rules, and access.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ROLE_ PRIV	ORA_AR_RECEIVABLES_ ADMINISTRATION_DUTY_CRM	Receivables Administration	Manages Receivables setup activities.
HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ROLE_ PRIV	ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	Master Data Management Application Administrator	Administers the installation and maintenance of customer data management application and foundation model.
HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ROLE_ PRIV	ORA_ZBS_SALES_ ADMINISTRATOR_JOB	Sales Administrator	Manages sales department and personnel. Performs ongoing administrative tasks, corrects erroneous data, and configures the application according to business needs.
HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ROLE_ PRIV	ORA_IEX_COLLECTIONS_ MANAGER_DUTY_CRM	Collections Management Advanced	Allows user to perform activities in Collections.
HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_ROLE_ PRIV	ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	Marketing Operations Manager	Manages the operations for marketing and leads. Develops tactical campaigns to carry out marketing strategies and communicate offers to customer segments using multiple marketing channels. Monitors campaign interactions, captures campaign responses, and manages sales leads to fill the sales pipeline. Creates and maintains the setup for marketing campaigns, responses, segments, lists, and treatments.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCH_MASTER_DATA_ MANAGEMENT_APPLICATION_ ADMINISTRATOR_JOB	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_	ORA_ZCA_ACCESS_GROUPS_ ENABLEMENT_DUTY	Access Groups Enablement	Enables the Access Groups functionality.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_CHANNEL_DEAL_REG_MANAGEMENT_DUTY	Channel Deal Registration Management	Reviews, accepts, and rejects deal registrations. Includes the ability to view deal registration details and update certain attributes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_CHANNEL_MANAGER_DASHBOARD_DUTY	Channel Manager Dashboard	Provides channel roles a dashboard to manage their daily transactions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_CONSUME_SIGNALS_EVENTS_DUTY	Consume Signals Events	Duty role to consume business events for integration when a new object is created, updated, or deleted.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AMENDMENT_DUTY_CRM	Contract Amendment	Amends approved contracts. This includes initiating an amendment, reverting the contract to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_AUTHORING_DUTY_CRM	Contract Authoring	Authors contracts, including terms and conditions, interactions, and customer account information.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SEARCH_VIEW_DUTY_CRM	Contract Search and View Access	Searches and views contracts for the assigned business units.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OKC_CONTRACT_SETUP_DUTY_CRM	Contract Setup	Contract Setup
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CONV_MESSAGE_ADMINISTRATION	Conversation Message Administration	Has complete conversation message management capabilities including create messages, reply to messages, change a reply to ready to send status and delete a message.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_CDM_ADMIN_DUTY	Customer Data Management Administration	Administers customer data management.
ORA_AR_RECEIVABLES_ADMINISTRATION_DUTY_CRM	ORA_AR_CUSTOMER_MAINTENANCE_DUTY_CRM	Customer Maintenance	Defines and maintains Receivables attributes of customer accounts and customer account sites.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_CSS_ADMINISTRATION	Customer Self-Service Administration	Manages the provisioning and approval of self service registration requests
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_	ORA_ZCA_DATA_INTEGRATION_MANAGEMENT_DUTY	Data Integration Management	This role allows setup and management of data integration maps and instances.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZ_EMP_RESOURCE_ADMINISTRATOR_DUTY	Employee Resource Administration	Administers HCM worker information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_FFS_FIELD_SERVICE_APPLICATION_ADMINISTRATOR_DUTY	Field Service Application Administrator	Individual responsible for the duty of configuring Field Service mobile application
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_GEO_ADMIN_DUTY	Geography Administration	Grants privileges to set up geographies
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CN_INCENTIVES_ADMINISTRATION_DUTY_CRM	Incentive Compensation Administration	Configure and maintain incentive compensation enterprise and business unit setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_AUTHORING_DUTY	Interview Definition Authoring	Manage access for authoring Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_MANAGING_DUTY	Interview Definition Managing	Manage access for deleting and forcing checkout of Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_PUBLISHING_DUTY	Interview Definition Publishing	Manage access for publishing and unpublishing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OIA_INTERVIEW_VIEWING_DUTY	Interview Definition Viewing	Manage access for viewing Interview definitions.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_EGP_ITEM_INQUIRY_DUTY_CRM	Item Inquiry	Queries and views items in the enterprise.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_EGP_ITEM_MANAGEMENT_DUTY_CRM	Item Management	Creates and manages items including item attributes, item structures, packs, associations, relationships, and catalog assignments.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_CSO_KNOWLEDGE_SETUP_AND_MAINTENANCE_DUTY	Knowledge Setup and Maintenance	Provides the users with the ability to setup and manage knowledge base
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_MANAGEMENT_DUTY	Lead Registration Management	Manages and analyzes sales lead registrations. Includes the ability to create sales lead registrations, edit both internal and partner lead attributes as needed, and view lead age and status.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_PROCESSING_DUTY	Lead Registration Processing	Reviews, accepts, and rejects sales lead registrations. Includes the ability to view sales lead details and update internal attributes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_LEAD_REGISTRATION_SUBMISSION_DUTY	Lead Registration Submission	Submits sales lead registrations to the enterprise and manages sales lead attributes. Includes the ability to create, accept, and reject sales lead registrations.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKT_MARKETING_BUDGET_MAINTENANCE_DUTY	MDF Budget Maintenance	Manages MDF budgets including import, export, and viewing budget fund requests and claims that use budgeted funds for marketing activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_MANAGE_CX_AI_AGENTS	Manage CX AI Agents	This role allows administrators to manage CX AI Agents in Agent Studio
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ANALYSIS_DUTY	Marketing Analysis	Analyzes marketing effectiveness across the enterprise by viewing detailed marketing campaign, list, segment, and treatment information from the audience and campaign work areas.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_AUDIENCE_MANAGEMENT_DUTY	Marketing Audience Management	Manages marketing lists from the audience work area. Marketing lists contain contacts and are used by marketing campaigns as the intended recipients of marketing messages.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_CAMPAIGN_MANAGEMENT_DUTY	Marketing Campaign Management	Manages secured marketing campaigns from planning to design and execution. Defines and maintains secured marketing treatments, lists, segments, and content.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_EXECUTION_MANAGEMENT_DUTY	Marketing Execution Management	Manages the execution of secured marketing campaigns. Manages secured marketing responses including response import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.Manages the execution of secured marketing campaigns. Manages secured marketing responses including response

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			import and converting responses to sales leads and opportunities. Schedules and monitors processes to record response interactions and create trading community members from suspects.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_MKT_MARKETING_ MAINTENANCE_DUTY	Marketing Maintenance	Creates and maintains setup for marketing campaigns, responses, segments, lists, and treatments across the enterprise. Additional duties include file import management for the import of marketing campaign responses.
ORA_MKT_MARKETING_ OPERATIONS_MANAGER_JOB	ORA_ZCM_MKTG_SALES_PARTY_ MANAGEMENT_DUTY	Marketing Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal marketing users. Additional duties include viewing of appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ ADMINISTRATION_DUTY	Opportunity Administration	Administers all aspects of the application, including some setup. This role is for opportunity administrators.
ORA_ZBS_SALES_ ADMINISTRATOR_JOB	ORA_MOO_OPPORTUNITY_ CHANNEL_ADMINISTRATION_ DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_MOO_OPPORTUNITY_ CHANNEL_ADMINISTRATION_ DUTY	Opportunity Channel Administration	Administers all aspects of the application, including some setup. This role is for channel administrators.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_ APPLICATION_ADMINISTRATOR_ JOB	ORA_ZPM_PARTNER_ACCOUNT_ ADMINISTRATION_DUTY	Partner Account Administration	Maintains a partner account, including managing members and partner profile information.
ORA_ZCA_CUSTOMER_ RELATIONSHIP_MANAGEMENT_	ORA_ZPM_PARTNER_ACCOUNT_ REVIEW_DUTY	Partner Account Review	Views a partner account, including viewing a partner's members, profile, and account team.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
APPLICATION_ADMINISTRATOR_JOB			
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_PARTNER_DEAL_REG_MANAGEMENT_DUTY	Partner Deal Registration Management	Creates and submits deal registrations. Includes the ability to create deal registrations, submit deal registrations and view updates.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZPM_PARTNER_IMPORT_ADMINISTRATION_DUTY	Partner Import Administration	Partner Import Administration Duty role. This duty will allow for administration activities of Partner Import
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_PARTNER_SALES_PARTY_MANAGEMENT_DUTY	Partner Sales Party Management	Manages creation and maintenance of sales organizations and consumers for partners. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts. This role has limited access to customers and contacts.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_VIEW_PARTY_CENTER_DUTY	Party Center Inquiry	Grants privileges to view party center nodes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCH_MANAGE_PARTY_CENTER_DUTY	Party Center Management	Grants privileges to manage party center nodes.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKT_PERSONAL_CAMPAIGN_MANAGEMENT_DUTY	Personal Campaign Management	Manages secured personal campaigns used to promote products or events to specific customers.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZSP_PRODUCT_RECOMMENDATION_ANALYSIS_DUTY	Product Recommendation Analysis	Manages business rules and recommendations about selling the right products to the right customers. Analyzes product recommendations and schedules sales lead generation and predictive model learning.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZ_RESOURCE_ABSTRACT	Resource	Identifies the person as front office personnel.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_AR_RECEIVABLES_ADMINISTRATION_DUTY_CRM	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ADMINISTRATOR_DUTY	Resource Administration	Administers resource information.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_AR_RECEIVABLES_ADMINISTRATION_DUTY_CRM	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_ORGANIZATION_ADMINISTRATOR_DUTY	Resource Organization Administration	Administers resource organizations.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCA_REVIEW_CRM_APPROVAL_TRANSACTIONS_ADMINISTRATOR	Review CRM Approval Transactions Administrator	Allows viewing of information for CRM approval transactions by an administrator.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZBS_SALES_CHANGE_HISTORY_INQUIRY_DUTY	Sales Change History Inquiry	Views change history of sales business objects for members within the sales organization.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZSF_SALES_FORECASTING_DELEGATED_MANAGEMENT_DUTY	Sales Forecasting Delegated Management	Manages sales forecasts, sales forecast items, sales forecast adjustments, and sales forecast item adjustments. Additional duties include exporting forecast information and managing forecasts on behalf of other users.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_DUTY	Sales Lead Follow Up	Processes sales lead for follow up actions including the qualification and conversion of sales lead to revenue opportunities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_FOLLOW_UP_MANAGEMENT_DUTY	Sales Lead Follow Up Management	Manages sales lead follow up marketing activities from qualification and assessment of leads to reassignment to sales for follow up sales activities including the conversion of sales lead to revenue opportunities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MKL_SALES_LEAD_PROCESSING_DUTY	Sales Lead Processing	Processes sales leads including managing, importing, and assigning sales lead activities.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
			managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_ADMINISTRATION_DUTY	Sales Party Administration	Manages named sales accounts, sales account import scheduler and the flagging of existing accounts. Additional duties include managing sales parties, functional setups, customer center objects, and relationship information inquiries.
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SALES_PARTY_MANAGEMENT_DUTY	Sales Party Management	Manages creation and maintenance of the sales organizations and consumers for internal sales users. Additional duties include viewing of opportunities and opportunity revenue, reviewing sales leads as well as appointments, interactions, and customer contacts.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_AVAILABILITY_MANAGEMENT	Service Availability Management	Manage the service availability data including reading and writing the availability of a service.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_PROFILE_ADMINISTRATION	Service Profile Administration	Manages all aspects of the Service Profile object, including deleting a service profile.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_SVC_SERVICE_STATUS_COMPUTATION	Service Status Computation	Perform actions required to determine the availability of a service.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCM_SETUP_CUSTOMER_CENTER_DUTY	Setup Customer Center	Manages customer center set up, sales party creation and their related objects, such as appointments, assessments, interactions, notes and tasks.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HRS_SOCIAL_CONNECTION_PARTNER_DUTY_CRM	Social Connection Partner	Performs all Oracle Fusion Social Connection partner duties.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AMENDMENT_DUTY	Subscription Amendment	Amends approved subscriptions. This includes initiating an amendment, reverting the subscription to the previous signed version, updating all allowable attributes, and submitting the amendment for approval.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_AUTHORING_DUTY	Subscription Authoring	Authors subscriptions
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SALES_VIEW_DUTY	Subscription Sales View	Searches and views subscriptions for the assigned business units. This duty role is specifically applicable for sales job roles.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SEARCH_VIEW_DUTY	Subscription Search and View Access	Searches and views subscriptions for the assigned business units.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SETUP_DUTY	Subscription Setup	Handles the setup required for subscriptions.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_OSS_SUBSCRIPTION_SPECIALIST_JOB	Subscription Specialist	Individual responsible for managing subscriptions, establishing recurring and usage billing processes, initiating manual discounts and invoice adjustments, and handling billing discrepancies and disputes.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_DUTY	Territory Management	Manages sales territories, territory proposals, and quotas.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_ENTERPRISE_ADMINISTRATION_DUTY	Territory Management Enterprise Administration	Manages sales territories and territory proposals. Additional duties include territory management setup and quota management administration.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MOT_TERRITORY_MANAGEMENT_SETUP_DUTY	Territory Management Setup	Manages sales territory setup, including lookups, profile options, flexfields, and dimension data. Runs dimension synchronization, and visibility jobs. Additional duties include quota management setup.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_CUSTOMER_ACCOUNT_ADMINISTRATION_DUTY	Trading Community Customer Account Administration	Grants privileges to setup customer account information.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_AR_RECEIVABLES_ADMINISTRATION_DUTY_CRM	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DATA_QUALITY_ADMIN_DUTY	Trading Community Data Quality Administration	Configures, reviews, and edits predefined data quality server configurations and the predefined matching, synchronization, and cleansing configurations.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_ZCQ_TRADING_COMMUNITY_DQ_MGMT_DUTY	Trading Community Data Quality Management	Performs real-time and batch data quality functions such as matching and cleansing.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_IDEN_MANAGE_DUTY	Trading Community Duplicate Identification Batch Management	Grants privileges to manage duplicate identification batches
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_DUP_RES_MANAGE_DUTY	Trading Community Duplicate Resolution Request Management	Grants privileges to manage duplicate resolution requests
ORA_MKT_MARKETING_OPERATIONS_MANAGER_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZBS_SALES_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_BATCH_DUTY	Trading Community Import Batch Management	Manages trading community data import batches.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_MANAGE_TRADING_COMMUNITY_IMPORT_PROCESS_DUTY	Trading Community Import Process Management	Manages trading community data import batch processes.
ORA_ZCH_MASTER_DATA_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.
ORA_ZCA_CUSTOMER_RELATIONSHIP_MANAGEMENT_APPLICATION_ADMINISTRATOR_JOB	ORA_HZ_TRADING_COMMUNITY_PERSON_ADMINISTRATION_DUTY	Trading Community Person Administration	Grants privileges to setup person information.

Resource Role Assignment

The resource role assigned to a resource. For example, Joe Smith is assigned a sales representative role.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceRoleAssign

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Resource*
Contained by	*Trading Community Resource Roles Setup*
Handled by	*Trading Community Resource Role*
Handled by	*Trading Community Resource*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
RoleId	long	The role identifier (foreign key to JTF_RS_ROLES).
RoleRelateId	long	The role relation identifier (PK). • Primary Key
RoleResourceId	long	The resource identifier (foreign key to HZ_PARTIES) or (foreign key to JTF_RS_GROUPS_MEMBERS or (foreign key to JTF_RS_TEAM_MEMBERS).
RoleResourceType	string	The resource type. (lookup type: JTF_RS_ROLE_RES_TYPE).
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.

Trading Community Resource Job Role

The relationship between the roles and the job information of the resource.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceJobRole

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Resource Roles Setup*
Handled by	*Trading Community Resource Role*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
JobId	long	The job identifier from PER_JOBS.
JobRoleId	long	The job role identifier. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
RoleId	long	The role identifier from JTF_RS_ROLES_B.

Trading Community Resource Role Translation

The resource role information in a local language.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceRoleTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Resource Roles Setup*
Handled by	*Trading Community Resource Role*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
Language	string	Indicates the code of the language into which the contents of the translatable columns are translated. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.

Name	Type	Description
RoleDescription	string	The resource role description.
RoleId	long	The unique role identifier. • Primary Key
RoleName	string	The resource role name.
SourceLang	string	Indicates the code of the language in which the contents of the translatable columns were originally created.

Trading Community Resource Roles Setup Additional Information

The role or function performed by a resource. For example sales representative or marketing administrator.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/flex/role/}RoleInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Resource Roles Setup SDO*
Contained by	*Trading Community Resource Roles Setup*
Handled by	*Trading Community Resource Role*
Handled by	*Trading Community Resource Role*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
RoleId	long	The unique role identifier. • Primary Key

Name	Type	Description
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Resource Roles Setup

The configuration of roles that can be used to indicate the function of a resource. For example sales representative or marketing administrator.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceRole

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Resource Roles Setup Additional Information*
Contains	*Trading Community Resource Job Role*
Contains	*Trading Community Resource Role Translation*
Contains	*Resource Role Assignment*
Handled by	*Trading Community Resource Role*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ActiveFlag	boolean	Indicates if role is active.
AdministratorFlag	boolean	Indicates if this role is an administrator role or not.
CreatedBy	string	The user who created the record.

Name	Type	Description
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
LeadFlag	boolean	Indicates if this role is a leader role or not.
ManagerFlag	boolean	Indicates if this role is a manager role or not.
MemberFlag	boolean	Indicates if this role is a member role or not.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ResourceJobRole	*Trading Community Resource Job Role*	The job role associated with the role.
ResourceRoleAssign	*Resource Role Assignment*	The resource role assignment.
ResourceRoleInformation	*Trading Community Resource Roles Setup Additional Information*	The resource role information.
ResourceRoleTranslation	*Trading Community Resource Role Translation*	The language specific resource role.
RoleCode	string	The unique code for a resource role.
RoleDescription	string	The description for role.
RoleId	long	The unique identifier for the role. • Primary Key
RoleName	string	The resource role name.
RoleTypeCode	string	The role type identifier.

Name	Type	Description
SeededFlag	boolean	Indicates the pre-defined role types.

Trading Community Resource Team

A collection of resources and resource groups brought together for a purpose. For example, a sales team formed to work on a specific opportunity or lead. These teams are not aligned with a given organization.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/applicationModule/}ResourceTeamService

Service WSDL URL: https://servername/crmService/ResourceTeamService?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Resource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Resource Team Member Role Assignment*
Handles	*Trading Community Resource Team Translation*
Handles	*Trading Community Resource Organization or Team Member*
Handles	*Trading Community Resource Team SDO Additional Information*
Handles	*Trading Community Resource Team SDO*
Handles	*Trading Community Resource Team Usage*
Handles	*Resource Team Member*

Operations

- *getResourceTeam*
- *createResourceTeam*
- *updateResourceTeam*
- *deleteResourceTeam*
- *mergeResourceTeam*
- *findResourceTeam*
- *processResourceTeam*
- *processCSResourceTeam*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getResourceTeam

The Get operation for the trading community resource team SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
teamId	long	The Get operation of the trading community resource team filtered by the team identifier.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceTeamResult	The trading community resource team SDO that matches the inbound key attributes.

createResourceTeam

The Create operation for the trading community resource team SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceTeam	*Trading Community Resource Team*	The trading community resource team SDO to be created.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceTeamResult	The result of the operation that includes the successfully created trading community resource team SDO and a list of warning or information messages.

updateResourceTeam

The Update operation for the trading community resource team SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceTeam	*Trading Community Resource Team*	The trading community resource team SDO to be updated.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceTeamResult	The result of the operation that includes the successfully updated trading community resource team SDO and a list of warning or information messages.

deleteResourceTeam

The Delete operation for the trading community resource team SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceTeam	*Trading Community Resource Team*	The trading community resource team SDO to be deleted.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warning or information messages encountered when the object was deleted.

mergeResourceTeam

The Merge operation for the trading community resource team SDO. It performs an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceTeam	*Trading Community Resource Team*	The trading community resource team SDO to be merged.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceTeamResult	The result of the operation that includes the successfully merged trading community resource team SDO and a list of warning or information messages.

findResourceTeam

The Find operation for the trading community resource team SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit the query result, such as the filter (where clause) and the fetch size.

Element Name	Type	Description
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Trading Community Resource Team*	The result of the operation that includes a list of trading community resource team SDO that satisfy the inbound criteria and any warning or information messages.

processResourceTeam

The Bulk load operation for the trading community resource team SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what actions were performed, such as Create, Update, Merge, or Delete.
resourceTeam	*Trading Community Resource Team*	A list of the trading community resource team SDOs to be processed.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Trading Community Resource Team*	The result of the operation that includes a list of trading community resource team SDO that are successfully processed and any warning or information messages.

processCSResourceTeam

An operation to apply the changes back to the data source for the trading community resource team SDO.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object used to represent the changes that were made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Controls the bulk upload behavior, such as whether the valid data is committed if there are other invalid data in the same batch, and whether the outbound operation contains the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The result of the operation that includes a list of created/updated data objects, and all warning and informational messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the name element from the getEntityList operation response payload.
localeName	string	The locale used when evaluating the locale-based user interface hints. The localeName is in the ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format.

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and boolean values indicating whether create, update, merge, and The Delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
mergeResourceTeam	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_TEAM_ PRIV	Manage Trading Community Resource Team	Allows the specification of groups of resources that work together, usually across organization hierarchy boundaries. For example, define marketing teams for campaigns. If assigning, also assign the ability to view the trading community resource team.
createResourceTeam	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_TEAM_ PRIV	Manage Trading Community Resource Team	Allows the specification of groups of resources that work together, usually across organization hierarchy boundaries. For example, define marketing teams for campaigns. If assigning, also assign the ability to view the trading community resource team.
deleteResourceTeam	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_TEAM_ PRIV	Manage Trading Community Resource Team	Allows the specification of groups of resources that work together, usually across organization hierarchy boundaries. For example, define marketing teams for campaigns. If assigning, also assign the ability to view the trading community resource team.
getResourceTeam	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_TEAM_ PRIV	Manage Trading Community Resource Team	Allows the specification of groups of resources that work together, usually across organization hierarchy boundaries. For example, define marketing teams for campaigns. If assigning, also assign the ability to view the trading community resource team.
processCSResourceTeam	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_TEAM_ PRIV	Manage Trading Community Resource Team	Allows the specification of groups of resources that work together, usually across organization hierarchy boundaries. For example, define marketing teams for campaigns. If assigning, also assign the ability to view the trading community resource team.
processResourceTeam	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_TEAM_ PRIV	Manage Trading Community Resource Team	Allows the specification of groups of resources that work together, usually across organization hierarchy boundaries. For example, define marketing teams for campaigns. If assigning, also assign the ability to view the trading community resource team.
updateResourceTeam	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_TEAM_ PRIV	Manage Trading Community Resource Team	Allows the specification of groups of resources that work together, usually across organization

Operation Name	Privilege Code	Privilege Name	Privilege Description
			hierarchy boundaries. For example, define marketing teams for campaigns. If assigning, also assign the ability to view the trading community resource team.
findResourceTeam	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_TEAM_ PRIV	Manage Trading Community Resource Team	Allows the specification of groups of resources that work together, usually across organization hierarchy boundaries. For example, define marketing teams for campaigns. If assigning, also assign the ability to view the trading community resource team.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_TEAM_ PRIV	ORA_HZRESOURCE_TEAM_ ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Resource Team Member

The resource that forms part of a team.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceTeamMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Resource Team Member Role Assignment*
Contained by	*Resource*
Contained by	*Trading Community Resource Team*
Handled by	*Trading Community Resource*
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ResourceTeamMemberRoleAssign	*Trading Community Resource Team Member Role Assignment*	The role assignment for a resource team member.
ResourceType	string	The type of the resource.
TeamId	long	The resource team identifier (foreign key to JTF_RS_TEAMS).
TeamMemberId	long	The resource team member identifier. • Primary Key
TeamResourceId	long	A team member can be a resource or a resource organization.

Trading Community Resource Organization or Team Member

The membership of a resource within organizations or teams.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceTeamOrgMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Resource Team*
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ResourceType	string	The type of the resource.
TeamId	long	The resource team identifier (foreign key to JTF_RS_TEAMS).
TeamMemberId	long	The resource team member identifier.

Name	Type	Description
		• Primary Key
TeamResourceId	long	A team member can be a resource or a resource organization.

Trading Community Resource Team Member Role Assignment

The role to indicates a team member performs within a team. For example, Sales Manager, Call Center Agent, Project Lead.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceTeamMemberRoleAssign

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Resource Team Member*
Handled by	*Trading Community Resource*
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
DeleteFlag	boolean	Indicates whether the record can be deleted or not.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.

Name	Type	Description
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
RoleId	long	The role identifier (foreign key to JTF_RS_ROLES).
RoleRelateId	long	The role relation identifier. This attribute is a primary key. • Primary Key
RoleResourceId	long	The resource identifier (foreign key to HZ_PARTIES) or (foreign key to JTF_RS_GROUPS_MEMBERS or (foreign key to JTF_RS_TEAM_MEMBERS).
RoleResourceType	string	The resource type. (lookup type: JTF_RS_ROLE_RES_TYPE).
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.

Trading Community Resource Team

The team that a resource belongs to. For example, resources from North American and Asia Pacific sales organizations are part of a resource team.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceTeam

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Resource Team Translation*
Contains	*Trading Community Resource Team Additional Information*
Contains	*Trading Community Resource Organization or Team Member*
Contains	*Trading Community Resource Team Usage*
Contains	*Resource Team Member*
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
EmailAddress	string	The email address associated with the record.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date after which the record becomes inactive.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
ResourceTeamInformation	*Trading Community Resource Team Additional Information*	Additional information about the trading community resource team.

Name	Type	Description
ResourceTeamMember	*Resource Team Member*	A resource person that forms part of the team.
ResourceTeamOrgMember	*Trading Community Resource Organization or Team Member*	An organization that forms part of the team.
ResourceTeamTranslation	*Trading Community Resource Team Translation*	The language specific resource team.
ResourceTeamUsage	*Trading Community Resource Team Usage*	The usage associated with a resource team.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date on which the record becomes active.
TeamDescription	string	The description of the team.
TeamId	long	The unique identifier of a resource team. • Primary Key
TeamName	string	The name associated with the team.
TeamNumber	string	The resource team number.

Trading Community Resource Team Additional Information

The team that a resource belongs to.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/flex/team/}TeamInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Resource Team SDO*
Contained by	*Trading Community Resource Team*
Handled by	*Trading Community Resource Team*
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
TeamId	long	The identifier for the resource team. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Resource Team Translation

The resource team information in a local language.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceTeamTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Resource Team*
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.

Name	Type	Description
Language	string	Indicates the code of the language into which the contents of the translatable columns are translated. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
SourceLang	string	Indicates the code of the language in which the contents of the translatable columns were originally created.
TeamDescription	string	The resource team description.
TeamId	long	The resource team unique identifier. • Primary Key
TeamName	string	The resource team name.

Trading Community Resource Team Usage

The usage of the resource team within the organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/}ResourceTeamUsage

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Resource Team*

Relationship Type	Object or Service
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	The user who created the record.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was created.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date when the record was last updated.
LastUpdateLogin	string	The login of the user who last updated the record.
LastUpdatedBy	string	The user who last updated the record.
ObjectVersionNumber	int	The number used to implement locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to determine whether another session has updated the row.
StatusFlag	boolean	The record status flag used to soft delete the record. The accepted values are: 'A' (active), 'I' (inactive), 'D' (logically deleted), and 'M' (merged). The default is 'A'.
TeamId	long	The resource team identifier (foreign key to JTF_RS_TEAMS_B).
TeamUsageId	long	The resource team usage identifier. This attribute is a primary key. • Primary Key
Usage	string	The usage attached to team (Lookup Type : JTF_RS_USAGE).

Trading Community Resource Team

A collection of resources and resource groups brought together for a purpose. For example, a sales team formed to work on a specific opportunity or lead. These teams are not aligned with a given organization.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/applicationModule/}ResourceTeamService

Service WSDL URL: https://servername/crmService/ResourceTeamServiceV2?WSDL

Logical Business Objects

- CRM : Trading Community Model : Trading Community Resource

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Trading Community Resource Team SDO*
Handles	*Resource Team Member*
Handles	*Trading Community Resource Team Additional Information*
Handles	*Trading Community Resource Team Member Role Assignment*
Handles	*Trading Community Resource Team Translation*
Handles	*Trading Community Resource Team Usage*
Handles	*Trading Community Resource Organization or Team Member*

Operations

- *getResourceTeam*
- *createResourceTeam*
- *updateResourceTeam*
- *deleteResourceTeam*

- *mergeResourceTeam*
- *findResourceTeam*
- *processResourceTeam*
- *processCSResourceTeam*
- *getDfltObjAttrHints*
- *getServiceLastUpdateTime*
- *getEntityList*

getResourceTeam

Get operation for Trading Community Resource Team SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
teamId	long	Get operation for Trading Community Resource Team filtered by the team identifier provided.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceTeamResult	Trading Community Resource Team SDO that matches the inbound key attributes.

createResourceTeam

Create operation for Trading Community Resource Team SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceTeam	*Trading Community Resource Team SDO*	Trading Community Resource Team SDO to be created

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceTeamResult	Result of the operation includes the successfully created Trading Community Resource Team SDO and/or a list of warnings or informational messages.

updateResourceTeam

Update operation for Trading Community Resource Team SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceTeam	*Trading Community Resource Team SDO*	Trading Community Resource Team SDO to be updated

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceTeamResult	Result of the operation includes the successfully updated Trading Community Resource Team SDO and/or a list of warnings or informational messages.

deleteResourceTeam

Delete operation for Trading Community Resource Team SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceTeam	*Trading Community Resource Team SDO*	Trading Community Resource Team SDO to be deleted

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}MethodResult	A list of warnings or informational messages encountered when deleting the object.

mergeResourceTeam

Merge operation for Trading Community Resource Team SDO. It will perform an update if the object exists, or an insert if the object doesn't already exist.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
resourceTeam	*Trading Community Resource Team SDO*	Trading Community Resource Team SDO to be merged

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceTeamResult	Result of the operation includes the successfully merged Trading Community Resource Team SDO and/or a list of warnings or informational messages.

findResourceTeam

Find operation for Trading Community Resource Team SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to limit your query result, such as the filter (where clause), the fetch size, etc.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Find Control. Not currently used.

Response Payload

Element Name	Type	Description
result	*Trading Community Resource Team SDO*	Result of the operation including a list of Trading Community Resource Team SDO that satisfy the inbound criteria and any warnings or informational messages encountered during the invocation.

processResourceTeam

Bulk load operation for Trading Community Resource Team SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
changeOperation	string	Indicates what action shall be performed, such as Create, Update, Merge, or Delete
resourceTeam	*Trading Community Resource Team SDO*	A list of Trading Community Resource Team SDO to be processed
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	*Trading Community Resource Team SDO*	Result of the operation including a list of Trading Community Resource Team SDO that are successfully processed and any warnings or informational messages encountered during the invocation.

processCSResourceTeam

An operation to apply the changes back to the data source for Trading Community Resource Team SDO

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
processData	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	The object that is used to represent the changes that have been made.
processControl	{http://xmlns.oracle.com/adf/svc/types/}ProcessControl	Control your bulk upload behavior, such as whether the valid data will be committed if there are other invalid data in the same batch, and whether the outbound will contain the key attributes only or the full object.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ProcessData	Result of the operation including a list of created/updated data objects, and all warning and informational messages.

getDfltObjAttrHints

An operation to retrieve user interface hints, such as the service data object label and object attribute labels, for the specified service data object and locale. As a prerequisite, invoke the getEntityList operation defined on this service to get the list of possible values for the viewName request payload element.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
viewName	string	The service view usage name, an internal name for the service data object. Specify the value of the <name> element from the getEntityList operation response payload.
localeName	string	The locale to use when evaluating locale-based user interface hints. The localeName is in ISO 639-1 format.

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ObjAttrHints	The label and user interface hints for the specified service data object and its attributes in a name-value pair format

getServiceLastUpdateTime

An operation that returns the date and time when the schema files referenced in the service definition last changed.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The date and time when the service definition last changed in ISO 8601 format.

getEntityList

An operation to get the list of service data objects defined on this service.

Life Cycle Status: Active

Request Payload

Response Payload

Element Name	Type	Description
result	{http://xmlns.oracle.com/adf/svc/types/}ServiceViewInfo	A list of service data objects defined on this service. For each service data object, the result includes the QName, internal name, and Boolean values indicating whether create, update, merge, and delete operations can be performed on the object.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
mergeResourceTeam	HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_TEAM_PRIV	Manage Trading Community Resource Team	Allows the specification of groups of resources that work together, usually across organization hierarchy boundaries. For example, define marketing teams for campaigns. If assigning, also assign the ability to view the trading community resource team.

Operation Name	Privilege Code	Privilege Name	Privilege Description
createResourceTeam	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_TEAM_ PRIV	Manage Trading Community Resource Team	Allows the specification of groups of resources that work together, usually across organization hierarchy boundaries. For example, define marketing teams for campaigns. If assigning, also assign the ability to view the trading community resource team.
deleteResourceTeam	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_TEAM_ PRIV	Manage Trading Community Resource Team	Allows the specification of groups of resources that work together, usually across organization hierarchy boundaries. For example, define marketing teams for campaigns. If assigning, also assign the ability to view the trading community resource team.
getResourceTeam	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_TEAM_ PRIV	Manage Trading Community Resource Team	Allows the specification of groups of resources that work together, usually across organization hierarchy boundaries. For example, define marketing teams for campaigns. If assigning, also assign the ability to view the trading community resource team.
processCSResourceTeam	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_TEAM_ PRIV	Manage Trading Community Resource Team	Allows the specification of groups of resources that work together, usually across organization hierarchy boundaries. For example, define marketing teams for campaigns. If assigning, also assign the ability to view the trading community resource team.
processResourceTeam	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_TEAM_ PRIV	Manage Trading Community Resource Team	Allows the specification of groups of resources that work together, usually across organization hierarchy boundaries. For example, define marketing teams for campaigns. If assigning, also assign the ability to view the trading community resource team.
updateResourceTeam	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_TEAM_ PRIV	Manage Trading Community Resource Team	Allows the specification of groups of resources that work together, usually across organization hierarchy boundaries. For example, define marketing teams for campaigns. If assigning, also assign the ability to view the trading community resource team.
findResourceTeam	HZ_MANAGE_TRADING_ COMMUNITY_RESOURCE_TEAM_ PRIV	Manage Trading Community Resource Team	Allows the specification of groups of resources that work together, usually across organization

Operation Name	Privilege Code	Privilege Name	Privilege Description
			hierarchy boundaries. For example, define marketing teams for campaigns. If assigning, also assign the ability to view the trading community resource team.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
HZ_MANAGE_TRADING_COMMUNITY_RESOURCE_TEAM_PRIV	ORA_HZRESOURCE_TEAM_ADMINISTRATOR_DUTY	Resource Team Administration	Defines resource teams.

Resource Team Member

A resource that forms part of a team.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceTeamMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Resource Team Member Role Assignment*
Contained by	*Trading Community Resource Team SDO*
Contained by	*Resource*
Handled by	*Trading Community Resource*
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DeleteFlag	boolean	Delete Flag indicates whether this record is logically deleted or not?
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
ResourceTeamMemberRoleAssign	*Trading Community Resource Team Member Role Assignment*	Role assignment for a resource team member.
ResourceType	string	Type of the resource
TeamId	long	Resource Team identifier (foreign key to JTF_RS_TEAMS)
TeamMemberId	long	Resource Team Member identifier • Primary Key
TeamResourceId	long	A team member can be a Resource or a Resource Organization.

Trading Community Resource Organization or Team Member

A membership of a resource within organizations or teams.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceTeamOrgMember

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Resource Team SDO*
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DeleteFlag	boolean	Delete Flag indicates whether this record is logically deleted or not?
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
ResourceType	string	Type of the resource
TeamId	long	Resource Team identifier (foreign key to JTF_RS_TEAMS)

Name	Type	Description
TeamMemberId	long	Resource Team Member identifier • Primary Key
TeamResourceId	long	A team member can be a Resource or a Resource Organization.

Trading Community Resource Team Additional Information

The team that a resource belongs to.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/flex/team/}TeamInformation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Resource Team SDO*
Contained by	*Trading Community Resource Team*
Handled by	*Trading Community Resource Team*
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
TeamId	long	The identifier for the resource team. • Primary Key
_FLEX_NumOfSegments	int	Do not use as it is a internal descriptive flex field attribute.
__FLEX_Context	string	Do not use as it is a internal descriptive flex field attribute.

Trading Community Resource Team Member Role Assignment

A role to indicates a team member performs within a team. For example, Sales Manager, Call Center Agent, Project Lead.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceTeamMemberRoleAssign

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Resource Team Member*
Handled by	*Trading Community Resource*
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DeleteFlag	boolean	Delete Flag indicates whether this record is logically deleted or not?
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date this role-resource becomes inactive
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.

Name	Type	Description
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
RoleId	long	Role identifier (foreign key to JTF_RS_ROLES)
RoleRelateId	long	Role Relation identifier (PK) • Primary Key
RoleResourceId	long	Resource identifier (foreign key to HZ_PARTIES) or (foreign key to JTF_RS_GROUPS_MEMBERS or (foreign key to JTF_RS_TEAM_MEMBERS)
RoleResourceType	string	Resource type. (lookup type: JTF_RS_ ROLE_ RES_TYPE)
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date this role-resource becomes active

Trading Community Resource Team SDO

A team that a resource belongs to. For example, resources from North American and Asia Pacific sales organizations are part of a resource team.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceTeam

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Trading Community Resource Team Additional Information*
Contains	*Resource Team Member*
Contains	*Trading Community Resource Team Translation*

Relationship Type	Object or Service
Contains	*Trading Community Resource Team Usage*
Contains	*Trading Community Resource Organization or Team Member*
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
EmailAddress	string	Email address of a resource team.
EndDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date on which the resource team stops being active.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
ResourceTeamInformation	*Trading Community Resource Team Additional Information*	Trading Community Resource Team Additional Information
ResourceTeamMember	*Resource Team Member*	A resource person that formms part of the team.

Name	Type	Description
ResourceTeamOrgMember	*Trading Community Resource Organization or Team Member*	An organization that forms part of the team.
ResourceTeamTranslation	*Trading Community Resource Team Translation*	Language specific resource team.
ResourceTeamUsage	*Trading Community Resource Team Usage*	Usage associated with a resource team.
StartDateActive	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Date on which the resource team becomes active.
TeamDescription	string	Description of the team.
TeamId	long	Unqiue identifier of a resource team. • Primary Key
TeamName	string	Name associated with the team.
TeamNumber	string	Resource Team Number.

Trading Community Resource Team Translation

The resource team information in a local language.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceTeamTranslation

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Resource Team SDO*
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
Language	string	Indicates the code of the language into which the contents of the translatable columns are translated. • Primary Key
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
SourceLang	string	Indicates the code of the language in which the contents of the translatable columns were originally created.
TeamDescription	string	Resource Team Description
TeamId	long	Resource team unique identifier • Primary Key
TeamName	string	Resource Team name

Trading Community Resource Team Usage

The usage of the resource team within the organization.

QName: {http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceServiceV2/}ResourceTeamUsage

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Trading Community Resource Team SDO*
Handled by	*Trading Community Resource Team*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Used to implement optimistic locking. This number is incremented every time that the row is updated. The number is compared at the start and end of a transaction to detect whether another session has updated the row since it was queried.
StatusFlag	boolean	Record Status Flag used to soft delete entity. Possible values are 'A' (active) and 'I' (inactive).
TeamId	long	Resource Team identifier (foreign key to JTF_RS_TEAMS_B)
TeamUsageId	long	Resource Team Usage identifier (PK) • Primary Key

Name	Type	Description
Usage	string	Usage attached to Team (Lookup Type : JTF_RS_USAGE)

Work Order Service

Service to operate on work order. For example, querying for a single work order or updating a work order. Access to this SOAP service is restricted only for use by the Oracle Integration Cloud Service.

Life Cycle Status: Active

QName: {http://xmlns.oracle.com/apps/crm/service/fieldservice/workOrderService/}WorkOrderService

Service WSDL URL: https://servername/crmService/CustomerWorkOrderService?WSDL

Logical Business Objects

- CRM : Service : Field Service Work Order

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Handles	*Work Order*
Handles	*Work Order Part*

Operations

- *getWorkOrder*
- *updateWorkOrder*
- *findWorkOrder*

getWorkOrder

Queries for a single work order record by primary key.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
wold	long	Unique identifier of a work order.

Response Payload

Element Name	Type	Description
result	*Work Order*	Updated work order.

updateWorkOrder

Updates a single work order record.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
workOrder	*Work Order*	Work order to be updated.

Response Payload

Element Name	Type	Description
result	*Work Order*	Updated work order.

findWorkOrder

Queries a list of work orders based on a filter criteria.

Life Cycle Status: Active

Request Payload

Element Name	Type	Description
findCriteria	{http://xmlns.oracle.com/adf/svc/types/}FindCriteria	The criteria used to query the list of work orders.
findControl	{http://xmlns.oracle.com/adf/svc/types/}FindControl	Not currently used.

Response Payload

Element Name	Type	Description
result	*Work Order*	A list of work orders that satisfy the inbound parameters.

Security

The following tables list the privileges required to perform the service operations, and the duty roles that each privilege is granted to.

Service Operations to Privileges Mapping

Operation Name	Privilege Code	Privilege Name	Privilege Description
findWorkOrder	SVC_VIEW_SERVICE_WORK_ORDER_PRIV	View Service Work Order	Allows viewing of service work order(s).
getWorkOrder	SVC_VIEW_SERVICE_WORK_ORDER_PRIV	View Service Work Order	Allows viewing of service work order(s).
updateWorkOrder	SVC_EDIT_SERVICE_WORK_ORDER_PRIV	Edit Service Work Order	Allows editing of a service work order.

Privileges to Duty Roles Mapping

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_EDIT_SERVICE_WORK_ORDER_PRIV	ORA_CSI_ASSET_SERVICE_DUTY_CRM	Asset Service Management	Provide access to view and manage service business objects, such as service request, service work order, that are related to an asset.
SVC_EDIT_SERVICE_WORK_ORDER_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_EDIT_SERVICE_WORK_ORDER_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
SVC_EDIT_SERVICE_WORK_ORDER_PRIV	ORA_RCL_FIELD_SERVICE_ADMINISTRATOR_JOB	Field Service Administrator	Individual responsible for the administration of field service logistics.

Privilege Code	Granted to Duty Role Code	Granted to Duty Role Name	Granted To Duty Role Description
SVC_EDIT_SERVICE_WORK_ORDER_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
SVC_EDIT_SERVICE_WORK_ORDER_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
SVC_EDIT_SERVICE_WORK_ORDER_PRIV	ORA_SVC_WO_ADMINISTRATION	Service Work Order Administration	Administers all aspects of Service Work Orders.
SVC_EDIT_SERVICE_WORK_ORDER_PRIV	ORA_RCL_FIELD_SERVICE_TECHNICIAN_DUTY_CRM	Field Service Technician	Individual responsible for the duty of field service logistics.
SVC_VIEW_SERVICE_WORK_ORDER_PRIV	ORA_CSI_ASSET_SERVICE_DUTY_CRM	Asset Service Management	Provide access to view and manage service business objects, such as service request, service work order, that are related to an asset.
SVC_VIEW_SERVICE_WORK_ORDER_PRIV	ORA_SVC_SR_ADMINISTRATOR	Service Request Administrator	Administers all aspects of the Service application, including Setup.
SVC_VIEW_SERVICE_WORK_ORDER_PRIV	ORA_SVC_SR_CONTRIBUTOR	Service Request Contributor	Can create Service Requests and help with resolution of the Service Request. Has basic Service Request Management capabilities. Would not be able to respond to customer, assign SR to a user or change the status of a SR.
SVC_VIEW_SERVICE_WORK_ORDER_PRIV	ORA_RCL_FIELD_SERVICE_ADMINISTRATOR_JOB	Field Service Administrator	Individual responsible for the administration of field service logistics.
SVC_VIEW_SERVICE_WORK_ORDER_PRIV	ORA_SVC_SR_POWER_USER	Service Request Power User	Advanced Service Request management capabilities not available to Service Representatives
SVC_VIEW_SERVICE_WORK_ORDER_PRIV	ORA_SVC_SR_TROUBLESHOOTER	Service Request Troubleshooter	Manages all aspects of the Service Request object
SVC_VIEW_SERVICE_WORK_ORDER_PRIV	ORA_SVC_WO_ADMINISTRATION	Service Work Order Administration	Administers all aspects of Service Work Orders.
SVC_VIEW_SERVICE_WORK_ORDER_PRIV	ORA_RCL_FIELD_SERVICE_TECHNICIAN_DUTY_CRM	Field Service Technician	Individual responsible for the duty of field service logistics.

Duty Roles to Duty or Job Roles Mapping

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_BILLING_VIEWING	Customer Service Billing Information Viewing	View customer billing information across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_MANAGEMENT	Customer Service SCM Orders Management	Allow creation and management of supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.

Duty Role Code	Granted to Duty or Job Role Code	Granted to Duty or Job Role Name	Granted To Duty or Job Role Description
ORA_SVC_SR_TROUBLESHOOTER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_POWER_USER	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_CONTRIBUTOR	ORA_SVC_CUST_SERVICE_SCM_ORDERS_VIEWING	Customer Service SCM Orders Viewing	View supply chain management orders across Oracle Fusion Service, including service requests and service work orders.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_ADMIN	Service Generative AI Administrator	Administer activities related to Service Gen AI APIs such as configuration of prompts across all areas of Oracle Fusion Service, such as Service Center, Knowledge, and Chat.
ORA_SVC_SR_ADMINISTRATOR	ORA_SVC_GEN_AI_USER	Service Generative AI User	Can use generative AI features across Oracle Fusion Service including but not limited to Service Center, Knowledge Management and Chat areas. Usage requires access to all generative AI API's essential to input data and fetch results from the LLM model.

Work Order

An order received from a customer to perform some work. For example, install cable or fix an air conditioner.

QName: {http://xmlns.oracle.com/apps/crm/service/fieldservice/workOrderService/}WorkOrder

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contains	*Work Order Part*
Handled by	*Work Order Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
AccountPartyId	long	Account party identifier.
AccountPartyName	string	Account party name.
ActualEndDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The actual end date and time of the work completed at the customer location.
ActualStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The actual start date and time of the work at the customer location.
AddrElementAttribute1	string	The first additional address element to support flexible address format.
AddrElementAttribute2	string	The second additional address element to support flexible address format.
AddrElementAttribute3	string	The third additional address element to support flexible address format.
AddrElementAttribute4	string	The fourth additional address element to support flexible address format.
AddrElementAttribute5	string	The fifth additional address element to support flexible address format.
Address1	string	Work order specific address line 1, where the service will be performed.
Address2	string	Work order specific address line 2, where the service will be performed.
Address3	string	Work order specific address line 3, where the service will be performed.
Address4	string	Work order specific address line 4, where the service will be performed.
AddressLinesPhonetic	string	The phonetic or Kana representation of the Kanji address lines which is used in Japan.
AssigneeEmail	string	The assignee resource email associated to the work order.

Name	Type	Description
AssigneePersonName	string	The assignee resource name associated to the work order.
AssigneePhoneNumber	string	The assignee resource phone number associated to the work order.
AssigneeResourceId	long	The assignee resource ID associated to the work order.
BookedDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The booked date of the scheduled date and time slot of the work order.
Building	string	The specific building name or number at a given address.
CancelReason	string	A brief description of the reason for cancelling the work order.
CaseNote	string	A note field to contain any useful information which pertains to the work order as entered by service agents.
City	string	Work order specific city where the service will be performed.
ContactAltPhoneNumber	string	Work order specific alternate phone number of the customer contact.
ContactEmail	string	Work order specific email for the customer contact.
ContactName	string	Work order specific contact name of the customer.
ContactPartyFirstName	string	Contact party first name.
ContactPartyId	long	Contact party identifier.
ContactPartyLastName	string	Contact party last name.
ContactPhoneNumber	string	Work order specific phone number of the customer contact.
Country	string	Work order specific country where the service will be performed.

Name	Type	Description
County	string	Work order specific county where the service will be performed.
CreatedBy	string	Who column: indicates the user who created the row.
CreationDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the creation of the row.
DeliveryWinEndDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	An estimated delivery window end time for the pending work.
DeliveryWinStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	An estimated delivery window start time for the pending work.
Duration	int	The manual duration value documenting the expected time to complete the work order.
EstimatedArrivalTime	string	An estimated arrival time window of the field service technician for the pending work.
EstimatedStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The estimated expected time of arrival of the field service tech at the customer location.
FieldServiceResourceId	long	The field service resource ID who is assigned to complete the work order.
FloorNumber	string	The specific floor number at a given address or in a particular building when the building number is provided.
FormattedAddress	string	Work order-specific formatted address which contains all pertinent information about where the service will be performed.
FsActivityId	long	The integration activity identifier of the work order, used for data synchronization.
FsContactFlag	boolean	Indicates whether the contact came from OFSC into Fusion.
FsErrorDetail	string	Field Service integration error message. Not exposed in the user interface.
FsNote	string	A note field to contain any useful information which pertains to the work order dispatch or scheduling comments.

Name	Type	Description
FsResource	string	The resource being used to complete this work order.
FsResourceExternalId	string	The external ID of the resource being used to complete this work order.
FsTypeCd	string	The work order type. Corresponds to the activity type in OFSC.
IBAssetActiveFlag	boolean	Flag indicating the installed base asset feature is active or inactive.
IBAssetDescription	string	The description of the installed base asset attached to the work order.
IBAssetEndDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The end date of the installed base asset attached to the work order.
IBAssetId	long	The ID of the installed base asset attached to the work order.
IBAssetInstalledDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The install date of the installed base asset attached to the work order.
IBAssetItemDescription	string	The product description of the installed base asset attached to the work order.
IBAssetItemNumber	string	The product number of the installed base asset attached to the work order.
IBAssetNumber	string	The number of the installed base asset attached to the work order.
IBAssetPurchaseDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The purchase date of the installed base asset attached to the work order.
IBAssetQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The quantity of the installed base asset attached to the work order.
IBAssetSerialNumber	string	The serial number of the installed base asset attached to the work order.
IBAssetStartDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The start date of the installed base asset attached to the work order.
IBAssetStatusCode	string	The status of the installed base asset attached to the work order.

Name	Type	Description
IBAssetTag	string	The tag of the installed base asset attached to the work order.
IBAssetUOMCode	string	The unit of measure for the quantity of the installed base asset attached to the work order.
LastUpdateDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Who column: indicates the date and time of the last update of the row.
LastUpdateLogin	string	Who column: indicates the session login associated to the user who last updated the row.
LastUpdateSourceCd	string	Source code that indicates how the work order was last updated such as AGENT_UI, OFSC or API.
LastUpdatedBy	string	Who column: indicates the user who last updated the row.
ObjectVersionNumber	int	Object version number.
OpportunityId	long	Opportunity identifier.
OverridePartyId	long	Override party identifier.
OverridePartyName	string	Override party name.
OverrideReason	string	A brief description of the reason for requesting an override on the time slot scheduled.
OverrideStatusCd	string	Lookup code used to indicate the status of an override request having lookup type ORA_SVC_WO_OVERRIDE_CD.
OwnerTypeCd	string	The owner type code associated to the account for the work order.
PartnerAccountName	string	The partner account name of the partner associated to the work order.
PartnerAccountPartyId	long	The partner account party id associated to the work order.
PostalCode	string	Work order specific postal code where the service will be performed.

Name	Type	Description
PostalPlus4Code	string	The four digit extension to the United States Postal ZIP code.
PrimaryAssetDescription	string	The description field of the asset.
PrimaryAssetEndDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date till which the entity is active. The date is inclusive and the status of an entity is dependent on the active date.
PrimaryAssetId	long	The unique identifier of the asset.
PrimaryAssetInstallDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date the asset was installed.
PrimaryAssetName	string	The name that describes the asset.
PrimaryAssetNumber	string	The number that identifies the asset.
PrimaryAssetProduct	string	The product associated to the primary asset for the work order.
PrimaryAssetPurchaseDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The date the asset was purchased.
PrimaryAssetQuantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	The quantity purchased.
PrimaryAssetSerialNumber	string	The asset's serial number.
PrimaryAssetStartDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	Indicates the date from which this entity is active. The date is inclusive and the status of an entity is dependent on the active date.
PrimaryAssetStatusCode	string	The pre-defined code used to indicate the status.
PrimaryAssetTag	string	The tag number associated with the asset.
PrimaryAssetUOMCode	string	The unit of measure.
Province	string	Work order specific province where the service will be performed.

Name	Type	Description
ReminderTime	int	A time in minutes before the scheduled time slot when a reminder will be given to the field service tech in OFSC.
RequestedDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The requested date of the work order, no time component.
RequestedTime	string	The combined requested date and time slot of the work order.
RequestedTimeSlot	string	The requested time slot for the work order.
RequirementLine	*Work Order Part*	Parts for an order received from a customer to perform some work.
RescheduleReason	string	A brief description of the reason for rescheduling the work order time slot.
ResolutionDueDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	The resolution due date based on customers service level agreement (SLA).
ResolutionDueDateLocal	string	The resolution due date of a service level agreement (SLA) from the time zone of the work order.
ScheduledDate	{http://xmlns.oracle.com/adf/svc/types/}date-Date	The scheduled date of the work order, no time component.
ScheduledTime	string	The combined scheduled date and time slot of the work order.
ScheduledTimeSlot	string	The scheduled time slot for the work order.
SourceCd	string	Source of the work order. A list of accepted values is defined in the lookup type ORA_SVC_SOURCE_CD.
SrId	long	Service request identifier.
SrNumber	string	The unique number that is used to identify the parent service request of the work order.
State	string	Work order specific state where the service will be performed.
TimezoneCode	string	The time zone code of the work order specific address where the service will be performed.

Name	Type	Description
Title	string	A brief title of the work order.
TravelTime	int	The time in minutes the field service agent.
WoArea	string	The work order location of the customer.
WoId	long	Work order identifier. • Primary Key
WoIntegrationCd	string	Work order integration code to represent the current integration state of the work order.
WoIntegrationMsgCd	string	Work order integration message code used to show user-friendly error messages and provide information to fix the issue.
WoIntegrationStatusCd	string	Work order integration status to represent the state of the work order in the work order life cycle.
WoNumber	string	Autogenerated unique number with configurable format.
WoRecordType	string	The type of the work order such as regular, multiday work order, or multiday work order segment.
WoStatusCd	string	Lookup code indicating the current life-cycle status of the work order having configurable values with lookup type ORA_SVC_WO_STATUS_CD.
WoTypeId	long	Work order type identifier.

Work Order Part

Work Order Part ADF Business Component View Object.

QName: {http://xmlns.oracle.com/apps/crm/service/fieldservice/workOrderService/view/}WoExtRequirementLine

Relationships

The following table describes how this service data object is related to other service data objects or business object services.

Relationship Type	Object or Service
Contained by	*Work Order*
Handled by	*Work Order Service*

Attributes

The following table describes attributes in the service data object.

Name	Type	Description
ExpectedArrivalDate	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Date the ordered parts are expected to arrive.
ExpectedArrivalDateLocal	{http://xmlns.oracle.com/adf/svc/types/}dateTime-Timestamp	Expected Arrival Date in Local Time Zone
ItemNumber	string	Unique item identifier of the part ordered.
LineStatus	string	Status of the part ordered.
Quantity	{http://xmlns.oracle.com/adf/svc/types/}MeasureType	Quantity of the part ordered.
ShipAddress	string	Address of the person or organization where the ordered parts are being shipped.
UnitOfMeasure	string	Unit which is used to measure quantity of the part ordered.

9 Process Services

Check Product Eligibility Service (Deprecated)

Evaluates if the customer in context is eligible to select this product. WARNING: This service has been deprecated and will not be superseded by a new public service.

Life Cycle Status: Deprecated

Operations

- *process*

process

Product Eligibility Service.

Callback Operation Name:

Service Type: Synchronous

Input Payload

- Description: Input of Product Eligibility Service.
- Type: {http://xmlns.oracle.com/apps/OrderCaptureEligibilityCompatibilityComposite/CheckProductEligibility}CheckProductEligibilityRequestMessage

Output Payload

- **Description:** Output of Product Eligibility Service.
- **Type:** {http://xmlns.oracle.com/apps/OrderCaptureEligibilityCompatibilityComposite/CheckProductEligibility}CheckProductEligibilityResponseMessage

Check Product Group Eligibility Service (Deprecated)

Evaluates if the customer in the context is eligible to select any product or promotion from a product group. WARNING: This service has been deprecated and will not be superseded by a new public service.

Life Cycle Status: Deprecated

Operations

- *process*

process

Product Group Eligibility Service.

Callback Operation Name:

Service Type: Synchronous

Input Payload

- Description: Input of Product Group Eligibility Service.
- Type: {http://xmlns.oracle.com/apps/OrderCaptureEligibilityCompatibilityComposite/CheckProductGroupEligibility}CheckProductGroupEligibilityRequestMessage

Output Payload

- **Description:** Output of Product Group Eligibility Service.
- **Type:** {http://xmlns.oracle.com/apps/OrderCaptureEligibilityCompatibilityComposite/CheckProductGroupEligibility}CheckProductGroupEligibilityResponseMessage

Convert Marketing Response to Lead Service

Converts a marketing response to a sales lead.

Life Cycle Status: Active

Operations

- *initiate*

initiate

A Web service method that converts a response to a Lead

Callback Operation Name:

Service Type: Asynchronous

Input Payload

- Description: An input parameter of the web service method. It contains the set of attributes that are needed for the conversion
- Type: {http://xmlns.oracle.com/apps/marketing/MktResponse/MktResponseToLeadComposite/ResponseToLeadProcess}ResponseToLeadProcessRequestMessage

Convert Marketing Response to Opportunity Service

Converts a marketing response to a sales opportunity.

Life Cycle Status: Active

Operations

- *initiate*

initiate

A Web service method that converts a response to an opportunity

Callback Operation Name:

Service Type: Asynchronous

Input Payload

- Description: An input parameter of the web service method. It contains the set of attributes that are needed for the conversion
- Type: {http://xmlns.oracle.com/apps/marketing/MktResponse/MktResponseToOptyComposite/ResponseToOptyProcess}ResponseToOptyProcessRequestMessage

10 Sample Payloads

Perform Batch SOAP Operations

You can perform batch SOAP operations to create or update large volumes of data in a single SOAP call. To perform batch actions, you must include multiple sets of entity in the SOAP request payload.

You must ensure that you don't have unmanageable number of entities in your request for smooth processing. Also, ensure that you have error handling and post-processing data validation in place that can manage multiple entities. You might encounter timeout issues or data conflicts when processing large number records in a single SOAP call.

Below is a sample request payload for creating multiple sales accounts using a single SOAP call:

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
 xmlns:typ="http://xmlns.oracle.com/apps/crmCommon/salesParties/accountService/types/"
 xmlns:acc="http://xmlns.oracle.com/apps/crmCommon/salesParties/accountService/"
 xmlns:com="http://xmlns.oracle.com/apps/crmCommon/salesParties/commonService/"
 xmlns:not="http://xmlns.oracle.com/apps/crmCommon/notes/noteService" xmlns:not1="http://
xmlns.oracle.com/apps/crmCommon/notes/flex/noteDff/" xmlns:org="http://xmlns.oracle.com/
apps/cdm/foundation/parties/organizationService/" xmlns:sal="http://xmlns.oracle.com/apps/
crmCommon/salesParties/salesPartiesService/">
<soapenv:Header/>
        <soapenv:Body>
                <typ:createAccount>
                <typ:account>
                        <acc:OrganizationName>Pinnacle Flowers</acc:OrganizationName>
                        <acc:Type>ZCA_CUSTOMER</acc:Type>
                        <acc:CreatedByModule>HZ_WS</acc:CreatedByModule>
                        <acc:PhoneCountryCode>1</acc:PhoneCountryCode>
                        <acc:PhoneAreaCode>650</acc:PhoneAreaCode>
                        <acc:PhoneNumber>8881111</acc:PhoneNumber>
                        <acc:PhoneExtension>123</acc:PhoneExtension>
                        <acc:PrimaryAddress>
                                <com:AddressLine1>Strada xpto</com:AddressLine1>
                                <com:City>Bucharest</com:City>
                                <com:Country>RO</com:Country>
                        </acc:PrimaryAddress>
                </typ:account>
                </typ:createAccount>
                <typ:createAccount>
                <typ:account>
                        <acc:OrganizationName>Vision Corp</acc:OrganizationName>
                        <acc:Type>ZCA_CUSTOMER</acc:Type>
                        <acc:CreatedByModule>HZ_WS</acc:CreatedByModule>
                        <acc:PhoneCountryCode>1</acc:PhoneCountryCode>
                        <acc:PhoneAreaCode>650</acc:PhoneAreaCode>
                        <acc:PhoneNumber>93934111</acc:PhoneNumber>
                        <acc:PhoneExtension>1434</acc:PhoneExtension>
                        <acc:PrimaryAddress>
                                <com:AddressLine1>Boulevard Drive</com:AddressLine1>
                                <com:City>San Francisco</com:City>
                                <com:Country>US</com:Country>
                        </acc:PrimaryAddress>
                </typ:account>
```

```
                </typ:createAccount>
        </soapenv:Body>
</soapenv:Envelope>
```

Upload an attachment using Activity Service

In this use case, we'll upload an attachment using Activity Service WSDL.

Operation: **createAttachment**

Request Body

```
<soapenv:Envelope xmlns:obj="http://xmlns.oracle.com/apps/crmCommon/objects/
objectsService/" xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
 xmlns:typ="http://xmlns.oracle.com/apps/crmCommon/activities/activityManagementService/
types/">
   <soapenv:Body>
      <typ:createAttachment>
         <typ:attachmentRows>
            <obj:EntityName>ZCA_SALES_PARTY</obj:EntityName>
            <obj:Pk1Value>100014129759978</obj:Pk1Value>
            <obj:DatatypeCode>FILE</obj:DatatypeCode>
            <obj:Description>Description5</obj:Description>
            <obj:FileName>File Name.txt</obj:FileName>
            <obj:Title>Title</obj:Title>
            <obj:DmRepository>FusionAppsContentRepository</obj:DmRepository>
            <obj:DownloadStatus>N</obj:DownloadStatus>
            <obj:CategoryName>MISC</obj:CategoryName>
            <obj:UploadedFile>UmFnaGF2YQ==</obj:UploadedFile>
         </typ:attachmentRows>
         <typ:commitData>true</typ:commitData>
      </typ:createAttachment>
   </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing">
<env:Header>
<wsa:Action>http://xmlns.oracle.com/apps/crmCommon/activities/activityManagementService/
ActivityService/createAttachmentResponse</wsa:Action>
<wsa:MessageID>urn:uuid:cd305321-f185-40a0-b41c-fa2efdaa4a09</wsa:MessageID>
</env:Header>
<env:Body>
<ns0:createAttachmentResponse xmlns:ns0="http://xmlns.oracle.com/apps/crmCommon/
activities/activityManagementService/types/">
<result xmlns="http://xmlns.oracle.com/apps/crmCommon/activities/
activityManagementService/types/">SUCCESS</result>
</ns0:createAttachmentResponse>
</env:Body>
</env:Envelope>
```

Contract Web Service Sample Payloads

The following topics describe the sample payloads for ContractService External V2, for different use cases.

For each use case, you can find the contract type, the operation involved to invoke the web service, followed by sample payload.

Add New Contract Line to an Existing Contract

In this use case, we will create use mergeContract to create a new contract line to an existing contract.

Operation: **mergeContract**

```
<soapenv:Header/>
    <soapenv:Body>
        <typ:mergeContract>
            <typ:contractHeader>
                <con:Id>300000257967465</con:Id>
                <con:MajorVersion>1</con:MajorVersion>
                <con:Cognomen>Test SOAP WT Contract 002aa</con:Cognomen>
                <con:ContractLine>
                    <con:LineNumber>2</con:LineNumber>
                    <con:LineTypeId>300000000099381</con:LineTypeId>
                    <con:LineTypeName>Free-form, project</con:LineTypeName>
                    <con:ItemNameTxt>Line number 2</con:ItemNameTxt>
                </con:ContractLine>
            </typ:contractHeader>
        </typ:mergeContract>
    </soapenv:Body>
</soapenv:Envelope>
```

Add Project Line with Associated Project

In this use case, we'll add a project line with the associated project.

Contract type: Project

Operation: **mergeContract**

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:mergeContract xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/types/">
 <ns1:contractHeader xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/">
 <ns2:Id>300100095009733</ns2:Id>
 <ns2:MajorVersion>1</ns2:MajorVersion>
 <ns2:ContractLine>
 <ns2:LineNumber>1</ns2:LineNumber>
 <ns2:LineTypeId>102</ns2:LineTypeId>
 <ns2:Object1Id1>8313</ns2:Object1Id1>
 <ns2:ItemName>AS55888</ns2:ItemName>
 <ns2:ItemDescription>Sentinel Standard Desktop</ns2:ItemDescription>
 <ns2:StartDate>2016-09-21</ns2:StartDate>
 <ns2:AssociatedProject xmlns:ns3="http://xmlns.oracle.com/apps/projects/billing/contracts/
contractPublicService/">
 <ns3:ProjectId>300100048824006</ns3:ProjectId>
 <ns3:FundingAmount currencyCode="USD">6000.00</ns3:FundingAmount>
 <ns3:ActiveFlag>true</ns3:ActiveFlag>
 </ns2:AssociatedProject>
 </ns2:ContractLine>
 </ns1:contractHeader>
 </ns1:mergeContract>
 </soap:Body>
</soap:Envelope>
```

Apply Hold on a Contract

In this use case, we'll apply hold on a contract.

Contract type: All

Operation: **applyHoldOnContract**

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:applyHoldOnContract xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/
types/">
 <ns1:contractId>300100093217887</ns1:contractId>
 <ns1:holdUntilDate>2016-10-30</ns1:holdUntilDate>
 <ns1:holdReasonCode>HOLD_QUALITY</ns1:holdReasonCode>
 <ns1:applyHldRsnSetId>21</ns1:applyHldRsnSetId>
 </ns1:applyHoldOnContract>
 </soap:Body>
</soap:Envelope>
```

Apply Hold on a Contract Line

In this use case, we'll apply hold on a contract line.

Contract type: All

Operation: **applyHoldOnContract**

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
```

```
 <soap:Body>
 <ns1:applyHoldOnContract xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/
types/">
 <ns1:lineId>300100093217887</ns1:lineId>
 <ns1:holdUntilDate>2016-10-30</ns1:holdUntilDate>
 <ns1:holdReasonCode>HOLD</ns1:holdReasonCode>
 <ns1:applyHldRsnSetId>21</ns1:applyHldRsnSetId>
 </ns1:applyHoldOnContract>
 </soap:Body>
</soap:Envelope>
```

Associate a Project to an Existing Line

In this use case, we'll associate a project to an existing contract line.

Contract type: Project

Operation: **mergeContract**

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
<soap:Body>
<ns1:mergeContract xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/types/">
<ns1:contractHeader xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/">
<ns2:Id>300100095009733</ns2:Id>
<ns2:MajorVersion>1</ns2:MajorVersion>
<ns2:ContractLine>
<ns2:Id>300100095009743</ns2:Id>
<ns2:MajorVersion>1</ns2:MajorVersion>
<ns2:AssociatedProject xmlns:ns3="http://xmlns.oracle.com/apps/projects/billing/contracts/
contractPublicService/">
<ns3:ProjectId>300100048824006</ns3:ProjectId>
<ns3:FundingAmount currencyCode="USD">6000.00</ns3:FundingAmount>
<ns3:ActiveFlag>true</ns3:ActiveFlag>
</ns2:AssociatedProject>
</ns2:ContractLine>
</ns1:contractHeader>
</ns1:mergeContract>
</soap:Body>
</soap:Envelope>
```

Associate Bill Plan and Revenue Plan to a Line

In this use case, we'll associate bill plan and revenue plan to a contract line.

Contract type: Project

Operation: **updateContract**

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
<soap:Body>
<ns1:updateContract xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/types/">
<ns1:contractHeader xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/">
<ns2:Id>300100156339520</ns2:Id>
<ns2:MajorVersion>1</ns2:MajorVersion>
<ns2:ContractLine>
<ns2:Id>300100156339524</ns2:Id>
<ns2:MajorVersion>1</ns2:MajorVersion>
<ns2:BillPlanId>300100156339525</ns2:BillPlanId>
```

```
<ns2:RevenuePlanId>300100156339525</ns2:RevenuePlanId>
</ns2:ContractLine>
</ns1:contractHeader>
</ns1:updateContract>
</soap:Body>
</soap:Envelope>
```

Create Contract with Child Entities

In this use case, we'll create a contract with the following child entities: lines, associated project, contract parties, contract party contacts, bill plan, revenue plan, and billing control.

Contract type: Project

Operation: **createContract**

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:createContract xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/
types/">
 <ns1:contractHeader xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/">
 <ns2:OrgId>204</ns2:OrgId>
 <ns2:InvOrganizationId>204</ns2:InvOrganizationId>
 <ns2:ContractTypeId>104</ns2:ContractTypeId>
<ns2:ContractNumber>VinSellContract09252016a</ns2:ContractNumber>
<ns2:CurrencyCode>USD</ns2:CurrencyCode>
<ns2:ContractParty>
<ns2:PartyRoleCode>CUSTOMER</ns2:PartyRoleCode>
<ns2:PartyId>1004</ns2:PartyId>
<ns2:ContractPartyContact>
<ns2:ContactRoleCode>PARTY_CONTACT</ns2:ContactRoleCode>
<ns2:ContactId>2888</ns2:ContactId>
</ns2:ContractPartyContact>
</ns2:ContractParty>
<ns2:ContractLine>
<ns2:LineNumber>1</ns2:LineNumber>
<ns2:LineTypeId>102</ns2:LineTypeId>
<ns2:Object1Id1>8313</ns2:Object1Id1>
<ns2:ItemName>AS55888</ns2:ItemName>
<ns2:AssociatedProject xmlns:ns3="http://xmlns.oracle.com/apps/projects/billing/contracts/
contractPublicService/">
<ns3:ProjectId>300100155887540</ns3:ProjectId>
<ns3:TaskNumber>RECEIPTPROJECT1</ns3:TaskNumber>
<ns3:FundingAmount currencyCode="USD">6000.00</ns3:FundingAmount>
<ns3:ActiveFlag>true</ns3:ActiveFlag>
</ns2:AssociatedProject>
</ns2:ContractLine>
<ns2:BillPlan xmlns:ns3="http://xmlns.oracle.com/apps/projects/billing/contracts/contractPublicService/">
<ns3:BillMethodId>1005</ns3:BillMethodId>
<ns3:BillPlanName>TEST_IP1_BP_01</ns3:BillPlanName>
<ns3:InvoiceCurrencyOptCode>CONTRACT</ns3:InvoiceCurrencyOptCode>
<ns3:PaymentTermsId>4</ns3:PaymentTermsId>
<ns3:BillSetNumber>1</ns3:BillSetNumber>
<ns3:BillToCustomerAccountId>1004</ns3:BillToCustomerAccountId>
<ns3:BillToSiteUseId>1017</ns3:BillToSiteUseId>
<ns3:BillToContactId>3773</ns3:BillToContactId>
<ns3:BillingCycleId>4003</ns3:BillingCycleId>
<ns3:LaborInvoiceFormatId>100000011406004</ns3:LaborInvoiceFormatId>
<ns3:NlInvoiceFormatId>100000011410007</ns3:NlInvoiceFormatId>
<ns3:EventsInvoiceFormatId>100000011213021</ns3:EventsInvoiceFormatId>
</ns2:BillPlan>
```

```
<ns2:RevenuePlan xmlns:ns3="http://xmlns.oracle.com/apps/projects/billing/contracts/contractPublicService/">
<ns3:BillMethodId>3009</ns3:BillMethodId>
<ns3:BillPlanName>Test Revenue Plan</ns3:BillPlanName>
</ns2:RevenuePlan>
<ns2:BillingControl xmlns:ns3="http://xmlns.oracle.com/apps/projects/billing/contracts/
contractPublicService/">
<ns3:StartDate>2016-09-25</ns3:StartDate>
<ns3:HardLimitAmount currencyCode=""><ns3:HardLimitAmount>
<ns3:ActiveFlag>true</ns3:ActiveFlag>
</ns2:BillingControl>
</ns1:contractHeader>
<ns1:createContract>
</soap:Body>
</soap:Envelope>
```

Related Topics

Create Contract with Header and Line DFFs (Global and CSS)

In this use case, we'll create a contract with header and line Dynamic Flex Fields (DFFs).

Contract type: All

Operation: **createContract**

Note that DFFs are supported only through standard operations.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
<oap:Body>
<ns1:createContract xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/types/">
<ns1:contractHeader xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/">
<ns2:OrgId>204</ns2:OrgId>
<ns2:ContractTypeId>104</ns2:ContractTypeId>
<ns2:ContractNumber>VinSellContract09252016d</ns2:ContractNumber>
<ns2:PartyId>1000</ns2:PartyId>
<ns2:InvOrganizationId>204</ns2:InvOrganizationId>
<ns2:CurrencyCode>USD</ns2:CurrencyCode>
<ns2:ContractHeaderFlexfieldVA xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/header/flex/
header/" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:type="ns3:ZokcDffContext">
<ns3:gsegment1>DEF</ns3:gsegment1>
<ns3:dffNumber>567</ns3:dffNumber>
<ns3:__FLEX_Context>ZOKC_DFF_CONTEXT</ns3:__FLEX_Context>
<ns3:zokcDffCssNumber>7777</ns3:zokcDffCssNumber>
<ns3:zokcDffCssText>PQR</ns3:zokcDffCssText>
<ns3:zokcDffCssDate>2016-07-05</ns3:zokcDffCssDate>
</ns2:ContractHeaderFlexfieldVA>
<ns2:ContractLine>
<ns2:LineNumber>1</ns2:LineNumber>
<ns2:LineTypeId>102</ns2:LineTypeId>
<ns2:Object1Id1>8313</ns2:Object1Id1>
<ns2:ItemName>AS55888</ns2:ItemName>
<ns2:ContractAllLineDesFlexVA xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/
coreAuthoring/lines/" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xsi:type="ns4:ContractLineDescFlexfieldSPMConLineGSegment1Context1">
<ns4:_SPMConLineGSegment1>Z</ns4:_SPMConLineGSegment1>
<ns4:biLineSegment1>ABC</ns4:biLineSegment1>
<ns4:__FLEX_Context>SPMConLineGSegment1Context1</ns4:__FLEX_Context>
<ns4:_SPMConLineGSegment1Con1CSS1>Q</ns4:_SPMConLineGSegment1Con1CSS1>
</ns2:ContractAllLineDesFlexVA>
</ns2:ContractLine>
</ns1:contractHeader>
```

```
</ns1:createContract>
</soap:Body>
</soap:Envelope>
```

Create Sales Agreement with Lines, Sales Credits (Header Level), Parties, and Contacts

In this use case, we'll create sales agreement with lines, sales credits (header level), parties, and contacts.

Contract type: Sales Agreement

Operation: **createContract**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:typ="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/types/"
xmlns:con="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/"
xmlns:head="http://xmlns.oracle.com/apps/contracts/coreAuthoring/header/flex/header/"
xmlns:par="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/partyContact/"
xmlns:par1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/"
xmlns:lin="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/"
xmlns:con1="http://xmlns.oracle.com/apps/projects/billing/contracts/contractPublicService/"
xmlns:con2="http://xmlns.oracle.com/apps/projects/billing/contracts/contractBillingService/"
xmlns:bil="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<soapenv:Header/>
<soapenv:Body>
 <typ:createContract>
 <typ:contractHeader>
 <con:OrgId>204</con:OrgId>
 <con:InvOrganizationId>204</con:InvOrganizationId>
 <con:ContractTypeId>104</con:ContractTypeId>
 <con:ContractNumber>VIN-SASA-Test-WS1</con:ContractNumber>
 <con:CurrencyCode>USD</con:CurrencyCode>
 <con:ContractParty>
 <con:PartyRoleCode>CUSTOMER</con:PartyRoleCode>
 <con:PartyId>1004</con:PartyId>
 <con:ContractPartyContact>
 <con:ContactRoleCode>PARTY_CONTACT</con:ContactRoleCode>
 <con:ContactId>2888</con:ContactId>
 </con:ContractPartyContact>
 </con:ContractParty>
 <con:ContractLine>
 <con:LineNumber>1</con:LineNumber>
 <con:LineTypeId>102</con:LineTypeId>
 <con:Object1Id1>79</con:Object1Id1>
 <con:ItemName>f40000</con:ItemName>
 <con:UOMCode>Ea</con:UOMCode>
 <con:AdjustmentTypeCode>DISCOUNT_AMOUNT</con:AdjustmentTypeCode>
 <con:AdjustmentAmount>45</con:AdjustmentAmount>
 </con:ContractLine>
 <con:SalesCredit>
 <con:ActiveYn>Y</con:ActiveYn>
 <con:Percent>100</con:Percent>
 <con:SalesCreditTypeId>1</con:SalesCreditTypeId>
 <con:SalesrepId>100000008143167</con:SalesrepId>
 </con:SalesCredit>
 </typ:contractHeader>
 </typ:createContract>
</soapenv:Body>
```

```
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/ContractService/
createContractResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:bf68d5b5-0d87-4435-bd47-1c4bb3bb4720</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:createContractResponse xmlns:ns0="http://xmlns.oracle.com/apps/contracts/coreAuthoring/
contractService/types/">
 <ns2:result xsi:type="ns1:ContractHeaderResult"
xmlns:ns7="http://xmlns.oracle.com/apps/contracts/coreAuthoring/header/flex/header/"
xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/"
xmlns:ns5="http://xmlns.oracle.com/apps/projects/billing/contracts/contractPublicService/"
xmlns:ns6="http://xmlns.oracle.com/apps/projects/billing/contracts/contractBillingService/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/types/">
 <ns1:Value>
 <ns1:Id>300100559222639</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:ExternalSource>FUSION</ns1:ExternalSource>
 <ns1:ExternalKey>300100559222639</ns1:ExternalKey>
 <ns1:InvConvRateTypeName>Corporate</ns1:InvConvRateTypeName>
 <ns1:InvConvRateDateTypeName>Transaction date</ns1:InvConvRateDateTypeName>
 <ns1:OrgName>Vision Operations</ns1:OrgName>
 <ns1:OrgId>204</ns1:OrgId>
 <ns1:ContractTypeName>Sell : Project lines</ns1:ContractTypeName>
 <ns1:ContractClass>CONTRACT</ns1:ContractClass>
 <ns1:ContractTypeId>104</ns1:ContractTypeId>
 <ns1:ContractNumber>VIN-SASA-Test-WS1</ns1:ContractNumber>
 <ns1:ContractNumberModifier xsi:nil="true"/>
 <ns1:Cognomen xsi:nil="true"/>
 <ns1:BuyOrSell>S</ns1:BuyOrSell>
 <ns1:PartyId>1004</ns1:PartyId>
 <ns1:PartyName>Hilman and Associates</ns1:PartyName>
 <ns1:InvOrganizationId>204</ns1:InvOrganizationId>
 <ns1:StsCode>DRAFT</ns1:StsCode>
 <ns1:CurrencyCode>USD</ns1:CurrencyCode>
 <ns1:StartDate>2022-06-22</ns1:StartDate>
 <ns1:EndDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:InvConvRateType>Corporate</ns1:InvConvRateType>
 <ns1:InvConvRateDateType>TRANSACTION</ns1:InvConvRateDateType>
 <ns1:InvConvRateDate xsi:nil="true"/>
 <ns1:InvTrxTypeId xsi:nil="true"/>
 <ns1:InvTrxTypeName xsi:nil="true"/>
 <ns1:BillToAccountId xsi:nil="true"/>
 <ns1:BillToAccount xsi:nil="true"/>
 <ns1:BillToAccountNumber xsi:nil="true"/>
 <ns1:BillToSiteUseId xsi:nil="true"/>
 <ns1:BillToSiteUseLocation xsi:nil="true"/>
 <ns1:ShipToAccountId xsi:nil="true"/>
 <ns1:ShipToAccount xsi:nil="true"/>
 <ns1:ShipToAccountNumber xsi:nil="true"/>
 <ns1:ShipToSiteUseId xsi:nil="true"/>
 <ns1:ShipToSiteUseLocation xsi:nil="true"/>
 <ns1:SoldToAccountId xsi:nil="true"/>
 <ns1:SoldToAccount xsi:nil="true"/>
 <ns1:SoldToAccountNumber xsi:nil="true"/>
```

```
<ns1:SoldToSiteId xsi:nil="true"/>
<ns1:SoldToNumber xsi:nil="true"/>
<ns1:SoldToAddress xsi:nil="true"/>
<ns1:SoldToAccountDescription xsi:nil="true"/>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:LegalEntityId>204</ns1:LegalEntityId>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:DateApproved xsi:nil="true"/>
<ns1:DatetimeCancelled xsi:nil="true"/>
<ns1:DateSigned xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:TerminateCancelSource xsi:nil="true"/>
<ns1:ContributionPercent>1</ns1:ContributionPercent>
<ns1:BillSequence xsi:nil="true"/>
<ns1:OverallRiskCode xsi:nil="true"/>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:Description xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:AmendmentEffectiveDate xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ProjectEnabledFlag>true</ns1:ProjectEnabledFlag>
<ns1:OutputTaxSetId>204</ns1:OutputTaxSetId>
<ns1:PartyObjectType>OKX_PARTY</ns1:PartyObjectType>
<ns1:PrimaryLedgerId>1</ns1:PrimaryLedgerId>
<ns1:CustomerPartyId xsi:nil="true"/>
<ns1:CustomerPartySiteId xsi:nil="true"/>
<ns1:GeneratedInvoiceStatus>D</ns1:GeneratedInvoiceStatus>
<ns1:OwningOrgId xsi:nil="true"/>
<ns1:NetInvoiceFlag xsi:nil="true"/>
<ns1:VersionType>C</ns1:VersionType>
<ns1:OwningOrgName xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:ExemptionReasonMeaning xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:ApTermsId xsi:nil="true"/>
<ns1:ServiceEnabledFlag>false</ns1:ServiceEnabledFlag>
<ns1:EstimatedAmount currencyCode="USD">0.00</ns1:EstimatedAmount>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:LastUpdateDate>2022-06-22T03:01:29.217Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>E19F121946A94008E053D711F10A0B76</ns1:LastUpdateLogin>
<ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:CreationDate>2022-06-22T03:00:38.003Z</ns1:CreationDate>
<ns1:LedgerCurrency>USD</ns1:LedgerCurrency>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:AgreementEnabledFlag>false</ns1:AgreementEnabledFlag>
<ns1:CloseReason xsi:nil="true"/>
<ns1:CancelReason xsi:nil="true"/>
<ns1:AuthoringPartyCode>INTERNAL</ns1:AuthoringPartyCode>
<ns1:HoldReasonMeaning xsi:nil="true"/>
<ns1:PrimaryPartyId>1004</ns1:PrimaryPartyId>
<ns1:PersonId>100010024202546</ns1:PersonId>
<ns1:SalesAccountId xsi:nil="true"/>
<ns1:OrigSystemId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:AllowExternalItemFlag>false</ns1:AllowExternalItemFlag>
<ns1:SalesAccountName xsi:nil="true"/>
<ns1:ItemSourceCode>PRODUCT_MASTER</ns1:ItemSourceCode>
<ns1:StateTransitionFlowName xsi:nil="true"/>
```

```
<ns1:StateTransitionFlowState>DRAFT</ns1:StateTransitionFlowState>
<ns1:UserStatusCode xsi:nil="true"/>
<ns1:AssigneeType xsi:nil="true"/>
<ns1:AssigneeId xsi:nil="true"/>
<ns1:Assignee xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:AccessLevel>UPDATE</ns1:AccessLevel>
<ns1:TemplateFlag>false</ns1:TemplateFlag>
<ns1:BillingSalesrepId xsi:nil="true"/>
<ns1:BillingSalesrepName xsi:nil="true"/>
<ns1:VersionDescription xsi:nil="true"/>
<ns1:Comment xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:AdjustmentBasis xsi:nil="true"/>
<ns1:CommitmentAmount currencyCode="USD">0</ns1:CommitmentAmount>
<ns1:PricingCalendarId xsi:nil="true"/>
<ns1:PricingPeriodType xsi:nil="true"/>
<ns1:PricingCalendarName xsi:nil="true"/>
<ns1:DiscountPercent xsi:nil="true"/>
<ns1:PriceListName xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:WebServiceFlag>false</ns1:WebServiceFlag>
<ns1:TermsTemplateId xsi:nil="true"/>
<ns1:ContractOwnerId xsi:nil="true"/>
<ns1:Status/>
<ns1:AuthoringPartyMeaning>Internal</ns1:AuthoringPartyMeaning>
<ns1:InvOrgName>Vision Operations</ns1:InvOrgName>
<ns1:Supplier/>
<ns1:SupplierSite xsi:nil="true"/>
<ns1:ShipInvOrg/>
<ns1:RecvInvOrg/>
<ns1:Currency>US Dollar</ns1:Currency>
<ns1:UserStatusMeaning/>
<ns1:LegalEntityName>Vision Operations</ns1:LegalEntityName>
<ns1:ShipToOrgLocation/>
<ns1:ChrType xsi:nil="true"/>
<ns1:EnableElectronicSignFlag>false</ns1:EnableElectronicSignFlag>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:AllowCurrencyOverrideFlag xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:ContractTrueValue xsi:nil="true"/>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:PricingSegmentExplanation xsi:nil="true"/>
<ns1:PricingStrategyExplanation xsi:nil="true"/>
<ns1:SegmentExplanationMessageName xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:Subtotal xsi:nil="true"/>
<ns1:PricingStrategyId xsi:nil="true"/>
<ns1:PricingStrategyName xsi:nil="true"/>
<ns1:PricingSegmentCode xsi:nil="true"/>
<ns1:InvConversionRate xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PricingEffectivityDate>2022-06-22T00:00:00Z</ns1:PricingEffectivityDate>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:PeriodStartUsed xsi:nil="true"/>
<ns1:PeriodTypeUsed xsi:nil="true"/>
<ns1:InvoiceRuleName xsi:nil="true"/>
<ns1:AccountRuleName xsi:nil="true"/>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:PaymentTermId xsi:nil="true"/>
<ns1:PaymentTermName xsi:nil="true"/>
<ns1:CustomerPartyName xsi:nil="true"/>
```

```
 <ns1:CustomerPartySiteName xsi:nil="true"/>
 <ns1:PeriodTypeMeaning xsi:nil="true"/>
 <ns1:PeriodStartMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:ContractCreditedAmount xsi:nil="true"/>
 <ns1:ContractInvoicedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:TermsTemplateName xsi:nil="true"/>
 <ns1:DocumentSubType xsi:nil="true"/>
 <ns1:RenewalType xsi:nil="true"/>
 <ns1:UnderAmendVersionFlag xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:UnderMigrationFlag xsi:nil="true"/>
 <ns1:ContractId>300100559222640</ns1:ContractId>
 <ns1:CorpCurrencyCode>USD</ns1:CorpCurrencyCode>
 <ns1:CurcyConvRateType>Corporate</ns1:CurcyConvRateType>
 <ns1:QuoteToContactId xsi:nil="true"/>
 <ns1:QuoteToContact xsi:nil="true"/>
 <ns1:NegotiationCommChannel xsi:nil="true"/>
 <ns1:NegotiationCustomerAcceptance xsi:nil="true"/>
 <ns1:NegotiationEnableNotification xsi:nil="true"/>
 <ns1:NegotiationInternalApproval xsi:nil="true"/>
 <ns1:NegotiationLanguage xsi:nil="true"/>
 <ns1:QuoteToCopyToEmail xsi:nil="true"/>
 <ns1:QuotePhone xsi:nil="true"/>
 <ns1:QuoteFax xsi:nil="true"/>
 <ns1:QuoteEmail xsi:nil="true"/>
 <ns1:QuoteAddress xsi:nil="true"/>
 <ns1:QuoteOrg xsi:nil="true"/>
 <ns1:QuoteAccount xsi:nil="true"/>
 <ns1:PrimarySalesrepId xsi:nil="true"/>
 <ns1:PrimarySalesRepresentative xsi:nil="true"/>
 <ns1:NegotiationContractLayoutTemplate xsi:nil="true"/>
 <ns1:NegotiationTermsLayoutTemplate xsi:nil="true"/>
 <ns1:TransactionTypeName xsi:nil="true"/>
 <ns1:AutoSendForSignature>N</ns1:AutoSendForSignature>
 <ns1:PriceApplicationRule>APPLY_TO_ALL_PRICE_LIST</ns1:PriceApplicationRule>
 <ns1:EsignTemplateId xsi:nil="true"/>
 <ns1:NonStandardClauseCount>0</ns1:NonStandardClauseCount>
 <ns1:ContractPuid>KHDR-34070</ns1:ContractPuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:RunContractExpertFlag>true</ns1:RunContractExpertFlag>
 <ns1:IgnoreQAWarningsFlag>false</ns1:IgnoreQAWarningsFlag>
 <ns1:BaseContractYN>N</ns1:BaseContractYN>
 <ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
 <ns1:Id>300100559222641</ns1:Id>
 <ns1:PartyRoleCode>CUSTOMER</ns1:PartyRoleCode>
 <ns1:Role>Customer</ns1:Role>
 <ns1:PartyId>1004</ns1:PartyId>
 <ns1:PartyName>Hilman and Associates</ns1:PartyName>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:SignedBy xsi:nil="true"/>
 <ns1:SignedDate xsi:nil="true"/>
 <ns1:SignerRole xsi:nil="true"/>
 <ns1:ExternalSource>FUSION</ns1:ExternalSource>
 <ns1:ExternalKey>300100559222641</ns1:ExternalKey>
 <ns1:DeleteFlag>false</ns1:DeleteFlag>
 <ns1:PartyRolePuid>KHDR-34070-PRTY-33125</ns1:PartyRolePuid>
 <ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
 <ns1:Id>300100559222643</ns1:Id>
 <ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
 <ns1:Role>Customer contact</ns1:Role>
```

```
<ns1:ContactId>2888</ns1:ContactId>
<ns1:OwnerFlag>false</ns1:OwnerFlag>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100559222642</ns1:ExternalKey>
<ns1:AccessLevel xsi:nil="true"/>
<ns1:AccessLevelName xsi:nil="true"/>
<ns1:SignerYn xsi:nil="true"/>
<ns1:PartyContactName>Anna Nyqvist</ns1:PartyContactName>
<ns1:SignerSequence xsi:nil="true"/>
<ns1:RoutingSequence xsi:nil="true"/>
<ns1:SignatureRole xsi:nil="true"/>
<ns1:SignatureRoleMeaning xsi:nil="true"/>
<ns1:ContactPuid>KHDR-34070-PRTY-33125-CNTC-31487</ns1:ContactPuid>
</ns1:ContractPartyContact>
</ns1:ContractParty>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>300100559222644</ns1:Id>
<ns1:LineId>300100559222645</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>DRAFT</ns1:StsCode>
<ns1:LineStatus>Draft</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2022-06-22</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>Ea</ns1:UOMCode>
<ns1:UnitOfMeasure>Each</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity xsi:nil="true"/>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount xsi:nil="true"/>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode>ESTIMATED</ns1:CommitLevelCode>
<ns1:CommitLevel>Estimated</ns1:CommitLevel>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
```

```
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId xsi:nil="true"/>
<ns1:ShipToAccount xsi:nil="true"/>
<ns1:ShipToAccountNumber xsi:nil="true"/>
<ns1:ShipToSiteUseId xsi:nil="true"/>
<ns1:ShipToSite xsi:nil="true"/>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:WareHouse xsi:nil="true"/>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount currencyCode="USD">0</ns1:InvoicedAmount>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>N</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen xsi:nil="true"/>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100559222644</ns1:ExternalKey>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
```

```
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId xsi:nil="true"/>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity xsi:nil="true"/>
<ns1:PriceItemUOM>Ea</ns1:PriceItemUOM>
<ns1:BillToAccountDescription xsi:nil="true"/>
<ns1:BillToAccount xsi:nil="true"/>
<ns1:BillToAccountNumber xsi:nil="true"/>
<ns1:BillToSiteUseLocation xsi:nil="true"/>
<ns1:BillToSiteUseId xsi:nil="true"/>
<ns1:BillToAddress xsi:nil="true"/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId xsi:nil="true"/>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn>N</ns1:PriceDuringBillingYn>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>KHDR-34070-LINE-48712</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
</ns1:ContractLine>
<ns1:SalesCredit>
<ns1:Id>300100559222646</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Percent>100</ns1:Percent>
<ns1:SalesrepId>100000008143167</ns1:SalesrepId>
<ns1:SalesCreditTypeId>1</ns1:SalesCreditTypeId>
<ns1:ActiveFlag>false</ns1:ActiveFlag>
<ns1:SalesrepName>Lieke Spundel</ns1:SalesrepName>
<ns1:StartDate>2022-06-22</ns1:StartDate>
```

```
<ns1:EndDate xsi:nil="true"/>
<ns1:ExternalSourceKey>FUSION</ns1:ExternalSourceKey>
<ns1:ExternalReferenceKey>300100559222646</ns1:ExternalReferenceKey>
<ns1:SalesCreditType>Quota Sales Credit</ns1:SalesCreditType>
<ns1:SalesCreditPuid>KHDR-34070-SCRD-982</ns1:SalesCreditPuid>
</ns1:SalesCredit>
<ns1:OKCSOPText_c>OKC Default text value check</ns1:OKCSOPText_c>
<ns1:OKCSOPNumber_c xsi:nil="true"/>
<ns1:OKCSOPDate_c xsi:nil="true"/>
<ns1:OKCSOPLong_c xsi:nil="true"/>
<ns1:OKCSOPDCL_Id_c xsi:nil="true"/>
<ns1:OKCSOPDCL_c xsi:nil="true"/>
</ns1:Value>
</ns2:result>
</ns0:createContractResponse>
</env:Body>
</env:Envelope>
```

Create Sale Agreement with Lines with Terms Defaulted from Price List Charges

Note: The charges for the item should be defined in Pricing

Request Body

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
<soap:Body>
<ns1:createContract
xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/types/">
<ns1:contractHeader
xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/">
<ns2:OrgName>Vision Operations</ns2:OrgName>
<ns2:ContractTypeName>Sales Agreement
Integrated</ns2:ContractTypeName>
<ns2:ContractNumber>CONTRACTNUMBER</ns2:ContractNumber>
<ns2:PartyName>PARTYNAME</ns2:PartyName>
<ns2:InvOrgName>INVORGNAME</ns2:InvOrgName>
<ns2:ContractLine>
<ns2:LineTypeName>Product</ns2:LineTypeName>
<ns2:ItemName>ITEMNAME</ns2:ItemName>
<ns2:PriceList>PRICELIST</ns2:PriceList>
</ns2:ContractLine>
<ns2:ContractLine>
<ns2:LineTypeName>Product</ns2:LineTypeName>
<ns2:ItemName>ITEMNAME</ns2:ItemName>
</ns2:ContractLine>
<ns2:ContractLine>
<ns2:LineTypeName>Product</ns2:LineTypeName>
<ns2:ItemName>ITEMNAME</ns2:ItemName>
</ns2:ContractLine>
</ns1:contractHeader>
</ns1:createContract>
</soap:Body>
</soap:Envelope>
```

Update Sale Agreement with Lines

Operation: **mergeContract**

Request Body

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
<soap:Body>
<ns1:mergeContract
xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/types/">
<ns1:contractHeader
xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/">
<ns2:Id>ID</ns2:Id>
<ns2:MajorVersion>VERSIONNUMBER</ns2:MajorVersion>
<ns2:ContractLine>
<ns2:Id>ID</ns2:Id>
<ns2:MajorVersion>VERSIONNUMBER</ns2:MajorVersion>
<ns2:PricingTerm>

<ns2:PricingTermId>PRICINGTERMID</ns2:PricingTermId>
<ns2:AdjustmentAmount>AMOUNT</ns2:AdjustmentAmount>

<ns2:AdjustmentTypeCode>DISCOUNT_PERCENT</ns2:AdjustmentTypeCode>

<ns2:AdjustmentBasisId>ADJUSTMENTBASISID</ns2:AdjustmentBasisId>
</ns2:PricingTerm>
</ns2:ContractLine>
<ns2:ContractLine>
<ns2:Id>ID</ns2:Id>
<ns2:MajorVersion>MAJORVERSION</ns2:MajorVersion>
<ns2:PricingTerm>

<ns2:PricingTermId>PRICINGTERMID</ns2:PricingTermId>
<ns2:AdjustmentAmount>ADJUSTMENTAMOUNT</ns2:AdjustmentAmount>

<ns2:AdjustmentTypeCode>DISCOUNT_PERCENT</ns2:AdjustmentTypeCode>

<ns2:AdjustmentBasisId>ADJUSTMENTBASISID</ns2:AdjustmentBasisId>
</ns2:PricingTerm>
</ns2:ContractLine>
<ns2:ContractLine>
<ns2:Id>ID</ns2:Id>
<ns2:MajorVersion>1</ns2:MajorVersion>
<ns2:PricingTerm>

<ns2:PricingTermId>PRICINGTERMID</ns2:PricingTermId>
<ns2:PricingTermTierHeader>

<ns2:TieredPricingHeaderId>TIEREDPRICINGHEADERID</ns2:TieredPricingHeaderId>
<ns2:PricingTermTierLine>

<ns2:TieredPricingLineId>TIEREDPRICINGLINEID</ns2:TieredPricingLineId>
<ns2:Adjustment>ADJUSTMENT</ns2:Adjustment>

</ns2:PricingTermTierLine>
</ns2:PricingTermTierHeader>
</ns2:PricingTerm>
</ns2:ContractLine>
</ns1:contractHeader>
</ns1:mergeContract>
</soap:Body>
</soap:Envelope>
```

Note: You can't create pricing terms other then charges defined in Pricing.

Find Active Contracts Starting with in a Date Range

In this use case, we'll search for active contracts starting with in a date range.

Contract type: All

Operation: **findContract**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/types/" xmlns:typ1="http://xmlns.oracle.com/
adf/svc/types/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:findContract>
 <typ:findCriteria>
 <typ1:fetchStart>0</typ1:fetchStart>
 <typ1:fetchSize>10</typ1:fetchSize>
 <typ1:filter>
 <typ1:conjunction>And</typ1:conjunction>
 <typ1:group>
 <typ1:conjunction>And</typ1:conjunction>
 <typ1:upperCaseCompare></typ1:upperCaseCompare>
 <typ1:item>
 <typ1:conjunction>And</typ1:conjunction>
 <typ1:upperCaseCompare></typ1:upperCaseCompare>
 <typ1:attribute>StartDate</typ1:attribute>
 <typ1:operator>BETWEEN</typ1:operator>
 <typ1:value>2016-09-01</typ1:value>
 <typ1:value>2017-09-07</typ1:value>
 </typ1:item>
 <typ1:item>
 <typ1:conjunction>And</typ1:conjunction>
 <typ1:upperCaseCompare></typ1:upperCaseCompare>
 <typ1:attribute>StsCode</typ1:attribute>
 <typ1:operator>=</typ1:operator>
 <typ1:value>ACTIVE</typ1:value>
 </typ1:item>
 </typ1:group>
 </typ1:filter>
 </typ:findCriteria>
 <typ:findControl>
 <typ1:retrieveAllTranslations>false</typ1:retrieveAllTranslations>
 </typ:findControl>
 </typ:findContract>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/ContractService/
findContractResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:b324510a-5512-46f5-ab7d-f26c4fcce6da</wsa:MessageID>
 </env:Header>
 <env:Body>
```

```
 <ns0:findContractResponse xmlns:ns0="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/
types/">
 <ns2:result xsi:type="ns1:ContractHeaderResult" xmlns:ns7="http://xmlns.oracle.com/apps/contracts/
coreAuthoring/header/flex/header/" xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://
xmlns.oracle.com/adf/svc/types/" xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/
contractService/" xmlns:ns5="http://xmlns.oracle.com/apps/projects/billing/contracts/contractPublicService/"
 xmlns:ns6="http://xmlns.oracle.com/apps/projects/billing/contracts/contractBillingService/"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:ns2="http://xmlns.oracle.com/apps/contracts/
coreAuthoring/contractService/types/">
 <ns1:Value>
 <ns1:Id>300100169593123</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:ExternalSource>FUSION</ns1:ExternalSource>
 <ns1:ExternalKey>300100169593123</ns1:ExternalKey>
 <ns1:InvConvRateTypeName>Corporate</ns1:InvConvRateTypeName>
 <ns1:InvConvRateDateTypeName>Transaction date</ns1:InvConvRateDateTypeName>
 <ns1:OrgName>Vision Operations</ns1:OrgName>
 <ns1:OrgId>204</ns1:OrgId>
 <ns1:ContractTypeName>Sell : Interproject Project lines</ns1:ContractTypeName>
 <ns1:ContractClass>CONTRACT</ns1:ContractClass>
 <ns1:ContractTypeId>106</ns1:ContractTypeId>
 <ns1:ContractNumber>CDRM_PJB_IP_CONT2</ns1:ContractNumber>
 <ns1:ContractNumberModifier xsi:nil="true"/>
 <ns1:Cognomen>CDRM_PJB_IP_CONT2</ns1:Cognomen>
 <ns1:BuyOrSell>S</ns1:BuyOrSell>
 <ns1:PartyId>1398</ns1:PartyId>
 <ns1:PartyName>Internal-Vision Services</ns1:PartyName>
 <ns1:InvOrganizationId>204</ns1:InvOrganizationId>
 <ns1:StsCode>ACTIVE</ns1:StsCode>
 <ns1:CurrencyCode>EUR</ns1:CurrencyCode>
 <ns1:StartDate>2017-01-01</ns1:StartDate>
 <ns1:EndDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:InvConvRateType>Corporate</ns1:InvConvRateType>
 <ns1:InvConvRateDateType>TRANSACTION</ns1:InvConvRateDateType>
 <ns1:InvConvRateDate xsi:nil="true"/>
 <ns1:InvTrxTypeId>150</ns1:InvTrxTypeId>
 <ns1:InvTrxTypeName>PA Internal Invoice</ns1:InvTrxTypeName>
 <ns1:BillToAccountId>1398</ns1:BillToAccountId>
 <ns1:BillToAccount>Internal-Vision Services</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1187</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseId>1825</ns1:BillToSiteUseId>
 <ns1:BillToSiteUseLocation>HQ</ns1:BillToSiteUseLocation>
 <ns1:ShipToAccountId>1398</ns1:ShipToAccountId>
 <ns1:ShipToAccount>Internal-Vision Services</ns1:ShipToAccount>
 <ns1:ShipToAccountNumber>1187</ns1:ShipToAccountNumber>
 <ns1:ShipToSiteUseId>9689</ns1:ShipToSiteUseId>
 <ns1:ShipToSiteUseLocation>9689</ns1:ShipToSiteUseLocation>
 <ns1:SoldToAccountId>1398</ns1:SoldToAccountId>
 <ns1:SoldToAccount>Internal-Vision Services</ns1:SoldToAccount>
 <ns1:SoldToAccountNumber>1187</ns1:SoldToAccountNumber>
 <ns1:SoldToSiteId>1847</ns1:SoldToSiteId>
 <ns1:SoldToNumber xsi:nil="true"/>
 <ns1:SoldToAddress xsi:nil="true"/>
 <ns1:SoldToAccountDescription>Internal-Vision Services</ns1:SoldToAccountDescription>
 <ns1:ShipInvOrgId xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:LegalEntityId>204</ns1:LegalEntityId>
 <ns1:OutputTaxClassificationCode>FUSION_US CITY SALES STD RATE</ns1:OutputTaxClassificationCode>
 <ns1:DateApproved>2018-08-13</ns1:DateApproved>
 <ns1:DatetimeCancelled xsi:nil="true"/>
 <ns1:DateSigned>2018-08-13</ns1:DateSigned>
 <ns1:DateTerminated xsi:nil="true"/>
 <ns1:TerminateCancelSource xsi:nil="true"/>
 <ns1:ContributionPercent>1</ns1:ContributionPercent>
```

```
<ns1:BillSequence>1</ns1:BillSequence>
<ns1:OverallRiskCode xsi:nil="true"/>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:Description>zBI_Interproject</ns1:Description>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:AmendmentEffectiveDate xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ProjectEnabledFlag>true</ns1:ProjectEnabledFlag>
<ns1:OutputTaxSetId>204</ns1:OutputTaxSetId>
<ns1:PartyObjectType>OKX_INT_COMP_PARTY</ns1:PartyObjectType>
<ns1:PrimaryLedgerId>1</ns1:PrimaryLedgerId>
<ns1:CustomerPartyId>1398</ns1:CustomerPartyId>
<ns1:CustomerPartySiteId>9689</ns1:CustomerPartySiteId>
<ns1:GeneratedInvoiceStatus>D</ns1:GeneratedInvoiceStatus>
<ns1:OwningOrgId>204</ns1:OwningOrgId>
<ns1:NetInvoiceFlag>false</ns1:NetInvoiceFlag>
<ns1:VersionType>C</ns1:VersionType>
<ns1:OwningOrgName>Vision Operations</ns1:OwningOrgName>
<ns1:TaxClassificationMeaning>FUSION_US CITY SALES STD RATE</ns1:TaxClassificationMeaning>
<ns1:ExemptionReasonMeaning xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:ApTermsId xsi:nil="true"/>
<ns1:ServiceEnabledFlag>false</ns1:ServiceEnabledFlag>
<ns1:EstimatedAmount currencyCode="EUR">175000</ns1:EstimatedAmount>
<ns1:TaxAmount currencyCode="EUR">0</ns1:TaxAmount>
<ns1:LastUpdateDate>2018-08-13T11:23:33.839Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>717B1C8CB0FE7D0BE0534280F50AB7F6</ns1:LastUpdateLogin>
<ns1:LastUpdatedBy>Charles.Smith</ns1:LastUpdatedBy>
<ns1:CreatedBy>Charles.Smith</ns1:CreatedBy>
<ns1:CreationDate>2018-08-13T10:55:46.771Z</ns1:CreationDate>
<ns1:LedgerCurrency>USD</ns1:LedgerCurrency>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:AgreementEnabledFlag>false</ns1:AgreementEnabledFlag>
<ns1:CloseReason xsi:nil="true"/>
<ns1:CancelReason xsi:nil="true"/>
<ns1:AuthoringPartyCode xsi:nil="true"/>
<ns1:HoldReasonMeaning xsi:nil="true"/>
<ns1:PrimaryPartyId>1398</ns1:PrimaryPartyId>
<ns1:PersonId>100010032551061</ns1:PersonId>
<ns1:SalesAccountId xsi:nil="true"/>
<ns1:OrigSystemId>100000019829422</ns1:OrigSystemId>
<ns1:OrigSystemReference>3</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:AllowExternalItemFlag>false</ns1:AllowExternalItemFlag>
<ns1:SalesAccountName xsi:nil="true"/>
<ns1:ItemSourceCode>PRODUCT_MASTER</ns1:ItemSourceCode>
<ns1:StateTransitionFlowName xsi:nil="true"/>
<ns1:StateTransitionFlowState>ACTIVE</ns1:StateTransitionFlowState>
<ns1:UserStatusCode xsi:nil="true"/>
<ns1:AssigneeType xsi:nil="true"/>
<ns1:AssigneeId xsi:nil="true"/>
<ns1:Assignee xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:AccessLevel>UPDATE</ns1:AccessLevel>
<ns1:TemplateFlag>false</ns1:TemplateFlag>
<ns1:BillingSalesrepId xsi:nil="true"/>
<ns1:BillingSalesrepName xsi:nil="true"/>
<ns1:VersionDescription xsi:nil="true"/>
<ns1:Comment xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:AdjustmentBasis xsi:nil="true"/>
```

```
<ns1:CommitmentAmount currencyCode="EUR">0</ns1:CommitmentAmount>
<ns1:PricingCalendarId xsi:nil="true"/>
<ns1:PricingPeriodType xsi:nil="true"/>
<ns1:PricingCalendarName xsi:nil="true"/>
<ns1:DiscountPercent xsi:nil="true"/>
<ns1:PriceListName xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:WebServiceFlag xsi:nil="true"/>
<ns1:TermsTemplateId xsi:nil="true"/>
<ns1:ContractOwnerId xsi:nil="true"/>
<ns1:Status>Active</ns1:Status>
<ns1:AuthoringPartyMeaning xsi:nil="true"/>
<ns1:InvOrgName>Vision Operations</ns1:InvOrgName>
<ns1:Supplier/>
<ns1:SupplierSite xsi:nil="true"/>
<ns1:ShipInvOrg/>
<ns1:RecvInvOrg/>
<ns1:Currency>Euro</ns1:Currency>
<ns1:UserStatusMeaning/>
<ns1:LegalEntityName>Vision Operations</ns1:LegalEntityName>
<ns1:ShipToOrgLocation/>
<ns1:ChrType xsi:nil="true"/>
<ns1:EnableElectronicSignFlag>false</ns1:EnableElectronicSignFlag>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:AllowCurrencyOverrideFlag xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:ContractTrueValue xsi:nil="true"/>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:PricingSegmentExplanation xsi:nil="true"/>
<ns1:PricingStrategyExplanation xsi:nil="true"/>
<ns1:SegmentExplanationMessageName xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:Subtotal>0</ns1:Subtotal>
<ns1:PricingStrategyId xsi:nil="true"/>
<ns1:PricingStrategyName xsi:nil="true"/>
<ns1:PricingSegmentCode xsi:nil="true"/>
<ns1:InvConversionRate xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PricingEffectivityDate/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:PeriodStartUsed xsi:nil="true"/>
<ns1:PeriodTypeUsed xsi:nil="true"/>
<ns1:InvoiceRuleName xsi:nil="true"/>
<ns1:AccountRuleName xsi:nil="true"/>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:PaymentTermId xsi:nil="true"/>
<ns1:PaymentTermName xsi:nil="true"/>
<ns1:CustomerPartyName>Internal-Vision Services</ns1:CustomerPartyName>
<ns1:CustomerPartySiteName>9689</ns1:CustomerPartySiteName>
<ns1:PeriodTypeMeaning xsi:nil="true"/>
<ns1:PeriodStartMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:ContractCreditedAmount xsi:nil="true"/>
<ns1:ContractInvoicedAmount xsi:nil="true"/>
<ns1:UnbilledAmount currencyCode="EUR">0</ns1:UnbilledAmount>
<ns1:TermsTemplateName xsi:nil="true"/>
<ns1:DocumentSubType xsi:nil="true"/>
<ns1:RenewalType xsi:nil="true"/>
<ns1:UnderAmendVersionFlag xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
```

```
<ns1:UnderMigrationFlag xsi:nil="true"/>
<ns1:ContractId>300100169593124</ns1:ContractId>
<ns1:CorpCurrencyCode>USD</ns1:CorpCurrencyCode>
<ns1:CurcyConvRateType>Corporate</ns1:CurcyConvRateType>
<ns1:QuoteToContactId xsi:nil="true"/>
<ns1:QuoteToContact xsi:nil="true"/>
<ns1:NegotiationCommChannel xsi:nil="true"/>
<ns1:NegotiationCustomerAcceptance xsi:nil="true"/>
<ns1:NegotiationEnableNotification xsi:nil="true"/>
<ns1:NegotiationInternalApproval xsi:nil="true"/>
<ns1:NegotiationLanguage xsi:nil="true"/>
<ns1:QuoteToCopyToEmail xsi:nil="true"/>
<ns1:QuotePhone xsi:nil="true"/>
<ns1:QuoteFax xsi:nil="true"/>
<ns1:QuoteEmail xsi:nil="true"/>
<ns1:QuoteAddress xsi:nil="true"/>
<ns1:QuoteOrg xsi:nil="true"/>
<ns1:QuoteAccount xsi:nil="true"/>
<ns1:PrimarySalesrepId xsi:nil="true"/>
<ns1:PrimarySalesRepresentative xsi:nil="true"/>
<ns1:NegotiationContractLayoutTemplate xsi:nil="true"/>
<ns1:NegotiationTermsLayoutTemplate xsi:nil="true"/>
<ns1:TransactionTypeName xsi:nil="true"/>
<ns1:AutoSendForSignature xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:EsignTemplateId xsi:nil="true"/>
<ns1:NonStandardClauseCount>0</ns1:NonStandardClauseCount>
<ns1:ContractPuid>KHDR-1136</ns1:ContractPuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:RunContractExpertFlag xsi:nil="true"/>
<ns1:IgnoreQAWarningsFlag xsi:nil="true"/>
<ns1:BaseContractYN>N</ns1:BaseContractYN>
<ns1:ContractHeaderFlexfieldVA>
<ns7:ContractId>300100169593124</ns7:ContractId>
<ns7:FLEX_PARAM_ContractId>300100169593124</ns7:FLEX_PARAM_ContractId>
<ns7:biHeaderCode xsi:nil="true"/>
<ns7:biHeaderDff2 xsi:nil="true"/>
<ns7:zokcDffGText xsi:nil="true"/>
<ns7:zokcDffGDate xsi:nil="true"/>
<ns7:testName xsi:nil="true"/>
<ns7:zREL9BI68 xsi:nil="true"/>
<ns7:biqa3Code xsi:nil="true"/>
<ns7:zokcDffGNumber xsi:nil="true"/>
<ns7:pjbContractHeader14 xsi:nil="true"/>
<ns7:pjbContractHeader15 xsi:nil="true"/>
<ns7:zokcContractIntent xsi:nil="true"/>
<ns7:zokcContractLine xsi:nil="true"/>
<ns7:zokcContractLine_Display xsi:nil="true"/>
<ns7:__FLEX_Context xsi:nil="true"/>
<ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns7:_FLEX_NumOfSegments>12</ns7:_FLEX_NumOfSegments>
</ns1:ContractHeaderFlexfieldVA>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100169593130</ns1:Id>
<ns1:PartyRoleCode>INTERCOMPANY</ns1:PartyRoleCode>
<ns1:Role>Internal party</ns1:Role>
<ns1:PartyId>1398</ns1:PartyId>
<ns1:PartyName>Internal-Vision Services</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100169593130</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
```

```
<ns1:PartyRolePuid>PRTY-3197</ns1:PartyRolePuid>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>300100169593130</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100169593130</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100169593130</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100169593130</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100169593127</ns1:Id>
<ns1:PartyRoleCode>SUPPLIER</ns1:PartyRoleCode>
<ns1:Role>Supplier</ns1:Role>
<ns1:PartyId>204</ns1:PartyId>
<ns1:PartyName>Vision Operations</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100169593127</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-3118</ns1:PartyRolePuid>
<ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
<ns1:Id>300100169593129</ns1:Id>
<ns1:ContactRoleCode>CONTRACT_ADMIN</ns1:ContactRoleCode>
<ns1:Role>Contract administrator</ns1:Role>
<ns1:ContactId>100010032635417</ns1:ContactId>
<ns1:OwnerFlag>true</ns1:OwnerFlag>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100169593129</ns1:ExternalKey>
<ns1:AccessLevel>FULL</ns1:AccessLevel>
<ns1:AccessLevelName>Full</ns1:AccessLevelName>
<ns1:SignerYn xsi:nil="true"/>
<ns1:PartyContactName>Charles Smith</ns1:PartyContactName>
<ns1:SignerSequence xsi:nil="true"/>
<ns1:RoutingSequence xsi:nil="true"/>
<ns1:SignatureRole xsi:nil="true"/>
```

```
<ns1:SignatureRoleMeaning xsi:nil="true"/>
<ns1:ContactPuid>CNTC-5178</ns1:ContactPuid>
<ns1:ContractPartyContactFlexfieldVA>
<ns2:Id>300100169593129</ns2:Id>
<ns2:MajorVersion>1</ns2:MajorVersion>
<ns2:__FLEX_Context xsi:nil="true"/>
<ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
</ns1:ContractPartyContactFlexfieldVA>
</ns1:ContractPartyContact>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>300100169593127</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100169593127</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100169593127</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100169593127</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>CDRM_PJB_IP_CONT2</ns1:Cognomen>
<ns1:Description>zBI_Interproject</ns1:Description>
<ns1:Id>300100169593123</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>zBI_Interproject</ns1:Cognomen>
<ns1:Description>zBI_Interproject</ns1:Description>
<ns1:Id>300100169593123</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>KO</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>CDRM_PJB_IP_CONT2</ns1:Cognomen>
```

```
<ns1:Description>zBI_Interproject</ns1:Description>
<ns1:Id>300100169593123</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>100100090554281</ns1:Id>
<ns1:LineId>100100095871727</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>1</ns1:ItemName>
<ns1:ItemNameTxt>1</ns1:ItemNameTxt>
<ns1:ItemDescription>Line 1</ns1:ItemDescription>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode xsi:nil="true"/>
<ns1:UnitOfMeasure xsi:nil="true"/>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity xsi:nil="true"/>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount currencyCode="EUR">175000</ns1:LineValueAmount>
<ns1:LineAmount currencyCode="EUR">175000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
```

```
<ns1:ShipToAccountId>1398</ns1:ShipToAccountId>
<ns1:ShipToAccount>Internal-Vision Services</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1187</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>9689</ns1:ShipToSiteUseId>
<ns1:ShipToSite>9689</ns1:ShipToSite>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:WareHouse xsi:nil="true"/>
<ns1:BillPlanId>300100169593131</ns1:BillPlanId>
<ns1:BillPlan>Billplan</ns1:BillPlan>
<ns1:RevenuePlanId>300100169593132</ns1:RevenuePlanId>
<ns1:RevenuePlan>rev plan</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="EUR">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode>FUSION_US CITY SALES STD RATE</ns1:OutputTaxClassificationCode>
<ns1:OutputTaxClassMeaning>FUSION_US CITY SALES STD RATE</ns1:OutputTaxClassMeaning>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:TaxExemptionControlMeaning>Standard</ns1:TaxExemptionControlMeaning>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>N</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference>3</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:Cognomen xsi:nil="true"/>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>100100090554281</ns1:ExternalKey>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId xsi:nil="true"/>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
```

```
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity xsi:nil="true"/>
<ns1:PriceItemUOM xsi:nil="true"/>
<ns1:BillToAccountDescription xsi:nil="true"/>
<ns1:BillToAccount xsi:nil="true"/>
<ns1:BillToAccountNumber xsi:nil="true"/>
<ns1:BillToSiteUseLocation xsi:nil="true"/>
<ns1:BillToSiteUseId xsi:nil="true"/>
<ns1:BillToAddress xsi:nil="true"/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning>FUSION_US CITY SALES STD RATE</ns1:TaxClassificationMeaning>
<ns1:InvTrxTypeId>150</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-23665</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095871727</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095871727</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
```

```
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100090554281</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Line 1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100090554281</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Line 1'+Ø</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100090554281</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Line 1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:AssociatedProject>
<ns5:LinkId>300100169593147</ns5:LinkId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:ProjectId>300100169483875</ns5:ProjectId>
<ns5:ProjectNumber>CDRM_PJB_IP_PVDR2</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
<ns1:ProjectContractLineInternalAttributes>
<ns6:ContractId>300100169593123</ns6:ContractId>
<ns6:ContractLineId>100100090554281</ns6:ContractLineId>
<ns6:MajorVersion>1</ns6:MajorVersion>
<ns6:ProviderBusinessUnitId xsi:nil="true"/>
<ns6:ProviderBusinessUnitName xsi:nil="true"/>
<ns6:ReceiverProjectId>300100169483860</ns6:ReceiverProjectId>
<ns6:ReceiverProjectName>CDRM_PJB_IP_RCVR2</ns6:ReceiverProjectName>
<ns6:ReceiverTaskId>100100090552322</ns6:ReceiverTaskId>
<ns6:ReceiverTaskName>Production</ns6:ReceiverTaskName>
<ns6:OrganizationId>458</ns6:OrganizationId>
<ns6:OrganizationName>Vision Services</ns6:OrganizationName>
<ns6:ExpenditureTypeId>10005</ns6:ExpenditureTypeId>
```

```
<ns6:ExpenditureTypeName>Consulting</ns6:ExpenditureTypeName>
<ns6:ExpTypeOrigEiFlag>true</ns6:ExpTypeOrigEiFlag>
<ns6:ExpOrgSourceFlag>false</ns6:ExpOrgSourceFlag>
</ns1:ProjectContractLineInternalAttributes>
</ns1:ContractLine>
<ns1:BillPlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100169593131</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>1003</ns5:BillMethodId>
<ns5:BillMethodName>Bill Rate Invoice</ns5:BillMethodName>
<ns5:BillPlanName>Billplan</ns5:BillPlanName>
<ns5:InvoiceCurrencyOptCode>CONTRACT</ns5:InvoiceCurrencyOptCode>
<ns5:BillingCurrencyType>Contract</ns5:BillingCurrencyType>
<ns5:PaymentTermsId>4</ns5:PaymentTermsId>
<ns5:PaymentTerms>30 Net</ns5:PaymentTerms>
<ns5:BillSetNumber>1</ns5:BillSetNumber>
<ns5:BillToCustomerAccountId>1398</ns5:BillToCustomerAccountId>
<ns5:BillToAccountNumber>1187</ns5:BillToAccountNumber>
<ns5:BillToSiteUseId>1825</ns5:BillToSiteUseId>
<ns5:BillToSite>HQ</ns5:BillToSite>
<ns5:BillToContactId>4804</ns5:BillToContactId>
<ns5:BillToContactName>Bob Cochran</ns5:BillToContactName>
<ns5:BillToContactEmail>sendmail-test-discard@oracle.com</ns5:BillToContactEmail>
<ns5:BillingCycleId>1</ns5:BillingCycleId>
<ns5:BillingCycle>Immediate</ns5:BillingCycle>
<ns5:LaborInvoiceFormatId>300100152250585</ns5:LaborInvoiceFormatId>
<ns5:LaborInvoiceFormat>Exp Type Labor Format</ns5:LaborInvoiceFormat>
<ns5:NlInvoiceFormatId>7002</ns5:NlInvoiceFormatId>
<ns5:NonlaborInvoiceFormat>Contract Line Expenditure Type</ns5:NonlaborInvoiceFormat>
<ns5:EventsInvoiceFormatId>100000011213021</ns5:EventsInvoiceFormatId>
<ns5:EventInvoiceFormat>Contract Line Event Type</ns5:EventInvoiceFormat>
<ns5:FirstBillingOffsetDays>0</ns5:FirstBillingOffsetDays>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:PersonBillRateSchId>300100001800278</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule>PJS CPBF Employee Act Rev Rate</ns5:PersonRateSchedule>
<ns5:JobBillRateSchId>100000010179011</ns5:JobBillRateSchId>
<ns5:JobRateSchedule>Construction Job Bill Rates</ns5:JobRateSchedule>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId>300100001800288</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule>PJS CPBF Nonlabor Actual Rev</ns5:NonlaborRateSchedule>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:InvoiceCurrencyDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyExchgDate xsi:nil="true"/>
<ns5:InvoiceCurrencyRateType xsi:nil="true"/>
```

```
<ns5:InvoiceCurrencyConversionRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyCode xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:DocumentNumber xsi:nil="true"/>
<ns5:LocFlag xsi:nil="true"/>
<ns5:ReportTypeCode xsi:nil="true"/>
<ns5:FederalInvoiceFormat xsi:nil="true"/>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100169593131</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>Billplan</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100169593131</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>Billplan</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100169593131</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>Billplan</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanDescriptiveFlexField>
<ns8:BillPlanId>300100169593131</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:BillPlanDescriptiveFlexField>
</ns1:BillPlan>
<ns1:RevenuePlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100169593132</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>100000015590467</ns5:BillMethodId>
<ns5:BillMethodName>As Incurred Method</ns5:BillMethodName>
<ns5:BillPlanName>rev plan</ns5:BillPlanName>
<ns5:PersonBillRateSchId xsi:nil="true"/>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId xsi:nil="true"/>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId xsi:nil="true"/>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
```

```
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:RevenuePlanDescriptiveFlexField>
<ns8:BillPlanId>300100169593132</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:RevenuePlanDescriptiveFlexField>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100169593132</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>rev plan</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100169593132</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>rev plan</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100169593132</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>rev plan</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
</ns1:RevenuePlan>
<ns1:OKCSOPText_c xsi:nil="true"/>
<ns1:OKCSOPNumber_c xsi:nil="true"/>
<ns1:OKCSOPDate_c xsi:nil="true"/>
<ns1:OKCSOPLong_c xsi:nil="true"/>
<ns1:OKCSOPDCL_Id_c xsi:nil="true"/>
<ns1:OKCSOPDCL_c xsi:nil="true"/>
```

```
</ns1:Value>
<ns1:Value>
<ns1:Id>300100128521004</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128521004</ns1:ExternalKey>
<ns1:InvConvRateTypeName>Spot</ns1:InvConvRateTypeName>
<ns1:InvConvRateDateTypeName>Transaction date</ns1:InvConvRateDateTypeName>
<ns1:OrgName>Vision Operations</ns1:OrgName>
<ns1:OrgId>204</ns1:OrgId>
<ns1:ContractTypeName>Sell : Project lines</ns1:ContractTypeName>
<ns1:ContractClass>CONTRACT</ns1:ContractClass>
<ns1:ContractTypeId>104</ns1:ContractTypeId>
<ns1:ContractNumber>PJB_CDRM_CNT_INV_GEN_RL1</ns1:ContractNumber>
<ns1:ContractNumberModifier xsi:nil="true"/>
<ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_RL1</ns1:Cognomen>
<ns1:BuyOrSell>S</ns1:BuyOrSell>
<ns1:PartyId>1005</ns1:PartyId>
<ns1:PartyName>AT&amp;amp;T Universal Card</ns1:PartyName>
<ns1:InvOrganizationId xsi:nil="true"/>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:CurrencyCode>USD</ns1:CurrencyCode>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:InvConvRateType>Spot</ns1:InvConvRateType>
<ns1:InvConvRateDateType>TRANSACTION</ns1:InvConvRateDateType>
<ns1:InvConvRateDate xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:InvTrxTypeName>PA Invoice</ns1:InvTrxTypeName>
<ns1:BillToAccountId>1005</ns1:BillToAccountId>
<ns1:BillToAccount>AT&amp;amp;T Universal Card</ns1:BillToAccount>
<ns1:BillToAccountNumber>1005</ns1:BillToAccountNumber>
<ns1:BillToSiteUseId>1023</ns1:BillToSiteUseId>
<ns1:BillToSiteUseLocation>Jacksonville (OPS)</ns1:BillToSiteUseLocation>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
<ns1:ShipToSiteUseLocation>Jacksonville (OPS)</ns1:ShipToSiteUseLocation>
<ns1:SoldToAccountId xsi:nil="true"/>
<ns1:SoldToAccount xsi:nil="true"/>
<ns1:SoldToAccountNumber xsi:nil="true"/>
<ns1:SoldToSiteId xsi:nil="true"/>
<ns1:SoldToNumber xsi:nil="true"/>
<ns1:SoldToAddress xsi:nil="true"/>
<ns1:SoldToAccountDescription xsi:nil="true"/>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:LegalEntityId>204</ns1:LegalEntityId>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:DateApproved>2018-01-17</ns1:DateApproved>
<ns1:DatetimeCancelled xsi:nil="true"/>
<ns1:DateSigned>2018-01-17</ns1:DateSigned>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:TerminateCancelSource xsi:nil="true"/>
<ns1:ContributionPercent>1</ns1:ContributionPercent>
<ns1:BillSequence xsi:nil="true"/>
<ns1:OverallRiskCode xsi:nil="true"/>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:Description xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:AmendmentEffectiveDate xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
```

```
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ProjectEnabledFlag>true</ns1:ProjectEnabledFlag>
<ns1:OutputTaxSetId>204</ns1:OutputTaxSetId>
<ns1:PartyObjectType>OKX_PARTY</ns1:PartyObjectType>
<ns1:PrimaryLedgerId>1</ns1:PrimaryLedgerId>
<ns1:CustomerPartyId>1005</ns1:CustomerPartyId>
<ns1:CustomerPartySiteId>1024</ns1:CustomerPartySiteId>
<ns1:GeneratedInvoiceStatus>R</ns1:GeneratedInvoiceStatus>
<ns1:OwningOrgId>204</ns1:OwningOrgId>
<ns1:NetInvoiceFlag>false</ns1:NetInvoiceFlag>
<ns1:VersionType>C</ns1:VersionType>
<ns1:OwningOrgName>Vision Operations</ns1:OwningOrgName>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:ExemptionReasonMeaning xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:ApTermsId xsi:nil="true"/>
<ns1:ServiceEnabledFlag>false</ns1:ServiceEnabledFlag>
<ns1:EstimatedAmount currencyCode="USD">175000</ns1:EstimatedAmount>
<ns1:TaxAmount currencyCode="USD">0</ns1:TaxAmount>
<ns1:LastUpdateDate>2018-01-17T06:15:34.741Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>62F38C6B61427698E0534280F50A5F7B</ns1:LastUpdateLogin>
<ns1:LastUpdatedBy>ABRAHAM.MASON</ns1:LastUpdatedBy>
<ns1:CreatedBy>Charles.Smith</ns1:CreatedBy>
<ns1:CreationDate>2018-01-16T18:48:38.502Z</ns1:CreationDate>
<ns1:LedgerCurrency>USD</ns1:LedgerCurrency>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:AgreementEnabledFlag>false</ns1:AgreementEnabledFlag>
<ns1:CloseReason xsi:nil="true"/>
<ns1:CancelReason xsi:nil="true"/>
<ns1:AuthoringPartyCode xsi:nil="true"/>
<ns1:HoldReasonMeaning xsi:nil="true"/>
<ns1:PrimaryPartyId>1005</ns1:PrimaryPartyId>
<ns1:PersonId>100010032551061</ns1:PersonId>
<ns1:SalesAccountId xsi:nil="true"/>
<ns1:OrigSystemId>300100128520989</ns1:OrigSystemId>
<ns1:OrigSystemReference>1</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:AllowExternalItemFlag>false</ns1:AllowExternalItemFlag>
<ns1:SalesAccountName xsi:nil="true"/>
<ns1:ItemSourceCode>PRODUCT_MASTER</ns1:ItemSourceCode>
<ns1:StateTransitionFlowName xsi:nil="true"/>
<ns1:StateTransitionFlowState>ACTIVE</ns1:StateTransitionFlowState>
<ns1:UserStatusCode xsi:nil="true"/>
<ns1:AssigneeType xsi:nil="true"/>
<ns1:AssigneeId xsi:nil="true"/>
<ns1:Assignee xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:AccessLevel>UPDATE</ns1:AccessLevel>
<ns1:TemplateFlag>false</ns1:TemplateFlag>
<ns1:BillingSalesrepId xsi:nil="true"/>
<ns1:BillingSalesrepName xsi:nil="true"/>
<ns1:VersionDescription xsi:nil="true"/>
<ns1:Comment xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:AdjustmentBasis xsi:nil="true"/>
<ns1:CommitmentAmount currencyCode="USD">0</ns1:CommitmentAmount>
<ns1:PricingCalendarId xsi:nil="true"/>
<ns1:PricingPeriodType xsi:nil="true"/>
<ns1:PricingCalendarName xsi:nil="true"/>
<ns1:DiscountPercent xsi:nil="true"/>
<ns1:PriceListName xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
```

```
<ns1:WebServiceFlag xsi:nil="true"/>
<ns1:TermsTemplateId xsi:nil="true"/>
<ns1:ContractOwnerId xsi:nil="true"/>
<ns1:Status>Active</ns1:Status>
<ns1:AuthoringPartyMeaning xsi:nil="true"/>
<ns1:InvOrgName/>
<ns1:Supplier/>
<ns1:SupplierSite xsi:nil="true"/>
<ns1:ShipInvOrg/>
<ns1:RecvInvOrg/>
<ns1:Currency>US Dollar</ns1:Currency>
<ns1:UserStatusMeaning/>
<ns1:LegalEntityName>Vision Operations</ns1:LegalEntityName>
<ns1:ShipToOrgLocation/>
<ns1:ChrType xsi:nil="true"/>
<ns1:EnableElectronicSignFlag>false</ns1:EnableElectronicSignFlag>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:AllowCurrencyOverrideFlag xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:ContractTrueValue xsi:nil="true"/>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:PricingSegmentExplanation xsi:nil="true"/>
<ns1:PricingStrategyExplanation xsi:nil="true"/>
<ns1:SegmentExplanationMessageName xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId>1033</ns1:ShipToPartySiteId>
<ns1:Subtotal>0</ns1:Subtotal>
<ns1:PricingStrategyId xsi:nil="true"/>
<ns1:PricingStrategyName xsi:nil="true"/>
<ns1:PricingSegmentCode xsi:nil="true"/>
<ns1:InvConversionRate xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PricingEffectivityDate/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation>5645 Main Street , , Jacksonville32209 , FL</ns1:ShipToPartySiteLocation>
<ns1:PeriodStartUsed xsi:nil="true"/>
<ns1:PeriodTypeUsed xsi:nil="true"/>
<ns1:InvoiceRuleName xsi:nil="true"/>
<ns1:AccountRuleName xsi:nil="true"/>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:PaymentTermId xsi:nil="true"/>
<ns1:PaymentTermName xsi:nil="true"/>
<ns1:CustomerPartyName>AT&amp;amp;T Universal Card</ns1:CustomerPartyName>
<ns1:CustomerPartySiteName>Jacksonville (OPS)</ns1:CustomerPartySiteName>
<ns1:PeriodTypeMeaning xsi:nil="true"/>
<ns1:PeriodStartMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:ContractCreditedAmount xsi:nil="true"/>
<ns1:ContractInvoicedAmount xsi:nil="true"/>
<ns1:UnbilledAmount currencyCode="USD">0</ns1:UnbilledAmount>
<ns1:TermsTemplateName xsi:nil="true"/>
<ns1:DocumentSubType xsi:nil="true"/>
<ns1:RenewalType xsi:nil="true"/>
<ns1:UnderAmendVersionFlag xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:UnderMigrationFlag xsi:nil="true"/>
<ns1:ContractId>100100069551053</ns1:ContractId>
<ns1:CorpCurrencyCode xsi:nil="true"/>
<ns1:CurcyConvRateType xsi:nil="true"/>
<ns1:QuoteToContactId xsi:nil="true"/>
<ns1:QuoteToContact xsi:nil="true"/>
<ns1:NegotiationCommChannel xsi:nil="true"/>
<ns1:NegotiationCustomerAcceptance xsi:nil="true"/>
```

```
<ns1:NegotiationEnableNotification xsi:nil="true"/>
<ns1:NegotiationInternalApproval xsi:nil="true"/>
<ns1:NegotiationLanguage xsi:nil="true"/>
<ns1:QuoteToCopyToEmail xsi:nil="true"/>
<ns1:QuotePhone xsi:nil="true"/>
<ns1:QuoteFax xsi:nil="true"/>
<ns1:QuoteEmail xsi:nil="true"/>
<ns1:QuoteAddress xsi:nil="true"/>
<ns1:QuoteOrg xsi:nil="true"/>
<ns1:QuoteAccount xsi:nil="true"/>
<ns1:PrimarySalesrepId xsi:nil="true"/>
<ns1:PrimarySalesRepresentative xsi:nil="true"/>
<ns1:NegotiationContractLayoutTemplate xsi:nil="true"/>
<ns1:NegotiationTermsLayoutTemplate xsi:nil="true"/>
<ns1:TransactionTypeName xsi:nil="true"/>
<ns1:AutoSendForSignature xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:EsignTemplateId xsi:nil="true"/>
<ns1:NonStandardClauseCount>0</ns1:NonStandardClauseCount>
<ns1:ContractPuid>KHDR-785</ns1:ContractPuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:RunContractExpertFlag xsi:nil="true"/>
<ns1:IgnoreQAWarningsFlag xsi:nil="true"/>
<ns1:BaseContractYN>N</ns1:BaseContractYN>
<ns1:ContractHeaderFlexfieldVA>
<ns7:ContractId>100100069551053</ns7:ContractId>
<ns7:FLEX_PARAM_ContractId>100100069551053</ns7:FLEX_PARAM_ContractId>
<ns7:biHeaderCode xsi:nil="true"/>
<ns7:biHeaderDff2 xsi:nil="true"/>
<ns7:zokcDffGText xsi:nil="true"/>
<ns7:zokcDffGDate xsi:nil="true"/>
<ns7:testName xsi:nil="true"/>
<ns7:zREL9BI68 xsi:nil="true"/>
<ns7:biqa3Code xsi:nil="true"/>
<ns7:zokcDffGNumber xsi:nil="true"/>
<ns7:pjbContractHeader14 xsi:nil="true"/>
<ns7:pjbContractHeader15 xsi:nil="true"/>
<ns7:zokcContractIntent xsi:nil="true"/>
<ns7:zokcContractLine xsi:nil="true"/>
<ns7:zokcContractLine_Display xsi:nil="true"/>
<ns7:__FLEX_Context xsi:nil="true"/>
<ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns7:_FLEX_NumOfSegments>12</ns7:_FLEX_NumOfSegments>
</ns1:ContractHeaderFlexfieldVA>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100128521009</ns1:Id>
<ns1:PartyRoleCode>CUSTOMER</ns1:PartyRoleCode>
<ns1:Role>Customer</ns1:Role>
<ns1:PartyId>1005</ns1:PartyId>
<ns1:PartyName>AT&amp;amp;T Universal Card</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128521009</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-2652</ns1:PartyRolePuid>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>300100128521009</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
```

```
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128521009</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128521009</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128521009</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100128521006</ns1:Id>
<ns1:PartyRoleCode>SUPPLIER</ns1:PartyRoleCode>
<ns1:Role>Supplier</ns1:Role>
<ns1:PartyId>204</ns1:PartyId>
<ns1:PartyName>Vision Operations</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128521006</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-2651</ns1:PartyRolePuid>
<ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
<ns1:Id>300100128521008</ns1:Id>
<ns1:ContactRoleCode>CONTRACT_ADMIN</ns1:ContactRoleCode>
<ns1:Role>Contract administrator</ns1:Role>
<ns1:ContactId>100010032635417</ns1:ContactId>
<ns1:OwnerFlag>true</ns1:OwnerFlag>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128521008</ns1:ExternalKey>
<ns1:AccessLevel>FULL</ns1:AccessLevel>
<ns1:AccessLevelName>Full</ns1:AccessLevelName>
<ns1:SignerYn xsi:nil="true"/>
<ns1:PartyContactName>Charles Smith</ns1:PartyContactName>
<ns1:SignerSequence xsi:nil="true"/>
<ns1:RoutingSequence xsi:nil="true"/>
<ns1:SignatureRole xsi:nil="true"/>
<ns1:SignatureRoleMeaning xsi:nil="true"/>
<ns1:ContactPuid>CNTC-1553</ns1:ContactPuid>
<ns1:ContractPartyContactFlexfieldVA>
<ns2:Id>300100128521008</ns2:Id>
<ns2:MajorVersion>1</ns2:MajorVersion>
<ns2:__FLEX_Context xsi:nil="true"/>
<ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
```

```
 </ns1:ContractPartyContactFlexfieldVA>
 </ns1:ContractPartyContact>
 <ns1:ContractPartyFlexfieldVA>
 <ns3:Id>300100128521006</ns3:Id>
 <ns3:MajorVersion>1</ns3:MajorVersion>
 <ns3:_Party__Location xsi:nil="true"/>
 <ns3:_Global__Segment__1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
 </ns1:ContractPartyFlexfieldVA>
 <ns1:ContractPartyTranslation>
 <ns1:Id>300100128521006</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Language>IW</ns1:Language>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:Cognomen xsi:nil="true"/>
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
 <ns1:ContractPartyTranslation>
 <ns1:Id>300100128521006</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Language>KO</ns1:Language>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:Cognomen xsi:nil="true"/>
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
 <ns1:ContractPartyTranslation>
 <ns1:Id>300100128521006</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Language>US</ns1:Language>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:Cognomen xsi:nil="true"/>
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
 </ns1:ContractParty>
 <ns1:ContractHeaderTranslation>
 <ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_RL1</ns1:Cognomen>
 <ns1:Description xsi:nil="true"/>
 <ns1:Id>300100128521004</ns1:Id>
 <ns1:Language>IW</ns1:Language>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:ShortDescription xsi:nil="true"/>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:VersionDescription xsi:nil="true"/>
 </ns1:ContractHeaderTranslation>
 <ns1:ContractHeaderTranslation>
 <ns1:Cognomen>[PJS CPBF Flow ContractΩ'+++ '+++ 'Ø</ns1:Cognomen>
 <ns1:Description>[Contract to be employed to execute CPBF Flow.Ω'+++ '+++ '+++ '+++ '+++ '++Ø</
ns1:Description>
 <ns1:Id>300100128521004</ns1:Id>
 <ns1:Language>KO</ns1:Language>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:ShortDescription xsi:nil="true"/>
 <ns1:SourceLang>KO</ns1:SourceLang>
 <ns1:VersionDescription xsi:nil="true"/>
 </ns1:ContractHeaderTranslation>
 <ns1:ContractHeaderTranslation>
 <ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_RL1</ns1:Cognomen>
 <ns1:Description xsi:nil="true"/>
 <ns1:Id>300100128521004</ns1:Id>
 <ns1:Language>US</ns1:Language>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:ShortDescription xsi:nil="true"/>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:VersionDescription xsi:nil="true"/>
```

```
</ns1:ContractHeaderTranslation>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>100100066618252</ns1:Id>
<ns1:LineId>100100095831715</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>1</ns1:ItemName>
<ns1:ItemNameTxt>1</ns1:ItemNameTxt>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode xsi:nil="true"/>
<ns1:UnitOfMeasure xsi:nil="true"/>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity xsi:nil="true"/>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount currencyCode="USD">175000</ns1:LineValueAmount>
<ns1:LineAmount currencyCode="USD">175000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Jacksonville (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:WareHouse xsi:nil="true"/>
```

```
<ns1:BillPlanId>300100128521010</ns1:BillPlanId>
<ns1:BillPlan>BP1</ns1:BillPlan>
<ns1:RevenuePlanId>300100128521011</ns1:RevenuePlanId>
<ns1:RevenuePlan>RP1</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:TaxExemptionControlMeaning>Standard</ns1:TaxExemptionControlMeaning>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>N</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference>1</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:Cognomen xsi:nil="true"/>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>100100066618252</ns1:ExternalKey>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId xsi:nil="true"/>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity xsi:nil="true"/>
<ns1:PriceItemUOM xsi:nil="true"/>
<ns1:BillToAccountDescription xsi:nil="true"/>
<ns1:BillToAccount xsi:nil="true"/>
```

```
<ns1:BillToAccountNumber xsi:nil="true"/>
<ns1:BillToSiteUseLocation xsi:nil="true"/>
<ns1:BillToSiteUseId xsi:nil="true"/>
<ns1:BillToAddress xsi:nil="true"/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-4872</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095831715</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095831715</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066618252</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
```

```
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066618252</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[PJS CPBF Line1Ω'+++ Ø</ns1:ItemDescription>
<ns1:ItemName>[PJS CPBF Line1Ω'+++ Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066618252</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>300100128521013</ns5:BillingControlId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate xsi:nil="true"/>
<ns5:SoftLimitAmount currencyCode="USD">175000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300100128521031</ns5:LinkId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:ProjectId>300100128520888</ns5:ProjectId>
<ns5:ProjectNumber>PJB_CDRM_CNT_INV_GEN_RL1</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:BillPlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100128521010</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>1003</ns5:BillMethodId>
<ns5:BillMethodName>Bill Rate Invoice</ns5:BillMethodName>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
```

```
<ns5:InvoiceCurrencyOptCode>CONTRACT</ns5:InvoiceCurrencyOptCode>
<ns5:BillingCurrencyType>Contract</ns5:BillingCurrencyType>
<ns5:PaymentTermsId>4</ns5:PaymentTermsId>
<ns5:PaymentTerms>30 Net</ns5:PaymentTerms>
<ns5:BillSetNumber>1</ns5:BillSetNumber>
<ns5:BillToCustomerAccountId>1005</ns5:BillToCustomerAccountId>
<ns5:BillToAccountNumber>1005</ns5:BillToAccountNumber>
<ns5:BillToSiteUseId>1023</ns5:BillToSiteUseId>
<ns5:BillToSite>Jacksonville (OPS)</ns5:BillToSite>
<ns5:BillToContactId>4840</ns5:BillToContactId>
<ns5:BillToContactName>Paula Springer</ns5:BillToContactName>
<ns5:BillToContactEmail>sendmail-test-discard@oracle.com</ns5:BillToContactEmail>
<ns5:BillingCycleId>1000000000003</ns5:BillingCycleId>
<ns5:BillingCycle>Monthly</ns5:BillingCycle>
<ns5:LaborInvoiceFormatId>7004</ns5:LaborInvoiceFormatId>
<ns5:LaborInvoiceFormat>Contract Line Project/Task Emp</ns5:LaborInvoiceFormat>
<ns5:NlInvoiceFormatId>7005</ns5:NlInvoiceFormatId>
<ns5:NonlaborInvoiceFormat>Contract Line Project/Task Exp</ns5:NonlaborInvoiceFormat>
<ns5:EventsInvoiceFormatId>100000011213026</ns5:EventsInvoiceFormatId>
<ns5:EventInvoiceFormat>Cont Line Project/Task Event</ns5:EventInvoiceFormat>
<ns5:FirstBillingOffsetDays xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:PersonBillRateSchId>300100001800278</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule>PJS CPBF Employee Act Rev Rate</ns5:PersonRateSchedule>
<ns5:JobBillRateSchId>100000010179011</ns5:JobBillRateSchId>
<ns5:JobRateSchedule>Construction Job Bill Rates</ns5:JobRateSchedule>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId>300100001800288</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule>PJS CPBF Nonlabor Actual Rev</ns5:NonlaborRateSchedule>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:InvoiceCurrencyDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyExchgDate xsi:nil="true"/>
<ns5:InvoiceCurrencyRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyCode xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:DocumentNumber xsi:nil="true"/>
<ns5:LocFlag xsi:nil="true"/>
<ns5:ReportTypeCode xsi:nil="true"/>
```

```
<ns5:FederalInvoiceFormat xsi:nil="true"/>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128521010</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128521010</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128521010</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanDescriptiveFlexField>
<ns8:BillPlanId>300100128521010</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:BillPlanDescriptiveFlexField>
</ns1:BillPlan>
<ns1:BillingControl>
<ns5:BillingControlId>300100128521012</ns5:BillingControlId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate xsi:nil="true"/>
<ns5:SoftLimitAmount currencyCode="USD">175000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:RevenuePlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100128521011</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>100000015590467</ns5:BillMethodId>
<ns5:BillMethodName>As Incurred Method</ns5:BillMethodName>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:PersonBillRateSchId xsi:nil="true"/>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId xsi:nil="true"/>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
```

```
<ns5:NlBillRateSchId xsi:nil="true"/>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:RevenuePlanDescriptiveFlexField>
<ns8:BillPlanId>300100128521011</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:RevenuePlanDescriptiveFlexField>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128521011</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128521011</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128521011</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
</ns1:RevenuePlan>
<ns1:OKCSOPText_c xsi:nil="true"/>
<ns1:OKCSOPNumber_c xsi:nil="true"/>
<ns1:OKCSOPDate_c xsi:nil="true"/>
<ns1:OKCSOPLong_c xsi:nil="true"/>
```

```
<ns1:OKCSOPDCL_Id_c xsi:nil="true"/>
<ns1:OKCSOPDCL_c xsi:nil="true"/>
</ns1:Value>
<ns1:Value>
<ns1:Id>300100121356840</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100121356840</ns1:ExternalKey>
<ns1:InvConvRateTypeName>Spot</ns1:InvConvRateTypeName>
<ns1:InvConvRateDateTypeName>Transaction date</ns1:InvConvRateDateTypeName>
<ns1:OrgName>Vision Operations</ns1:OrgName>
<ns1:OrgId>204</ns1:OrgId>
<ns1:ContractTypeName>Sell : Project lines</ns1:ContractTypeName>
<ns1:ContractClass>CONTRACT</ns1:ContractClass>
<ns1:ContractTypeId>104</ns1:ContractTypeId>
<ns1:ContractNumber>AT_PJB_BVT_Cont</ns1:ContractNumber>
<ns1:ContractNumberModifier xsi:nil="true"/>
<ns1:Cognomen>AT_PJB_BVT_Cont</ns1:Cognomen>
<ns1:BuyOrSell>S</ns1:BuyOrSell>
<ns1:PartyId>300100038711553</ns1:PartyId>
<ns1:PartyName>AR_Customer</ns1:PartyName>
<ns1:InvOrganizationId xsi:nil="true"/>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:CurrencyCode>USD</ns1:CurrencyCode>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:InvConvRateType>Spot</ns1:InvConvRateType>
<ns1:InvConvRateDateType>TRANSACTION</ns1:InvConvRateDateType>
<ns1:InvConvRateDate xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:InvTrxTypeName>PA Invoice</ns1:InvTrxTypeName>
<ns1:BillToAccountId>300100038711554</ns1:BillToAccountId>
<ns1:BillToAccount>AR_Customer</ns1:BillToAccount>
<ns1:BillToAccountNumber>CDRM_8166</ns1:BillToAccountNumber>
<ns1:BillToSiteUseId>300100038711558</ns1:BillToSiteUseId>
<ns1:BillToSiteUseLocation>CDRM_6188</ns1:BillToSiteUseLocation>
<ns1:ShipToAccountId>300100038711554</ns1:ShipToAccountId>
<ns1:ShipToAccount>AR_Customer</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>CDRM_8166</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>300100038711559</ns1:ShipToSiteUseId>
<ns1:ShipToSiteUseLocation>CDRM_6189</ns1:ShipToSiteUseLocation>
<ns1:SoldToAccountId xsi:nil="true"/>
<ns1:SoldToAccount xsi:nil="true"/>
<ns1:SoldToAccountNumber xsi:nil="true"/>
<ns1:SoldToSiteId xsi:nil="true"/>
<ns1:SoldToNumber xsi:nil="true"/>
<ns1:SoldToAddress xsi:nil="true"/>
<ns1:SoldToAccountDescription xsi:nil="true"/>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:LegalEntityId>204</ns1:LegalEntityId>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:DateApproved>2017-07-27</ns1:DateApproved>
<ns1:DatetimeCancelled xsi:nil="true"/>
<ns1:DateSigned>2017-07-27</ns1:DateSigned>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:TerminateCancelSource xsi:nil="true"/>
<ns1:ContributionPercent>1</ns1:ContributionPercent>
<ns1:BillSequence xsi:nil="true"/>
<ns1:OverallRiskCode xsi:nil="true"/>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:Description xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
```

```
<ns1:AmendmentEffectiveDate xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ProjectEnabledFlag>true</ns1:ProjectEnabledFlag>
<ns1:OutputTaxSetId>204</ns1:OutputTaxSetId>
<ns1:PartyObjectType>OKX_PARTY</ns1:PartyObjectType>
<ns1:PrimaryLedgerId>1</ns1:PrimaryLedgerId>
<ns1:CustomerPartyId>300100038711554</ns1:CustomerPartyId>
<ns1:CustomerPartySiteId>300100038711559</ns1:CustomerPartySiteId>
<ns1:GeneratedInvoiceStatus>D</ns1:GeneratedInvoiceStatus>
<ns1:OwningOrgId>204</ns1:OwningOrgId>
<ns1:NetInvoiceFlag>false</ns1:NetInvoiceFlag>
<ns1:VersionType>C</ns1:VersionType>
<ns1:OwningOrgName>Vision Operations</ns1:OwningOrgName>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:ExemptionReasonMeaning xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:ApTermsId xsi:nil="true"/>
<ns1:ServiceEnabledFlag>false</ns1:ServiceEnabledFlag>
<ns1:EstimatedAmount currencyCode="USD">1000000</ns1:EstimatedAmount>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:LastUpdateDate>2017-07-27T10:58:01.078Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>552874B1A7F81A61E0534280F50A3A2E</ns1:LastUpdateLogin>
<ns1:LastUpdatedBy>Charles.Smith</ns1:LastUpdatedBy>
<ns1:CreatedBy>Charles.Smith</ns1:CreatedBy>
<ns1:CreationDate>2017-07-27T10:33:46Z</ns1:CreationDate>
<ns1:LedgerCurrency>USD</ns1:LedgerCurrency>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:AgreementEnabledFlag>false</ns1:AgreementEnabledFlag>
<ns1:CloseReason xsi:nil="true"/>
<ns1:CancelReason xsi:nil="true"/>
<ns1:AuthoringPartyCode>INTERNAL</ns1:AuthoringPartyCode>
<ns1:HoldReasonMeaning xsi:nil="true"/>
<ns1:PrimaryPartyId>300100038711553</ns1:PrimaryPartyId>
<ns1:PersonId>100010032551061</ns1:PersonId>
<ns1:SalesAccountId xsi:nil="true"/>
<ns1:OrigSystemId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:AllowExternalItemFlag>false</ns1:AllowExternalItemFlag>
<ns1:SalesAccountName xsi:nil="true"/>
<ns1:ItemSourceCode>PRODUCT_MASTER</ns1:ItemSourceCode>
<ns1:StateTransitionFlowName xsi:nil="true"/>
<ns1:StateTransitionFlowState>ACTIVE</ns1:StateTransitionFlowState>
<ns1:UserStatusCode xsi:nil="true"/>
<ns1:AssigneeType xsi:nil="true"/>
<ns1:AssigneeId xsi:nil="true"/>
<ns1:Assignee xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:AccessLevel>UPDATE</ns1:AccessLevel>
<ns1:TemplateFlag>false</ns1:TemplateFlag>
<ns1:BillingSalesrepId xsi:nil="true"/>
<ns1:BillingSalesrepName xsi:nil="true"/>
<ns1:VersionDescription xsi:nil="true"/>
<ns1:Comment xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:AdjustmentBasis xsi:nil="true"/>
<ns1:CommitmentAmount currencyCode="USD">0</ns1:CommitmentAmount>
<ns1:PricingCalendarId xsi:nil="true"/>
<ns1:PricingPeriodType xsi:nil="true"/>
<ns1:PricingCalendarName xsi:nil="true"/>
<ns1:DiscountPercent xsi:nil="true"/>
<ns1:PriceListName xsi:nil="true"/>
```

```
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:WebServiceFlag xsi:nil="true"/>
<ns1:TermsTemplateId xsi:nil="true"/>
<ns1:ContractOwnerId xsi:nil="true"/>
<ns1:Status>Active</ns1:Status>
<ns1:AuthoringPartyMeaning>Internal</ns1:AuthoringPartyMeaning>
<ns1:InvOrgName/>
<ns1:Supplier/>
<ns1:SupplierSite xsi:nil="true"/>
<ns1:ShipInvOrg/>
<ns1:RecvInvOrg/>
<ns1:Currency>US Dollar</ns1:Currency>
<ns1:UserStatusMeaning/>
<ns1:LegalEntityName>Vision Operations</ns1:LegalEntityName>
<ns1:ShipToOrgLocation/>
<ns1:ChrType xsi:nil="true"/>
<ns1:EnableElectronicSignFlag>false</ns1:EnableElectronicSignFlag>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:AllowCurrencyOverrideFlag xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:ContractTrueValue xsi:nil="true"/>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:PricingSegmentExplanation xsi:nil="true"/>
<ns1:PricingStrategyExplanation xsi:nil="true"/>
<ns1:SegmentExplanationMessageName xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId>300100038711556</ns1:ShipToPartySiteId>
<ns1:Subtotal xsi:nil="true"/>
<ns1:PricingStrategyId xsi:nil="true"/>
<ns1:PricingStrategyName xsi:nil="true"/>
<ns1:PricingSegmentCode xsi:nil="true"/>
<ns1:InvConversionRate xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PricingEffectivityDate>2017-07-27T00:00:00Z</ns1:PricingEffectivityDate>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation>AR , , SAN MATEO94002 , CA</ns1:ShipToPartySiteLocation>
<ns1:PeriodStartUsed xsi:nil="true"/>
<ns1:PeriodTypeUsed xsi:nil="true"/>
<ns1:InvoiceRuleName xsi:nil="true"/>
<ns1:AccountRuleName xsi:nil="true"/>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:PaymentTermId xsi:nil="true"/>
<ns1:PaymentTermName xsi:nil="true"/>
<ns1:CustomerPartyName>AR_Customer</ns1:CustomerPartyName>
<ns1:CustomerPartySiteName>CDRM_6189</ns1:CustomerPartySiteName>
<ns1:PeriodTypeMeaning xsi:nil="true"/>
<ns1:PeriodStartMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:ContractCreditedAmount xsi:nil="true"/>
<ns1:ContractInvoicedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:TermsTemplateName xsi:nil="true"/>
<ns1:DocumentSubType xsi:nil="true"/>
<ns1:RenewalType xsi:nil="true"/>
<ns1:UnderAmendVersionFlag xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:UnderMigrationFlag xsi:nil="true"/>
<ns1:ContractId>100100069551032</ns1:ContractId>
<ns1:CorpCurrencyCode xsi:nil="true"/>
<ns1:CurcyConvRateType xsi:nil="true"/>
<ns1:QuoteToContactId xsi:nil="true"/>
<ns1:QuoteToContact xsi:nil="true"/>
```

```
<ns1:NegotiationCommChannel xsi:nil="true"/>
<ns1:NegotiationCustomerAcceptance xsi:nil="true"/>
<ns1:NegotiationEnableNotification xsi:nil="true"/>
<ns1:NegotiationInternalApproval xsi:nil="true"/>
<ns1:NegotiationLanguage xsi:nil="true"/>
<ns1:QuoteToCopyToEmail xsi:nil="true"/>
<ns1:QuotePhone xsi:nil="true"/>
<ns1:QuoteFax xsi:nil="true"/>
<ns1:QuoteEmail xsi:nil="true"/>
<ns1:QuoteAddress xsi:nil="true"/>
<ns1:QuoteOrg xsi:nil="true"/>
<ns1:QuoteAccount xsi:nil="true"/>
<ns1:PrimarySalesrepId xsi:nil="true"/>
<ns1:PrimarySalesRepresentative xsi:nil="true"/>
<ns1:NegotiationContractLayoutTemplate xsi:nil="true"/>
<ns1:NegotiationTermsLayoutTemplate xsi:nil="true"/>
<ns1:TransactionTypeName xsi:nil="true"/>
<ns1:AutoSendForSignature xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:EsignTemplateId xsi:nil="true"/>
<ns1:NonStandardClauseCount>0</ns1:NonStandardClauseCount>
<ns1:ContractPuid>KHDR-919</ns1:ContractPuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:RunContractExpertFlag xsi:nil="true"/>
<ns1:IgnoreQAWarningsFlag xsi:nil="true"/>
<ns1:BaseContractYN>N</ns1:BaseContractYN>
<ns1:ContractHeaderFlexfieldVA>
<ns7:ContractId>100100069551032</ns7:ContractId>
<ns7:FLEX_PARAM_ContractId>100100069551032</ns7:FLEX_PARAM_ContractId>
<ns7:biHeaderCode xsi:nil="true"/>
<ns7:biHeaderDff2 xsi:nil="true"/>
<ns7:zokcDffGText>ABCDEF</ns7:zokcDffGText>
<ns7:zokcDffGDate>0011-12-05</ns7:zokcDffGDate>
<ns7:testName xsi:nil="true"/>
<ns7:zREL9BI68 xsi:nil="true"/>
<ns7:biqa3Code xsi:nil="true"/>
<ns7:zokcDffGNumber>55</ns7:zokcDffGNumber>
<ns7:pjbContractHeader14 xsi:nil="true"/>
<ns7:pjbContractHeader15 xsi:nil="true"/>
<ns7:zokcContractIntent xsi:nil="true"/>
<ns7:zokcContractLine xsi:nil="true"/>
<ns7:zokcContractLine_Display xsi:nil="true"/>
<ns7:__FLEX_Context xsi:nil="true"/>
<ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns7:_FLEX_NumOfSegments>12</ns7:_FLEX_NumOfSegments>
</ns1:ContractHeaderFlexfieldVA>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100121356923</ns1:Id>
<ns1:PartyRoleCode>CUSTOMER</ns1:PartyRoleCode>
<ns1:Role>Customer</ns1:Role>
<ns1:PartyId>300100038711553</ns1:PartyId>
<ns1:PartyName>AR_Customer</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100121356923</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-2724</ns1:PartyRolePuid>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>300100121356923</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
```

```
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100121356923</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100121356923</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100121356923</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100121356920</ns1:Id>
<ns1:PartyRoleCode>SUPPLIER</ns1:PartyRoleCode>
<ns1:Role>Supplier</ns1:Role>
<ns1:PartyId>204</ns1:PartyId>
<ns1:PartyName>Vision Operations</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100121356920</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-2723</ns1:PartyRolePuid>
<ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
<ns1:Id>300100121356922</ns1:Id>
<ns1:ContactRoleCode>CONTRACT_ADMIN</ns1:ContactRoleCode>
<ns1:Role>Contract administrator</ns1:Role>
<ns1:ContactId>100010032635417</ns1:ContactId>
<ns1:OwnerFlag>true</ns1:OwnerFlag>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100121356921</ns1:ExternalKey>
<ns1:AccessLevel>FULL</ns1:AccessLevel>
<ns1:AccessLevelName>Full</ns1:AccessLevelName>
<ns1:SignerYn xsi:nil="true"/>
<ns1:PartyContactName>Charles Smith</ns1:PartyContactName>
<ns1:SignerSequence xsi:nil="true"/>
<ns1:RoutingSequence xsi:nil="true"/>
<ns1:SignatureRole xsi:nil="true"/>
<ns1:SignatureRoleMeaning xsi:nil="true"/>
<ns1:ContactPuid>CNTC-1505</ns1:ContactPuid>
<ns1:ContractPartyContactFlexfieldVA>
<ns2:Id>300100121356922</ns2:Id>
<ns2:MajorVersion>1</ns2:MajorVersion>
<ns2:__FLEX_Context xsi:nil="true"/>
```

```
<ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
</ns1:ContractPartyContactFlexfieldVA>
</ns1:ContractPartyContact>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>300100121356920</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100121356920</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100121356920</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100121356920</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>AT_PJB_BVT_Cont</ns1:Cognomen>
<ns1:Description xsi:nil="true"/>
<ns1:Id>300100121356840</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>AT_PJB_BVT_Cont</ns1:Cognomen>
<ns1:Description xsi:nil="true"/>
<ns1:Id>300100121356840</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>AT_PJB_BVT_Cont</ns1:Cognomen>
<ns1:Description xsi:nil="true"/>
<ns1:Id>300100121356840</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
```

```
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>300100121356992</ns1:Id>
<ns1:LineId>100100095831886</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>1</ns1:ItemName>
<ns1:ItemNameTxt>1</ns1:ItemNameTxt>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode xsi:nil="true"/>
<ns1:UnitOfMeasure xsi:nil="true"/>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity xsi:nil="true"/>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount currencyCode="USD">1000000</ns1:LineValueAmount>
<ns1:LineAmount currencyCode="USD">1000000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode>ESTIMATED</ns1:CommitLevelCode>
<ns1:CommitLevel>Estimated</ns1:CommitLevel>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>300100038711554</ns1:ShipToAccountId>
<ns1:ShipToAccount>AR_Customer</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>CDRM_8166</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>300100038711559</ns1:ShipToSiteUseId>
<ns1:ShipToSite>CDRM_6189</ns1:ShipToSite>
<ns1:ShipInvOrgId xsi:nil="true"/>
```

```
<ns1:WareHouse xsi:nil="true"/>
<ns1:BillPlanId>300100121356985</ns1:BillPlanId>
<ns1:BillPlan>BP1</ns1:BillPlan>
<ns1:RevenuePlanId>300100121356991</ns1:RevenuePlanId>
<ns1:RevenuePlan>RP1</ns1:RevenuePlan>
<ns1:InvoicedAmount currencyCode="USD">0</ns1:InvoicedAmount>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:TaxExemptionControlMeaning>Standard</ns1:TaxExemptionControlMeaning>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>N</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen xsi:nil="true"/>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100121356992</ns1:ExternalKey>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId xsi:nil="true"/>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId>300100038711556</ns1:ShipToPartySiteId>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity xsi:nil="true"/>
<ns1:PriceItemUOM xsi:nil="true"/>
<ns1:BillToAccountDescription xsi:nil="true"/>
```

```
<ns1:BillToAccount xsi:nil="true"/>
<ns1:BillToAccountNumber xsi:nil="true"/>
<ns1:BillToSiteUseLocation xsi:nil="true"/>
<ns1:BillToSiteUseId xsi:nil="true"/>
<ns1:BillToAddress xsi:nil="true"/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation>AR , , SAN MATEO94002 , CA</ns1:ShipToPartySiteLocation>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn>N</ns1:PriceDuringBillingYn>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-5027</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095831886</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095831886</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>300100121356992</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
```

```
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>300100121356992</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>300100121356992</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>300100121356993</ns5:BillingControlId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate xsi:nil="true"/>
<ns5:SoftLimitAmount currencyCode="USD">1000000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300100121773008</ns5:LinkId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:ProjectId>300100121356810</ns5:ProjectId>
<ns5:ProjectNumber>AT_PJB_BVT_Proj</ns5:ProjectNumber>
<ns5:ProjElementId>100100055375490</ns5:ProjElementId>
<ns5:TaskNumber>2</ns5:TaskNumber>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:BillPlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100121356985</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>300100024846778</ns5:BillMethodId>
<ns5:BillMethodName>Rate Based Method</ns5:BillMethodName>
```

```
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceCurrencyOptCode>CONTRACT</ns5:InvoiceCurrencyOptCode>
<ns5:BillingCurrencyType>Contract</ns5:BillingCurrencyType>
<ns5:PaymentTermsId>4</ns5:PaymentTermsId>
<ns5:PaymentTerms>30 Net</ns5:PaymentTerms>
<ns5:BillSetNumber>1</ns5:BillSetNumber>
<ns5:BillToCustomerAccountId>300100038711554</ns5:BillToCustomerAccountId>
<ns5:BillToAccountNumber>CDRM_8166</ns5:BillToAccountNumber>
<ns5:BillToSiteUseId>300100038711558</ns5:BillToSiteUseId>
<ns5:BillToSite>CDRM_6188</ns5:BillToSite>
<ns5:BillToContactId>300100061937860</ns5:BillToContactId>
<ns5:BillToContactName>Charles Watson</ns5:BillToContactName>
<ns5:BillToContactEmail xsi:nil="true"/>
<ns5:BillingCycleId>1000000000003</ns5:BillingCycleId>
<ns5:BillingCycle>Monthly</ns5:BillingCycle>
<ns5:LaborInvoiceFormatId>7004</ns5:LaborInvoiceFormatId>
<ns5:LaborInvoiceFormat>Contract Line Project/Task Emp</ns5:LaborInvoiceFormat>
<ns5:NlInvoiceFormatId>7005</ns5:NlInvoiceFormatId>
<ns5:NonlaborInvoiceFormat>Contract Line Project/Task Exp</ns5:NonlaborInvoiceFormat>
<ns5:EventsInvoiceFormatId>100000011213026</ns5:EventsInvoiceFormatId>
<ns5:EventInvoiceFormat>Cont Line Project/Task Event</ns5:EventInvoiceFormat>
<ns5:FirstBillingOffsetDays xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:PersonBillRateSchId>300100024773790</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule>Employee Rates</ns5:PersonRateSchedule>
<ns5:JobBillRateSchId>300100005141235</ns5:JobBillRateSchId>
<ns5:JobRateSchedule>Job Rates</ns5:JobRateSchedule>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId>300100024773796</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule>Non Labor Rates</ns5:NonlaborRateSchedule>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:InvoiceCurrencyDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyExchgDate xsi:nil="true"/>
<ns5:InvoiceCurrencyRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyCode xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:DocumentNumber xsi:nil="true"/>
<ns5:LocFlag xsi:nil="true"/>
```

```
<ns5:ReportTypeCode xsi:nil="true"/>
<ns5:FederalInvoiceFormat xsi:nil="true"/>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100121356985</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100121356985</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100121356985</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanDescriptiveFlexField>
<ns8:BillPlanId>300100121356985</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:BillPlanDescriptiveFlexField>
</ns1:BillPlan>
<ns1:BillingControl>
<ns5:BillingControlId>300100121356925</ns5:BillingControlId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate xsi:nil="true"/>
<ns5:SoftLimitAmount currencyCode="USD">1000000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:RevenuePlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100121356991</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>100000015590467</ns5:BillMethodId>
<ns5:BillMethodName>As Incurred Method</ns5:BillMethodName>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:PersonBillRateSchId xsi:nil="true"/>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId xsi:nil="true"/>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
```

```
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId xsi:nil="true"/>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:RevenuePlanDescriptiveFlexField>
<ns8:BillPlanId>300100121356991</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:RevenuePlanDescriptiveFlexField>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100121356991</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100121356991</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100121356991</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
</ns1:RevenuePlan>
<ns1:OKCSOPText_c xsi:nil="true"/>
<ns1:OKCSOPNumber_c xsi:nil="true"/>
<ns1:OKCSOPDate_c xsi:nil="true"/>
```

```
<ns1:OKCSOPLong_c xsi:nil="true"/>
<ns1:OKCSOPDCL_Id_c xsi:nil="true"/>
<ns1:OKCSOPDCL_c xsi:nil="true"/>
</ns1:Value>
<ns1:Value>
<ns1:Id>300100128520957</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128520957</ns1:ExternalKey>
<ns1:InvConvRateTypeName>Spot</ns1:InvConvRateTypeName>
<ns1:InvConvRateDateTypeName>Transaction date</ns1:InvConvRateDateTypeName>
<ns1:OrgName>Vision Operations</ns1:OrgName>
<ns1:OrgId>204</ns1:OrgId>
<ns1:ContractTypeName>Sell : Project lines</ns1:ContractTypeName>
<ns1:ContractClass>CONTRACT</ns1:ContractClass>
<ns1:ContractTypeId>104</ns1:ContractTypeId>
<ns1:ContractNumber>PJB_CDRM_CNT_INV_GEN_DR2</ns1:ContractNumber>
<ns1:ContractNumberModifier xsi:nil="true"/>
<ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_DR2</ns1:Cognomen>
<ns1:BuyOrSell>S</ns1:BuyOrSell>
<ns1:PartyId>1005</ns1:PartyId>
<ns1:PartyName>AT&amp;amp;T Universal Card</ns1:PartyName>
<ns1:InvOrganizationId xsi:nil="true"/>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:CurrencyCode>USD</ns1:CurrencyCode>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:InvConvRateType>Spot</ns1:InvConvRateType>
<ns1:InvConvRateDateType>TRANSACTION</ns1:InvConvRateDateType>
<ns1:InvConvRateDate xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:InvTrxTypeName>PA Invoice</ns1:InvTrxTypeName>
<ns1:BillToAccountId>1005</ns1:BillToAccountId>
<ns1:BillToAccount>AT&amp;amp;T Universal Card</ns1:BillToAccount>
<ns1:BillToAccountNumber>1005</ns1:BillToAccountNumber>
<ns1:BillToSiteUseId>1023</ns1:BillToSiteUseId>
<ns1:BillToSiteUseLocation>Jacksonville (OPS)</ns1:BillToSiteUseLocation>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
<ns1:ShipToSiteUseLocation>Jacksonville (OPS)</ns1:ShipToSiteUseLocation>
<ns1:SoldToAccountId xsi:nil="true"/>
<ns1:SoldToAccount xsi:nil="true"/>
<ns1:SoldToAccountNumber xsi:nil="true"/>
<ns1:SoldToSiteId xsi:nil="true"/>
<ns1:SoldToNumber xsi:nil="true"/>
<ns1:SoldToAddress xsi:nil="true"/>
<ns1:SoldToAccountDescription xsi:nil="true"/>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:LegalEntityId>204</ns1:LegalEntityId>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:DateApproved>2018-01-17</ns1:DateApproved>
<ns1:DatetimeCancelled xsi:nil="true"/>
<ns1:DateSigned>2018-01-17</ns1:DateSigned>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:TerminateCancelSource xsi:nil="true"/>
<ns1:ContributionPercent>1</ns1:ContributionPercent>
<ns1:BillSequence xsi:nil="true"/>
<ns1:OverallRiskCode xsi:nil="true"/>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:Description xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
```

```
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:AmendmentEffectiveDate xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ProjectEnabledFlag>true</ns1:ProjectEnabledFlag>
<ns1:OutputTaxSetId>204</ns1:OutputTaxSetId>
<ns1:PartyObjectType>OKX_PARTY</ns1:PartyObjectType>
<ns1:PrimaryLedgerId>1</ns1:PrimaryLedgerId>
<ns1:CustomerPartyId>1005</ns1:CustomerPartyId>
<ns1:CustomerPartySiteId>1024</ns1:CustomerPartySiteId>
<ns1:GeneratedInvoiceStatus>D</ns1:GeneratedInvoiceStatus>
<ns1:OwningOrgId>204</ns1:OwningOrgId>
<ns1:NetInvoiceFlag>false</ns1:NetInvoiceFlag>
<ns1:VersionType>C</ns1:VersionType>
<ns1:OwningOrgName>Vision Operations</ns1:OwningOrgName>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:ExemptionReasonMeaning xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:ApTermsId xsi:nil="true"/>
<ns1:ServiceEnabledFlag>false</ns1:ServiceEnabledFlag>
<ns1:EstimatedAmount currencyCode="USD">175000</ns1:EstimatedAmount>
<ns1:TaxAmount currencyCode="USD">0</ns1:TaxAmount>
<ns1:LastUpdateDate>2018-01-17T06:13:07.99Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>62F3AF29D9925F42E0534180F50AA519</ns1:LastUpdateLogin>
<ns1:LastUpdatedBy>ABRAHAM.MASON</ns1:LastUpdatedBy>
<ns1:CreatedBy>Charles.Smith</ns1:CreatedBy>
<ns1:CreationDate>2018-01-16T18:42:54.545Z</ns1:CreationDate>
<ns1:LedgerCurrency>USD</ns1:LedgerCurrency>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:AgreementEnabledFlag>false</ns1:AgreementEnabledFlag>
<ns1:CloseReason xsi:nil="true"/>
<ns1:CancelReason xsi:nil="true"/>
<ns1:AuthoringPartyCode xsi:nil="true"/>
<ns1:HoldReasonMeaning xsi:nil="true"/>
<ns1:PrimaryPartyId>1005</ns1:PrimaryPartyId>
<ns1:PersonId>100010032551061</ns1:PersonId>
<ns1:SalesAccountId xsi:nil="true"/>
<ns1:OrigSystemId>300100128520940</ns1:OrigSystemId>
<ns1:OrigSystemReference>1</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:AllowExternalItemFlag>false</ns1:AllowExternalItemFlag>
<ns1:SalesAccountName xsi:nil="true"/>
<ns1:ItemSourceCode>PRODUCT_MASTER</ns1:ItemSourceCode>
<ns1:StateTransitionFlowName xsi:nil="true"/>
<ns1:StateTransitionFlowState>ACTIVE</ns1:StateTransitionFlowState>
<ns1:UserStatusCode xsi:nil="true"/>
<ns1:AssigneeType xsi:nil="true"/>
<ns1:AssigneeId xsi:nil="true"/>
<ns1:Assignee xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:AccessLevel>UPDATE</ns1:AccessLevel>
<ns1:TemplateFlag>false</ns1:TemplateFlag>
<ns1:BillingSalesrepId xsi:nil="true"/>
<ns1:BillingSalesrepName xsi:nil="true"/>
<ns1:VersionDescription xsi:nil="true"/>
<ns1:Comment xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:AdjustmentBasis xsi:nil="true"/>
<ns1:CommitmentAmount currencyCode="USD">0</ns1:CommitmentAmount>
<ns1:PricingCalendarId xsi:nil="true"/>
<ns1:PricingPeriodType xsi:nil="true"/>
<ns1:PricingCalendarName xsi:nil="true"/>
<ns1:DiscountPercent xsi:nil="true"/>
```

```
<ns1:PriceListName xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:WebServiceFlag xsi:nil="true"/>
<ns1:TermsTemplateId xsi:nil="true"/>
<ns1:ContractOwnerId xsi:nil="true"/>
<ns1:Status>Active</ns1:Status>
<ns1:AuthoringPartyMeaning xsi:nil="true"/>
<ns1:InvOrgName/>
<ns1:Supplier/>
<ns1:SupplierSite xsi:nil="true"/>
<ns1:ShipInvOrg/>
<ns1:RecvInvOrg/>
<ns1:Currency>US Dollar</ns1:Currency>
<ns1:UserStatusMeaning/>
<ns1:LegalEntityName>Vision Operations</ns1:LegalEntityName>
<ns1:ShipToOrgLocation/>
<ns1:ChrType xsi:nil="true"/>
<ns1:EnableElectronicSignFlag>false</ns1:EnableElectronicSignFlag>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:AllowCurrencyOverrideFlag xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:ContractTrueValue xsi:nil="true"/>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:PricingSegmentExplanation xsi:nil="true"/>
<ns1:PricingStrategyExplanation xsi:nil="true"/>
<ns1:SegmentExplanationMessageName xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId>1033</ns1:ShipToPartySiteId>
<ns1:Subtotal>0</ns1:Subtotal>
<ns1:PricingStrategyId xsi:nil="true"/>
<ns1:PricingStrategyName xsi:nil="true"/>
<ns1:PricingSegmentCode xsi:nil="true"/>
<ns1:InvConversionRate xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PricingEffectivityDate/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation>5645 Main Street , , Jacksonville32209 , FL</ns1:ShipToPartySiteLocation>
<ns1:PeriodStartUsed xsi:nil="true"/>
<ns1:PeriodTypeUsed xsi:nil="true"/>
<ns1:InvoiceRuleName xsi:nil="true"/>
<ns1:AccountRuleName xsi:nil="true"/>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:PaymentTermId xsi:nil="true"/>
<ns1:PaymentTermName xsi:nil="true"/>
<ns1:CustomerPartyName>AT&amp;amp;T Universal Card</ns1:CustomerPartyName>
<ns1:CustomerPartySiteName>Jacksonville (OPS)</ns1:CustomerPartySiteName>
<ns1:PeriodTypeMeaning xsi:nil="true"/>
<ns1:PeriodStartMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:ContractCreditedAmount xsi:nil="true"/>
<ns1:ContractInvoicedAmount xsi:nil="true"/>
<ns1:UnbilledAmount currencyCode="USD">0</ns1:UnbilledAmount>
<ns1:TermsTemplateName xsi:nil="true"/>
<ns1:DocumentSubType xsi:nil="true"/>
<ns1:RenewalType xsi:nil="true"/>
<ns1:UnderAmendVersionFlag xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:UnderMigrationFlag xsi:nil="true"/>
<ns1:ContractId>100100069551035</ns1:ContractId>
<ns1:CorpCurrencyCode xsi:nil="true"/>
<ns1:CurcyConvRateType xsi:nil="true"/>
<ns1:QuoteToContactId xsi:nil="true"/>
```

```
<ns1:QuoteToContact xsi:nil="true"/>
<ns1:NegotiationCommChannel xsi:nil="true"/>
<ns1:NegotiationCustomerAcceptance xsi:nil="true"/>
<ns1:NegotiationEnableNotification xsi:nil="true"/>
<ns1:NegotiationInternalApproval xsi:nil="true"/>
<ns1:NegotiationLanguage xsi:nil="true"/>
<ns1:QuoteToCopyToEmail xsi:nil="true"/>
<ns1:QuotePhone xsi:nil="true"/>
<ns1:QuoteFax xsi:nil="true"/>
<ns1:QuoteEmail xsi:nil="true"/>
<ns1:QuoteAddress xsi:nil="true"/>
<ns1:QuoteOrg xsi:nil="true"/>
<ns1:QuoteAccount xsi:nil="true"/>
<ns1:PrimarySalesrepId xsi:nil="true"/>
<ns1:PrimarySalesRepresentative xsi:nil="true"/>
<ns1:NegotiationContractLayoutTemplate xsi:nil="true"/>
<ns1:NegotiationTermsLayoutTemplate xsi:nil="true"/>
<ns1:TransactionTypeName xsi:nil="true"/>
<ns1:AutoSendForSignature xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:EsignTemplateId xsi:nil="true"/>
<ns1:NonStandardClauseCount>0</ns1:NonStandardClauseCount>
<ns1:ContractPuid>KHDR-921</ns1:ContractPuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:RunContractExpertFlag xsi:nil="true"/>
<ns1:IgnoreQAWarningsFlag xsi:nil="true"/>
<ns1:BaseContractYN>N</ns1:BaseContractYN>
<ns1:ContractHeaderFlexfieldVA>
<ns7:ContractId>100100069551035</ns7:ContractId>
<ns7:FLEX_PARAM_ContractId>100100069551035</ns7:FLEX_PARAM_ContractId>
<ns7:biHeaderCode xsi:nil="true"/>
<ns7:biHeaderDff2 xsi:nil="true"/>
<ns7:zokcDffGText xsi:nil="true"/>
<ns7:zokcDffGDate xsi:nil="true"/>
<ns7:testName xsi:nil="true"/>
<ns7:zREL9BI68 xsi:nil="true"/>
<ns7:biqa3Code xsi:nil="true"/>
<ns7:zokcDffGNumber xsi:nil="true"/>
<ns7:pjbContractHeader14 xsi:nil="true"/>
<ns7:pjbContractHeader15 xsi:nil="true"/>
<ns7:zokcContractIntent xsi:nil="true"/>
<ns7:zokcContractLine xsi:nil="true"/>
<ns7:zokcContractLine_Display xsi:nil="true"/>
<ns7:__FLEX_Context xsi:nil="true"/>
<ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns7:_FLEX_NumOfSegments>12</ns7:_FLEX_NumOfSegments>
</ns1:ContractHeaderFlexfieldVA>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100128520962</ns1:Id>
<ns1:PartyRoleCode>CUSTOMER</ns1:PartyRoleCode>
<ns1:Role>Customer</ns1:Role>
<ns1:PartyId>1005</ns1:PartyId>
<ns1:PartyName>AT&amp;amp;T Universal Card</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128520962</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-2384</ns1:PartyRolePuid>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>300100128520962</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
```

```
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520962</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520962</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520962</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100128520959</ns1:Id>
<ns1:PartyRoleCode>SUPPLIER</ns1:PartyRoleCode>
<ns1:Role>Supplier</ns1:Role>
<ns1:PartyId>204</ns1:PartyId>
<ns1:PartyName>Vision Operations</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128520959</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-2388</ns1:PartyRolePuid>
<ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
<ns1:Id>300100128520961</ns1:Id>
<ns1:ContactRoleCode>CONTRACT_ADMIN</ns1:ContactRoleCode>
<ns1:Role>Contract administrator</ns1:Role>
<ns1:ContactId>100010032635417</ns1:ContactId>
<ns1:OwnerFlag>true</ns1:OwnerFlag>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128520961</ns1:ExternalKey>
<ns1:AccessLevel>FULL</ns1:AccessLevel>
<ns1:AccessLevelName>Full</ns1:AccessLevelName>
<ns1:SignerYn xsi:nil="true"/>
<ns1:PartyContactName>Charles Smith</ns1:PartyContactName>
<ns1:SignerSequence xsi:nil="true"/>
<ns1:RoutingSequence xsi:nil="true"/>
<ns1:SignatureRole xsi:nil="true"/>
<ns1:SignatureRoleMeaning xsi:nil="true"/>
<ns1:ContactPuid>CNTC-1550</ns1:ContactPuid>
<ns1:ContractPartyContactFlexfieldVA>
<ns2:Id>300100128520961</ns2:Id>
<ns2:MajorVersion>1</ns2:MajorVersion>
```

```
 <ns2:__FLEX_Context xsi:nil="true"/>
 <ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
 </ns1:ContractPartyContactFlexfieldVA>
 </ns1:ContractPartyContact>
 <ns1:ContractPartyFlexfieldVA>
 <ns3:Id>300100128520959</ns3:Id>
 <ns3:MajorVersion>1</ns3:MajorVersion>
 <ns3:_Party__Location xsi:nil="true"/>
 <ns3:_Global__Segment__1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
 </ns1:ContractPartyFlexfieldVA>
 <ns1:ContractPartyTranslation>
 <ns1:Id>300100128520959</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Language>IW</ns1:Language>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:Cognomen xsi:nil="true"/>
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
 <ns1:ContractPartyTranslation>
 <ns1:Id>300100128520959</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Language>KO</ns1:Language>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:Cognomen xsi:nil="true"/>
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
 <ns1:ContractPartyTranslation>
 <ns1:Id>300100128520959</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Language>US</ns1:Language>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:Cognomen xsi:nil="true"/>
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
 </ns1:ContractParty>
 <ns1:ContractHeaderTranslation>
 <ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_DR2</ns1:Cognomen>
 <ns1:Description xsi:nil="true"/>
 <ns1:Id>300100128520957</ns1:Id>
 <ns1:Language>IW</ns1:Language>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:ShortDescription xsi:nil="true"/>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:VersionDescription xsi:nil="true"/>
 </ns1:ContractHeaderTranslation>
 <ns1:ContractHeaderTranslation>
 <ns1:Cognomen>[PJS CPBF Flow ContractΩ'+++ '+++ 'Ø</ns1:Cognomen>
 <ns1:Description>[Contract to be employed to execute CPBF Flow.Ω'+++ '+++ '+++ '+++ '+++ '++Ø</
ns1:Description>
 <ns1:Id>300100128520957</ns1:Id>
 <ns1:Language>KO</ns1:Language>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:ShortDescription xsi:nil="true"/>
 <ns1:SourceLang>KO</ns1:SourceLang>
 <ns1:VersionDescription xsi:nil="true"/>
 </ns1:ContractHeaderTranslation>
 <ns1:ContractHeaderTranslation>
 <ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_DR2</ns1:Cognomen>
 <ns1:Description xsi:nil="true"/>
 <ns1:Id>300100128520957</ns1:Id>
 <ns1:Language>US</ns1:Language>
 <ns1:MajorVersion>1</ns1:MajorVersion>
```

```
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>100100066614242</ns1:Id>
<ns1:LineId>100100095831712</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>1</ns1:ItemName>
<ns1:ItemNameTxt>1</ns1:ItemNameTxt>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode xsi:nil="true"/>
<ns1:UnitOfMeasure xsi:nil="true"/>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity xsi:nil="true"/>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount currencyCode="USD">175000</ns1:LineValueAmount>
<ns1:LineAmount currencyCode="USD">175000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
```

```
<ns1:ShipToSite>Jacksonville (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:WareHouse xsi:nil="true"/>
<ns1:BillPlanId>300100128520963</ns1:BillPlanId>
<ns1:BillPlan>BP1</ns1:BillPlan>
<ns1:RevenuePlanId>300100128520964</ns1:RevenuePlanId>
<ns1:RevenuePlan>RP1</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:TaxExemptionControlMeaning>Standard</ns1:TaxExemptionControlMeaning>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>N</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference>1</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:Cognomen xsi:nil="true"/>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>100100066614242</ns1:ExternalKey>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId xsi:nil="true"/>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity xsi:nil="true"/>
```

```
<ns1:PriceItemUOM xsi:nil="true"/>
<ns1:BillToAccountDescription xsi:nil="true"/>
<ns1:BillToAccount xsi:nil="true"/>
<ns1:BillToAccountNumber xsi:nil="true"/>
<ns1:BillToSiteUseLocation xsi:nil="true"/>
<ns1:BillToSiteUseId xsi:nil="true"/>
<ns1:BillToAddress xsi:nil="true"/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-4869</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095831712</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095831712</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066614242</ns1:Id>
```

```
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066614242</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[PJS CPBF Line1Ω'+++ Ø</ns1:ItemDescription>
<ns1:ItemName>[PJS CPBF Line1Ω'+++ Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066614242</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>300100128520966</ns5:BillingControlId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate xsi:nil="true"/>
<ns5:SoftLimitAmount currencyCode="USD">175000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300100128520968</ns5:LinkId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:ProjectId>300100128520811</ns5:ProjectId>
<ns5:ProjectNumber>PJB_CDRM_CNT_INV_GEN_DR2</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:BillPlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100128520963</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
```

```
<ns5:BillMethodId>1003</ns5:BillMethodId>
<ns5:BillMethodName>Bill Rate Invoice</ns5:BillMethodName>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceCurrencyOptCode>CONTRACT</ns5:InvoiceCurrencyOptCode>
<ns5:BillingCurrencyType>Contract</ns5:BillingCurrencyType>
<ns5:PaymentTermsId>4</ns5:PaymentTermsId>
<ns5:PaymentTerms>30 Net</ns5:PaymentTerms>
<ns5:BillSetNumber>1</ns5:BillSetNumber>
<ns5:BillToCustomerAccountId>1005</ns5:BillToCustomerAccountId>
<ns5:BillToAccountNumber>1005</ns5:BillToAccountNumber>
<ns5:BillToSiteUseId>1023</ns5:BillToSiteUseId>
<ns5:BillToSite>Jacksonville (OPS)</ns5:BillToSite>
<ns5:BillToContactId>4840</ns5:BillToContactId>
<ns5:BillToContactName>Paula Springer</ns5:BillToContactName>
<ns5:BillToContactEmail>sendmail-test-discard@oracle.com</ns5:BillToContactEmail>
<ns5:BillingCycleId>1000000000003</ns5:BillingCycleId>
<ns5:BillingCycle>Monthly</ns5:BillingCycle>
<ns5:LaborInvoiceFormatId>7004</ns5:LaborInvoiceFormatId>
<ns5:LaborInvoiceFormat>Contract Line Project/Task Emp</ns5:LaborInvoiceFormat>
<ns5:NlInvoiceFormatId>7005</ns5:NlInvoiceFormatId>
<ns5:NonlaborInvoiceFormat>Contract Line Project/Task Exp</ns5:NonlaborInvoiceFormat>
<ns5:EventsInvoiceFormatId>100000011213026</ns5:EventsInvoiceFormatId>
<ns5:EventInvoiceFormat>Cont Line Project/Task Event</ns5:EventInvoiceFormat>
<ns5:FirstBillingOffsetDays xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:PersonBillRateSchId>300100001800278</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule>PJS CPBF Employee Act Rev Rate</ns5:PersonRateSchedule>
<ns5:JobBillRateSchId>100000010179011</ns5:JobBillRateSchId>
<ns5:JobRateSchedule>Construction Job Bill Rates</ns5:JobRateSchedule>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId>300100001800288</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule>PJS CPBF Nonlabor Actual Rev</ns5:NonlaborRateSchedule>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:InvoiceCurrencyDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyExchgDate xsi:nil="true"/>
<ns5:InvoiceCurrencyRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyCode xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
```

```
<ns5:DocumentNumber xsi:nil="true"/>
<ns5:LocFlag xsi:nil="true"/>
<ns5:ReportTypeCode xsi:nil="true"/>
<ns5:FederalInvoiceFormat xsi:nil="true"/>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128520963</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128520963</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128520963</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanDescriptiveFlexField>
<ns8:BillPlanId>300100128520963</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:BillPlanDescriptiveFlexField>
</ns1:BillPlan>
<ns1:BillingControl>
<ns5:BillingControlId>300100128520965</ns5:BillingControlId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate xsi:nil="true"/>
<ns5:SoftLimitAmount currencyCode="USD">175000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:RevenuePlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100128520964</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>100000015590467</ns5:BillMethodId>
<ns5:BillMethodName>As Incurred Method</ns5:BillMethodName>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:PersonBillRateSchId xsi:nil="true"/>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId xsi:nil="true"/>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
```

```
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId xsi:nil="true"/>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:RevenuePlanDescriptiveFlexField>
<ns8:BillPlanId>300100128520964</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:RevenuePlanDescriptiveFlexField>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128520964</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128520964</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128520964</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
</ns1:RevenuePlan>
<ns1:OKCSOPText_c xsi:nil="true"/>
```

```
<ns1:OKCSOPNumber_c xsi:nil="true"/>
<ns1:OKCSOPDate_c xsi:nil="true"/>
<ns1:OKCSOPLong_c xsi:nil="true"/>
<ns1:OKCSOPDCL_Id_c xsi:nil="true"/>
<ns1:OKCSOPDCL_c xsi:nil="true"/>
</ns1:Value>
<ns1:Value>
<ns1:Id>300100128520972</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128520972</ns1:ExternalKey>
<ns1:InvConvRateTypeName>Spot</ns1:InvConvRateTypeName>
<ns1:InvConvRateDateTypeName>Transaction date</ns1:InvConvRateDateTypeName>
<ns1:OrgName>Vision Operations</ns1:OrgName>
<ns1:OrgId>204</ns1:OrgId>
<ns1:ContractTypeName>Sell : Project lines</ns1:ContractTypeName>
<ns1:ContractClass>CONTRACT</ns1:ContractClass>
<ns1:ContractTypeId>104</ns1:ContractTypeId>
<ns1:ContractNumber>PJB_CDRM_CNT_INV_GEN_SB1</ns1:ContractNumber>
<ns1:ContractNumberModifier xsi:nil="true"/>
<ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_SB1</ns1:Cognomen>
<ns1:BuyOrSell>S</ns1:BuyOrSell>
<ns1:PartyId>1005</ns1:PartyId>
<ns1:PartyName>AT&amp;amp;T Universal Card</ns1:PartyName>
<ns1:InvOrganizationId xsi:nil="true"/>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:CurrencyCode>USD</ns1:CurrencyCode>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:InvConvRateType>Spot</ns1:InvConvRateType>
<ns1:InvConvRateDateType>TRANSACTION</ns1:InvConvRateDateType>
<ns1:InvConvRateDate xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:InvTrxTypeName>PA Invoice</ns1:InvTrxTypeName>
<ns1:BillToAccountId>1005</ns1:BillToAccountId>
<ns1:BillToAccount>AT&amp;amp;T Universal Card</ns1:BillToAccount>
<ns1:BillToAccountNumber>1005</ns1:BillToAccountNumber>
<ns1:BillToSiteUseId>1023</ns1:BillToSiteUseId>
<ns1:BillToSiteUseLocation>Jacksonville (OPS)</ns1:BillToSiteUseLocation>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
<ns1:ShipToSiteUseLocation>Jacksonville (OPS)</ns1:ShipToSiteUseLocation>
<ns1:SoldToAccountId xsi:nil="true"/>
<ns1:SoldToAccount xsi:nil="true"/>
<ns1:SoldToAccountNumber xsi:nil="true"/>
<ns1:SoldToSiteId xsi:nil="true"/>
<ns1:SoldToNumber xsi:nil="true"/>
<ns1:SoldToAddress xsi:nil="true"/>
<ns1:SoldToAccountDescription xsi:nil="true"/>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:LegalEntityId>204</ns1:LegalEntityId>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:DateApproved>2019-12-12</ns1:DateApproved>
<ns1:DatetimeCancelled xsi:nil="true"/>
<ns1:DateSigned>2019-12-12</ns1:DateSigned>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:TerminateCancelSource xsi:nil="true"/>
<ns1:ContributionPercent>1</ns1:ContributionPercent>
<ns1:BillSequence xsi:nil="true"/>
<ns1:OverallRiskCode xsi:nil="true"/>
<ns1:ShortDescription xsi:nil="true"/>
```

```
<ns1:Description xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:AmendmentEffectiveDate>2017-01-01</ns1:AmendmentEffectiveDate>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ProjectEnabledFlag>true</ns1:ProjectEnabledFlag>
<ns1:OutputTaxSetId>204</ns1:OutputTaxSetId>
<ns1:PartyObjectType>OKX_PARTY</ns1:PartyObjectType>
<ns1:PrimaryLedgerId>1</ns1:PrimaryLedgerId>
<ns1:CustomerPartyId>1005</ns1:CustomerPartyId>
<ns1:CustomerPartySiteId>1024</ns1:CustomerPartySiteId>
<ns1:GeneratedInvoiceStatus>S</ns1:GeneratedInvoiceStatus>
<ns1:OwningOrgId>204</ns1:OwningOrgId>
<ns1:NetInvoiceFlag>false</ns1:NetInvoiceFlag>
<ns1:VersionType>C</ns1:VersionType>
<ns1:OwningOrgName>Vision Operations</ns1:OwningOrgName>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:ExemptionReasonMeaning xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:ApTermsId xsi:nil="true"/>
<ns1:ServiceEnabledFlag>false</ns1:ServiceEnabledFlag>
<ns1:EstimatedAmount currencyCode="USD">350000</ns1:EstimatedAmount>
<ns1:TaxAmount currencyCode="USD">0</ns1:TaxAmount>
<ns1:LastUpdateDate>2019-12-12T06:30:47.087Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>991B27C5C79A77F1E0533DFDF40AAC63</ns1:LastUpdateLogin>
<ns1:LastUpdatedBy>ABRAHAM.MASON</ns1:LastUpdatedBy>
<ns1:CreatedBy>ABRAHAM.MASON</ns1:CreatedBy>
<ns1:CreationDate>2019-12-12T00:00:00Z</ns1:CreationDate>
<ns1:LedgerCurrency>USD</ns1:LedgerCurrency>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:AgreementEnabledFlag>false</ns1:AgreementEnabledFlag>
<ns1:CloseReason xsi:nil="true"/>
<ns1:CancelReason xsi:nil="true"/>
<ns1:AuthoringPartyCode xsi:nil="true"/>
<ns1:HoldReasonMeaning xsi:nil="true"/>
<ns1:PrimaryPartyId>1005</ns1:PrimaryPartyId>
<ns1:PersonId>100010032550827</ns1:PersonId>
<ns1:SalesAccountId xsi:nil="true"/>
<ns1:OrigSystemId>300100128520957</ns1:OrigSystemId>
<ns1:OrigSystemReference>1</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:AllowExternalItemFlag>false</ns1:AllowExternalItemFlag>
<ns1:SalesAccountName xsi:nil="true"/>
<ns1:ItemSourceCode>PRODUCT_MASTER</ns1:ItemSourceCode>
<ns1:StateTransitionFlowName xsi:nil="true"/>
<ns1:StateTransitionFlowState>ACTIVE</ns1:StateTransitionFlowState>
<ns1:UserStatusCode xsi:nil="true"/>
<ns1:AssigneeType xsi:nil="true"/>
<ns1:AssigneeId xsi:nil="true"/>
<ns1:Assignee xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:AccessLevel>UPDATE</ns1:AccessLevel>
<ns1:TemplateFlag>false</ns1:TemplateFlag>
<ns1:BillingSalesrepId xsi:nil="true"/>
<ns1:BillingSalesrepName xsi:nil="true"/>
<ns1:VersionDescription xsi:nil="true"/>
<ns1:Comment xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:AdjustmentBasis xsi:nil="true"/>
<ns1:CommitmentAmount currencyCode="USD">0</ns1:CommitmentAmount>
<ns1:PricingCalendarId xsi:nil="true"/>
<ns1:PricingPeriodType xsi:nil="true"/>
```

```
<ns1:PricingCalendarName xsi:nil="true"/>
<ns1:DiscountPercent xsi:nil="true"/>
<ns1:PriceListName xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:WebServiceFlag xsi:nil="true"/>
<ns1:TermsTemplateId xsi:nil="true"/>
<ns1:ContractOwnerId xsi:nil="true"/>
<ns1:Status>Active</ns1:Status>
<ns1:AuthoringPartyMeaning xsi:nil="true"/>
<ns1:InvOrgName/>
<ns1:Supplier/>
<ns1:SupplierSite xsi:nil="true"/>
<ns1:ShipInvOrg/>
<ns1:RecvInvOrg/>
<ns1:Currency>US Dollar</ns1:Currency>
<ns1:UserStatusMeaning/>
<ns1:LegalEntityName>Vision Operations</ns1:LegalEntityName>
<ns1:ShipToOrgLocation/>
<ns1:ChrType xsi:nil="true"/>
<ns1:EnableElectronicSignFlag>false</ns1:EnableElectronicSignFlag>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:AllowCurrencyOverrideFlag xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:ContractTrueValue xsi:nil="true"/>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:PricingSegmentExplanation xsi:nil="true"/>
<ns1:PricingStrategyExplanation xsi:nil="true"/>
<ns1:SegmentExplanationMessageName xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId>1033</ns1:ShipToPartySiteId>
<ns1:Subtotal>0</ns1:Subtotal>
<ns1:PricingStrategyId xsi:nil="true"/>
<ns1:PricingStrategyName xsi:nil="true"/>
<ns1:PricingSegmentCode xsi:nil="true"/>
<ns1:InvConversionRate xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PricingEffectivityDate/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation>5645 Main Street , , Jacksonville32209 , FL</ns1:ShipToPartySiteLocation>
<ns1:PeriodStartUsed xsi:nil="true"/>
<ns1:PeriodTypeUsed xsi:nil="true"/>
<ns1:InvoiceRuleName xsi:nil="true"/>
<ns1:AccountRuleName xsi:nil="true"/>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:PaymentTermId xsi:nil="true"/>
<ns1:PaymentTermName xsi:nil="true"/>
<ns1:CustomerPartyName>AT&amp;amp;T Universal Card</ns1:CustomerPartyName>
<ns1:CustomerPartySiteName>Jacksonville (OPS)</ns1:CustomerPartySiteName>
<ns1:PeriodTypeMeaning xsi:nil="true"/>
<ns1:PeriodStartMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:ContractCreditedAmount xsi:nil="true"/>
<ns1:ContractInvoicedAmount xsi:nil="true"/>
<ns1:UnbilledAmount currencyCode="USD">0</ns1:UnbilledAmount>
<ns1:TermsTemplateName xsi:nil="true"/>
<ns1:DocumentSubType xsi:nil="true"/>
<ns1:RenewalType xsi:nil="true"/>
<ns1:UnderAmendVersionFlag>true</ns1:UnderAmendVersionFlag>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:UnderMigrationFlag xsi:nil="true"/>
<ns1:ContractId>100100069551036</ns1:ContractId>
<ns1:CorpCurrencyCode xsi:nil="true"/>
```

```
<ns1:CurcyConvRateType xsi:nil="true"/>
<ns1:QuoteToContactId xsi:nil="true"/>
<ns1:QuoteToContact xsi:nil="true"/>
<ns1:NegotiationCommChannel xsi:nil="true"/>
<ns1:NegotiationCustomerAcceptance xsi:nil="true"/>
<ns1:NegotiationEnableNotification xsi:nil="true"/>
<ns1:NegotiationInternalApproval xsi:nil="true"/>
<ns1:NegotiationLanguage xsi:nil="true"/>
<ns1:QuoteToCopyToEmail xsi:nil="true"/>
<ns1:QuotePhone xsi:nil="true"/>
<ns1:QuoteFax xsi:nil="true"/>
<ns1:QuoteEmail xsi:nil="true"/>
<ns1:QuoteAddress xsi:nil="true"/>
<ns1:QuoteOrg xsi:nil="true"/>
<ns1:QuoteAccount xsi:nil="true"/>
<ns1:PrimarySalesrepId xsi:nil="true"/>
<ns1:PrimarySalesRepresentative xsi:nil="true"/>
<ns1:NegotiationContractLayoutTemplate xsi:nil="true"/>
<ns1:NegotiationTermsLayoutTemplate xsi:nil="true"/>
<ns1:TransactionTypeName xsi:nil="true"/>
<ns1:AutoSendForSignature xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:EsignTemplateId xsi:nil="true"/>
<ns1:NonStandardClauseCount>0</ns1:NonStandardClauseCount>
<ns1:ContractPuid>KHDR-922</ns1:ContractPuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:RunContractExpertFlag xsi:nil="true"/>
<ns1:IgnoreQAWarningsFlag xsi:nil="true"/>
<ns1:BaseContractYN>N</ns1:BaseContractYN>
<ns1:ContractHeaderFlexfieldVA>
<ns7:ContractId>100100069551036</ns7:ContractId>
<ns7:FLEX_PARAM_ContractId>100100069551036</ns7:FLEX_PARAM_ContractId>
<ns7:biHeaderCode xsi:nil="true"/>
<ns7:biHeaderDff2 xsi:nil="true"/>
<ns7:zokcDffGText xsi:nil="true"/>
<ns7:zokcDffGDate xsi:nil="true"/>
<ns7:testName xsi:nil="true"/>
<ns7:zREL9BI68 xsi:nil="true"/>
<ns7:biqa3Code xsi:nil="true"/>
<ns7:zokcDffGNumber xsi:nil="true"/>
<ns7:pjbContractHeader14 xsi:nil="true"/>
<ns7:pjbContractHeader15 xsi:nil="true"/>
<ns7:zokcContractIntent xsi:nil="true"/>
<ns7:zokcContractLine xsi:nil="true"/>
<ns7:zokcContractLine_Display xsi:nil="true"/>
<ns7:__FLEX_Context xsi:nil="true"/>
<ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns7:_FLEX_NumOfSegments>12</ns7:_FLEX_NumOfSegments>
</ns1:ContractHeaderFlexfieldVA>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100128520977</ns1:Id>
<ns1:PartyRoleCode>CUSTOMER</ns1:PartyRoleCode>
<ns1:Role>Customer</ns1:Role>
<ns1:PartyId>1005</ns1:PartyId>
<ns1:PartyName>AT&amp;amp;T Universal Card</ns1:PartyName>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128520977</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-2861</ns1:PartyRolePuid>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>300100128520977</ns3:Id>
```

```
<ns3:MajorVersion>2</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520977</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520977</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520977</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100128520974</ns1:Id>
<ns1:PartyRoleCode>SUPPLIER</ns1:PartyRoleCode>
<ns1:Role>Supplier</ns1:Role>
<ns1:PartyId>204</ns1:PartyId>
<ns1:PartyName>Vision Operations</ns1:PartyName>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128520974</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-2860</ns1:PartyRolePuid>
<ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
<ns1:Id>300100128520976</ns1:Id>
<ns1:ContactRoleCode>CONTRACT_ADMIN</ns1:ContactRoleCode>
<ns1:Role>Contract administrator</ns1:Role>
<ns1:ContactId>100010032635417</ns1:ContactId>
<ns1:OwnerFlag>true</ns1:OwnerFlag>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128520976</ns1:ExternalKey>
<ns1:AccessLevel>FULL</ns1:AccessLevel>
<ns1:AccessLevelName>Full</ns1:AccessLevelName>
<ns1:SignerYn xsi:nil="true"/>
<ns1:PartyContactName>Charles Smith</ns1:PartyContactName>
<ns1:SignerSequence xsi:nil="true"/>
<ns1:RoutingSequence xsi:nil="true"/>
<ns1:SignatureRole xsi:nil="true"/>
<ns1:SignatureRoleMeaning xsi:nil="true"/>
<ns1:ContactPuid>CNTC-1551</ns1:ContactPuid>
<ns1:ContractPartyContactFlexfieldVA>
```

```
<ns2:Id>300100128520976</ns2:Id>
<ns2:MajorVersion>1</ns2:MajorVersion>
<ns2:__FLEX_Context xsi:nil="true"/>
<ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
</ns1:ContractPartyContactFlexfieldVA>
</ns1:ContractPartyContact>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>300100128520974</ns3:Id>
<ns3:MajorVersion>2</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520974</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520974</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520974</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_SB1</ns1:Cognomen>
<ns1:Description xsi:nil="true"/>
<ns1:Id>300100128520972</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>[PJS CPBF Flow ContractΩ'+++ '+++ 'Ø</ns1:Cognomen>
<ns1:Description>[Contract to be employed to execute CPBF Flow.Ω'+++ '+++ '+++ '+++ '+++ '++Ø</
ns1:Description>
<ns1:Id>300100128520972</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>KO</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_SB1</ns1:Cognomen>
<ns1:Description xsi:nil="true"/>
<ns1:Id>300100128520972</ns1:Id>
```

```
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>100100066614243</ns1:Id>
<ns1:LineId>100100095831713</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>1</ns1:ItemName>
<ns1:ItemNameTxt>1</ns1:ItemNameTxt>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode xsi:nil="true"/>
<ns1:UnitOfMeasure xsi:nil="true"/>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity xsi:nil="true"/>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount currencyCode="USD">175000</ns1:LineValueAmount>
<ns1:LineAmount currencyCode="USD">175000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
```

```
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Jacksonville (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:WareHouse xsi:nil="true"/>
<ns1:BillPlanId>300100128520978</ns1:BillPlanId>
<ns1:BillPlan>BP1</ns1:BillPlan>
<ns1:RevenuePlanId>300100128520979</ns1:RevenuePlanId>
<ns1:RevenuePlan>RP1</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:TaxExemptionControlMeaning>Standard</ns1:TaxExemptionControlMeaning>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>N</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference>1</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:Cognomen xsi:nil="true"/>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>100100066614243</ns1:ExternalKey>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId xsi:nil="true"/>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
```

```
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity xsi:nil="true"/>
<ns1:PriceItemUOM xsi:nil="true"/>
<ns1:BillToAccountDescription xsi:nil="true"/>
<ns1:BillToAccount xsi:nil="true"/>
<ns1:BillToAccountNumber xsi:nil="true"/>
<ns1:BillToSiteUseLocation xsi:nil="true"/>
<ns1:BillToSiteUseId xsi:nil="true"/>
<ns1:BillToAddress xsi:nil="true"/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-4870</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095831713</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095831713</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
```

```
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066614243</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066614243</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[PJS CPBF Line1Ω'+++ Ø</ns1:ItemDescription>
<ns1:ItemName>[PJS CPBF Line1Ω'+++ Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066614243</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>300100128520981</ns5:BillingControlId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate xsi:nil="true"/>
<ns5:SoftLimitAmount currencyCode="USD">175000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300100128520986</ns5:LinkId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:ProjectId>300100128520838</ns5:ProjectId>
<ns5:ProjectNumber>PJB_CDRM_CNT_INV_GEN_SB1</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
```

```
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>100100133011469</ns1:Id>
<ns1:LineId>100100133011469</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>2</ns1:ItemName>
<ns1:ItemNameTxt>2</ns1:ItemNameTxt>
<ns1:ItemDescription>2</ns1:ItemDescription>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode xsi:nil="true"/>
<ns1:UnitOfMeasure xsi:nil="true"/>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity xsi:nil="true"/>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount currencyCode="USD">175000</ns1:LineValueAmount>
<ns1:LineAmount currencyCode="USD">175000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Jacksonville (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:WareHouse xsi:nil="true"/>
<ns1:BillPlanId>300100128520978</ns1:BillPlanId>
<ns1:BillPlan>BP1</ns1:BillPlan>
```

```
<ns1:RevenuePlanId>300100128520979</ns1:RevenuePlanId>
<ns1:RevenuePlan>RP1</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:TaxExemptionControlMeaning>Standard</ns1:TaxExemptionControlMeaning>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>N</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference>2</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:Cognomen xsi:nil="true"/>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId xsi:nil="true"/>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity xsi:nil="true"/>
<ns1:PriceItemUOM xsi:nil="true"/>
<ns1:BillToAccountDescription xsi:nil="true"/>
<ns1:BillToAccount xsi:nil="true"/>
<ns1:BillToAccountNumber xsi:nil="true"/>
<ns1:BillToSiteUseLocation xsi:nil="true"/>
```

```
<ns1:BillToSiteUseId xsi:nil="true"/>
<ns1:BillToAddress xsi:nil="true"/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-26730</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100133011469</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100133011469</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100133011469</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>2</ns1:ItemDescription>
<ns1:ItemName>2</ns1:ItemName>
```

```
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100133011469</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[PJS CPBF Line1Ω'+++ Ø</ns1:ItemDescription>
<ns1:ItemName>[PJS CPBF Line1Ω'+++ Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100133011469</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>2</ns1:ItemDescription>
<ns1:ItemName>2</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>300100185947681</ns5:BillingControlId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate xsi:nil="true"/>
<ns5:SoftLimitAmount currencyCode="USD">175000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300100185947682</ns5:LinkId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:ProjectId>300100128520838</ns5:ProjectId>
<ns5:ProjectNumber>PJB_CDRM_CNT_INV_GEN_SB1</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:BillPlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100128520978</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:BillMethodId>1003</ns5:BillMethodId>
<ns5:BillMethodName>Bill Rate Invoice</ns5:BillMethodName>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceCurrencyOptCode>CONTRACT</ns5:InvoiceCurrencyOptCode>
<ns5:BillingCurrencyType>Contract</ns5:BillingCurrencyType>
```

```
<ns5:PaymentTermsId>4</ns5:PaymentTermsId>
<ns5:PaymentTerms>30 Net</ns5:PaymentTerms>
<ns5:BillSetNumber>1</ns5:BillSetNumber>
<ns5:BillToCustomerAccountId>1005</ns5:BillToCustomerAccountId>
<ns5:BillToAccountNumber>1005</ns5:BillToAccountNumber>
<ns5:BillToSiteUseId>1023</ns5:BillToSiteUseId>
<ns5:BillToSite>Jacksonville (OPS)</ns5:BillToSite>
<ns5:BillToContactId>4840</ns5:BillToContactId>
<ns5:BillToContactName>Paula Springer</ns5:BillToContactName>
<ns5:BillToContactEmail>sendmail-test-discard@oracle.com</ns5:BillToContactEmail>
<ns5:BillingCycleId>1000000000003</ns5:BillingCycleId>
<ns5:BillingCycle>Monthly</ns5:BillingCycle>
<ns5:LaborInvoiceFormatId>7004</ns5:LaborInvoiceFormatId>
<ns5:LaborInvoiceFormat>Contract Line Project/Task Emp</ns5:LaborInvoiceFormat>
<ns5:NlInvoiceFormatId>7005</ns5:NlInvoiceFormatId>
<ns5:NonlaborInvoiceFormat>Contract Line Project/Task Exp</ns5:NonlaborInvoiceFormat>
<ns5:EventsInvoiceFormatId>100000011213026</ns5:EventsInvoiceFormatId>
<ns5:EventInvoiceFormat>Cont Line Project/Task Event</ns5:EventInvoiceFormat>
<ns5:FirstBillingOffsetDays xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:PersonBillRateSchId>300100001800278</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule>PJS CPBF Employee Act Rev Rate</ns5:PersonRateSchedule>
<ns5:JobBillRateSchId>100000010179011</ns5:JobBillRateSchId>
<ns5:JobRateSchedule>Construction Job Bill Rates</ns5:JobRateSchedule>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId>300100001800288</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule>PJS CPBF Nonlabor Actual Rev</ns5:NonlaborRateSchedule>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:InvoiceCurrencyDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyExchgDate xsi:nil="true"/>
<ns5:InvoiceCurrencyRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyCode xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:DocumentNumber xsi:nil="true"/>
<ns5:LocFlag xsi:nil="true"/>
<ns5:ReportTypeCode xsi:nil="true"/>
<ns5:FederalInvoiceFormat xsi:nil="true"/>
<ns5:BillPlanTranslation>
```

```
<ns5:BillPlanId>300100128520978</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128520978</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128520978</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanDescriptiveFlexField>
<ns8:BillPlanId>300100128520978</ns8:BillPlanId>
<ns8:MajorVersion>2</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:BillPlanDescriptiveFlexField>
</ns1:BillPlan>
<ns1:BillingControl>
<ns5:BillingControlId>300100128520980</ns5:BillingControlId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate xsi:nil="true"/>
<ns5:SoftLimitAmount currencyCode="USD">350000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:RevenuePlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100128520979</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:BillMethodId>100000015590467</ns5:BillMethodId>
<ns5:BillMethodName>As Incurred Method</ns5:BillMethodName>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:PersonBillRateSchId xsi:nil="true"/>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId xsi:nil="true"/>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId xsi:nil="true"/>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
```

```
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:RevenuePlanDescriptiveFlexField>
<ns8:BillPlanId>300100128520979</ns8:BillPlanId>
<ns8:MajorVersion>2</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:RevenuePlanDescriptiveFlexField>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128520979</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128520979</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128520979</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
</ns1:RevenuePlan>
<ns1:OKCSOPText_c xsi:nil="true"/>
<ns1:OKCSOPNumber_c xsi:nil="true"/>
<ns1:OKCSOPDate_c xsi:nil="true"/>
<ns1:OKCSOPLong_c xsi:nil="true"/>
<ns1:OKCSOPDCL_Id_c xsi:nil="true"/>
<ns1:OKCSOPDCL_c xsi:nil="true"/>
```

```
</ns1:Value>
<ns1:Value>
<ns1:Id>300100128520989</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128520989</ns1:ExternalKey>
<ns1:InvConvRateTypeName>Spot</ns1:InvConvRateTypeName>
<ns1:InvConvRateDateTypeName>Transaction date</ns1:InvConvRateDateTypeName>
<ns1:OrgName>Vision Operations</ns1:OrgName>
<ns1:OrgId>204</ns1:OrgId>
<ns1:ContractTypeName>Sell : Project lines</ns1:ContractTypeName>
<ns1:ContractClass>CONTRACT</ns1:ContractClass>
<ns1:ContractTypeId>104</ns1:ContractTypeId>
<ns1:ContractNumber>PJB_CDRM_CNT_INV_GEN_SB2</ns1:ContractNumber>
<ns1:ContractNumberModifier xsi:nil="true"/>
<ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_SB2</ns1:Cognomen>
<ns1:BuyOrSell>S</ns1:BuyOrSell>
<ns1:PartyId>1005</ns1:PartyId>
<ns1:PartyName>AT&amp;amp;T Universal Card</ns1:PartyName>
<ns1:InvOrganizationId xsi:nil="true"/>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:CurrencyCode>USD</ns1:CurrencyCode>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:InvConvRateType>Spot</ns1:InvConvRateType>
<ns1:InvConvRateDateType>TRANSACTION</ns1:InvConvRateDateType>
<ns1:InvConvRateDate xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:InvTrxTypeName>PA Invoice</ns1:InvTrxTypeName>
<ns1:BillToAccountId>1005</ns1:BillToAccountId>
<ns1:BillToAccount>AT&amp;amp;T Universal Card</ns1:BillToAccount>
<ns1:BillToAccountNumber>1005</ns1:BillToAccountNumber>
<ns1:BillToSiteUseId>1023</ns1:BillToSiteUseId>
<ns1:BillToSiteUseLocation>Jacksonville (OPS)</ns1:BillToSiteUseLocation>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
<ns1:ShipToSiteUseLocation>Jacksonville (OPS)</ns1:ShipToSiteUseLocation>
<ns1:SoldToAccountId xsi:nil="true"/>
<ns1:SoldToAccount xsi:nil="true"/>
<ns1:SoldToAccountNumber xsi:nil="true"/>
<ns1:SoldToSiteId xsi:nil="true"/>
<ns1:SoldToNumber xsi:nil="true"/>
<ns1:SoldToAddress xsi:nil="true"/>
<ns1:SoldToAccountDescription xsi:nil="true"/>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:LegalEntityId>204</ns1:LegalEntityId>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:DateApproved>2018-01-17</ns1:DateApproved>
<ns1:DatetimeCancelled xsi:nil="true"/>
<ns1:DateSigned>2018-01-17</ns1:DateSigned>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:TerminateCancelSource xsi:nil="true"/>
<ns1:ContributionPercent>1</ns1:ContributionPercent>
<ns1:BillSequence xsi:nil="true"/>
<ns1:OverallRiskCode xsi:nil="true"/>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:Description xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:AmendmentEffectiveDate xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
```

```
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ProjectEnabledFlag>true</ns1:ProjectEnabledFlag>
<ns1:OutputTaxSetId>204</ns1:OutputTaxSetId>
<ns1:PartyObjectType>OKX_PARTY</ns1:PartyObjectType>
<ns1:PrimaryLedgerId>1</ns1:PrimaryLedgerId>
<ns1:CustomerPartyId>1005</ns1:CustomerPartyId>
<ns1:CustomerPartySiteId>1024</ns1:CustomerPartySiteId>
<ns1:GeneratedInvoiceStatus>S</ns1:GeneratedInvoiceStatus>
<ns1:OwningOrgId>204</ns1:OwningOrgId>
<ns1:NetInvoiceFlag>false</ns1:NetInvoiceFlag>
<ns1:VersionType>C</ns1:VersionType>
<ns1:OwningOrgName>Vision Operations</ns1:OwningOrgName>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:ExemptionReasonMeaning xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:ApTermsId xsi:nil="true"/>
<ns1:ServiceEnabledFlag>false</ns1:ServiceEnabledFlag>
<ns1:EstimatedAmount currencyCode="USD">175000</ns1:EstimatedAmount>
<ns1:TaxAmount currencyCode="USD">0</ns1:TaxAmount>
<ns1:LastUpdateDate>2018-01-17T06:19:02.615Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>62F38C10B7305F66E0534180F50A51E2</ns1:LastUpdateLogin>
<ns1:LastUpdatedBy>ABRAHAM.MASON</ns1:LastUpdatedBy>
<ns1:CreatedBy>Charles.Smith</ns1:CreatedBy>
<ns1:CreationDate>2018-01-16T18:46:33.772Z</ns1:CreationDate>
<ns1:LedgerCurrency>USD</ns1:LedgerCurrency>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:AgreementEnabledFlag>false</ns1:AgreementEnabledFlag>
<ns1:CloseReason xsi:nil="true"/>
<ns1:CancelReason xsi:nil="true"/>
<ns1:AuthoringPartyCode xsi:nil="true"/>
<ns1:HoldReasonMeaning xsi:nil="true"/>
<ns1:PrimaryPartyId>1005</ns1:PrimaryPartyId>
<ns1:PersonId>100010032551061</ns1:PersonId>
<ns1:SalesAccountId xsi:nil="true"/>
<ns1:OrigSystemId>300100128520972</ns1:OrigSystemId>
<ns1:OrigSystemReference>1</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:AllowExternalItemFlag>false</ns1:AllowExternalItemFlag>
<ns1:SalesAccountName xsi:nil="true"/>
<ns1:ItemSourceCode>PRODUCT_MASTER</ns1:ItemSourceCode>
<ns1:StateTransitionFlowName xsi:nil="true"/>
<ns1:StateTransitionFlowState>ACTIVE</ns1:StateTransitionFlowState>
<ns1:UserStatusCode xsi:nil="true"/>
<ns1:AssigneeType xsi:nil="true"/>
<ns1:AssigneeId xsi:nil="true"/>
<ns1:Assignee xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:AccessLevel>UPDATE</ns1:AccessLevel>
<ns1:TemplateFlag>false</ns1:TemplateFlag>
<ns1:BillingSalesrepId xsi:nil="true"/>
<ns1:BillingSalesrepName xsi:nil="true"/>
<ns1:VersionDescription xsi:nil="true"/>
<ns1:Comment xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:AdjustmentBasis xsi:nil="true"/>
<ns1:CommitmentAmount currencyCode="USD">0</ns1:CommitmentAmount>
<ns1:PricingCalendarId xsi:nil="true"/>
<ns1:PricingPeriodType xsi:nil="true"/>
<ns1:PricingCalendarName xsi:nil="true"/>
<ns1:DiscountPercent xsi:nil="true"/>
<ns1:PriceListName xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
```

```
<ns1:WebServiceFlag xsi:nil="true"/>
<ns1:TermsTemplateId xsi:nil="true"/>
<ns1:ContractOwnerId xsi:nil="true"/>
<ns1:Status>Active</ns1:Status>
<ns1:AuthoringPartyMeaning xsi:nil="true"/>
<ns1:InvOrgName/>
<ns1:Supplier/>
<ns1:SupplierSite xsi:nil="true"/>
<ns1:ShipInvOrg/>
<ns1:RecvInvOrg/>
<ns1:Currency>US Dollar</ns1:Currency>
<ns1:UserStatusMeaning/>
<ns1:LegalEntityName>Vision Operations</ns1:LegalEntityName>
<ns1:ShipToOrgLocation/>
<ns1:ChrType xsi:nil="true"/>
<ns1:EnableElectronicSignFlag>false</ns1:EnableElectronicSignFlag>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:AllowCurrencyOverrideFlag xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:ContractTrueValue xsi:nil="true"/>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:PricingSegmentExplanation xsi:nil="true"/>
<ns1:PricingStrategyExplanation xsi:nil="true"/>
<ns1:SegmentExplanationMessageName xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId>1033</ns1:ShipToPartySiteId>
<ns1:Subtotal>0</ns1:Subtotal>
<ns1:PricingStrategyId xsi:nil="true"/>
<ns1:PricingStrategyName xsi:nil="true"/>
<ns1:PricingSegmentCode xsi:nil="true"/>
<ns1:InvConversionRate xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PricingEffectivityDate/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation>5645 Main Street , , Jacksonville32209 , FL</ns1:ShipToPartySiteLocation>
<ns1:PeriodStartUsed xsi:nil="true"/>
<ns1:PeriodTypeUsed xsi:nil="true"/>
<ns1:InvoiceRuleName xsi:nil="true"/>
<ns1:AccountRuleName xsi:nil="true"/>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:PaymentTermId xsi:nil="true"/>
<ns1:PaymentTermName xsi:nil="true"/>
<ns1:CustomerPartyName>AT&amp;amp;T Universal Card</ns1:CustomerPartyName>
<ns1:CustomerPartySiteName>Jacksonville (OPS)</ns1:CustomerPartySiteName>
<ns1:PeriodTypeMeaning xsi:nil="true"/>
<ns1:PeriodStartMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:ContractCreditedAmount xsi:nil="true"/>
<ns1:ContractInvoicedAmount xsi:nil="true"/>
<ns1:UnbilledAmount currencyCode="USD">0</ns1:UnbilledAmount>
<ns1:TermsTemplateName xsi:nil="true"/>
<ns1:DocumentSubType xsi:nil="true"/>
<ns1:RenewalType xsi:nil="true"/>
<ns1:UnderAmendVersionFlag xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:UnderMigrationFlag xsi:nil="true"/>
<ns1:ContractId>100100069551037</ns1:ContractId>
<ns1:CorpCurrencyCode xsi:nil="true"/>
<ns1:CurcyConvRateType xsi:nil="true"/>
<ns1:QuoteToContactId xsi:nil="true"/>
<ns1:QuoteToContact xsi:nil="true"/>
<ns1:NegotiationCommChannel xsi:nil="true"/>
<ns1:NegotiationCustomerAcceptance xsi:nil="true"/>
```

```
<ns1:NegotiationEnableNotification xsi:nil="true"/>
<ns1:NegotiationInternalApproval xsi:nil="true"/>
<ns1:NegotiationLanguage xsi:nil="true"/>
<ns1:QuoteToCopyToEmail xsi:nil="true"/>
<ns1:QuotePhone xsi:nil="true"/>
<ns1:QuoteFax xsi:nil="true"/>
<ns1:QuoteEmail xsi:nil="true"/>
<ns1:QuoteAddress xsi:nil="true"/>
<ns1:QuoteOrg xsi:nil="true"/>
<ns1:QuoteAccount xsi:nil="true"/>
<ns1:PrimarySalesrepId xsi:nil="true"/>
<ns1:PrimarySalesRepresentative xsi:nil="true"/>
<ns1:NegotiationContractLayoutTemplate xsi:nil="true"/>
<ns1:NegotiationTermsLayoutTemplate xsi:nil="true"/>
<ns1:TransactionTypeName xsi:nil="true"/>
<ns1:AutoSendForSignature xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:EsignTemplateId xsi:nil="true"/>
<ns1:NonStandardClauseCount>0</ns1:NonStandardClauseCount>
<ns1:ContractPuid>KHDR-923</ns1:ContractPuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:RunContractExpertFlag xsi:nil="true"/>
<ns1:IgnoreQAWarningsFlag xsi:nil="true"/>
<ns1:BaseContractYN>N</ns1:BaseContractYN>
<ns1:ContractHeaderFlexfieldVA>
<ns7:ContractId>100100069551037</ns7:ContractId>
<ns7:FLEX_PARAM_ContractId>100100069551037</ns7:FLEX_PARAM_ContractId>
<ns7:biHeaderCode xsi:nil="true"/>
<ns7:biHeaderDff2 xsi:nil="true"/>
<ns7:zokcDffGText xsi:nil="true"/>
<ns7:zokcDffGDate xsi:nil="true"/>
<ns7:testName xsi:nil="true"/>
<ns7:zREL9BI68 xsi:nil="true"/>
<ns7:biqa3Code xsi:nil="true"/>
<ns7:zokcDffGNumber xsi:nil="true"/>
<ns7:pjbContractHeader14 xsi:nil="true"/>
<ns7:pjbContractHeader15 xsi:nil="true"/>
<ns7:zokcContractIntent xsi:nil="true"/>
<ns7:zokcContractLine xsi:nil="true"/>
<ns7:zokcContractLine_Display xsi:nil="true"/>
<ns7:__FLEX_Context xsi:nil="true"/>
<ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns7:_FLEX_NumOfSegments>12</ns7:_FLEX_NumOfSegments>
</ns1:ContractHeaderFlexfieldVA>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100128520994</ns1:Id>
<ns1:PartyRoleCode>CUSTOMER</ns1:PartyRoleCode>
<ns1:Role>Customer</ns1:Role>
<ns1:PartyId>1005</ns1:PartyId>
<ns1:PartyName>AT&amp;amp;T Universal Card</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128520994</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-2863</ns1:PartyRolePuid>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>300100128520994</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
```

```
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520994</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520994</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520994</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100128520991</ns1:Id>
<ns1:PartyRoleCode>SUPPLIER</ns1:PartyRoleCode>
<ns1:Role>Supplier</ns1:Role>
<ns1:PartyId>204</ns1:PartyId>
<ns1:PartyName>Vision Operations</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128520991</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-2862</ns1:PartyRolePuid>
<ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
<ns1:Id>300100128520993</ns1:Id>
<ns1:ContactRoleCode>CONTRACT_ADMIN</ns1:ContactRoleCode>
<ns1:Role>Contract administrator</ns1:Role>
<ns1:ContactId>100010032635417</ns1:ContactId>
<ns1:OwnerFlag>true</ns1:OwnerFlag>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128520993</ns1:ExternalKey>
<ns1:AccessLevel>FULL</ns1:AccessLevel>
<ns1:AccessLevelName>Full</ns1:AccessLevelName>
<ns1:SignerYn xsi:nil="true"/>
<ns1:PartyContactName>Charles Smith</ns1:PartyContactName>
<ns1:SignerSequence xsi:nil="true"/>
<ns1:RoutingSequence xsi:nil="true"/>
<ns1:SignatureRole xsi:nil="true"/>
<ns1:SignatureRoleMeaning xsi:nil="true"/>
<ns1:ContactPuid>CNTC-1552</ns1:ContactPuid>
<ns1:ContractPartyContactFlexfieldVA>
<ns2:Id>300100128520993</ns2:Id>
<ns2:MajorVersion>1</ns2:MajorVersion>
<ns2:__FLEX_Context xsi:nil="true"/>
<ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
```

```
 </ns1:ContractPartyContactFlexfieldVA>
 </ns1:ContractPartyContact>
 <ns1:ContractPartyFlexfieldVA>
 <ns3:Id>300100128520991</ns3:Id>
 <ns3:MajorVersion>1</ns3:MajorVersion>
 <ns3:_Party__Location xsi:nil="true"/>
 <ns3:_Global__Segment__1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
 </ns1:ContractPartyFlexfieldVA>
 <ns1:ContractPartyTranslation>
 <ns1:Id>300100128520991</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Language>IW</ns1:Language>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:Cognomen xsi:nil="true"/>
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
 <ns1:ContractPartyTranslation>
 <ns1:Id>300100128520991</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Language>KO</ns1:Language>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:Cognomen xsi:nil="true"/>
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
 <ns1:ContractPartyTranslation>
 <ns1:Id>300100128520991</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Language>US</ns1:Language>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:Cognomen xsi:nil="true"/>
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
 </ns1:ContractParty>
 <ns1:ContractHeaderTranslation>
 <ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_SB2</ns1:Cognomen>
 <ns1:Description xsi:nil="true"/>
 <ns1:Id>300100128520989</ns1:Id>
 <ns1:Language>IW</ns1:Language>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:ShortDescription xsi:nil="true"/>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:VersionDescription xsi:nil="true"/>
 </ns1:ContractHeaderTranslation>
 <ns1:ContractHeaderTranslation>
 <ns1:Cognomen>[PJS CPBF Flow ContractΩ'+++ '+++ 'Ø</ns1:Cognomen>
 <ns1:Description>[Contract to be employed to execute CPBF Flow.Ω'+++ '+++ '+++ '+++ '+++ '++Ø</
ns1:Description>
 <ns1:Id>300100128520989</ns1:Id>
 <ns1:Language>KO</ns1:Language>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:ShortDescription xsi:nil="true"/>
 <ns1:SourceLang>KO</ns1:SourceLang>
 <ns1:VersionDescription xsi:nil="true"/>
 </ns1:ContractHeaderTranslation>
 <ns1:ContractHeaderTranslation>
 <ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_SB2</ns1:Cognomen>
 <ns1:Description xsi:nil="true"/>
 <ns1:Id>300100128520989</ns1:Id>
 <ns1:Language>US</ns1:Language>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:ShortDescription xsi:nil="true"/>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:VersionDescription xsi:nil="true"/>
```

```
</ns1:ContractHeaderTranslation>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>100100066614244</ns1:Id>
<ns1:LineId>100100095831714</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>1</ns1:ItemName>
<ns1:ItemNameTxt>1</ns1:ItemNameTxt>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode xsi:nil="true"/>
<ns1:UnitOfMeasure xsi:nil="true"/>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity xsi:nil="true"/>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount currencyCode="USD">175000</ns1:LineValueAmount>
<ns1:LineAmount currencyCode="USD">175000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Jacksonville (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:WareHouse xsi:nil="true"/>
```

```
<ns1:BillPlanId>300100128520995</ns1:BillPlanId>
<ns1:BillPlan>BP1</ns1:BillPlan>
<ns1:RevenuePlanId>300100128520996</ns1:RevenuePlanId>
<ns1:RevenuePlan>RP1</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:TaxExemptionControlMeaning>Standard</ns1:TaxExemptionControlMeaning>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>N</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference>1</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:Cognomen xsi:nil="true"/>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>100100066614244</ns1:ExternalKey>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId xsi:nil="true"/>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity xsi:nil="true"/>
<ns1:PriceItemUOM xsi:nil="true"/>
<ns1:BillToAccountDescription xsi:nil="true"/>
<ns1:BillToAccount xsi:nil="true"/>
```

```
<ns1:BillToAccountNumber xsi:nil="true"/>
<ns1:BillToSiteUseLocation xsi:nil="true"/>
<ns1:BillToSiteUseId xsi:nil="true"/>
<ns1:BillToAddress xsi:nil="true"/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-4871</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095831714</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095831714</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066614244</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
```

```
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066614244</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[PJS CPBF Line1Ω'+++ Ø</ns1:ItemDescription>
<ns1:ItemName>[PJS CPBF Line1Ω'+++ Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066614244</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>300100128520998</ns5:BillingControlId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate xsi:nil="true"/>
<ns5:SoftLimitAmount currencyCode="USD">175000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300100128521000</ns5:LinkId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:ProjectId>300100128520863</ns5:ProjectId>
<ns5:ProjectNumber>PJB_CDRM_CNT_INV_GEN_SB2</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:BillPlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100128520995</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>1003</ns5:BillMethodId>
<ns5:BillMethodName>Bill Rate Invoice</ns5:BillMethodName>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
```

```
<ns5:InvoiceCurrencyOptCode>CONTRACT</ns5:InvoiceCurrencyOptCode>
<ns5:BillingCurrencyType>Contract</ns5:BillingCurrencyType>
<ns5:PaymentTermsId>4</ns5:PaymentTermsId>
<ns5:PaymentTerms>30 Net</ns5:PaymentTerms>
<ns5:BillSetNumber>1</ns5:BillSetNumber>
<ns5:BillToCustomerAccountId>1005</ns5:BillToCustomerAccountId>
<ns5:BillToAccountNumber>1005</ns5:BillToAccountNumber>
<ns5:BillToSiteUseId>1023</ns5:BillToSiteUseId>
<ns5:BillToSite>Jacksonville (OPS)</ns5:BillToSite>
<ns5:BillToContactId>4840</ns5:BillToContactId>
<ns5:BillToContactName>Paula Springer</ns5:BillToContactName>
<ns5:BillToContactEmail>sendmail-test-discard@oracle.com</ns5:BillToContactEmail>
<ns5:BillingCycleId>1000000000003</ns5:BillingCycleId>
<ns5:BillingCycle>Monthly</ns5:BillingCycle>
<ns5:LaborInvoiceFormatId>7004</ns5:LaborInvoiceFormatId>
<ns5:LaborInvoiceFormat>Contract Line Project/Task Emp</ns5:LaborInvoiceFormat>
<ns5:NlInvoiceFormatId>7005</ns5:NlInvoiceFormatId>
<ns5:NonlaborInvoiceFormat>Contract Line Project/Task Exp</ns5:NonlaborInvoiceFormat>
<ns5:EventsInvoiceFormatId>100000011213026</ns5:EventsInvoiceFormatId>
<ns5:EventInvoiceFormat>Cont Line Project/Task Event</ns5:EventInvoiceFormat>
<ns5:FirstBillingOffsetDays xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:PersonBillRateSchId>300100001800278</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule>PJS CPBF Employee Act Rev Rate</ns5:PersonRateSchedule>
<ns5:JobBillRateSchId>100000010179011</ns5:JobBillRateSchId>
<ns5:JobRateSchedule>Construction Job Bill Rates</ns5:JobRateSchedule>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId>300100001800288</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule>PJS CPBF Nonlabor Actual Rev</ns5:NonlaborRateSchedule>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:InvoiceCurrencyDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyExchgDate xsi:nil="true"/>
<ns5:InvoiceCurrencyRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyCode xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:DocumentNumber xsi:nil="true"/>
<ns5:LocFlag xsi:nil="true"/>
<ns5:ReportTypeCode xsi:nil="true"/>
```

```
<ns5:FederalInvoiceFormat xsi:nil="true"/>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128520995</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128520995</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128520995</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanDescriptiveFlexField>
<ns8:BillPlanId>300100128520995</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:BillPlanDescriptiveFlexField>
</ns1:BillPlan>
<ns1:BillingControl>
<ns5:BillingControlId>300100128520997</ns5:BillingControlId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate xsi:nil="true"/>
<ns5:SoftLimitAmount currencyCode="USD">175000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:RevenuePlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100128520996</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>100000015590467</ns5:BillMethodId>
<ns5:BillMethodName>As Incurred Method</ns5:BillMethodName>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:PersonBillRateSchId xsi:nil="true"/>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId xsi:nil="true"/>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
```

```
<ns5:NlBillRateSchId xsi:nil="true"/>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:RevenuePlanDescriptiveFlexField>
<ns8:BillPlanId>300100128520996</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:RevenuePlanDescriptiveFlexField>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128520996</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128520996</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128520996</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
</ns1:RevenuePlan>
<ns1:OKCSOPText_c xsi:nil="true"/>
<ns1:OKCSOPNumber_c xsi:nil="true"/>
<ns1:OKCSOPDate_c xsi:nil="true"/>
<ns1:OKCSOPLong_c xsi:nil="true"/>
```

```
<ns1:OKCSOPDCL_Id_c xsi:nil="true"/>
<ns1:OKCSOPDCL_c xsi:nil="true"/>
</ns1:Value>
<ns1:Value>
<ns1:Id>300100128521018</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128521018</ns1:ExternalKey>
<ns1:InvConvRateTypeName>Spot</ns1:InvConvRateTypeName>
<ns1:InvConvRateDateTypeName>Transaction date</ns1:InvConvRateDateTypeName>
<ns1:OrgName>Vision Operations</ns1:OrgName>
<ns1:OrgId>204</ns1:OrgId>
<ns1:ContractTypeName>Sell : Project lines</ns1:ContractTypeName>
<ns1:ContractClass>CONTRACT</ns1:ContractClass>
<ns1:ContractTypeId>104</ns1:ContractTypeId>
<ns1:ContractNumber>PJB_CDRM_CNT_INV_GEN_RL2</ns1:ContractNumber>
<ns1:ContractNumberModifier xsi:nil="true"/>
<ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_RL2</ns1:Cognomen>
<ns1:BuyOrSell>S</ns1:BuyOrSell>
<ns1:PartyId>1005</ns1:PartyId>
<ns1:PartyName>AT&amp;amp;T Universal Card</ns1:PartyName>
<ns1:InvOrganizationId xsi:nil="true"/>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:CurrencyCode>USD</ns1:CurrencyCode>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:InvConvRateType>Spot</ns1:InvConvRateType>
<ns1:InvConvRateDateType>TRANSACTION</ns1:InvConvRateDateType>
<ns1:InvConvRateDate xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:InvTrxTypeName>PA Invoice</ns1:InvTrxTypeName>
<ns1:BillToAccountId>1005</ns1:BillToAccountId>
<ns1:BillToAccount>AT&amp;amp;T Universal Card</ns1:BillToAccount>
<ns1:BillToAccountNumber>1005</ns1:BillToAccountNumber>
<ns1:BillToSiteUseId>1023</ns1:BillToSiteUseId>
<ns1:BillToSiteUseLocation>Jacksonville (OPS)</ns1:BillToSiteUseLocation>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
<ns1:ShipToSiteUseLocation>Jacksonville (OPS)</ns1:ShipToSiteUseLocation>
<ns1:SoldToAccountId xsi:nil="true"/>
<ns1:SoldToAccount xsi:nil="true"/>
<ns1:SoldToAccountNumber xsi:nil="true"/>
<ns1:SoldToSiteId xsi:nil="true"/>
<ns1:SoldToNumber xsi:nil="true"/>
<ns1:SoldToAddress xsi:nil="true"/>
<ns1:SoldToAccountDescription xsi:nil="true"/>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:LegalEntityId>204</ns1:LegalEntityId>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:DateApproved>2018-01-17</ns1:DateApproved>
<ns1:DatetimeCancelled xsi:nil="true"/>
<ns1:DateSigned>2018-01-17</ns1:DateSigned>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:TerminateCancelSource xsi:nil="true"/>
<ns1:ContributionPercent>1</ns1:ContributionPercent>
<ns1:BillSequence xsi:nil="true"/>
<ns1:OverallRiskCode xsi:nil="true"/>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:Description xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
```

```
<ns1:AmendmentEffectiveDate xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ProjectEnabledFlag>true</ns1:ProjectEnabledFlag>
<ns1:OutputTaxSetId>204</ns1:OutputTaxSetId>
<ns1:PartyObjectType>OKX_PARTY</ns1:PartyObjectType>
<ns1:PrimaryLedgerId>1</ns1:PrimaryLedgerId>
<ns1:CustomerPartyId>1005</ns1:CustomerPartyId>
<ns1:CustomerPartySiteId>1024</ns1:CustomerPartySiteId>
<ns1:GeneratedInvoiceStatus>R</ns1:GeneratedInvoiceStatus>
<ns1:OwningOrgId>204</ns1:OwningOrgId>
<ns1:NetInvoiceFlag>false</ns1:NetInvoiceFlag>
<ns1:VersionType>C</ns1:VersionType>
<ns1:OwningOrgName>Vision Operations</ns1:OwningOrgName>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:ExemptionReasonMeaning xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:ApTermsId xsi:nil="true"/>
<ns1:ServiceEnabledFlag>false</ns1:ServiceEnabledFlag>
<ns1:EstimatedAmount currencyCode="USD">175000</ns1:EstimatedAmount>
<ns1:TaxAmount currencyCode="USD">0</ns1:TaxAmount>
<ns1:LastUpdateDate>2018-01-17T06:18:10.444Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>62F38C6B61447698E0534280F50A5F7B</ns1:LastUpdateLogin>
<ns1:LastUpdatedBy>ABRAHAM.MASON</ns1:LastUpdatedBy>
<ns1:CreatedBy>Charles.Smith</ns1:CreatedBy>
<ns1:CreationDate>2018-01-16T18:50:01.824Z</ns1:CreationDate>
<ns1:LedgerCurrency>USD</ns1:LedgerCurrency>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:AgreementEnabledFlag>false</ns1:AgreementEnabledFlag>
<ns1:CloseReason xsi:nil="true"/>
<ns1:CancelReason xsi:nil="true"/>
<ns1:AuthoringPartyCode xsi:nil="true"/>
<ns1:HoldReasonMeaning xsi:nil="true"/>
<ns1:PrimaryPartyId>1005</ns1:PrimaryPartyId>
<ns1:PersonId>100010032551061</ns1:PersonId>
<ns1:SalesAccountId xsi:nil="true"/>
<ns1:OrigSystemId>300100128521004</ns1:OrigSystemId>
<ns1:OrigSystemReference>1</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:AllowExternalItemFlag>false</ns1:AllowExternalItemFlag>
<ns1:SalesAccountName xsi:nil="true"/>
<ns1:ItemSourceCode>PRODUCT_MASTER</ns1:ItemSourceCode>
<ns1:StateTransitionFlowName xsi:nil="true"/>
<ns1:StateTransitionFlowState>ACTIVE</ns1:StateTransitionFlowState>
<ns1:UserStatusCode xsi:nil="true"/>
<ns1:AssigneeType xsi:nil="true"/>
<ns1:AssigneeId xsi:nil="true"/>
<ns1:Assignee xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:AccessLevel>UPDATE</ns1:AccessLevel>
<ns1:TemplateFlag>false</ns1:TemplateFlag>
<ns1:BillingSalesrepId xsi:nil="true"/>
<ns1:BillingSalesrepName xsi:nil="true"/>
<ns1:VersionDescription xsi:nil="true"/>
<ns1:Comment xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:AdjustmentBasis xsi:nil="true"/>
<ns1:CommitmentAmount currencyCode="USD">0</ns1:CommitmentAmount>
<ns1:PricingCalendarId xsi:nil="true"/>
<ns1:PricingPeriodType xsi:nil="true"/>
<ns1:PricingCalendarName xsi:nil="true"/>
<ns1:DiscountPercent xsi:nil="true"/>
<ns1:PriceListName xsi:nil="true"/>
```

```
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:WebServiceFlag xsi:nil="true"/>
<ns1:TermsTemplateId xsi:nil="true"/>
<ns1:ContractOwnerId xsi:nil="true"/>
<ns1:Status>Active</ns1:Status>
<ns1:AuthoringPartyMeaning xsi:nil="true"/>
<ns1:InvOrgName/>
<ns1:Supplier/>
<ns1:SupplierSite xsi:nil="true"/>
<ns1:ShipInvOrg/>
<ns1:RecvInvOrg/>
<ns1:Currency>US Dollar</ns1:Currency>
<ns1:UserStatusMeaning/>
<ns1:LegalEntityName>Vision Operations</ns1:LegalEntityName>
<ns1:ShipToOrgLocation/>
<ns1:ChrType xsi:nil="true"/>
<ns1:EnableElectronicSignFlag>false</ns1:EnableElectronicSignFlag>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:AllowCurrencyOverrideFlag xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:ContractTrueValue xsi:nil="true"/>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:PricingSegmentExplanation xsi:nil="true"/>
<ns1:PricingStrategyExplanation xsi:nil="true"/>
<ns1:SegmentExplanationMessageName xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId>1033</ns1:ShipToPartySiteId>
<ns1:Subtotal>0</ns1:Subtotal>
<ns1:PricingStrategyId xsi:nil="true"/>
<ns1:PricingStrategyName xsi:nil="true"/>
<ns1:PricingSegmentCode xsi:nil="true"/>
<ns1:InvConversionRate xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PricingEffectivityDate/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation>5645 Main Street , , Jacksonville32209 , FL</ns1:ShipToPartySiteLocation>
<ns1:PeriodStartUsed xsi:nil="true"/>
<ns1:PeriodTypeUsed xsi:nil="true"/>
<ns1:InvoiceRuleName xsi:nil="true"/>
<ns1:AccountRuleName xsi:nil="true"/>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:PaymentTermId xsi:nil="true"/>
<ns1:PaymentTermName xsi:nil="true"/>
<ns1:CustomerPartyName>AT&amp;T Universal Card</ns1:CustomerPartyName>
<ns1:CustomerPartySiteName>Jacksonville (OPS)</ns1:CustomerPartySiteName>
<ns1:PeriodTypeMeaning xsi:nil="true"/>
<ns1:PeriodStartMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:ContractCreditedAmount xsi:nil="true"/>
<ns1:ContractInvoicedAmount xsi:nil="true"/>
<ns1:UnbilledAmount currencyCode="USD">0</ns1:UnbilledAmount>
<ns1:TermsTemplateName xsi:nil="true"/>
<ns1:DocumentSubType xsi:nil="true"/>
<ns1:RenewalType xsi:nil="true"/>
<ns1:UnderAmendVersionFlag xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:UnderMigrationFlag xsi:nil="true"/>
<ns1:ContractId>100100069551038</ns1:ContractId>
<ns1:CorpCurrencyCode xsi:nil="true"/>
<ns1:CurcyConvRateType xsi:nil="true"/>
<ns1:QuoteToContactId xsi:nil="true"/>
<ns1:QuoteToContact xsi:nil="true"/>
```

```
<ns1:NegotiationCommChannel xsi:nil="true"/>
<ns1:NegotiationCustomerAcceptance xsi:nil="true"/>
<ns1:NegotiationEnableNotification xsi:nil="true"/>
<ns1:NegotiationInternalApproval xsi:nil="true"/>
<ns1:NegotiationLanguage xsi:nil="true"/>
<ns1:QuoteToCopyToEmail xsi:nil="true"/>
<ns1:QuotePhone xsi:nil="true"/>
<ns1:QuoteFax xsi:nil="true"/>
<ns1:QuoteEmail xsi:nil="true"/>
<ns1:QuoteAddress xsi:nil="true"/>
<ns1:QuoteOrg xsi:nil="true"/>
<ns1:QuoteAccount xsi:nil="true"/>
<ns1:PrimarySalesrepId xsi:nil="true"/>
<ns1:PrimarySalesRepresentative xsi:nil="true"/>
<ns1:NegotiationContractLayoutTemplate xsi:nil="true"/>
<ns1:NegotiationTermsLayoutTemplate xsi:nil="true"/>
<ns1:TransactionTypeName xsi:nil="true"/>
<ns1:AutoSendForSignature xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:EsignTemplateId xsi:nil="true"/>
<ns1:NonStandardClauseCount>0</ns1:NonStandardClauseCount>
<ns1:ContractPuid>KHDR-924</ns1:ContractPuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:RunContractExpertFlag xsi:nil="true"/>
<ns1:IgnoreQAWarningsFlag xsi:nil="true"/>
<ns1:BaseContractYN>N</ns1:BaseContractYN>
<ns1:ContractHeaderFlexfieldVA>
<ns7:ContractId>100100069551038</ns7:ContractId>
<ns7:FLEX_PARAM_ContractId>100100069551038</ns7:FLEX_PARAM_ContractId>
<ns7:biHeaderCode xsi:nil="true"/>
<ns7:biHeaderDff2 xsi:nil="true"/>
<ns7:zokcDffGText xsi:nil="true"/>
<ns7:zokcDffGDate xsi:nil="true"/>
<ns7:testName xsi:nil="true"/>
<ns7:zREL9BI68 xsi:nil="true"/>
<ns7:biqa3Code xsi:nil="true"/>
<ns7:zokcDffGNumber xsi:nil="true"/>
<ns7:pjbContractHeader14 xsi:nil="true"/>
<ns7:pjbContractHeader15 xsi:nil="true"/>
<ns7:zokcContractIntent xsi:nil="true"/>
<ns7:zokcContractLine xsi:nil="true"/>
<ns7:zokcContractLine_Display xsi:nil="true"/>
<ns7:__FLEX_Context xsi:nil="true"/>
<ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns7:_FLEX_NumOfSegments>12</ns7:_FLEX_NumOfSegments>
</ns1:ContractHeaderFlexfieldVA>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100128521023</ns1:Id>
<ns1:PartyRoleCode>CUSTOMER</ns1:PartyRoleCode>
<ns1:Role>Customer</ns1:Role>
<ns1:PartyId>1005</ns1:PartyId>
<ns1:PartyName>AT&amp;amp;T Universal Card</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128521023</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-2389</ns1:PartyRolePuid>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>300100128521023</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
```

```
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128521023</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128521023</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128521023</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100128521020</ns1:Id>
<ns1:PartyRoleCode>SUPPLIER</ns1:PartyRoleCode>
<ns1:Role>Supplier</ns1:Role>
<ns1:PartyId>204</ns1:PartyId>
<ns1:PartyName>Vision Operations</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128521020</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-2385</ns1:PartyRolePuid>
<ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
<ns1:Id>300100128521022</ns1:Id>
<ns1:ContactRoleCode>CONTRACT_ADMIN</ns1:ContactRoleCode>
<ns1:Role>Contract administrator</ns1:Role>
<ns1:ContactId>100010032635417</ns1:ContactId>
<ns1:OwnerFlag>true</ns1:OwnerFlag>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128521022</ns1:ExternalKey>
<ns1:AccessLevel>FULL</ns1:AccessLevel>
<ns1:AccessLevelName>Full</ns1:AccessLevelName>
<ns1:SignerYn xsi:nil="true"/>
<ns1:PartyContactName>Charles Smith</ns1:PartyContactName>
<ns1:SignerSequence xsi:nil="true"/>
<ns1:RoutingSequence xsi:nil="true"/>
<ns1:SignatureRole xsi:nil="true"/>
<ns1:SignatureRoleMeaning xsi:nil="true"/>
<ns1:ContactPuid>CNTC-1554</ns1:ContactPuid>
<ns1:ContractPartyContactFlexfieldVA>
<ns2:Id>300100128521022</ns2:Id>
<ns2:MajorVersion>1</ns2:MajorVersion>
<ns2:__FLEX_Context xsi:nil="true"/>
```

```
<ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
</ns1:ContractPartyContactFlexfieldVA>
</ns1:ContractPartyContact>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>300100128521020</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128521020</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128521020</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128521020</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_RL2</ns1:Cognomen>
<ns1:Description xsi:nil="true"/>
<ns1:Id>300100128521018</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>[PJS CPBF Flow ContractΩ'+++ '+++ 'Ø</ns1:Cognomen>
<ns1:Description>[Contract to be employed to execute CPBF Flow.Ω'+++ '+++ '+++ '+++ '+++ '++Ø</
ns1:Description>
<ns1:Id>300100128521018</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>KO</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_RL2</ns1:Cognomen>
<ns1:Description xsi:nil="true"/>
<ns1:Id>300100128521018</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
```

```
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>100100066614250</ns1:Id>
<ns1:LineId>100100095831716</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>1</ns1:ItemName>
<ns1:ItemNameTxt>1</ns1:ItemNameTxt>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode xsi:nil="true"/>
<ns1:UnitOfMeasure xsi:nil="true"/>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity xsi:nil="true"/>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount currencyCode="USD">175000</ns1:LineValueAmount>
<ns1:LineAmount currencyCode="USD">175000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Jacksonville (OPS)</ns1:ShipToSite>
```

```
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:WareHouse xsi:nil="true"/>
<ns1:BillPlanId>300100128521024</ns1:BillPlanId>
<ns1:BillPlan>BP1</ns1:BillPlan>
<ns1:RevenuePlanId>300100128521025</ns1:RevenuePlanId>
<ns1:RevenuePlan>RP1</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:TaxExemptionControlMeaning>Standard</ns1:TaxExemptionControlMeaning>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>N</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference>1</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:Cognomen xsi:nil="true"/>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>100100066614250</ns1:ExternalKey>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId xsi:nil="true"/>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity xsi:nil="true"/>
<ns1:PriceItemUOM xsi:nil="true"/>
```

```
<ns1:BillToAccountDescription xsi:nil="true"/>
<ns1:BillToAccount xsi:nil="true"/>
<ns1:BillToAccountNumber xsi:nil="true"/>
<ns1:BillToSiteUseLocation xsi:nil="true"/>
<ns1:BillToSiteUseId xsi:nil="true"/>
<ns1:BillToAddress xsi:nil="true"/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-4873</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095831716</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095831716</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066614250</ns1:Id>
<ns1:Language>IW</ns1:Language>
```

```
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066614250</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[PJS CPBF Line1Ω'+++ Ø</ns1:ItemDescription>
<ns1:ItemName>[PJS CPBF Line1Ω'+++ Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066614250</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>300100128521027</ns5:BillingControlId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate xsi:nil="true"/>
<ns5:SoftLimitAmount currencyCode="USD">175000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300100128521029</ns5:LinkId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:ProjectId>300100128520913</ns5:ProjectId>
<ns5:ProjectNumber>PJB_CDRM_CNT_INV_GEN_RL2</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:BillPlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100128521024</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>1003</ns5:BillMethodId>
```

```
<ns5:BillMethodName>Bill Rate Invoice</ns5:BillMethodName>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceCurrencyOptCode>CONTRACT</ns5:InvoiceCurrencyOptCode>
<ns5:BillingCurrencyType>Contract</ns5:BillingCurrencyType>
<ns5:PaymentTermsId>4</ns5:PaymentTermsId>
<ns5:PaymentTerms>30 Net</ns5:PaymentTerms>
<ns5:BillSetNumber>1</ns5:BillSetNumber>
<ns5:BillToCustomerAccountId>1005</ns5:BillToCustomerAccountId>
<ns5:BillToAccountNumber>1005</ns5:BillToAccountNumber>
<ns5:BillToSiteUseId>1023</ns5:BillToSiteUseId>
<ns5:BillToSite>Jacksonville (OPS)</ns5:BillToSite>
<ns5:BillToContactId>4840</ns5:BillToContactId>
<ns5:BillToContactName>Paula Springer</ns5:BillToContactName>
<ns5:BillToContactEmail>sendmail-test-discard@oracle.com</ns5:BillToContactEmail>
<ns5:BillingCycleId>1000000000003</ns5:BillingCycleId>
<ns5:BillingCycle>Monthly</ns5:BillingCycle>
<ns5:LaborInvoiceFormatId>7004</ns5:LaborInvoiceFormatId>
<ns5:LaborInvoiceFormat>Contract Line Project/Task Emp</ns5:LaborInvoiceFormat>
<ns5:NlInvoiceFormatId>7005</ns5:NlInvoiceFormatId>
<ns5:NonlaborInvoiceFormat>Contract Line Project/Task Exp</ns5:NonlaborInvoiceFormat>
<ns5:EventsInvoiceFormatId>100000011213026</ns5:EventsInvoiceFormatId>
<ns5:EventInvoiceFormat>Cont Line Project/Task Event</ns5:EventInvoiceFormat>
<ns5:FirstBillingOffsetDays xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:PersonBillRateSchId>300100001800278</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule>PJS CPBF Employee Act Rev Rate</ns5:PersonRateSchedule>
<ns5:JobBillRateSchId>100000010179011</ns5:JobBillRateSchId>
<ns5:JobRateSchedule>Construction Job Bill Rates</ns5:JobRateSchedule>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId>300100001800288</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule>PJS CPBF Nonlabor Actual Rev</ns5:NonlaborRateSchedule>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:InvoiceCurrencyDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyExchgDate xsi:nil="true"/>
<ns5:InvoiceCurrencyRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyCode xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:DocumentNumber xsi:nil="true"/>
```

```
<ns5:LocFlag xsi:nil="true"/>
<ns5:ReportTypeCode xsi:nil="true"/>
<ns5:FederalInvoiceFormat xsi:nil="true"/>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128521024</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128521024</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128521024</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanDescriptiveFlexField>
<ns8:BillPlanId>300100128521024</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:BillPlanDescriptiveFlexField>
</ns1:BillPlan>
<ns1:BillingControl>
<ns5:BillingControlId>300100128521026</ns5:BillingControlId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate xsi:nil="true"/>
<ns5:SoftLimitAmount currencyCode="USD">175000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:RevenuePlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100128521025</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>100000015590467</ns5:BillMethodId>
<ns5:BillMethodName>As Incurred Method</ns5:BillMethodName>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:PersonBillRateSchId xsi:nil="true"/>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId xsi:nil="true"/>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
```

```
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId xsi:nil="true"/>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:RevenuePlanDescriptiveFlexField>
<ns8:BillPlanId>300100128521025</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:RevenuePlanDescriptiveFlexField>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128521025</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128521025</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128521025</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
</ns1:RevenuePlan>
<ns1:OKCSOPText_c xsi:nil="true"/>
<ns1:OKCSOPNumber_c xsi:nil="true"/>
```

```
<ns1:OKCSOPDate_c xsi:nil="true"/>
<ns1:OKCSOPLong_c xsi:nil="true"/>
<ns1:OKCSOPDCL_Id_c xsi:nil="true"/>
<ns1:OKCSOPDCL_c xsi:nil="true"/>
</ns1:Value>
<ns1:Value>
<ns1:Id>300100150718257</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100150718257</ns1:ExternalKey>
<ns1:InvConvRateTypeName>Spot</ns1:InvConvRateTypeName>
<ns1:InvConvRateDateTypeName>Transaction date</ns1:InvConvRateDateTypeName>
<ns1:OrgName>Vision Operations</ns1:OrgName>
<ns1:OrgId>204</ns1:OrgId>
<ns1:ContractTypeName>Sell : Project lines</ns1:ContractTypeName>
<ns1:ContractClass>CONTRACT</ns1:ContractClass>
<ns1:ContractTypeId>104</ns1:ContractTypeId>
<ns1:ContractNumber>CDRM_PJB_ManualInvoice</ns1:ContractNumber>
<ns1:ContractNumberModifier xsi:nil="true"/>
<ns1:Cognomen>CDRM_PJB_ManualInvoice</ns1:Cognomen>
<ns1:BuyOrSell>S</ns1:BuyOrSell>
<ns1:PartyId>1005</ns1:PartyId>
<ns1:PartyName>AT&amp;amp;T Universal Card</ns1:PartyName>
<ns1:InvOrganizationId xsi:nil="true"/>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:CurrencyCode>USD</ns1:CurrencyCode>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate>2030-12-31</ns1:EndDate>
<ns1:SupplierId xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:InvConvRateType>Spot</ns1:InvConvRateType>
<ns1:InvConvRateDateType>TRANSACTION</ns1:InvConvRateDateType>
<ns1:InvConvRateDate xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:InvTrxTypeName>PA Invoice</ns1:InvTrxTypeName>
<ns1:BillToAccountId>1005</ns1:BillToAccountId>
<ns1:BillToAccount>AT&amp;amp;T Universal Card</ns1:BillToAccount>
<ns1:BillToAccountNumber>1005</ns1:BillToAccountNumber>
<ns1:BillToSiteUseId>1023</ns1:BillToSiteUseId>
<ns1:BillToSiteUseLocation>Jacksonville (OPS)</ns1:BillToSiteUseLocation>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
<ns1:ShipToSiteUseLocation>Jacksonville (OPS)</ns1:ShipToSiteUseLocation>
<ns1:SoldToAccountId>1005</ns1:SoldToAccountId>
<ns1:SoldToAccount>AT&amp;amp;T Universal Card</ns1:SoldToAccount>
<ns1:SoldToAccountNumber>1005</ns1:SoldToAccountNumber>
<ns1:SoldToSiteId>5680</ns1:SoldToSiteId>
<ns1:SoldToNumber>5680</ns1:SoldToNumber>
<ns1:SoldToAddress>118 S ElDorado Street,SAN MATEO, CA 94401</ns1:SoldToAddress>
<ns1:SoldToAccountDescription>AT&amp;amp;T Universal Card</ns1:SoldToAccountDescription>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:LegalEntityId>204</ns1:LegalEntityId>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:DateApproved>2018-03-28</ns1:DateApproved>
<ns1:DatetimeCancelled xsi:nil="true"/>
<ns1:DateSigned>2018-03-28</ns1:DateSigned>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:TerminateCancelSource xsi:nil="true"/>
<ns1:ContributionPercent>1</ns1:ContributionPercent>
<ns1:BillSequence>1</ns1:BillSequence>
<ns1:OverallRiskCode xsi:nil="true"/>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:Description xsi:nil="true"/>
```

```
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:AmendmentEffectiveDate xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ProjectEnabledFlag>true</ns1:ProjectEnabledFlag>
<ns1:OutputTaxSetId>204</ns1:OutputTaxSetId>
<ns1:PartyObjectType>OKX_PARTY</ns1:PartyObjectType>
<ns1:PrimaryLedgerId>1</ns1:PrimaryLedgerId>
<ns1:CustomerPartyId>1005</ns1:CustomerPartyId>
<ns1:CustomerPartySiteId>1024</ns1:CustomerPartySiteId>
<ns1:GeneratedInvoiceStatus>D</ns1:GeneratedInvoiceStatus>
<ns1:OwningOrgId>204</ns1:OwningOrgId>
<ns1:NetInvoiceFlag>false</ns1:NetInvoiceFlag>
<ns1:VersionType>C</ns1:VersionType>
<ns1:OwningOrgName>Vision Operations</ns1:OwningOrgName>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:ExemptionReasonMeaning xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:ApTermsId xsi:nil="true"/>
<ns1:ServiceEnabledFlag>false</ns1:ServiceEnabledFlag>
<ns1:EstimatedAmount currencyCode="USD">50000</ns1:EstimatedAmount>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:LastUpdateDate>2018-03-28T13:37:24.014Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>6879E35016BF0368E0534280F50A6B3C</ns1:LastUpdateLogin>
<ns1:LastUpdatedBy>Charles.Smith</ns1:LastUpdatedBy>
<ns1:CreatedBy>Charles.Smith</ns1:CreatedBy>
<ns1:CreationDate>2018-03-28T13:25:38.001Z</ns1:CreationDate>
<ns1:LedgerCurrency>USD</ns1:LedgerCurrency>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:AgreementEnabledFlag>false</ns1:AgreementEnabledFlag>
<ns1:CloseReason xsi:nil="true"/>
<ns1:CancelReason xsi:nil="true"/>
<ns1:AuthoringPartyCode>INTERNAL</ns1:AuthoringPartyCode>
<ns1:HoldReasonMeaning xsi:nil="true"/>
<ns1:PrimaryPartyId>1005</ns1:PrimaryPartyId>
<ns1:PersonId>100010032551061</ns1:PersonId>
<ns1:SalesAccountId xsi:nil="true"/>
<ns1:OrigSystemId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:AllowExternalItemFlag>false</ns1:AllowExternalItemFlag>
<ns1:SalesAccountName xsi:nil="true"/>
<ns1:ItemSourceCode>PRODUCT_MASTER</ns1:ItemSourceCode>
<ns1:StateTransitionFlowName xsi:nil="true"/>
<ns1:StateTransitionFlowState>ACTIVE</ns1:StateTransitionFlowState>
<ns1:UserStatusCode xsi:nil="true"/>
<ns1:AssigneeType xsi:nil="true"/>
<ns1:AssigneeId xsi:nil="true"/>
<ns1:Assignee xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:AccessLevel>UPDATE</ns1:AccessLevel>
<ns1:TemplateFlag>false</ns1:TemplateFlag>
<ns1:BillingSalesrepId xsi:nil="true"/>
<ns1:BillingSalesrepName xsi:nil="true"/>
<ns1:VersionDescription xsi:nil="true"/>
<ns1:Comment xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:AdjustmentBasis xsi:nil="true"/>
<ns1:CommitmentAmount currencyCode="USD">0</ns1:CommitmentAmount>
<ns1:PricingCalendarId xsi:nil="true"/>
<ns1:PricingPeriodType xsi:nil="true"/>
<ns1:PricingCalendarName xsi:nil="true"/>
```

```
<ns1:DiscountPercent xsi:nil="true"/>
<ns1:PriceListName xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:WebServiceFlag xsi:nil="true"/>
<ns1:TermsTemplateId xsi:nil="true"/>
<ns1:ContractOwnerId xsi:nil="true"/>
<ns1:Status>Active</ns1:Status>
<ns1:AuthoringPartyMeaning>Internal</ns1:AuthoringPartyMeaning>
<ns1:InvOrgName/>
<ns1:Supplier/>
<ns1:SupplierSite xsi:nil="true"/>
<ns1:ShipInvOrg/>
<ns1:RecvInvOrg/>
<ns1:Currency>US Dollar</ns1:Currency>
<ns1:UserStatusMeaning/>
<ns1:LegalEntityName>Vision Operations</ns1:LegalEntityName>
<ns1:ShipToOrgLocation/>
<ns1:ChrType xsi:nil="true"/>
<ns1:EnableElectronicSignFlag>false</ns1:EnableElectronicSignFlag>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:AllowCurrencyOverrideFlag xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:ContractTrueValue xsi:nil="true"/>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:PricingSegmentExplanation xsi:nil="true"/>
<ns1:PricingStrategyExplanation xsi:nil="true"/>
<ns1:SegmentExplanationMessageName xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId>1033</ns1:ShipToPartySiteId>
<ns1:Subtotal xsi:nil="true"/>
<ns1:PricingStrategyId xsi:nil="true"/>
<ns1:PricingStrategyName xsi:nil="true"/>
<ns1:PricingSegmentCode xsi:nil="true"/>
<ns1:InvConversionRate xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PricingEffectivityDate>2018-03-28T00:00:00Z</ns1:PricingEffectivityDate>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation>5645 Main Street , , Jacksonville32209 , FL</ns1:ShipToPartySiteLocation>
<ns1:PeriodStartUsed xsi:nil="true"/>
<ns1:PeriodTypeUsed xsi:nil="true"/>
<ns1:InvoiceRuleName xsi:nil="true"/>
<ns1:AccountRuleName xsi:nil="true"/>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:PaymentTermId xsi:nil="true"/>
<ns1:PaymentTermName xsi:nil="true"/>
<ns1:CustomerPartyName>AT&amp;amp;T Universal Card</ns1:CustomerPartyName>
<ns1:CustomerPartySiteName>Jacksonville (OPS)</ns1:CustomerPartySiteName>
<ns1:PeriodTypeMeaning xsi:nil="true"/>
<ns1:PeriodStartMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:ContractCreditedAmount xsi:nil="true"/>
<ns1:ContractInvoicedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:TermsTemplateName xsi:nil="true"/>
<ns1:DocumentSubType xsi:nil="true"/>
<ns1:RenewalType xsi:nil="true"/>
<ns1:UnderAmendVersionFlag>true</ns1:UnderAmendVersionFlag>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:UnderMigrationFlag xsi:nil="true"/>
<ns1:ContractId>300100150718258</ns1:ContractId>
<ns1:CorpCurrencyCode>USD</ns1:CorpCurrencyCode>
<ns1:CurcyConvRateType>Corporate</ns1:CurcyConvRateType>
```

```
<ns1:QuoteToContactId xsi:nil="true"/>
<ns1:QuoteToContact xsi:nil="true"/>
<ns1:NegotiationCommChannel xsi:nil="true"/>
<ns1:NegotiationCustomerAcceptance xsi:nil="true"/>
<ns1:NegotiationEnableNotification xsi:nil="true"/>
<ns1:NegotiationInternalApproval xsi:nil="true"/>
<ns1:NegotiationLanguage xsi:nil="true"/>
<ns1:QuoteToCopyToEmail xsi:nil="true"/>
<ns1:QuotePhone xsi:nil="true"/>
<ns1:QuoteFax xsi:nil="true"/>
<ns1:QuoteEmail xsi:nil="true"/>
<ns1:QuoteAddress xsi:nil="true"/>
<ns1:QuoteOrg xsi:nil="true"/>
<ns1:QuoteAccount xsi:nil="true"/>
<ns1:PrimarySalesrepId xsi:nil="true"/>
<ns1:PrimarySalesRepresentative xsi:nil="true"/>
<ns1:NegotiationContractLayoutTemplate xsi:nil="true"/>
<ns1:NegotiationTermsLayoutTemplate xsi:nil="true"/>
<ns1:TransactionTypeName xsi:nil="true"/>
<ns1:AutoSendForSignature>N</ns1:AutoSendForSignature>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:EsignTemplateId xsi:nil="true"/>
<ns1:NonStandardClauseCount>0</ns1:NonStandardClauseCount>
<ns1:ContractPuid>KHDR-974</ns1:ContractPuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:RunContractExpertFlag xsi:nil="true"/>
<ns1:IgnoreQAWarningsFlag xsi:nil="true"/>
<ns1:BaseContractYN>N</ns1:BaseContractYN>
<ns1:ContractHeaderFlexfieldVA>
<ns7:ContractId>300100150718258</ns7:ContractId>
<ns7:FLEX_PARAM_ContractId>300100150718258</ns7:FLEX_PARAM_ContractId>
<ns7:biHeaderCode xsi:nil="true"/>
<ns7:biHeaderDff2 xsi:nil="true"/>
<ns7:zokcDffGText>ABCDEF</ns7:zokcDffGText>
<ns7:zokcDffGDate>0011-12-05</ns7:zokcDffGDate>
<ns7:testName xsi:nil="true"/>
<ns7:zREL9BI68 xsi:nil="true"/>
<ns7:biqa3Code xsi:nil="true"/>
<ns7:zokcDffGNumber>55</ns7:zokcDffGNumber>
<ns7:pjbContractHeader14 xsi:nil="true"/>
<ns7:pjbContractHeader15 xsi:nil="true"/>
<ns7:zokcContractIntent xsi:nil="true"/>
<ns7:zokcContractLine xsi:nil="true"/>
<ns7:zokcContractLine_Display xsi:nil="true"/>
<ns7:__FLEX_Context xsi:nil="true"/>
<ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns7:_FLEX_NumOfSegments>12</ns7:_FLEX_NumOfSegments>
</ns1:ContractHeaderFlexfieldVA>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100150718287</ns1:Id>
<ns1:PartyRoleCode>CUSTOMER</ns1:PartyRoleCode>
<ns1:Role>Customer</ns1:Role>
<ns1:PartyId>1005</ns1:PartyId>
<ns1:PartyName>AT&amp;amp;T Universal Card</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100150718287</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-2872</ns1:PartyRolePuid>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>300100150718287</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
```

```
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100150718287</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100150718287</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100150718287</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100150718284</ns1:Id>
<ns1:PartyRoleCode>SUPPLIER</ns1:PartyRoleCode>
<ns1:Role>Supplier</ns1:Role>
<ns1:PartyId>204</ns1:PartyId>
<ns1:PartyName>Vision Operations</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100150718284</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-2871</ns1:PartyRolePuid>
<ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
<ns1:Id>300100150718286</ns1:Id>
<ns1:ContactRoleCode>CONTRACT_ADMIN</ns1:ContactRoleCode>
<ns1:Role>Contract administrator</ns1:Role>
<ns1:ContactId>100010032635417</ns1:ContactId>
<ns1:OwnerFlag>true</ns1:OwnerFlag>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100150718285</ns1:ExternalKey>
<ns1:AccessLevel>FULL</ns1:AccessLevel>
<ns1:AccessLevelName>Full</ns1:AccessLevelName>
<ns1:SignerYn xsi:nil="true"/>
<ns1:PartyContactName>Charles Smith</ns1:PartyContactName>
<ns1:SignerSequence xsi:nil="true"/>
<ns1:RoutingSequence xsi:nil="true"/>
<ns1:SignatureRole xsi:nil="true"/>
<ns1:SignatureRoleMeaning xsi:nil="true"/>
<ns1:ContactPuid>CNTC-4668</ns1:ContactPuid>
<ns1:ContractPartyContactFlexfieldVA>
<ns2:Id>300100150718286</ns2:Id>
```

```
<ns2:MajorVersion>1</ns2:MajorVersion>
<ns2:__FLEX_Context xsi:nil="true"/>
<ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
</ns1:ContractPartyContactFlexfieldVA>
</ns1:ContractPartyContact>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>300100150718284</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100150718284</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100150718284</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100150718284</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>CDRM_PJB_ManualInvoice</ns1:Cognomen>
<ns1:Description xsi:nil="true"/>
<ns1:Id>300100150718257</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>CDRM_PJB_ManualInvoice</ns1:Cognomen>
<ns1:Description xsi:nil="true"/>
<ns1:Id>300100150718257</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>CDRM_PJB_ManualInvoice</ns1:Cognomen>
<ns1:Description xsi:nil="true"/>
<ns1:Id>300100150718257</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
```

```
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>300100150718297</ns1:Id>
<ns1:LineId>100100095871439</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>1</ns1:ItemName>
<ns1:ItemNameTxt>1</ns1:ItemNameTxt>
<ns1:ItemDescription xsi:nil="true"/>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate>2030-12-31</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode xsi:nil="true"/>
<ns1:UnitOfMeasure xsi:nil="true"/>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity xsi:nil="true"/>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount currencyCode="USD">50000</ns1:LineValueAmount>
<ns1:LineAmount currencyCode="USD">50000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode>ESTIMATED</ns1:CommitLevelCode>
<ns1:CommitLevel>Estimated</ns1:CommitLevel>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
```

```
<ns1:ShipToSite>Jacksonville (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:WareHouse xsi:nil="true"/>
<ns1:BillPlanId>300100150718295</ns1:BillPlanId>
<ns1:BillPlan>BP</ns1:BillPlan>
<ns1:RevenuePlanId>300100150718296</ns1:RevenuePlanId>
<ns1:RevenuePlan>RP</ns1:RevenuePlan>
<ns1:InvoicedAmount currencyCode="USD">0</ns1:InvoicedAmount>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:TaxExemptionControlMeaning>Standard</ns1:TaxExemptionControlMeaning>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>N</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen xsi:nil="true"/>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100150718297</ns1:ExternalKey>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId xsi:nil="true"/>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId>1033</ns1:ShipToPartySiteId>
<ns1:DurationQuantity unitCode="0zE">14</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity xsi:nil="true"/>
```

```
<ns1:PriceItemUOM xsi:nil="true"/>
<ns1:BillToAccountDescription xsi:nil="true"/>
<ns1:BillToAccount xsi:nil="true"/>
<ns1:BillToAccountNumber xsi:nil="true"/>
<ns1:BillToSiteUseLocation xsi:nil="true"/>
<ns1:BillToSiteUseId xsi:nil="true"/>
<ns1:BillToAddress xsi:nil="true"/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation>5645 Main Street , , Jacksonville32209 , FL</ns1:ShipToPartySiteLocation>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn>N</ns1:PriceDuringBillingYn>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-23395</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095871439</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095871439</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>300100150718297</ns1:Id>
```

```
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription xsi:nil="true"/>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>300100150718297</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription xsi:nil="true"/>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>300100150718297</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription xsi:nil="true"/>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>300100150718298</ns5:BillingControlId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate>2030-12-31</ns5:EndDate>
<ns5:SoftLimitAmount currencyCode="USD">50000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300100150718299</ns5:LinkId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:ProjectId>300100150718260</ns5:ProjectId>
<ns5:ProjectNumber>CDRM_PJB_ManualInvoice</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:BillPlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100150718295</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
```

```
<ns5:BillMethodId>300100024846778</ns5:BillMethodId>
<ns5:BillMethodName>Rate Based Method</ns5:BillMethodName>
<ns5:BillPlanName>BP</ns5:BillPlanName>
<ns5:InvoiceCurrencyOptCode>CONTRACT</ns5:InvoiceCurrencyOptCode>
<ns5:BillingCurrencyType>Contract</ns5:BillingCurrencyType>
<ns5:PaymentTermsId>4</ns5:PaymentTermsId>
<ns5:PaymentTerms>30 Net</ns5:PaymentTerms>
<ns5:BillSetNumber>1</ns5:BillSetNumber>
<ns5:BillToCustomerAccountId>1005</ns5:BillToCustomerAccountId>
<ns5:BillToAccountNumber>1005</ns5:BillToAccountNumber>
<ns5:BillToSiteUseId>1023</ns5:BillToSiteUseId>
<ns5:BillToSite>Jacksonville (OPS)</ns5:BillToSite>
<ns5:BillToContactId>4000</ns5:BillToContactId>
<ns5:BillToContactName>Marieke Velden van</ns5:BillToContactName>
<ns5:BillToContactEmail>sendmail-test-discard@oracle.com</ns5:BillToContactEmail>
<ns5:BillingCycleId>1000000000003</ns5:BillingCycleId>
<ns5:BillingCycle>Monthly</ns5:BillingCycle>
<ns5:LaborInvoiceFormatId>100000011406004</ns5:LaborInvoiceFormatId>
<ns5:LaborInvoiceFormat>Cont Line Prj/Task Format</ns5:LaborInvoiceFormat>
<ns5:NlInvoiceFormatId>7005</ns5:NlInvoiceFormatId>
<ns5:NonlaborInvoiceFormat>Contract Line Project/Task Exp</ns5:NonlaborInvoiceFormat>
<ns5:EventsInvoiceFormatId>100000011213026</ns5:EventsInvoiceFormatId>
<ns5:EventInvoiceFormat>Cont Line Project/Task Event</ns5:EventInvoiceFormat>
<ns5:FirstBillingOffsetDays xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:PersonBillRateSchId>100000010146226</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule>Employee Bill Rates</ns5:PersonRateSchedule>
<ns5:JobBillRateSchId>100000011213133</ns5:JobBillRateSchId>
<ns5:JobRateSchedule>T&amp;amp;M Job Bill Rate Schedule</ns5:JobRateSchedule>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId>100000010420025</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule>Nonlabor Bill Rates</ns5:NonlaborRateSchedule>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:InvoiceCurrencyDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyExchgDate xsi:nil="true"/>
<ns5:InvoiceCurrencyRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyCode xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
```

```
<ns5:DocumentNumber xsi:nil="true"/>
<ns5:LocFlag xsi:nil="true"/>
<ns5:ReportTypeCode xsi:nil="true"/>
<ns5:FederalInvoiceFormat xsi:nil="true"/>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100150718295</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>BP</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100150718295</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>BP</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100150718295</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>BP</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanDescriptiveFlexField>
<ns8:BillPlanId>300100150718295</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:BillPlanDescriptiveFlexField>
</ns1:BillPlan>
<ns1:BillingControl>
<ns5:BillingControlId>300100150718289</ns5:BillingControlId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate>2030-12-31</ns5:EndDate>
<ns5:SoftLimitAmount currencyCode="USD">50000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:RevenuePlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100150718296</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>100000015590467</ns5:BillMethodId>
<ns5:BillMethodName>As Incurred Method</ns5:BillMethodName>
<ns5:BillPlanName>RP</ns5:BillPlanName>
<ns5:PersonBillRateSchId xsi:nil="true"/>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId xsi:nil="true"/>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
```

```
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId xsi:nil="true"/>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:RevenuePlanDescriptiveFlexField>
<ns8:BillPlanId>300100150718296</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:RevenuePlanDescriptiveFlexField>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100150718296</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>RP</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100150718296</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>RP</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100150718296</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>RP</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
</ns1:RevenuePlan>
<ns1:OKCSOPText_c xsi:nil="true"/>
```

```
<ns1:OKCSOPNumber_c xsi:nil="true"/>
<ns1:OKCSOPDate_c xsi:nil="true"/>
<ns1:OKCSOPLong_c xsi:nil="true"/>
<ns1:OKCSOPDCL_Id_c xsi:nil="true"/>
<ns1:OKCSOPDCL_c xsi:nil="true"/>
</ns1:Value>
<ns1:Value>
<ns1:Id>300100150718445</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100150718445</ns1:ExternalKey>
<ns1:InvConvRateTypeName>Spot</ns1:InvConvRateTypeName>
<ns1:InvConvRateDateTypeName>Transaction date</ns1:InvConvRateDateTypeName>
<ns1:OrgName>Vision Operations</ns1:OrgName>
<ns1:OrgId>204</ns1:OrgId>
<ns1:ContractTypeName>Sell : Project lines</ns1:ContractTypeName>
<ns1:ContractClass>CONTRACT</ns1:ContractClass>
<ns1:ContractTypeId>104</ns1:ContractTypeId>
<ns1:ContractNumber>CDRMPJB_InvoiceAdjustment</ns1:ContractNumber>
<ns1:ContractNumberModifier xsi:nil="true"/>
<ns1:Cognomen>CDRMPJB_InvoiceAdjustment</ns1:Cognomen>
<ns1:BuyOrSell>S</ns1:BuyOrSell>
<ns1:PartyId>1005</ns1:PartyId>
<ns1:PartyName>AT&amp;amp;T Universal Card</ns1:PartyName>
<ns1:InvOrganizationId xsi:nil="true"/>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:CurrencyCode>USD</ns1:CurrencyCode>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate>2030-12-31</ns1:EndDate>
<ns1:SupplierId xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:InvConvRateType>Spot</ns1:InvConvRateType>
<ns1:InvConvRateDateType>TRANSACTION</ns1:InvConvRateDateType>
<ns1:InvConvRateDate xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:InvTrxTypeName>PA Invoice</ns1:InvTrxTypeName>
<ns1:BillToAccountId>1005</ns1:BillToAccountId>
<ns1:BillToAccount>AT&amp;amp;T Universal Card</ns1:BillToAccount>
<ns1:BillToAccountNumber>1005</ns1:BillToAccountNumber>
<ns1:BillToSiteUseId>1023</ns1:BillToSiteUseId>
<ns1:BillToSiteUseLocation>Jacksonville (OPS)</ns1:BillToSiteUseLocation>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
<ns1:ShipToSiteUseLocation>Jacksonville (OPS)</ns1:ShipToSiteUseLocation>
<ns1:SoldToAccountId>1005</ns1:SoldToAccountId>
<ns1:SoldToAccount>AT&amp;amp;T Universal Card</ns1:SoldToAccount>
<ns1:SoldToAccountNumber>1005</ns1:SoldToAccountNumber>
<ns1:SoldToSiteId>5680</ns1:SoldToSiteId>
<ns1:SoldToNumber>5680</ns1:SoldToNumber>
<ns1:SoldToAddress>118 S ElDorado Street,SAN MATEO, CA 94401</ns1:SoldToAddress>
<ns1:SoldToAccountDescription>AT&amp;amp;T Universal Card</ns1:SoldToAccountDescription>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:LegalEntityId>204</ns1:LegalEntityId>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:DateApproved>2018-03-28</ns1:DateApproved>
<ns1:DatetimeCancelled xsi:nil="true"/>
<ns1:DateSigned>2018-03-28</ns1:DateSigned>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:TerminateCancelSource xsi:nil="true"/>
<ns1:ContributionPercent>1</ns1:ContributionPercent>
<ns1:BillSequence>1</ns1:BillSequence>
<ns1:OverallRiskCode xsi:nil="true"/>
<ns1:ShortDescription xsi:nil="true"/>
```

```
<ns1:Description xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:AmendmentEffectiveDate xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ProjectEnabledFlag>true</ns1:ProjectEnabledFlag>
<ns1:OutputTaxSetId>204</ns1:OutputTaxSetId>
<ns1:PartyObjectType>OKX_PARTY</ns1:PartyObjectType>
<ns1:PrimaryLedgerId>1</ns1:PrimaryLedgerId>
<ns1:CustomerPartyId>1005</ns1:CustomerPartyId>
<ns1:CustomerPartySiteId>1024</ns1:CustomerPartySiteId>
<ns1:GeneratedInvoiceStatus>D</ns1:GeneratedInvoiceStatus>
<ns1:OwningOrgId>204</ns1:OwningOrgId>
<ns1:NetInvoiceFlag>false</ns1:NetInvoiceFlag>
<ns1:VersionType>C</ns1:VersionType>
<ns1:OwningOrgName>Vision Operations</ns1:OwningOrgName>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:ExemptionReasonMeaning xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:ApTermsId xsi:nil="true"/>
<ns1:ServiceEnabledFlag>false</ns1:ServiceEnabledFlag>
<ns1:EstimatedAmount currencyCode="USD">50000</ns1:EstimatedAmount>
<ns1:TaxAmount currencyCode="USD">0</ns1:TaxAmount>
<ns1:LastUpdateDate>2018-03-28T14:01:57.191Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>6879E35016BF0368E0534280F50A6B3C</ns1:LastUpdateLogin>
<ns1:LastUpdatedBy>Charles.Smith</ns1:LastUpdatedBy>
<ns1:CreatedBy>Charles.Smith</ns1:CreatedBy>
<ns1:CreationDate>2018-03-28T13:59:39.57Z</ns1:CreationDate>
<ns1:LedgerCurrency>USD</ns1:LedgerCurrency>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:AgreementEnabledFlag>false</ns1:AgreementEnabledFlag>
<ns1:CloseReason xsi:nil="true"/>
<ns1:CancelReason xsi:nil="true"/>
<ns1:AuthoringPartyCode xsi:nil="true"/>
<ns1:HoldReasonMeaning xsi:nil="true"/>
<ns1:PrimaryPartyId>1005</ns1:PrimaryPartyId>
<ns1:PersonId>100010032551061</ns1:PersonId>
<ns1:SalesAccountId xsi:nil="true"/>
<ns1:OrigSystemId>300100150718332</ns1:OrigSystemId>
<ns1:OrigSystemReference>1</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:AllowExternalItemFlag>false</ns1:AllowExternalItemFlag>
<ns1:SalesAccountName xsi:nil="true"/>
<ns1:ItemSourceCode>PRODUCT_MASTER</ns1:ItemSourceCode>
<ns1:StateTransitionFlowName xsi:nil="true"/>
<ns1:StateTransitionFlowState>ACTIVE</ns1:StateTransitionFlowState>
<ns1:UserStatusCode xsi:nil="true"/>
<ns1:AssigneeType xsi:nil="true"/>
<ns1:AssigneeId xsi:nil="true"/>
<ns1:Assignee xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:AccessLevel>UPDATE</ns1:AccessLevel>
<ns1:TemplateFlag>false</ns1:TemplateFlag>
<ns1:BillingSalesrepId xsi:nil="true"/>
<ns1:BillingSalesrepName xsi:nil="true"/>
<ns1:VersionDescription xsi:nil="true"/>
<ns1:Comment xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:AdjustmentBasis xsi:nil="true"/>
<ns1:CommitmentAmount currencyCode="USD">0</ns1:CommitmentAmount>
<ns1:PricingCalendarId xsi:nil="true"/>
<ns1:PricingPeriodType xsi:nil="true"/>
```

```
<ns1:PricingCalendarName xsi:nil="true"/>
<ns1:DiscountPercent xsi:nil="true"/>
<ns1:PriceListName xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:WebServiceFlag xsi:nil="true"/>
<ns1:TermsTemplateId xsi:nil="true"/>
<ns1:ContractOwnerId xsi:nil="true"/>
<ns1:Status>Active</ns1:Status>
<ns1:AuthoringPartyMeaning xsi:nil="true"/>
<ns1:InvOrgName/>
<ns1:Supplier/>
<ns1:SupplierSite xsi:nil="true"/>
<ns1:ShipInvOrg/>
<ns1:RecvInvOrg/>
<ns1:Currency>US Dollar</ns1:Currency>
<ns1:UserStatusMeaning/>
<ns1:LegalEntityName>Vision Operations</ns1:LegalEntityName>
<ns1:ShipToOrgLocation/>
<ns1:ChrType xsi:nil="true"/>
<ns1:EnableElectronicSignFlag>false</ns1:EnableElectronicSignFlag>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:AllowCurrencyOverrideFlag xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:ContractTrueValue xsi:nil="true"/>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:PricingSegmentExplanation xsi:nil="true"/>
<ns1:PricingStrategyExplanation xsi:nil="true"/>
<ns1:SegmentExplanationMessageName xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId>1033</ns1:ShipToPartySiteId>
<ns1:Subtotal>0</ns1:Subtotal>
<ns1:PricingStrategyId xsi:nil="true"/>
<ns1:PricingStrategyName xsi:nil="true"/>
<ns1:PricingSegmentCode xsi:nil="true"/>
<ns1:InvConversionRate xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PricingEffectivityDate>2018-03-28T00:00:00Z</ns1:PricingEffectivityDate>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation>5645 Main Street , , Jacksonville32209 , FL</ns1:ShipToPartySiteLocation>
<ns1:PeriodStartUsed xsi:nil="true"/>
<ns1:PeriodTypeUsed xsi:nil="true"/>
<ns1:InvoiceRuleName xsi:nil="true"/>
<ns1:AccountRuleName xsi:nil="true"/>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:PaymentTermId xsi:nil="true"/>
<ns1:PaymentTermName xsi:nil="true"/>
<ns1:CustomerPartyName>AT&amp;amp;T Universal Card</ns1:CustomerPartyName>
<ns1:CustomerPartySiteName>Jacksonville (OPS)</ns1:CustomerPartySiteName>
<ns1:PeriodTypeMeaning xsi:nil="true"/>
<ns1:PeriodStartMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:ContractCreditedAmount xsi:nil="true"/>
<ns1:ContractInvoicedAmount xsi:nil="true"/>
<ns1:UnbilledAmount currencyCode="USD">0</ns1:UnbilledAmount>
<ns1:TermsTemplateName xsi:nil="true"/>
<ns1:DocumentSubType xsi:nil="true"/>
<ns1:RenewalType xsi:nil="true"/>
<ns1:UnderAmendVersionFlag>true</ns1:UnderAmendVersionFlag>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:UnderMigrationFlag xsi:nil="true"/>
<ns1:ContractId>300100150718446</ns1:ContractId>
<ns1:CorpCurrencyCode>USD</ns1:CorpCurrencyCode>
```

```
<ns1:CurcyConvRateType>Corporate</ns1:CurcyConvRateType>
<ns1:QuoteToContactId xsi:nil="true"/>
<ns1:QuoteToContact xsi:nil="true"/>
<ns1:NegotiationCommChannel xsi:nil="true"/>
<ns1:NegotiationCustomerAcceptance xsi:nil="true"/>
<ns1:NegotiationEnableNotification xsi:nil="true"/>
<ns1:NegotiationInternalApproval xsi:nil="true"/>
<ns1:NegotiationLanguage xsi:nil="true"/>
<ns1:QuoteToCopyToEmail xsi:nil="true"/>
<ns1:QuotePhone xsi:nil="true"/>
<ns1:QuoteFax xsi:nil="true"/>
<ns1:QuoteEmail xsi:nil="true"/>
<ns1:QuoteAddress xsi:nil="true"/>
<ns1:QuoteOrg xsi:nil="true"/>
<ns1:QuoteAccount xsi:nil="true"/>
<ns1:PrimarySalesrepId xsi:nil="true"/>
<ns1:PrimarySalesRepresentative xsi:nil="true"/>
<ns1:NegotiationContractLayoutTemplate xsi:nil="true"/>
<ns1:NegotiationTermsLayoutTemplate xsi:nil="true"/>
<ns1:TransactionTypeName xsi:nil="true"/>
<ns1:AutoSendForSignature>N</ns1:AutoSendForSignature>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:EsignTemplateId xsi:nil="true"/>
<ns1:NonStandardClauseCount>0</ns1:NonStandardClauseCount>
<ns1:ContractPuid>KHDR-976</ns1:ContractPuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:RunContractExpertFlag xsi:nil="true"/>
<ns1:IgnoreQAWarningsFlag xsi:nil="true"/>
<ns1:BaseContractYN>N</ns1:BaseContractYN>
<ns1:ContractHeaderFlexfieldVA>
<ns7:ContractId>300100150718446</ns7:ContractId>
<ns7:FLEX_PARAM_ContractId>300100150718446</ns7:FLEX_PARAM_ContractId>
<ns7:biHeaderCode xsi:nil="true"/>
<ns7:biHeaderDff2 xsi:nil="true"/>
<ns7:zokcDffGText>ABCDEF</ns7:zokcDffGText>
<ns7:zokcDffGDate>0011-12-05</ns7:zokcDffGDate>
<ns7:testName xsi:nil="true"/>
<ns7:zREL9BI68 xsi:nil="true"/>
<ns7:biqa3Code xsi:nil="true"/>
<ns7:zokcDffGNumber>55</ns7:zokcDffGNumber>
<ns7:pjbContractHeader14 xsi:nil="true"/>
<ns7:pjbContractHeader15 xsi:nil="true"/>
<ns7:zokcContractIntent xsi:nil="true"/>
<ns7:zokcContractLine xsi:nil="true"/>
<ns7:zokcContractLine_Display xsi:nil="true"/>
<ns7:__FLEX_Context xsi:nil="true"/>
<ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns7:_FLEX_NumOfSegments>12</ns7:_FLEX_NumOfSegments>
</ns1:ContractHeaderFlexfieldVA>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100150718452</ns1:Id>
<ns1:PartyRoleCode>CUSTOMER</ns1:PartyRoleCode>
<ns1:Role>Customer</ns1:Role>
<ns1:PartyId>1005</ns1:PartyId>
<ns1:PartyName>AT&amp;amp;T Universal Card</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100150718452</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-2876</ns1:PartyRolePuid>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>300100150718452</ns3:Id>
```

```
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100150718452</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100150718452</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100150718452</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100150718449</ns1:Id>
<ns1:PartyRoleCode>SUPPLIER</ns1:PartyRoleCode>
<ns1:Role>Supplier</ns1:Role>
<ns1:PartyId>204</ns1:PartyId>
<ns1:PartyName>Vision Operations</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100150718449</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-2875</ns1:PartyRolePuid>
<ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
<ns1:Id>300100150718451</ns1:Id>
<ns1:ContactRoleCode>CONTRACT_ADMIN</ns1:ContactRoleCode>
<ns1:Role>Contract administrator</ns1:Role>
<ns1:ContactId>100010032635417</ns1:ContactId>
<ns1:OwnerFlag>true</ns1:OwnerFlag>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100150718451</ns1:ExternalKey>
<ns1:AccessLevel>FULL</ns1:AccessLevel>
<ns1:AccessLevelName>Full</ns1:AccessLevelName>
<ns1:SignerYn xsi:nil="true"/>
<ns1:PartyContactName>Charles Smith</ns1:PartyContactName>
<ns1:SignerSequence xsi:nil="true"/>
<ns1:RoutingSequence xsi:nil="true"/>
<ns1:SignatureRole xsi:nil="true"/>
<ns1:SignatureRoleMeaning xsi:nil="true"/>
<ns1:ContactPuid>CNTC-4670</ns1:ContactPuid>
<ns1:ContractPartyContactFlexfieldVA>
```

```
<ns2:Id>300100150718451</ns2:Id>
<ns2:MajorVersion>1</ns2:MajorVersion>
<ns2:__FLEX_Context xsi:nil="true"/>
<ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
</ns1:ContractPartyContactFlexfieldVA>
</ns1:ContractPartyContact>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>300100150718449</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100150718449</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100150718449</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100150718449</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>CDRMPJB_InvoiceAdjustment</ns1:Cognomen>
<ns1:Description xsi:nil="true"/>
<ns1:Id>300100150718445</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>CDRMPJB_InvoiceAdjustment</ns1:Cognomen>
<ns1:Description xsi:nil="true"/>
<ns1:Id>300100150718445</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>CDRMPJB_InvoiceAdjustment</ns1:Cognomen>
<ns1:Description xsi:nil="true"/>
<ns1:Id>300100150718445</ns1:Id>
<ns1:Language>US</ns1:Language>
```

```
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>100100073727346</ns1:Id>
<ns1:LineId>100100095871443</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>1</ns1:ItemName>
<ns1:ItemNameTxt>1</ns1:ItemNameTxt>
<ns1:ItemDescription xsi:nil="true"/>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate>2030-12-31</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode xsi:nil="true"/>
<ns1:UnitOfMeasure xsi:nil="true"/>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity xsi:nil="true"/>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount currencyCode="USD">50000</ns1:LineValueAmount>
<ns1:LineAmount currencyCode="USD">50000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode>ESTIMATED</ns1:CommitLevelCode>
<ns1:CommitLevel>Estimated</ns1:CommitLevel>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
```

```
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Jacksonville (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:WareHouse xsi:nil="true"/>
<ns1:BillPlanId>300100150718453</ns1:BillPlanId>
<ns1:BillPlan>BP</ns1:BillPlan>
<ns1:RevenuePlanId>300100150718454</ns1:RevenuePlanId>
<ns1:RevenuePlan>RP</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:TaxExemptionControlMeaning>Standard</ns1:TaxExemptionControlMeaning>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>N</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference>1</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:Cognomen xsi:nil="true"/>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>100100073727346</ns1:ExternalKey>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId xsi:nil="true"/>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="0zE">14</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
```

```
<ns1:PriceItemQuantity xsi:nil="true"/>
<ns1:PriceItemUOM xsi:nil="true"/>
<ns1:BillToAccountDescription xsi:nil="true"/>
<ns1:BillToAccount xsi:nil="true"/>
<ns1:BillToAccountNumber xsi:nil="true"/>
<ns1:BillToSiteUseLocation xsi:nil="true"/>
<ns1:BillToSiteUseId xsi:nil="true"/>
<ns1:BillToAddress xsi:nil="true"/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-23399</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095871443</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095871443</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
```

```
<ns1:Id>100100073727346</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription xsi:nil="true"/>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100073727346</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription xsi:nil="true"/>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100073727346</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription xsi:nil="true"/>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>300100150718456</ns5:BillingControlId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate>2030-12-31</ns5:EndDate>
<ns5:SoftLimitAmount currencyCode="USD">50000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300100150718458</ns5:LinkId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:ProjectId>300100150718417</ns5:ProjectId>
<ns5:ProjectNumber>CDRMPJB_InvoiceAdjustment</ns5:ProjectNumber>
<ns5:ProjElementId>100100073723073</ns5:ProjElementId>
<ns5:TaskNumber>2.3</ns5:TaskNumber>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:BillPlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100150718453</ns5:BillPlanId>
```

```
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>300100024846778</ns5:BillMethodId>
<ns5:BillMethodName>Rate Based Method</ns5:BillMethodName>
<ns5:BillPlanName>BP</ns5:BillPlanName>
<ns5:InvoiceCurrencyOptCode>CONTRACT</ns5:InvoiceCurrencyOptCode>
<ns5:BillingCurrencyType>Contract</ns5:BillingCurrencyType>
<ns5:PaymentTermsId>4</ns5:PaymentTermsId>
<ns5:PaymentTerms>30 Net</ns5:PaymentTerms>
<ns5:BillSetNumber>1</ns5:BillSetNumber>
<ns5:BillToCustomerAccountId>1005</ns5:BillToCustomerAccountId>
<ns5:BillToAccountNumber>1005</ns5:BillToAccountNumber>
<ns5:BillToSiteUseId>1023</ns5:BillToSiteUseId>
<ns5:BillToSite>Jacksonville (OPS)</ns5:BillToSite>
<ns5:BillToContactId>4000</ns5:BillToContactId>
<ns5:BillToContactName>Marieke Velden van</ns5:BillToContactName>
<ns5:BillToContactEmail>sendmail-test-discard@oracle.com</ns5:BillToContactEmail>
<ns5:BillingCycleId>1000000000003</ns5:BillingCycleId>
<ns5:BillingCycle>Monthly</ns5:BillingCycle>
<ns5:LaborInvoiceFormatId>100000011406004</ns5:LaborInvoiceFormatId>
<ns5:LaborInvoiceFormat>Cont Line Prj/Task Format</ns5:LaborInvoiceFormat>
<ns5:NlInvoiceFormatId>7005</ns5:NlInvoiceFormatId>
<ns5:NonlaborInvoiceFormat>Contract Line Project/Task Exp</ns5:NonlaborInvoiceFormat>
<ns5:EventsInvoiceFormatId>100000011213026</ns5:EventsInvoiceFormatId>
<ns5:EventInvoiceFormat>Cont Line Project/Task Event</ns5:EventInvoiceFormat>
<ns5:FirstBillingOffsetDays xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:PersonBillRateSchId>100000010146226</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule>Employee Bill Rates</ns5:PersonRateSchedule>
<ns5:JobBillRateSchId>100000011213133</ns5:JobBillRateSchId>
<ns5:JobRateSchedule>T&amp;amp;M Job Bill Rate Schedule</ns5:JobRateSchedule>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId>100000010420025</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule>Nonlabor Bill Rates</ns5:NonlaborRateSchedule>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:InvoiceCurrencyDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyExchgDate xsi:nil="true"/>
<ns5:InvoiceCurrencyRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyCode xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
```

```
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:DocumentNumber xsi:nil="true"/>
<ns5:LocFlag xsi:nil="true"/>
<ns5:ReportTypeCode xsi:nil="true"/>
<ns5:FederalInvoiceFormat xsi:nil="true"/>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100150718453</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>BP</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100150718453</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>BP</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100150718453</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>BP</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanDescriptiveFlexField>
<ns8:BillPlanId>300100150718453</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:BillPlanDescriptiveFlexField>
</ns1:BillPlan>
<ns1:BillingControl>
<ns5:BillingControlId>300100150718455</ns5:BillingControlId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate>2030-12-31</ns5:EndDate>
<ns5:SoftLimitAmount currencyCode="USD">50000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:RevenuePlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100150718454</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>100000015590467</ns5:BillMethodId>
<ns5:BillMethodName>As Incurred Method</ns5:BillMethodName>
<ns5:BillPlanName>RP</ns5:BillPlanName>
<ns5:PersonBillRateSchId xsi:nil="true"/>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId xsi:nil="true"/>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
```

```
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId xsi:nil="true"/>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:RevenuePlanDescriptiveFlexField>
<ns8:BillPlanId>300100150718454</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:RevenuePlanDescriptiveFlexField>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100150718454</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>RP</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100150718454</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>RP</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100150718454</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>RP</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
</ns1:RevenuePlan>
```

```
<ns1:OKCSOPText_c xsi:nil="true"/>
<ns1:OKCSOPNumber_c xsi:nil="true"/>
<ns1:OKCSOPDate_c xsi:nil="true"/>
<ns1:OKCSOPLong_c xsi:nil="true"/>
<ns1:OKCSOPDCL_Id_c xsi:nil="true"/>
<ns1:OKCSOPDCL_c xsi:nil="true"/>
</ns1:Value>
<ns1:Value>
<ns1:Id>300100128520940</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128520940</ns1:ExternalKey>
<ns1:InvConvRateTypeName>Spot</ns1:InvConvRateTypeName>
<ns1:InvConvRateDateTypeName>Transaction date</ns1:InvConvRateDateTypeName>
<ns1:OrgName>Vision Operations</ns1:OrgName>
<ns1:OrgId>204</ns1:OrgId>
<ns1:ContractTypeName>Sell : Project lines</ns1:ContractTypeName>
<ns1:ContractClass>CONTRACT</ns1:ContractClass>
<ns1:ContractTypeId>104</ns1:ContractTypeId>
<ns1:ContractNumber>PJB_CDRM_CNT_INV_GEN_DR1</ns1:ContractNumber>
<ns1:ContractNumberModifier xsi:nil="true"/>
<ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_DR1</ns1:Cognomen>
<ns1:BuyOrSell>S</ns1:BuyOrSell>
<ns1:PartyId>1005</ns1:PartyId>
<ns1:PartyName>AT&amp;amp;T Universal Card</ns1:PartyName>
<ns1:InvOrganizationId xsi:nil="true"/>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:CurrencyCode>USD</ns1:CurrencyCode>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:InvConvRateType>Spot</ns1:InvConvRateType>
<ns1:InvConvRateDateType>TRANSACTION</ns1:InvConvRateDateType>
<ns1:InvConvRateDate xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:InvTrxTypeName>PA Invoice</ns1:InvTrxTypeName>
<ns1:BillToAccountId>1005</ns1:BillToAccountId>
<ns1:BillToAccount>AT&amp;amp;T Universal Card</ns1:BillToAccount>
<ns1:BillToAccountNumber>1005</ns1:BillToAccountNumber>
<ns1:BillToSiteUseId>1023</ns1:BillToSiteUseId>
<ns1:BillToSiteUseLocation>Jacksonville (OPS)</ns1:BillToSiteUseLocation>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
<ns1:ShipToSiteUseLocation>Jacksonville (OPS)</ns1:ShipToSiteUseLocation>
<ns1:SoldToAccountId xsi:nil="true"/>
<ns1:SoldToAccount xsi:nil="true"/>
<ns1:SoldToAccountNumber xsi:nil="true"/>
<ns1:SoldToSiteId xsi:nil="true"/>
<ns1:SoldToNumber xsi:nil="true"/>
<ns1:SoldToAddress xsi:nil="true"/>
<ns1:SoldToAccountDescription xsi:nil="true"/>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:LegalEntityId>204</ns1:LegalEntityId>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:DateApproved>2018-01-17</ns1:DateApproved>
<ns1:DatetimeCancelled xsi:nil="true"/>
<ns1:DateSigned>2018-01-17</ns1:DateSigned>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:TerminateCancelSource xsi:nil="true"/>
<ns1:ContributionPercent>1</ns1:ContributionPercent>
<ns1:BillSequence xsi:nil="true"/>
<ns1:OverallRiskCode xsi:nil="true"/>
```

```
<ns1:ShortDescription xsi:nil="true"/>
<ns1:Description xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:AmendmentEffectiveDate xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ProjectEnabledFlag>true</ns1:ProjectEnabledFlag>
<ns1:OutputTaxSetId>204</ns1:OutputTaxSetId>
<ns1:PartyObjectType>OKX_PARTY</ns1:PartyObjectType>
<ns1:PrimaryLedgerId>1</ns1:PrimaryLedgerId>
<ns1:CustomerPartyId>1005</ns1:CustomerPartyId>
<ns1:CustomerPartySiteId>1024</ns1:CustomerPartySiteId>
<ns1:GeneratedInvoiceStatus>D</ns1:GeneratedInvoiceStatus>
<ns1:OwningOrgId>204</ns1:OwningOrgId>
<ns1:NetInvoiceFlag>false</ns1:NetInvoiceFlag>
<ns1:VersionType>C</ns1:VersionType>
<ns1:OwningOrgName>Vision Operations</ns1:OwningOrgName>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:ExemptionReasonMeaning xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:ApTermsId xsi:nil="true"/>
<ns1:ServiceEnabledFlag>false</ns1:ServiceEnabledFlag>
<ns1:EstimatedAmount currencyCode="USD">175000</ns1:EstimatedAmount>
<ns1:TaxAmount currencyCode="USD">0</ns1:TaxAmount>
<ns1:LastUpdateDate>2018-01-17T06:12:03.26Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>62F393106E5976A2E0534280F50A0846</ns1:LastUpdateLogin>
<ns1:LastUpdatedBy>ABRAHAM.MASON</ns1:LastUpdatedBy>
<ns1:CreatedBy>Charles.Smith</ns1:CreatedBy>
<ns1:CreationDate>2018-01-16T18:35:09.654Z</ns1:CreationDate>
<ns1:LedgerCurrency>USD</ns1:LedgerCurrency>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:AgreementEnabledFlag>false</ns1:AgreementEnabledFlag>
<ns1:CloseReason xsi:nil="true"/>
<ns1:CancelReason xsi:nil="true"/>
<ns1:AuthoringPartyCode xsi:nil="true"/>
<ns1:HoldReasonMeaning xsi:nil="true"/>
<ns1:PrimaryPartyId>1005</ns1:PrimaryPartyId>
<ns1:PersonId>100010032551061</ns1:PersonId>
<ns1:SalesAccountId xsi:nil="true"/>
<ns1:OrigSystemId>300100003405739</ns1:OrigSystemId>
<ns1:OrigSystemReference>3</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:AllowExternalItemFlag>false</ns1:AllowExternalItemFlag>
<ns1:SalesAccountName xsi:nil="true"/>
<ns1:ItemSourceCode>PRODUCT_MASTER</ns1:ItemSourceCode>
<ns1:StateTransitionFlowName xsi:nil="true"/>
<ns1:StateTransitionFlowState>ACTIVE</ns1:StateTransitionFlowState>
<ns1:UserStatusCode xsi:nil="true"/>
<ns1:AssigneeType xsi:nil="true"/>
<ns1:AssigneeId xsi:nil="true"/>
<ns1:Assignee xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:AccessLevel>UPDATE</ns1:AccessLevel>
<ns1:TemplateFlag>false</ns1:TemplateFlag>
<ns1:BillingSalesrepId xsi:nil="true"/>
<ns1:BillingSalesrepName xsi:nil="true"/>
<ns1:VersionDescription xsi:nil="true"/>
<ns1:Comment xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:AdjustmentBasis xsi:nil="true"/>
<ns1:CommitmentAmount currencyCode="USD">0</ns1:CommitmentAmount>
<ns1:PricingCalendarId xsi:nil="true"/>
```

```
<ns1:PricingPeriodType xsi:nil="true"/>
<ns1:PricingCalendarName xsi:nil="true"/>
<ns1:DiscountPercent xsi:nil="true"/>
<ns1:PriceListName xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:WebServiceFlag xsi:nil="true"/>
<ns1:TermsTemplateId xsi:nil="true"/>
<ns1:ContractOwnerId xsi:nil="true"/>
<ns1:Status>Active</ns1:Status>
<ns1:AuthoringPartyMeaning xsi:nil="true"/>
<ns1:InvOrgName/>
<ns1:Supplier/>
<ns1:SupplierSite xsi:nil="true"/>
<ns1:ShipInvOrg/>
<ns1:RecvInvOrg/>
<ns1:Currency>US Dollar</ns1:Currency>
<ns1:UserStatusMeaning/>
<ns1:LegalEntityName>Vision Operations</ns1:LegalEntityName>
<ns1:ShipToOrgLocation/>
<ns1:ChrType xsi:nil="true"/>
<ns1:EnableElectronicSignFlag>false</ns1:EnableElectronicSignFlag>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:AllowCurrencyOverrideFlag xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:ContractTrueValue xsi:nil="true"/>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:PricingSegmentExplanation xsi:nil="true"/>
<ns1:PricingStrategyExplanation xsi:nil="true"/>
<ns1:SegmentExplanationMessageName xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId>1033</ns1:ShipToPartySiteId>
<ns1:Subtotal>0</ns1:Subtotal>
<ns1:PricingStrategyId xsi:nil="true"/>
<ns1:PricingStrategyName xsi:nil="true"/>
<ns1:PricingSegmentCode xsi:nil="true"/>
<ns1:InvConversionRate xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PricingEffectivityDate/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation>5645 Main Street , , Jacksonville32209 , FL</ns1:ShipToPartySiteLocation>
<ns1:PeriodStartUsed xsi:nil="true"/>
<ns1:PeriodTypeUsed xsi:nil="true"/>
<ns1:InvoiceRuleName xsi:nil="true"/>
<ns1:AccountRuleName xsi:nil="true"/>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:PaymentTermId xsi:nil="true"/>
<ns1:PaymentTermName xsi:nil="true"/>
<ns1:CustomerPartyName>AT&amp;amp;T Universal Card</ns1:CustomerPartyName>
<ns1:CustomerPartySiteName>Jacksonville (OPS)</ns1:CustomerPartySiteName>
<ns1:PeriodTypeMeaning xsi:nil="true"/>
<ns1:PeriodStartMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:ContractCreditedAmount xsi:nil="true"/>
<ns1:ContractInvoicedAmount xsi:nil="true"/>
<ns1:UnbilledAmount currencyCode="USD">0</ns1:UnbilledAmount>
<ns1:TermsTemplateName xsi:nil="true"/>
<ns1:DocumentSubType xsi:nil="true"/>
<ns1:RenewalType xsi:nil="true"/>
<ns1:UnderAmendVersionFlag xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:UnderMigrationFlag xsi:nil="true"/>
<ns1:ContractId>100100069551128</ns1:ContractId>
```

```
<ns1:CorpCurrencyCode xsi:nil="true"/>
<ns1:CurcyConvRateType xsi:nil="true"/>
<ns1:QuoteToContactId xsi:nil="true"/>
<ns1:QuoteToContact xsi:nil="true"/>
<ns1:NegotiationCommChannel xsi:nil="true"/>
<ns1:NegotiationCustomerAcceptance xsi:nil="true"/>
<ns1:NegotiationEnableNotification xsi:nil="true"/>
<ns1:NegotiationInternalApproval xsi:nil="true"/>
<ns1:NegotiationLanguage xsi:nil="true"/>
<ns1:QuoteToCopyToEmail xsi:nil="true"/>
<ns1:QuotePhone xsi:nil="true"/>
<ns1:QuoteFax xsi:nil="true"/>
<ns1:QuoteEmail xsi:nil="true"/>
<ns1:QuoteAddress xsi:nil="true"/>
<ns1:QuoteOrg xsi:nil="true"/>
<ns1:QuoteAccount xsi:nil="true"/>
<ns1:PrimarySalesrepId xsi:nil="true"/>
<ns1:PrimarySalesRepresentative xsi:nil="true"/>
<ns1:NegotiationContractLayoutTemplate xsi:nil="true"/>
<ns1:NegotiationTermsLayoutTemplate xsi:nil="true"/>
<ns1:TransactionTypeName xsi:nil="true"/>
<ns1:AutoSendForSignature xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:EsignTemplateId xsi:nil="true"/>
<ns1:NonStandardClauseCount>0</ns1:NonStandardClauseCount>
<ns1:ContractPuid>KHDR-1008</ns1:ContractPuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:RunContractExpertFlag xsi:nil="true"/>
<ns1:IgnoreQAWarningsFlag xsi:nil="true"/>
<ns1:BaseContractYN>N</ns1:BaseContractYN>
<ns1:ContractHeaderFlexfieldVA>
<ns7:ContractId>100100069551128</ns7:ContractId>
<ns7:FLEX_PARAM_ContractId>100100069551128</ns7:FLEX_PARAM_ContractId>
<ns7:biHeaderCode xsi:nil="true"/>
<ns7:biHeaderDff2 xsi:nil="true"/>
<ns7:zokcDffGText xsi:nil="true"/>
<ns7:zokcDffGDate xsi:nil="true"/>
<ns7:testName xsi:nil="true"/>
<ns7:zREL9BI68 xsi:nil="true"/>
<ns7:biqa3Code xsi:nil="true"/>
<ns7:zokcDffGNumber xsi:nil="true"/>
<ns7:pjbContractHeader14 xsi:nil="true"/>
<ns7:pjbContractHeader15 xsi:nil="true"/>
<ns7:zokcContractIntent xsi:nil="true"/>
<ns7:zokcContractLine xsi:nil="true"/>
<ns7:zokcContractLine_Display xsi:nil="true"/>
<ns7:__FLEX_Context xsi:nil="true"/>
<ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns7:_FLEX_NumOfSegments>12</ns7:_FLEX_NumOfSegments>
</ns1:ContractHeaderFlexfieldVA>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100128520945</ns1:Id>
<ns1:PartyRoleCode>CUSTOMER</ns1:PartyRoleCode>
<ns1:Role>Customer</ns1:Role>
<ns1:PartyId>1005</ns1:PartyId>
<ns1:PartyName>AT&amp;amp;T Universal Card</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128520945</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-3286</ns1:PartyRolePuid>
<ns1:ContractPartyFlexfieldVA>
```

```
<ns3:Id>300100128520945</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520945</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520945</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520945</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>300100128520942</ns1:Id>
<ns1:PartyRoleCode>SUPPLIER</ns1:PartyRoleCode>
<ns1:Role>Supplier</ns1:Role>
<ns1:PartyId>204</ns1:PartyId>
<ns1:PartyName>Vision Operations</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy xsi:nil="true"/>
<ns1:SignedDate xsi:nil="true"/>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128520942</ns1:ExternalKey>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-3285</ns1:PartyRolePuid>
<ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
<ns1:Id>300100128520944</ns1:Id>
<ns1:ContactRoleCode>CONTRACT_ADMIN</ns1:ContactRoleCode>
<ns1:Role>Contract administrator</ns1:Role>
<ns1:ContactId>100010032635417</ns1:ContactId>
<ns1:OwnerFlag>true</ns1:OwnerFlag>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100128520944</ns1:ExternalKey>
<ns1:AccessLevel>FULL</ns1:AccessLevel>
<ns1:AccessLevelName>Full</ns1:AccessLevelName>
<ns1:SignerYn xsi:nil="true"/>
<ns1:PartyContactName>Charles Smith</ns1:PartyContactName>
<ns1:SignerSequence xsi:nil="true"/>
<ns1:RoutingSequence xsi:nil="true"/>
<ns1:SignatureRole xsi:nil="true"/>
<ns1:SignatureRoleMeaning xsi:nil="true"/>
<ns1:ContactPuid>CNTC-1549</ns1:ContactPuid>
```

```
<ns1:ContractPartyContactFlexfieldVA>
<ns2:Id>300100128520944</ns2:Id>
<ns2:MajorVersion>1</ns2:MajorVersion>
<ns2:__FLEX_Context xsi:nil="true"/>
<ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
</ns1:ContractPartyContactFlexfieldVA>
</ns1:ContractPartyContact>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>300100128520942</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520942</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520942</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>300100128520942</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_DR1</ns1:Cognomen>
<ns1:Description xsi:nil="true"/>
<ns1:Id>300100128520940</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>[PJS CPBF Flow ContractΩ'+++ '+++ 'Ø</ns1:Cognomen>
<ns1:Description>[Contract to be employed to execute CPBF Flow.Ω'+++ '+++ '+++ '+++ '+++ '++Ø</
ns1:Description>
<ns1:Id>300100128520940</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>KO</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>PJB_CDRM_CNT_INV_GEN_DR1</ns1:Cognomen>
<ns1:Description xsi:nil="true"/>
```

```
<ns1:Id>300100128520940</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>100100066618223</ns1:Id>
<ns1:LineId>100100095831711</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>1</ns1:ItemName>
<ns1:ItemNameTxt>1</ns1:ItemNameTxt>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:StartDate>2017-01-01</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode xsi:nil="true"/>
<ns1:UnitOfMeasure xsi:nil="true"/>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity xsi:nil="true"/>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount currencyCode="USD">175000</ns1:LineValueAmount>
<ns1:LineAmount currencyCode="USD">175000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1005</ns1:ShipToAccountId>
```

```
<ns1:ShipToAccount>AT&amp;amp;T Universal Card</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1005</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1024</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Jacksonville (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:WareHouse xsi:nil="true"/>
<ns1:BillPlanId>300100128520946</ns1:BillPlanId>
<ns1:BillPlan>BP1</ns1:BillPlan>
<ns1:RevenuePlanId>300100128520947</ns1:RevenuePlanId>
<ns1:RevenuePlan>RP1</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:TaxExemptionControlMeaning>Standard</ns1:TaxExemptionControlMeaning>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>N</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference>3</ns1:OrigSystemReference>
<ns1:OrigSystemSourceCode>OKCCOPY</ns1:OrigSystemSourceCode>
<ns1:Cognomen xsi:nil="true"/>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>100100066618223</ns1:ExternalKey>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId xsi:nil="true"/>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId>1033</ns1:ShipToPartySiteId>
```

```
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity xsi:nil="true"/>
<ns1:PriceItemUOM xsi:nil="true"/>
<ns1:BillToAccountDescription xsi:nil="true"/>
<ns1:BillToAccount xsi:nil="true"/>
<ns1:BillToAccountNumber xsi:nil="true"/>
<ns1:BillToSiteUseLocation xsi:nil="true"/>
<ns1:BillToSiteUseId xsi:nil="true"/>
<ns1:BillToAddress xsi:nil="true"/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation>5645 Main Street , , Jacksonville32209 , FL</ns1:ShipToPartySiteLocation>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>37</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-4868</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095831711</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095831711</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
```

```
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066618223</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066618223</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[PJS CPBF Line1Ω'+++ Ø</ns1:ItemDescription>
<ns1:ItemName>[PJS CPBF Line1Ω'+++ Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen xsi:nil="true"/>
<ns1:Id>100100066618223</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>1</ns1:ItemDescription>
<ns1:ItemName>1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>300100128520949</ns5:BillingControlId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate xsi:nil="true"/>
<ns5:SoftLimitAmount currencyCode="USD">175000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300100128520952</ns5:LinkId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:ProjectId>300100128520786</ns5:ProjectId>
<ns5:ProjectNumber>PJB_CDRM_CNT_INV_GEN_DR1</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
```

```
<ns1:BillPlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100128520946</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>1003</ns5:BillMethodId>
<ns5:BillMethodName>Bill Rate Invoice</ns5:BillMethodName>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceCurrencyOptCode>CONTRACT</ns5:InvoiceCurrencyOptCode>
<ns5:BillingCurrencyType>Contract</ns5:BillingCurrencyType>
<ns5:PaymentTermsId>4</ns5:PaymentTermsId>
<ns5:PaymentTerms>30 Net</ns5:PaymentTerms>
<ns5:BillSetNumber>1</ns5:BillSetNumber>
<ns5:BillToCustomerAccountId>1005</ns5:BillToCustomerAccountId>
<ns5:BillToAccountNumber>1005</ns5:BillToAccountNumber>
<ns5:BillToSiteUseId>1023</ns5:BillToSiteUseId>
<ns5:BillToSite>Jacksonville (OPS)</ns5:BillToSite>
<ns5:BillToContactId>4840</ns5:BillToContactId>
<ns5:BillToContactName>Paula Springer</ns5:BillToContactName>
<ns5:BillToContactEmail>sendmail-test-discard@oracle.com</ns5:BillToContactEmail>
<ns5:BillingCycleId>1000000000003</ns5:BillingCycleId>
<ns5:BillingCycle>Monthly</ns5:BillingCycle>
<ns5:LaborInvoiceFormatId>7004</ns5:LaborInvoiceFormatId>
<ns5:LaborInvoiceFormat>Contract Line Project/Task Emp</ns5:LaborInvoiceFormat>
<ns5:NlInvoiceFormatId>7005</ns5:NlInvoiceFormatId>
<ns5:NonlaborInvoiceFormat>Contract Line Project/Task Exp</ns5:NonlaborInvoiceFormat>
<ns5:EventsInvoiceFormatId>100000011213026</ns5:EventsInvoiceFormatId>
<ns5:EventInvoiceFormat>Cont Line Project/Task Event</ns5:EventInvoiceFormat>
<ns5:FirstBillingOffsetDays xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:PersonBillRateSchId>300100001800278</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule>PJS CPBF Employee Act Rev Rate</ns5:PersonRateSchedule>
<ns5:JobBillRateSchId>100000010179011</ns5:JobBillRateSchId>
<ns5:JobRateSchedule>Construction Job Bill Rates</ns5:JobRateSchedule>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId>300100001800288</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule>PJS CPBF Nonlabor Actual Rev</ns5:NonlaborRateSchedule>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:InvoiceCurrencyDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyExchgDate xsi:nil="true"/>
<ns5:InvoiceCurrencyRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyCode xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
```

```
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:DocumentNumber xsi:nil="true"/>
<ns5:LocFlag xsi:nil="true"/>
<ns5:ReportTypeCode xsi:nil="true"/>
<ns5:FederalInvoiceFormat xsi:nil="true"/>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128520946</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128520946</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>300100128520946</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>BP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanDescriptiveFlexField>
<ns8:BillPlanId>300100128520946</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:BillPlanDescriptiveFlexField>
</ns1:BillPlan>
<ns1:BillingControl>
<ns5:BillingControlId>300100128520948</ns5:BillingControlId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2017-01-01</ns5:StartDate>
<ns5:EndDate xsi:nil="true"/>
<ns5:SoftLimitAmount currencyCode="USD">175000</ns5:SoftLimitAmount>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:RevenuePlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>300100128520947</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>100000015590467</ns5:BillMethodId>
<ns5:BillMethodName>As Incurred Method</ns5:BillMethodName>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:PersonBillRateSchId xsi:nil="true"/>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId xsi:nil="true"/>
```

```
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag xsi:nil="true"/>
<ns5:NlBillRateSchId xsi:nil="true"/>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag xsi:nil="true"/>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:RevenuePlanDescriptiveFlexField>
<ns8:BillPlanId>300100128520947</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:RevenuePlanDescriptiveFlexField>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128520947</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128520947</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>300100128520947</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>RP1</ns5:BillPlanName>
<ns5:InvoiceComment xsi:nil="true"/>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
```

```
 </ns5:RevenuePlanTranslation>
 </ns1:RevenuePlan>
 <ns1:OKCSOPText_c xsi:nil="true"/>
 <ns1:OKCSOPNumber_c xsi:nil="true"/>
 <ns1:OKCSOPDate_c xsi:nil="true"/>
 <ns1:OKCSOPLong_c xsi:nil="true"/>
 <ns1:OKCSOPDCL_Id_c xsi:nil="true"/>
 <ns1:OKCSOPDCL_c xsi:nil="true"/>
 </ns1:Value>
 </ns2:result>
 </ns0:findContractResponse>
 </env:Body>
</env:Envelope>
```

Find Contract by Contract Number

In this use case, we'll search for a contract based on the contract number.

Contract type: All

Operation: **findContract**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:typ="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/types/"
xmlns:typ1="http://xmlns.oracle.com/adf/svc/types/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:findContract>
 <typ:findCriteria>
 <typ1:fetchStart>0</typ1:fetchStart>
 <typ1:fetchSize>10</typ1:fetchSize>
 <typ1:filter>
 <typ1:conjunction>And</typ1:conjunction>
 <typ1:group>
 <typ1:conjunction>And</typ1:conjunction>
 <typ1:upperCaseCompare></typ1:upperCaseCompare>
 <typ1:item>
 <typ1:conjunction>And</typ1:conjunction>
 <typ1:upperCaseCompare></typ1:upperCaseCompare>
 <typ1:attribute>ContractNumber</typ1:attribute>
 <typ1:operator>=</typ1:operator>
 <typ1:value>ECM Contract : 999990000001443</typ1:value>
 </typ1:item>
 </typ1:group>
 </typ1:filter>
 </typ:findCriteria>
 <typ:findControl>
 <typ1:retrieveAllTranslations>false</typ1:retrieveAllTranslations>
 </typ:findControl>
 </typ:findContract>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
```

```
 <wsa:Action>http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/ContractService/
findContractResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:184c4851-eade-4aee-857e-d4cdbe59bfb6</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:findContractResponse xmlns:ns0="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/
types/">
 <ns2:result xsi:type="ns1:ContractHeaderResult"
xmlns:ns7="http://xmlns.oracle.com/apps/contracts/coreAuthoring/header/flex/header/"
xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/"
xmlns:ns5="http://xmlns.oracle.com/apps/projects/billing/contracts/contractPublicService/"
xmlns:ns6="http://xmlns.oracle.com/apps/projects/billing/contracts/contractBillingService/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/types/">
 <ns1:Value>
 <ns1:Id>999990000001443</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:InvConvRateTypeName xsi:nil="true"/>
 <ns1:InvConvRateDateTypeName xsi:nil="true"/>
 <ns1:OrgName>Vision Operations</ns1:OrgName>
 <ns1:OrgId>204</ns1:OrgId>
 <ns1:ContractTypeName>Sell : Project lines</ns1:ContractTypeName>
 <ns1:ContractClass>CONTRACT</ns1:ContractClass>
 <ns1:ContractTypeId>104</ns1:ContractTypeId>
 <ns1:ContractNumber>ECM Contract : 999990000001443</ns1:ContractNumber>
 <ns1:ContractNumberModifier xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract : 999990000001443</ns1:Cognomen>
 <ns1:BuyOrSell>S</ns1:BuyOrSell>
 <ns1:PartyId>1006</ns1:PartyId>
 <ns1:PartyName>Computer Service and Rentals</ns1:PartyName>
 <ns1:InvOrganizationId>204</ns1:InvOrganizationId>
 <ns1:StsCode>ACTIVE</ns1:StsCode>
 <ns1:CurrencyCode>USD</ns1:CurrencyCode>
 <ns1:StartDate>2008-08-06</ns1:StartDate>
 <ns1:EndDate>2009-08-06</ns1:EndDate>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:InvConvRateType xsi:nil="true"/>
 <ns1:InvConvRateDateType xsi:nil="true"/>
 <ns1:InvConvRateDate xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:InvTrxTypeName>Inv-Consult-South</ns1:InvTrxTypeName>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
 <ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
 <ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
 <ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
 <ns1:ShipToSiteUseLocation>Tempe (OPS)</ns1:ShipToSiteUseLocation>
 <ns1:SoldToAccountId xsi:nil="true"/>
 <ns1:SoldToAccount xsi:nil="true"/>
 <ns1:SoldToAccountNumber xsi:nil="true"/>
 <ns1:SoldToSiteId xsi:nil="true"/>
 <ns1:SoldToNumber xsi:nil="true"/>
 <ns1:SoldToAddress xsi:nil="true"/>
 <ns1:SoldToAccountDescription xsi:nil="true"/>
 <ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:LegalEntityId>204</ns1:LegalEntityId>
 <ns1:OutputTaxClassificationCode xsi:nil="true"/>
```

```
<ns1:DateApproved>2008-08-05</ns1:DateApproved>
<ns1:DatetimeCancelled xsi:nil="true"/>
<ns1:DateSigned>2008-08-05</ns1:DateSigned>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:TerminateCancelSource xsi:nil="true"/>
<ns1:ContributionPercent xsi:nil="true"/>
<ns1:BillSequence xsi:nil="true"/>
<ns1:OverallRiskCode xsi:nil="true"/>
<ns1:ShortDescription>ECM Contract : 999990000001443</ns1:ShortDescription>
<ns1:Description>ECM Contract : 999990000001443</ns1:Description>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:AmendmentEffectiveDate xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ProjectEnabledFlag>true</ns1:ProjectEnabledFlag>
<ns1:OutputTaxSetId>204</ns1:OutputTaxSetId>
<ns1:PartyObjectType>OKX_PARTY</ns1:PartyObjectType>
<ns1:PrimaryLedgerId>1</ns1:PrimaryLedgerId>
<ns1:CustomerPartyId>1006</ns1:CustomerPartyId>
<ns1:CustomerPartySiteId>1028</ns1:CustomerPartySiteId>
<ns1:GeneratedInvoiceStatus xsi:nil="true"/>
<ns1:OwningOrgId xsi:nil="true"/>
<ns1:NetInvoiceFlag xsi:nil="true"/>
<ns1:VersionType>H</ns1:VersionType>
<ns1:OwningOrgName xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:ExemptionReasonMeaning xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:ApTermsId xsi:nil="true"/>
<ns1:ServiceEnabledFlag>false</ns1:ServiceEnabledFlag>
<ns1:EstimatedAmount currencyCode="USD">0.00</ns1:EstimatedAmount>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:LastUpdateDate>2008-09-05T15:28:17Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>1</ns1:LastUpdateLogin>
<ns1:LastUpdatedBy>1</ns1:LastUpdatedBy>
<ns1:CreatedBy>1</ns1:CreatedBy>
<ns1:CreationDate>2008-09-05T15:28:17Z</ns1:CreationDate>
<ns1:LedgerCurrency>USD</ns1:LedgerCurrency>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:AgreementEnabledFlag>false</ns1:AgreementEnabledFlag>
<ns1:CloseReason xsi:nil="true"/>
<ns1:CancelReason xsi:nil="true"/>
<ns1:AuthoringPartyCode xsi:nil="true"/>
<ns1:HoldReasonMeaning xsi:nil="true"/>
<ns1:PrimaryPartyId>1006</ns1:PrimaryPartyId>
<ns1:PersonId xsi:nil="true"/>
<ns1:SalesAccountId xsi:nil="true"/>
<ns1:OrigSystemId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:AllowExternalItemFlag>false</ns1:AllowExternalItemFlag>
<ns1:SalesAccountName xsi:nil="true"/>
<ns1:ItemSourceCode>PRODUCT_MASTER</ns1:ItemSourceCode>
<ns1:StateTransitionFlowName xsi:nil="true"/>
<ns1:StateTransitionFlowState>ACTIVE</ns1:StateTransitionFlowState>
<ns1:UserStatusCode xsi:nil="true"/>
<ns1:AssigneeType xsi:nil="true"/>
<ns1:AssigneeId xsi:nil="true"/>
<ns1:Assignee xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:AccessLevel>UPDATE</ns1:AccessLevel>
<ns1:TemplateFlag>false</ns1:TemplateFlag>
```

```
<ns1:BillingSalesrepId xsi:nil="true"/>
<ns1:BillingSalesrepName xsi:nil="true"/>
<ns1:VersionDescription xsi:nil="true"/>
<ns1:Comment xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:AdjustmentBasis xsi:nil="true"/>
<ns1:CommitmentAmount currencyCode="USD">0</ns1:CommitmentAmount>
<ns1:PricingCalendarId xsi:nil="true"/>
<ns1:PricingPeriodType xsi:nil="true"/>
<ns1:PricingCalendarName xsi:nil="true"/>
<ns1:DiscountPercent xsi:nil="true"/>
<ns1:PriceListName xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:WebServiceFlag xsi:nil="true"/>
<ns1:TermsTemplateId xsi:nil="true"/>
<ns1:ContractOwnerId xsi:nil="true"/>
<ns1:Status>Active</ns1:Status>
<ns1:AuthoringPartyMeaning xsi:nil="true"/>
<ns1:InvOrgName>Vision Operations</ns1:InvOrgName>
<ns1:Supplier/>
<ns1:SupplierSite xsi:nil="true"/>
<ns1:ShipInvOrg>Vision Operations</ns1:ShipInvOrg>
<ns1:RecvInvOrg/>
<ns1:Currency>US Dollar</ns1:Currency>
<ns1:UserStatusMeaning/>
<ns1:LegalEntityName>Vision Operations</ns1:LegalEntityName>
<ns1:ShipToOrgLocation/>
<ns1:ChrType xsi:nil="true"/>
<ns1:EnableElectronicSignFlag>false</ns1:EnableElectronicSignFlag>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:AllowCurrencyOverrideFlag xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:ContractTrueValue xsi:nil="true"/>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:PricingSegmentExplanation xsi:nil="true"/>
<ns1:PricingStrategyExplanation xsi:nil="true"/>
<ns1:SegmentExplanationMessageName xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:Subtotal xsi:nil="true"/>
<ns1:PricingStrategyId xsi:nil="true"/>
<ns1:PricingStrategyName xsi:nil="true"/>
<ns1:PricingSegmentCode xsi:nil="true"/>
<ns1:InvConversionRate xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PricingEffectivityDate/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:PeriodStartUsed xsi:nil="true"/>
<ns1:PeriodTypeUsed xsi:nil="true"/>
<ns1:InvoiceRuleName xsi:nil="true"/>
<ns1:AccountRuleName xsi:nil="true"/>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:PaymentTermId xsi:nil="true"/>
<ns1:PaymentTermName xsi:nil="true"/>
<ns1:CustomerPartyName>Computer Service and Rentals</ns1:CustomerPartyName>
<ns1:CustomerPartySiteName>Tempe (OPS)</ns1:CustomerPartySiteName>
<ns1:PeriodTypeMeaning xsi:nil="true"/>
<ns1:PeriodStartMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:ContractCreditedAmount xsi:nil="true"/>
<ns1:ContractInvoicedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:TermsTemplateName xsi:nil="true"/>
```

```
<ns1:DocumentSubType xsi:nil="true"/>
<ns1:RenewalType xsi:nil="true"/>
<ns1:UnderAmendVersionFlag xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:UnderMigrationFlag xsi:nil="true"/>
<ns1:ContractId>100100069434833</ns1:ContractId>
<ns1:CorpCurrencyCode xsi:nil="true"/>
<ns1:CurcyConvRateType xsi:nil="true"/>
<ns1:QuoteToContactId xsi:nil="true"/>
<ns1:QuoteToContact xsi:nil="true"/>
<ns1:NegotiationCommChannel xsi:nil="true"/>
<ns1:NegotiationCustomerAcceptance xsi:nil="true"/>
<ns1:NegotiationEnableNotification xsi:nil="true"/>
<ns1:NegotiationInternalApproval xsi:nil="true"/>
<ns1:NegotiationLanguage xsi:nil="true"/>
<ns1:QuoteToCopyToEmail xsi:nil="true"/>
<ns1:QuotePhone xsi:nil="true"/>
<ns1:QuoteFax xsi:nil="true"/>
<ns1:QuoteEmail xsi:nil="true"/>
<ns1:QuoteAddress xsi:nil="true"/>
<ns1:QuoteOrg xsi:nil="true"/>
<ns1:QuoteAccount xsi:nil="true"/>
<ns1:PrimarySalesrepId xsi:nil="true"/>
<ns1:PrimarySalesRepresentative xsi:nil="true"/>
<ns1:NegotiationContractLayoutTemplate xsi:nil="true"/>
<ns1:NegotiationTermsLayoutTemplate xsi:nil="true"/>
<ns1:TransactionTypeName xsi:nil="true"/>
<ns1:AutoSendForSignature xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:EsignTemplateId xsi:nil="true"/>
<ns1:NonStandardClauseCount>0</ns1:NonStandardClauseCount>
<ns1:ContractPuid>KHDR-208-1</ns1:ContractPuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:RunContractExpertFlag xsi:nil="true"/>
<ns1:IgnoreQAWarningsFlag xsi:nil="true"/>
<ns1:BaseContractYN>N</ns1:BaseContractYN>
<ns1:ContractHeaderFlexfieldVA>
<ns7:ContractId>100100069434833</ns7:ContractId>
<ns7:FLEX_PARAM_ContractId>100100069434833</ns7:FLEX_PARAM_ContractId>
<ns7:biHeaderCode xsi:nil="true"/>
<ns7:biHeaderDff2 xsi:nil="true"/>
<ns7:zokcDffGText xsi:nil="true"/>
<ns7:zokcDffGDate xsi:nil="true"/>
<ns7:testName xsi:nil="true"/>
<ns7:zREL9BI68 xsi:nil="true"/>
<ns7:biqa3Code xsi:nil="true"/>
<ns7:zokcDffGNumber xsi:nil="true"/>
<ns7:pjbContractHeader14 xsi:nil="true"/>
<ns7:pjbContractHeader15 xsi:nil="true"/>
<ns7:zokcContractIntent xsi:nil="true"/>
<ns7:zokcContractLine xsi:nil="true"/>
<ns7:zokcContractLine_Display xsi:nil="true"/>
<ns7:__FLEX_Context xsi:nil="true"/>
<ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns7:_FLEX_NumOfSegments>12</ns7:_FLEX_NumOfSegments>
</ns1:ContractHeaderFlexfieldVA>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>999990000010096</ns1:Id>
<ns1:PartyRoleCode>CUSTOMER</ns1:PartyRoleCode>
<ns1:Role>Customer</ns1:Role>
<ns1:PartyId>1006</ns1:PartyId>
<ns1:PartyName>Computer Service and Rentals</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
```

```
 <ns1:SignedBy>PSR</ns1:SignedBy>
 <ns1:SignedDate>2008-09-29</ns1:SignedDate>
 <ns1:SignerRole xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:DeleteFlag xsi:nil="true"/>
 <ns1:PartyRolePuid>PRTY-45-1</ns1:PartyRolePuid>
 <ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
 <ns1:Id>999990000031712</ns1:Id>
 <ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
 <ns1:Role>Customer contact</ns1:Role>
 <ns1:ContactId>302</ns1:ContactId>
 <ns1:OwnerFlag>false</ns1:OwnerFlag>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:AccessLevel xsi:nil="true"/>
 <ns1:AccessLevelName xsi:nil="true"/>
 <ns1:SignerYn xsi:nil="true"/>
 <ns1:PartyContactName xsi:nil="true"/>
 <ns1:SignerSequence xsi:nil="true"/>
 <ns1:RoutingSequence xsi:nil="true"/>
 <ns1:SignatureRole xsi:nil="true"/>
 <ns1:SignatureRoleMeaning xsi:nil="true"/>
 <ns1:ContactPuid>CNTC-2883</ns1:ContactPuid>
 <ns1:ContractPartyContactFlexfieldVA>
 <ns2:Id>999990000031712</ns2:Id>
 <ns2:MajorVersion>2</ns2:MajorVersion>
 <ns2:__FLEX_Context xsi:nil="true"/>
 <ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
 </ns1:ContractPartyContactFlexfieldVA>
 </ns1:ContractPartyContact>
 <ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
 <ns1:Id>999990000031713</ns1:Id>
 <ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
 <ns1:Role>Customer contact</ns1:Role>
 <ns1:ContactId>322</ns1:ContactId>
 <ns1:OwnerFlag>false</ns1:OwnerFlag>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:AccessLevel xsi:nil="true"/>
 <ns1:AccessLevelName xsi:nil="true"/>
 <ns1:SignerYn xsi:nil="true"/>
 <ns1:PartyContactName xsi:nil="true"/>
 <ns1:SignerSequence xsi:nil="true"/>
 <ns1:RoutingSequence xsi:nil="true"/>
 <ns1:SignatureRole xsi:nil="true"/>
 <ns1:SignatureRoleMeaning xsi:nil="true"/>
 <ns1:ContactPuid>CNTC-2884</ns1:ContactPuid>
 <ns1:ContractPartyContactFlexfieldVA>
 <ns2:Id>999990000031713</ns2:Id>
 <ns2:MajorVersion>2</ns2:MajorVersion>
 <ns2:__FLEX_Context xsi:nil="true"/>
 <ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
 </ns1:ContractPartyContactFlexfieldVA>
 </ns1:ContractPartyContact>
 <ns1:ContractPartyFlexfieldVA>
 <ns3:Id>999990000010096</ns3:Id>
 <ns3:MajorVersion>1</ns3:MajorVersion>
 <ns3:_Party__Location xsi:nil="true"/>
 <ns3:_Global__Segment__1 xsi:nil="true"/>
```

```
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010096</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen>CUSTOMER:OKX_PARTY:1006</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010096</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>KO</ns1:SourceLang>
<ns1:Cognomen>CUSTOMER:OKX_PARTY:1006</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010096</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen>CUSTOMER:OKX_PARTY:1006</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>999990000010095</ns1:Id>
<ns1:PartyRoleCode>SUPPLIER</ns1:PartyRoleCode>
<ns1:Role>Supplier</ns1:Role>
<ns1:PartyId>204</ns1:PartyId>
<ns1:PartyName>Vision Operations</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy>PSR</ns1:SignedBy>
<ns1:SignedDate>2008-09-29</ns1:SignedDate>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-44-1</ns1:PartyRolePuid>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>999990000010095</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010095</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen>VENDOR:OKX_OPERUNIT:204</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010095</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>KO</ns1:SourceLang>
<ns1:Cognomen>VENDOR:OKX_OPERUNIT:204</ns1:Cognomen>
```

```
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
 <ns1:ContractPartyTranslation>
 <ns1:Id>999990000010095</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Language>US</ns1:Language>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:Cognomen>VENDOR:OKX_OPERUNIT:204</ns1:Cognomen>
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
 </ns1:ContractParty>
 <ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
 <ns1:Id>999990000010097</ns1:Id>
 <ns1:PartyRoleCode>THIRD_PARTY</ns1:PartyRoleCode>
 <ns1:Role>Third party</ns1:Role>
 <ns1:PartyId>12463</ns1:PartyId>
 <ns1:PartyName>McKesson General Medical</ns1:PartyName>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:SignedBy>PSR</ns1:SignedBy>
 <ns1:SignedDate>2008-09-29</ns1:SignedDate>
 <ns1:SignerRole xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:DeleteFlag xsi:nil="true"/>
 <ns1:PartyRolePuid>PRTY-46-1</ns1:PartyRolePuid>
 <ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
 <ns1:Id>999990000031715</ns1:Id>
 <ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
 <ns1:Role>Customer contact</ns1:Role>
 <ns1:ContactId>118179</ns1:ContactId>
 <ns1:OwnerFlag>false</ns1:OwnerFlag>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:AccessLevel xsi:nil="true"/>
 <ns1:AccessLevelName xsi:nil="true"/>
 <ns1:SignerYn xsi:nil="true"/>
 <ns1:PartyContactName>Chester Paul</ns1:PartyContactName>
 <ns1:SignerSequence xsi:nil="true"/>
 <ns1:RoutingSequence xsi:nil="true"/>
 <ns1:SignatureRole xsi:nil="true"/>
 <ns1:SignatureRoleMeaning xsi:nil="true"/>
 <ns1:ContactPuid>CNTC-2882</ns1:ContactPuid>
 <ns1:ContractPartyContactFlexfieldVA>
 <ns2:Id>999990000031715</ns2:Id>
 <ns2:MajorVersion>2</ns2:MajorVersion>
 <ns2:__FLEX_Context xsi:nil="true"/>
 <ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
 </ns1:ContractPartyContactFlexfieldVA>
 </ns1:ContractPartyContact>
 <ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
 <ns1:Id>999990000031714</ns1:Id>
 <ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
 <ns1:Role>Customer contact</ns1:Role>
 <ns1:ContactId>56884</ns1:ContactId>
 <ns1:OwnerFlag>false</ns1:OwnerFlag>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:AccessLevel xsi:nil="true"/>
 <ns1:AccessLevelName xsi:nil="true"/>
 <ns1:SignerYn xsi:nil="true"/>
 <ns1:PartyContactName>John Wilson</ns1:PartyContactName>
```

```
<ns1:SignerSequence xsi:nil="true"/>
<ns1:RoutingSequence xsi:nil="true"/>
<ns1:SignatureRole xsi:nil="true"/>
<ns1:SignatureRoleMeaning xsi:nil="true"/>
<ns1:ContactPuid>CNTC-2885</ns1:ContactPuid>
<ns1:ContractPartyContactFlexfieldVA>
<ns2:Id>999990000031714</ns2:Id>
<ns2:MajorVersion>2</ns2:MajorVersion>
<ns2:__FLEX_Context xsi:nil="true"/>
<ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
</ns1:ContractPartyContactFlexfieldVA>
</ns1:ContractPartyContact>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>999990000010097</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010097</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen>THIRD_PARTY:OKX_PARTY:12463</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010097</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>KO</ns1:SourceLang>
<ns1:Cognomen>THIRD_PARTY:OKX_PARTY:12463</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010097</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen>THIRD_PARTY:OKX_PARTY:12463</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>999990000010098</ns1:Id>
<ns1:PartyRoleCode>THIRD_PARTY</ns1:PartyRoleCode>
<ns1:Role>Third party</ns1:Role>
<ns1:PartyId>14934</ns1:PartyId>
<ns1:PartyName>CV_SuppC01</ns1:PartyName>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:SignedBy>PSR</ns1:SignedBy>
<ns1:SignedDate>2008-09-29</ns1:SignedDate>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-47-1</ns1:PartyRolePuid>
<ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
<ns1:Id>999990000031716</ns1:Id>
<ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
<ns1:Role>Customer contact</ns1:Role>
```

```
 <ns1:ContactId>117518</ns1:ContactId>
 <ns1:OwnerFlag>false</ns1:OwnerFlag>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:AccessLevel xsi:nil="true"/>
 <ns1:AccessLevelName xsi:nil="true"/>
 <ns1:SignerYn xsi:nil="true"/>
 <ns1:PartyContactName>Norris, Ms. Bridget</ns1:PartyContactName>
 <ns1:SignerSequence xsi:nil="true"/>
 <ns1:RoutingSequence xsi:nil="true"/>
 <ns1:SignatureRole xsi:nil="true"/>
 <ns1:SignatureRoleMeaning xsi:nil="true"/>
 <ns1:ContactPuid>CNTC-2886</ns1:ContactPuid>
 <ns1:ContractPartyContactFlexfieldVA>
 <ns2:Id>999990000031716</ns2:Id>
 <ns2:MajorVersion>2</ns2:MajorVersion>
 <ns2:__FLEX_Context xsi:nil="true"/>
 <ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
 </ns1:ContractPartyContactFlexfieldVA>
 </ns1:ContractPartyContact>
 <ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
 <ns1:Id>999990000031717</ns1:Id>
 <ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
 <ns1:Role>Customer contact</ns1:Role>
 <ns1:ContactId>117518</ns1:ContactId>
 <ns1:OwnerFlag>false</ns1:OwnerFlag>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:AccessLevel xsi:nil="true"/>
 <ns1:AccessLevelName xsi:nil="true"/>
 <ns1:SignerYn xsi:nil="true"/>
 <ns1:PartyContactName>Norris, Ms. Bridget</ns1:PartyContactName>
 <ns1:SignerSequence xsi:nil="true"/>
 <ns1:RoutingSequence xsi:nil="true"/>
 <ns1:SignatureRole xsi:nil="true"/>
 <ns1:SignatureRoleMeaning xsi:nil="true"/>
 <ns1:ContactPuid>CNTC-2887</ns1:ContactPuid>
 <ns1:ContractPartyContactFlexfieldVA>
 <ns2:Id>999990000031717</ns2:Id>
 <ns2:MajorVersion>2</ns2:MajorVersion>
 <ns2:__FLEX_Context xsi:nil="true"/>
 <ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
 </ns1:ContractPartyContactFlexfieldVA>
 </ns1:ContractPartyContact>
 <ns1:ContractPartyFlexfieldVA>
 <ns3:Id>999990000010098</ns3:Id>
 <ns3:MajorVersion>1</ns3:MajorVersion>
 <ns3:_Party__Location xsi:nil="true"/>
 <ns3:_Global__Segment__1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
 </ns1:ContractPartyFlexfieldVA>
 <ns1:ContractPartyTranslation>
 <ns1:Id>999990000010098</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Language>IW</ns1:Language>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:Cognomen>THIRD_PARTY:OKX_PARTY:14934</ns1:Cognomen>
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
```

```
 <ns1:ContractPartyTranslation>
 <ns1:Id>999990000010098</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Language>KO</ns1:Language>
 <ns1:SourceLang>KO</ns1:SourceLang>
 <ns1:Cognomen>THIRD_PARTY:OKX_PARTY:14934</ns1:Cognomen>
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
 <ns1:ContractPartyTranslation>
 <ns1:Id>999990000010098</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Language>US</ns1:Language>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:Cognomen>THIRD_PARTY:OKX_PARTY:14934</ns1:Cognomen>
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
 </ns1:ContractParty>
 <ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
 <ns1:Id>999990000010099</ns1:Id>
 <ns1:PartyRoleCode>THIRD_PARTY</ns1:PartyRoleCode>
 <ns1:Role>Third party</ns1:Role>
 <ns1:PartyId>33435</ns1:PartyId>
 <ns1:PartyName>ACSYS Consultoria e Sistemas Ltda</ns1:PartyName>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:SignedBy>PSR</ns1:SignedBy>
 <ns1:SignedDate>2008-09-29</ns1:SignedDate>
 <ns1:SignerRole xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:DeleteFlag xsi:nil="true"/>
 <ns1:PartyRolePuid>PRTY-48-1</ns1:PartyRolePuid>
 <ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
 <ns1:Id>999990000031718</ns1:Id>
 <ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
 <ns1:Role>Customer contact</ns1:Role>
 <ns1:ContactId>117476</ns1:ContactId>
 <ns1:OwnerFlag>false</ns1:OwnerFlag>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:AccessLevel xsi:nil="true"/>
 <ns1:AccessLevelName xsi:nil="true"/>
 <ns1:SignerYn xsi:nil="true"/>
 <ns1:PartyContactName>Marcos Pinheiro</ns1:PartyContactName>
 <ns1:SignerSequence xsi:nil="true"/>
 <ns1:RoutingSequence xsi:nil="true"/>
 <ns1:SignatureRole xsi:nil="true"/>
 <ns1:SignatureRoleMeaning xsi:nil="true"/>
 <ns1:ContactPuid>CNTC-2888</ns1:ContactPuid>
 <ns1:ContractPartyContactFlexfieldVA>
 <ns2:Id>999990000031718</ns2:Id>
 <ns2:MajorVersion>2</ns2:MajorVersion>
 <ns2:__FLEX_Context xsi:nil="true"/>
 <ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
 </ns1:ContractPartyContactFlexfieldVA>
 </ns1:ContractPartyContact>
 <ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
 <ns1:Id>999990000031719</ns1:Id>
 <ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
 <ns1:Role>Customer contact</ns1:Role>
 <ns1:ContactId>118302</ns1:ContactId>
 <ns1:OwnerFlag>false</ns1:OwnerFlag>
 <ns1:MajorVersion>2</ns1:MajorVersion>
```

```
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:AccessLevel xsi:nil="true"/>
<ns1:AccessLevelName xsi:nil="true"/>
<ns1:SignerYn xsi:nil="true"/>
<ns1:PartyContactName>Marcos Pinheiro</ns1:PartyContactName>
<ns1:SignerSequence xsi:nil="true"/>
<ns1:RoutingSequence xsi:nil="true"/>
<ns1:SignatureRole xsi:nil="true"/>
<ns1:SignatureRoleMeaning xsi:nil="true"/>
<ns1:ContactPuid>CNTC-2889</ns1:ContactPuid>
<ns1:ContractPartyContactFlexfieldVA>
<ns2:Id>999990000031719</ns2:Id>
<ns2:MajorVersion>2</ns2:MajorVersion>
<ns2:__FLEX_Context xsi:nil="true"/>
<ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
</ns1:ContractPartyContactFlexfieldVA>
</ns1:ContractPartyContact>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>999990000010099</ns3:Id>
<ns3:MajorVersion>1</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010099</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen>THIRD_PARTY:OKX_PARTY:33435</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010099</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>KO</ns1:SourceLang>
<ns1:Cognomen>THIRD_PARTY:OKX_PARTY:33435</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010099</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen>THIRD_PARTY:OKX_PARTY:33435</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>ECM Contract : 999990000001443</ns1:Cognomen>
<ns1:Description>ECM Contract : 999990000001443</ns1:Description>
<ns1:Id>999990000001443</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription>ECM Contract : 999990000001443</ns1:ShortDescription>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>[ECM Contract : 999990000001443Ω'+++ '+++ '+++ '++Ø</ns1:Cognomen>
<ns1:Description>[ECM Contract : 9999900000001443Ω'+++ '+++ '+++ '++Ø</ns1:Description>
```

```
<ns1:Id>999990000001443</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription>[ECM Contract : 999990000001443Ω'+++ '+++ '+++ '++Ø</ns1:ShortDescription>
<ns1:SourceLang>KO</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>ECM Contract : 999990000001443</ns1:Cognomen>
<ns1:Description>ECM Contract : 999990000001443</ns1:Description>
<ns1:Id>999990000001443</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:ShortDescription>ECM Contract : 999990000001443</ns1:ShortDescription>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:RelatedDocument>
<ns1:Id>999990000191268</ns1:Id>
<ns1:RelationshipCode>RELATED_TO</ns1:RelationshipCode>
<ns1:Relationship>Related to</ns1:Relationship>
<ns1:RelatedContractId>999990000001447</ns1:RelatedContractId>
<ns1:ContractNumber>ECM Contract : 999990000001447</ns1:ContractNumber>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ContractId>100100069543752</ns1:ContractId>
<ns1:RelatedObjPuid>ROBJ-6041</ns1:RelatedObjPuid>
</ns1:RelatedDocument>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115390</ns1:Id>
<ns1:LineId>100100095844525</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
```

```
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
  <ns1:PriceDuringBillingYn xsi:nil="true"/>
  <ns1:BillingDateMethod xsi:nil="true"/>
  <ns1:SpecificDays xsi:nil="true"/>
  <ns1:GenerateBillingSchedule xsi:nil="true"/>
  <ns1:PriceAsOf xsi:nil="true"/>
  <ns1:CoverageScheduleId xsi:nil="true"/>
  <ns1:PaymentSetId xsi:nil="true"/>
  <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
  <ns1:StandaloneSellingPrice xsi:nil="true"/>
  <ns1:PriceApplicationRule xsi:nil="true"/>
  <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
  <ns1:LinePuid>LINE-10688-1</ns1:LinePuid>
```

```
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844525</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844525</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115390</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115390</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115390</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115480</ns1:Id>
<ns1:LineId>100100095844933</ns1:LineId>
```

```
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
```

```
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
```

```
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10701-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844933</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844933</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115480</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
```

```
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115480</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115480</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115470</ns1:Id>
<ns1:LineId>100100095844923</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
```

```
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
```

```
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
```

```
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10772-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844923</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844923</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115470</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115470</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115470</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
```

```
<ns1:Id>999990000115460</ns1:Id>
<ns1:LineId>100100095844914</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
```

```
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
```

```
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10764-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844914</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844914</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:Id>999990000115460</ns1:Id>
 <ns1:Language>IW</ns1:Language>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Comments xsi:nil="true"/>
 <ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
 <ns1:ItemName>f40000</ns1:ItemName>
```

```
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115460</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115460</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115450</ns1:Id>
<ns1:LineId>100100095844903</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
```

```
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
```

```
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
```

```
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10755-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844903</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844903</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115450</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115450</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115450</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
```

```
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115440</ns1:Id>
<ns1:LineId>100100095844769</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
```

```
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
```

```
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10746-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844769</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844769</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:Id>999990000115440</ns1:Id>
 <ns1:Language>IW</ns1:Language>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Comments xsi:nil="true"/>
```

```
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115440</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115440</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115430</ns1:Id>
<ns1:LineId>100100095844759</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
```

```
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
```

```
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
```

```
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10738-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844759</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844759</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115430</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115430</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115430</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
```

```
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115420</ns1:Id>
<ns1:LineId>100100095844749</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
```

```
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
```

```
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10729-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844749</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844749</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:Id>999990000115420</ns1:Id>
 <ns1:Language>IW</ns1:Language>
```

```
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115420</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115420</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115410</ns1:Id>
<ns1:LineId>100100095844545</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
```

```
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
```

```
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
```

```
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10720-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844545</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844545</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115410</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115410</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115410</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
```

```
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115400</ns1:Id>
<ns1:LineId>100100095844534</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
```

```
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
```

```
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10712-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844534</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844534</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
<ns1:Id>999990000115400</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115400</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115400</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115391</ns1:Id>
<ns1:LineId>100100095844526</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
```

```
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
```

```
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
```

```
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10686-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844526</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844526</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115391</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115391</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115391</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
```

```
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115481</ns1:Id>
<ns1:LineId>100100095844934</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
```

```
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
```

```
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10702-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844934</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844934</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
```

```
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115481</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115481</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115481</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115471</ns1:Id>
<ns1:LineId>100100095844924</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
```

```
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
```

```
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
```

```
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10773-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844924</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844924</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115471</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115471</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115471</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
```

```
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115461</ns1:Id>
<ns1:LineId>100100095844911</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
```

```
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
```

```
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-25038-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844911</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844911</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
```

```
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115461</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115461</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115461</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115451</ns1:Id>
<ns1:LineId>100100095844904</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
```

```
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
```

```
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
```

```
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10756-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844904</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844904</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115451</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115451</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115451</ns1:Id>
<ns1:Language>US</ns1:Language>
```

```
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115441</ns1:Id>
<ns1:LineId>100100095844794</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
```

```
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
```

```
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-25036-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844794</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844794</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
```

```
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115441</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115441</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115441</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115431</ns1:Id>
<ns1:LineId>100100095844760</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
```

```
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
```

```
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
```

```
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-25034-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844760</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844760</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115431</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115431</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
<ns1:Id>999990000115431</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115421</ns1:Id>
<ns1:LineId>100100095844750</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
```

```
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
```

```
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10730-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844750</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844750</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
```

```
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115421</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115421</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115421</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115411</ns1:Id>
<ns1:LineId>100100095844546</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
```

```
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
```

```
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
```

```
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-25032-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844546</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844546</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115411</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115411</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
```

```
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115411</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115401</ns1:Id>
<ns1:LineId>100100095844535</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
```

```
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
```

```
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10713-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844535</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844535</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
```

```
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115401</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115401</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115401</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115392</ns1:Id>
<ns1:LineId>100100095844527</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
```

```
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
```

```
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
```

```
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10689-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844527</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844527</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115392</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115392</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
```

```
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115392</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115482</ns1:Id>
<ns1:LineId>100100095844935</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
```

```
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
```

```
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
  <ns1:PriceDuringBillingYn xsi:nil="true"/>
  <ns1:BillingDateMethod xsi:nil="true"/>
  <ns1:SpecificDays xsi:nil="true"/>
  <ns1:GenerateBillingSchedule xsi:nil="true"/>
  <ns1:PriceAsOf xsi:nil="true"/>
  <ns1:CoverageScheduleId xsi:nil="true"/>
  <ns1:PaymentSetId xsi:nil="true"/>
  <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
  <ns1:StandaloneSellingPrice xsi:nil="true"/>
  <ns1:PriceApplicationRule xsi:nil="true"/>
  <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
  <ns1:LinePuid>LINE-10704-1</ns1:LinePuid>
  <ns1:SourceDocumentId xsi:nil="true"/>
  <ns1:SourceDocumentLineId xsi:nil="true"/>
  <ns1:SourceDocumentSystemCode xsi:nil="true"/>
  <ns1:ContractAllLineDesFlexVA>
  <ns4:LineId>100100095844935</ns4:LineId>
  <ns4:FLEX_PARAM_LineId>100100095844935</ns4:FLEX_PARAM_LineId>
  <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
  <ns4:biLineSegment1 xsi:nil="true"/>
  <ns4:biLineSegment2 xsi:nil="true"/>
  <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
  <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
  <ns4:pcChrgsNltplr xsi:nil="true"/>
```

```
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115482</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115482</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115482</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115472</ns1:Id>
<ns1:LineId>100100095844925</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
```

```
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
```

```
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
```

```
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-25029-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844925</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844925</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115472</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115472</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
```

```
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115472</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115462</ns1:Id>
<ns1:LineId>100100095844915</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
```

```
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
```

```
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10765-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844915</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844915</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
```

```
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115462</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115462</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115462</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115452</ns1:Id>
<ns1:LineId>100100095844905</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
```

```
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
```

```
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
```

```
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10757-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844905</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844905</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115452</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115452</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
```

```
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115452</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115442</ns1:Id>
<ns1:LineId>100100095844795</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
```

```
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10747-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844795</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844795</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
```

```
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115442</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115442</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115442</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115432</ns1:Id>
<ns1:LineId>100100095844761</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
```

```
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
```

```
  <ns1:LastRevenueRecogDate xsi:nil="true"/>
  <ns1:CustomerPONumber xsi:nil="true"/>
  <ns1:DeliveryDate xsi:nil="true"/>
  <ns1:SupplierId xsi:nil="true"/>
  <ns1:Supplier xsi:nil="true"/>
  <ns1:SupplierSiteId xsi:nil="true"/>
  <ns1:SupplierSiteName xsi:nil="true"/>
  <ns1:RecvInvOrgId xsi:nil="true"/>
  <ns1:RecInvOrgName xsi:nil="true"/>
  <ns1:RecvLocationId xsi:nil="true"/>
  <ns1:ShipToOrgLocation xsi:nil="true"/>
  <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
  <ns1:FOBCode xsi:nil="true"/>
  <ns1:FOB xsi:nil="true"/>
  <ns1:FreightTermsCode xsi:nil="true"/>
  <ns1:FreightTerms xsi:nil="true"/>
  <ns1:PaymentTermsId xsi:nil="true"/>
  <ns1:PaymentTerms xsi:nil="true"/>
  <ns1:PurchasingCategoryId xsi:nil="true"/>
  <ns1:PurchasingCategory xsi:nil="true"/>
  <ns1:CarrierId xsi:nil="true"/>
  <ns1:CarrierName xsi:nil="true"/>
  <ns1:VendorSiteId xsi:nil="true"/>
  <ns1:OrigSystemReference xsi:nil="true"/>
  <ns1:OrigSystemSourceCode xsi:nil="true"/>
  <ns1:Cognomen>ECM Contract</ns1:Cognomen>
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
```

```
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10739-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844761</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844761</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115432</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115432</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
```

```
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115432</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115422</ns1:Id>
<ns1:LineId>100100095844751</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
```

```
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10731-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844751</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844751</ns4:FLEX_PARAM_LineId>
```

```
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115422</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115422</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115422</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115412</ns1:Id>
<ns1:LineId>100100095844547</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
```

```
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
```

```
 <ns1:ExemptReasonCode xsi:nil="true"/>
 <ns1:ExemptReason xsi:nil="true"/>
 <ns1:LastRevenueRecogDate xsi:nil="true"/>
 <ns1:CustomerPONumber xsi:nil="true"/>
 <ns1:DeliveryDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
```

```
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10721-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844547</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844547</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115412</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115412</ns1:Id>
```

```
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115412</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115402</ns1:Id>
<ns1:LineId>100100095844536</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
```

```
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10714-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
```

```
<ns4:LineId>100100095844536</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844536</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115402</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115402</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115402</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115393</ns1:Id>
<ns1:LineId>100100095844524</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
```

```
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
```

```
 <ns1:TaxExemptionControlMeaning xsi:nil="true"/>
 <ns1:ExemptCertificateNumber xsi:nil="true"/>
 <ns1:ExemptReasonCode xsi:nil="true"/>
 <ns1:ExemptReason xsi:nil="true"/>
 <ns1:LastRevenueRecogDate xsi:nil="true"/>
 <ns1:CustomerPONumber xsi:nil="true"/>
 <ns1:DeliveryDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
```

```
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10687-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844524</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844524</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115393</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
```

```
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115393</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115393</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115483</ns1:Id>
<ns1:LineId>100100095844937</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
```

```
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
```

```
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10705-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
```

```
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844937</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844937</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115483</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115483</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115483</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115473</ns1:Id>
<ns1:LineId>100100095844926</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
```

```
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
```

```
 <ns1:OutputTaxClassMeaning xsi:nil="true"/>
 <ns1:TaxExemptionControl xsi:nil="true"/>
 <ns1:TaxExemptionControlMeaning xsi:nil="true"/>
 <ns1:ExemptCertificateNumber xsi:nil="true"/>
 <ns1:ExemptReasonCode xsi:nil="true"/>
 <ns1:ExemptReason xsi:nil="true"/>
 <ns1:LastRevenueRecogDate xsi:nil="true"/>
 <ns1:CustomerPONumber xsi:nil="true"/>
 <ns1:DeliveryDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
```

```
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10696-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844926</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844926</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115473</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
```

```
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115473</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115473</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115463</ns1:Id>
<ns1:LineId>100100095844916</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
```

```
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
  <ns1:PriceDuringBillingYn xsi:nil="true"/>
  <ns1:BillingDateMethod xsi:nil="true"/>
  <ns1:SpecificDays xsi:nil="true"/>
  <ns1:GenerateBillingSchedule xsi:nil="true"/>
  <ns1:PriceAsOf xsi:nil="true"/>
  <ns1:CoverageScheduleId xsi:nil="true"/>
  <ns1:PaymentSetId xsi:nil="true"/>
  <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
  <ns1:StandaloneSellingPrice xsi:nil="true"/>
  <ns1:PriceApplicationRule xsi:nil="true"/>
  <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
  <ns1:LinePuid>LINE-10766-1</ns1:LinePuid>
```

```
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844916</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844916</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115463</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115463</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115463</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115453</ns1:Id>
<ns1:LineId>100100095844906</ns1:LineId>
```

```
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
```

```
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
```

```
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10758-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844906</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844906</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115453</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
```

```
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115453</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115453</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115443</ns1:Id>
<ns1:LineId>100100095844796</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
```

```
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
```

```
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
```

```
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10748-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844796</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844796</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115443</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115443</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115443</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
```

```
<ns1:Id>999990000115433</ns1:Id>
<ns1:LineId>100100095844762</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
```

```
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
```

```
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10740-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844762</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844762</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:Id>999990000115433</ns1:Id>
 <ns1:Language>IW</ns1:Language>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Comments xsi:nil="true"/>
 <ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
 <ns1:ItemName>AS54888</ns1:ItemName>
```

```
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115433</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115433</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115423</ns1:Id>
<ns1:LineId>100100095844752</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
```

```
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
```

```
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
```

```
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10728-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844752</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844752</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115423</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115423</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115423</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
```

```
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115413</ns1:Id>
<ns1:LineId>100100095844544</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
```

```
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
```

```
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10722-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844544</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844544</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:Id>999990000115413</ns1:Id>
 <ns1:Language>IW</ns1:Language>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Comments xsi:nil="true"/>
```

```
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115413</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115413</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115403</ns1:Id>
<ns1:LineId>100100095844537</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
```

```
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
```

```
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
```

```
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10711-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844537</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844537</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115403</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115403</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115403</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
```

```
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115394</ns1:Id>
<ns1:LineId>100100095844528</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
```

```
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
```

```
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10690-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844528</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844528</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:Id>999990000115394</ns1:Id>
 <ns1:Language>IW</ns1:Language>
```

```
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115394</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115394</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115484</ns1:Id>
<ns1:LineId>100100095844938</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
```

```
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
```

```
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
```

```
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10706-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844938</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844938</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115484</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115484</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115484</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
```

```
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115474</ns1:Id>
<ns1:LineId>100100095844927</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
```

```
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
```

```
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10697-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844927</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844927</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
<ns1:Id>999990000115474</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115474</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115474</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115464</ns1:Id>
<ns1:LineId>100100095844917</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
```

```
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
```

```
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
```

```
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10767-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844917</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844917</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115464</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115464</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115464</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
```

```
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115454</ns1:Id>
<ns1:LineId>100100095844907</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
```

```
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
```

```
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10759-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844907</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844907</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
```

```
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115454</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115454</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115454</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115444</ns1:Id>
<ns1:LineId>100100095844797</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
```

```
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
```

```
  <ns1:FreightTermsCode xsi:nil="true"/>
  <ns1:FreightTerms xsi:nil="true"/>
  <ns1:PaymentTermsId xsi:nil="true"/>
  <ns1:PaymentTerms xsi:nil="true"/>
  <ns1:PurchasingCategoryId xsi:nil="true"/>
  <ns1:PurchasingCategory xsi:nil="true"/>
  <ns1:CarrierId xsi:nil="true"/>
  <ns1:CarrierName xsi:nil="true"/>
  <ns1:VendorSiteId xsi:nil="true"/>
  <ns1:OrigSystemReference xsi:nil="true"/>
  <ns1:OrigSystemSourceCode xsi:nil="true"/>
  <ns1:Cognomen>ECM Contract</ns1:Cognomen>
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
```

```
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10749-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844797</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844797</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115444</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115444</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115444</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
```

```
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115434</ns1:Id>
<ns1:LineId>100100095844763</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
```

```
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
```

```
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10741-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844763</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844763</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
```

```
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115434</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115434</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115434</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115424</ns1:Id>
<ns1:LineId>100100095844753</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
```

```
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
```

```
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
```

```
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10732-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844753</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844753</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115424</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115424</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115424</ns1:Id>
<ns1:Language>US</ns1:Language>
```

```
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115414</ns1:Id>
<ns1:LineId>100100095844548</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
```

```
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
```

```
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10723-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844548</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844548</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
```

```
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115414</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115414</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115414</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115404</ns1:Id>
<ns1:LineId>100100095844538</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
```

```
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
```

```
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
```

```
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10715-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844538</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844538</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115404</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115404</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
<ns1:Id>999990000115404</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115395</ns1:Id>
<ns1:LineId>100100095844529</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
```

```
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
```

```
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10691-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844529</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844529</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
```

```
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115395</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115395</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115395</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115485</ns1:Id>
<ns1:LineId>100100095844939</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
```

```
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
```

```
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
```

```
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10703-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844939</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844939</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115485</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115485</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
```

```
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115485</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115475</ns1:Id>
<ns1:LineId>100100095844928</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
```

```
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
```

```
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10695-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844928</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844928</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
```

```
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115475</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115475</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115475</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115465</ns1:Id>
<ns1:LineId>100100095844918</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
```

```
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
```

```
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
```

```
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10768-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844918</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844918</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115465</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115465</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
```

```
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115465</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115455</ns1:Id>
<ns1:LineId>100100095844908</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
```

```
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
```

```
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
  <ns1:PriceDuringBillingYn xsi:nil="true"/>
  <ns1:BillingDateMethod xsi:nil="true"/>
  <ns1:SpecificDays xsi:nil="true"/>
  <ns1:GenerateBillingSchedule xsi:nil="true"/>
  <ns1:PriceAsOf xsi:nil="true"/>
  <ns1:CoverageScheduleId xsi:nil="true"/>
  <ns1:PaymentSetId xsi:nil="true"/>
  <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
  <ns1:StandaloneSellingPrice xsi:nil="true"/>
  <ns1:PriceApplicationRule xsi:nil="true"/>
  <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
  <ns1:LinePuid>LINE-10760-1</ns1:LinePuid>
  <ns1:SourceDocumentId xsi:nil="true"/>
  <ns1:SourceDocumentLineId xsi:nil="true"/>
  <ns1:SourceDocumentSystemCode xsi:nil="true"/>
  <ns1:ContractAllLineDesFlexVA>
  <ns4:LineId>100100095844908</ns4:LineId>
  <ns4:FLEX_PARAM_LineId>100100095844908</ns4:FLEX_PARAM_LineId>
  <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
  <ns4:biLineSegment1 xsi:nil="true"/>
  <ns4:biLineSegment2 xsi:nil="true"/>
  <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
  <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
  <ns4:pcChrgsNltplr xsi:nil="true"/>
```

```
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115455</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115455</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115455</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115445</ns1:Id>
<ns1:LineId>100100095844798</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
```

```
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
```

```
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
```

```
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10751-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844798</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844798</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115445</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115445</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
```

```
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115445</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115435</ns1:Id>
<ns1:LineId>100100095844765</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
```

```
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
```

```
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10742-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844765</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844765</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
```

```
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115435</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115435</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115435</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115425</ns1:Id>
<ns1:LineId>100100095844754</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
```

```
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
```

```
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
```

```
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10733-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844754</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844754</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115425</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115425</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
```

```
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115425</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115415</ns1:Id>
<ns1:LineId>100100095844549</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
```

```
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10724-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844549</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844549</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
```

```
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115415</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115415</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115415</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115405</ns1:Id>
<ns1:LineId>100100095844539</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
```

```
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
```

```
  <ns1:LastRevenueRecogDate xsi:nil="true"/>
  <ns1:CustomerPONumber xsi:nil="true"/>
  <ns1:DeliveryDate xsi:nil="true"/>
  <ns1:SupplierId xsi:nil="true"/>
  <ns1:Supplier xsi:nil="true"/>
  <ns1:SupplierSiteId xsi:nil="true"/>
  <ns1:SupplierSiteName xsi:nil="true"/>
  <ns1:RecvInvOrgId xsi:nil="true"/>
  <ns1:RecInvOrgName xsi:nil="true"/>
  <ns1:RecvLocationId xsi:nil="true"/>
  <ns1:ShipToOrgLocation xsi:nil="true"/>
  <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
  <ns1:FOBCode xsi:nil="true"/>
  <ns1:FOB xsi:nil="true"/>
  <ns1:FreightTermsCode xsi:nil="true"/>
  <ns1:FreightTerms xsi:nil="true"/>
  <ns1:PaymentTermsId xsi:nil="true"/>
  <ns1:PaymentTerms xsi:nil="true"/>
  <ns1:PurchasingCategoryId xsi:nil="true"/>
  <ns1:PurchasingCategory xsi:nil="true"/>
  <ns1:CarrierId xsi:nil="true"/>
  <ns1:CarrierName xsi:nil="true"/>
  <ns1:VendorSiteId xsi:nil="true"/>
  <ns1:OrigSystemReference xsi:nil="true"/>
  <ns1:OrigSystemSourceCode xsi:nil="true"/>
  <ns1:Cognomen>ECM Contract</ns1:Cognomen>
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
```

```
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10716-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844539</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844539</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115405</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115405</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
```

```
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115405</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115396</ns1:Id>
<ns1:LineId>100100095844530</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
```

```
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-25028-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844530</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844530</ns4:FLEX_PARAM_LineId>
```

```
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115396</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115396</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115396</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115486</ns1:Id>
<ns1:LineId>100100095844936</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
```

```
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
```

```
 <ns1:ExemptReasonCode xsi:nil="true"/>
 <ns1:ExemptReason xsi:nil="true"/>
 <ns1:LastRevenueRecogDate xsi:nil="true"/>
 <ns1:CustomerPONumber xsi:nil="true"/>
 <ns1:DeliveryDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
```

```
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10707-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844936</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844936</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115486</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115486</ns1:Id>
```

```
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115486</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115476</ns1:Id>
<ns1:LineId>100100095844929</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
```

```
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10698-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
```

```
<ns4:LineId>100100095844929</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844929</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115476</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115476</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115476</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115466</ns1:Id>
<ns1:LineId>100100095844919</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
```

```
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
```

```
 <ns1:TaxExemptionControlMeaning xsi:nil="true"/>
 <ns1:ExemptCertificateNumber xsi:nil="true"/>
 <ns1:ExemptReasonCode xsi:nil="true"/>
 <ns1:ExemptReason xsi:nil="true"/>
 <ns1:LastRevenueRecogDate xsi:nil="true"/>
 <ns1:CustomerPONumber xsi:nil="true"/>
 <ns1:DeliveryDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
```

```
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-25039-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844919</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844919</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115466</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
```

```
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115466</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115466</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115456</ns1:Id>
<ns1:LineId>100100095844909</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
```

```
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
```

```
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-25037-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
```

```
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844909</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844909</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115456</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115456</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115456</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115446</ns1:Id>
<ns1:LineId>100100095844900</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
```

```
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
```

```
 <ns1:OutputTaxClassMeaning xsi:nil="true"/>
 <ns1:TaxExemptionControl xsi:nil="true"/>
 <ns1:TaxExemptionControlMeaning xsi:nil="true"/>
 <ns1:ExemptCertificateNumber xsi:nil="true"/>
 <ns1:ExemptReasonCode xsi:nil="true"/>
 <ns1:ExemptReason xsi:nil="true"/>
 <ns1:LastRevenueRecogDate xsi:nil="true"/>
 <ns1:CustomerPONumber xsi:nil="true"/>
 <ns1:DeliveryDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
```

```
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10752-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844900</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844900</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115446</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
```

```
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115446</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115446</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115436</ns1:Id>
<ns1:LineId>100100095844766</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
```

```
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
  <ns1:PriceDuringBillingYn xsi:nil="true"/>
  <ns1:BillingDateMethod xsi:nil="true"/>
  <ns1:SpecificDays xsi:nil="true"/>
  <ns1:GenerateBillingSchedule xsi:nil="true"/>
  <ns1:PriceAsOf xsi:nil="true"/>
  <ns1:CoverageScheduleId xsi:nil="true"/>
  <ns1:PaymentSetId xsi:nil="true"/>
  <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
  <ns1:StandaloneSellingPrice xsi:nil="true"/>
  <ns1:PriceApplicationRule xsi:nil="true"/>
  <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
  <ns1:LinePuid>LINE-25035-1</ns1:LinePuid>
```

```
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844766</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844766</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115436</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115436</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115436</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115426</ns1:Id>
<ns1:LineId>100100095844755</ns1:LineId>
```

```
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
```

```
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
```

```
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10734-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844755</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844755</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115426</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
```

```
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115426</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115426</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115416</ns1:Id>
<ns1:LineId>100100095844550</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
```

```
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
```

```
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
```

```
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-25033-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844550</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844550</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115416</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115416</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115416</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
```

```
<ns1:Id>999990000115406</ns1:Id>
<ns1:LineId>100100095844540</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
```

```
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
```

```
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-25031-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844540</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844540</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:Id>999990000115406</ns1:Id>
 <ns1:Language>IW</ns1:Language>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Comments xsi:nil="true"/>
 <ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
 <ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
```

```
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115406</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115406</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115397</ns1:Id>
<ns1:LineId>100100095844531</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
```

```
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
```

```
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
```

```
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10692-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844531</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844531</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115397</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115397</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115397</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
```

```
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115487</ns1:Id>
<ns1:LineId>100100095844940</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
```

```
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
```

```
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10708-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844940</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844940</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:Id>999990000115487</ns1:Id>
 <ns1:Language>IW</ns1:Language>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:Comments xsi:nil="true"/>
```

```
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115487</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115487</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115477</ns1:Id>
<ns1:LineId>100100095844930</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
```

```
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
```

```
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
```

```
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10699-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844930</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844930</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115477</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115477</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115477</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
```

```
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115467</ns1:Id>
<ns1:LineId>100100095844920</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
```

```
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
```

```
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10769-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844920</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844920</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115467</ns1:Id>
<ns1:Language>IW</ns1:Language>
```

```
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115467</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115467</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115457</ns1:Id>
<ns1:LineId>100100095844910</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
```

```
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
```

```
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
```

```
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10761-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844910</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844910</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115457</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115457</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115457</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
```

```
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115447</ns1:Id>
<ns1:LineId>100100095844901</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
```

```
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
```

```
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10753-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844901</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844901</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
<ns1:Id>999990000115447</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115447</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115447</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115437</ns1:Id>
<ns1:LineId>100100095844767</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
```

```
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
```

```
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
```

```
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10743-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844767</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844767</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115437</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115437</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115437</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
```

```
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115427</ns1:Id>
<ns1:LineId>100100095844756</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
```

```
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
```

```
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10735-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844756</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844756</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
```

```
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115427</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115427</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115427</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115417</ns1:Id>
<ns1:LineId>100100095844551</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
```

```
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
```

```
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
```

```
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10725-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844551</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844551</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115417</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115417</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115417</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
```

```
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115407</ns1:Id>
<ns1:LineId>100100095844541</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
```

```
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
```

```
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10717-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844541</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844541</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
```

```
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115407</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115407</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115407</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115398</ns1:Id>
<ns1:LineId>100100095844532</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
```

```
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
```

```
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
```

```
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10693-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844532</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844532</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115398</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115398</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115398</ns1:Id>
<ns1:Language>US</ns1:Language>
```

```
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115488</ns1:Id>
<ns1:LineId>100100095844941</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
```

```
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
```

```
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10709-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844941</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844941</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
```

```
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115488</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115488</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115488</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115478</ns1:Id>
<ns1:LineId>100100095844931</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
```

```
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
```

```
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
```

```
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-25030-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844931</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844931</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115478</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115478</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
<ns1:Id>999990000115478</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115468</ns1:Id>
<ns1:LineId>100100095844921</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
```

```
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
```

```
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10770-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844921</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844921</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
```

```
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115468</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115468</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115468</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115458</ns1:Id>
<ns1:LineId>100100095844912</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
```

```
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
```

```
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
```

```
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10762-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844912</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844912</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115458</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115458</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
```

```
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115458</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115448</ns1:Id>
<ns1:LineId>100100095844902</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
```

```
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
```

```
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10750-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844902</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844902</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
```

```
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115448</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115448</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115448</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115438</ns1:Id>
<ns1:LineId>100100095844764</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
```

```
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
```

```
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
```

```
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10744-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>10010095844764</ns4:LineId>
<ns4:FLEX_PARAM_LineId>10010095844764</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115438</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115438</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
```

```
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115438</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115428</ns1:Id>
<ns1:LineId>100100095844757</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
```

```
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
```

```
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
  <ns1:PriceDuringBillingYn xsi:nil="true"/>
  <ns1:BillingDateMethod xsi:nil="true"/>
  <ns1:SpecificDays xsi:nil="true"/>
  <ns1:GenerateBillingSchedule xsi:nil="true"/>
  <ns1:PriceAsOf xsi:nil="true"/>
  <ns1:CoverageScheduleId xsi:nil="true"/>
  <ns1:PaymentSetId xsi:nil="true"/>
  <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
  <ns1:StandaloneSellingPrice xsi:nil="true"/>
  <ns1:PriceApplicationRule xsi:nil="true"/>
  <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
  <ns1:LinePuid>LINE-10736-1</ns1:LinePuid>
  <ns1:SourceDocumentId xsi:nil="true"/>
  <ns1:SourceDocumentLineId xsi:nil="true"/>
  <ns1:SourceDocumentSystemCode xsi:nil="true"/>
  <ns1:ContractAllLineDesFlexVA>
  <ns4:LineId>100100095844757</ns4:LineId>
  <ns4:FLEX_PARAM_LineId>100100095844757</ns4:FLEX_PARAM_LineId>
  <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
  <ns4:biLineSegment1 xsi:nil="true"/>
  <ns4:biLineSegment2 xsi:nil="true"/>
  <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
  <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
  <ns4:pcChrgsNltplr xsi:nil="true"/>
```

```
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115428</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115428</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115428</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115418</ns1:Id>
<ns1:LineId>100100095844747</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
```

```
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
```

```
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
```

```
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10726-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844747</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844747</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115418</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115418</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
```

```
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115418</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115408</ns1:Id>
<ns1:LineId>100100095844542</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
```

```
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
```

```
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10718-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844542</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844542</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
```

```
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115408</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115408</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115408</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115399</ns1:Id>
<ns1:LineId>100100095844533</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
```

```
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
```

```
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
```

```
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10694-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844533</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844533</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115399</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115399</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
```

```
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115399</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115409</ns1:Id>
<ns1:LineId>100100095844543</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
```

```
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10719-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844543</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844543</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
```

```
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115409</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115409</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115409</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115419</ns1:Id>
<ns1:LineId>100100095844748</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
```

```
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
```

```
  <ns1:LastRevenueRecogDate xsi:nil="true"/>
  <ns1:CustomerPONumber xsi:nil="true"/>
  <ns1:DeliveryDate xsi:nil="true"/>
  <ns1:SupplierId xsi:nil="true"/>
  <ns1:Supplier xsi:nil="true"/>
  <ns1:SupplierSiteId xsi:nil="true"/>
  <ns1:SupplierSiteName xsi:nil="true"/>
  <ns1:RecvInvOrgId xsi:nil="true"/>
  <ns1:RecInvOrgName xsi:nil="true"/>
  <ns1:RecvLocationId xsi:nil="true"/>
  <ns1:ShipToOrgLocation xsi:nil="true"/>
  <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
  <ns1:FOBCode xsi:nil="true"/>
  <ns1:FOB xsi:nil="true"/>
  <ns1:FreightTermsCode xsi:nil="true"/>
  <ns1:FreightTerms xsi:nil="true"/>
  <ns1:PaymentTermsId xsi:nil="true"/>
  <ns1:PaymentTerms xsi:nil="true"/>
  <ns1:PurchasingCategoryId xsi:nil="true"/>
  <ns1:PurchasingCategory xsi:nil="true"/>
  <ns1:CarrierId xsi:nil="true"/>
  <ns1:CarrierName xsi:nil="true"/>
  <ns1:VendorSiteId xsi:nil="true"/>
  <ns1:OrigSystemReference xsi:nil="true"/>
  <ns1:OrigSystemSourceCode xsi:nil="true"/>
  <ns1:Cognomen>ECM Contract</ns1:Cognomen>
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
```

```
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10727-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844748</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844748</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115419</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115419</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
```

```
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115419</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115429</ns1:Id>
<ns1:LineId>100100095844758</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
```

```
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10737-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844758</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844758</ns4:FLEX_PARAM_LineId>
```

```
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115429</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115429</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115429</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115439</ns1:Id>
<ns1:LineId>100100095844768</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
```

```
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
```

```
 <ns1:ExemptReasonCode xsi:nil="true"/>
 <ns1:ExemptReason xsi:nil="true"/>
 <ns1:LastRevenueRecogDate xsi:nil="true"/>
 <ns1:CustomerPONumber xsi:nil="true"/>
 <ns1:DeliveryDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
```

```
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10745-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844768</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844768</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115439</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115439</ns1:Id>
```

```
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115439</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115449</ns1:Id>
<ns1:LineId>100100095844897</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
```

```
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10754-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
```

```
<ns4:LineId>100100095844897</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844897</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115449</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115449</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115449</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115459</ns1:Id>
<ns1:LineId>100100095844913</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
```

```
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
```

```
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
```

```
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10763-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844913</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844913</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115459</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
```

```
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115459</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115459</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115469</ns1:Id>
<ns1:LineId>100100095844922</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
```

```
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
```

```
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10771-1</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
```

```
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844922</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844922</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115469</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115469</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115469</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115479</ns1:Id>
<ns1:LineId>100100095844932</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
```

```
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
```

```
 <ns1:OutputTaxClassMeaning xsi:nil="true"/>
 <ns1:TaxExemptionControl xsi:nil="true"/>
 <ns1:TaxExemptionControlMeaning xsi:nil="true"/>
 <ns1:ExemptCertificateNumber xsi:nil="true"/>
 <ns1:ExemptReasonCode xsi:nil="true"/>
 <ns1:ExemptReason xsi:nil="true"/>
 <ns1:LastRevenueRecogDate xsi:nil="true"/>
 <ns1:CustomerPONumber xsi:nil="true"/>
 <ns1:DeliveryDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
```

```
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10700-1</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844932</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844932</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115479</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
```

```
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115479</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115479</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115489</ns1:Id>
<ns1:LineId>100100095844942</ns1:LineId>
<ns1:VersionType>H</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-08-06</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
```

```
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity unitCode="DY">366</ns1:DurationQuantity>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>324</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
  <ns1:PriceDuringBillingYn xsi:nil="true"/>
  <ns1:BillingDateMethod xsi:nil="true"/>
  <ns1:SpecificDays xsi:nil="true"/>
  <ns1:GenerateBillingSchedule xsi:nil="true"/>
  <ns1:PriceAsOf xsi:nil="true"/>
  <ns1:CoverageScheduleId xsi:nil="true"/>
  <ns1:PaymentSetId xsi:nil="true"/>
  <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
  <ns1:StandaloneSellingPrice xsi:nil="true"/>
  <ns1:PriceApplicationRule xsi:nil="true"/>
  <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
  <ns1:LinePuid>LINE-10710-1</ns1:LinePuid>
```

```
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844942</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844942</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115489</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115489</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115489</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:SalesCredit>
<ns1:Id>999990000046800</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Percent>20</ns1:Percent>
```

```
<ns1:SalesrepId>100000008143166</ns1:SalesrepId>
<ns1:SalesCreditTypeId>1</ns1:SalesCreditTypeId>
<ns1:ActiveFlag>true</ns1:ActiveFlag>
<ns1:SalesrepName>Caroline Snel</ns1:SalesrepName>
<ns1:StartDate xsi:nil="true"/>
<ns1:EndDate xsi:nil="true"/>
<ns1:ExternalSourceKey xsi:nil="true"/>
<ns1:ExternalReferenceKey xsi:nil="true"/>
<ns1:SalesCreditType>Quota Sales Credit</ns1:SalesCreditType>
<ns1:SalesCreditPuid>SCRD-41-1</ns1:SalesCreditPuid>
</ns1:SalesCredit>
<ns1:SalesCredit>
<ns1:Id>999990000046801</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Percent>20</ns1:Percent>
<ns1:SalesrepId>100000008143167</ns1:SalesrepId>
<ns1:SalesCreditTypeId>1</ns1:SalesCreditTypeId>
<ns1:ActiveFlag>true</ns1:ActiveFlag>
<ns1:SalesrepName>Lieke Spundel</ns1:SalesrepName>
<ns1:StartDate xsi:nil="true"/>
<ns1:EndDate xsi:nil="true"/>
<ns1:ExternalSourceKey xsi:nil="true"/>
<ns1:ExternalReferenceKey xsi:nil="true"/>
<ns1:SalesCreditType>Quota Sales Credit</ns1:SalesCreditType>
<ns1:SalesCreditPuid>SCRD-42-1</ns1:SalesCreditPuid>
</ns1:SalesCredit>
<ns1:SalesCredit>
<ns1:Id>999990000046802</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Percent>20</ns1:Percent>
<ns1:SalesrepId>100000008143168</ns1:SalesrepId>
<ns1:SalesCreditTypeId>1</ns1:SalesCreditTypeId>
<ns1:ActiveFlag>true</ns1:ActiveFlag>
<ns1:SalesrepName>Jacki Williams</ns1:SalesrepName>
<ns1:StartDate xsi:nil="true"/>
<ns1:EndDate xsi:nil="true"/>
<ns1:ExternalSourceKey xsi:nil="true"/>
<ns1:ExternalReferenceKey xsi:nil="true"/>
<ns1:SalesCreditType>Quota Sales Credit</ns1:SalesCreditType>
<ns1:SalesCreditPuid>SCRD-43-1</ns1:SalesCreditPuid>
</ns1:SalesCredit>
<ns1:SalesCredit>
<ns1:Id>999990000046803</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Percent>20</ns1:Percent>
<ns1:SalesrepId>100000008143169</ns1:SalesrepId>
<ns1:SalesCreditTypeId>1</ns1:SalesCreditTypeId>
<ns1:ActiveFlag>true</ns1:ActiveFlag>
<ns1:SalesrepName>Rhonda Swanson</ns1:SalesrepName>
<ns1:StartDate xsi:nil="true"/>
<ns1:EndDate xsi:nil="true"/>
<ns1:ExternalSourceKey xsi:nil="true"/>
<ns1:ExternalReferenceKey xsi:nil="true"/>
<ns1:SalesCreditType>Quota Sales Credit</ns1:SalesCreditType>
<ns1:SalesCreditPuid>SCRD-44-1</ns1:SalesCreditPuid>
</ns1:SalesCredit>
<ns1:SalesCredit>
<ns1:Id>999990000046804</ns1:Id>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:Percent>20</ns1:Percent>
<ns1:SalesrepId>100000008143170</ns1:SalesrepId>
<ns1:SalesCreditTypeId>1</ns1:SalesCreditTypeId>
<ns1:ActiveFlag>true</ns1:ActiveFlag>
<ns1:SalesrepName>Mike Lamprecht</ns1:SalesrepName>
<ns1:StartDate xsi:nil="true"/>
<ns1:EndDate xsi:nil="true"/>
```

```
<ns1:ExternalSourceKey xsi:nil="true"/>
<ns1:ExternalReferenceKey xsi:nil="true"/>
<ns1:SalesCreditType>Quota Sales Credit</ns1:SalesCreditType>
<ns1:SalesCreditPuid>SCRD-45-1</ns1:SalesCreditPuid>
</ns1:SalesCredit>
<ns1:BillPlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>200000000000288</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>100000001</ns5:BillMethodId>
<ns5:BillMethodName>Time and Material BRBR Inv PSR</ns5:BillMethodName>
<ns5:BillPlanName>Invoice Plan - TM BRBR</ns5:BillPlanName>
<ns5:InvoiceCurrencyOptCode>CONTRACT</ns5:InvoiceCurrencyOptCode>
<ns5:BillingCurrencyType>Contract</ns5:BillingCurrencyType>
<ns5:PaymentTermsId>1000</ns5:PaymentTermsId>
<ns5:PaymentTerms>2/10, Net 30</ns5:PaymentTerms>
<ns5:BillSetNumber>1</ns5:BillSetNumber>
<ns5:BillToCustomerAccountId>1001</ns5:BillToCustomerAccountId>
<ns5:BillToAccountNumber>1001</ns5:BillToAccountNumber>
<ns5:BillToSiteUseId>1006</ns5:BillToSiteUseId>
<ns5:BillToSite>New York (OPS)</ns5:BillToSite>
<ns5:BillToContactId>1009</ns5:BillToContactId>
<ns5:BillToContactName>Mike Kenton</ns5:BillToContactName>
<ns5:BillToContactEmail>sendmail-test-discard@oracle.com</ns5:BillToContactEmail>
<ns5:BillingCycleId>1000000000001</ns5:BillingCycleId>
<ns5:BillingCycle xsi:nil="true"/>
<ns5:LaborInvoiceFormatId>100000010695006</ns5:LaborInvoiceFormatId>
<ns5:LaborInvoiceFormat>Time and Material</ns5:LaborInvoiceFormat>
<ns5:NlInvoiceFormatId>100000011410001</ns5:NlInvoiceFormatId>
<ns5:NonlaborInvoiceFormat>NL Work Site Exp Cat Format</ns5:NonlaborInvoiceFormat>
<ns5:EventsInvoiceFormatId>100000011407004</ns5:EventsInvoiceFormatId>
<ns5:EventInvoiceFormat>Event Type Format</ns5:EventInvoiceFormat>
<ns5:FirstBillingOffsetDays>7</ns5:FirstBillingOffsetDays>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:PersonBillRateSchId>1228</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId>1229</ns5:JobBillRateSchId>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag>false</ns5:EnableLbrBillXtnsnFlag>
<ns5:NlBillRateSchId>1231</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag>false</ns5:EnableNlBillXtnsnFlag>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:InvoiceCurrencyDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyExchgDate xsi:nil="true"/>
<ns5:InvoiceCurrencyRateType xsi:nil="true"/>
```

```
<ns5:InvoiceCurrencyConversionRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyCode xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:DocumentNumber xsi:nil="true"/>
<ns5:LocFlag xsi:nil="true"/>
<ns5:ReportTypeCode xsi:nil="true"/>
<ns5:FederalInvoiceFormat xsi:nil="true"/>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>200000000000288</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>Invoice Plan - TM BRBR</ns5:BillPlanName>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>200000000000288</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>[Invoice Plan - TM BRBRΩ'+Ø</ns5:BillPlanName>
<ns5:InvoiceComment>[Trial InvoiceΩ'+++Ø</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>KO</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>200000000000288</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>Invoice Plan - TM BRBR</ns5:BillPlanName>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanDescriptiveFlexField>
<ns8:BillPlanId>200000000000288</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:BillPlanDescriptiveFlexField>
</ns1:BillPlan>
<ns1:BillPlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>200000000000290</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>100000005</ns5:BillMethodId>
<ns5:BillMethodName>Fixed Price Inv PSR</ns5:BillMethodName>
<ns5:BillPlanName>Invoice Plan - FP</ns5:BillPlanName>
<ns5:InvoiceCurrencyOptCode>CONTRACT</ns5:InvoiceCurrencyOptCode>
<ns5:BillingCurrencyType>Contract</ns5:BillingCurrencyType>
<ns5:PaymentTermsId>1000</ns5:PaymentTermsId>
<ns5:PaymentTerms>2/10, Net 30</ns5:PaymentTerms>
<ns5:BillSetNumber>1</ns5:BillSetNumber>
<ns5:BillToCustomerAccountId>1001</ns5:BillToCustomerAccountId>
<ns5:BillToAccountNumber>1001</ns5:BillToAccountNumber>
<ns5:BillToSiteUseId>1006</ns5:BillToSiteUseId>
<ns5:BillToSite>New York (OPS)</ns5:BillToSite>
<ns5:BillToContactId>1009</ns5:BillToContactId>
<ns5:BillToContactName>Mike Kenton</ns5:BillToContactName>
```

```
<ns5:BillToContactEmail>sendmail-test-discard@oracle.com</ns5:BillToContactEmail>
<ns5:BillingCycleId>1000000000001</ns5:BillingCycleId>
<ns5:BillingCycle xsi:nil="true"/>
<ns5:LaborInvoiceFormatId>100000010695006</ns5:LaborInvoiceFormatId>
<ns5:LaborInvoiceFormat>Time and Material</ns5:LaborInvoiceFormat>
<ns5:NlInvoiceFormatId>100000011410001</ns5:NlInvoiceFormatId>
<ns5:NonlaborInvoiceFormat>NL Work Site Exp Cat Format</ns5:NonlaborInvoiceFormat>
<ns5:EventsInvoiceFormatId>100000011407004</ns5:EventsInvoiceFormatId>
<ns5:EventInvoiceFormat>Event Type Format</ns5:EventInvoiceFormat>
<ns5:FirstBillingOffsetDays>7</ns5:FirstBillingOffsetDays>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:PersonBillRateSchId>1228</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId>1229</ns5:JobBillRateSchId>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag>false</ns5:EnableLbrBillXtnsnFlag>
<ns5:NlBillRateSchId>1231</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag>false</ns5:EnableNlBillXtnsnFlag>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:InvoiceCurrencyDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyExchgDate xsi:nil="true"/>
<ns5:InvoiceCurrencyRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyCode xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:DocumentNumber xsi:nil="true"/>
<ns5:LocFlag xsi:nil="true"/>
<ns5:ReportTypeCode xsi:nil="true"/>
<ns5:FederalInvoiceFormat xsi:nil="true"/>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>200000000000290</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>Invoice Plan - FP</ns5:BillPlanName>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
```

```
<ns5:BillPlanId>200000000000290</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>[Invoice Plan - FPΩ'+++ '+Ø</ns5:BillPlanName>
<ns5:InvoiceComment>[Trial InvoiceΩ'+++Ø</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>KO</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>200000000000290</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>Invoice Plan - FP</ns5:BillPlanName>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanDescriptiveFlexField>
<ns8:BillPlanId>200000000000290</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:BillPlanDescriptiveFlexField>
</ns1:BillPlan>
<ns1:RevenuePlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>200000000000291</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>100000006</ns5:BillMethodId>
<ns5:BillMethodName>Time and Material BRBR Rev PSR</ns5:BillMethodName>
<ns5:BillPlanName>Revenue Plan - TM BRBR</ns5:BillPlanName>
<ns5:PersonBillRateSchId>1228</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId>1229</ns5:JobBillRateSchId>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag>false</ns5:EnableLbrBillXtnsnFlag>
<ns5:NlBillRateSchId>1231</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag>false</ns5:EnableNlBillXtnsnFlag>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
```

```
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:RevenuePlanDescriptiveFlexField>
<ns8:BillPlanId>200000000000291</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:RevenuePlanDescriptiveFlexField>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>200000000000291</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>Revenue Plan - TM BRBR</ns5:BillPlanName>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>200000000000291</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>[Revenue Plan - TM BRBRΩ'+Ø</ns5:BillPlanName>
<ns5:InvoiceComment>[Trial InvoiceΩ'+++Ø</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>KO</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>200000000000291</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>Revenue Plan - TM BRBR</ns5:BillPlanName>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
</ns1:RevenuePlan>
<ns1:RevenuePlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>200000000000289</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:BillMethodId>100000010</ns5:BillMethodId>
<ns5:BillMethodName>Fixed Price Rev PSR</ns5:BillMethodName>
<ns5:BillPlanName>Revenue Plan - FP</ns5:BillPlanName>
<ns5:PersonBillRateSchId>1228</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId>1229</ns5:JobBillRateSchId>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag>false</ns5:EnableLbrBillXtnsnFlag>
<ns5:NlBillRateSchId>1231</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag>false</ns5:EnableNlBillXtnsnFlag>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
```

```
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:RevenuePlanDescriptiveFlexField>
<ns8:BillPlanId>200000000000289</ns8:BillPlanId>
<ns8:MajorVersion>1</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:RevenuePlanDescriptiveFlexField>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>200000000000289</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>Revenue Plan - FP</ns5:BillPlanName>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>200000000000289</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>[Revenue Plan - FPΩ'+++ '+Ø</ns5:BillPlanName>
<ns5:InvoiceComment>[Trial InvoiceΩ'+++Ø</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>KO</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>200000000000289</ns5:BillPlanId>
<ns5:MajorVersion>1</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>Revenue Plan - FP</ns5:BillPlanName>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
</ns1:RevenuePlan>
<ns1:OKCSOPText_c xsi:nil="true"/>
<ns1:OKCSOPNumber_c xsi:nil="true"/>
<ns1:OKCSOPDate_c xsi:nil="true"/>
<ns1:OKCSOPLong_c xsi:nil="true"/>
<ns1:OKCSOPDCL_Id_c xsi:nil="true"/>
<ns1:OKCSOPDCL_c xsi:nil="true"/>
</ns1:Value>
<ns1:Value>
<ns1:Id>999990000001443</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:InvConvRateTypeName>Corporate</ns1:InvConvRateTypeName>
<ns1:InvConvRateDateTypeName>Transaction date</ns1:InvConvRateDateTypeName>
<ns1:OrgName>Vision Operations</ns1:OrgName>
<ns1:OrgId>204</ns1:OrgId>
<ns1:ContractTypeName>Sell : Project lines</ns1:ContractTypeName>
```

```
<ns1:ContractClass>CONTRACT</ns1:ContractClass>
<ns1:ContractTypeId>104</ns1:ContractTypeId>
<ns1:ContractNumber>ECM Contract : 999990000001443</ns1:ContractNumber>
<ns1:ContractNumberModifier xsi:nil="true"/>
<ns1:Cognomen>ECM Contract : 999990000001443</ns1:Cognomen>
<ns1:BuyOrSell>S</ns1:BuyOrSell>
<ns1:PartyId>1006</ns1:PartyId>
<ns1:PartyName>Computer Service and Rentals</ns1:PartyName>
<ns1:InvOrganizationId>204</ns1:InvOrganizationId>
<ns1:StsCode>EXPIRED</ns1:StsCode>
<ns1:CurrencyCode>USD</ns1:CurrencyCode>
<ns1:StartDate>2008-05-01</ns1:StartDate>
<ns1:EndDate>2009-08-06</ns1:EndDate>
<ns1:SupplierId xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:InvConvRateType>Corporate</ns1:InvConvRateType>
<ns1:InvConvRateDateType>TRANSACTION</ns1:InvConvRateDateType>
<ns1:InvConvRateDate xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
<ns1:InvTrxTypeName xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSiteUseLocation>Tempe (OPS)</ns1:ShipToSiteUseLocation>
<ns1:SoldToAccountId xsi:nil="true"/>
<ns1:SoldToAccount xsi:nil="true"/>
<ns1:SoldToAccountNumber xsi:nil="true"/>
<ns1:SoldToSiteId xsi:nil="true"/>
<ns1:SoldToNumber xsi:nil="true"/>
<ns1:SoldToAddress xsi:nil="true"/>
<ns1:SoldToAccountDescription xsi:nil="true"/>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:LegalEntityId>204</ns1:LegalEntityId>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:DateApproved>2008-05-01</ns1:DateApproved>
<ns1:DatetimeCancelled xsi:nil="true"/>
<ns1:DateSigned>2008-05-01</ns1:DateSigned>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:TerminateCancelSource xsi:nil="true"/>
<ns1:ContributionPercent>1</ns1:ContributionPercent>
<ns1:BillSequence xsi:nil="true"/>
<ns1:OverallRiskCode xsi:nil="true"/>
<ns1:ShortDescription>ECM Contract : 999990000001443</ns1:ShortDescription>
<ns1:Description>ECM Contract : 999990000001443</ns1:Description>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:AmendmentEffectiveDate xsi:nil="true"/>
<ns1:TaxExemptionControl>S</ns1:TaxExemptionControl>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ProjectEnabledFlag>true</ns1:ProjectEnabledFlag>
<ns1:OutputTaxSetId>204</ns1:OutputTaxSetId>
<ns1:PartyObjectType>OKX_PARTY</ns1:PartyObjectType>
<ns1:PrimaryLedgerId>1</ns1:PrimaryLedgerId>
<ns1:CustomerPartyId>1006</ns1:CustomerPartyId>
<ns1:CustomerPartySiteId>1028</ns1:CustomerPartySiteId>
<ns1:GeneratedInvoiceStatus xsi:nil="true"/>
<ns1:OwningOrgId xsi:nil="true"/>
<ns1:NetInvoiceFlag xsi:nil="true"/>
```

```
<ns1:VersionType>C</ns1:VersionType>
<ns1:OwningOrgName xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:ExemptionReasonMeaning xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:ApTermsId xsi:nil="true"/>
<ns1:ServiceEnabledFlag>false</ns1:ServiceEnabledFlag>
<ns1:EstimatedAmount currencyCode="USD">0.00</ns1:EstimatedAmount>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:LastUpdateDate>2018-04-18T07:59:13.526Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>6A1B5CFA643A7EF2E0534280F50A1722</ns1:LastUpdateLogin>
<ns1:LastUpdatedBy>FUSION_APPS_CRM_ESS_APPID</ns1:LastUpdatedBy>
<ns1:CreatedBy>1</ns1:CreatedBy>
<ns1:CreationDate>2008-09-05T15:28:17Z</ns1:CreationDate>
<ns1:LedgerCurrency>USD</ns1:LedgerCurrency>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:AgreementEnabledFlag>false</ns1:AgreementEnabledFlag>
<ns1:CloseReason xsi:nil="true"/>
<ns1:CancelReason xsi:nil="true"/>
<ns1:AuthoringPartyCode xsi:nil="true"/>
<ns1:HoldReasonMeaning xsi:nil="true"/>
<ns1:PrimaryPartyId>1006</ns1:PrimaryPartyId>
<ns1:PersonId xsi:nil="true"/>
<ns1:SalesAccountId xsi:nil="true"/>
<ns1:OrigSystemId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:AllowExternalItemFlag>false</ns1:AllowExternalItemFlag>
<ns1:SalesAccountName xsi:nil="true"/>
<ns1:ItemSourceCode>PRODUCT_MASTER</ns1:ItemSourceCode>
<ns1:StateTransitionFlowName xsi:nil="true"/>
<ns1:StateTransitionFlowState>EXPIRED</ns1:StateTransitionFlowState>
<ns1:UserStatusCode xsi:nil="true"/>
<ns1:AssigneeType xsi:nil="true"/>
<ns1:AssigneeId xsi:nil="true"/>
<ns1:Assignee xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:AccessLevel>UPDATE</ns1:AccessLevel>
<ns1:TemplateFlag>false</ns1:TemplateFlag>
<ns1:BillingSalesrepId xsi:nil="true"/>
<ns1:BillingSalesrepName xsi:nil="true"/>
<ns1:VersionDescription xsi:nil="true"/>
<ns1:Comment xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:AdjustmentBasis xsi:nil="true"/>
<ns1:CommitmentAmount currencyCode="USD">0</ns1:CommitmentAmount>
<ns1:PricingCalendarId xsi:nil="true"/>
<ns1:PricingPeriodType xsi:nil="true"/>
<ns1:PricingCalendarName xsi:nil="true"/>
<ns1:DiscountPercent xsi:nil="true"/>
<ns1:PriceListName xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:WebServiceFlag xsi:nil="true"/>
<ns1:TermsTemplateId xsi:nil="true"/>
<ns1:ContractOwnerId xsi:nil="true"/>
<ns1:Status>Expired</ns1:Status>
<ns1:AuthoringPartyMeaning xsi:nil="true"/>
<ns1:InvOrgName>Vision Operations</ns1:InvOrgName>
<ns1:Supplier/>
<ns1:SupplierSite xsi:nil="true"/>
<ns1:ShipInvOrg>Vision Operations</ns1:ShipInvOrg>
<ns1:RecvInvOrg/>
<ns1:Currency>US Dollar</ns1:Currency>
```

```
<ns1:UserStatusMeaning/>
<ns1:LegalEntityName>Vision Operations</ns1:LegalEntityName>
<ns1:ShipToOrgLocation/>
<ns1:ChrType xsi:nil="true"/>
<ns1:EnableElectronicSignFlag>false</ns1:EnableElectronicSignFlag>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:AllowCurrencyOverrideFlag xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:ContractTrueValue xsi:nil="true"/>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:PricingSegmentExplanation xsi:nil="true"/>
<ns1:PricingStrategyExplanation xsi:nil="true"/>
<ns1:SegmentExplanationMessageName xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:Subtotal xsi:nil="true"/>
<ns1:PricingStrategyId xsi:nil="true"/>
<ns1:PricingStrategyName xsi:nil="true"/>
<ns1:PricingSegmentCode xsi:nil="true"/>
<ns1:InvConversionRate xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PricingEffectivityDate/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:PeriodStartUsed xsi:nil="true"/>
<ns1:PeriodTypeUsed xsi:nil="true"/>
<ns1:InvoiceRuleName xsi:nil="true"/>
<ns1:AccountRuleName xsi:nil="true"/>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:PaymentTermId xsi:nil="true"/>
<ns1:PaymentTermName xsi:nil="true"/>
<ns1:CustomerPartyName>Computer Service and Rentals</ns1:CustomerPartyName>
<ns1:CustomerPartySiteName>Tempe (OPS)</ns1:CustomerPartySiteName>
<ns1:PeriodTypeMeaning xsi:nil="true"/>
<ns1:PeriodStartMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:ContractCreditedAmount xsi:nil="true"/>
<ns1:ContractInvoicedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:TermsTemplateName xsi:nil="true"/>
<ns1:DocumentSubType xsi:nil="true"/>
<ns1:RenewalType xsi:nil="true"/>
<ns1:UnderAmendVersionFlag xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:UnderMigrationFlag xsi:nil="true"/>
<ns1:ContractId>100100069543751</ns1:ContractId>
<ns1:CorpCurrencyCode xsi:nil="true"/>
<ns1:CurcyConvRateType xsi:nil="true"/>
<ns1:QuoteToContactId xsi:nil="true"/>
<ns1:QuoteToContact xsi:nil="true"/>
<ns1:NegotiationCommChannel xsi:nil="true"/>
<ns1:NegotiationCustomerAcceptance xsi:nil="true"/>
<ns1:NegotiationEnableNotification xsi:nil="true"/>
<ns1:NegotiationInternalApproval xsi:nil="true"/>
<ns1:NegotiationLanguage xsi:nil="true"/>
<ns1:QuoteToCopyToEmail xsi:nil="true"/>
<ns1:QuotePhone xsi:nil="true"/>
<ns1:QuoteFax xsi:nil="true"/>
<ns1:QuoteEmail xsi:nil="true"/>
<ns1:QuoteAddress xsi:nil="true"/>
<ns1:QuoteOrg xsi:nil="true"/>
<ns1:QuoteAccount xsi:nil="true"/>
<ns1:PrimarySalesrepId xsi:nil="true"/>
```

```
<ns1:PrimarySalesRepresentative xsi:nil="true"/>
<ns1:NegotiationContractLayoutTemplate xsi:nil="true"/>
<ns1:NegotiationTermsLayoutTemplate xsi:nil="true"/>
<ns1:TransactionTypeName xsi:nil="true"/>
<ns1:AutoSendForSignature xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:EsignTemplateId xsi:nil="true"/>
<ns1:NonStandardClauseCount>0</ns1:NonStandardClauseCount>
<ns1:ContractPuid>KHDR-208</ns1:ContractPuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:RunContractExpertFlag xsi:nil="true"/>
<ns1:IgnoreQAWarningsFlag xsi:nil="true"/>
<ns1:BaseContractYN>N</ns1:BaseContractYN>
<ns1:ContractHeaderFlexfieldVA>
<ns7:ContractId>100100069543751</ns7:ContractId>
<ns7:FLEX_PARAM_ContractId>100100069543751</ns7:FLEX_PARAM_ContractId>
<ns7:biHeaderCode xsi:nil="true"/>
<ns7:biHeaderDff2 xsi:nil="true"/>
<ns7:zokcDffGText xsi:nil="true"/>
<ns7:zokcDffGDate xsi:nil="true"/>
<ns7:testName xsi:nil="true"/>
<ns7:zREL9BI68 xsi:nil="true"/>
<ns7:biqa3Code xsi:nil="true"/>
<ns7:zokcDffGNumber xsi:nil="true"/>
<ns7:pjbContractHeader14 xsi:nil="true"/>
<ns7:pjbContractHeader15 xsi:nil="true"/>
<ns7:zokcContractIntent xsi:nil="true"/>
<ns7:zokcContractLine xsi:nil="true"/>
<ns7:zokcContractLine_Display xsi:nil="true"/>
<ns7:__FLEX_Context xsi:nil="true"/>
<ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns7:_FLEX_NumOfSegments>12</ns7:_FLEX_NumOfSegments>
</ns1:ContractHeaderFlexfieldVA>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>999990000010096</ns1:Id>
<ns1:PartyRoleCode>CUSTOMER</ns1:PartyRoleCode>
<ns1:Role>Customer</ns1:Role>
<ns1:PartyId>1006</ns1:PartyId>
<ns1:PartyName>Computer Service and Rentals</ns1:PartyName>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:SignedBy>PSR</ns1:SignedBy>
<ns1:SignedDate>2008-09-29</ns1:SignedDate>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-45</ns1:PartyRolePuid>
<ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
<ns1:Id>999990000031712</ns1:Id>
<ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
<ns1:Role>Customer contact</ns1:Role>
<ns1:ContactId>302</ns1:ContactId>
<ns1:OwnerFlag>false</ns1:OwnerFlag>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:AccessLevel xsi:nil="true"/>
<ns1:AccessLevelName xsi:nil="true"/>
<ns1:SignerYn xsi:nil="true"/>
<ns1:PartyContactName xsi:nil="true"/>
<ns1:SignerSequence xsi:nil="true"/>
<ns1:RoutingSequence xsi:nil="true"/>
<ns1:SignatureRole xsi:nil="true"/>
<ns1:SignatureRoleMeaning xsi:nil="true"/>
```

```
<ns1:ContactPuid>CNTC-2883</ns1:ContactPuid>
<ns1:ContractPartyContactFlexfieldVA>
<ns2:Id>999990000031712</ns2:Id>
<ns2:MajorVersion>2</ns2:MajorVersion>
<ns2:__FLEX_Context xsi:nil="true"/>
<ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
</ns1:ContractPartyContactFlexfieldVA>
</ns1:ContractPartyContact>
<ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
<ns1:Id>999990000031713</ns1:Id>
<ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
<ns1:Role>Customer contact</ns1:Role>
<ns1:ContactId>322</ns1:ContactId>
<ns1:OwnerFlag>false</ns1:OwnerFlag>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:AccessLevel xsi:nil="true"/>
<ns1:AccessLevelName xsi:nil="true"/>
<ns1:SignerYn xsi:nil="true"/>
<ns1:PartyContactName xsi:nil="true"/>
<ns1:SignerSequence xsi:nil="true"/>
<ns1:RoutingSequence xsi:nil="true"/>
<ns1:SignatureRole xsi:nil="true"/>
<ns1:SignatureRoleMeaning xsi:nil="true"/>
<ns1:ContactPuid>CNTC-2884</ns1:ContactPuid>
<ns1:ContractPartyContactFlexfieldVA>
<ns2:Id>999990000031713</ns2:Id>
<ns2:MajorVersion>2</ns2:MajorVersion>
<ns2:__FLEX_Context xsi:nil="true"/>
<ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
</ns1:ContractPartyContactFlexfieldVA>
</ns1:ContractPartyContact>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>999990000010096</ns3:Id>
<ns3:MajorVersion>2</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010096</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen>CUSTOMER:OKX_PARTY:1006</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010096</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>KO</ns1:SourceLang>
<ns1:Cognomen>CUSTOMER:OKX_PARTY:1006</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010096</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
```

```
<ns1:Cognomen>CUSTOMER:OKX_PARTY:1006</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>999990000010095</ns1:Id>
<ns1:PartyRoleCode>SUPPLIER</ns1:PartyRoleCode>
<ns1:Role>Supplier</ns1:Role>
<ns1:PartyId>204</ns1:PartyId>
<ns1:PartyName>Vision Operations</ns1:PartyName>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:SignedBy>PSR</ns1:SignedBy>
<ns1:SignedDate>2008-09-29</ns1:SignedDate>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-44</ns1:PartyRolePuid>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>999990000010095</ns3:Id>
<ns3:MajorVersion>2</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010095</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen>VENDOR:OKX_OPERUNIT:204</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010095</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>KO</ns1:SourceLang>
<ns1:Cognomen>VENDOR:OKX_OPERUNIT:204</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010095</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen>VENDOR:OKX_OPERUNIT:204</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>999990000010097</ns1:Id>
<ns1:PartyRoleCode>THIRD_PARTY</ns1:PartyRoleCode>
<ns1:Role>Third party</ns1:Role>
<ns1:PartyId>12463</ns1:PartyId>
<ns1:PartyName>McKesson General Medical</ns1:PartyName>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:SignedBy>PSR</ns1:SignedBy>
<ns1:SignedDate>2008-09-29</ns1:SignedDate>
<ns1:SignerRole xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:PartyRolePuid>PRTY-46</ns1:PartyRolePuid>
```

```
 <ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
 <ns1:Id>999990000031715</ns1:Id>
 <ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
 <ns1:Role>Customer contact</ns1:Role>
 <ns1:ContactId>118179</ns1:ContactId>
 <ns1:OwnerFlag>false</ns1:OwnerFlag>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:AccessLevel xsi:nil="true"/>
 <ns1:AccessLevelName xsi:nil="true"/>
 <ns1:SignerYn xsi:nil="true"/>
 <ns1:PartyContactName>Chester Paul</ns1:PartyContactName>
 <ns1:SignerSequence xsi:nil="true"/>
 <ns1:RoutingSequence xsi:nil="true"/>
 <ns1:SignatureRole xsi:nil="true"/>
 <ns1:SignatureRoleMeaning xsi:nil="true"/>
 <ns1:ContactPuid>CNTC-2882</ns1:ContactPuid>
 <ns1:ContractPartyContactFlexfieldVA>
 <ns2:Id>999990000031715</ns2:Id>
 <ns2:MajorVersion>2</ns2:MajorVersion>
 <ns2:__FLEX_Context xsi:nil="true"/>
 <ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
 </ns1:ContractPartyContactFlexfieldVA>
 </ns1:ContractPartyContact>
 <ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
 <ns1:Id>999990000031714</ns1:Id>
 <ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
 <ns1:Role>Customer contact</ns1:Role>
 <ns1:ContactId>56884</ns1:ContactId>
 <ns1:OwnerFlag>false</ns1:OwnerFlag>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:AccessLevel xsi:nil="true"/>
 <ns1:AccessLevelName xsi:nil="true"/>
 <ns1:SignerYn xsi:nil="true"/>
 <ns1:PartyContactName>John Wilson</ns1:PartyContactName>
 <ns1:SignerSequence xsi:nil="true"/>
 <ns1:RoutingSequence xsi:nil="true"/>
 <ns1:SignatureRole xsi:nil="true"/>
 <ns1:SignatureRoleMeaning xsi:nil="true"/>
 <ns1:ContactPuid>CNTC-2885</ns1:ContactPuid>
 <ns1:ContractPartyContactFlexfieldVA>
 <ns2:Id>999990000031714</ns2:Id>
 <ns2:MajorVersion>2</ns2:MajorVersion>
 <ns2:__FLEX_Context xsi:nil="true"/>
 <ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
 </ns1:ContractPartyContactFlexfieldVA>
 </ns1:ContractPartyContact>
 <ns1:ContractPartyFlexfieldVA>
 <ns3:Id>999990000010097</ns3:Id>
 <ns3:MajorVersion>2</ns3:MajorVersion>
 <ns3:_Party__Location xsi:nil="true"/>
 <ns3:_Global__Segment__1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
 </ns1:ContractPartyFlexfieldVA>
 <ns1:ContractPartyTranslation>
 <ns1:Id>999990000010097</ns1:Id>
 <ns1:MajorVersion>2</ns1:MajorVersion>
```

```
 <ns1:Language>IW</ns1:Language>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:Cognomen>THIRD_PARTY:OKX_PARTY:12463</ns1:Cognomen>
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
 <ns1:ContractPartyTranslation>
 <ns1:Id>999990000010097</ns1:Id>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:Language>KO</ns1:Language>
 <ns1:SourceLang>KO</ns1:SourceLang>
 <ns1:Cognomen>THIRD_PARTY:OKX_PARTY:12463</ns1:Cognomen>
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
 <ns1:ContractPartyTranslation>
 <ns1:Id>999990000010097</ns1:Id>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:Language>US</ns1:Language>
 <ns1:SourceLang>US</ns1:SourceLang>
 <ns1:Cognomen>THIRD_PARTY:OKX_PARTY:12463</ns1:Cognomen>
 <ns1:Alias xsi:nil="true"/>
 </ns1:ContractPartyTranslation>
 </ns1:ContractParty>
 <ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
 <ns1:Id>999990000010098</ns1:Id>
 <ns1:PartyRoleCode>THIRD_PARTY</ns1:PartyRoleCode>
 <ns1:Role>Third party</ns1:Role>
 <ns1:PartyId>14934</ns1:PartyId>
 <ns1:PartyName>CV_SuppC01</ns1:PartyName>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:SignedBy>PSR</ns1:SignedBy>
 <ns1:SignedDate>2008-09-29</ns1:SignedDate>
 <ns1:SignerRole xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:DeleteFlag xsi:nil="true"/>
 <ns1:PartyRolePuid>PRTY-47</ns1:PartyRolePuid>
 <ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
 <ns1:Id>999990000031716</ns1:Id>
 <ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
 <ns1:Role>Customer contact</ns1:Role>
 <ns1:ContactId>117518</ns1:ContactId>
 <ns1:OwnerFlag>false</ns1:OwnerFlag>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:AccessLevel xsi:nil="true"/>
 <ns1:AccessLevelName xsi:nil="true"/>
 <ns1:SignerYn xsi:nil="true"/>
 <ns1:PartyContactName>Norris, Ms. Bridget</ns1:PartyContactName>
 <ns1:SignerSequence xsi:nil="true"/>
 <ns1:RoutingSequence xsi:nil="true"/>
 <ns1:SignatureRole xsi:nil="true"/>
 <ns1:SignatureRoleMeaning xsi:nil="true"/>
 <ns1:ContactPuid>CNTC-2886</ns1:ContactPuid>
 <ns1:ContractPartyContactFlexfieldVA>
 <ns2:Id>999990000031716</ns2:Id>
 <ns2:MajorVersion>2</ns2:MajorVersion>
 <ns2:__FLEX_Context xsi:nil="true"/>
 <ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
 </ns1:ContractPartyContactFlexfieldVA>
 </ns1:ContractPartyContact>
 <ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
 <ns1:Id>999990000031717</ns1:Id>
```

```
<ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
<ns1:Role>Customer contact</ns1:Role>
<ns1:ContactId>117518</ns1:ContactId>
<ns1:OwnerFlag>false</ns1:OwnerFlag>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:AccessLevel xsi:nil="true"/>
<ns1:AccessLevelName xsi:nil="true"/>
<ns1:SignerYn xsi:nil="true"/>
<ns1:PartyContactName>Norris, Ms. Bridget</ns1:PartyContactName>
<ns1:SignerSequence xsi:nil="true"/>
<ns1:RoutingSequence xsi:nil="true"/>
<ns1:SignatureRole xsi:nil="true"/>
<ns1:SignatureRoleMeaning xsi:nil="true"/>
<ns1:ContactPuid>CNTC-2887</ns1:ContactPuid>
<ns1:ContractPartyContactFlexfieldVA>
<ns2:Id>999990000031717</ns2:Id>
<ns2:MajorVersion>2</ns2:MajorVersion>
<ns2:__FLEX_Context xsi:nil="true"/>
<ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
</ns1:ContractPartyContactFlexfieldVA>
</ns1:ContractPartyContact>
<ns1:ContractPartyFlexfieldVA>
<ns3:Id>999990000010098</ns3:Id>
<ns3:MajorVersion>2</ns3:MajorVersion>
<ns3:_Party__Location xsi:nil="true"/>
<ns3:_Global__Segment__1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010098</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen>THIRD_PARTY:OKX_PARTY:14934</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010098</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>KO</ns1:SourceLang>
<ns1:Cognomen>THIRD_PARTY:OKX_PARTY:14934</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010098</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen>THIRD_PARTY:OKX_PARTY:14934</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractParty xmlns:ns3="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/">
<ns1:Id>999990000010099</ns1:Id>
<ns1:PartyRoleCode>THIRD_PARTY</ns1:PartyRoleCode>
<ns1:Role>Third party</ns1:Role>
<ns1:PartyId>33435</ns1:PartyId>
<ns1:PartyName>ACSYS Consultoria e Sistemas Ltda</ns1:PartyName>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:SignedBy>PSR</ns1:SignedBy>
```

```
 <ns1:SignedDate>2008-09-29</ns1:SignedDate>
 <ns1:SignerRole xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:DeleteFlag xsi:nil="true"/>
 <ns1:PartyRolePuid>PRTY-48</ns1:PartyRolePuid>
 <ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
 <ns1:Id>999990000031718</ns1:Id>
 <ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
 <ns1:Role>Customer contact</ns1:Role>
 <ns1:ContactId>117476</ns1:ContactId>
 <ns1:OwnerFlag>false</ns1:OwnerFlag>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:AccessLevel xsi:nil="true"/>
 <ns1:AccessLevelName xsi:nil="true"/>
 <ns1:SignerYn xsi:nil="true"/>
 <ns1:PartyContactName>Marcos Pinheiro</ns1:PartyContactName>
 <ns1:SignerSequence xsi:nil="true"/>
 <ns1:RoutingSequence xsi:nil="true"/>
 <ns1:SignatureRole xsi:nil="true"/>
 <ns1:SignatureRoleMeaning xsi:nil="true"/>
 <ns1:ContactPuid>CNTC-2888</ns1:ContactPuid>
 <ns1:ContractPartyContactFlexfieldVA>
 <ns2:Id>999990000031718</ns2:Id>
 <ns2:MajorVersion>2</ns2:MajorVersion>
 <ns2:__FLEX_Context xsi:nil="true"/>
 <ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
 </ns1:ContractPartyContactFlexfieldVA>
 </ns1:ContractPartyContact>
 <ns1:ContractPartyContact xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/">
 <ns1:Id>999990000031719</ns1:Id>
 <ns1:ContactRoleCode>PARTY_CONTACT</ns1:ContactRoleCode>
 <ns1:Role>Customer contact</ns1:Role>
 <ns1:ContactId>118302</ns1:ContactId>
 <ns1:OwnerFlag>false</ns1:OwnerFlag>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:AccessLevel xsi:nil="true"/>
 <ns1:AccessLevelName xsi:nil="true"/>
 <ns1:SignerYn xsi:nil="true"/>
 <ns1:PartyContactName>Marcos Pinheiro</ns1:PartyContactName>
 <ns1:SignerSequence xsi:nil="true"/>
 <ns1:RoutingSequence xsi:nil="true"/>
 <ns1:SignatureRole xsi:nil="true"/>
 <ns1:SignatureRoleMeaning xsi:nil="true"/>
 <ns1:ContactPuid>CNTC-2889</ns1:ContactPuid>
 <ns1:ContractPartyContactFlexfieldVA>
 <ns2:Id>999990000031719</ns2:Id>
 <ns2:MajorVersion>2</ns2:MajorVersion>
 <ns2:__FLEX_Context xsi:nil="true"/>
 <ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
 </ns1:ContractPartyContactFlexfieldVA>
 </ns1:ContractPartyContact>
 <ns1:ContractPartyFlexfieldVA>
 <ns3:Id>999990000010099</ns3:Id>
 <ns3:MajorVersion>2</ns3:MajorVersion>
 <ns3:_Party__Location xsi:nil="true"/>
 <ns3:_Global__Segment__1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
```

```
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>2</ns3:_FLEX_NumOfSegments>
</ns1:ContractPartyFlexfieldVA>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010099</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>IW</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen>THIRD_PARTY:OKX_PARTY:33435</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010099</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>KO</ns1:Language>
<ns1:SourceLang>KO</ns1:SourceLang>
<ns1:Cognomen>THIRD_PARTY:OKX_PARTY:33435</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
<ns1:ContractPartyTranslation>
<ns1:Id>999990000010099</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Language>US</ns1:Language>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:Cognomen>THIRD_PARTY:OKX_PARTY:33435</ns1:Cognomen>
<ns1:Alias xsi:nil="true"/>
</ns1:ContractPartyTranslation>
</ns1:ContractParty>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>ECM Contract : 999990000001443</ns1:Cognomen>
<ns1:Description>ECM Contract : 999990000001443</ns1:Description>
<ns1:Id>999990000001443</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:ShortDescription>ECM Contract : 999990000001443</ns1:ShortDescription>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>[ECM Contract : 999990000001443Ω'+++ '+++ '+++ '++Ø</ns1:Cognomen>
<ns1:Description>[ECM Contract : 9999990000001443Ω'+++ '+++ '+++ '++Ø</ns1:Description>
<ns1:Id>999990000001443</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:ShortDescription>[ECM Contract : 9999990000001443Ω'+++ '+++ '+++ '++Ø</ns1:ShortDescription>
<ns1:SourceLang>KO</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:ContractHeaderTranslation>
<ns1:Cognomen>ECM Contract : 999990000001443</ns1:Cognomen>
<ns1:Description>ECM Contract : 999990000001443</ns1:Description>
<ns1:Id>999990000001443</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:ShortDescription>ECM Contract : 999990000001443</ns1:ShortDescription>
<ns1:SourceLang>US</ns1:SourceLang>
<ns1:VersionDescription xsi:nil="true"/>
</ns1:ContractHeaderTranslation>
<ns1:RelatedDocument>
<ns1:Id>999990000191268</ns1:Id>
<ns1:RelationshipCode>RELATED_TO</ns1:RelationshipCode>
<ns1:Relationship>Related to</ns1:Relationship>
<ns1:RelatedContractId>999990000001447</ns1:RelatedContractId>
<ns1:ContractNumber>ECM Contract : 999990000001447</ns1:ContractNumber>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
```

```
<ns1:ContractId>100100069543752</ns1:ContractId>
<ns1:RelatedObjPuid>ROBJ-6041</ns1:RelatedObjPuid>
</ns1:RelatedDocument>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115390</ns1:Id>
<ns1:LineId>100100095844801</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
```

```
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId>200000000000288</ns1:BillPlanId>
<ns1:BillPlan>Invoice Plan - TM BRBR</ns1:BillPlan>
<ns1:RevenuePlanId>200000000000289</ns1:RevenuePlanId>
<ns1:RevenuePlan>Revenue Plan - FP</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
```

```
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10688</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844801</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844801</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:Id>999990000115390</ns1:Id>
```

```
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115390</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115390</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>100010024457290</ns5:BillingControlId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2008-01-01</ns5:StartDate>
<ns5:EndDate>2008-01-01</ns5:EndDate>
<ns5:SoftLimitAmount xsi:nil="true"/>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300000000000720</ns5:LinkId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:ProjectId>999991072</ns5:ProjectId>
<ns5:ProjectNumber>SMSEG-00000000000000000073</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115470</ns1:Id>
```

```
<ns1:LineId>100100095844898</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
```

```
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
```

```
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10772</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844898</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844898</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:Id>999990000115470</ns1:Id>
 <ns1:Language>IW</ns1:Language>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:Comments xsi:nil="true"/>
 <ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
 <ns1:ItemName>f40000</ns1:ItemName>
```

```
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115470</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115470</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115460</ns1:Id>
<ns1:LineId>100100095844887</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
```

```
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
```

```
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
```

```
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10764</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844887</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844887</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115460</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115460</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115460</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
```

```
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115450</ns1:Id>
<ns1:LineId>100100095844877</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
```

```
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
```

```
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10755</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844877</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844877</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:Id>999990000115450</ns1:Id>
 <ns1:Language>IW</ns1:Language>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:Comments xsi:nil="true"/>
```

```
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115450</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115450</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115440</ns1:Id>
<ns1:LineId>100100095844867</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
```

```
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
```

```
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
```

```
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10746</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844867</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844867</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115440</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115440</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115440</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
```

```
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115430</ns1:Id>
<ns1:LineId>100100095844857</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
```

```
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
```

```
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10738</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844857</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844857</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115430</ns1:Id>
<ns1:Language>IW</ns1:Language>
```

```
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115430</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115430</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115420</ns1:Id>
<ns1:LineId>100100095844848</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
```

```
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
```

```
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
```

```
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10729</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844848</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844848</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115420</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115420</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115420</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
```

```
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115410</ns1:Id>
<ns1:LineId>100100095844837</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
```

```
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
```

```
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10720</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844837</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844837</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
<ns1:Id>999990000115410</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115410</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115410</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115400</ns1:Id>
<ns1:LineId>100100095844828</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
```

```
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
```

```
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
```

```
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10712</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844828</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844828</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115400</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115400</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115400</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
```

```
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>1</ns1:LineNumber>
<ns1:Id>999990000115480</ns1:Id>
<ns1:LineId>100100095844817</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>79</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:ItemNameTxt>f40000</ns1:ItemNameTxt>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
```

```
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
```

```
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10701</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844817</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844817</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
```

```
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115480</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115480</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Modem - Serial ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>[f40000'+Ø</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115480</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Modem - Serial Control</ns1:ItemDescription>
<ns1:ItemName>f40000</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115391</ns1:Id>
<ns1:LineId>100100095844799</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
```

```
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId>200000000000290</ns1:BillPlanId>
<ns1:BillPlan>Invoice Plan - FP</ns1:BillPlan>
<ns1:RevenuePlanId>200000000000291</ns1:RevenuePlanId>
<ns1:RevenuePlan>Revenue Plan - TM BRBR</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
```

```
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
```

```
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10686</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844799</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844799</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115391</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115391</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115391</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
```

```
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>100010024457285</ns5:BillingControlId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2008-01-01</ns5:StartDate>
<ns5:EndDate>2008-01-01</ns5:EndDate>
<ns5:SoftLimitAmount xsi:nil="true"/>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300000000000721</ns5:LinkId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:ProjectId>999991072</ns5:ProjectId>
<ns5:ProjectNumber>SMSEG-00000000000000000073</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115471</ns1:Id>
<ns1:LineId>100100095844899</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
```

```
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
```

```
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
```

```
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10773</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844899</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844899</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115471</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115471</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115471</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
```

```
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115461</ns1:Id>
<ns1:LineId>100100095844888</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
```

```
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
```

```
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-25038</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844888</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844888</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:Id>999990000115461</ns1:Id>
 <ns1:Language>IW</ns1:Language>
```

```
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115461</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115461</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115451</ns1:Id>
<ns1:LineId>100100095844878</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
```

```
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
```

```
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
```

```
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10756</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844878</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844878</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115451</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115451</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115451</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
```

```
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115441</ns1:Id>
<ns1:LineId>100100095844868</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
```

```
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
```

```
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-25036</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844868</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844868</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
<ns1:Id>999990000115441</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115441</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115441</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115431</ns1:Id>
<ns1:LineId>100100095844858</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
```

```
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
```

```
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
```

```
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-25034</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844858</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844858</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115431</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115431</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115431</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
```

```
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115421</ns1:Id>
<ns1:LineId>100100095844849</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
```

```
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
```

```
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10730</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844849</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844849</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
```

```
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115421</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115421</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115421</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115411</ns1:Id>
<ns1:LineId>100100095844838</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
```

```
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
```

```
  <ns1:FreightTermsCode xsi:nil="true"/>
  <ns1:FreightTerms xsi:nil="true"/>
  <ns1:PaymentTermsId xsi:nil="true"/>
  <ns1:PaymentTerms xsi:nil="true"/>
  <ns1:PurchasingCategoryId xsi:nil="true"/>
  <ns1:PurchasingCategory xsi:nil="true"/>
  <ns1:CarrierId xsi:nil="true"/>
  <ns1:CarrierName xsi:nil="true"/>
  <ns1:VendorSiteId xsi:nil="true"/>
  <ns1:OrigSystemReference xsi:nil="true"/>
  <ns1:OrigSystemSourceCode xsi:nil="true"/>
  <ns1:Cognomen>ECM Contract</ns1:Cognomen>
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity xsi:nil="true"/>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
```

```
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-25032</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844838</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844838</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115411</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115411</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115411</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
```

```
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115401</ns1:Id>
<ns1:LineId>100100095844829</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
```

```
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
```

```
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10713</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844829</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844829</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
```

```
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115401</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115401</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115401</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>2</ns1:LineNumber>
<ns1:Id>999990000115481</ns1:Id>
<ns1:LineId>100100095844818</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>133</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:ItemNameTxt>SB68415</ns1:ItemNameTxt>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
```

```
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
```

```
  <ns1:FOBCode xsi:nil="true"/>
  <ns1:FOB xsi:nil="true"/>
  <ns1:FreightTermsCode xsi:nil="true"/>
  <ns1:FreightTerms xsi:nil="true"/>
  <ns1:PaymentTermsId xsi:nil="true"/>
  <ns1:PaymentTerms xsi:nil="true"/>
  <ns1:PurchasingCategoryId xsi:nil="true"/>
  <ns1:PurchasingCategory xsi:nil="true"/>
  <ns1:CarrierId xsi:nil="true"/>
  <ns1:CarrierName xsi:nil="true"/>
  <ns1:VendorSiteId xsi:nil="true"/>
  <ns1:OrigSystemReference xsi:nil="true"/>
  <ns1:OrigSystemSourceCode xsi:nil="true"/>
  <ns1:Cognomen>ECM Contract</ns1:Cognomen>
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity xsi:nil="true"/>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
```

```
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10702</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844818</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844818</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115481</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115481</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Chassis - Sentinel MultimediaΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115481</ns1:Id>
<ns1:Language>US</ns1:Language>
```

```
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Chassis - Sentinel Multimedia</ns1:ItemDescription>
<ns1:ItemName>SB68415</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115392</ns1:Id>
<ns1:LineId>100100095844802</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
```

```
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId>200000000000288</ns1:BillPlanId>
<ns1:BillPlan>Invoice Plan - TM BRBR</ns1:BillPlan>
<ns1:RevenuePlanId>200000000000289</ns1:RevenuePlanId>
<ns1:RevenuePlan>Revenue Plan - FP</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
```

```
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10689</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844802</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844802</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
```

```
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115392</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115392</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115392</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>100010024457291</ns5:BillingControlId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2008-01-01</ns5:StartDate>
<ns5:EndDate>2008-01-01</ns5:EndDate>
<ns5:SoftLimitAmount xsi:nil="true"/>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300000000000722</ns5:LinkId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:ProjectId>999991072</ns5:ProjectId>
<ns5:ProjectNumber>SMSEG-00000000000000000073</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
```

```
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115462</ns1:Id>
<ns1:LineId>100100095844889</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
```

```
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
```

```
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10765</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844889</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844889</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
<ns1:Id>999990000115462</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115462</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115462</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115452</ns1:Id>
<ns1:LineId>100100095844879</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
```

```
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
```

```
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
```

```
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10757</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844879</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844879</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115452</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115452</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115452</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
```

```
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115442</ns1:Id>
<ns1:LineId>100100095844869</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
```

```
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
```

```
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10747</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844869</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844869</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
```

```
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115442</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115442</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115442</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115432</ns1:Id>
<ns1:LineId>100100095844859</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
```

```
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
```

```
  <ns1:FreightTermsCode xsi:nil="true"/>
  <ns1:FreightTerms xsi:nil="true"/>
  <ns1:PaymentTermsId xsi:nil="true"/>
  <ns1:PaymentTerms xsi:nil="true"/>
  <ns1:PurchasingCategoryId xsi:nil="true"/>
  <ns1:PurchasingCategory xsi:nil="true"/>
  <ns1:CarrierId xsi:nil="true"/>
  <ns1:CarrierName xsi:nil="true"/>
  <ns1:VendorSiteId xsi:nil="true"/>
  <ns1:OrigSystemReference xsi:nil="true"/>
  <ns1:OrigSystemSourceCode xsi:nil="true"/>
  <ns1:Cognomen>ECM Contract</ns1:Cognomen>
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity xsi:nil="true"/>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
```

```
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10739</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844859</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844859</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115432</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115432</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115432</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
```

```
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115422</ns1:Id>
<ns1:LineId>100100095844850</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
```

```
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
```

```
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10731</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844850</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844850</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
```

```
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115422</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115422</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115422</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115412</ns1:Id>
<ns1:LineId>100100095844839</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
```

```
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
```

```
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
```

```
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10721</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844839</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844839</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115412</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115412</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115412</ns1:Id>
<ns1:Language>US</ns1:Language>
```

```
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115402</ns1:Id>
<ns1:LineId>100100095844830</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
```

```
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
```

```
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10714</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844830</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844830</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
```

```
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115402</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115402</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115402</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115482</ns1:Id>
<ns1:LineId>100100095844820</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
```

```
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
```

```
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
```

```
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10704</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844820</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844820</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115482</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115482</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
<ns1:Id>999990000115482</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>3</ns1:LineNumber>
<ns1:Id>999990000115472</ns1:Id>
<ns1:LineId>100100095844810</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>135</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:ItemNameTxt>CM95311</ns1:ItemNameTxt>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
```

```
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
```

```
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-25029</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844810</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844810</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
```

```
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115472</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115472</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Software - SpreadsheetΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115472</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Software - Spreadsheet</ns1:ItemDescription>
<ns1:ItemName>CM95311</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115393</ns1:Id>
<ns1:LineId>100100095844800</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
```

```
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId>200000000000290</ns1:BillPlanId>
<ns1:BillPlan>Invoice Plan - FP</ns1:BillPlan>
<ns1:RevenuePlanId>200000000000291</ns1:RevenuePlanId>
<ns1:RevenuePlan>Revenue Plan - TM BRBR</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
```

```
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
```

```
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10687</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844800</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844800</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115393</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115393</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
```

```
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115393</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>100010024457286</ns5:BillingControlId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2008-01-01</ns5:StartDate>
<ns5:EndDate>2008-01-01</ns5:EndDate>
<ns5:SoftLimitAmount xsi:nil="true"/>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300000000000723</ns5:LinkId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:ProjectId>999991072</ns5:ProjectId>
<ns5:ProjectNumber>SMSEG-00000000000000000073</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115463</ns1:Id>
<ns1:LineId>100100095844890</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
```

```
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
```

```
  <ns1:FreightTermsCode xsi:nil="true"/>
  <ns1:FreightTerms xsi:nil="true"/>
  <ns1:PaymentTermsId xsi:nil="true"/>
  <ns1:PaymentTerms xsi:nil="true"/>
  <ns1:PurchasingCategoryId xsi:nil="true"/>
  <ns1:PurchasingCategory xsi:nil="true"/>
  <ns1:CarrierId xsi:nil="true"/>
  <ns1:CarrierName xsi:nil="true"/>
  <ns1:VendorSiteId xsi:nil="true"/>
  <ns1:OrigSystemReference xsi:nil="true"/>
  <ns1:OrigSystemSourceCode xsi:nil="true"/>
  <ns1:Cognomen>ECM Contract</ns1:Cognomen>
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity xsi:nil="true"/>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
```

```
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10766</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844890</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844890</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115463</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115463</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115463</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
```

```
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115453</ns1:Id>
<ns1:LineId>100100095844880</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
```

```
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
```

```
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10758</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844880</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844880</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
```

```
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115453</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115453</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115453</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115443</ns1:Id>
<ns1:LineId>100100095844870</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
```

```
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
```

```
  <ns1:FOBCode xsi:nil="true"/>
  <ns1:FOB xsi:nil="true"/>
  <ns1:FreightTermsCode xsi:nil="true"/>
  <ns1:FreightTerms xsi:nil="true"/>
  <ns1:PaymentTermsId xsi:nil="true"/>
  <ns1:PaymentTerms xsi:nil="true"/>
  <ns1:PurchasingCategoryId xsi:nil="true"/>
  <ns1:PurchasingCategory xsi:nil="true"/>
  <ns1:CarrierId xsi:nil="true"/>
  <ns1:CarrierName xsi:nil="true"/>
  <ns1:VendorSiteId xsi:nil="true"/>
  <ns1:OrigSystemReference xsi:nil="true"/>
  <ns1:OrigSystemSourceCode xsi:nil="true"/>
  <ns1:Cognomen>ECM Contract</ns1:Cognomen>
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity xsi:nil="true"/>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
```

```
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10748</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844870</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844870</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115443</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115443</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115443</ns1:Id>
<ns1:Language>US</ns1:Language>
```

```
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115433</ns1:Id>
<ns1:LineId>100100095844860</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
```

```
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
```

```
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10740</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844860</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844860</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
```

```
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115433</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115433</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115433</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115423</ns1:Id>
<ns1:LineId>100100095844847</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
```

```
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
```

```
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
```

```
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10728</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844847</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844847</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115423</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115423</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
<ns1:Id>999990000115423</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115413</ns1:Id>
<ns1:LineId>100100095844840</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
```

```
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
```

```
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10722</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844840</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844840</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
```

```
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115413</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115413</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115413</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115403</ns1:Id>
<ns1:LineId>100100095844827</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
```

```
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
```

```
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
```

```
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10711</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844827</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844827</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115403</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115403</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
```

```
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115403</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115483</ns1:Id>
<ns1:LineId>100100095844821</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
```

```
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
```

```
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10705</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844821</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844821</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
```

```
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115483</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115483</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115483</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>4</ns1:LineNumber>
<ns1:Id>999990000115473</ns1:Id>
<ns1:LineId>100100095844811</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>149</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:ItemNameTxt>AS54888</ns1:ItemNameTxt>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
```

```
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
```

```
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
```

```
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10696</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844811</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844811</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115473</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115473</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Sentinel Standard Desktop TPDΩ'+++ '+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
```

```
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115473</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Sentinel Standard Desktop TPD</ns1:ItemDescription>
<ns1:ItemName>AS54888</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115394</ns1:Id>
<ns1:LineId>100100095844803</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
```

```
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId>200000000000288</ns1:BillPlanId>
<ns1:BillPlan>Invoice Plan - TM BRBR</ns1:BillPlan>
<ns1:RevenuePlanId>200000000000289</ns1:RevenuePlanId>
<ns1:RevenuePlan>Revenue Plan - FP</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
```

```
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity xsi:nil="true"/>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
  <ns1:PriceDuringBillingYn xsi:nil="true"/>
  <ns1:BillingDateMethod xsi:nil="true"/>
  <ns1:SpecificDays xsi:nil="true"/>
  <ns1:GenerateBillingSchedule xsi:nil="true"/>
  <ns1:PriceAsOf xsi:nil="true"/>
  <ns1:CoverageScheduleId xsi:nil="true"/>
  <ns1:PaymentSetId xsi:nil="true"/>
  <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
  <ns1:StandaloneSellingPrice xsi:nil="true"/>
  <ns1:PriceApplicationRule xsi:nil="true"/>
  <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
  <ns1:LinePuid>LINE-10690</ns1:LinePuid>
  <ns1:SourceDocumentId xsi:nil="true"/>
  <ns1:SourceDocumentLineId xsi:nil="true"/>
  <ns1:SourceDocumentSystemCode xsi:nil="true"/>
  <ns1:ContractAllLineDesFlexVA>
  <ns4:LineId>100100095844803</ns4:LineId>
  <ns4:FLEX_PARAM_LineId>100100095844803</ns4:FLEX_PARAM_LineId>
  <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
  <ns4:biLineSegment1 xsi:nil="true"/>
  <ns4:biLineSegment2 xsi:nil="true"/>
  <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
  <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
  <ns4:pcChrgsNltplr xsi:nil="true"/>
```

```
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115394</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115394</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115394</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>100010024457292</ns5:BillingControlId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2008-01-01</ns5:StartDate>
<ns5:EndDate>2008-01-01</ns5:EndDate>
<ns5:SoftLimitAmount xsi:nil="true"/>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300000000000724</ns5:LinkId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:ProjectId>999991072</ns5:ProjectId>
```

```
<ns5:ProjectNumber>SMSEG-00000000000000000073</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115464</ns1:Id>
<ns1:LineId>100100095844891</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
```

```
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
```

```
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10767</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844891</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844891</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
```

```
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115464</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115464</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115464</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115454</ns1:Id>
<ns1:LineId>100100095844881</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
```

```
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
```

```
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
```

```
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10759</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844881</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844881</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115454</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115454</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
<ns1:Id>999990000115454</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115444</ns1:Id>
<ns1:LineId>100100095844871</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
```

```
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
```

```
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10749</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844871</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844871</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
```

```
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115444</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115444</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115444</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115434</ns1:Id>
<ns1:LineId>100100095844861</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
```

```
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
```

```
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
```

```
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10741</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844861</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844861</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115434</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115434</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
```

```
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115434</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115424</ns1:Id>
<ns1:LineId>100100095844851</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
```

```
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
```

```
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10732</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844851</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844851</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
```

```
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115424</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115424</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115424</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115414</ns1:Id>
<ns1:LineId>100100095844841</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
```

```
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
```

```
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
```

```
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10723</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844841</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844841</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115414</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115414</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
```

```
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115414</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115404</ns1:Id>
<ns1:LineId>100100095844831</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
```

```
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
```

```
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10715</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844831</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844831</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
```

```
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115404</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115404</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115404</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115484</ns1:Id>
<ns1:LineId>100100095844822</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
```

```
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
```

```
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
```

```
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10706</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844822</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844822</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115484</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115484</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
```

```
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115484</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>5</ns1:LineNumber>
<ns1:Id>999990000115474</ns1:Id>
<ns1:LineId>100100095844812</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>102</ns1:LineTypeId>
<ns1:LineTypeName>Item, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1>151</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:ItemNameTxt>AS92689</ns1:ItemNameTxt>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
```

```
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
```

```
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10697</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844812</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844812</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
```

```
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115474</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115474</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[Envoy Standard LaptopΩ'+++ '+++ Ø</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115474</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>Envoy Standard Laptop</ns1:ItemDescription>
<ns1:ItemName>AS92689</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115395</ns1:Id>
<ns1:LineId>100100095844804</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
```

```
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId>200000000000290</ns1:BillPlanId>
<ns1:BillPlan>Invoice Plan - FP</ns1:BillPlan>
<ns1:RevenuePlanId>200000000000291</ns1:RevenuePlanId>
<ns1:RevenuePlan>Revenue Plan - TM BRBR</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
```

```
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
```

```
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10691</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844804</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844804</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115395</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115395</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
```

```
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115395</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>100010024457287</ns5:BillingControlId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2008-01-01</ns5:StartDate>
<ns5:EndDate>2008-01-01</ns5:EndDate>
<ns5:SoftLimitAmount xsi:nil="true"/>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300000000000725</ns5:LinkId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:ProjectId>999991072</ns5:ProjectId>
<ns5:ProjectNumber>SMSEG-00000000000000000073</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115465</ns1:Id>
<ns1:LineId>100100095844892</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
```

```
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
```

```
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
```

```
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10768</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844892</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844892</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115465</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115465</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
```

```
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115465</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115455</ns1:Id>
<ns1:LineId>100100095844882</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
```

```
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
```

```
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10760</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844882</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844882</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
```

```
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115455</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115455</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115455</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115445</ns1:Id>
<ns1:LineId>100100095844873</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
```

```
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
```

```
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
```

```
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10751</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844873</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844873</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115445</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115445</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
```

```
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115445</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115435</ns1:Id>
<ns1:LineId>100100095844862</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
```

```
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
```

```
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity xsi:nil="true"/>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
  <ns1:PriceDuringBillingYn xsi:nil="true"/>
  <ns1:BillingDateMethod xsi:nil="true"/>
  <ns1:SpecificDays xsi:nil="true"/>
  <ns1:GenerateBillingSchedule xsi:nil="true"/>
  <ns1:PriceAsOf xsi:nil="true"/>
  <ns1:CoverageScheduleId xsi:nil="true"/>
  <ns1:PaymentSetId xsi:nil="true"/>
  <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
  <ns1:StandaloneSellingPrice xsi:nil="true"/>
  <ns1:PriceApplicationRule xsi:nil="true"/>
  <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
  <ns1:LinePuid>LINE-10742</ns1:LinePuid>
  <ns1:SourceDocumentId xsi:nil="true"/>
  <ns1:SourceDocumentLineId xsi:nil="true"/>
  <ns1:SourceDocumentSystemCode xsi:nil="true"/>
  <ns1:ContractAllLineDesFlexVA>
  <ns4:LineId>100100095844862</ns4:LineId>
  <ns4:FLEX_PARAM_LineId>100100095844862</ns4:FLEX_PARAM_LineId>
  <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
  <ns4:biLineSegment1 xsi:nil="true"/>
  <ns4:biLineSegment2 xsi:nil="true"/>
  <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
  <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
  <ns4:pcChrgsNltplr xsi:nil="true"/>
```

```
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115435</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115435</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115435</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115425</ns1:Id>
<ns1:LineId>100100095844852</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
```

```
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
```

```
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
```

```
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10733</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844852</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844852</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115425</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115425</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
```

```
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115425</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115415</ns1:Id>
<ns1:LineId>100100095844842</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
```

```
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
```

```
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10724</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844842</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844842</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
```

```
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115415</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115415</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115415</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115405</ns1:Id>
<ns1:LineId>100100095844832</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
```

```
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
```

```
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
```

```
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10716</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844832</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844832</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115405</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115405</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
```

```
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115405</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115485</ns1:Id>
<ns1:LineId>100100095844819</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
```

```
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10703</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844819</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844819</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
```

```
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115485</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115485</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115485</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>6</ns1:LineNumber>
<ns1:Id>999990000115475</ns1:Id>
<ns1:LineId>100100095844809</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
```

```
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480AIRW1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">1000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
```

```
  <ns1:LastRevenueRecogDate xsi:nil="true"/>
  <ns1:CustomerPONumber xsi:nil="true"/>
  <ns1:DeliveryDate xsi:nil="true"/>
  <ns1:SupplierId xsi:nil="true"/>
  <ns1:Supplier xsi:nil="true"/>
  <ns1:SupplierSiteId xsi:nil="true"/>
  <ns1:SupplierSiteName xsi:nil="true"/>
  <ns1:RecvInvOrgId xsi:nil="true"/>
  <ns1:RecInvOrgName xsi:nil="true"/>
  <ns1:RecvLocationId xsi:nil="true"/>
  <ns1:ShipToOrgLocation xsi:nil="true"/>
  <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
  <ns1:FOBCode xsi:nil="true"/>
  <ns1:FOB xsi:nil="true"/>
  <ns1:FreightTermsCode xsi:nil="true"/>
  <ns1:FreightTerms xsi:nil="true"/>
  <ns1:PaymentTermsId xsi:nil="true"/>
  <ns1:PaymentTerms xsi:nil="true"/>
  <ns1:PurchasingCategoryId xsi:nil="true"/>
  <ns1:PurchasingCategory xsi:nil="true"/>
  <ns1:CarrierId xsi:nil="true"/>
  <ns1:CarrierName xsi:nil="true"/>
  <ns1:VendorSiteId xsi:nil="true"/>
  <ns1:OrigSystemReference xsi:nil="true"/>
  <ns1:OrigSystemSourceCode xsi:nil="true"/>
  <ns1:Cognomen>ECM Contract</ns1:Cognomen>
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity xsi:nil="true"/>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
```

```
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10695</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844809</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844809</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115475</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115475</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
```

```
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Aircraft WingΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115475</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Aircraft Wing</ns1:ItemDescription>
<ns1:ItemName>ECM MD480AIRW1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115396</ns1:Id>
<ns1:LineId>100100095844805</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
```

```
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId>200000000000288</ns1:BillPlanId>
<ns1:BillPlan>Invoice Plan - TM BRBR</ns1:BillPlan>
<ns1:RevenuePlanId>200000000000289</ns1:RevenuePlanId>
<ns1:RevenuePlan>Revenue Plan - FP</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-25028</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844805</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844805</ns4:FLEX_PARAM_LineId>
```

```
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115396</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115396</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115396</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>100010024457293</ns5:BillingControlId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2008-01-01</ns5:StartDate>
<ns5:EndDate>2008-01-01</ns5:EndDate>
<ns5:SoftLimitAmount xsi:nil="true"/>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
```

```
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300000000000726</ns5:LinkId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:ProjectId>999991072</ns5:ProjectId>
<ns5:ProjectNumber>SMSEG-00000000000000000073</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115466</ns1:Id>
<ns1:LineId>100100095844893</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
```

```
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
```

```
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity xsi:nil="true"/>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
  <ns1:PriceDuringBillingYn xsi:nil="true"/>
  <ns1:BillingDateMethod xsi:nil="true"/>
  <ns1:SpecificDays xsi:nil="true"/>
  <ns1:GenerateBillingSchedule xsi:nil="true"/>
  <ns1:PriceAsOf xsi:nil="true"/>
  <ns1:CoverageScheduleId xsi:nil="true"/>
  <ns1:PaymentSetId xsi:nil="true"/>
  <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
  <ns1:StandaloneSellingPrice xsi:nil="true"/>
  <ns1:PriceApplicationRule xsi:nil="true"/>
  <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
  <ns1:LinePuid>LINE-25039</ns1:LinePuid>
  <ns1:SourceDocumentId xsi:nil="true"/>
  <ns1:SourceDocumentLineId xsi:nil="true"/>
  <ns1:SourceDocumentSystemCode xsi:nil="true"/>
  <ns1:ContractAllLineDesFlexVA>
  <ns4:LineId>100100095844893</ns4:LineId>
  <ns4:FLEX_PARAM_LineId>100100095844893</ns4:FLEX_PARAM_LineId>
  <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
  <ns4:biLineSegment1 xsi:nil="true"/>
  <ns4:biLineSegment2 xsi:nil="true"/>
  <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
  <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
  <ns4:pcChrgsNltplr xsi:nil="true"/>
```

```
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115466</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115466</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115466</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115456</ns1:Id>
<ns1:LineId>100100095844883</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
```

```
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
```

```
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
```

```
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-25037</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844883</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844883</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115456</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115456</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
```

```
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115456</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115446</ns1:Id>
<ns1:LineId>100100095844874</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
```

```
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
```

```
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10752</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844874</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844874</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
```

```
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115446</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115446</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115446</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115436</ns1:Id>
<ns1:LineId>100100095844863</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
```

```
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
```

```
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
```

```
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-25035</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844863</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844863</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115436</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115436</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
```

```
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115436</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115426</ns1:Id>
<ns1:LineId>100100095844853</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
```

```
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10734</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844853</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844853</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
```

```
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115426</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115426</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115426</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115416</ns1:Id>
<ns1:LineId>100100095844843</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
```

```
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
```

```
  <ns1:LastRevenueRecogDate xsi:nil="true"/>
  <ns1:CustomerPONumber xsi:nil="true"/>
  <ns1:DeliveryDate xsi:nil="true"/>
  <ns1:SupplierId xsi:nil="true"/>
  <ns1:Supplier xsi:nil="true"/>
  <ns1:SupplierSiteId xsi:nil="true"/>
  <ns1:SupplierSiteName xsi:nil="true"/>
  <ns1:RecvInvOrgId xsi:nil="true"/>
  <ns1:RecInvOrgName xsi:nil="true"/>
  <ns1:RecvLocationId xsi:nil="true"/>
  <ns1:ShipToOrgLocation xsi:nil="true"/>
  <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
  <ns1:FOBCode xsi:nil="true"/>
  <ns1:FOB xsi:nil="true"/>
  <ns1:FreightTermsCode xsi:nil="true"/>
  <ns1:FreightTerms xsi:nil="true"/>
  <ns1:PaymentTermsId xsi:nil="true"/>
  <ns1:PaymentTerms xsi:nil="true"/>
  <ns1:PurchasingCategoryId xsi:nil="true"/>
  <ns1:PurchasingCategory xsi:nil="true"/>
  <ns1:CarrierId xsi:nil="true"/>
  <ns1:CarrierName xsi:nil="true"/>
  <ns1:VendorSiteId xsi:nil="true"/>
  <ns1:OrigSystemReference xsi:nil="true"/>
  <ns1:OrigSystemSourceCode xsi:nil="true"/>
  <ns1:Cognomen>ECM Contract</ns1:Cognomen>
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity xsi:nil="true"/>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
```

```
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-25033</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844843</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844843</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115416</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115416</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
```

```
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115416</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115406</ns1:Id>
<ns1:LineId>100100095844833</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
```

```
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-25031</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844833</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844833</ns4:FLEX_PARAM_LineId>
```

```
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115406</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115406</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115406</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115486</ns1:Id>
<ns1:LineId>100100095844823</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
```

```
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
```

```
 <ns1:ExemptReasonCode xsi:nil="true"/>
 <ns1:ExemptReason xsi:nil="true"/>
 <ns1:LastRevenueRecogDate xsi:nil="true"/>
 <ns1:CustomerPONumber xsi:nil="true"/>
 <ns1:DeliveryDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
```

```
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10707</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844823</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844823</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115486</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115486</ns1:Id>
```

```
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115486</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>7</ns1:LineNumber>
<ns1:Id>999990000115476</ns1:Id>
<ns1:LineId>100100095844813</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480FUSE</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">2000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
```

```
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10698</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
```

```
<ns4:LineId>100100095844813</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844813</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115476</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115476</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 FuselageΩ'+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115476</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Fuselage</ns1:ItemDescription>
<ns1:ItemName>ECM MD480FUSE</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115397</ns1:Id>
<ns1:LineId>100100095844806</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
```

```
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId>200000000000290</ns1:BillPlanId>
<ns1:BillPlan>Invoice Plan - FP</ns1:BillPlan>
<ns1:RevenuePlanId>200000000000291</ns1:RevenuePlanId>
<ns1:RevenuePlan>Revenue Plan - TM BRBR</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
```

```
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
```

```
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10692</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844806</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844806</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115397</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
```

```
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115397</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115397</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>100010024457288</ns5:BillingControlId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2008-01-01</ns5:StartDate>
<ns5:EndDate>2008-01-01</ns5:EndDate>
<ns5:SoftLimitAmount xsi:nil="true"/>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300000000000727</ns5:LinkId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:ProjectId>999991072</ns5:ProjectId>
<ns5:ProjectNumber>SMSEG-00000000000000000073</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115467</ns1:Id>
<ns1:LineId>100100095844894</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
```

```
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
```

```
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
```

```
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10769</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844894</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844894</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115467</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115467</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
```

```
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115467</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115457</ns1:Id>
<ns1:LineId>100100095844884</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
```

```
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10761</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844884</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844884</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
```

```
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115457</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115457</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115457</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115447</ns1:Id>
<ns1:LineId>100100095844875</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
```

```
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
```

```
  <ns1:LastRevenueRecogDate xsi:nil="true"/>
  <ns1:CustomerPONumber xsi:nil="true"/>
  <ns1:DeliveryDate xsi:nil="true"/>
  <ns1:SupplierId xsi:nil="true"/>
  <ns1:Supplier xsi:nil="true"/>
  <ns1:SupplierSiteId xsi:nil="true"/>
  <ns1:SupplierSiteName xsi:nil="true"/>
  <ns1:RecvInvOrgId xsi:nil="true"/>
  <ns1:RecInvOrgName xsi:nil="true"/>
  <ns1:RecvLocationId xsi:nil="true"/>
  <ns1:ShipToOrgLocation xsi:nil="true"/>
  <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
  <ns1:FOBCode xsi:nil="true"/>
  <ns1:FOB xsi:nil="true"/>
  <ns1:FreightTermsCode xsi:nil="true"/>
  <ns1:FreightTerms xsi:nil="true"/>
  <ns1:PaymentTermsId xsi:nil="true"/>
  <ns1:PaymentTerms xsi:nil="true"/>
  <ns1:PurchasingCategoryId xsi:nil="true"/>
  <ns1:PurchasingCategory xsi:nil="true"/>
  <ns1:CarrierId xsi:nil="true"/>
  <ns1:CarrierName xsi:nil="true"/>
  <ns1:VendorSiteId xsi:nil="true"/>
  <ns1:OrigSystemReference xsi:nil="true"/>
  <ns1:OrigSystemSourceCode xsi:nil="true"/>
  <ns1:Cognomen>ECM Contract</ns1:Cognomen>
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity xsi:nil="true"/>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
```

```
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10753</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844875</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844875</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115447</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115447</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
```

```
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115447</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115437</ns1:Id>
<ns1:LineId>100100095844864</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
```

```
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10743</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844864</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844864</ns4:FLEX_PARAM_LineId>
```

```
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115437</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115437</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115437</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115427</ns1:Id>
<ns1:LineId>100100095844854</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
```

```
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
```

```
 <ns1:ExemptReasonCode xsi:nil="true"/>
 <ns1:ExemptReason xsi:nil="true"/>
 <ns1:LastRevenueRecogDate xsi:nil="true"/>
 <ns1:CustomerPONumber xsi:nil="true"/>
 <ns1:DeliveryDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
```

```
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10735</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844854</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844854</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115427</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115427</ns1:Id>
```

```
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115427</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115417</ns1:Id>
<ns1:LineId>100100095844844</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
```

```
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10725</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
```

```
<ns4:LineId>100100095844844</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844844</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115417</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115417</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115417</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115407</ns1:Id>
<ns1:LineId>100100095844834</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
```

```
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
```

```
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
```

```
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10717</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844834</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844834</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115407</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
```

```
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115407</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115407</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115487</ns1:Id>
<ns1:LineId>100100095844824</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
```

```
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
```

```
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10708</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
```

```
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844824</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844824</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115487</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115487</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115487</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>8</ns1:LineNumber>
<ns1:Id>999990000115477</ns1:Id>
<ns1:LineId>100100095844814</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
```

```
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480CPCON</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">3000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
```

```
 <ns1:OutputTaxClassMeaning xsi:nil="true"/>
 <ns1:TaxExemptionControl xsi:nil="true"/>
 <ns1:TaxExemptionControlMeaning xsi:nil="true"/>
 <ns1:ExemptCertificateNumber xsi:nil="true"/>
 <ns1:ExemptReasonCode xsi:nil="true"/>
 <ns1:ExemptReason xsi:nil="true"/>
 <ns1:LastRevenueRecogDate xsi:nil="true"/>
 <ns1:CustomerPONumber xsi:nil="true"/>
 <ns1:DeliveryDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
```

```
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10699</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844814</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844814</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115477</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
```

```
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115477</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Cokcpit ControlΩ'+++ '+++ 'Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115477</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Cokcpit Control</ns1:ItemDescription>
<ns1:ItemName>ECM MD480CPCON</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115398</ns1:Id>
<ns1:LineId>100100095844807</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
```

```
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId>200000000000288</ns1:BillPlanId>
<ns1:BillPlan>Invoice Plan - TM BRBR</ns1:BillPlan>
<ns1:RevenuePlanId>200000000000289</ns1:RevenuePlanId>
<ns1:RevenuePlan>Revenue Plan - FP</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity xsi:nil="true"/>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
  <ns1:PriceDuringBillingYn xsi:nil="true"/>
  <ns1:BillingDateMethod xsi:nil="true"/>
  <ns1:SpecificDays xsi:nil="true"/>
  <ns1:GenerateBillingSchedule xsi:nil="true"/>
  <ns1:PriceAsOf xsi:nil="true"/>
  <ns1:CoverageScheduleId xsi:nil="true"/>
  <ns1:PaymentSetId xsi:nil="true"/>
  <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
  <ns1:StandaloneSellingPrice xsi:nil="true"/>
  <ns1:PriceApplicationRule xsi:nil="true"/>
  <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
  <ns1:LinePuid>LINE-10693</ns1:LinePuid>
```

```
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844807</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844807</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115398</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115398</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115398</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>100010024457294</ns5:BillingControlId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
```

```
<ns5:StartDate>2008-01-01</ns5:StartDate>
<ns5:EndDate>2008-01-01</ns5:EndDate>
<ns5:SoftLimitAmount xsi:nil="true"/>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300000000000728</ns5:LinkId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:ProjectId>999991072</ns5:ProjectId>
<ns5:ProjectNumber>SMSEG-00000000000000000073</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115468</ns1:Id>
<ns1:LineId>100100095844895</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
```

```
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10770</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844895</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844895</ns4:FLEX_PARAM_LineId>
```

```
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115468</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115468</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115468</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115458</ns1:Id>
<ns1:LineId>100100095844885</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
```

```
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
```

```
 <ns1:ExemptReasonCode xsi:nil="true"/>
 <ns1:ExemptReason xsi:nil="true"/>
 <ns1:LastRevenueRecogDate xsi:nil="true"/>
 <ns1:CustomerPONumber xsi:nil="true"/>
 <ns1:DeliveryDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
```

```
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10762</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844885</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844885</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115458</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115458</ns1:Id>
```

```
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115458</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115448</ns1:Id>
<ns1:LineId>100100095844872</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
```

```
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
```

```
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10750</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
```

```
<ns4:LineId>100100095844872</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844872</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115448</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115448</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115448</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115438</ns1:Id>
<ns1:LineId>100100095844865</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
```

```
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
```

```
 <ns1:TaxExemptionControlMeaning xsi:nil="true"/>
 <ns1:ExemptCertificateNumber xsi:nil="true"/>
 <ns1:ExemptReasonCode xsi:nil="true"/>
 <ns1:ExemptReason xsi:nil="true"/>
 <ns1:LastRevenueRecogDate xsi:nil="true"/>
 <ns1:CustomerPONumber xsi:nil="true"/>
 <ns1:DeliveryDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
```

```
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10744</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844865</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844865</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115438</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
```

```
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115438</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115438</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115428</ns1:Id>
<ns1:LineId>100100095844855</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
```

```
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
```

```
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10736</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
```

```
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844855</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844855</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115428</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115428</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115428</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115418</ns1:Id>
<ns1:LineId>100100095844845</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
```

```
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
```

```
 <ns1:OutputTaxClassMeaning xsi:nil="true"/>
 <ns1:TaxExemptionControl xsi:nil="true"/>
 <ns1:TaxExemptionControlMeaning xsi:nil="true"/>
 <ns1:ExemptCertificateNumber xsi:nil="true"/>
 <ns1:ExemptReasonCode xsi:nil="true"/>
 <ns1:ExemptReason xsi:nil="true"/>
 <ns1:LastRevenueRecogDate xsi:nil="true"/>
 <ns1:CustomerPONumber xsi:nil="true"/>
 <ns1:DeliveryDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
```

```
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10726</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844845</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844845</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115418</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
```

```
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115418</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115418</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115408</ns1:Id>
<ns1:LineId>100100095844835</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
```

```
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity xsi:nil="true"/>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
  <ns1:PriceDuringBillingYn xsi:nil="true"/>
  <ns1:BillingDateMethod xsi:nil="true"/>
  <ns1:SpecificDays xsi:nil="true"/>
  <ns1:GenerateBillingSchedule xsi:nil="true"/>
  <ns1:PriceAsOf xsi:nil="true"/>
  <ns1:CoverageScheduleId xsi:nil="true"/>
  <ns1:PaymentSetId xsi:nil="true"/>
  <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
  <ns1:StandaloneSellingPrice xsi:nil="true"/>
  <ns1:PriceApplicationRule xsi:nil="true"/>
  <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
  <ns1:LinePuid>LINE-10718</ns1:LinePuid>
```

```
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844835</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844835</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115408</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115408</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115408</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115488</ns1:Id>
<ns1:LineId>100100095844825</ns1:LineId>
```

```
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
```

```
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
```

```
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10709</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844825</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844825</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115488</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
```

```
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115488</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115488</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>9</ns1:LineNumber>
<ns1:Id>999990000115478</ns1:Id>
<ns1:LineId>100100095844815</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480TAIL1</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">4000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
```

```
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
```

```
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
```

```
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-25030</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844815</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844815</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115478</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115478</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Tail SectionΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115478</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Tail Section</ns1:ItemDescription>
<ns1:ItemName>ECM MD480TAIL1</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
```

```
<ns1:Id>999990000115399</ns1:Id>
<ns1:LineId>100100095844808</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId>200000000000290</ns1:BillPlanId>
<ns1:BillPlan>Invoice Plan - FP</ns1:BillPlan>
<ns1:RevenuePlanId>200000000000291</ns1:RevenuePlanId>
```

```
<ns1:RevenuePlan>Revenue Plan - TM BRBR</ns1:RevenuePlan>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
```

```
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10694</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844808</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844808</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:Id>999990000115399</ns1:Id>
 <ns1:Language>IW</ns1:Language>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:Comments xsi:nil="true"/>
 <ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
 <ns1:ItemName>ECM MD480LG</ns1:ItemName>
```

```
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115399</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115399</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:BillingControl>
<ns5:BillingControlId>100010024457289</ns5:BillingControlId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2008-01-01</ns5:StartDate>
<ns5:EndDate>2008-01-01</ns5:EndDate>
<ns5:SoftLimitAmount xsi:nil="true"/>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:AssociatedProject>
<ns5:LinkId>300000000000729</ns5:LinkId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:ProjectId>999991072</ns5:ProjectId>
<ns5:ProjectNumber>SMSEG-00000000000000000073</ns5:ProjectNumber>
<ns5:ProjElementId xsi:nil="true"/>
<ns5:TaskNumber xsi:nil="true"/>
<ns5:FundingAmount xsi:nil="true"/>
<ns5:PercentComplete xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:AssociatedProject>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115479</ns1:Id>
<ns1:LineId>100100095844816</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
```

```
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
```

```
 <ns1:TaxExemptionControlMeaning xsi:nil="true"/>
 <ns1:ExemptCertificateNumber xsi:nil="true"/>
 <ns1:ExemptReasonCode xsi:nil="true"/>
 <ns1:ExemptReason xsi:nil="true"/>
 <ns1:LastRevenueRecogDate xsi:nil="true"/>
 <ns1:CustomerPONumber xsi:nil="true"/>
 <ns1:DeliveryDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
```

```
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10700</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844816</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844816</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115479</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
```

```
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115479</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115479</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115489</ns1:Id>
<ns1:LineId>100100095844826</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
```

```
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
```

```
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10710</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
```

```
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844826</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844826</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115489</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115489</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115489</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115409</ns1:Id>
<ns1:LineId>100100095844836</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
```

```
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
```

```
 <ns1:OutputTaxClassMeaning xsi:nil="true"/>
 <ns1:TaxExemptionControl xsi:nil="true"/>
 <ns1:TaxExemptionControlMeaning xsi:nil="true"/>
 <ns1:ExemptCertificateNumber xsi:nil="true"/>
 <ns1:ExemptReasonCode xsi:nil="true"/>
 <ns1:ExemptReason xsi:nil="true"/>
 <ns1:LastRevenueRecogDate xsi:nil="true"/>
 <ns1:CustomerPONumber xsi:nil="true"/>
 <ns1:DeliveryDate xsi:nil="true"/>
 <ns1:SupplierId xsi:nil="true"/>
 <ns1:Supplier xsi:nil="true"/>
 <ns1:SupplierSiteId xsi:nil="true"/>
 <ns1:SupplierSiteName xsi:nil="true"/>
 <ns1:RecvInvOrgId xsi:nil="true"/>
 <ns1:RecInvOrgName xsi:nil="true"/>
 <ns1:RecvLocationId xsi:nil="true"/>
 <ns1:ShipToOrgLocation xsi:nil="true"/>
 <ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
 <ns1:FOBCode xsi:nil="true"/>
 <ns1:FOB xsi:nil="true"/>
 <ns1:FreightTermsCode xsi:nil="true"/>
 <ns1:FreightTerms xsi:nil="true"/>
 <ns1:PaymentTermsId xsi:nil="true"/>
 <ns1:PaymentTerms xsi:nil="true"/>
 <ns1:PurchasingCategoryId xsi:nil="true"/>
 <ns1:PurchasingCategory xsi:nil="true"/>
 <ns1:CarrierId xsi:nil="true"/>
 <ns1:CarrierName xsi:nil="true"/>
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
```

```
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10719</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844836</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844836</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115409</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
```

```
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115409</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115409</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115419</ns1:Id>
<ns1:LineId>100100095844846</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
```

```
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
```

```
  <ns1:TaxAmount xsi:nil="true"/>
  <ns1:ExternalSource xsi:nil="true"/>
  <ns1:ExternalKey xsi:nil="true"/>
  <ns1:ExternalItemKey xsi:nil="true"/>
  <ns1:ExternalItemReference1 xsi:nil="true"/>
  <ns1:ExternalItemReference2 xsi:nil="true"/>
  <ns1:ExternalItemReference3 xsi:nil="true"/>
  <ns1:ExternalItemReference4 xsi:nil="true"/>
  <ns1:ExternalItemReference5 xsi:nil="true"/>
  <ns1:ExternalItemSource xsi:nil="true"/>
  <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
  <ns1:InvoiceRuleId xsi:nil="true"/>
  <ns1:SourceSystemAttributes xsi:nil="true"/>
  <ns1:BillToAccountId>1006</ns1:BillToAccountId>
  <ns1:AccountRuleId xsi:nil="true"/>
  <ns1:BillingFrequency xsi:nil="true"/>
  <ns1:InvoiceText xsi:nil="true"/>
  <ns1:OrderSource xsi:nil="true"/>
  <ns1:PriceUOM xsi:nil="true"/>
  <ns1:ShipToPartyId xsi:nil="true"/>
  <ns1:ShipToPartySiteId xsi:nil="true"/>
  <ns1:DurationQuantity xsi:nil="true"/>
  <ns1:LineSubTotal xsi:nil="true"/>
  <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
  <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
  <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
  <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
  <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
  <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
  <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
  <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
  <ns1:ShipToPartyName xsi:nil="true"/>
  <ns1:ShipToPartySiteLocation xsi:nil="true"/>
  <ns1:TaxClassificationMeaning xsi:nil="true"/>
  <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
  <ns1:ArInterfaceYn xsi:nil="true"/>
  <ns1:OrderLineNumber xsi:nil="true"/>
  <ns1:OrderNumber xsi:nil="true"/>
  <ns1:OrderId xsi:nil="true"/>
  <ns1:OrderLineId xsi:nil="true"/>
  <ns1:PricingError xsi:nil="true"/>
  <ns1:InvoiceRuleMeaning xsi:nil="true"/>
  <ns1:AccountRuleMeaning xsi:nil="true"/>
  <ns1:BillingFrequencyMeaning xsi:nil="true"/>
  <ns1:PaymentTermsMeaning xsi:nil="true"/>
  <ns1:CancelledAmount xsi:nil="true"/>
  <ns1:CreditedAmount xsi:nil="true"/>
  <ns1:TerminatedAmount xsi:nil="true"/>
  <ns1:UnbilledAmount xsi:nil="true"/>
  <ns1:ReturnCreditMethodCode xsi:nil="true"/>
  <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
  <ns1:TaxError xsi:nil="true"/>
  <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
  <ns1:PriceDuringBillingYn xsi:nil="true"/>
  <ns1:BillingDateMethod xsi:nil="true"/>
  <ns1:SpecificDays xsi:nil="true"/>
  <ns1:GenerateBillingSchedule xsi:nil="true"/>
  <ns1:PriceAsOf xsi:nil="true"/>
  <ns1:CoverageScheduleId xsi:nil="true"/>
  <ns1:PaymentSetId xsi:nil="true"/>
  <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
  <ns1:StandaloneSellingPrice xsi:nil="true"/>
  <ns1:PriceApplicationRule xsi:nil="true"/>
  <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
  <ns1:LinePuid>LINE-10727</ns1:LinePuid>
```

```
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844846</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844846</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115419</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115419</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115419</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115429</ns1:Id>
<ns1:LineId>100100095844856</ns1:LineId>
```

```
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
```

```
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
<ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
```

```
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
<ns1:ArInterfaceYn xsi:nil="true"/>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning xsi:nil="true"/>
<ns1:AccountRuleMeaning xsi:nil="true"/>
<ns1:BillingFrequencyMeaning xsi:nil="true"/>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
<ns1:PriceDuringBillingYn xsi:nil="true"/>
<ns1:BillingDateMethod xsi:nil="true"/>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf xsi:nil="true"/>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10737</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844856</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844856</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115429</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
```

```
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115429</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115429</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115439</ns1:Id>
<ns1:LineId>100100095844866</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
```

```
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
```

```
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
```

```
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10745</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844866</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844866</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115439</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115439</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115439</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
```

```
<ns1:Id>9999900000115449</ns1:Id>
<ns1:LineId>100100095844876</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
```

```
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
<ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
<ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
```

```
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10754</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844876</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844876</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:Id>999990000115449</ns1:Id>
 <ns1:Language>IW</ns1:Language>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:Comments xsi:nil="true"/>
 <ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
 <ns1:ItemName>ECM MD480LG</ns1:ItemName>
```

```
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115449</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115449</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115459</ns1:Id>
<ns1:LineId>100100095844886</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
```

```
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
```

```
 <ns1:VendorSiteId xsi:nil="true"/>
 <ns1:OrigSystemReference xsi:nil="true"/>
 <ns1:OrigSystemSourceCode xsi:nil="true"/>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:TaxAmount xsi:nil="true"/>
 <ns1:ExternalSource xsi:nil="true"/>
 <ns1:ExternalKey xsi:nil="true"/>
 <ns1:ExternalItemKey xsi:nil="true"/>
 <ns1:ExternalItemReference1 xsi:nil="true"/>
 <ns1:ExternalItemReference2 xsi:nil="true"/>
 <ns1:ExternalItemReference3 xsi:nil="true"/>
 <ns1:ExternalItemReference4 xsi:nil="true"/>
 <ns1:ExternalItemReference5 xsi:nil="true"/>
 <ns1:ExternalItemSource xsi:nil="true"/>
 <ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
 <ns1:InvoiceRuleId xsi:nil="true"/>
 <ns1:SourceSystemAttributes xsi:nil="true"/>
 <ns1:BillToAccountId>1006</ns1:BillToAccountId>
 <ns1:AccountRuleId xsi:nil="true"/>
 <ns1:BillingFrequency xsi:nil="true"/>
 <ns1:InvoiceText xsi:nil="true"/>
 <ns1:OrderSource xsi:nil="true"/>
 <ns1:PriceUOM xsi:nil="true"/>
 <ns1:ShipToPartyId xsi:nil="true"/>
 <ns1:ShipToPartySiteId xsi:nil="true"/>
 <ns1:DurationQuantity xsi:nil="true"/>
 <ns1:LineSubTotal xsi:nil="true"/>
 <ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
 <ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
 <ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
 <ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
 <ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
```

```
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>LINE-10763</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:ContractAllLineDesFlexVA>
<ns4:LineId>100100095844886</ns4:LineId>
<ns4:FLEX_PARAM_LineId>100100095844886</ns4:FLEX_PARAM_LineId>
<ns4:_SPMConLineGSegment1 xsi:nil="true"/>
<ns4:biLineSegment1 xsi:nil="true"/>
<ns4:biLineSegment2 xsi:nil="true"/>
<ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
<ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
<ns4:pcChrgsNltplr xsi:nil="true"/>
<ns4:zrel9Line xsi:nil="true"/>
<ns4:biqaCode xsi:nil="true"/>
<ns4:pjbContractLine14 xsi:nil="true"/>
<ns4:pjbContractLine15 xsi:nil="true"/>
<ns4:zokcLineId xsi:nil="true"/>
<ns4:zokcLineId_Display xsi:nil="true"/>
<ns4:__FLEX_Context xsi:nil="true"/>
<ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
</ns1:ContractAllLineDesFlexVA>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115459</ns1:Id>
<ns1:Language>IW</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115459</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115459</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
```

```
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>999990000115469</ns1:Id>
<ns1:LineId>100100095844896</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:LineTypeId>101</ns1:LineTypeId>
<ns1:LineTypeName>Free-form, project</ns1:LineTypeName>
<ns1:StsCode>ACTIVE</ns1:StsCode>
<ns1:LineStatus>Active</ns1:LineStatus>
<ns1:Object1Id1 xsi:nil="true"/>
<ns1:Object1Id2 xsi:nil="true"/>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:ItemNameTxt>ECM MD480LG</ns1:ItemNameTxt>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:StartDate>2008-09-05</ns1:StartDate>
<ns1:EndDate xsi:nil="true"/>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>EA</ns1:UOMCode>
<ns1:UnitOfMeasure>EA</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="EA">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount currencyCode="USD">5000</ns1:LineAmount>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode xsi:nil="true"/>
<ns1:CommitLevel xsi:nil="true"/>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId>1006</ns1:ShipToAccountId>
<ns1:ShipToAccount>Computer Service and Rentals</ns1:ShipToAccount>
<ns1:ShipToAccountNumber>1006</ns1:ShipToAccountNumber>
<ns1:ShipToSiteUseId>1028</ns1:ShipToSiteUseId>
<ns1:ShipToSite>Tempe (OPS)</ns1:ShipToSite>
<ns1:ShipInvOrgId>204</ns1:ShipInvOrgId>
<ns1:WareHouse>Vision Operations</ns1:WareHouse>
<ns1:BillPlanId xsi:nil="true"/>
```

```
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount xsi:nil="true"/>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>Y</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId xsi:nil="true"/>
<ns1:PaymentTerms xsi:nil="true"/>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource xsi:nil="true"/>
<ns1:ExternalKey xsi:nil="true"/>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId xsi:nil="true"/>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId>1006</ns1:BillToAccountId>
<ns1:AccountRuleId xsi:nil="true"/>
<ns1:BillingFrequency xsi:nil="true"/>
<ns1:InvoiceText xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity xsi:nil="true"/>
<ns1:LineSubTotal xsi:nil="true"/>
<ns1:PriceItemQuantity unitCode="EA">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>EA</ns1:PriceItemUOM>
<ns1:BillToAccountDescription>Computer Service and Rentals</ns1:BillToAccountDescription>
<ns1:BillToAccount>Computer Service and Rentals</ns1:BillToAccount>
<ns1:BillToAccountNumber>1006</ns1:BillToAccountNumber>
```

```
 <ns1:BillToSiteUseLocation>NT2</ns1:BillToSiteUseLocation>
 <ns1:BillToSiteUseId>1804</ns1:BillToSiteUseId>
 <ns1:BillToAddress>234 Lester B. Pearson Road,IQUALUIT NUNAVUT TERRITORIES I2W 3E4,CANADA</
ns1:BillToAddress>
 <ns1:ShipToPartyName xsi:nil="true"/>
 <ns1:ShipToPartySiteLocation xsi:nil="true"/>
 <ns1:TaxClassificationMeaning xsi:nil="true"/>
 <ns1:InvTrxTypeId>1001</ns1:InvTrxTypeId>
 <ns1:ArInterfaceYn xsi:nil="true"/>
 <ns1:OrderLineNumber xsi:nil="true"/>
 <ns1:OrderNumber xsi:nil="true"/>
 <ns1:OrderId xsi:nil="true"/>
 <ns1:OrderLineId xsi:nil="true"/>
 <ns1:PricingError xsi:nil="true"/>
 <ns1:InvoiceRuleMeaning xsi:nil="true"/>
 <ns1:AccountRuleMeaning xsi:nil="true"/>
 <ns1:BillingFrequencyMeaning xsi:nil="true"/>
 <ns1:PaymentTermsMeaning xsi:nil="true"/>
 <ns1:CancelledAmount xsi:nil="true"/>
 <ns1:CreditedAmount xsi:nil="true"/>
 <ns1:TerminatedAmount xsi:nil="true"/>
 <ns1:UnbilledAmount xsi:nil="true"/>
 <ns1:ReturnCreditMethodCode xsi:nil="true"/>
 <ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
 <ns1:TaxError xsi:nil="true"/>
 <ns1:ContractSubscriptionLineRenewalType xsi:nil="true"/>
 <ns1:PriceDuringBillingYn xsi:nil="true"/>
 <ns1:BillingDateMethod xsi:nil="true"/>
 <ns1:SpecificDays xsi:nil="true"/>
 <ns1:GenerateBillingSchedule xsi:nil="true"/>
 <ns1:PriceAsOf xsi:nil="true"/>
 <ns1:CoverageScheduleId xsi:nil="true"/>
 <ns1:PaymentSetId xsi:nil="true"/>
 <ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
 <ns1:StandaloneSellingPrice xsi:nil="true"/>
 <ns1:PriceApplicationRule xsi:nil="true"/>
 <ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
 <ns1:LinePuid>LINE-10771</ns1:LinePuid>
 <ns1:SourceDocumentId xsi:nil="true"/>
 <ns1:SourceDocumentLineId xsi:nil="true"/>
 <ns1:SourceDocumentSystemCode xsi:nil="true"/>
 <ns1:ContractAllLineDesFlexVA>
 <ns4:LineId>100100095844896</ns4:LineId>
 <ns4:FLEX_PARAM_LineId>100100095844896</ns4:FLEX_PARAM_LineId>
 <ns4:_SPMConLineGSegment1 xsi:nil="true"/>
 <ns4:biLineSegment1 xsi:nil="true"/>
 <ns4:biLineSegment2 xsi:nil="true"/>
 <ns4:bi5fline5fsegment35fnotBi xsi:nil="true"/>
 <ns4:pcSbsNtNtsNltplr xsi:nil="true"/>
 <ns4:pcChrgsNltplr xsi:nil="true"/>
 <ns4:zrel9Line xsi:nil="true"/>
 <ns4:biqaCode xsi:nil="true"/>
 <ns4:pjbContractLine14 xsi:nil="true"/>
 <ns4:pjbContractLine15 xsi:nil="true"/>
 <ns4:zokcLineId xsi:nil="true"/>
 <ns4:zokcLineId_Display xsi:nil="true"/>
 <ns4:__FLEX_Context xsi:nil="true"/>
 <ns4:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns4:_FLEX_NumOfSegments>11</ns4:_FLEX_NumOfSegments>
 </ns1:ContractAllLineDesFlexVA>
 <ns1:ContractLineTranslation>
 <ns1:Cognomen>ECM Contract</ns1:Cognomen>
 <ns1:Id>999990000115469</ns1:Id>
 <ns1:Language>IW</ns1:Language>
 <ns1:MajorVersion>2</ns1:MajorVersion>
 <ns1:Comments xsi:nil="true"/>
```

```
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>[ECM Contract Ω'+++Ø</ns1:Cognomen>
<ns1:Id>999990000115469</ns1:Id>
<ns1:Language>KO</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>[MD-480 Landing GearΩ'+++ '+++Ø</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>KO</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
<ns1:ContractLineTranslation>
<ns1:Cognomen>ECM Contract</ns1:Cognomen>
<ns1:Id>999990000115469</ns1:Id>
<ns1:Language>US</ns1:Language>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Comments xsi:nil="true"/>
<ns1:ItemDescription>MD-480 Landing Gear</ns1:ItemDescription>
<ns1:ItemName>ECM MD480LG</ns1:ItemName>
<ns1:LineDescription xsi:nil="true"/>
<ns1:LineName xsi:nil="true"/>
<ns1:LineReference xsi:nil="true"/>
<ns1:SourceLanguage>US</ns1:SourceLanguage>
</ns1:ContractLineTranslation>
</ns1:ContractLine>
<ns1:SalesCredit>
<ns1:Id>999990000046800</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Percent>20</ns1:Percent>
<ns1:SalesrepId>100000008143166</ns1:SalesrepId>
<ns1:SalesCreditTypeId>1</ns1:SalesCreditTypeId>
<ns1:ActiveFlag>true</ns1:ActiveFlag>
<ns1:SalesrepName>Caroline Snel</ns1:SalesrepName>
<ns1:StartDate xsi:nil="true"/>
<ns1:EndDate xsi:nil="true"/>
<ns1:ExternalSourceKey xsi:nil="true"/>
<ns1:ExternalReferenceKey xsi:nil="true"/>
<ns1:SalesCreditType>Quota Sales Credit</ns1:SalesCreditType>
<ns1:SalesCreditPuid>SCRD-41</ns1:SalesCreditPuid>
</ns1:SalesCredit>
<ns1:SalesCredit>
<ns1:Id>999990000046801</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Percent>20</ns1:Percent>
<ns1:SalesrepId>100000008143167</ns1:SalesrepId>
<ns1:SalesCreditTypeId>1</ns1:SalesCreditTypeId>
<ns1:ActiveFlag>true</ns1:ActiveFlag>
<ns1:SalesrepName>Lieke Spundel</ns1:SalesrepName>
<ns1:StartDate xsi:nil="true"/>
<ns1:EndDate xsi:nil="true"/>
<ns1:ExternalSourceKey xsi:nil="true"/>
<ns1:ExternalReferenceKey xsi:nil="true"/>
<ns1:SalesCreditType>Quota Sales Credit</ns1:SalesCreditType>
<ns1:SalesCreditPuid>SCRD-42</ns1:SalesCreditPuid>
</ns1:SalesCredit>
<ns1:SalesCredit>
<ns1:Id>999990000046802</ns1:Id>
```

```
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Percent>20</ns1:Percent>
<ns1:SalesrepId>100000008143168</ns1:SalesrepId>
<ns1:SalesCreditTypeId>1</ns1:SalesCreditTypeId>
<ns1:ActiveFlag>true</ns1:ActiveFlag>
<ns1:SalesrepName>Jacki Williams</ns1:SalesrepName>
<ns1:StartDate xsi:nil="true"/>
<ns1:EndDate xsi:nil="true"/>
<ns1:ExternalSourceKey xsi:nil="true"/>
<ns1:ExternalReferenceKey xsi:nil="true"/>
<ns1:SalesCreditType>Quota Sales Credit</ns1:SalesCreditType>
<ns1:SalesCreditPuid>SCRD-43</ns1:SalesCreditPuid>
</ns1:SalesCredit>
<ns1:SalesCredit>
<ns1:Id>999990000046803</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Percent>20</ns1:Percent>
<ns1:SalesrepId>100000008143169</ns1:SalesrepId>
<ns1:SalesCreditTypeId>1</ns1:SalesCreditTypeId>
<ns1:ActiveFlag>true</ns1:ActiveFlag>
<ns1:SalesrepName>Rhonda Swanson</ns1:SalesrepName>
<ns1:StartDate xsi:nil="true"/>
<ns1:EndDate xsi:nil="true"/>
<ns1:ExternalSourceKey xsi:nil="true"/>
<ns1:ExternalReferenceKey xsi:nil="true"/>
<ns1:SalesCreditType>Quota Sales Credit</ns1:SalesCreditType>
<ns1:SalesCreditPuid>SCRD-44</ns1:SalesCreditPuid>
</ns1:SalesCredit>
<ns1:SalesCredit>
<ns1:Id>999990000046804</ns1:Id>
<ns1:MajorVersion>2</ns1:MajorVersion>
<ns1:Percent>20</ns1:Percent>
<ns1:SalesrepId>100000008143170</ns1:SalesrepId>
<ns1:SalesCreditTypeId>1</ns1:SalesCreditTypeId>
<ns1:ActiveFlag>true</ns1:ActiveFlag>
<ns1:SalesrepName>Mike Lamprecht</ns1:SalesrepName>
<ns1:StartDate xsi:nil="true"/>
<ns1:EndDate xsi:nil="true"/>
<ns1:ExternalSourceKey xsi:nil="true"/>
<ns1:ExternalReferenceKey xsi:nil="true"/>
<ns1:SalesCreditType>Quota Sales Credit</ns1:SalesCreditType>
<ns1:SalesCreditPuid>SCRD-45</ns1:SalesCreditPuid>
</ns1:SalesCredit>
<ns1:BillPlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>200000000000288</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:BillMethodId>100000001</ns5:BillMethodId>
<ns5:BillMethodName>Time and Material BRBR Inv PSR</ns5:BillMethodName>
<ns5:BillPlanName>Invoice Plan - TM BRBR</ns5:BillPlanName>
<ns5:InvoiceCurrencyOptCode>CONTRACT</ns5:InvoiceCurrencyOptCode>
<ns5:BillingCurrencyType>Contract</ns5:BillingCurrencyType>
<ns5:PaymentTermsId>1000</ns5:PaymentTermsId>
<ns5:PaymentTerms>2/10, Net 30</ns5:PaymentTerms>
<ns5:BillSetNumber>1</ns5:BillSetNumber>
<ns5:BillToCustomerAccountId>1001</ns5:BillToCustomerAccountId>
<ns5:BillToAccountNumber>1001</ns5:BillToAccountNumber>
<ns5:BillToSiteUseId>1006</ns5:BillToSiteUseId>
<ns5:BillToSite>New York (OPS)</ns5:BillToSite>
<ns5:BillToContactId>1009</ns5:BillToContactId>
<ns5:BillToContactName>Mike Kenton</ns5:BillToContactName>
<ns5:BillToContactEmail>sendmail-test-discard@oracle.com</ns5:BillToContactEmail>
<ns5:BillingCycleId>1000000000001</ns5:BillingCycleId>
<ns5:BillingCycle xsi:nil="true"/>
<ns5:LaborInvoiceFormatId>100000010695006</ns5:LaborInvoiceFormatId>
<ns5:LaborInvoiceFormat>Time and Material</ns5:LaborInvoiceFormat>
<ns5:NlInvoiceFormatId>100000011410001</ns5:NlInvoiceFormatId>
```

```
<ns5:NonlaborInvoiceFormat>NL Work Site Exp Cat Format</ns5:NonlaborInvoiceFormat>
<ns5:EventsInvoiceFormatId>100000011407004</ns5:EventsInvoiceFormatId>
<ns5:EventInvoiceFormat>Event Type Format</ns5:EventInvoiceFormat>
<ns5:FirstBillingOffsetDays>7</ns5:FirstBillingOffsetDays>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:PersonBillRateSchId>1228</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId>1229</ns5:JobBillRateSchId>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag>false</ns5:EnableLbrBillXtnsnFlag>
<ns5:NlBillRateSchId>1231</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag>false</ns5:EnableNlBillXtnsnFlag>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:InvoiceCurrencyDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyExchgDate xsi:nil="true"/>
<ns5:InvoiceCurrencyRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyCode xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:DocumentNumber xsi:nil="true"/>
<ns5:LocFlag xsi:nil="true"/>
<ns5:ReportTypeCode xsi:nil="true"/>
<ns5:FederalInvoiceFormat xsi:nil="true"/>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>200000000000288</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>Invoice Plan - TM BRBR</ns5:BillPlanName>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>200000000000288</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>[Invoice Plan - TM BRBRΩ'+Ø</ns5:BillPlanName>
<ns5:InvoiceComment>[Trial InvoiceΩ'+++Ø</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
```

```
<ns5:SourceLang>KO</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>200000000000288</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>Invoice Plan - TM BRBR</ns5:BillPlanName>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanDescriptiveFlexField>
<ns8:BillPlanId>200000000000288</ns8:BillPlanId>
<ns8:MajorVersion>2</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:BillPlanDescriptiveFlexField>
</ns1:BillPlan>
<ns1:BillPlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>200000000000290</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:BillMethodId>100000005</ns5:BillMethodId>
<ns5:BillMethodName>Fixed Price Inv PSR</ns5:BillMethodName>
<ns5:BillPlanName>Invoice Plan - FP</ns5:BillPlanName>
<ns5:InvoiceCurrencyOptCode>CONTRACT</ns5:InvoiceCurrencyOptCode>
<ns5:BillingCurrencyType>Contract</ns5:BillingCurrencyType>
<ns5:PaymentTermsId>1000</ns5:PaymentTermsId>
<ns5:PaymentTerms>2/10, Net 30</ns5:PaymentTerms>
<ns5:BillSetNumber>1</ns5:BillSetNumber>
<ns5:BillToCustomerAccountId>1001</ns5:BillToCustomerAccountId>
<ns5:BillToAccountNumber>1001</ns5:BillToAccountNumber>
<ns5:BillToSiteUseId>1006</ns5:BillToSiteUseId>
<ns5:BillToSite>New York (OPS)</ns5:BillToSite>
<ns5:BillToContactId>1009</ns5:BillToContactId>
<ns5:BillToContactName>Mike Kenton</ns5:BillToContactName>
<ns5:BillToContactEmail>sendmail-test-discard@oracle.com</ns5:BillToContactEmail>
<ns5:BillingCycleId>1000000000001</ns5:BillingCycleId>
<ns5:BillingCycle xsi:nil="true"/>
<ns5:LaborInvoiceFormatId>100000010695006</ns5:LaborInvoiceFormatId>
<ns5:LaborInvoiceFormat>Time and Material</ns5:LaborInvoiceFormat>
<ns5:NlInvoiceFormatId>100000011410001</ns5:NlInvoiceFormatId>
<ns5:NonlaborInvoiceFormat>NL Work Site Exp Cat Format</ns5:NonlaborInvoiceFormat>
<ns5:EventsInvoiceFormatId>100000011407004</ns5:EventsInvoiceFormatId>
<ns5:EventInvoiceFormat>Event Type Format</ns5:EventInvoiceFormat>
<ns5:FirstBillingOffsetDays>7</ns5:FirstBillingOffsetDays>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:PersonBillRateSchId>1228</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId>1229</ns5:JobBillRateSchId>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag>false</ns5:EnableLbrBillXtnsnFlag>
<ns5:NlBillRateSchId>1231</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag>false</ns5:EnableNlBillXtnsnFlag>
```

```
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:InvoiceCurrencyDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionDateType xsi:nil="true"/>
<ns5:InvoiceCurrencyExchgDate xsi:nil="true"/>
<ns5:InvoiceCurrencyRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyConversionRateType xsi:nil="true"/>
<ns5:InvoiceCurrencyCode xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:DocumentNumber xsi:nil="true"/>
<ns5:LocFlag xsi:nil="true"/>
<ns5:ReportTypeCode xsi:nil="true"/>
<ns5:FederalInvoiceFormat xsi:nil="true"/>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>200000000000290</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>Invoice Plan - FP</ns5:BillPlanName>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>200000000000290</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>[Invoice Plan - FPΩ'+++ '+Ø</ns5:BillPlanName>
<ns5:InvoiceComment>[Trial InvoiceΩ'+++Ø</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>KO</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanTranslation>
<ns5:BillPlanId>200000000000290</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>Invoice Plan - FP</ns5:BillPlanName>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:BillPlanTranslation>
<ns5:BillPlanDescriptiveFlexField>
<ns8:BillPlanId>200000000000290</ns8:BillPlanId>
<ns8:MajorVersion>2</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:BillPlanDescriptiveFlexField>
</ns1:BillPlan>
<ns1:BillingControl>
```

```
<ns5:BillingControlId>100010024462335</ns5:BillingControlId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:RbsElementId xsi:nil="true"/>
<ns5:BillingResource xsi:nil="true"/>
<ns5:StartDate>2008-01-01</ns5:StartDate>
<ns5:EndDate>2008-01-01</ns5:EndDate>
<ns5:SoftLimitAmount xsi:nil="true"/>
<ns5:HardLimitAmount xsi:nil="true"/>
<ns5:ActiveFlag>true</ns5:ActiveFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
</ns1:BillingControl>
<ns1:RevenuePlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>200000000000289</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:BillMethodId>100000010</ns5:BillMethodId>
<ns5:BillMethodName>Fixed Price Rev PSR</ns5:BillMethodName>
<ns5:BillPlanName>Revenue Plan - FP</ns5:BillPlanName>
<ns5:PersonBillRateSchId>1228</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId>1229</ns5:JobBillRateSchId>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag>false</ns5:EnableLbrBillXtnsnFlag>
<ns5:NlBillRateSchId>1231</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag>false</ns5:EnableNlBillXtnsnFlag>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:RevenuePlanDescriptiveFlexField>
<ns8:BillPlanId>200000000000289</ns8:BillPlanId>
<ns8:MajorVersion>2</ns8:MajorVersion>
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:RevenuePlanDescriptiveFlexField>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>200000000000289</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>Revenue Plan - FP</ns5:BillPlanName>
```

```
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>200000000000289</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>[Revenue Plan - FPΩ'+++ '+Ø</ns5:BillPlanName>
<ns5:InvoiceComment>[Trial InvoiceΩ'+++Ø</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>KO</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>200000000000289</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>Revenue Plan - FP</ns5:BillPlanName>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
</ns1:RevenuePlan>
<ns1:RevenuePlan xmlns:ns8="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
<ns5:BillPlanId>200000000000291</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:BillMethodId>100000006</ns5:BillMethodId>
<ns5:BillMethodName>Time and Material BRBR Rev PSR</ns5:BillMethodName>
<ns5:BillPlanName>Revenue Plan - TM BRBR</ns5:BillPlanName>
<ns5:PersonBillRateSchId>1228</ns5:PersonBillRateSchId>
<ns5:PersonRateSchedule xsi:nil="true"/>
<ns5:JobBillRateSchId>1229</ns5:JobBillRateSchId>
<ns5:JobRateSchedule xsi:nil="true"/>
<ns5:LaborSchFixedDate xsi:nil="true"/>
<ns5:LaborDiscountPercentage xsi:nil="true"/>
<ns5:LaborDiscountReasonCode xsi:nil="true"/>
<ns5:LaborRateChangeReason xsi:nil="true"/>
<ns5:EnableLbrBillXtnsnFlag>false</ns5:EnableLbrBillXtnsnFlag>
<ns5:NlBillRateSchId>1231</ns5:NlBillRateSchId>
<ns5:NonlaborRateSchedule xsi:nil="true"/>
<ns5:NlSchFixedDate xsi:nil="true"/>
<ns5:NlDiscountPercentage xsi:nil="true"/>
<ns5:NlDiscountReasonCode xsi:nil="true"/>
<ns5:NonlaborRateChangeReason xsi:nil="true"/>
<ns5:EnableNlBillXtnsnFlag>false</ns5:EnableNlBillXtnsnFlag>
<ns5:BurdenSchId xsi:nil="true"/>
<ns5:BurdenSchedule xsi:nil="true"/>
<ns5:BurdenSchFixedDate xsi:nil="true"/>
<ns5:LaborTpScheduleId xsi:nil="true"/>
<ns5:LaborTransferPriceSchedule xsi:nil="true"/>
<ns5:LaborTpSchFixedDate xsi:nil="true"/>
<ns5:NlTpScheduleId xsi:nil="true"/>
<ns5:NonlaborTransferPriceSchedule xsi:nil="true"/>
<ns5:NlTpSchFixedDate xsi:nil="true"/>
<ns5:OnHoldFlag>false</ns5:OnHoldFlag>
<ns5:ExternalSourceKey xsi:nil="true"/>
<ns5:ExternalReferenceKey xsi:nil="true"/>
<ns5:LaborBillBasisCode xsi:nil="true"/>
<ns5:LaborCostBasis xsi:nil="true"/>
<ns5:LaborMarkupPercentage xsi:nil="true"/>
<ns5:NlBillBasisCode xsi:nil="true"/>
<ns5:NonlaborCostBasis xsi:nil="true"/>
<ns5:NlMarkupPercentage xsi:nil="true"/>
<ns5:RevenuePlanDescriptiveFlexField>
<ns8:BillPlanId>200000000000291</ns8:BillPlanId>
<ns8:MajorVersion>2</ns8:MajorVersion>
```

```
<ns8:bbte xsi:nil="true"/>
<ns8:dff1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>2</ns8:_FLEX_NumOfSegments>
</ns5:RevenuePlanDescriptiveFlexField>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>200000000000291</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>IW</ns5:Language>
<ns5:BillPlanName>Revenue Plan - TM BRBR</ns5:BillPlanName>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>200000000000291</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>KO</ns5:Language>
<ns5:BillPlanName>[Revenue Plan - TM BRBRΩ'+Ø</ns5:BillPlanName>
<ns5:InvoiceComment>[Trial InvoiceΩ'+++Ø</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>KO</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
<ns5:RevenuePlanTranslation>
<ns5:BillPlanId>200000000000291</ns5:BillPlanId>
<ns5:MajorVersion>2</ns5:MajorVersion>
<ns5:Language>US</ns5:Language>
<ns5:BillPlanName>Revenue Plan - TM BRBR</ns5:BillPlanName>
<ns5:InvoiceComment>Trial Invoice</ns5:InvoiceComment>
<ns5:InvoiceInstructions xsi:nil="true"/>
<ns5:SourceLang>US</ns5:SourceLang>
</ns5:RevenuePlanTranslation>
</ns1:RevenuePlan>
<ns1:OKCSOPText_c xsi:nil="true"/>
<ns1:OKCSOPNumber_c xsi:nil="true"/>
<ns1:OKCSOPDate_c xsi:nil="true"/>
<ns1:OKCSOPLong_c xsi:nil="true"/>
<ns1:OKCSOPDCL_Id_c xsi:nil="true"/>
<ns1:OKCSOPDCL_c xsi:nil="true"/>
</ns1:Value>
</ns2:result>
</ns0:findContractResponse>
</env:Body>
</env:Envelope>
```

Remove Hold on a Contract

In this use case, we'll remove hold on a contract.

Contract type: All

Operation: **removeHoldOnContract**

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
<soap:Body>
<ns1:removeHoldOnContract xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/
types/">
<ns1:contractId>300100092562530</ns1:contractId>
<ns1:removeHoldDate>2016-10-30</ns1:removeHoldDate>
</ns1:removeHoldOnContract>
</soap:Body>
```

```
</soap:Envelope>
```

Remove Hold on a Contract Line

In this use case, we'll remove hold on a contract line.

Contract type: All

Operation: **removeHoldOnContract**

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:removeHoldOnContract xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/
types/">
 <ns1:lineId>300100092562530</ns1:lineId>
 <ns1:removeHoldDate>2016-10-30</ns1:removeHoldDate>
 </ns1:removeHoldOnContract>
 </soap:Body>
</soap:Envelope>
```

Reopen a Contract

In this use case, we'll reopen a contract.

Contract type: All

Operation: **reopenContract**

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:reopenContract xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/
types/">
 <ns1:contractId>300100092562530</ns1:contractId>
 </ns1:reopenContract>
 </soap:Body>
</soap:Envelope>
```

Reopen a Contract Line

In this use case, we'll reopen a contract line.

Contract type: All

Operation: **reopenContract**

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:reopenContract xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/
types/">
 <ns1:contractId>300100092562530</ns1:contractId>
 </ns1:reopenContract>
 </soap:Body>
</soap:Envelope>
```

Update Active Contract with no Versioning

In this use case, we'll update an active contract with no versioning.

Contract type: All

Operation: **mergeContractInAllStatus**

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
<soap:Body>
<ns1:mergeContractInAllStatus xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/
contractService/types/">
<ns1:contractHeader xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/">
<ns2:Id>300100151581582</ns2:Id>
<ns2:MajorVersion>1</ns2:MajorVersion>
<ns2:StartDate>2016-09-15</ns2:StartDate>
<ns2:AmendmentEffectiveDate>2016-09-15</ns2:AmendmentEffectiveDate>
</ns1:contractHeader>
<ns1:versionFlag>false</ns1:versionFlag>
</ns1:mergeContractInAllStatus>
</soap:Body>
</soap:Envelope>
```

Update Active Contract with Versioning

In this use case, we'll update an active contract with versioning.

Contract type: All

Operation: **mergeContractInAllStatus**

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
<soap:Body>
<ns1:mergeContractInAllStatus xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/
contractService/types/">
<ns1:contractHeader xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/">
<ns2:Id>300100151581582</ns2:Id>
<ns2:MajorVersion>1</ns2:MajorVersion>
<ns2:StartDate>2016-09-16</ns2:StartDate>
<ns2:AmendmentEffectiveDate>2016-09-16</ns2:AmendmentEffectiveDate>
</ns1:contractHeader>
<ns1:versionFlag>true</ns1:versionFlag>
</ns1:mergeContractInAllStatus>
</soap:Body>
</soap:Envelope>
```

Update Line Amount of an Active Contract

In this use case, we'll update the line amount of an active contract.

Contract type: All

Operation: **mergeContractInAllStatus**

Note: For free-form type lines, you can pass the amount through the attribute/tag `LineValueAmount`. For item-based type lines, amount is derived from values passed through `ItemQuantity` and `UnitPrice` tags.

This payload will amend the contract, make the line amount changes, and moves the amended version to Active status. Since amendment is involved, it is mandatory to pass `AmendmentEffectiveDate` in the payload.

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:mergeContractInAllStatus xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/
contractService/types/">
 <ns1:contractHeader xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/">
 <ns2:Id>300100168601844</ns2:Id>
 <ns2:MajorVersion>1</ns2:MajorVersion>
 <ns2:AmendmentEffectiveDate>2016-10-08</ns2:AmendmentEffectiveDate>
 <ns2:ContractLine><!-- Free form line -->
 <ns2:Id>300100168602041</ns2:Id>
 <ns2:MajorVersion>1</ns2:MajorVersion>
 <ns2:LineValueAmount currencyCode="USD">12345</ns2:LineValueAmount>
 </ns2:ContractLine>
 <ns2:ContractLine><!-- Item based line -->
 <ns2:Id>300100168601787</ns2:Id>
 <ns2:MajorVersion>1</ns2:MajorVersion>
 <ns2:ItemQuantity unitCode="Ea">5</ns2:ItemQuantity>
 <ns2:UnitPrice currencyCode="USD">12</ns2:UnitPrice>
 </ns2:ContractLine>
 </ns1:contractHeader>
 <ns1:versionFlag>true</ns1:versionFlag>
 </ns1:mergeContractInAllStatus>
 </soap:Body>
</soap:Envelope>
```

Merge Contract In All Status

In this use case we will merge contract in all status.

Operation: mergeContractInAllStatus

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
 xmlns:typ="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/types/"
 xmlns:con="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/"
 xmlns:head="http://xmlns.oracle.com/apps/contracts/coreAuthoring/header/flex/header/"
 xmlns:par="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/
partyContact/" xmlns:par1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/
flex/party/" xmlns:lin="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/
lines/" xmlns:con1="http://xmlns.oracle.com/apps/projects/billing/contracts/
contractPublicService/" xmlns:bil="http://xmlns.oracle.com/apps/projects/billing/
contracts/flex/BilllPlanDff/" xmlns:con2="http://xmlns.oracle.com/apps/projects/billing/
contracts/contractBillingService/">
<soapenv:Header/>
<soapenv:Body>
<typ:mergeContractInAllStatus>
<typ:contractHeader>
<con:Id>300100036627880</con:Id>
<con:MajorVersion>3</con:MajorVersion>
<con:StartDate>2008-01-01</con:StartDate>
<con:EndDate>2020-12-31</con:EndDate>
```

```
<con:AmendmentEffectiveDate>2017-11-02</con:AmendmentEffectiveDate>
</typ:contractHeader>
<typ:versionFlag>true</typ:versionFlag>
</typ:mergeContractInAllStatus>
</soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/">
   <env:Header/>
   <env:Body>
      <env:Fault>
         <faultcode>env:Server</faultcode>
         <faultstring>JBO-27035: Attribute ContractTypeId is required.</faultstring>
         <detail>
            <tns:ServiceErrorMessage xsi:type="tns:ServiceAttrValErrorMessage"
 xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:xsi="http://www.w3.org/2001/
XMLSchema-instance">
               <tns:code>27035</tns:code>
               <tns:message>JBO-27035: Attribute ContractTypeId is required.</tns:message>
               <tns:severity>SEVERITY_ERROR</tns:severity>
               <ns2:sdoObject xsi:type="ns1:ContractHeader" xmlns:ns0="http://
xmlns.oracle.com/adf/svc/types/" xmlns:ns7="http://xmlns.oracle.com/apps/contracts/
coreAuthoring/header/flex/header/" xmlns:ns5="http://xmlns.oracle.com/apps/projects/
billing/contracts/contractPublicService/" xmlns:ns1="http://xmlns.oracle.com/apps/
contracts/coreAuthoring/contractService/" xmlns:ns2="http://xmlns.oracle.com/adf/svc/
errors/">
                  <ns1:Id>300100036627880</ns1:Id>
                  <ns1:MajorVersion>3</ns1:MajorVersion>
                  <ns1:StartDate>2008-01-01</ns1:StartDate>
                  <ns1:EndDate>2020-12-31</ns1:EndDate>
                  <ns1:AmendmentEffectiveDate>2017-11-02</ns1:AmendmentEffectiveDate>
               </ns2:sdoObject>
               <tns:exceptionClassName>oracle.jbo.AttrValException</
tns:exceptionClassName>
               <tns:attributeName>ContractTypeId</tns:attributeName>
               <tns:objectName>ContractTypeIdCriteria</tns:objectName>
            </tns:ServiceErrorMessage>
         </detail>
      </env:Fault>
   </env:Body>
</env:Envelope>
```

Create Contract

In this use case, we'll create a contract.

Contract type: Project

Operation: **createContract**

> **Note:** If the contract type you're using has Automatic Numbering in place, then you should not provide LineNumber in the payload. The system will automatically provide numbers to lines. The operation will fail if you still provide the Line Number. The sample payload is applicable when the Automatic Numbering is set to *FALSE*.

Request Body

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:createContract
xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/types/">
 <ns1:contractHeader
xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/">
 <ns2:OrgName>Vision Operations</ns2:OrgName>
 <ns2:ContractTypeName>1 Service Contract</ns2:ContractTypeName>
 <ns2:ContractNumber>AVR_TEST_S_12</ns2:ContractNumber>
 <ns2:Currency>US Dollar</ns2:Currency>
 <ns2:InvOrgName>Vision Operations</ns2:InvOrgName>
 <ns2:StartDate>2021-08-13</ns2:StartDate>
 <ns2:EndDate>2024-12-24</ns2:EndDate>
 <ns2:InvOrgName>Vision Operations</ns2:InvOrgName>
 <ns2:PartyName>Hilman and Associates</ns2:PartyName>
 <ns2:ContractLine>
 <ns2:LineNumber>10</ns2:LineNumber>
 <ns2:LineTypeName>Subscription</ns2:LineTypeName>
 <ns2:ItemName>Auto_SLA_SubscriptionProd</ns2:ItemName>
 <ns2:UnitOfMeasure>YEAR</ns2:UnitOfMeasure>

 </ns2:ContractLine>
 </ns1:contractHeader>
 </ns1:createContract>
 </soap:Body>
</soap:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/ContractService/
createContractResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:c6560e1a-bb98-4853-b341-9087f8514f40</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:createContractResponse xmlns:ns0="http://xmlns.oracle.com/apps/contracts/coreAuthoring/
contractService/types/">
 <ns2:result xsi:type="ns1:ContractHeaderResult" xmlns:ns7="http://xmlns.oracle.com/apps/contracts/
coreAuthoring/header/flex/header/" xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://
xmlns.oracle.com/adf/svc/types/" xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/
contractService/" xmlns:ns5="http://xmlns.oracle.com/apps/projects/billing/contracts/contractPublicService/"
 xmlns:ns6="http://xmlns.oracle.com/apps/projects/billing/contracts/contractBillingService/"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:ns2="http://xmlns.oracle.com/apps/contracts/
coreAuthoring/contractService/types/">
 <ns1:Value>
 <ns1:Id>300100548679617</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:ExternalSource>FUSION</ns1:ExternalSource>
 <ns1:ExternalKey>300100548679617</ns1:ExternalKey>
 <ns1:InvConvRateTypeName xsi:nil="true"/>
 <ns1:InvConvRateDateTypeName xsi:nil="true"/>
 <ns1:OrgName>Vision Operations</ns1:OrgName>
 <ns1:OrgId>204</ns1:OrgId>
 <ns1:ContractTypeName>1 Service Contract</ns1:ContractTypeName>
 <ns1:ContractClass>CONTRACT</ns1:ContractClass>
 <ns1:ContractTypeId>300100113518544</ns1:ContractTypeId>
 <ns1:ContractNumber>AVR_TEST_S_12</ns1:ContractNumber>
 <ns1:ContractNumberModifier xsi:nil="true"/>
 <ns1:Cognomen xsi:nil="true"/>
 <ns1:BuyOrSell>S</ns1:BuyOrSell>
 <ns1:PartyId>1004</ns1:PartyId>
 <ns1:PartyName>Hilman and Associates</ns1:PartyName>
```

```
<ns1:InvOrganizationId>204</ns1:InvOrganizationId>
<ns1:StsCode>DRAFT</ns1:StsCode>
<ns1:CurrencyCode>USD</ns1:CurrencyCode>
<ns1:StartDate>2021-08-13</ns1:StartDate>
<ns1:EndDate>2024-12-24</ns1:EndDate>
<ns1:SupplierId xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:InvConvRateType xsi:nil="true"/>
<ns1:InvConvRateDateType xsi:nil="true"/>
<ns1:InvConvRateDate xsi:nil="true"/>
<ns1:InvTrxTypeId xsi:nil="true"/>
<ns1:InvTrxTypeName xsi:nil="true"/>
<ns1:BillToAccountId xsi:nil="true"/>
<ns1:BillToAccount xsi:nil="true"/>
<ns1:BillToAccountNumber xsi:nil="true"/>
<ns1:BillToSiteUseId xsi:nil="true"/>
<ns1:BillToSiteUseLocation xsi:nil="true"/>
<ns1:ShipToAccountId xsi:nil="true"/>
<ns1:ShipToAccount xsi:nil="true"/>
<ns1:ShipToAccountNumber xsi:nil="true"/>
<ns1:ShipToSiteUseId xsi:nil="true"/>
<ns1:ShipToSiteUseLocation xsi:nil="true"/>
<ns1:SoldToAccountId xsi:nil="true"/>
<ns1:SoldToAccount xsi:nil="true"/>
<ns1:SoldToAccountNumber xsi:nil="true"/>
<ns1:SoldToSiteId xsi:nil="true"/>
<ns1:SoldToNumber xsi:nil="true"/>
<ns1:SoldToAddress xsi:nil="true"/>
<ns1:SoldToAccountDescription xsi:nil="true"/>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:LegalEntityId>204</ns1:LegalEntityId>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:DateApproved xsi:nil="true"/>
<ns1:DatetimeCancelled xsi:nil="true"/>
<ns1:DateSigned xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:TerminateCancelSource xsi:nil="true"/>
<ns1:ContributionPercent xsi:nil="true"/>
<ns1:BillSequence xsi:nil="true"/>
<ns1:OverallRiskCode xsi:nil="true"/>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:Description xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:AmendmentEffectiveDate xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ProjectEnabledFlag>false</ns1:ProjectEnabledFlag>
<ns1:OutputTaxSetId>204</ns1:OutputTaxSetId>
<ns1:PartyObjectType>OKX_PARTY</ns1:PartyObjectType>
<ns1:PrimaryLedgerId>1</ns1:PrimaryLedgerId>
<ns1:CustomerPartyId xsi:nil="true"/>
<ns1:CustomerPartySiteId xsi:nil="true"/>
<ns1:GeneratedInvoiceStatus xsi:nil="true"/>
<ns1:OwningOrgId xsi:nil="true"/>
<ns1:NetInvoiceFlag xsi:nil="true"/>
<ns1:VersionType>C</ns1:VersionType>
<ns1:OwningOrgName xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:ExemptionReasonMeaning xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:ApTermsId xsi:nil="true"/>
<ns1:ServiceEnabledFlag>true</ns1:ServiceEnabledFlag>
```

```
<ns1:EstimatedAmount currencyCode="USD">0.00</ns1:EstimatedAmount>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:LastUpdateDate>2021-12-07T10:05:12.076Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>D28179CCA03E1195E053D711F10AE754</ns1:LastUpdateLogin>
<ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:CreationDate>2021-12-07T10:05:05.002Z</ns1:CreationDate>
<ns1:LedgerCurrency>USD</ns1:LedgerCurrency>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:AgreementEnabledFlag>false</ns1:AgreementEnabledFlag>
<ns1:CloseReason xsi:nil="true"/>
<ns1:CancelReason xsi:nil="true"/>
<ns1:AuthoringPartyCode>INTERNAL</ns1:AuthoringPartyCode>
<ns1:HoldReasonMeaning xsi:nil="true"/>
<ns1:PrimaryPartyId>1004</ns1:PrimaryPartyId>
<ns1:PersonId>100010024202546</ns1:PersonId>
<ns1:SalesAccountId xsi:nil="true"/>
<ns1:OrigSystemId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:AllowExternalItemFlag>false</ns1:AllowExternalItemFlag>
<ns1:SalesAccountName xsi:nil="true"/>
<ns1:ItemSourceCode>PRODUCT_MASTER</ns1:ItemSourceCode>
<ns1:StateTransitionFlowName xsi:nil="true"/>
<ns1:StateTransitionFlowState>DRAFT</ns1:StateTransitionFlowState>
<ns1:UserStatusCode xsi:nil="true"/>
<ns1:AssigneeType xsi:nil="true"/>
<ns1:AssigneeId xsi:nil="true"/>
<ns1:Assignee xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:AccessLevel>UPDATE</ns1:AccessLevel>
<ns1:TemplateFlag>false</ns1:TemplateFlag>
<ns1:BillingSalesrepId xsi:nil="true"/>
<ns1:BillingSalesrepName xsi:nil="true"/>
<ns1:VersionDescription xsi:nil="true"/>
<ns1:Comment xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:AdjustmentBasis xsi:nil="true"/>
<ns1:CommitmentAmount currencyCode="USD">0</ns1:CommitmentAmount>
<ns1:PricingCalendarId xsi:nil="true"/>
<ns1:PricingPeriodType xsi:nil="true"/>
<ns1:PricingCalendarName xsi:nil="true"/>
<ns1:DiscountPercent xsi:nil="true"/>
<ns1:PriceListName xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:WebServiceFlag>false</ns1:WebServiceFlag>
<ns1:TermsTemplateId xsi:nil="true"/>
<ns1:ContractOwnerId xsi:nil="true"/>
<ns1:Status/>
<ns1:AuthoringPartyMeaning>Internal</ns1:AuthoringPartyMeaning>
<ns1:InvOrgName>Vision Operations</ns1:InvOrgName>
<ns1:Supplier/>
<ns1:SupplierSite xsi:nil="true"/>
<ns1:ShipInvOrg/>
<ns1:RecvInvOrg/>
<ns1:Currency>US Dollar</ns1:Currency>
<ns1:UserStatusMeaning/>
<ns1:LegalEntityName>Vision Operations</ns1:LegalEntityName>
<ns1:ShipToOrgLocation/>
<ns1:ChrType xsi:nil="true"/>
<ns1:EnableElectronicSignFlag>false</ns1:EnableElectronicSignFlag>
<ns1:AccountRuleId>300100002789800</ns1:AccountRuleId>
<ns1:AllowCurrencyOverrideFlag xsi:nil="true"/>
<ns1:BillingFrequency>0zG</ns1:BillingFrequency>
```

```
<ns1:ContractTrueValue xsi:nil="true"/>
<ns1:InvoiceRuleId>-2</ns1:InvoiceRuleId>
<ns1:PricingSegmentExplanation xsi:nil="true"/>
<ns1:PricingStrategyExplanation xsi:nil="true"/>
<ns1:SegmentExplanationMessageName xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:Subtotal xsi:nil="true"/>
<ns1:PricingStrategyId xsi:nil="true"/>
<ns1:PricingStrategyName xsi:nil="true"/>
<ns1:PricingSegmentCode xsi:nil="true"/>
<ns1:InvConversionRate xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PricingEffectivityDate>2021-12-07T00:00:00Z</ns1:PricingEffectivityDate>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:PeriodStartUsed>CALENDAR</ns1:PeriodStartUsed>
<ns1:PeriodTypeUsed>FIXED</ns1:PeriodTypeUsed>
<ns1:InvoiceRuleName xsi:nil="true"/>
<ns1:AccountRuleName xsi:nil="true"/>
<ns1:ArInterfaceYn>BILL</ns1:ArInterfaceYn>
<ns1:PaymentTermId>5</ns1:PaymentTermId>
<ns1:PaymentTermName>IMMEDIATE</ns1:PaymentTermName>
<ns1:CustomerPartyName xsi:nil="true"/>
<ns1:CustomerPartySiteName xsi:nil="true"/>
<ns1:PeriodTypeMeaning>Fixed</ns1:PeriodTypeMeaning>
<ns1:PeriodStartMeaning>Calendar month</ns1:PeriodStartMeaning>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:ContractCreditedAmount xsi:nil="true"/>
<ns1:ContractInvoicedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:TermsTemplateName xsi:nil="true"/>
<ns1:DocumentSubType xsi:nil="true"/>
<ns1:RenewalType xsi:nil="true"/>
<ns1:UnderAmendVersionFlag xsi:nil="true"/>
<ns1:BillingDateMethod>PERIOD_START</ns1:BillingDateMethod>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:UnderMigrationFlag xsi:nil="true"/>
<ns1:ContractId>300100548679618</ns1:ContractId>
<ns1:CorpCurrencyCode>USD</ns1:CorpCurrencyCode>
<ns1:CurcyConvRateType>Corporate</ns1:CurcyConvRateType>
<ns1:QuoteToContactId xsi:nil="true"/>
<ns1:QuoteToContact xsi:nil="true"/>
<ns1:NegotiationCommChannel xsi:nil="true"/>
<ns1:NegotiationCustomerAcceptance xsi:nil="true"/>
<ns1:NegotiationEnableNotification xsi:nil="true"/>
<ns1:NegotiationInternalApproval xsi:nil="true"/>
<ns1:NegotiationLanguage xsi:nil="true"/>
<ns1:QuoteToCopyToEmail xsi:nil="true"/>
<ns1:QuotePhone xsi:nil="true"/>
<ns1:QuoteFax xsi:nil="true"/>
<ns1:QuoteEmail xsi:nil="true"/>
<ns1:QuoteAddress xsi:nil="true"/>
<ns1:QuoteOrg xsi:nil="true"/>
<ns1:QuoteAccount xsi:nil="true"/>
<ns1:PrimarySalesrepId xsi:nil="true"/>
<ns1:PrimarySalesRepresentative xsi:nil="true"/>
<ns1:NegotiationContractLayoutTemplate xsi:nil="true"/>
<ns1:NegotiationTermsLayoutTemplate xsi:nil="true"/>
<ns1:TransactionTypeName>ORA_OKC_Invoice</ns1:TransactionTypeName>
<ns1:AutoSendForSignature>N</ns1:AutoSendForSignature>
<ns1:PriceApplicationRule>APPLY_TO_ALL_PRICE_LIST</ns1:PriceApplicationRule>
<ns1:EsignTemplateId xsi:nil="true"/>
<ns1:NonStandardClauseCount>0</ns1:NonStandardClauseCount>
```

```
<ns1:ContractPuid>KHDR-24020</ns1:ContractPuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
<ns1:RunContractExpertFlag>true</ns1:RunContractExpertFlag>
<ns1:IgnoreQAWarningsFlag>false</ns1:IgnoreQAWarningsFlag>
<ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/">
<ns1:LineNumber>10</ns1:LineNumber>
<ns1:Id>300100548679619</ns1:Id>
<ns1:LineId>300100548679620</ns1:LineId>
<ns1:VersionType>C</ns1:VersionType>
<ns1:MajorVersion>1</ns1:MajorVersion>
<ns1:LineTypeId>300100007261556</ns1:LineTypeId>
<ns1:LineTypeName>Subscription</ns1:LineTypeName>
<ns1:StsCode>DRAFT</ns1:StsCode>
<ns1:LineStatus>Draft</ns1:LineStatus>
<ns1:Object1Id1>300100185082391</ns1:Object1Id1>
<ns1:Object1Id2>204</ns1:Object1Id2>
<ns1:ItemName>Auto_SLA_SubscriptionProd</ns1:ItemName>
<ns1:ItemNameTxt>Auto_SLA_SubscriptionProd</ns1:ItemNameTxt>
<ns1:ItemDescription>Auto_SLA_SubscriptionProd</ns1:ItemDescription>
<ns1:StartDate>2021-08-13</ns1:StartDate>
<ns1:EndDate>2024-12-24</ns1:EndDate>
<ns1:PriceListId xsi:nil="true"/>
<ns1:PriceList xsi:nil="true"/>
<ns1:UOMCode>0zE</ns1:UOMCode>
<ns1:UnitOfMeasure>YEAR</ns1:UnitOfMeasure>
<ns1:FixedPriceServiceYn>N</ns1:FixedPriceServiceYn>
<ns1:ItemQuantity unitCode="0zE">1</ns1:ItemQuantity>
<ns1:UnitPrice xsi:nil="true"/>
<ns1:LineValueAmount xsi:nil="true"/>
<ns1:LineAmount xsi:nil="true"/>
<ns1:Comments xsi:nil="true"/>
<ns1:AgreedQuantity xsi:nil="true"/>
<ns1:AgreedAmount xsi:nil="true"/>
<ns1:AgreementQuantityLimit xsi:nil="true"/>
<ns1:AgreementAmountLimit xsi:nil="true"/>
<ns1:MinimumReleaseQuantity xsi:nil="true"/>
<ns1:MinimumReleaseAmount xsi:nil="true"/>
<ns1:CommitLevelCode>ESTIMATED</ns1:CommitLevelCode>
<ns1:CommitLevel>Estimated</ns1:CommitLevel>
<ns1:PriceBookId xsi:nil="true"/>
<ns1:PriceBook xsi:nil="true"/>
<ns1:AllowPricelistOverrideYn xsi:nil="true"/>
<ns1:ListPrice xsi:nil="true"/>
<ns1:FloorPrice xsi:nil="true"/>
<ns1:AgreementPriceLimit xsi:nil="true"/>
<ns1:AgreementUnitPrice xsi:nil="true"/>
<ns1:AdjustmentTypeCode xsi:nil="true"/>
<ns1:AdjustmentType xsi:nil="true"/>
<ns1:AdjustmentBasisId xsi:nil="true"/>
<ns1:AdjustmentBasisCode xsi:nil="true"/>
<ns1:AdjustmentAmount xsi:nil="true"/>
<ns1:AllowCustomAdjustmentsFlag xsi:nil="true"/>
<ns1:DateTerminated xsi:nil="true"/>
<ns1:HoldUntilDate xsi:nil="true"/>
<ns1:TrnCodeSetId xsi:nil="true"/>
<ns1:TrnCode xsi:nil="true"/>
<ns1:CloseReason xsi:nil="true"/>
<ns1:HoldReasonCodeSetId xsi:nil="true"/>
<ns1:HoldReasonCode xsi:nil="true"/>
<ns1:HoldReason xsi:nil="true"/>
<ns1:AtRiskYn>N</ns1:AtRiskYn>
<ns1:PercentComplete xsi:nil="true"/>
<ns1:ShipToAccountId xsi:nil="true"/>
<ns1:ShipToAccount xsi:nil="true"/>
<ns1:ShipToAccountNumber xsi:nil="true"/>
```

```
<ns1:ShipToSiteUseId xsi:nil="true"/>
<ns1:ShipToSite xsi:nil="true"/>
<ns1:ShipInvOrgId xsi:nil="true"/>
<ns1:WareHouse xsi:nil="true"/>
<ns1:BillPlanId xsi:nil="true"/>
<ns1:BillPlan xsi:nil="true"/>
<ns1:RevenuePlanId xsi:nil="true"/>
<ns1:RevenuePlan xsi:nil="true"/>
<ns1:InvoicedAmount currencyCode="USD">0</ns1:InvoicedAmount>
<ns1:RevenueAmount currencyCode="USD">0</ns1:RevenueAmount>
<ns1:OutputTaxClassificationCode xsi:nil="true"/>
<ns1:OutputTaxClassMeaning xsi:nil="true"/>
<ns1:TaxExemptionControl xsi:nil="true"/>
<ns1:TaxExemptionControlMeaning xsi:nil="true"/>
<ns1:ExemptCertificateNumber xsi:nil="true"/>
<ns1:ExemptReasonCode xsi:nil="true"/>
<ns1:ExemptReason xsi:nil="true"/>
<ns1:LastRevenueRecogDate xsi:nil="true"/>
<ns1:CustomerPONumber xsi:nil="true"/>
<ns1:DeliveryDate xsi:nil="true"/>
<ns1:SupplierId xsi:nil="true"/>
<ns1:Supplier xsi:nil="true"/>
<ns1:SupplierSiteId xsi:nil="true"/>
<ns1:SupplierSiteName xsi:nil="true"/>
<ns1:RecvInvOrgId xsi:nil="true"/>
<ns1:RecInvOrgName xsi:nil="true"/>
<ns1:RecvLocationId xsi:nil="true"/>
<ns1:ShipToOrgLocation xsi:nil="true"/>
<ns1:AgreementPriceOverAllwdYn>N</ns1:AgreementPriceOverAllwdYn>
<ns1:FOBCode xsi:nil="true"/>
<ns1:FOB xsi:nil="true"/>
<ns1:FreightTermsCode xsi:nil="true"/>
<ns1:FreightTerms xsi:nil="true"/>
<ns1:PaymentTermsId>5</ns1:PaymentTermsId>
<ns1:PaymentTerms>IMMEDIATE</ns1:PaymentTerms>
<ns1:PurchasingCategoryId xsi:nil="true"/>
<ns1:PurchasingCategory xsi:nil="true"/>
<ns1:CarrierId xsi:nil="true"/>
<ns1:CarrierName xsi:nil="true"/>
<ns1:VendorSiteId xsi:nil="true"/>
<ns1:OrigSystemReference xsi:nil="true"/>
<ns1:OrigSystemSourceCode xsi:nil="true"/>
<ns1:Cognomen xsi:nil="true"/>
<ns1:TaxAmount xsi:nil="true"/>
<ns1:ExternalSource>FUSION</ns1:ExternalSource>
<ns1:ExternalKey>300100548679619</ns1:ExternalKey>
<ns1:ExternalItemKey xsi:nil="true"/>
<ns1:ExternalItemReference1 xsi:nil="true"/>
<ns1:ExternalItemReference2 xsi:nil="true"/>
<ns1:ExternalItemReference3 xsi:nil="true"/>
<ns1:ExternalItemReference4 xsi:nil="true"/>
<ns1:ExternalItemReference5 xsi:nil="true"/>
<ns1:ExternalItemSource xsi:nil="true"/>
<ns1:AllowPromotionsYn>N</ns1:AllowPromotionsYn>
<ns1:InvoiceRuleId>-2</ns1:InvoiceRuleId>
<ns1:SourceSystemAttributes xsi:nil="true"/>
<ns1:BillToAccountId xsi:nil="true"/>
<ns1:AccountRuleId>300100002789800</ns1:AccountRuleId>
<ns1:BillingFrequency>0zG</ns1:BillingFrequency>
<ns1:InvoiceText>[$Item Name]: [$Charge Name] [$Bill from Date]-[$Bill to Date]</ns1:InvoiceText>
<ns1:OrderSource xsi:nil="true"/>
<ns1:PriceUOM xsi:nil="true"/>
<ns1:ShipToPartyId xsi:nil="true"/>
<ns1:ShipToPartySiteId xsi:nil="true"/>
<ns1:DurationQuantity unitCode="DY">1230</ns1:DurationQuantity>
<ns1:LineSubTotal xsi:nil="true"/>
```

```
<ns1:PriceItemQuantity unitCode="0zE">1</ns1:PriceItemQuantity>
<ns1:PriceItemUOM>0zE</ns1:PriceItemUOM>
<ns1:BillToAccountDescription xsi:nil="true"/>
<ns1:BillToAccount xsi:nil="true"/>
<ns1:BillToAccountNumber xsi:nil="true"/>
<ns1:BillToSiteUseLocation xsi:nil="true"/>
<ns1:BillToSiteUseId xsi:nil="true"/>
<ns1:BillToAddress xsi:nil="true"/>
<ns1:ShipToPartyName xsi:nil="true"/>
<ns1:ShipToPartySiteLocation xsi:nil="true"/>
<ns1:TaxClassificationMeaning xsi:nil="true"/>
<ns1:InvTrxTypeId xsi:nil="true"/>
<ns1:ArInterfaceYn>Bill</ns1:ArInterfaceYn>
<ns1:OrderLineNumber xsi:nil="true"/>
<ns1:OrderNumber xsi:nil="true"/>
<ns1:OrderId xsi:nil="true"/>
<ns1:OrderLineId xsi:nil="true"/>
<ns1:PricingError xsi:nil="true"/>
<ns1:InvoiceRuleMeaning>Advance Invoice</ns1:InvoiceRuleMeaning>
<ns1:AccountRuleMeaning>IRR_Immediate</ns1:AccountRuleMeaning>
<ns1:BillingFrequencyMeaning>MONTH</ns1:BillingFrequencyMeaning>
<ns1:PaymentTermsMeaning xsi:nil="true"/>
<ns1:CancelledAmount xsi:nil="true"/>
<ns1:CreditedAmount xsi:nil="true"/>
<ns1:TerminatedAmount xsi:nil="true"/>
<ns1:UnbilledAmount xsi:nil="true"/>
<ns1:ReturnCreditMethodCode xsi:nil="true"/>
<ns1:ReturnCreditMethodMeaning xsi:nil="true"/>
<ns1:TaxError xsi:nil="true"/>
<ns1:ContractSubscriptionLineRenewalType>RENEW</ns1:ContractSubscriptionLineRenewalType>
<ns1:PriceDuringBillingYn>N</ns1:PriceDuringBillingYn>
<ns1:BillingDateMethod>PERIOD_START</ns1:BillingDateMethod>
<ns1:SpecificDays xsi:nil="true"/>
<ns1:GenerateBillingSchedule xsi:nil="true"/>
<ns1:PriceAsOf>2021-08-13</ns1:PriceAsOf>
<ns1:CoverageScheduleId xsi:nil="true"/>
<ns1:PaymentSetId xsi:nil="true"/>
<ns1:EstimatedVariableConsiderationAmount xsi:nil="true"/>
<ns1:StandaloneSellingPrice xsi:nil="true"/>
<ns1:PriceApplicationRule xsi:nil="true"/>
<ns1:AutoApplyStrategyPriceAdjustmentFlag xsi:nil="true"/>
<ns1:LinePuid>KHDR-24020-LINE-43673</ns1:LinePuid>
<ns1:SourceDocumentId xsi:nil="true"/>
<ns1:SourceDocumentLineId xsi:nil="true"/>
<ns1:SourceDocumentSystemCode xsi:nil="true"/>
</ns1:ContractLine>
</ns1:Value>
</ns2:result>
</ns0:createContractResponse>
</env:Body>
</env:Envelope>
```

Migrate Inter Company Contracts

In this use case, we'll create migrate contracts within a company using mergeContract operation of Contract Web Services.

Contract type: Project

Operation: **mergeContract**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:typ="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/types/"
xmlns:con="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/"
xmlns:head="http://xmlns.oracle.com/apps/contracts/coreAuthoring/header/flex/header/"
xmlns:par="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/partyContact/"
xmlns:par1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/parties/flex/party/"
xmlns:lin="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/"
xmlns:con1="http://xmlns.oracle.com/apps/projects/billing/contracts/contractPublicService/"
xmlns:con2="http://xmlns.oracle.com/apps/projects/billing/contracts/contractBillingService/"
xmlns:bil="http://xmlns.oracle.com/apps/projects/billing/contracts/flex/BilllPlanDff/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:mergeContract>
 <typ:contractHeader>
 <con:Id>999990000001443</con:Id>
 <con:ContractTypeId>104</con:ContractTypeId>
 <con:ContractLine>
 <con:Id>999990000115390</con:Id>
 <con:MajorVersion>1</con:MajorVersion>
 <con:AssociatedProject>
 <con1:ProjectId>999991072</con1:ProjectId>
 <con1:ProjElementId>000000000000000</con1:ProjElementId>
 </con:AssociatedProject>
 <con:ProjectContractLineInternalAttributes>
 <con2:ContractId>999990000001443</con2:ContractId>
 <con2:ContractLineId>100100095844525</con2:ContractLineId>
 <con2:MajorVersion>2</con2:MajorVersion>
 <con2:ProviderBusinessUnitId>000000000000000</con2:ProviderBusinessUnitId>
 <con2:ReceiverProjectId>000000000000000</con2:ReceiverProjectId>
 <con2:ReceiverTaskId>000000000000000</con2:ReceiverTaskId>
 <con2:OrganizationId>000000000000000</con2:OrganizationId>
 <con2:ExpenditureTypeId>000000000000000</con2:ExpenditureTypeId>
 </con:ProjectContractLineInternalAttributes>
 </con:ContractLine>
 </typ:contractHeader>
 </typ:mergeContract>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"> xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/ContractService/
mergeContractResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:cfgkm49f-9734-49j7-8589-1be726f8f6fp</wsa:MessageID>
 </env:Header>
 <env:Body>

 <ns0:mergeContractResponse xmlns:ns0="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/
types/">
 <ns2:result xsi:type="ns1:ContractHeaderResult" xmlns:ns7="http://xmlns.oracle.com/apps/contracts/
coreAuthoring/header/flex/header/"
xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
xmlns:ns1="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/"
xmlns:ns5="http://xmlns.oracle.com/apps/projects/billing/contracts/contractPublicService/"
xmlns:ns6="http://xmlns.oracle.com/apps/projects/billing/contracts/contractBillingService/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:ns2="http://xmlns.oracle.com/apps/contracts/coreAuthoring/contractService/types/">
 <ns1:Value>
 <ns1:Id>300100169593123</ns1:Id>
```

```
 <ns1:ContractTypeId>104</ns1:ContractTypeId>
 <ns1:ContractLine xmlns:ns4="http://xmlns.oracle.com/apps/flex/contracts/coreAuthoring/lines/"
xmlns:ns6="http://xmlns.oracle.com/apps/projects/billing/contracts/contractBillingService/">
 <ns1:Id>100100090554281</ns1:Id>
 <ns1:MajorVersion>1</ns1:MajorVersion>
 <ns1:AssociatedProject>
 <ns5:ProjectId>300100169483875</ns5:ProjectId>
 <ns5:ProjElementId>0</ns5:ProjElementId>
 </ns1:AssociatedProject>
 <ns1:ProjectContractLineInternalAttributes>
 <ns6:ContractId>300100169593123</ns6:ContractId>
 <ns6:ContractLineId>100100090554281</ns6:ContractLineId>
 <ns6:MajorVersion>1</ns6:MajorVersion>
 <ns6:ProviderBusinessUnitId>0</ns6:ProviderBusinessUnitId>
 <ns6:ReceiverProjectId>300100169483860</ns6:ReceiverProjectId>
 <ns6:ReceiverTaskId>100100090552322</ns6:ReceiverTaskId>
 <ns6:OrganizationId>458</ns6:OrganizationId>
 <ns6:ExpenditureTypeId>10005</ns6:ExpenditureTypeId>
 </ns1:ProjectContractLineInternalAttributes>
 </ns1:ContractLine>
 </ns1:Value>
 </ns2:result>
 </ns0:mergeContractResponse>
 </env:Body>
</env:Envelope>
```

Organization Web Service Sample Payloads

The following topics describe the sample payloads for OrganizationService External V2, for different use cases.

For each use case, you can find the organization type, the operation involved to invoke the web service, followed by sample payload.

Create an Organization

In this use case, we'll create a customer organization.

Operation: **createOrganization**

> **Note:** When creating an organization, you must ensure that the Lookup codes used are defined in the Lookup Type. You can manage lookup types and lookup codes in the task Manage Standard Lookups.

Request Body

```
<?xml version="1.0" encoding="UTF-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule/
types/">
 <ns1:createOrganization>
 <ns1:organizationParty xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/">
 <ns2:CreatedByModule>AMS</ns2:CreatedByModule>
 <ns2:PartyUsageAssignment xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/">
 <ns3:PartyUsageCode>CUSTOMER</ns3:PartyUsageCode>
 <ns3:CreatedByModule>AMS</ns3:CreatedByModule>
 </ns2:PartyUsageAssignment>
```

```
 <ns2:OrganizationProfile>
 <ns2:OrganizationName>Indian AutoComp</ns2:OrganizationName>
 <ns2:CeoName>Alan</ns2:CeoName>
 <ns2:CreatedByModule>AMS</ns2:CreatedByModule>
 </ns2:OrganizationProfile>
 <ns2:Email xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/">
 <ns4:CreatedByModule>AMS</ns4:CreatedByModule>
 <ns4:EmailAddress>test@oracle.com</ns4:EmailAddress>
 <ns4:EmailFormat>MAILHTML</ns4:EmailFormat>
 <ns4:OwnerTableName>HZ_PARTIES</ns4:OwnerTableName>
 <ns4:OriginalSystemReference xmlns:ns16="http://xmlns.oracle.com/apps/cdm/foundation/parties/
partyService/">
 <ns16:OrigSystem>CSV</ns16:OrigSystem>
 <ns16:OrigSystemReference>TestEmail001</ns16:OrigSystemReference>
 <ns16:OwnerTableName>HZ_CONTACT_POINTS</ns16:OwnerTableName>
 <ns16:CreatedByModule>AMS</ns16:CreatedByModule>
 </ns4:OriginalSystemReference>
 </ns2:Email>
 <ns2:InstantMessaging xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/">
 <ns5:CreatedByModule>AMS</ns5:CreatedByModule>
 <ns5:InstantMessengerType>YAHOO</ns5:InstantMessengerType>
 <ns5:InstantMessagingAddress>corp@oracle.com</ns5:InstantMessagingAddress>
 <ns5:ContactPointPurpose>BUSINESS</ns5:ContactPointPurpose>
 <ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
 <ns5:OriginalSystemReference xmlns:ns16="http://xmlns.oracle.com/apps/cdm/foundation/parties/
partyService/">
 <ns16:OrigSystem>CSV</ns16:OrigSystem>
 <ns16:OrigSystemReference>TestIM001</ns16:OrigSystemReference>
 <ns16:OwnerTableName>HZ_CONTACT_POINTS</ns16:OwnerTableName>
 <ns16:CreatedByModule>AMS</ns16:CreatedByModule>
 </ns5:OriginalSystemReference>
 </ns2:InstantMessaging>
 <ns2:Phone xmlns:ns49="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/">
 <ns49:OwnerTableName>HZ_PARTIES</ns49:OwnerTableName>
 <ns49:CreatedByModule>AMS</ns49:CreatedByModule>
 <ns49:ContactPointPurpose>BUSINESS</ns49:ContactPointPurpose>
 <ns49:PhoneAreaCode>650</ns49:PhoneAreaCode>
 <ns49:PhoneCountryCode>1</ns49:PhoneCountryCode>
 <ns49:PhoneNumber>6338437</ns49:PhoneNumber>
 <ns49:PhoneExtension>8437</ns49:PhoneExtension>
 <ns49:OriginalSystemReference xmlns:ns50="http://xmlns.oracle.com/apps/cdm/foundation/parties/
partyService/">
 <ns50:OrigSystem>CSV</ns50:OrigSystem>
 <ns50:OrigSystemReference>TestPhone001</ns50:OrigSystemReference>
 <ns50:OwnerTableName>HZ_CONTACT_POINTS</ns50:OwnerTableName>
 <ns50:CreatedByModule>AMS</ns50:CreatedByModule>
 </ns49:OriginalSystemReference>
 </ns2:Phone>
 </ns1:organizationParty>
 </ns1:createOrganization>
</soap:Body>
</soap:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/types/">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule//
OrganizationService/createOrganizationResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:93009ac9-3278-4131-ada8-a3e40a637182</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:createOrganizationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/">
```

```
 <ns3:result xsi:type="ns2:OrganizationPartyResult" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/organizationService/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule/
types/" xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/
svc/types/" xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/"
 xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance">
 <ns2:Value>
 <ns2:PartyNumber>CDRM_1003763</ns2:PartyNumber>
 <ns2:PartyId>300100573316847</ns2:PartyId>
 <ns2:PartyType>ORGANIZATION</ns2:PartyType>
 <ns2:PartyName>Indian AutoComp</ns2:PartyName>
 <ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
 <ns2:ValidatedFlag xsi:nil="true"/>
 <ns2:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns2:LastUpdateLogin>
 <ns2:CreationDate>2021-09-15T04:27:44.0Z</ns2:CreationDate>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:LastUpdateDate>2021-09-15T04:28:10.287Z</ns2:LastUpdateDate>
 <ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
 <ns2:OrigSystemReference>300100573316847</ns2:OrigSystemReference>
 <ns2:HQBranchIndicator xsi:nil="true"/>
 <ns2:DUNSNumberC xsi:nil="true"/>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:JgzzFiscalCode xsi:nil="true"/>
 <ns2:Address1 xsi:nil="true"/>
 <ns2:Country xsi:nil="true"/>
 <ns2:Address3 xsi:nil="true"/>
 <ns2:GroupType xsi:nil="true"/>
 <ns2:Address2 xsi:nil="true"/>
 <ns2:Address4 xsi:nil="true"/>
 <ns2:Status>A</ns2:Status>
 <ns2:City xsi:nil="true"/>
 <ns2:PostalCode xsi:nil="true"/>
 <ns2:County xsi:nil="true"/>
 <ns2:YearEstablished xsi:nil="true"/>
 <ns2:Province xsi:nil="true"/>
 <ns2:State xsi:nil="true"/>
 <ns2:URL xsi:nil="true"/>
 <ns2:AnalysisFy xsi:nil="true"/>
 <ns2:SICCodeType xsi:nil="true"/>
 <ns2:EmailAddress>test@oracle.com</ns2:EmailAddress>
 <ns2:FiscalYearendMonth xsi:nil="true"/>
 <ns2:EmployeesTotal xsi:nil="true"/>
 <ns2:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
 <ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
 <ns2:GSAIndicatorFlag xsi:nil="true"/>
 <ns2:CategoryCode xsi:nil="true"/>
 <ns2:LanguageName xsi:nil="true"/>
 <ns2:MissionStatement xsi:nil="true"/>
 <ns2:ThirdPartyFlag xsi:nil="true"/>
 <ns2:HomeCountry xsi:nil="true"/>
 <ns2:CreatedByModule>AMS</ns2:CreatedByModule>
 <ns2:ObjectVersionNumber>2</ns2:ObjectVersionNumber>
 <ns2:CertificationLevel xsi:nil="true"/>
 <ns2:CertReasonCode xsi:nil="true"/>
 <ns2:PrimaryPhonePurpose>BUSINESS</ns2:PrimaryPhonePurpose>
 <ns2:PrimaryPhoneContactPointId>300100573316858</ns2:PrimaryPhoneContactPointId>
 <ns2:PrimaryPhoneLineType>GEN</ns2:PrimaryPhoneLineType>
 <ns2:PrimaryPhoneCountryCode>1</ns2:PrimaryPhoneCountryCode>
 <ns2:PrimaryPhoneAreaCode>650</ns2:PrimaryPhoneAreaCode>
 <ns2:PrimaryPhoneNumber>6338437</ns2:PrimaryPhoneNumber>
 <ns2:PreferredContactMethod xsi:nil="true"/>
 <ns2:PrimaryPhoneExtension>8437</ns2:PrimaryPhoneExtension>
 <ns2:IdenAddrLocationId xsi:nil="true"/>
 <ns2:PrimaryURLContactPointId xsi:nil="true"/>
 <ns2:PrimaryEmailContactPointId>300100573316848</ns2:PrimaryEmailContactPointId>
```

```
<ns2:IdenAddrPartySiteId xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PersonSecondLastName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:TradingPartnerIdentifier xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:Comments xsi:nil="true"/>
<ns2:CeoName>Alan</ns2:CeoName>
<ns2:PrincipalName xsi:nil="true"/>
<ns2:OrganizationSize xsi:nil="true"/>
<ns2:PartyUniqueName>Indian AutoComp</ns2:PartyUniqueName>
<ns2:SourceSystem xsi:nil="true"/>
<ns2:SourceSystemReferenceValue xsi:nil="true"/>
<ns2:SourceSystemUpdateDate xsi:nil="true"/>
<ns2:Email xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/">
<ns5:ContactPointId>300100573316848</ns5:ContactPointId>
<ns5:ContactPointType>EMAIL</ns5:ContactPointType>
<ns5:Status>A</ns5:Status>
<ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
<ns5:OwnerTableId>300100573316847</ns5:OwnerTableId>
<ns5:PrimaryFlag>true</ns5:PrimaryFlag>
<ns5:OrigSystemReference>300100573316848</ns5:OrigSystemReference>
<ns5:LastUpdateDate>2021-09-15T04:28:05.572Z</ns5:LastUpdateDate>
<ns5:LastUpdatedBy>SALES_ADMIN</ns5:LastUpdatedBy>
<ns5:CreationDate>2021-09-15T04:27:44.058Z</ns5:CreationDate>
<ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
<ns5:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns5:LastUpdateLogin>
<ns5:RequestId xsi:nil="true"/>
<ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
<ns5:CreatedByModule>AMS</ns5:CreatedByModule>
<ns5:ContactPointPurpose xsi:nil="true"/>
<ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
<ns5:StartDate>2021-09-15</ns5:StartDate>
<ns5:EndDate>4712-12-31</ns5:EndDate>
<ns5:RelationshipId xsi:nil="true"/>
<ns5:PartyUsageCode xsi:nil="true"/>
<ns5:OrigSystem xsi:nil="true"/>
<ns5:EmailFormat>MAILHTML</ns5:EmailFormat>
<ns5:EmailAddress>test@oracle.com</ns5:EmailAddress>
<ns5:PartyName>Indian AutoComp</ns5:PartyName>
<ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
<ns5:OriginalSystemReference xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
<ns1:OrigSystemReferenceId>300100573316849</ns1:OrigSystemReferenceId>
<ns1:OrigSystem>CSV</ns1:OrigSystem>
<ns1:OrigSystemReference>TestEmail001</ns1:OrigSystemReference>
<ns1:OwnerTableName>HZ_CONTACT_POINTS</ns1:OwnerTableName>
<ns1:OwnerTableId>300100573316848</ns1:OwnerTableId>
<ns1:Status>A</ns1:Status>
<ns1:ReasonCode xsi:nil="true"/>
<ns1:OldOrigSystemReference xsi:nil="true"/>
<ns1:StartDateActive>2021-09-15</ns1:StartDateActive>
<ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:CreationDate>2021-09-15T04:27:44.535Z</ns1:CreationDate>
<ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
<ns1:LastUpdateDate>2021-09-15T04:28:05.286Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns1:LastUpdateLogin>
<ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
<ns1:CreatedByModule>AMS</ns1:CreatedByModule>
<ns1:PartyId xsi:nil="true"/>
<ns1:RequestId xsi:nil="true"/>
</ns5:OriginalSystemReference>
</ns2:Email>
```

```
 <ns2:InstantMessaging xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/">
 <ns5:ContactPointId>300100573316855</ns5:ContactPointId>
 <ns5:ContactPointType>INSTANT_MESSAGING</ns5:ContactPointType>
 <ns5:Status>A</ns5:Status>
 <ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
 <ns5:OwnerTableId>300100573316847</ns5:OwnerTableId>
 <ns5:PrimaryFlag>true</ns5:PrimaryFlag>
 <ns5:OrigSystemReference>300100573316855</ns5:OrigSystemReference>
 <ns5:LastUpdateDate>2021-09-15T04:28:06.291Z</ns5:LastUpdateDate>
 <ns5:LastUpdatedBy>SALES_ADMIN</ns5:LastUpdatedBy>
 <ns5:CreationDate>2021-09-15T04:27:49.392Z</ns5:CreationDate>
 <ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
 <ns5:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns5:LastUpdateLogin>
 <ns5:RequestId xsi:nil="true"/>
 <ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
 <ns5:CreatedByModule>AMS</ns5:CreatedByModule>
 <ns5:ContactPointPurpose>BUSINESS</ns5:ContactPointPurpose>
 <ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
 <ns5:StartDate>2021-09-15</ns5:StartDate>
 <ns5:EndDate>4712-12-31</ns5:EndDate>
 <ns5:RelationshipId xsi:nil="true"/>
 <ns5:PartyUsageCode xsi:nil="true"/>
 <ns5:OrigSystem xsi:nil="true"/>
 <ns5:InstantMessengerType>YAHOO</ns5:InstantMessengerType>
 <ns5:InstantMessagingAddress>corp@oracle.com</ns5:InstantMessagingAddress>
 <ns5:PartyName>Indian AutoComp</ns5:PartyName>
 <ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
 <ns5:OriginalSystemReference xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns1:OrigSystemReferenceId>300100573316856</ns1:OrigSystemReferenceId>
 <ns1:OrigSystem>CSV</ns1:OrigSystem>
 <ns1:OrigSystemReference>TestIM001</ns1:OrigSystemReference>
 <ns1:OwnerTableName>HZ_CONTACT_POINTS</ns1:OwnerTableName>
 <ns1:OwnerTableId>300100573316855</ns1:OwnerTableId>
 <ns1:Status>A</ns1:Status>
 <ns1:ReasonCode xsi:nil="true"/>
 <ns1:OldOrigSystemReference xsi:nil="true"/>
 <ns1:StartDateActive>2021-09-15</ns1:StartDateActive>
 <ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:CreationDate>2021-09-15T04:27:49.728Z</ns1:CreationDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:LastUpdateDate>2021-09-15T04:28:05.29Z</ns1:LastUpdateDate>
 <ns1:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns1:LastUpdateLogin>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedByModule>AMS</ns1:CreatedByModule>
 <ns1:PartyId xsi:nil="true"/>
 <ns1:RequestId xsi:nil="true"/>
 </ns5:OriginalSystemReference>
 </ns2:InstantMessaging>
 <ns2:OrganizationProfile xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
organization/">
 <ns2:OrganizationProfileId>300100573316847</ns2:OrganizationProfileId>
 <ns2:PartyId>300100573316847</ns2:PartyId>
 <ns2:OrganizationName>Indian AutoComp</ns2:OrganizationName>
 <ns2:EnquiryDUNS xsi:nil="true"/>
 <ns2:CeoName>Alan</ns2:CeoName>
 <ns2:CeoTitle xsi:nil="true"/>
 <ns2:PrincipalName xsi:nil="true"/>
 <ns2:PrincipalTitle xsi:nil="true"/>
 <ns2:LegalStatus xsi:nil="true"/>
 <ns2:ControlYr xsi:nil="true"/>
 <ns2:EmployeesTotal xsi:nil="true"/>
 <ns2:HQBranchIndicator xsi:nil="true"/>
 <ns2:BranchFlag xsi:nil="true"/>
 <ns2:OobInd xsi:nil="true"/>
```

```
<ns2:LineOfBusiness xsi:nil="true"/>
<ns2:CongDistCode xsi:nil="true"/>
<ns2:ImportInd xsi:nil="true"/>
<ns2:ExportInd xsi:nil="true"/>
<ns2:LaborSurplusInd xsi:nil="true"/>
<ns2:MinorityOwnedInd xsi:nil="true"/>
<ns2:MinorityOwnedType xsi:nil="true"/>
<ns2:WomanOwnedInd xsi:nil="true"/>
<ns2:Disadv8aInd xsi:nil="true"/>
<ns2:SmallBusInd xsi:nil="true"/>
<ns2:RentOwnInd xsi:nil="true"/>
<ns2:DbRating xsi:nil="true"/>
<ns2:GSAIndicatorFlag xsi:nil="true"/>
<ns2:JgzzFiscalCode xsi:nil="true"/>
<ns2:AnalysisFy xsi:nil="true"/>
<ns2:FiscalYearendMonth xsi:nil="true"/>
<ns2:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
<ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
<ns2:YearEstablished xsi:nil="true"/>
<ns2:MissionStatement xsi:nil="true"/>
<ns2:OrganizationType xsi:nil="true"/>
<ns2:BusinessScope xsi:nil="true"/>
<ns2:CorporationClass xsi:nil="true"/>
<ns2:LocalBusIdenType xsi:nil="true"/>
<ns2:LocalBusIdentifier xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:RegistrationType xsi:nil="true"/>
<ns2:TotalEmployeesText xsi:nil="true"/>
<ns2:TotalEmployeesInd xsi:nil="true"/>
<ns2:TotalEmployeesEstimatedIndicator xsi:nil="true"/>
<ns2:TotalEmployeesMinimumIndicator xsi:nil="true"/>
<ns2:ParentSubInd xsi:nil="true"/>
<ns2:IncorpYear xsi:nil="true"/>
<ns2:LastUpdateDate>2021-09-15T04:28:09.623Z</ns2:LastUpdateDate>
<ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
<ns2:CreationDate>2021-09-15T04:27:52.652Z</ns2:CreationDate>
<ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
<ns2:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns2:LastUpdateLogin>
<ns2:RequestId xsi:nil="true"/>
<ns2:ContentSourceNumber xsi:nil="true"/>
<ns2:EffectiveStartDate>2021-09-15</ns2:EffectiveStartDate>
<ns2:EffectiveEndDate>4712-12-31</ns2:EffectiveEndDate>
<ns2:PublicPrivateOwnershipFlag xsi:nil="true"/>
<ns2:LocalActivityCodeType xsi:nil="true"/>
<ns2:LocalActivityCode xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddress xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressText xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressEstimation xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressMinimum xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:TotalPaymentAmount xsi:nil="true"/>
<ns2:DisplayedDUNSPartyIdentifier xsi:nil="true"/>
<ns2:Status>A</ns2:Status>
<ns2:DUNSNumberC xsi:nil="true"/>
<ns2:CreatedByModule>AMS</ns2:CreatedByModule>
<ns2:BankOrBranchNumber xsi:nil="true"/>
<ns2:BankCode xsi:nil="true"/>
<ns2:BranchCode xsi:nil="true"/>
<ns2:DoNotConfuseWith xsi:nil="true"/>
<ns2:HomeCountry xsi:nil="true"/>
<ns2:GrowthStrategyDescription xsi:nil="true"/>
<ns2:SeblUserKeyLoc xsi:nil="true"/>
<ns2:StockSymbol xsi:nil="true"/>
<ns2:TradingPartnerIdentifier xsi:nil="true"/>
<ns2:OrigSystem xsi:nil="true"/>
<ns2:OrigSystemReference>300100573316847</ns2:OrigSystemReference>
```

```
<ns2:EffectiveSequence>1</ns2:EffectiveSequence>
<ns2:Comments xsi:nil="true"/>
<ns2:EffectiveLatestChange>Y</ns2:EffectiveLatestChange>
<ns2:OrganizationSize xsi:nil="true"/>
<ns2:SuffixOverriddenFlag>false</ns2:SuffixOverriddenFlag>
<ns2:UniqueNameAlias>Indian AutoComp</ns2:UniqueNameAlias>
<ns2:UniqueNameSuffix xsi:nil="true"/>
<ns2:DomesticUltimateDUNSNumberC xsi:nil="true"/>
<ns2:GlobalUltimateDUNSNumberC xsi:nil="true"/>
<ns2:ParentDUNSNumberC xsi:nil="true"/>
<ns2:CorpCurrencyCode>USD</ns2:CorpCurrencyCode>
<ns2:CurcyConvRateType>Corporate</ns2:CurcyConvRateType>
<ns2:CurrencyCode>USD</ns2:CurrencyCode>
<ns2:PartyNumber>CDRM_1003763</ns2:PartyNumber>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredContactName xsi:nil="true"/>
<ns2:PreferredContactEmailAddress xsi:nil="true"/>
<ns2:PreferredContactFormattedPhoneNumber xsi:nil="true"/>
<ns2:PrimaryAddressLine1 xsi:nil="true"/>
<ns2:PrimaryAddressLine2 xsi:nil="true"/>
<ns2:PrimaryAddressLine3 xsi:nil="true"/>
<ns2:PrimaryAddressLine4 xsi:nil="true"/>
<ns2:Alias xsi:nil="true"/>
<ns2:PrimaryAddressCity xsi:nil="true"/>
<ns2:PrimaryAddressCountry xsi:nil="true"/>
<ns2:PrimaryAddressCounty xsi:nil="true"/>
<ns2:PrimaryEmailAddress>test@oracle.com</ns2:PrimaryEmailAddress>
<ns2:PrimaryFormattedPhoneNumber>+1 (650) 633-8437 x8437</ns2:PrimaryFormattedPhoneNumber>
<ns2:IdenAddrLocationId xsi:nil="true"/>
<ns2:IdenAddrPartySiteId xsi:nil="true"/>
<ns2:PrimaryLanguage xsi:nil="true"/>
<ns2:PartyUniqueName>Indian AutoComp</ns2:PartyUniqueName>
<ns2:PrimaryAddressPostalCode xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PrimaryEmailId>300100573316848</ns2:PrimaryEmailId>
<ns2:PrimaryPhoneAreaCode>650</ns2:PrimaryPhoneAreaCode>
<ns2:PrimaryPhoneId>300100573316858</ns2:PrimaryPhoneId>
<ns2:PrimaryPhoneCountryCode>1</ns2:PrimaryPhoneCountryCode>
<ns2:PrimaryPhoneExtension>8437</ns2:PrimaryPhoneExtension>
<ns2:PrimaryPhoneLineType>GEN</ns2:PrimaryPhoneLineType>
<ns2:PrimaryPhoneNumber>6338437</ns2:PrimaryPhoneNumber>
<ns2:PrimaryPhonePurpose>BUSINESS</ns2:PrimaryPhonePurpose>
<ns2:PrimaryWebId xsi:nil="true"/>
<ns2:Pronunciation xsi:nil="true"/>
<ns2:PrimaryAddressProvince xsi:nil="true"/>
<ns2:SICCode xsi:nil="true"/>
<ns2:SICCodeType xsi:nil="true"/>
<ns2:PrimaryAddressState xsi:nil="true"/>
<ns2:PrimaryURL xsi:nil="true"/>
<ns2:ValidatedFlag xsi:nil="true"/>
<ns2:ThirdPartyFlag xsi:nil="true"/>
<ns2:LastUpdateSourceSystem>UNKNOWN</ns2:LastUpdateSourceSystem>
<ns2:LastSourceUpdateDate>2021-09-15T04:28:06.0Z</ns2:LastSourceUpdateDate>
<ns2:DataCloudStatus xsi:nil="true"/>
<ns2:LastEnrichmentDate xsi:nil="true"/>
<ns2:R10_CmnCustObj_Id_R10_CmnCustObj_To_Account xsi:nil="true"/>
<ns2:Lead_Id_R10_LeadAccountRel xsi:nil="true"/>
<ns2:PartnerProfile_Id_R10_PartnerAccountRelationship xsi:nil="true"/>
<ns2:R10_AccountText_c xsi:nil="true"/>
<ns2:R10_AccountNum_c>1234</ns2:R10_AccountNum_c>
<ns2:R10_AccountDate_c xsi:nil="true"/>
<ns2:Enrollment_Id_R10_EnrollAccountRelationship xsi:nil="true"/>
```

```
<ns2:Program_Id_R10_ProgramAccountrelationship xsi:nil="true"/>
<ns2:Opportunity_Id_R10OptyAcntRel xsi:nil="true"/>
<ns2:R10_AccountCheckbox_c>false</ns2:R10_AccountCheckbox_c>
<ns2:R10_AccountFixChList_c xsi:nil="true"/>
<ns2:R10_AccountDynChList_Id_c xsi:nil="true"/>
<ns2:R10_AccountDynChList_c xsi:nil="true"/>
<ns2:R10_AccountCurrency_c xsi:nil="true"/>
<ns2:R10_AccountDateTime_c xsi:nil="true"/>
<ns2:R10_AccountPerc_c xsi:nil="true"/>
<ns2:R10_AccountTextFormula_c>This Record was Created by: SALES_ADMIN</ns2:R10_AccountTextFormula_c>
<ns2:SalesGoal_Id_R10_QMAccountRel xsi:nil="true"/>
<ns2:R10_AccountTCM_Text_c xsi:nil="true"/>
<ns2:R10_AccountTCM_Number_c xsi:nil="true"/>
<ns2:R10_AccountTCM_Date_c xsi:nil="true"/>
<ns2:R10_AccountRecordtype_c xsi:nil="true"/>
<ns2:R10_ACCText_c xsi:nil="true"/>
<ns2:R10_ACCNumber_c xsi:nil="true"/>
<ns2:R10_ACCDate_c xsi:nil="true"/>
<ns2:REL10_AccountType_Toyota_c xsi:nil="true"/>
<ns2:REL10_AnnualRevenue_c xsi:nil="true"/>
<ns2:REL10_CBofTotalFleet_c xsi:nil="true"/>
<ns2:REL10_CompaniesInterest_c xsi:nil="true"/>
<ns2:REL10_CreditLimit_c xsi:nil="true"/>
<ns2:REL10_CustomerNumber_c xsi:nil="true"/>
<ns2:REL10_CustomerSince_c xsi:nil="true"/>
<ns2:REL10_EKAAgreement_c xsi:nil="true"/>
<ns2:REL10_EKAAgreementName_Id_c xsi:nil="true"/>
<ns2:REL10_EKAAgreementName_c xsi:nil="true"/>
<ns2:RE10_EKAExistingSince_c xsi:nil="true"/>
<ns2:REL10_EKAInformation_c xsi:nil="true"/>
<ns2:REL10_EKAIntranet_c xsi:nil="true"/>
<ns2:REL10_EKAManager_c xsi:nil="true"/>
<ns2:REL10_EKAProspectSince_c xsi:nil="true"/>
<ns2:REL10_EKASalesSupport_c xsi:nil="true"/>
<ns2:REL10_EKASuppliers_c xsi:nil="true"/>
<ns2:REL10_ExpiryDateForCurrentAgre_c xsi:nil="true"/>
<ns2:REL10_FiscalYearStartMonth_c xsi:nil="true"/>
<ns2:REL10_FleetSize_c xsi:nil="true"/>
<ns2:REL10_InternationalAccountNumb_c xsi:nil="true"/>
<ns2:REL10_LocalInfo1_c xsi:nil="true"/>
<ns2:REL10_LocalInfo2_c xsi:nil="true"/>
<ns2:REL10_LocalInfo3_c xsi:nil="true"/>
<ns2:Reference_Id_R10_REFAccountRel xsi:nil="true"/>
<ns2:R10_AccountText_M_c xsi:nil="true"/>
<ns2:R10_AccountFixChList_M_c xsi:nil="true"/>
<ns2:R10_Account_DCL_SalesCO_Id_c xsi:nil="true"/>
<ns2:R10_Account_DCL_SalesCO_c xsi:nil="true"/>
<ns2:R10_Account_DCL_Contact_Id_c xsi:nil="true"/>
<ns2:R10_Account_DCL_Contact_c xsi:nil="true"/>
<ns2:AccountIdCF_c xsi:nil="true"/>
<ns2:CustomerSince_c xsi:nil="true"/>
<ns2:CompaniesInterest_c>Used</ns2:CompaniesInterest_c>
<ns2:EKAAgreementCF_Id_c xsi:nil="true"/>
<ns2:EKAAgreementCF_c xsi:nil="true"/>
<ns2:InternationalAccountNumber_Id_c xsi:nil="true"/>
<ns2:InternationalAccountNumber_c xsi:nil="true"/>
<ns2:AnnualBusinessPlanatTSight_c xsi:nil="true"/>
<ns2:CBoftotalfleet_c xsi:nil="true"/>
<ns2:WH_c xsi:nil="true"/>
<ns2:NewBusiness_c>false</ns2:NewBusiness_c>
<ns2:STR_c>false</ns2:STR_c>
<ns2:Rel10_SP_TXT_c xsi:nil="true"/>
<ns2:Deal_Id_R10DealAccountrelationship xsi:nil="true"/>
<ns2:TestPercentage_c xsi:nil="true"/>
<ns2:BudgetFundRequest_Id_R11MDFRequestToAccount1M xsi:nil="true"/>
<ns2:Claim_Id_R11MDFClaimAccount_Rel xsi:nil="true"/>
```

```
<ns2:R11_AccountBP_Text_c xsi:nil="true"/>
<ns2:BusinessPlan_Id_R11_BP_Account_rel xsi:nil="true"/>
<ns2:Budget_Id_R11MDFBudgetToAccount xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_TEXT_c xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_NUM_c xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_FCL_c xsi:nil="true"/>
<ns2:R11_Acct_DATE_c xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_CHKBOX_c>false</ns2:R11_RNOW_ACCT_CHKBOX_c>
<ns2:R11_RNOW_ACCT_DATETIME_c xsi:nil="true"/>
<ns2:Deal_Id_REL11_RELATION_ACCOUNT xsi:nil="true"/>
<ns2:SalesObjective_Id_Upg_BO_Acc_1M xsi:nil="true"/>
<ns2:Atext_c xsi:nil="true"/>
<ns2:Anum_c xsi:nil="true"/>
<ns2:Adate_c xsi:nil="true"/>
<ns2:Acheckbox_c>false</ns2:Acheckbox_c>
<ns2:Apercentage_c xsi:nil="true"/>
<ns2:Adatetime_c xsi:nil="true"/>
<ns2:Acuurency_c xsi:nil="true"/>
<ns2:Afcl_c xsi:nil="true"/>
<ns2:Adcl_Id_c xsi:nil="true"/>
<ns2:Adcl_c xsi:nil="true"/>
<ns2:Product_Id_Product2Account xsi:nil="true"/>
<ns2:PriceBookHeader_Id_PB2Account xsi:nil="true"/>
<ns2:SalesPromotion_Id_Promotion2Account xsi:nil="true"/>
<ns2:R12_GS_0723_CustomObject2_Id_R12_GS_CustomObject2_relationship xsi:nil="true"/>
<ns2:RNOW_TEXT_0724_c xsi:nil="true"/>
<ns2:RNOW_NUM_0724_c xsi:nil="true"/>
<ns2:RNOW_ACCT_FCL_0724_c xsi:nil="true"/>
<ns2:RNOW_ACCT_CHKBOX_0724_c>false</ns2:RNOW_ACCT_CHKBOX_0724_c>
<ns2:RNOW_ACCT_DATA_0724_c xsi:nil="true"/>
<ns2:RNOW_ACCT_DATETIME_0724_c xsi:nil="true"/>
<ns2:SalesTerritory_Id_CDRMSalesTerritoryCustObjAccRel xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Fcl_c xsi:nil="true"/>
<ns2:R12PB8_Zem_AccountToContact_DC_Id_c xsi:nil="true"/>
<ns2:R12PB8_Zem_AccountToContact_DC_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Text_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Number_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Date_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_DateTime_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_CheckBox_c>false</ns2:R12PB8_Zem_Account_CheckBox_c>
<ns2:R12PB8_Zem_Account_Percentage_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_ParentFcl_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_ChildFcl_c xsi:nil="true"/>
<ns2:SalesCountry_c xsi:nil="true"/>
<ns2:SalesRegion_c xsi:nil="true"/>
<ns2:SalesCluster_c xsi:nil="true"/>
<ns2:LogisticsRail_c>Logistics</ns2:LogisticsRail_c>
<ns2:ExternalId_c xsi:nil="true"/>
<ns2:Organization_Id_Account_Account xsi:nil="true"/>
<ns2:Type_c>ZCA_Prospect</ns2:Type_c>
<ns2:Category_c xsi:nil="true"/>
<ns2:ParentExternalId_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_mcl_c xsi:nil="true"/>
<ns2:ResDCL_Id_c xsi:nil="true"/>
<ns2:ResDCL_c xsi:nil="true"/>
<ns2:R1802BIObj_Id_R13_1802_CO_Acccount xsi:nil="true"/>
<ns2:R1802_Text_c xsi:nil="true"/>
<ns2:R1802_Number_c xsi:nil="true"/>
<ns2:R13_COPYMAP_TEXT_c xsi:nil="true"/>
<ns2:R13_COPYMAP_NUMBER_c xsi:nil="true"/>
<ns2:R1802CustObj_Id_R1805COtoAccount xsi:nil="true"/>
<ns2:O365_1810_DCL_Id_c xsi:nil="true"/>
<ns2:O365_1810_DCL_c xsi:nil="true"/>
<ns2:ACCPICKERTEXT_c xsi:nil="true"/>
<ns2:Text_Elastic_c xsi:nil="true"/>
<ns2:Number_Elastic_c xsi:nil="true"/>
```

```
<ns2:Date_Elastic_c xsi:nil="true"/>
<ns2:PARENT1_c xsi:nil="true"/>
<ns2:PARENT2_c xsi:nil="true"/>
<ns2:PARENT3_c xsi:nil="true"/>
<ns2:SON1_c xsi:nil="true"/>
<ns2:SON2_c xsi:nil="true"/>
<ns2:SON3_c xsi:nil="true"/>
<ns2:SON4_c xsi:nil="true"/>
<ns2:SON5_c xsi:nil="true"/>
<ns2:SON6_c xsi:nil="true"/>
<ns2:CHILD1_c xsi:nil="true"/>
<ns2:CHILD2_c xsi:nil="true"/>
<ns2:CHILD3_c xsi:nil="true"/>
<ns2:CHILD4_c xsi:nil="true"/>
<ns2:Lead_Id_R13_LeadsAccount xsi:nil="true"/>
<ns2:O365_1904_AccntSimpleTxt_c>This is the default text set in the field</ns2:O365_1904_AccntSimpleTxt_c>
<ns2:O365_1904_AccntMultiText_c>Default text in text field of type Multiline text area.Sample text in text
field of type</ns2:O365_1904_AccntMultiText_c>
<ns2:O365_1904_AccntNum_c>987684</ns2:O365_1904_AccntNum_c>
<ns2:O365_1904_AccntDate_c>2019-02-20</ns2:O365_1904_AccntDate_c>
<ns2:O365_1904_AccntLngTxt_c>SXQgaXMgYSBsb25nIGVzdGFibGlzaGVkIGZhY3QgdGhhdCBhIHJlYWRlciB3aWxsIGJlIGRpc3RyYWN0ZWQgYn
ns2:O365_1904_AccntLngTxt_c>
<ns2:O365_1904_AccntChkBox_c>true</ns2:O365_1904_AccntChkBox_c>
<ns2:O365_1904_AccntPerc_c>0.45</ns2:O365_1904_AccntPerc_c>
<ns2:O365_1904_AccntDtTime_c>2019-02-27T02:45:00.0Z</ns2:O365_1904_AccntDtTime_c>
<ns2:O365_1904_AccntCur_c currencyCode="USD">9878355</ns2:O365_1904_AccntCur_c>
<ns2:O365_1904_AccntFCL_c>L</ns2:O365_1904_AccntFCL_c>
<ns2:O365_1904_AccntMCL_c>CEO,CIO,VP</ns2:O365_1904_AccntMCL_c>
<ns2:O365_1904_AccntChldFCL_c xsi:nil="true"/>
<ns2:O365_1904_AccntChldMCL_c xsi:nil="true"/>
<ns2:O365_1904_AccntDCL_Id_c xsi:nil="true"/>
<ns2:O365_1904_AccntDCL_c xsi:nil="true"/>
<ns2:R1810SrcCustObj_Id_OneMSalesCustAccount xsi:nil="true"/>
<ns2:R1810SrcCustObj_Id_SalesCustAccount_1M xsi:nil="true"/>
<ns2:AUX_DCLServiceRequest1_Id_c xsi:nil="true"/>
<ns2:AUX_DCLServiceRequest1_c xsi:nil="true"/>
<ns2:R1904CustomObjectDCL_Id_c xsi:nil="true"/>
<ns2:R1904CustomObjectDCL_c xsi:nil="true"/>
<ns2:R1805CustomObj2_Id_CustomtoAccount xsi:nil="true"/>
<ns2:M2004_CXM_Text_c xsi:nil="true"/>
<ns2:M2004_CXM_MobileNum_c xsi:nil="true"/>
<ns2:M2004_CXM_Date_c xsi:nil="true"/>
<ns2:M2004_CXM_CB_c>false</ns2:M2004_CXM_CB_c>
<ns2:M2004_CXM_DateTime_c xsi:nil="true"/>
<ns2:M2004_CXM_Perc_c xsi:nil="true"/>
<ns2:M2004_CXM_Currency_c xsi:nil="true"/>
<ns2:M2004_CXM_Fcl_c xsi:nil="true"/>
<ns2:M2004_CXM_ParentFcl_c xsi:nil="true"/>
<ns2:M2004_CXM_ChildFcl_c xsi:nil="true"/>
<ns2:M2004_CXM_DCLContact_Id_c xsi:nil="true"/>
<ns2:M2004_CXM_DCLContact_c xsi:nil="true"/>
<ns2:M2004_CXM_DCLOppty_Id_c xsi:nil="true"/>
<ns2:M2004_CXM_DCLOppty_c xsi:nil="true"/>
<ns2:Opportunity_Id_M2004_CXM_1ToMOpptyToAccount xsi:nil="true"/>
<ns2:ConditionallyMandatory_c xsi:nil="true"/>
<ns2:O365_2004_ACCTEXT_c xsi:nil="true"/>
<ns2:O365_2004_stdLkup_c xsi:nil="true"/>
<ns2:O365_2004_CustomLkup_c xsi:nil="true"/>
<ns2:O365_2004_StdLkUPm1_c xsi:nil="true"/>
<ns2:M2004_CXM_DCLCusOBJ1_Id_c xsi:nil="true"/>
<ns2:M2004_CXM_DCLCusOBJ1_c xsi:nil="true"/>
<ns2:M2004_CXM_MCL_c xsi:nil="true"/>
<ns2:Account_FCL_MultiSelect_c xsi:nil="true"/>
<ns2:Account_FCL_Parent_c xsi:nil="true"/>
<ns2:Account_FCL_Child_c xsi:nil="true"/>
<ns2:Account_DCL_Driidown_Id_c xsi:nil="true"/>
```

```
<ns2:Account_DCL_Driidown_c xsi:nil="true"/>
<ns2:TextAdvExpr_c xsi:nil="true"/>
<ns2:M2101_CXM_Link_c>https://www.oracle.com</ns2:M2101_CXM_Link_c>
<ns2:AAACustomFCL_c xsi:nil="true"/>
<ns2:AAACustomCheckbox_c>false</ns2:AAACustomCheckbox_c>
<ns2:CDA_Text_c xsi:nil="true"/>
<ns2:CDA_Num_c xsi:nil="true"/>
<ns2:CDA_Dat_c xsi:nil="true"/>
<ns2:CDA_CB_c>false</ns2:CDA_CB_c>
<ns2:CDA_Per_c xsi:nil="true"/>
<ns2:CDA_DatTime_c xsi:nil="true"/>
<ns2:CDA_Currency_c xsi:nil="true"/>
<ns2:CDA_FCL_c xsi:nil="true"/>
<ns2:CDA_DCL_Id_c xsi:nil="true"/>
<ns2:CDA_DCL_c xsi:nil="true"/>
<ns2:CDA_CHFCL_c xsi:nil="true"/>
<ns2:CDA_PFCL_c xsi:nil="true"/>
<ns2:CDA_MULFCL_c xsi:nil="true"/>
</ns2:OrganizationProfile>
<ns2:PartyUsageAssignment>
<ns1:PartyUsgAssignmentId>300100573316857</ns1:PartyUsgAssignmentId>
<ns1:PartyId>300100573316847</ns1:PartyId>
<ns1:PartyUsageCode>CUSTOMER</ns1:PartyUsageCode>
<ns1:EffectiveStartDate>2021-09-15</ns1:EffectiveStartDate>
<ns1:EffectiveEndDate>4712-12-31</ns1:EffectiveEndDate>
<ns1:StatusFlag>true</ns1:StatusFlag>
<ns1:Comments xsi:nil="true"/>
<ns1:OwnerTableName xsi:nil="true"/>
<ns1:OwnerTableId xsi:nil="true"/>
<ns1:CreatedByModule>AMS</ns1:CreatedByModule>
<ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:CreationDate>2021-09-15T04:28:01.84Z</ns1:CreationDate>
<ns1:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns1:LastUpdateLogin>
<ns1:LastUpdateDate>2021-09-15T04:28:05.303Z</ns1:LastUpdateDate>
<ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
<ns1:RequestId xsi:nil="true"/>
</ns2:PartyUsageAssignment>
<ns2:Phone xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/">
<ns5:ContactPointId>300100573316858</ns5:ContactPointId>
<ns5:ContactPointType>PHONE</ns5:ContactPointType>
<ns5:Status>A</ns5:Status>
<ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
<ns5:OwnerTableId>300100573316847</ns5:OwnerTableId>
<ns5:PrimaryFlag>true</ns5:PrimaryFlag>
<ns5:OrigSystemReference>300100573316858</ns5:OrigSystemReference>
<ns5:LastUpdateDate>2021-09-15T04:28:10.013Z</ns5:LastUpdateDate>
<ns5:LastUpdatedBy>SALES_ADMIN</ns5:LastUpdatedBy>
<ns5:CreationDate>2021-09-15T04:28:02.552Z</ns5:CreationDate>
<ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
<ns5:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns5:LastUpdateLogin>
<ns5:RequestId xsi:nil="true"/>
<ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
<ns5:CreatedByModule>AMS</ns5:CreatedByModule>
<ns5:ContactPointPurpose>BUSINESS</ns5:ContactPointPurpose>
<ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
<ns5:StartDate>2021-09-15</ns5:StartDate>
<ns5:EndDate>4712-12-31</ns5:EndDate>
<ns5:RelationshipId xsi:nil="true"/>
<ns5:PartyUsageCode xsi:nil="true"/>
<ns5:OrigSystem xsi:nil="true"/>
<ns5:PhoneCallingCalendar xsi:nil="true"/>
<ns5:LastContactDtTime xsi:nil="true"/>
<ns5:PhoneAreaCode>650</ns5:PhoneAreaCode>
<ns5:PhoneCountryCode>1</ns5:PhoneCountryCode>
<ns5:PhoneNumber>6338437</ns5:PhoneNumber>
```

```
 <ns5:PhoneExtension>8437</ns5:PhoneExtension>
 <ns5:PhoneLineType>GEN</ns5:PhoneLineType>
 <ns5:RawPhoneNumber>1-650-6338437</ns5:RawPhoneNumber>
 <ns5:PagerTypeCode xsi:nil="true"/>
 <ns5:FormattedPhoneNumber>+1 (650) 633-8437 x8437</ns5:FormattedPhoneNumber>
 <ns5:TransposedPhoneNumber>73483360561</ns5:TransposedPhoneNumber>
 <ns5:PartyName>Indian AutoComp</ns5:PartyName>
 <ns5:TimezoneCode xsi:nil="true"/>
 <ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
 <ns5:OriginalSystemReference xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns1:OrigSystemReferenceId>300100573316859</ns1:OrigSystemReferenceId>
 <ns1:OrigSystem>CSV</ns1:OrigSystem>
 <ns1:OrigSystemReference>TestPhone001</ns1:OrigSystemReference>
 <ns1:OwnerTableName>HZ_CONTACT_POINTS</ns1:OwnerTableName>
 <ns1:OwnerTableId>300100573316858</ns1:OwnerTableId>
 <ns1:Status>A</ns1:Status>
 <ns1:ReasonCode xsi:nil="true"/>
 <ns1:OldOrigSystemReference xsi:nil="true"/>
 <ns1:StartDateActive>2021-09-15</ns1:StartDateActive>
 <ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:CreationDate>2021-09-15T04:28:02.602Z</ns1:CreationDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:LastUpdateDate>2021-09-15T04:28:05.306Z</ns1:LastUpdateDate>
 <ns1:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns1:LastUpdateLogin>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedByModule>AMS</ns1:CreatedByModule>
 <ns1:PartyId xsi:nil="true"/>
 <ns1:RequestId xsi:nil="true"/>
 </ns5:OriginalSystemReference>
 </ns2:Phone>
 </ns2:Value>
 </ns3:result>
 </ns0:createOrganizationResponse>
 </env:Body>
</env:Envelope>
```

Create a Party Site

In this use case, we'll create a party site.

Operation: **mergeOrganization**

Request Body

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
<soap:Body>
 <ns1:mergeOrganization xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/types/">
 <ns1:organizationParty xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/">
 <ns2:PartyId>1003</ns2:PartyId>
 <ns2:PartySite xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/">
 <ns3:LocationId>970</ns3:LocationId>
 <ns3:CreatedByModule>HZ_WS</ns3:CreatedByModule>
 <ns3:PartySiteUse>
 <ns3:SiteUseType>BILL_TO</ns3:SiteUseType>
 <ns3:CreatedByModule>HZ_WS</ns3:CreatedByModule>
 </ns3:PartySiteUse>
 </ns2:PartySite>
 </ns1:organizationParty>
```

```
 </ns1:mergeOrganization>
</soap:Body>
</soap:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/types/">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule//
OrganizationService/mergeOrganizationResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:dd0b4255-aee8-4b3a-88f3-f79d0ba1c87e</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:mergeOrganizationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/">
 <ns3:result xsi:type="ns2:OrganizationPartyResult" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/organizationService/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule/
types/" xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/
svc/types/" xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/"
 xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance">
 <ns2:Value>
 <ns2:PartyNumber>1003</ns2:PartyNumber>
 <ns2:PartyId>1003</ns2:PartyId>
 <ns2:PartyType>ORGANIZATION</ns2:PartyType>
 <ns2:PartyName>OrgTest01282013mnb</ns2:PartyName>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:ValidatedFlag xsi:nil="true"/>
 <ns2:LastUpdateLogin>C980E4EBAC122F15E053D711F10A7C94</ns2:LastUpdateLogin>
 <ns2:CreationDate>1997-02-23T12:47:25.0Z</ns2:CreationDate>
 <ns2:RequestId>4350529</ns2:RequestId>
 <ns2:LastUpdateDate>2021-08-19T07:31:34.29Z</ns2:LastUpdateDate>
 <ns2:CreatedBy>1028</ns2:CreatedBy>
 <ns2:OrigSystemReference>1003</ns2:OrigSystemReference>
 <ns2:HQBranchIndicator>HQ</ns2:HQBranchIndicator>
 <ns2:DUNSNumberC>006991681</ns2:DUNSNumberC>
 <ns2:SICCode>4215</ns2:SICCode>
 <ns2:JgzzFiscalCode>01-83937602</ns2:JgzzFiscalCode>
 <ns2:Address1>93 Peachtree Parkway</ns2:Address1>
 <ns2:Country>US</ns2:Country>
 <ns2:Address3 xsi:nil="true"/>
 <ns2:GroupType xsi:nil="true"/>
 <ns2:Address2 xsi:nil="true"/>
 <ns2:Address4 xsi:nil="true"/>
 <ns2:Status>A</ns2:Status>
 <ns2:City>Atlanta</ns2:City>
 <ns2:PostalCode>30328</ns2:PostalCode>
 <ns2:County>Fulton</ns2:County>
 <ns2:YearEstablished>1969</ns2:YearEstablished>
 <ns2:Province xsi:nil="true"/>
 <ns2:State>GA</ns2:State>
 <ns2:URL xsi:nil="true"/>
 <ns2:AnalysisFy>1996</ns2:AnalysisFy>
 <ns2:SICCodeType>1987 SIC</ns2:SICCodeType>
 <ns2:EmailAddress xsi:nil="true"/>
 <ns2:FiscalYearendMonth>12</ns2:FiscalYearendMonth>
 <ns2:EmployeesTotal>25000</ns2:EmployeesTotal>
 <ns2:CurrentFiscalYearPotentialRevenueAmount currencyCode="USD">800000000</
ns2:CurrentFiscalYearPotentialRevenueAmount>
 <ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
 <ns2:GSAIndicatorFlag>false</ns2:GSAIndicatorFlag>
 <ns2:CategoryCode>DISTRIBUTION</ns2:CategoryCode>
 <ns2:LanguageName xsi:nil="true"/>
```

```
<ns2:MissionStatement xsi:nil="true"/>
<ns2:ThirdPartyFlag>false</ns2:ThirdPartyFlag>
<ns2:HomeCountry xsi:nil="true"/>
<ns2:CreatedByModule xsi:nil="true"/>
<ns2:ObjectVersionNumber>11</ns2:ObjectVersionNumber>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:PrimaryPhonePurpose xsi:nil="true"/>
<ns2:PrimaryPhoneContactPointId>3105</ns2:PrimaryPhoneContactPointId>
<ns2:PrimaryPhoneLineType>GEN</ns2:PrimaryPhoneLineType>
<ns2:PrimaryPhoneCountryCode>1</ns2:PrimaryPhoneCountryCode>
<ns2:PrimaryPhoneAreaCode>703</ns2:PrimaryPhoneAreaCode>
<ns2:PrimaryPhoneNumber>8441212</ns2:PrimaryPhoneNumber>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:IdenAddrLocationId>944</ns2:IdenAddrLocationId>
<ns2:PrimaryURLContactPointId xsi:nil="true"/>
<ns2:PrimaryEmailContactPointId xsi:nil="true"/>
<ns2:IdenAddrPartySiteId>1097</ns2:IdenAddrPartySiteId>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PersonSecondLastName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:TradingPartnerIdentifier xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency>USD</ns2:PreferredFunctionalCurrency>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:Comments xsi:nil="true"/>
<ns2:CeoName xsi:nil="true"/>
<ns2:PrincipalName xsi:nil="true"/>
<ns2:OrganizationSize>LARGE</ns2:OrganizationSize>
<ns2:PartyUniqueName>OrgTest01282013mnb</ns2:PartyUniqueName>
<ns2:SourceSystem xsi:nil="true"/>
<ns2:SourceSystemReferenceValue xsi:nil="true"/>
<ns2:SourceSystemUpdateDate xsi:nil="true"/>
<ns2:PartySite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/">
<ns1:PartySiteId>300100573317048</ns1:PartySiteId>
<ns1:PartyId>1003</ns1:PartyId>
<ns1:LocationId>970</ns1:LocationId>
<ns1:LastUpdateDate>2021-09-15T04:51:45.547Z</ns1:LastUpdateDate>
<ns1:PartySiteNumber>CDRM_815835</ns1:PartySiteNumber>
<ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
<ns1:CreationDate>2021-09-15T04:51:23.012Z</ns1:CreationDate>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:LastUpdateLogin>C9855F3A3E972F3AE053D711F10A146B</ns1:LastUpdateLogin>
<ns1:RequestId xsi:nil="true"/>
<ns1:OrigSystem xsi:nil="true"/>
<ns1:OrigSystemReference>300100573317048</ns1:OrigSystemReference>
<ns1:StartDateActive>2021-09-15</ns1:StartDateActive>
<ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
<ns1:Mailstop xsi:nil="true"/>
<ns1:IdentifyingAddressFlag>false</ns1:IdentifyingAddressFlag>
<ns1:Language xsi:nil="true"/>
<ns1:Status>A</ns1:Status>
<ns1:PartySiteName xsi:nil="true"/>
<ns1:Addressee xsi:nil="true"/>
<ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
<ns1:GlobalLocationNumber xsi:nil="true"/>
<ns1:DUNSNumberC xsi:nil="true"/>
<ns1:Comments xsi:nil="true"/>
<ns1:PartySiteType xsi:nil="true"/>
<ns1:PartyNameDba xsi:nil="true"/>
<ns1:PartyNameDivision xsi:nil="true"/>
<ns1:PartyNameLegal xsi:nil="true"/>
<ns1:RelationshipId xsi:nil="true"/>
<ns1:PartyUsageCode xsi:nil="true"/>
<ns1:UsageCode>GEOGRAPHY</ns1:UsageCode>
```

```
 <ns1:FormattedAddress>1800 Satellite Drive,Distribution Center,CHATTANOOGA, TN 37401</ns1:FormattedAddress>
 <ns1:Country>US</ns1:Country>
 <ns1:Address1>1800 Satellite Drive</ns1:Address1>
 <ns1:Address2>Distribution Center</ns1:Address2>
 <ns1:Address3>Warehouse B</ns1:Address3>
 <ns1:Address4 xsi:nil="true"/>
 <ns1:City>Chattanooga</ns1:City>
 <ns1:PostalCode>37401</ns1:PostalCode>
 <ns1:State>TN</ns1:State>
 <ns1:Province xsi:nil="true"/>
 <ns1:County>Hamilton</ns1:County>
 <ns1:AddressStyle xsi:nil="true"/>
 <ns1:ValidatedFlag xsi:nil="true"/>
 <ns1:AddressLinesPhonetic xsi:nil="true"/>
 <ns1:PostalPlus4Code xsi:nil="true"/>
 <ns1:Position xsi:nil="true"/>
 <ns1:LocationDirections xsi:nil="true"/>
 <ns1:AddressExpirationDate xsi:nil="true"/>
 <ns1:LocationLanguage xsi:nil="true"/>
 <ns1:ValidationStatusCode xsi:nil="true"/>
 <ns1:DateValidated xsi:nil="true"/>
 <ns1:DoNotValidateFlag xsi:nil="true"/>
 <ns1:HouseType xsi:nil="true"/>
 <ns1:FormattedMultilineAddress>1800 Satellite Drive&lt;BR>Distribution Center&lt;BR>CHATTANOOGA, TN 37401</
ns1:FormattedMultilineAddress>
 <ns1:Country1>US</ns1:Country1>
 <ns1:ObjectVersionNumber1>11</ns1:ObjectVersionNumber1>
 <ns1:ContactPreferenceExistFlag>false</ns1:ContactPreferenceExistFlag>
 <ns1:FormattedLocaleAddress xsi:nil="true"/>
 <ns1:CurrencyCode>USD</ns1:CurrencyCode>
 <ns1:CorpCurrencyCode>USD</ns1:CorpCurrencyCode>
 <ns1:CurcyConvRateType>Corporate</ns1:CurcyConvRateType>
 <ns1:InternalFlag>false</ns1:InternalFlag>
 <ns1:OverallPrimaryFlag>false</ns1:OverallPrimaryFlag>
 <ns1:EmailAddress xsi:nil="true"/>
 <ns1:Latitude xsi:nil="true"/>
 <ns1:Longitude xsi:nil="true"/>
 <ns1:PartySiteUse>
 <ns1:PartySiteUseId>300100573317049</ns1:PartySiteUseId>
 <ns1:BeginDate>2021-09-15</ns1:BeginDate>
 <ns1:Comments xsi:nil="true"/>
 <ns1:EndDate>4712-12-31</ns1:EndDate>
 <ns1:PartySiteId>300100573317048</ns1:PartySiteId>
 <ns1:LastUpdateDate>2021-09-15T04:51:45.425Z</ns1:LastUpdateDate>
 <ns1:RequestId xsi:nil="true"/>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:CreationDate>2021-09-15T04:51:37.758Z</ns1:CreationDate>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:LastUpdateLogin>C9855F3A3E972F3AE053D711F10A146B</ns1:LastUpdateLogin>
 <ns1:IntegrationKey>x</ns1:IntegrationKey>
 <ns1:SiteUseType>BILL_TO</ns1:SiteUseType>
 <ns1:PrimaryPerType>N</ns1:PrimaryPerType>
 <ns1:Status>A</ns1:Status>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
 </ns1:PartySiteUse>
 <ns1:R10_Addr_Text_c xsi:nil="true"/>
 <ns1:R10_Addr_Curr_c currencyCode="USD">599</ns1:R10_Addr_Curr_c>
 <ns1:R10_Addr_DateTime_c xsi:nil="true"/>
 <ns1:AddressFCL_c xsi:nil="true"/>
 </ns2:PartySite>
 </ns2:Value>
 </ns3:result>
 </ns0:mergeOrganizationResponse>
 </env:Body>
```

```
</env:Envelope>
```

Create a Sales Account

In this use case, we'll create a sales account.

Operation: **createAccount**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/crmCommon/salesParties/accountService/types/" xmlns:acc="http://xmlns.oracle.com/
apps/crmCommon/salesParties/accountService/" xmlns:com="http://xmlns.oracle.com/apps/crmCommon/salesParties/
commonService/" xmlns:not="http://xmlns.oracle.com/apps/crmCommon/notes/noteService" xmlns:not1="http://
xmlns.oracle.com/apps/crmCommon/notes/flex/noteDff/" xmlns:org="http://xmlns.oracle.com/apps/cdm/
foundation/parties/organizationService/" xmlns:sal="http://xmlns.oracle.com/apps/crmCommon/salesParties/
salesPartiesService/">
<soapenv:Header/>
 <soapenv:Body>
 <typ:createAccount>
 <typ:account>
 <acc:OrganizationName>HD Test WS 3</acc:OrganizationName>
 <acc:Type>ZCA_CUSTOMER</acc:Type>
 <acc:CreatedByModule>HZ_WS</acc:CreatedByModule>
 <acc:PhoneCountryCode>1</acc:PhoneCountryCode>
 <acc:PhoneAreaCode>650</acc:PhoneAreaCode>
 <acc:PhoneNumber>8881111</acc:PhoneNumber>
 <acc:PhoneExtension>123</acc:PhoneExtension>
 <acc:PrimaryAddress>
 <com:AddressLine1>Strada xpto</com:AddressLine1>
 <com:City>Bucharest</com:City>
 <com:Country>RO</com:Country>
 </acc:PrimaryAddress>
 </typ:account>
 </typ:createAccount>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing" xmlns:typ="http://xmlns.oracle.com/apps/crmCommon/salesParties/accountService/types/">
<env:Header>
<wsa:Action>http://xmlns.oracle.com/apps/crmCommon/salesParties/accountService//AccountService/
createAccountResponse</wsa:Action>
<wsa:MessageID>urn:uuid:197fe87a-6706-4b5c-b040-3eef391a3f4c</wsa:MessageID>
</env:Header>
 <env:Body>
 <ns0:createAccountResponse xmlns:ns0="http://xmlns.oracle.com/apps/crmCommon/salesParties/accountService/
types/">
 <ns1:result xsi:type="ns0:DataObjectResult" xmlns:ns1="http://xmlns.oracle.com/apps/crmCommon/
salesParties/accountService/types/" xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://
xmlns.oracle.com/adf/svc/types/" xmlns:ns6="http://xmlns.oracle.com/apps/crmCommon/salesParties/
accountService/" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
 <ns0:Value xsi:type="ns6:Account" xmlns:ns1="http://xmlns.oracle.com/apps/crmCommon/salesParties/
commonService/" xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/"
 xmlns:ns3="http://xmlns.oracle.com/apps/crmCommon/notes/noteService" xmlns:ns5="http://xmlns.oracle.com/
apps/crmCommon/salesParties/salesPartiesService/">
 <ns6:PartyId>300000024475773</ns6:PartyId>
 <ns6:PartyNumber>124015</ns6:PartyNumber>
 <ns6:SourceSystem xsi:nil="true"/>
 <ns6:SourceSystemReferenceValue xsi:nil="true"/>
```

```
<ns6:OrganizationName>HD Test WS 3</ns6:OrganizationName>
<ns6:UniqueNameSuffix xsi:nil="true"/>
<ns6:PartyUniqueName>HD Test WS 3</ns6:PartyUniqueName>
<ns6:Type>ZCA_CUSTOMER</ns6:Type>
<ns6:OwnerPartyId>300000011223245</ns6:OwnerPartyId>
<ns6:OwnerPartyNumber>22026</ns6:OwnerPartyNumber>
<ns6:OwnerEmailAddress>h.d@oracle.com</ns6:OwnerEmailAddress>
<ns6:OwnerName>HD</ns6:OwnerName>
<ns6:PrimaryContactPartyId xsi:nil="true"/>
<ns6:PrimaryContactPartyNumber xsi:nil="true"/>
<ns6:PrimaryContactSourceSystem xsi:nil="true"/>
<ns6:PrimaryContactSourceSystemReferenceValue xsi:nil="true"/>
<ns6:PrimaryContactName xsi:nil="true"/>
<ns6:PrimaryContactEmail xsi:nil="true"/>
<ns6:PrimaryContactPhone xsi:nil="true"/>
<ns6:ExistingCustomerFlag xsi:nil="true"/>
<ns6:ExistingCustomerFlagLastUpdateDate xsi:nil="true"/>
<ns6:NamedFlag xsi:nil="true"/>
<ns6:LastAssignmentDate xsi:nil="true"/>
<ns6:LastAssignmentDateTime xsi:nil="true"/>
<ns6:AssignmentExceptionFlag xsi:nil="true"/>
<ns6:SalesProfileStatus>ACTIVE</ns6:SalesProfileStatus>
<ns6:IndustryCodeType>1972 SIC</ns6:IndustryCodeType>
<ns6:IndustryCode xsi:nil="true"/>
<ns6:ParentAccountPartyId xsi:nil="true"/>
<ns6:ParentAccountPartyNumber xsi:nil="true"/>
<ns6:ParentAccountSourceSystem xsi:nil="true"/>
<ns6:ParentAccountSourceSystemReferenceValue xsi:nil="true"/>
<ns6:YearEstablished xsi:nil="true"/>
<ns6:ControlYear xsi:nil="true"/>
<ns6:YearIncorporated xsi:nil="true"/>
<ns6:StockSymbol xsi:nil="true"/>
<ns6:FiscalYearendMonth xsi:nil="true"/>
<ns6:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
<ns6:PreferredFunctionalCurrency xsi:nil="true"/>
<ns6:AnalysisFiscalYear xsi:nil="true"/>
<ns6:NextFiscalYearPotentialRevenueAmount xsi:nil="true"/>
<ns6:TotalPaymentAmount xsi:nil="true"/>
<ns6:TaxpayerIdentificationNumber xsi:nil="true"/>
<ns6:CertificationLevel xsi:nil="true"/>
<ns6:CertificationReasonCode xsi:nil="true"/>
<ns6:DUNSNumber xsi:nil="true"/>
<ns6:DUNSCreditRating xsi:nil="true"/>
<ns6:ParentDUNSNumber xsi:nil="true"/>
<ns6:DomesticUltimateDUNSNumber xsi:nil="true"/>
<ns6:GlobalUltimateDUNSNumber xsi:nil="true"/>
<ns6:CEOName xsi:nil="true"/>
<ns6:CEOTitle xsi:nil="true"/>
<ns6:PublicPrivateOwnershipFlag xsi:nil="true"/>
<ns6:ImportIndicator xsi:nil="true"/>
<ns6:ExportIndicator xsi:nil="true"/>
<ns6:SmallBusinessIndicator xsi:nil="true"/>
<ns6:WomanOwnedIndicator xsi:nil="true"/>
<ns6:GeneralServicesAdministrationFlag xsi:nil="true"/>
<ns6:MinorityOwnedIndicator xsi:nil="true"/>
<ns6:MinorityOwnedType xsi:nil="true"/>
<ns6:RentOrOwnIndicator xsi:nil="true"/>
<ns6:LaborSurplusIndicator xsi:nil="true"/>
<ns6:OutOfBusinessIndicator xsi:nil="true"/>
<ns6:HQBranchIndicator xsi:nil="true"/>
<ns6:ParentOrSubsidiaryIndicator xsi:nil="true"/>
<ns6:DisadvantageIndicator xsi:nil="true"/>
<ns6:EmployeesAtPrimaryAddress xsi:nil="true"/>
<ns6:EmployeesAtPrimaryAddressEstimation xsi:nil="true"/>
<ns6:EmployeesAtPrimaryAddressMinimum xsi:nil="true"/>
<ns6:EmployeesAtPrimaryAddressText xsi:nil="true"/>
```

```
<ns6:EmployeesTotal xsi:nil="true"/>
<ns6:TotalEmployeesEstimatedIndicator xsi:nil="true"/>
<ns6:TotalEmployeesIndicator xsi:nil="true"/>
<ns6:TotalEmployeesMinimumIndicator xsi:nil="true"/>
<ns6:TotalEmployeesText xsi:nil="true"/>
<ns6:OrganizationSize xsi:nil="true"/>
<ns6:OrganizationType xsi:nil="true"/>
<ns6:PrincipalTitle xsi:nil="true"/>
<ns6:PrincipalName xsi:nil="true"/>
<ns6:LegalStatus xsi:nil="true"/>
<ns6:BusinessScope xsi:nil="true"/>
<ns6:RegistrationType xsi:nil="true"/>
<ns6:MissionStatement xsi:nil="true"/>
<ns6:CorporationClass xsi:nil="true"/>
<ns6:GrowthStrategyDescription xsi:nil="true"/>
<ns6:CongressionalDistrictCode xsi:nil="true"/>
<ns6:LineOfBusiness xsi:nil="true"/>
<ns6:HomeCountry xsi:nil="true"/>
<ns6:DoNotConfuseWith xsi:nil="true"/>
<ns6:LocalActivityCode xsi:nil="true"/>
<ns6:LocalActivityCodeType xsi:nil="true"/>
<ns6:LocalBusinessIdentifier xsi:nil="true"/>
<ns6:LocalBusinessIdentifierType xsi:nil="true"/>
<ns6:SiebelLocation xsi:nil="true"/>
<ns6:Comments>Parent is not null</ns6:Comments>
<ns6:CurrencyCode>USD</ns6:CurrencyCode>
<ns6:CurcyConvRateType>Spot</ns6:CurcyConvRateType>
<ns6:CorpCurrencyCode>USD</ns6:CorpCurrencyCode>
<ns6:DataCloudStatus xsi:nil="true"/>
<ns6:LastEnrichmentDate xsi:nil="true"/>
<ns6:PartyStatus>A</ns6:PartyStatus>
<ns6:CreatedByModule>HZ_WS</ns6:CreatedByModule>
<ns6:CreatedBy>h.d</ns6:CreatedBy>
<ns6:CreationDate>2015-06-08T15:48:32.002Z</ns6:CreationDate>
<ns6:LastUpdateDate>2015-06-08T15:48:58.266Z</ns6:LastUpdateDate>
<ns6:LastUpdateLogin>18046A50A86AACA9E053A747C50ADFB4</ns6:LastUpdateLogin>
<ns6:LastUpdatedBy>h.d</ns6:LastUpdatedBy>
<ns6:PreferredContactMethod xsi:nil="true"/>
<ns6:PhoneCountryCode>1</ns6:PhoneCountryCode>
<ns6:PhoneAreaCode>650</ns6:PhoneAreaCode>
<ns6:PhoneNumber>8881111</ns6:PhoneNumber>
<ns6:PhoneExtension>123</ns6:PhoneExtension>
<ns6:FormattedPhoneNumber>+1 (650) 888-1111 x123</ns6:FormattedPhoneNumber>
<ns6:FaxCountryCode xsi:nil="true"/>
<ns6:FaxAreaCode xsi:nil="true"/>
<ns6:FaxNumber xsi:nil="true"/>
<ns6:FaxExtension xsi:nil="true"/>
<ns6:FormattedFaxNumber xsi:nil="true"/>
<ns6:EmailFormat xsi:nil="true"/>
<ns6:EmailAddress/>
<ns6:URL/>
<ns6:RecordSet xsi:nil="true"/>
<ns6:PrimaryAddress>
<ns1:AddressId>300000024475776</ns1:AddressId>
<ns1:AddressNumber>93007</ns1:AddressNumber>
<ns1:SourceSystem xsi:nil="true"/>
<ns1:SourceSystemReferenceValue xsi:nil="true"/>
<ns1:LocationId>300000024475777</ns1:LocationId>
<ns1:PartyId>300000024475773</ns1:PartyId>
<ns1:AddressElementAttribute1 xsi:nil="true"/>
<ns1:AddressElementAttribute2 xsi:nil="true"/>
<ns1:AddressElementAttribute3 xsi:nil="true"/>
<ns1:AddressElementAttribute4 xsi:nil="true"/>
<ns1:AddressElementAttribute5 xsi:nil="true"/>
<ns1:AddressLine1>Strada xpto</ns1:AddressLine1>
<ns1:AddressLine2 xsi:nil="true"/>
```

```
<ns1:AddressLine3 xsi:nil="true"/>
<ns1:AddressLine4 xsi:nil="true"/>
<ns1:Building xsi:nil="true"/>
<ns1:City>Bucharest</ns1:City>
<ns1:Country>RO</ns1:Country>
<ns1:County xsi:nil="true"/>
<ns1:FloorNumber xsi:nil="true"/>
<ns1:PostalCode xsi:nil="true"/>
<ns1:PostalPlus4Code xsi:nil="true"/>
<ns1:Province xsi:nil="true"/>
<ns1:State xsi:nil="true"/>
<ns1:Latitude xsi:nil="true"/>
<ns1:Longitude xsi:nil="true"/>
<ns1:Mailstop xsi:nil="true"/>
<ns1:AddressLinesPhonetic xsi:nil="true"/>
<ns1:Comments xsi:nil="true"/>
<ns1:Description xsi:nil="true"/>
<ns1:DateValidated xsi:nil="true"/>
<ns1:HouseType xsi:nil="true"/>
<ns1:LocationDirections xsi:nil="true"/>
<ns1:ValidatedFlag>false</ns1:ValidatedFlag>
<ns1:ValidationStatusCode xsi:nil="true"/>
<ns1:FormattedAddress>Strada xpto,R-Bucharest</ns1:FormattedAddress>
<ns1:FormattedMultiLineAddress>Strada xpto&lt;BR>R-Bucharest</ns1:FormattedMultiLineAddress>
<ns1:CreatedBy>h.d</ns1:CreatedBy>
<ns1:CreationDate>2015-06-08T15:48:32.315Z</ns1:CreationDate>
<ns1:LastUpdateDate>2015-06-08T15:48:55.777Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>18046A50A86AACA9E053A747C50ADFB4</ns1:LastUpdateLogin>
<ns1:LastUpdatedBy>h.d</ns1:LastUpdatedBy>
<ns1:DeleteFlag xsi:nil="true"/>
<ns1:CorpCurrencyCode>USD</ns1:CorpCurrencyCode>
<ns1:CurcyConvRateType>Spot</ns1:CurcyConvRateType>
<ns1:CurrencyCode>USD</ns1:CurrencyCode>
<ns1:PartySiteEO_OscText1_c xsi:nil="true"/>
<ns1:PartySiteEO_OscText2_c>OscFixedValue</ns1:PartySiteEO_OscText2_c>
<ns1:PartySiteEO_OscText3_c xsi:nil="true"/>
<ns1:PartySiteEO_OscNumber1_c xsi:nil="true"/>
<ns1:PartySiteEO_OscDate1_c xsi:nil="true"/>
<ns1:PartySiteEO_OscCheckbox1_c>false</ns1:PartySiteEO_OscCheckbox1_c>
<ns1:PartySiteEO_OscPercentage1_c xsi:nil="true"/>
<ns1:PartySiteEO_OscDatetime1_c xsi:nil="true"/>
<ns1:PartySiteEO_OscCurrency1_c xsi:nil="true"/>
<ns1:PartySiteEO_OscCurrency1_cCurrencyCode>USD</ns1:PartySiteEO_OscCurrency1_cCurrencyCode>
<ns1:PartySiteEO_OscCurrency1_cCurcyConvRate>1</ns1:PartySiteEO_OscCurrency1_cCurcyConvRate>
<ns1:PartySiteEO_OscFCL1_c xsi:nil="true"/>
<ns1:PartySiteEO_OscFCL1_cMeaning xsi:nil="true"/>
<ns1:PartySiteEO_OscFCL2_c xsi:nil="true"/>
<ns1:PartySiteEO_OscFCL2_cMeaning xsi:nil="true"/>
<ns1:PartySiteEO_OscDCL1_Id_c xsi:nil="true"/>
<ns1:PartySiteEO_OscDCL1_c xsi:nil="true"/>
<ns1:PartySiteEO_OscFormula1_c>1</ns1:PartySiteEO_OscFormula1_c>
</ns6:PrimaryAddress>
<ns6:OrganizationDEO_OscText1_c xsi:nil="true"/>
<ns6:OrganizationDEO_OscText2_c>OscFixedValue</ns6:OrganizationDEO_OscText2_c>
<ns6:OrganizationDEO_OscText3_c xsi:nil="true"/>
<ns6:OrganizationDEO_OscNumber1_c xsi:nil="true"/>
<ns6:OrganizationDEO_OscDate1_c xsi:nil="true"/>
<ns6:OrganizationDEO_OscCheckbox1_c>false</ns6:OrganizationDEO_OscCheckbox1_c>
<ns6:OrganizationDEO_OscPercentage1_c xsi:nil="true"/>
<ns6:OrganizationDEO_OscDatetime1_c xsi:nil="true"/>
<ns6:OrganizationDEO_OscCurrency1_c xsi:nil="true"/>
<ns6:OrganizationDEO_OscCurrency1_cCurrencyCode>USD</ns6:OrganizationDEO_OscCurrency1_cCurrencyCode>
<ns6:OrganizationDEO_OscCurrency1_cCurcyConvRate>1</ns6:OrganizationDEO_OscCurrency1_cCurcyConvRate>
<ns6:OrganizationDEO_OscFCL1_c xsi:nil="true"/>
<ns6:OrganizationDEO_OscFCL1_cMeaning xsi:nil="true"/>
<ns6:OrganizationDEO_OscFCL2_c xsi:nil="true"/>
```

```
<ns6:OrganizationDEO_OscFCL2_cMeaning xsi:nil="true"/>
<ns6:OrganizationDEO_OscDCL1_Id_c xsi:nil="true"/>
<ns6:OrganizationDEO_OscDCL1_c xsi:nil="true"/>
<ns6:OrganizationDEO_OscFormula1_c>1</ns6:OrganizationDEO_OscFormula1_c>
<ns6:OrganizationDEO_PartyIdGUI_c>300000024475773</ns6:OrganizationDEO_PartyIdGUI_c>
<ns6:OrganizationDEO_HDCountry_Id_c xsi:nil="true"/>
<ns6:OrganizationDEO_HDCountry_c xsi:nil="true"/>
<ns6:OrganizationDEO_HDTextExpr_c>BlockedByExpr</ns6:OrganizationDEO_HDTextExpr_c>
<ns6:SalesAccountEO_OscSAARBlacklist_c>false</ns6:SalesAccountEO_OscSAARBlacklist_c>
<ns6:SalesAccountEO_OscSAARText_c xsi:nil="true"/>
<ns6:SalesAccountEO_OscText1_c xsi:nil="true"/>
<ns6:SalesAccountEO_OscText2_c>OscFixedValue</ns6:SalesAccountEO_OscText2_c>
<ns6:SalesAccountEO_OscText3_c xsi:nil="true"/>
<ns6:SalesAccountEO_OscNumber1_c xsi:nil="true"/>
<ns6:SalesAccountEO_OscDate1_c xsi:nil="true"/>
<ns6:SalesAccountEO_OscCheckbox1_c>false</ns6:SalesAccountEO_OscCheckbox1_c>
<ns6:SalesAccountEO_OscPercentage1_c xsi:nil="true"/>
<ns6:SalesAccountEO_OscDatetime1_c xsi:nil="true"/>
<ns6:SalesAccountEO_OscCurrency_c xsi:nil="true"/>
<ns6:SalesAccountEO_OscCurrency_cCurrencyCode xsi:nil="true"/>
<ns6:SalesAccountEO_OscCurrency_cCurcyConvRate xsi:nil="true"/>
<ns6:SalesAccountEO_OscFCL1_c xsi:nil="true"/>
<ns6:SalesAccountEO_OscFCL1_cMeaning xsi:nil="true"/>
<ns6:SalesAccountEO_OscFCL2_c xsi:nil="true"/>
<ns6:SalesAccountEO_OscFCL2_cMeaning xsi:nil="true"/>
<ns6:SalesAccountEO_OscDCL1_Id_c xsi:nil="true"/>
<ns6:SalesAccountEO_OscDCL1_c xsi:nil="true"/>
<ns6:SalesAccountEO_OscFormula1_c>1</ns6:SalesAccountEO_OscFormula1_c>
</ns0:Value>
</ns1:result>
</ns0:createAccountResponse>
</env:Body>
</env:Envelope>
```

Create a Usage Assignment for an Organization

In this use case, we'll create a usage assignment for an organization.

Operation: **createOrganization**

Request Body

```
<soapenv:Envelope xmlns:con="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/"
 xmlns:con1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/" xmlns:org="http://
xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/" xmlns:org1="http://xmlns.oracle.com/
apps/cdm/foundation/parties/flex/organization/" xmlns:org2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/flex/orgContact/" xmlns:par="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:par1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/" xmlns:rel="http://
xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/" xmlns:rel1="http://xmlns.oracle.com/
apps/cdm/foundation/parties/flex/relationship/" xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
 xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule/types/">
 <soapenv:Header></soapenv:Header>
 <soapenv:Body>
 <typ:createOrganization>
 <typ:organizationParty>
 <org:CreatedByModule>HZ_WS</org:CreatedByModule>
 <org:OrganizationProfile>
 <org:OrganizationName>Pinnacle Consulting Inc</org:OrganizationName>
 <org:CreatedByModule>HZ_WS</org:CreatedByModule>
 </org:OrganizationProfile>
 <org:PartyUsageAssignment>
```

```
 <par:PartyUsageCode>EXTERNAL_LEGAL_ENTITY</par:PartyUsageCode>
 <par:CreatedByModule>HZ_WS</par:CreatedByModule>
 </org:PartyUsageAssignment>
 </typ:organizationParty>
 </typ:createOrganization>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/types/">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule//
OrganizationService/createOrganizationResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:7d214d03-76f4-4639-9fa4-493deacadf34</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:createOrganizationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/">
 <ns3:result xsi:type="ns2:OrganizationPartyResult" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/organizationService/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule/
types/" xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/
svc/types/" xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/"
 xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance">
 <ns2:Value>
 <ns2:PartyNumber>CDRM_1003778</ns2:PartyNumber>
 <ns2:PartyId>300100573317270</ns2:PartyId>
 <ns2:PartyType>ORGANIZATION</ns2:PartyType>
 <ns2:PartyName>Pinnacle Consulting Inc</ns2:PartyName>
 <ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
 <ns2:ValidatedFlag xsi:nil="true"/>
 <ns2:LastUpdateLogin>CB2E12D7846F96AAE053D711F10A52B3</ns2:LastUpdateLogin>
 <ns2:CreationDate>2021-09-15T04:44:39.0Z</ns2:CreationDate>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:LastUpdateDate>2021-09-15T04:44:48.338Z</ns2:LastUpdateDate>
 <ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
 <ns2:OrigSystemReference>300100573317270</ns2:OrigSystemReference>
 <ns2:HQBranchIndicator xsi:nil="true"/>
 <ns2:DUNSNumberC xsi:nil="true"/>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:JgzzFiscalCode xsi:nil="true"/>
 <ns2:Address1 xsi:nil="true"/>
 <ns2:Country xsi:nil="true"/>
 <ns2:Address3 xsi:nil="true"/>
 <ns2:GroupType xsi:nil="true"/>
 <ns2:Address2 xsi:nil="true"/>
 <ns2:Address4 xsi:nil="true"/>
 <ns2:Status>A</ns2:Status>
 <ns2:City xsi:nil="true"/>
 <ns2:PostalCode xsi:nil="true"/>
 <ns2:County xsi:nil="true"/>
 <ns2:YearEstablished xsi:nil="true"/>
 <ns2:Province xsi:nil="true"/>
 <ns2:State xsi:nil="true"/>
 <ns2:URL xsi:nil="true"/>
 <ns2:AnalysisFy xsi:nil="true"/>
 <ns2:SICCodeType xsi:nil="true"/>
 <ns2:EmailAddress xsi:nil="true"/>
 <ns2:FiscalYearendMonth xsi:nil="true"/>
 <ns2:EmployeesTotal xsi:nil="true"/>
 <ns2:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
 <ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
```

```
 <ns2:GSAIndicatorFlag xsi:nil="true"/>
 <ns2:CategoryCode xsi:nil="true"/>
 <ns2:LanguageName xsi:nil="true"/>
 <ns2:MissionStatement xsi:nil="true"/>
 <ns2:ThirdPartyFlag xsi:nil="true"/>
 <ns2:HomeCountry xsi:nil="true"/>
 <ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
 <ns2:ObjectVersionNumber>1</ns2:ObjectVersionNumber>
 <ns2:CertificationLevel xsi:nil="true"/>
 <ns2:CertReasonCode xsi:nil="true"/>
 <ns2:PrimaryPhonePurpose xsi:nil="true"/>
 <ns2:PrimaryPhoneContactPointId xsi:nil="true"/>
 <ns2:PrimaryPhoneLineType xsi:nil="true"/>
 <ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
 <ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
 <ns2:PrimaryPhoneNumber xsi:nil="true"/>
 <ns2:PreferredContactMethod xsi:nil="true"/>
 <ns2:PrimaryPhoneExtension xsi:nil="true"/>
 <ns2:IdenAddrLocationId xsi:nil="true"/>
 <ns2:PrimaryURLContactPointId xsi:nil="true"/>
 <ns2:PrimaryEmailContactPointId xsi:nil="true"/>
 <ns2:IdenAddrPartySiteId xsi:nil="true"/>
 <ns2:PreferredName xsi:nil="true"/>
 <ns2:PersonSecondLastName xsi:nil="true"/>
 <ns2:PreferredNameId xsi:nil="true"/>
 <ns2:TradingPartnerIdentifier xsi:nil="true"/>
 <ns2:PreferredContactPersonId xsi:nil="true"/>
 <ns2:PreferredFunctionalCurrency xsi:nil="true"/>
 <ns2:InternalFlag>false</ns2:InternalFlag>
 <ns2:Comments xsi:nil="true"/>
 <ns2:CeoName xsi:nil="true"/>
 <ns2:PrincipalName xsi:nil="true"/>
 <ns2:OrganizationSize xsi:nil="true"/>
 <ns2:PartyUniqueName>Pinnacle Consulting Inc</ns2:PartyUniqueName>
 <ns2:SourceSystem xsi:nil="true"/>
 <ns2:SourceSystemReferenceValue xsi:nil="true"/>
 <ns2:SourceSystemUpdateDate xsi:nil="true"/>
 <ns2:OrganizationProfile xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
organization/">
 <ns2:OrganizationProfileId>300100573317270</ns2:OrganizationProfileId>
 <ns2:PartyId>300100573317270</ns2:PartyId>
 <ns2:OrganizationName>Pinnacle Consulting Inc</ns2:OrganizationName>
 <ns2:EnquiryDUNS xsi:nil="true"/>
 <ns2:CeoName xsi:nil="true"/>
 <ns2:CeoTitle xsi:nil="true"/>
 <ns2:PrincipalName xsi:nil="true"/>
 <ns2:PrincipalTitle xsi:nil="true"/>
 <ns2:LegalStatus xsi:nil="true"/>
 <ns2:ControlYr xsi:nil="true"/>
 <ns2:EmployeesTotal xsi:nil="true"/>
 <ns2:HQBranchIndicator xsi:nil="true"/>
 <ns2:BranchFlag xsi:nil="true"/>
 <ns2:OobInd xsi:nil="true"/>
 <ns2:LineOfBusiness xsi:nil="true"/>
 <ns2:CongDistCode xsi:nil="true"/>
 <ns2:ImportInd xsi:nil="true"/>
 <ns2:ExportInd xsi:nil="true"/>
 <ns2:LaborSurplusInd xsi:nil="true"/>
 <ns2:MinorityOwnedInd xsi:nil="true"/>
 <ns2:MinorityOwnedType xsi:nil="true"/>
 <ns2:WomanOwnedInd xsi:nil="true"/>
 <ns2:Disadv8aInd xsi:nil="true"/>
 <ns2:SmallBusInd xsi:nil="true"/>
 <ns2:RentOwnInd xsi:nil="true"/>
 <ns2:DbRating xsi:nil="true"/>
 <ns2:GSAIndicatorFlag xsi:nil="true"/>
```

```
<ns2:JgzzFiscalCode xsi:nil="true"/>
<ns2:AnalysisFy xsi:nil="true"/>
<ns2:FiscalYearendMonth xsi:nil="true"/>
<ns2:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
<ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
<ns2:YearEstablished xsi:nil="true"/>
<ns2:MissionStatement xsi:nil="true"/>
<ns2:OrganizationType xsi:nil="true"/>
<ns2:BusinessScope xsi:nil="true"/>
<ns2:CorporationClass xsi:nil="true"/>
<ns2:LocalBusIdenType xsi:nil="true"/>
<ns2:LocalBusIdentifier xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:RegistrationType xsi:nil="true"/>
<ns2:TotalEmployeesText xsi:nil="true"/>
<ns2:TotalEmployeesInd xsi:nil="true"/>
<ns2:TotalEmployeesEstimatedIndicator xsi:nil="true"/>
<ns2:TotalEmployeesMinimumIndicator xsi:nil="true"/>
<ns2:ParentSubInd xsi:nil="true"/>
<ns2:IncorpYear xsi:nil="true"/>
<ns2:LastUpdateDate>2021-09-15T04:44:50.503Z</ns2:LastUpdateDate>
<ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
<ns2:CreationDate>2021-09-15T04:44:39.173Z</ns2:CreationDate>
<ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
<ns2:LastUpdateLogin>CB2E12D7846F96AAE053D711F10A52B3</ns2:LastUpdateLogin>
<ns2:RequestId xsi:nil="true"/>
<ns2:ContentSourceNumber xsi:nil="true"/>
<ns2:EffectiveStartDate>2021-09-15</ns2:EffectiveStartDate>
<ns2:EffectiveEndDate>4712-12-31</ns2:EffectiveEndDate>
<ns2:PublicPrivateOwnershipFlag xsi:nil="true"/>
<ns2:LocalActivityCodeType xsi:nil="true"/>
<ns2:LocalActivityCode xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddress xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressText xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressEstimation xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressMinimum xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:TotalPaymentAmount xsi:nil="true"/>
<ns2:DisplayedDUNSPartyIdentifier xsi:nil="true"/>
<ns2:Status>A</ns2:Status>
<ns2:DUNSNumberC xsi:nil="true"/>
<ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
<ns2:BankOrBranchNumber xsi:nil="true"/>
<ns2:BankCode xsi:nil="true"/>
<ns2:BranchCode xsi:nil="true"/>
<ns2:DoNotConfuseWith xsi:nil="true"/>
<ns2:HomeCountry xsi:nil="true"/>
<ns2:GrowthStrategyDescription xsi:nil="true"/>
<ns2:SeblUserKeyLoc xsi:nil="true"/>
<ns2:StockSymbol xsi:nil="true"/>
<ns2:TradingPartnerIdentifier xsi:nil="true"/>
<ns2:OrigSystem xsi:nil="true"/>
<ns2:OrigSystemReference>300100573317270</ns2:OrigSystemReference>
<ns2:EffectiveSequence>1</ns2:EffectiveSequence>
<ns2:Comments xsi:nil="true"/>
<ns2:EffectiveLatestChange>Y</ns2:EffectiveLatestChange>
<ns2:OrganizationSize xsi:nil="true"/>
<ns2:SuffixOverriddenFlag>false</ns2:SuffixOverriddenFlag>
<ns2:UniqueNameAlias>Pinnacle Consulting Inc</ns2:UniqueNameAlias>
<ns2:UniqueNameSuffix xsi:nil="true"/>
<ns2:DomesticUltimateDUNSNumberC xsi:nil="true"/>
<ns2:GlobalUltimateDUNSNumberC xsi:nil="true"/>
<ns2:ParentDUNSNumberC xsi:nil="true"/>
<ns2:CorpCurrencyCode>USD</ns2:CorpCurrencyCode>
<ns2:CurcyConvRateType>Corporate</ns2:CurcyConvRateType>
<ns2:CurrencyCode>USD</ns2:CurrencyCode>
```

```
<ns2:PartyNumber>CDRM_1003778</ns2:PartyNumber>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredContactName xsi:nil="true"/>
<ns2:PreferredContactEmailAddress xsi:nil="true"/>
<ns2:PreferredContactFormattedPhoneNumber xsi:nil="true"/>
<ns2:PrimaryAddressLine1 xsi:nil="true"/>
<ns2:PrimaryAddressLine2 xsi:nil="true"/>
<ns2:PrimaryAddressLine3 xsi:nil="true"/>
<ns2:PrimaryAddressLine4 xsi:nil="true"/>
<ns2:Alias xsi:nil="true"/>
<ns2:PrimaryAddressCity xsi:nil="true"/>
<ns2:PrimaryAddressCountry xsi:nil="true"/>
<ns2:PrimaryAddressCounty xsi:nil="true"/>
<ns2:PrimaryEmailAddress xsi:nil="true"/>
<ns2:PrimaryFormattedPhoneNumber xsi:nil="true"/>
<ns2:IdenAddrLocationId xsi:nil="true"/>
<ns2:IdenAddrPartySiteId xsi:nil="true"/>
<ns2:PrimaryLanguage xsi:nil="true"/>
<ns2:PartyUniqueName>Pinnacle Consulting Inc</ns2:PartyUniqueName>
<ns2:PrimaryAddressPostalCode xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PrimaryEmailId xsi:nil="true"/>
<ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns2:PrimaryPhoneId xsi:nil="true"/>
<ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:PrimaryPhoneLineType xsi:nil="true"/>
<ns2:PrimaryPhoneNumber xsi:nil="true"/>
<ns2:PrimaryPhonePurpose xsi:nil="true"/>
<ns2:PrimaryWebId xsi:nil="true"/>
<ns2:Pronunciation xsi:nil="true"/>
<ns2:PrimaryAddressProvince xsi:nil="true"/>
<ns2:SICCode xsi:nil="true"/>
<ns2:SICCodeType xsi:nil="true"/>
<ns2:PrimaryAddressState xsi:nil="true"/>
<ns2:PrimaryURL xsi:nil="true"/>
<ns2:ValidatedFlag xsi:nil="true"/>
<ns2:ThirdPartyFlag xsi:nil="true"/>
<ns2:LastUpdateSourceSystem>UNKNOWN</ns2:LastUpdateSourceSystem>
<ns2:LastSourceUpdateDate>2021-09-15T04:44:48.0Z</ns2:LastSourceUpdateDate>
<ns2:DataCloudStatus xsi:nil="true"/>
<ns2:LastEnrichmentDate xsi:nil="true"/>
<ns2:R10_CmnCustObj_Id_R10_CmnCustObj_To_Account xsi:nil="true"/>
<ns2:Lead_Id_R10_LeadAccountRel xsi:nil="true"/>
<ns2:PartnerProfile_Id_R10_PartnerAccountRelationship xsi:nil="true"/>
<ns2:R10_AccountText_c xsi:nil="true"/>
<ns2:R10_AccountNum_c>1234</ns2:R10_AccountNum_c>
<ns2:R10_AccountDate_c xsi:nil="true"/>
<ns2:Enrollment_Id_R10_EnrollAccountRelationship xsi:nil="true"/>
<ns2:Program_Id_R10_ProgramAccountrelationship xsi:nil="true"/>
<ns2:Opportunity_Id_R10OptyAcntRel xsi:nil="true"/>
<ns2:R10_AccountCheckbox_c>false</ns2:R10_AccountCheckbox_c>
<ns2:R10_AccountFixChList_c xsi:nil="true"/>
<ns2:R10_AccountDynChList_Id_c xsi:nil="true"/>
<ns2:R10_AccountDynChList_c xsi:nil="true"/>
<ns2:R10_AccountCurrency_c xsi:nil="true"/>
<ns2:R10_AccountDateTime_c xsi:nil="true"/>
<ns2:R10_AccountPerc_c xsi:nil="true"/>
<ns2:R10_AccountTextFormula_c>This Record was Created by: SALES_ADMIN</ns2:R10_AccountTextFormula_c>
<ns2:SalesGoal_Id_R10_QMAccountRel xsi:nil="true"/>
<ns2:R10_AccountTCM_Text_c xsi:nil="true"/>
<ns2:R10_AccountTCM_Number_c xsi:nil="true"/>
```

```
<ns2:R10_AccountTCM_Date_c xsi:nil="true"/>
<ns2:R10_AccountRecordtype_c xsi:nil="true"/>
<ns2:R10_ACCText_c xsi:nil="true"/>
<ns2:R10_ACCNumber_c xsi:nil="true"/>
<ns2:R10_ACCDate_c xsi:nil="true"/>
<ns2:REL10_AccountType_Toyota_c xsi:nil="true"/>
<ns2:REL10_AnnualRevenue_c xsi:nil="true"/>
<ns2:REL10_CBofTotalFleet_c xsi:nil="true"/>
<ns2:REL10_CompaniesInterest_c xsi:nil="true"/>
<ns2:REL10_CreditLimit_c xsi:nil="true"/>
<ns2:REL10_CustomerNumber_c xsi:nil="true"/>
<ns2:REL10_CustomerSince_c xsi:nil="true"/>
<ns2:REL10_EKAAgreement_c xsi:nil="true"/>
<ns2:REL10_EKAAgreementName_Id_c xsi:nil="true"/>
<ns2:REL10_EKAAgreementName_c xsi:nil="true"/>
<ns2:RE10_EKAExistingSince_c xsi:nil="true"/>
<ns2:REL10_EKAInformation_c xsi:nil="true"/>
<ns2:REL10_EKAIntranet_c xsi:nil="true"/>
<ns2:REL10_EKAManager_c xsi:nil="true"/>
<ns2:REL10_EKAProspectSince_c xsi:nil="true"/>
<ns2:REL10_EKASalesSupport_c xsi:nil="true"/>
<ns2:REL10_EKASuppliers_c xsi:nil="true"/>
<ns2:REL10_ExpiryDateForCurrentAgre_c xsi:nil="true"/>
<ns2:REL10_FiscalYearStartMonth_c xsi:nil="true"/>
<ns2:REL10_FleetSize_c xsi:nil="true"/>
<ns2:REL10_InternationalAccountNumb_c xsi:nil="true"/>
<ns2:REL10_LocalInfo1_c xsi:nil="true"/>
<ns2:REL10_LocalInfo2_c xsi:nil="true"/>
<ns2:REL10_LocalInfo3_c xsi:nil="true"/>
<ns2:Reference_Id_R10_REFAccountRel xsi:nil="true"/>
<ns2:R10_AccountText_M_c xsi:nil="true"/>
<ns2:R10_AccountFixChList_M_c xsi:nil="true"/>
<ns2:R10_Account_DCL_SalesCO_Id_c xsi:nil="true"/>
<ns2:R10_Account_DCL_SalesCO_c xsi:nil="true"/>
<ns2:R10_Account_DCL_Contact_Id_c xsi:nil="true"/>
<ns2:R10_Account_DCL_Contact_c xsi:nil="true"/>
<ns2:AccountIdCF_c xsi:nil="true"/>
<ns2:CustomerSince_c xsi:nil="true"/>
<ns2:CompaniesInterest_c>Used</ns2:CompaniesInterest_c>
<ns2:EKAAgreementCF_Id_c xsi:nil="true"/>
<ns2:EKAAgreementCF_c xsi:nil="true"/>
<ns2:InternationalAccountNumber_Id_c xsi:nil="true"/>
<ns2:InternationalAccountNumber_c xsi:nil="true"/>
<ns2:AnnualBusinessPlanatTSight_c xsi:nil="true"/>
<ns2:CBoftotalfleet_c xsi:nil="true"/>
<ns2:WH_c xsi:nil="true"/>
<ns2:NewBusiness_c>false</ns2:NewBusiness_c>
<ns2:STR_c>false</ns2:STR_c>
<ns2:Rel10_SP_TXT_c xsi:nil="true"/>
<ns2:Deal_Id_R10DealAccountrelationship xsi:nil="true"/>
<ns2:TestPercentage_c xsi:nil="true"/>
<ns2:BudgetFundRequest_Id_R11MDFRequestToAccount1M xsi:nil="true"/>
<ns2:Claim_Id_R11MDFClaimAccount_Rel xsi:nil="true"/>
<ns2:R11_AccountBP_Text_c xsi:nil="true"/>
<ns2:BusinessPlan_Id_R11_BP_Account_rel xsi:nil="true"/>
<ns2:Budget_Id_R11MDFBudgetToAccount xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_TEXT_c xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_NUM_c xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_FCL_c xsi:nil="true"/>
<ns2:R11_Acct_DATE_c xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_CHKBOX_c>false</ns2:R11_RNOW_ACCT_CHKBOX_c>
<ns2:R11_RNOW_ACCT_DATETIME_c xsi:nil="true"/>
<ns2:Deal_Id_REL11_RELATION_ACCOUNT xsi:nil="true"/>
<ns2:SalesObjective_Id_Upg_BO_Acc_1M xsi:nil="true"/>
<ns2:Atext_c xsi:nil="true"/>
<ns2:Anum_c xsi:nil="true"/>
```

```
<ns2:Adate_c xsi:nil="true"/>
<ns2:Acheckbox_c>false</ns2:Acheckbox_c>
<ns2:Apercentage_c xsi:nil="true"/>
<ns2:Adatetime_c xsi:nil="true"/>
<ns2:Acuurency_c xsi:nil="true"/>
<ns2:Afcl_c xsi:nil="true"/>
<ns2:Adcl_Id_c xsi:nil="true"/>
<ns2:Adcl_c xsi:nil="true"/>
<ns2:Product_Id_Product2Account xsi:nil="true"/>
<ns2:PriceBookHeader_Id_PB2Account xsi:nil="true"/>
<ns2:SalesPromotion_Id_Promotion2Account xsi:nil="true"/>
<ns2:R12_GS_0723_CustomObject2_Id_R12_GS_CustomObject2_relationship xsi:nil="true"/>
<ns2:RNOW_TEXT_0724_c xsi:nil="true"/>
<ns2:RNOW_NUM_0724_c xsi:nil="true"/>
<ns2:RNOW_ACCT_FCL_0724_c xsi:nil="true"/>
<ns2:RNOW_ACCT_CHKBOX_0724_c>false</ns2:RNOW_ACCT_CHKBOX_0724_c>
<ns2:RNOW_ACCT_DATA_0724_c xsi:nil="true"/>
<ns2:RNOW_ACCT_DATETIME_0724_c xsi:nil="true"/>
<ns2:SalesTerritory_Id_CDRMSalesTerritoryCustObjAccRel xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Fcl_c xsi:nil="true"/>
<ns2:R12PB8_Zem_AccountToContact_DC_Id_c xsi:nil="true"/>
<ns2:R12PB8_Zem_AccountToContact_DC_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Text_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Number_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Date_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_DateTime_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_CheckBox_c>false</ns2:R12PB8_Zem_Account_CheckBox_c>
<ns2:R12PB8_Zem_Account_Percentage_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_ParentFcl_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_ChildFcl_c xsi:nil="true"/>
<ns2:SalesCountry_c xsi:nil="true"/>
<ns2:SalesRegion_c xsi:nil="true"/>
<ns2:SalesCluster_c xsi:nil="true"/>
<ns2:LogisticsRail_c>Logistics</ns2:LogisticsRail_c>
<ns2:ExternalId_c xsi:nil="true"/>
<ns2:Organization_Id_Account_Account xsi:nil="true"/>
<ns2:Type_c>ZCA_Prospect</ns2:Type_c>
<ns2:Category_c xsi:nil="true"/>
<ns2:ParentExternalId_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_mcl_c xsi:nil="true"/>
<ns2:ResDCL_Id_c xsi:nil="true"/>
<ns2:ResDCL_c xsi:nil="true"/>
<ns2:R1802BIObj_Id_R13_1802_CO_Acccount xsi:nil="true"/>
<ns2:R1802_Text_c xsi:nil="true"/>
<ns2:R1802_Number_c xsi:nil="true"/>
<ns2:R13_COPYMAP_TEXT_c xsi:nil="true"/>
<ns2:R13_COPYMAP_NUMBER_c xsi:nil="true"/>
<ns2:R1802CustObj_Id_R1805COtoAccount xsi:nil="true"/>
<ns2:O365_1810_DCL_Id_c xsi:nil="true"/>
<ns2:O365_1810_DCL_c xsi:nil="true"/>
<ns2:ACCPICKERTEXT_c xsi:nil="true"/>
<ns2:Text_Elastic_c xsi:nil="true"/>
<ns2:Number_Elastic_c xsi:nil="true"/>
<ns2:Date_Elastic_c xsi:nil="true"/>
<ns2:PARENT1_c xsi:nil="true"/>
<ns2:PARENT2_c xsi:nil="true"/>
<ns2:PARENT3_c xsi:nil="true"/>
<ns2:SON1_c xsi:nil="true"/>
<ns2:SON2_c xsi:nil="true"/>
<ns2:SON3_c xsi:nil="true"/>
<ns2:SON4_c xsi:nil="true"/>
<ns2:SON5_c xsi:nil="true"/>
<ns2:SON6_c xsi:nil="true"/>
<ns2:CHILD1_c xsi:nil="true"/>
<ns2:CHILD2_c xsi:nil="true"/>
<ns2:CHILD3_c xsi:nil="true"/>
```

```
 <ns2:CHILD4_c xsi:nil="true"/>
 <ns2:Lead_Id_R13_LeadsAccount xsi:nil="true"/>
 <ns2:O365_1904_AccntSimpleTxt_c>This is the default text set in the field</ns2:O365_1904_AccntSimpleTxt_c>
 <ns2:O365_1904_AccntMultiText_c>Default text in text field of type Multiline text area.Sample text in text
 field of type</ns2:O365_1904_AccntMultiText_c>
 <ns2:O365_1904_AccntNum_c>987684</ns2:O365_1904_AccntNum_c>
 <ns2:O365_1904_AccntDate_c>2019-02-20</ns2:O365_1904_AccntDate_c>
 <ns2:O365_1904_AccntLngTxt_c>SXQgaXMgYSBsb25nIGVzdGFibGlzaGVkIGZhY3QgdGhhdCBhIHJlYWRlciB3aWxsIGJlIGRpc3Ry
YWN0ZWQgYnkgdGhlIHJlYWRhYmxlIGNvbnRlbnQgb2YgYSBwYWdlIHdoZW4gbG9va2luZyBhdCBp
dHMgbGF5b3V0LiBUaGUgcG9pbnQgb2YgdXNpbmcgTG9yZW0gSXBzdW0gaXMgdGhhdCBpdCBoYXMg
YSBtb3JlLW9yLWxlc3Mgbm9ybWFsIGRpc3RyaWJ1dGlvbiBvZiBsZXR0ZXJzLCBhcyBvcHBvc2Vk
IHRvIHVzaW5nICdDb250ZW50IGhlcmUsIGNvbnRlbnQgaGVyZScsIG1ha2luZyBpdCBsb29rIGxp
a2UgcmVhZGFibGUgRW5nbGlzaC4gTWFueSBkZXNrdG9wIHB1Ymxpc2hpbmcgcGFja2FnZXMgYW5k
IHdlYiBwYWdl</ns2:O365_1904_AccntLngTxt_c>
 <ns2:O365_1904_AccntChkBox_c>true</ns2:O365_1904_AccntChkBox_c>
 <ns2:O365_1904_AccntPerc_c>0.45</ns2:O365_1904_AccntPerc_c>
 <ns2:O365_1904_AccntDtTime_c>2019-02-27T02:45:00.0Z</ns2:O365_1904_AccntDtTime_c>
 <ns2:O365_1904_AccntCur_c currencyCode="USD">9878355</ns2:O365_1904_AccntCur_c>
 <ns2:O365_1904_AccntFCL_c>L</ns2:O365_1904_AccntFCL_c>
 <ns2:O365_1904_AccntMCL_c>CEO,CIO,VP</ns2:O365_1904_AccntMCL_c>
 <ns2:O365_1904_AccntChldFCL_c xsi:nil="true"/>
 <ns2:O365_1904_AccntChldMCL_c xsi:nil="true"/>
 <ns2:O365_1904_AccntDCL_Id_c xsi:nil="true"/>
 <ns2:O365_1904_AccntDCL_c xsi:nil="true"/>
 <ns2:R1810SrcCustObj_Id_OneMSalesCustAccount xsi:nil="true"/>
 <ns2:R1810SrcCustObj_Id_SalesCustAccount_1M xsi:nil="true"/>
 <ns2:AUX_DCLServiceRequest1_Id_c xsi:nil="true"/>
 <ns2:AUX_DCLServiceRequest1_c xsi:nil="true"/>
 <ns2:R1904CustomObjectDCL_Id_c xsi:nil="true"/>
 <ns2:R1904CustomObjectDCL_c xsi:nil="true"/>
 <ns2:R1805CustomObj2_Id_CustomtoAccount xsi:nil="true"/>
 <ns2:M2004_CXM_Text_c xsi:nil="true"/>
 <ns2:M2004_CXM_MobileNum_c xsi:nil="true"/>
 <ns2:M2004_CXM_Date_c xsi:nil="true"/>
 <ns2:M2004_CXM_CB_c>false</ns2:M2004_CXM_CB_c>
 <ns2:M2004_CXM_DateTime_c xsi:nil="true"/>
 <ns2:M2004_CXM_Perc_c xsi:nil="true"/>
 <ns2:M2004_CXM_Currency_c xsi:nil="true"/>
 <ns2:M2004_CXM_Fcl_c xsi:nil="true"/>
 <ns2:M2004_CXM_ParentFcl_c xsi:nil="true"/>
 <ns2:M2004_CXM_ChildFcl_c xsi:nil="true"/>
 <ns2:M2004_CXM_DCLContact_Id_c xsi:nil="true"/>
 <ns2:M2004_CXM_DCLContact_c xsi:nil="true"/>
 <ns2:M2004_CXM_DCLOppty_Id_c xsi:nil="true"/>
 <ns2:M2004_CXM_DCLOppty_c xsi:nil="true"/>
 <ns2:Opportunity_Id_M2004_CXM_1ToMOpptyToAccount xsi:nil="true"/>
 <ns2:ConditionallyMandatory_c xsi:nil="true"/>
 <ns2:O365_2004_ACCTEXT_c xsi:nil="true"/>
 <ns2:O365_2004_stdLkup_c xsi:nil="true"/>
 <ns2:O365_2004_CustomLkup_c xsi:nil="true"/>
 <ns2:O365_2004_StdLkUPm1_c xsi:nil="true"/>
 <ns2:M2004_CXM_DCLCusOBJ1_Id_c xsi:nil="true"/>
 <ns2:M2004_CXM_DCLCusOBJ1_c xsi:nil="true"/>
 <ns2:M2004_CXM_MCL_c xsi:nil="true"/>
 <ns2:Account_FCL_MultiSelect_c xsi:nil="true"/>
 <ns2:Account_FCL_Parent_c xsi:nil="true"/>
 <ns2:Account_FCL_Child_c xsi:nil="true"/>
 <ns2:Account_DCL_Driidown_Id_c xsi:nil="true"/>
 <ns2:Account_DCL_Driidown_c xsi:nil="true"/>
 <ns2:TextAdvExpr_c xsi:nil="true"/>
 <ns2:M2101_CXM_Link_c>https://www.oracle.com</ns2:M2101_CXM_Link_c>
 <ns2:AAACustomFCL_c xsi:nil="true"/>
 <ns2:AAACustomCheckbox_c>false</ns2:AAACustomCheckbox_c>
 <ns2:CDA_Text_c xsi:nil="true"/>
 <ns2:CDA_Num_c xsi:nil="true"/>
 <ns2:CDA_Dat_c xsi:nil="true"/>
```

```
 <ns2:CDA_CB_c>false</ns2:CDA_CB_c>
 <ns2:CDA_Per_c xsi:nil="true"/>
 <ns2:CDA_DatTime_c xsi:nil="true"/>
 <ns2:CDA_Currency_c xsi:nil="true"/>
 <ns2:CDA_FCL_c xsi:nil="true"/>
 <ns2:CDA_DCL_Id_c xsi:nil="true"/>
 <ns2:CDA_DCL_c xsi:nil="true"/>
 <ns2:CDA_CHFCL_c xsi:nil="true"/>
 <ns2:CDA_PFCL_c xsi:nil="true"/>
 <ns2:CDA_MULFCL_c xsi:nil="true"/>
 </ns2:OrganizationProfile>
 <ns2:PartyUsageAssignment>
 <ns1:PartyUsgAssignmentId>300100573317271</ns1:PartyUsgAssignmentId>
 <ns1:PartyId>300100573317270</ns1:PartyId>
 <ns1:PartyUsageCode>EXTERNAL_LEGAL_ENTITY</ns1:PartyUsageCode>
 <ns1:EffectiveStartDate>2021-09-15</ns1:EffectiveStartDate>
 <ns1:EffectiveEndDate>4712-12-31</ns1:EffectiveEndDate>
 <ns1:StatusFlag>true</ns1:StatusFlag>
 <ns1:Comments xsi:nil="true"/>
 <ns1:OwnerTableName xsi:nil="true"/>
 <ns1:OwnerTableId xsi:nil="true"/>
 <ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:CreationDate>2021-09-15T04:44:47.567Z</ns1:CreationDate>
 <ns1:LastUpdateLogin>CB2E12D7846F96AAE053D711F10A52B3</ns1:LastUpdateLogin>
 <ns1:LastUpdateDate>2021-09-15T04:44:48.333Z</ns1:LastUpdateDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:RequestId xsi:nil="true"/>
 </ns2:PartyUsageAssignment>
 </ns2:Value>
 </ns3:result>
 </ns0:createOrganizationResponse>
 </env:Body>
</env:Envelope>
```

Create Customer Contact Points Using TCA Web Services

In this use case, we'll create a customer contact points using TCA web services.

Operation: **mergeOrganization**

Request Body

```
<?xml version="1.0" encoding="UTF-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule/
types/">
 <ns1:createOrganization>
 <ns1:organizationParty xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/">
 <ns2:CreatedByModule>AMS</ns2:CreatedByModule>
 <ns2:PartyUsageAssignment xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/">
 <ns3:PartyUsageCode>CUSTOMER</ns3:PartyUsageCode>
 <ns3:CreatedByModule>AMS</ns3:CreatedByModule>
 </ns2:PartyUsageAssignment>
 <ns2:OrganizationProfile>
 <ns2:OrganizationName>Indian AutoComp</ns2:OrganizationName>
 <ns2:CeoName>Alan</ns2:CeoName>
 <ns2:CreatedByModule>AMS</ns2:CreatedByModule>
 </ns2:OrganizationProfile>
```

```
 <ns2:Email xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/">
 <ns4:CreatedByModule>AMS</ns4:CreatedByModule>
 <ns4:EmailAddress>test@oracle.com</ns4:EmailAddress>
 <ns4:EmailFormat>MAILHTML</ns4:EmailFormat>
 <ns4:OwnerTableName>HZ_PARTIES</ns4:OwnerTableName>
 <ns4:OriginalSystemReference xmlns:ns16="http://xmlns.oracle.com/apps/cdm/foundation/parties/
partyService/">
 <ns16:OrigSystem>CSV</ns16:OrigSystem>
 <ns16:OrigSystemReference>TestEmail001</ns16:OrigSystemReference>
 <ns16:OwnerTableName>HZ_CONTACT_POINTS</ns16:OwnerTableName>
 <ns16:CreatedByModule>AMS</ns16:CreatedByModule>
 </ns4:OriginalSystemReference>
 </ns2:Email>
 <ns2:InstantMessaging xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/">
 <ns5:CreatedByModule>AMS</ns5:CreatedByModule>
 <ns5:InstantMessengerType>YAHOO</ns5:InstantMessengerType>
 <ns5:InstantMessagingAddress>corp@oracle.com</ns5:InstantMessagingAddress>
 <ns5:ContactPointPurpose>BUSINESS</ns5:ContactPointPurpose>
 <ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
 <ns5:OriginalSystemReference xmlns:ns16="http://xmlns.oracle.com/apps/cdm/foundation/parties/
partyService/">
 <ns16:OrigSystem>CSV</ns16:OrigSystem>
 <ns16:OrigSystemReference>TestIM001</ns16:OrigSystemReference>
 <ns16:OwnerTableName>HZ_CONTACT_POINTS</ns16:OwnerTableName>
 <ns16:CreatedByModule>AMS</ns16:CreatedByModule>
 </ns5:OriginalSystemReference>
 </ns2:InstantMessaging>
 <ns2:Phone xmlns:ns49="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/">
 <ns49:OwnerTableName>HZ_PARTIES</ns49:OwnerTableName>
 <ns49:CreatedByModule>AMS</ns49:CreatedByModule>
 <ns49:ContactPointPurpose>BUSINESS</ns49:ContactPointPurpose>
 <ns49:PhoneAreaCode>650</ns49:PhoneAreaCode>
 <ns49:PhoneCountryCode>1</ns49:PhoneCountryCode>
 <ns49:PhoneNumber>6338437</ns49:PhoneNumber>
 <ns49:PhoneExtension>8437</ns49:PhoneExtension>
 <ns49:OriginalSystemReference xmlns:ns50="http://xmlns.oracle.com/apps/cdm/foundation/parties/
partyService/">
 <ns50:OrigSystem>CSV</ns50:OrigSystem>
 <ns50:OrigSystemReference>TestPhone001</ns50:OrigSystemReference>
 <ns50:OwnerTableName>HZ_CONTACT_POINTS</ns50:OwnerTableName>
 <ns50:CreatedByModule>AMS</ns50:CreatedByModule>
 </ns49:OriginalSystemReference>
 </ns2:Phone>
 </ns1:organizationParty>
 </ns1:createOrganization>
</soap:Body>
</soap:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/types/">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule//
OrganizationService/createOrganizationResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:93009ac9-3278-4131-ada8-a3e40a637182</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:createOrganizationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/">
 <ns3:result xsi:type="ns2:OrganizationPartyResult" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/organizationService/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule/
types/" xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/
svc/types/" xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/"
```

```
 xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance">
 <ns2:Value>
 <ns2:PartyNumber>CDRM_1003763</ns2:PartyNumber>
 <ns2:PartyId>300100573316847</ns2:PartyId>
 <ns2:PartyType>ORGANIZATION</ns2:PartyType>
 <ns2:PartyName>Indian AutoComp</ns2:PartyName>
 <ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
 <ns2:ValidatedFlag xsi:nil="true"/>
 <ns2:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns2:LastUpdateLogin>
 <ns2:CreationDate>2021-09-15T04:27:44.0Z</ns2:CreationDate>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:LastUpdateDate>2021-09-15T04:28:10.287Z</ns2:LastUpdateDate>
 <ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
 <ns2:OrigSystemReference>300100573316847</ns2:OrigSystemReference>
 <ns2:HQBranchIndicator xsi:nil="true"/>
 <ns2:DUNSNumberC xsi:nil="true"/>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:JgzzFiscalCode xsi:nil="true"/>
 <ns2:Address1 xsi:nil="true"/>
 <ns2:Country xsi:nil="true"/>
 <ns2:Address3 xsi:nil="true"/>
 <ns2:GroupType xsi:nil="true"/>
 <ns2:Address2 xsi:nil="true"/>
 <ns2:Address4 xsi:nil="true"/>
 <ns2:Status>A</ns2:Status>
 <ns2:City xsi:nil="true"/>
 <ns2:PostalCode xsi:nil="true"/>
 <ns2:County xsi:nil="true"/>
 <ns2:YearEstablished xsi:nil="true"/>
 <ns2:Province xsi:nil="true"/>
 <ns2:State xsi:nil="true"/>
 <ns2:URL xsi:nil="true"/>
 <ns2:AnalysisFy xsi:nil="true"/>
 <ns2:SICCodeType xsi:nil="true"/>
 <ns2:EmailAddress>test@oracle.com</ns2:EmailAddress>
 <ns2:FiscalYearendMonth xsi:nil="true"/>
 <ns2:EmployeesTotal xsi:nil="true"/>
 <ns2:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
 <ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
 <ns2:GSAIndicatorFlag xsi:nil="true"/>
 <ns2:CategoryCode xsi:nil="true"/>
 <ns2:LanguageName xsi:nil="true"/>
 <ns2:MissionStatement xsi:nil="true"/>
 <ns2:ThirdPartyFlag xsi:nil="true"/>
 <ns2:HomeCountry xsi:nil="true"/>
 <ns2:CreatedByModule>AMS</ns2:CreatedByModule>
 <ns2:ObjectVersionNumber>2</ns2:ObjectVersionNumber>
 <ns2:CertificationLevel xsi:nil="true"/>
 <ns2:CertReasonCode xsi:nil="true"/>
 <ns2:PrimaryPhonePurpose>BUSINESS</ns2:PrimaryPhonePurpose>
 <ns2:PrimaryPhoneContactPointId>300100573316858</ns2:PrimaryPhoneContactPointId>
 <ns2:PrimaryPhoneLineType>GEN</ns2:PrimaryPhoneLineType>
 <ns2:PrimaryPhoneCountryCode>1</ns2:PrimaryPhoneCountryCode>
 <ns2:PrimaryPhoneAreaCode>650</ns2:PrimaryPhoneAreaCode>
 <ns2:PrimaryPhoneNumber>6338437</ns2:PrimaryPhoneNumber>
 <ns2:PreferredContactMethod xsi:nil="true"/>
 <ns2:PrimaryPhoneExtension>8437</ns2:PrimaryPhoneExtension>
 <ns2:IdenAddrLocationId xsi:nil="true"/>
 <ns2:PrimaryURLContactPointId xsi:nil="true"/>
 <ns2:PrimaryEmailContactPointId>300100573316848</ns2:PrimaryEmailContactPointId>
 <ns2:IdenAddrPartySiteId xsi:nil="true"/>
 <ns2:PreferredName xsi:nil="true"/>
 <ns2:PersonSecondLastName xsi:nil="true"/>
 <ns2:PreferredNameId xsi:nil="true"/>
 <ns2:TradingPartnerIdentifier xsi:nil="true"/>
```

```
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:Comments xsi:nil="true"/>
<ns2:CeoName>Alan</ns2:CeoName>
<ns2:PrincipalName xsi:nil="true"/>
<ns2:OrganizationSize xsi:nil="true"/>
<ns2:PartyUniqueName>Indian AutoComp</ns2:PartyUniqueName>
<ns2:SourceSystem xsi:nil="true"/>
<ns2:SourceSystemReferenceValue xsi:nil="true"/>
<ns2:SourceSystemUpdateDate xsi:nil="true"/>
<ns2:Email xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/">
<ns5:ContactPointId>300100573316848</ns5:ContactPointId>
<ns5:ContactPointType>EMAIL</ns5:ContactPointType>
<ns5:Status>A</ns5:Status>
<ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
<ns5:OwnerTableId>300100573316847</ns5:OwnerTableId>
<ns5:PrimaryFlag>true</ns5:PrimaryFlag>
<ns5:OrigSystemReference>300100573316848</ns5:OrigSystemReference>
<ns5:LastUpdateDate>2021-09-15T04:28:05.572Z</ns5:LastUpdateDate>
<ns5:LastUpdatedBy>SALES_ADMIN</ns5:LastUpdatedBy>
<ns5:CreationDate>2021-09-15T04:27:44.058Z</ns5:CreationDate>
<ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
<ns5:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns5:LastUpdateLogin>
<ns5:RequestId xsi:nil="true"/>
<ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
<ns5:CreatedByModule>AMS</ns5:CreatedByModule>
<ns5:ContactPointPurpose xsi:nil="true"/>
<ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
<ns5:StartDate>2021-09-15</ns5:StartDate>
<ns5:EndDate>4712-12-31</ns5:EndDate>
<ns5:RelationshipId xsi:nil="true"/>
<ns5:PartyUsageCode xsi:nil="true"/>
<ns5:OrigSystem xsi:nil="true"/>
<ns5:EmailFormat>MAILHTML</ns5:EmailFormat>
<ns5:EmailAddress>test@oracle.com</ns5:EmailAddress>
<ns5:PartyName>Indian AutoComp</ns5:PartyName>
<ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
<ns5:OriginalSystemReference xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
<ns1:OrigSystemReferenceId>300100573316849</ns1:OrigSystemReferenceId>
<ns1:OrigSystem>CSV</ns1:OrigSystem>
<ns1:OrigSystemReference>TestEmail001</ns1:OrigSystemReference>
<ns1:OwnerTableName>HZ_CONTACT_POINTS</ns1:OwnerTableName>
<ns1:OwnerTableId>300100573316848</ns1:OwnerTableId>
<ns1:Status>A</ns1:Status>
<ns1:ReasonCode xsi:nil="true"/>
<ns1:OldOrigSystemReference xsi:nil="true"/>
<ns1:StartDateActive>2021-09-15</ns1:StartDateActive>
<ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:CreationDate>2021-09-15T04:27:44.535Z</ns1:CreationDate>
<ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
<ns1:LastUpdateDate>2021-09-15T04:28:05.286Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns1:LastUpdateLogin>
<ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
<ns1:CreatedByModule>AMS</ns1:CreatedByModule>
<ns1:PartyId xsi:nil="true"/>
<ns1:RequestId xsi:nil="true"/>
</ns5:OriginalSystemReference>
</ns2:Email>
<ns2:InstantMessaging xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/">
<ns5:ContactPointId>300100573316855</ns5:ContactPointId>
<ns5:ContactPointType>INSTANT_MESSAGING</ns5:ContactPointType>
<ns5:Status>A</ns5:Status>
<ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
```

```
 <ns5:OwnerTableId>300100573316847</ns5:OwnerTableId>
 <ns5:PrimaryFlag>true</ns5:PrimaryFlag>
 <ns5:OrigSystemReference>300100573316855</ns5:OrigSystemReference>
 <ns5:LastUpdateDate>2021-09-15T04:28:06.291Z</ns5:LastUpdateDate>
 <ns5:LastUpdatedBy>SALES_ADMIN</ns5:LastUpdatedBy>
 <ns5:CreationDate>2021-09-15T04:27:49.392Z</ns5:CreationDate>
 <ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
 <ns5:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns5:LastUpdateLogin>
 <ns5:RequestId xsi:nil="true"/>
 <ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
 <ns5:CreatedByModule>AMS</ns5:CreatedByModule>
 <ns5:ContactPointPurpose>BUSINESS</ns5:ContactPointPurpose>
 <ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
 <ns5:StartDate>2021-09-15</ns5:StartDate>
 <ns5:EndDate>4712-12-31</ns5:EndDate>
 <ns5:RelationshipId xsi:nil="true"/>
 <ns5:PartyUsageCode xsi:nil="true"/>
 <ns5:OrigSystem xsi:nil="true"/>
 <ns5:InstantMessengerType>YAHOO</ns5:InstantMessengerType>
 <ns5:InstantMessagingAddress>corp@oracle.com</ns5:InstantMessagingAddress>
 <ns5:PartyName>Indian AutoComp</ns5:PartyName>
 <ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
 <ns5:OriginalSystemReference xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns1:OrigSystemReferenceId>300100573316856</ns1:OrigSystemReferenceId>
 <ns1:OrigSystem>CSV</ns1:OrigSystem>
 <ns1:OrigSystemReference>TestIM001</ns1:OrigSystemReference>
 <ns1:OwnerTableName>HZ_CONTACT_POINTS</ns1:OwnerTableName>
 <ns1:OwnerTableId>300100573316855</ns1:OwnerTableId>
 <ns1:Status>A</ns1:Status>
 <ns1:ReasonCode xsi:nil="true"/>
 <ns1:OldOrigSystemReference xsi:nil="true"/>
 <ns1:StartDateActive>2021-09-15</ns1:StartDateActive>
 <ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:CreationDate>2021-09-15T04:27:49.728Z</ns1:CreationDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:LastUpdateDate>2021-09-15T04:28:05.29Z</ns1:LastUpdateDate>
 <ns1:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns1:LastUpdateLogin>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedByModule>AMS</ns1:CreatedByModule>
 <ns1:PartyId xsi:nil="true"/>
 <ns1:RequestId xsi:nil="true"/>
 </ns5:OriginalSystemReference>
 </ns2:InstantMessaging>
 <ns2:OrganizationProfile xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
organization/">
 <ns2:OrganizationProfileId>300100573316847</ns2:OrganizationProfileId>
 <ns2:PartyId>300100573316847</ns2:PartyId>
 <ns2:OrganizationName>Indian AutoComp</ns2:OrganizationName>
 <ns2:EnquiryDUNS xsi:nil="true"/>
 <ns2:CeoName>Alan</ns2:CeoName>
 <ns2:CeoTitle xsi:nil="true"/>
 <ns2:PrincipalName xsi:nil="true"/>
 <ns2:PrincipalTitle xsi:nil="true"/>
 <ns2:LegalStatus xsi:nil="true"/>
 <ns2:ControlYr xsi:nil="true"/>
 <ns2:EmployeesTotal xsi:nil="true"/>
 <ns2:HQBranchIndicator xsi:nil="true"/>
 <ns2:BranchFlag xsi:nil="true"/>
 <ns2:OobInd xsi:nil="true"/>
 <ns2:LineOfBusiness xsi:nil="true"/>
 <ns2:CongDistCode xsi:nil="true"/>
 <ns2:ImportInd xsi:nil="true"/>
 <ns2:ExportInd xsi:nil="true"/>
 <ns2:LaborSurplusInd xsi:nil="true"/>
```

```
<ns2:MinorityOwnedInd xsi:nil="true"/>
<ns2:MinorityOwnedType xsi:nil="true"/>
<ns2:WomanOwnedInd xsi:nil="true"/>
<ns2:Disadv8aInd xsi:nil="true"/>
<ns2:SmallBusInd xsi:nil="true"/>
<ns2:RentOwnInd xsi:nil="true"/>
<ns2:DbRating xsi:nil="true"/>
<ns2:GSAIndicatorFlag xsi:nil="true"/>
<ns2:JgzzFiscalCode xsi:nil="true"/>
<ns2:AnalysisFy xsi:nil="true"/>
<ns2:FiscalYearendMonth xsi:nil="true"/>
<ns2:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
<ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
<ns2:YearEstablished xsi:nil="true"/>
<ns2:MissionStatement xsi:nil="true"/>
<ns2:OrganizationType xsi:nil="true"/>
<ns2:BusinessScope xsi:nil="true"/>
<ns2:CorporationClass xsi:nil="true"/>
<ns2:LocalBusIdenType xsi:nil="true"/>
<ns2:LocalBusIdentifier xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:RegistrationType xsi:nil="true"/>
<ns2:TotalEmployeesText xsi:nil="true"/>
<ns2:TotalEmployeesInd xsi:nil="true"/>
<ns2:TotalEmployeesEstimatedIndicator xsi:nil="true"/>
<ns2:TotalEmployeesMinimumIndicator xsi:nil="true"/>
<ns2:ParentSubInd xsi:nil="true"/>
<ns2:IncorpYear xsi:nil="true"/>
<ns2:LastUpdateDate>2021-09-15T04:28:09.623Z</ns2:LastUpdateDate>
<ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
<ns2:CreationDate>2021-09-15T04:27:52.652Z</ns2:CreationDate>
<ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
<ns2:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns2:LastUpdateLogin>
<ns2:RequestId xsi:nil="true"/>
<ns2:ContentSourceNumber xsi:nil="true"/>
<ns2:EffectiveStartDate>2021-09-15</ns2:EffectiveStartDate>
<ns2:EffectiveEndDate>4712-12-31</ns2:EffectiveEndDate>
<ns2:PublicPrivateOwnershipFlag xsi:nil="true"/>
<ns2:LocalActivityCodeType xsi:nil="true"/>
<ns2:LocalActivityCode xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddress xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressText xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressEstimation xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressMinimum xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:TotalPaymentAmount xsi:nil="true"/>
<ns2:DisplayedDUNSPartyIdentifier xsi:nil="true"/>
<ns2:Status>A</ns2:Status>
<ns2:DUNSNumberC xsi:nil="true"/>
<ns2:CreatedByModule>AMS</ns2:CreatedByModule>
<ns2:BankOrBranchNumber xsi:nil="true"/>
<ns2:BankCode xsi:nil="true"/>
<ns2:BranchCode xsi:nil="true"/>
<ns2:DoNotConfuseWith xsi:nil="true"/>
<ns2:HomeCountry xsi:nil="true"/>
<ns2:GrowthStrategyDescription xsi:nil="true"/>
<ns2:SeblUserKeyLoc xsi:nil="true"/>
<ns2:StockSymbol xsi:nil="true"/>
<ns2:TradingPartnerIdentifier xsi:nil="true"/>
<ns2:OrigSystem xsi:nil="true"/>
<ns2:OrigSystemReference>300100573316847</ns2:OrigSystemReference>
<ns2:EffectiveSequence>1</ns2:EffectiveSequence>
<ns2:Comments xsi:nil="true"/>
<ns2:EffectiveLatestChange>Y</ns2:EffectiveLatestChange>
<ns2:OrganizationSize xsi:nil="true"/>
<ns2:SuffixOverriddenFlag>false</ns2:SuffixOverriddenFlag>
```

```
<ns2:UniqueNameAlias>Indian AutoComp</ns2:UniqueNameAlias>
<ns2:UniqueNameSuffix xsi:nil="true"/>
<ns2:DomesticUltimateDUNSNumberC xsi:nil="true"/>
<ns2:GlobalUltimateDUNSNumberC xsi:nil="true"/>
<ns2:ParentDUNSNumberC xsi:nil="true"/>
<ns2:CorpCurrencyCode>USD</ns2:CorpCurrencyCode>
<ns2:CurcyConvRateType>Corporate</ns2:CurcyConvRateType>
<ns2:CurrencyCode>USD</ns2:CurrencyCode>
<ns2:PartyNumber>CDRM_1003763</ns2:PartyNumber>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredContactName xsi:nil="true"/>
<ns2:PreferredContactEmailAddress xsi:nil="true"/>
<ns2:PreferredContactFormattedPhoneNumber xsi:nil="true"/>
<ns2:PrimaryAddressLine1 xsi:nil="true"/>
<ns2:PrimaryAddressLine2 xsi:nil="true"/>
<ns2:PrimaryAddressLine3 xsi:nil="true"/>
<ns2:PrimaryAddressLine4 xsi:nil="true"/>
<ns2:Alias xsi:nil="true"/>
<ns2:PrimaryAddressCity xsi:nil="true"/>
<ns2:PrimaryAddressCountry xsi:nil="true"/>
<ns2:PrimaryAddressCounty xsi:nil="true"/>
<ns2:PrimaryEmailAddress>test@oracle.com</ns2:PrimaryEmailAddress>
<ns2:PrimaryFormattedPhoneNumber>+1 (650) 633-8437 x8437</ns2:PrimaryFormattedPhoneNumber>
<ns2:IdenAddrLocationId xsi:nil="true"/>
<ns2:IdenAddrPartySiteId xsi:nil="true"/>
<ns2:PrimaryLanguage xsi:nil="true"/>
<ns2:PartyUniqueName>Indian AutoComp</ns2:PartyUniqueName>
<ns2:PrimaryAddressPostalCode xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PrimaryEmailId>300100573316848</ns2:PrimaryEmailId>
<ns2:PrimaryPhoneAreaCode>650</ns2:PrimaryPhoneAreaCode>
<ns2:PrimaryPhoneId>300100573316858</ns2:PrimaryPhoneId>
<ns2:PrimaryPhoneCountryCode>1</ns2:PrimaryPhoneCountryCode>
<ns2:PrimaryPhoneExtension>8437</ns2:PrimaryPhoneExtension>
<ns2:PrimaryPhoneLineType>GEN</ns2:PrimaryPhoneLineType>
<ns2:PrimaryPhoneNumber>6338437</ns2:PrimaryPhoneNumber>
<ns2:PrimaryPhonePurpose>BUSINESS</ns2:PrimaryPhonePurpose>
<ns2:PrimaryWebId xsi:nil="true"/>
<ns2:Pronunciation xsi:nil="true"/>
<ns2:PrimaryAddressProvince xsi:nil="true"/>
<ns2:SICCode xsi:nil="true"/>
<ns2:SICCodeType xsi:nil="true"/>
<ns2:PrimaryAddressState xsi:nil="true"/>
<ns2:PrimaryURL xsi:nil="true"/>
<ns2:ValidatedFlag xsi:nil="true"/>
<ns2:ThirdPartyFlag xsi:nil="true"/>
<ns2:LastUpdateSourceSystem>UNKNOWN</ns2:LastUpdateSourceSystem>
<ns2:LastSourceUpdateDate>2021-09-15T04:28:06.0Z</ns2:LastSourceUpdateDate>
<ns2:DataCloudStatus xsi:nil="true"/>
<ns2:LastEnrichmentDate xsi:nil="true"/>
<ns2:R10_CmnCustObj_Id_R10_CmnCustObj_To_Account xsi:nil="true"/>
<ns2:Lead_Id_R10_LeadAccountRel xsi:nil="true"/>
<ns2:PartnerProfile_Id_R10_PartnerAccountRelationship xsi:nil="true"/>
<ns2:R10_AccountText_c xsi:nil="true"/>
<ns2:R10_AccountNum_c>1234</ns2:R10_AccountNum_c>
<ns2:R10_AccountDate_c xsi:nil="true"/>
<ns2:Enrollment_Id_R10_EnrollAccountRelationship xsi:nil="true"/>
<ns2:Program_Id_R10_ProgramAccountrelationship xsi:nil="true"/>
<ns2:Opportunity_Id_R10OptyAcntRel xsi:nil="true"/>
<ns2:R10_AccountCheckbox_c>false</ns2:R10_AccountCheckbox_c>
<ns2:R10_AccountFixChList_c xsi:nil="true"/>
<ns2:R10_AccountDynChList_Id_c xsi:nil="true"/>
```

```
<ns2:R10_AccountDynChList_c xsi:nil="true"/>
<ns2:R10_AccountCurrency_c xsi:nil="true"/>
<ns2:R10_AccountDateTime_c xsi:nil="true"/>
<ns2:R10_AccountPerc_c xsi:nil="true"/>
<ns2:R10_AccountTextFormula_c>This Record was Created by: SALES_ADMIN</ns2:R10_AccountTextFormula_c>
<ns2:SalesGoal_Id_R10_QMAccountRel xsi:nil="true"/>
<ns2:R10_AccountTCM_Text_c xsi:nil="true"/>
<ns2:R10_AccountTCM_Number_c xsi:nil="true"/>
<ns2:R10_AccountTCM_Date_c xsi:nil="true"/>
<ns2:R10_AccountRecordtype_c xsi:nil="true"/>
<ns2:R10_ACCText_c xsi:nil="true"/>
<ns2:R10_ACCNumber_c xsi:nil="true"/>
<ns2:R10_ACCDate_c xsi:nil="true"/>
<ns2:REL10_AccountType_Toyota_c xsi:nil="true"/>
<ns2:REL10_AnnualRevenue_c xsi:nil="true"/>
<ns2:REL10_CBofTotalFleet_c xsi:nil="true"/>
<ns2:REL10_CompaniesInterest_c xsi:nil="true"/>
<ns2:REL10_CreditLimit_c xsi:nil="true"/>
<ns2:REL10_CustomerNumber_c xsi:nil="true"/>
<ns2:REL10_CustomerSince_c xsi:nil="true"/>
<ns2:REL10_EKAAgreement_c xsi:nil="true"/>
<ns2:REL10_EKAAgreementName_Id_c xsi:nil="true"/>
<ns2:REL10_EKAAgreementName_c xsi:nil="true"/>
<ns2:RE10_EKAExistingSince_c xsi:nil="true"/>
<ns2:REL10_EKAInformation_c xsi:nil="true"/>
<ns2:REL10_EKAIntranet_c xsi:nil="true"/>
<ns2:REL10_EKAManager_c xsi:nil="true"/>
<ns2:REL10_EKAProspectSince_c xsi:nil="true"/>
<ns2:REL10_EKASalesSupport_c xsi:nil="true"/>
<ns2:REL10_EKASuppliers_c xsi:nil="true"/>
<ns2:REL10_ExpiryDateForCurrentAgre_c xsi:nil="true"/>
<ns2:REL10_FiscalYearStartMonth_c xsi:nil="true"/>
<ns2:REL10_FleetSize_c xsi:nil="true"/>
<ns2:REL10_InternationalAccountNumb_c xsi:nil="true"/>
<ns2:REL10_LocalInfo1_c xsi:nil="true"/>
<ns2:REL10_LocalInfo2_c xsi:nil="true"/>
<ns2:REL10_LocalInfo3_c xsi:nil="true"/>
<ns2:Reference_Id_R10_REFAccountRel xsi:nil="true"/>
<ns2:R10_AccountText_M_c xsi:nil="true"/>
<ns2:R10_AccountFixChList_M_c xsi:nil="true"/>
<ns2:R10_Account_DCL_SalesCO_Id_c xsi:nil="true"/>
<ns2:R10_Account_DCL_SalesCO_c xsi:nil="true"/>
<ns2:R10_Account_DCL_Contact_Id_c xsi:nil="true"/>
<ns2:R10_Account_DCL_Contact_c xsi:nil="true"/>
<ns2:AccountIdCF_c xsi:nil="true"/>
<ns2:CustomerSince_c xsi:nil="true"/>
<ns2:CompaniesInterest_c>Used</ns2:CompaniesInterest_c>
<ns2:EKAAgreementCF_Id_c xsi:nil="true"/>
<ns2:EKAAgreementCF_c xsi:nil="true"/>
<ns2:InternationalAccountNumber_Id_c xsi:nil="true"/>
<ns2:InternationalAccountNumber_c xsi:nil="true"/>
<ns2:AnnualBusinessPlanatTSight_c xsi:nil="true"/>
<ns2:CBoftotalfleet_c xsi:nil="true"/>
<ns2:WH_c xsi:nil="true"/>
<ns2:NewBusiness_c>false</ns2:NewBusiness_c>
<ns2:STR_c>false</ns2:STR_c>
<ns2:Rel10_SP_TXT_c xsi:nil="true"/>
<ns2:Deal_Id_R10DealAccountrelationship xsi:nil="true"/>
<ns2:TestPercentage_c xsi:nil="true"/>
<ns2:BudgetFundRequest_Id_R11MDFRequestToAccount1M xsi:nil="true"/>
<ns2:Claim_Id_R11MDFClaimAccount_Rel xsi:nil="true"/>
<ns2:R11_AccountBP_Text_c xsi:nil="true"/>
<ns2:BusinessPlan_Id_R11_BP_Account_rel xsi:nil="true"/>
<ns2:Budget_Id_R11MDFBudgetToAccount xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_TEXT_c xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_NUM_c xsi:nil="true"/>
```

```
<ns2:R11_RNOW_ACCT_FCL_c xsi:nil="true"/>
<ns2:R11_Acct_DATE_c xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_CHKBOX_c>false</ns2:R11_RNOW_ACCT_CHKBOX_c>
<ns2:R11_RNOW_ACCT_DATETIME_c xsi:nil="true"/>
<ns2:Deal_Id_REL11_RELATION_ACCOUNT xsi:nil="true"/>
<ns2:SalesObjective_Id_Upg_BO_Acc_1M xsi:nil="true"/>
<ns2:Atext_c xsi:nil="true"/>
<ns2:Anum_c xsi:nil="true"/>
<ns2:Adate_c xsi:nil="true"/>
<ns2:Acheckbox_c>false</ns2:Acheckbox_c>
<ns2:Apercentage_c xsi:nil="true"/>
<ns2:Adatetime_c xsi:nil="true"/>
<ns2:Acuurency_c xsi:nil="true"/>
<ns2:Afcl_c xsi:nil="true"/>
<ns2:Adcl_Id_c xsi:nil="true"/>
<ns2:Adcl_c xsi:nil="true"/>
<ns2:Product_Id_Product2Account xsi:nil="true"/>
<ns2:PriceBookHeader_Id_PB2Account xsi:nil="true"/>
<ns2:SalesPromotion_Id_Promotion2Account xsi:nil="true"/>
<ns2:R12_GS_0723_CustomObject2_Id_R12_GS_CustomObject2_relationship xsi:nil="true"/>
<ns2:RNOW_TEXT_0724_c xsi:nil="true"/>
<ns2:RNOW_NUM_0724_c xsi:nil="true"/>
<ns2:RNOW_ACCT_FCL_0724_c xsi:nil="true"/>
<ns2:RNOW_ACCT_CHKBOX_0724_c>false</ns2:RNOW_ACCT_CHKBOX_0724_c>
<ns2:RNOW_ACCT_DATA_0724_c xsi:nil="true"/>
<ns2:RNOW_ACCT_DATETIME_0724_c xsi:nil="true"/>
<ns2:SalesTerritory_Id_CDRMSalesTerritoryCustObjAccRel xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Fcl_c xsi:nil="true"/>
<ns2:R12PB8_Zem_AccountToContact_DC_Id_c xsi:nil="true"/>
<ns2:R12PB8_Zem_AccountToContact_DC_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Text_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Number_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Date_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_DateTime_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_CheckBox_c>false</ns2:R12PB8_Zem_Account_CheckBox_c>
<ns2:R12PB8_Zem_Account_Percentage_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_ParentFcl_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_ChildFcl_c xsi:nil="true"/>
<ns2:SalesCountry_c xsi:nil="true"/>
<ns2:SalesRegion_c xsi:nil="true"/>
<ns2:SalesCluster_c xsi:nil="true"/>
<ns2:LogisticsRail_c>Logistics</ns2:LogisticsRail_c>
<ns2:ExternalId_c xsi:nil="true"/>
<ns2:Organization_Id_Account_Account xsi:nil="true"/>
<ns2:Type_c>ZCA_Prospect</ns2:Type_c>
<ns2:Category_c xsi:nil="true"/>
<ns2:ParentExternalId_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_mcl_c xsi:nil="true"/>
<ns2:ResDCL_Id_c xsi:nil="true"/>
<ns2:ResDCL_c xsi:nil="true"/>
<ns2:R1802BIObj_Id_R13_1802_CO_Acccount xsi:nil="true"/>
<ns2:R1802_Text_c xsi:nil="true"/>
<ns2:R1802_Number_c xsi:nil="true"/>
<ns2:R13_COPYMAP_TEXT_c xsi:nil="true"/>
<ns2:R13_COPYMAP_NUMBER_c xsi:nil="true"/>
<ns2:R1802CustObj_Id_R1805COtoAccount xsi:nil="true"/>
<ns2:O365_1810_DCL_Id_c xsi:nil="true"/>
<ns2:O365_1810_DCL_c xsi:nil="true"/>
<ns2:ACCPICKERTEXT_c xsi:nil="true"/>
<ns2:Text_Elastic_c xsi:nil="true"/>
<ns2:Number_Elastic_c xsi:nil="true"/>
<ns2:Date_Elastic_c xsi:nil="true"/>
<ns2:PARENT1_c xsi:nil="true"/>
<ns2:PARENT2_c xsi:nil="true"/>
<ns2:PARENT3_c xsi:nil="true"/>
<ns2:SON1_c xsi:nil="true"/>
```

```
 <ns2:SON2_c xsi:nil="true"/>
 <ns2:SON3_c xsi:nil="true"/>
 <ns2:SON4_c xsi:nil="true"/>
 <ns2:SON5_c xsi:nil="true"/>
 <ns2:SON6_c xsi:nil="true"/>
 <ns2:CHILD1_c xsi:nil="true"/>
 <ns2:CHILD2_c xsi:nil="true"/>
 <ns2:CHILD3_c xsi:nil="true"/>
 <ns2:CHILD4_c xsi:nil="true"/>
 <ns2:Lead_Id_R13_LeadsAccount xsi:nil="true"/>
 <ns2:O365_1904_AccntSimpleTxt_c>This is the default text set in the field</ns2:O365_1904_AccntSimpleTxt_c>
 <ns2:O365_1904_AccntMultiText_c>Default text in text field of type Multiline text area.Sample text in text
 field of type</ns2:O365_1904_AccntMultiText_c>
 <ns2:O365_1904_AccntNum_c>987684</ns2:O365_1904_AccntNum_c>
 <ns2:O365_1904_AccntDate_c>2019-02-20</ns2:O365_1904_AccntDate_c>
 <ns2:O365_1904_AccntLngTxt_c>SXQgaXMgYSBsb25nIGVzdGFibGlzaGVkIGZhY3QgdGhhdCBhIHJlYWRlciB3aWxsIGJlIGRpc3Ry
YWN0ZWQgYnkgdGhlIHJlYWRhYmxlIGNvbnRlbnQgb2YgYSBwYWdlIHdoZW4gbG9va2luZyBhdCBp
dHMgbGF5b3V0LiBUaGUgcG9pbnQgb2YgdXNpbmcgTG9yZW0gSXBzdW0gaXMgdGhhdCBpdCBoYXMg
YSBtb3JlLW9yLWxlc3Mgbm9ybWFsIGRpc3RyaWJ1dGlvbiBvZiBsZXR0ZXJzLCBhcyBvcHBvc2Vk
IHRvIHVzaW5nICdDb250ZW50IGhlcmUsIGNvbnRlbnQgaGVyZScsIG1ha2luZyBpdCBsb29rIGxp
a2UgcmVhZGFibGUgRW5nbGlzaC4gTWFueSBkZXNrdG9wIHB1Ymxpc2hpbmcgcGFja2FnZXMgYW5k
IHdlYiBwYWdl</ns2:O365_1904_AccntLngTxt_c>
 <ns2:O365_1904_AccntChkBox_c>true</ns2:O365_1904_AccntChkBox_c>
 <ns2:O365_1904_AccntPerc_c>0.45</ns2:O365_1904_AccntPerc_c>
 <ns2:O365_1904_AccntDtTime_c>2019-02-27T02:45:00.0Z</ns2:O365_1904_AccntDtTime_c>
 <ns2:O365_1904_AccntCur_c currencyCode="USD">9878355</ns2:O365_1904_AccntCur_c>
 <ns2:O365_1904_AccntFCL_c>L</ns2:O365_1904_AccntFCL_c>
 <ns2:O365_1904_AccntMCL_c>CEO,CIO,VP</ns2:O365_1904_AccntMCL_c>
 <ns2:O365_1904_AccntChldFCL_c xsi:nil="true"/>
 <ns2:O365_1904_AccntChldMCL_c xsi:nil="true"/>
 <ns2:O365_1904_AccntDCL_Id_c xsi:nil="true"/>
 <ns2:O365_1904_AccntDCL_c xsi:nil="true"/>
 <ns2:R1810SrcCustObj_Id_OneMSalesCustAccount xsi:nil="true"/>
 <ns2:R1810SrcCustObj_Id_SalesCustAccount_1M xsi:nil="true"/>
 <ns2:AUX_DCLServiceRequest1_Id_c xsi:nil="true"/>
 <ns2:AUX_DCLServiceRequest1_c xsi:nil="true"/>
 <ns2:R1904CustomObjectDCL_Id_c xsi:nil="true"/>
 <ns2:R1904CustomObjectDCL_c xsi:nil="true"/>
 <ns2:R1805CustomObj2_Id_CustomtoAccount xsi:nil="true"/>
 <ns2:M2004_CXM_Text_c xsi:nil="true"/>
 <ns2:M2004_CXM_MobileNum_c xsi:nil="true"/>
 <ns2:M2004_CXM_Date_c xsi:nil="true"/>
 <ns2:M2004_CXM_CB_c>false</ns2:M2004_CXM_CB_c>
 <ns2:M2004_CXM_DateTime_c xsi:nil="true"/>
 <ns2:M2004_CXM_Perc_c xsi:nil="true"/>
 <ns2:M2004_CXM_Currency_c xsi:nil="true"/>
 <ns2:M2004_CXM_Fcl_c xsi:nil="true"/>
 <ns2:M2004_CXM_ParentFcl_c xsi:nil="true"/>
 <ns2:M2004_CXM_ChildFcl_c xsi:nil="true"/>
 <ns2:M2004_CXM_DCLContact_Id_c xsi:nil="true"/>
 <ns2:M2004_CXM_DCLContact_c xsi:nil="true"/>
 <ns2:M2004_CXM_DCLOppty_Id_c xsi:nil="true"/>
 <ns2:M2004_CXM_DCLOppty_c xsi:nil="true"/>
 <ns2:Opportunity_Id_M2004_CXM_1ToMOpptyToAccount xsi:nil="true"/>
 <ns2:ConditionallyMandatory_c xsi:nil="true"/>
 <ns2:O365_2004_ACCTEXT_c xsi:nil="true"/>
 <ns2:O365_2004_stdLkup_c xsi:nil="true"/>
 <ns2:O365_2004_CustomLkup_c xsi:nil="true"/>
 <ns2:O365_2004_StdLkUPm1_c xsi:nil="true"/>
 <ns2:M2004_CXM_DCLCusOBJ1_Id_c xsi:nil="true"/>
 <ns2:M2004_CXM_DCLCusOBJ1_c xsi:nil="true"/>
 <ns2:M2004_CXM_MCL_c xsi:nil="true"/>
 <ns2:Account_FCL_MultiSelect_c xsi:nil="true"/>
 <ns2:Account_FCL_Parent_c xsi:nil="true"/>
 <ns2:Account_FCL_Child_c xsi:nil="true"/>
 <ns2:Account_DCL_Driidown_Id_c xsi:nil="true"/>
```

```
<ns2:Account_DCL_Driidown_c xsi:nil="true"/>
<ns2:TextAdvExpr_c xsi:nil="true"/>
<ns2:M2101_CXM_Link_c>https://www.oracle.com</ns2:M2101_CXM_Link_c>
<ns2:AAACustomFCL_c xsi:nil="true"/>
<ns2:AAACustomCheckbox_c>false</ns2:AAACustomCheckbox_c>
<ns2:CDA_Text_c xsi:nil="true"/>
<ns2:CDA_Num_c xsi:nil="true"/>
<ns2:CDA_Dat_c xsi:nil="true"/>
<ns2:CDA_CB_c>false</ns2:CDA_CB_c>
<ns2:CDA_Per_c xsi:nil="true"/>
<ns2:CDA_DatTime_c xsi:nil="true"/>
<ns2:CDA_Currency_c xsi:nil="true"/>
<ns2:CDA_FCL_c xsi:nil="true"/>
<ns2:CDA_DCL_Id_c xsi:nil="true"/>
<ns2:CDA_DCL_c xsi:nil="true"/>
<ns2:CDA_CHFCL_c xsi:nil="true"/>
<ns2:CDA_PFCL_c xsi:nil="true"/>
<ns2:CDA_MULFCL_c xsi:nil="true"/>
</ns2:OrganizationProfile>
<ns2:PartyUsageAssignment>
<ns1:PartyUsgAssignmentId>300100573316857</ns1:PartyUsgAssignmentId>
<ns1:PartyId>300100573316847</ns1:PartyId>
<ns1:PartyUsageCode>CUSTOMER</ns1:PartyUsageCode>
<ns1:EffectiveStartDate>2021-09-15</ns1:EffectiveStartDate>
<ns1:EffectiveEndDate>4712-12-31</ns1:EffectiveEndDate>
<ns1:StatusFlag>true</ns1:StatusFlag>
<ns1:Comments xsi:nil="true"/>
<ns1:OwnerTableName xsi:nil="true"/>
<ns1:OwnerTableId xsi:nil="true"/>
<ns1:CreatedByModule>AMS</ns1:CreatedByModule>
<ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:CreationDate>2021-09-15T04:28:01.84Z</ns1:CreationDate>
<ns1:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns1:LastUpdateLogin>
<ns1:LastUpdateDate>2021-09-15T04:28:05.303Z</ns1:LastUpdateDate>
<ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
<ns1:RequestId xsi:nil="true"/>
</ns2:PartyUsageAssignment>
<ns2:Phone xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/">
<ns5:ContactPointId>300100573316858</ns5:ContactPointId>
<ns5:ContactPointType>PHONE</ns5:ContactPointType>
<ns5:Status>A</ns5:Status>
<ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
<ns5:OwnerTableId>300100573316847</ns5:OwnerTableId>
<ns5:PrimaryFlag>true</ns5:PrimaryFlag>
<ns5:OrigSystemReference>300100573316858</ns5:OrigSystemReference>
<ns5:LastUpdateDate>2021-09-15T04:28:10.013Z</ns5:LastUpdateDate>
<ns5:LastUpdatedBy>SALES_ADMIN</ns5:LastUpdatedBy>
<ns5:CreationDate>2021-09-15T04:28:02.552Z</ns5:CreationDate>
<ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
<ns5:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns5:LastUpdateLogin>
<ns5:RequestId xsi:nil="true"/>
<ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
<ns5:CreatedByModule>AMS</ns5:CreatedByModule>
<ns5:ContactPointPurpose>BUSINESS</ns5:ContactPointPurpose>
<ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
<ns5:StartDate>2021-09-15</ns5:StartDate>
<ns5:EndDate>4712-12-31</ns5:EndDate>
<ns5:RelationshipId xsi:nil="true"/>
<ns5:PartyUsageCode xsi:nil="true"/>
<ns5:OrigSystem xsi:nil="true"/>
<ns5:PhoneCallingCalendar xsi:nil="true"/>
<ns5:LastContactDtTime xsi:nil="true"/>
<ns5:PhoneAreaCode>650</ns5:PhoneAreaCode>
<ns5:PhoneCountryCode>1</ns5:PhoneCountryCode>
<ns5:PhoneNumber>6338437</ns5:PhoneNumber>
```

```
 <ns5:PhoneExtension>8437</ns5:PhoneExtension>
 <ns5:PhoneLineType>GEN</ns5:PhoneLineType>
 <ns5:RawPhoneNumber>1-650-6338437</ns5:RawPhoneNumber>
 <ns5:PagerTypeCode xsi:nil="true"/>
 <ns5:FormattedPhoneNumber>+1 (650) 633-8437 x8437</ns5:FormattedPhoneNumber>
 <ns5:TransposedPhoneNumber>73483360561</ns5:TransposedPhoneNumber>
 <ns5:PartyName>Indian AutoComp</ns5:PartyName>
 <ns5:TimezoneCode xsi:nil="true"/>
 <ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
 <ns5:OriginalSystemReference xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns1:OrigSystemReferenceId>300100573316859</ns1:OrigSystemReferenceId>
 <ns1:OrigSystem>CSV</ns1:OrigSystem>
 <ns1:OrigSystemReference>TestPhone001</ns1:OrigSystemReference>
 <ns1:OwnerTableName>HZ_CONTACT_POINTS</ns1:OwnerTableName>
 <ns1:OwnerTableId>300100573316858</ns1:OwnerTableId>
 <ns1:Status>A</ns1:Status>
 <ns1:ReasonCode xsi:nil="true"/>
 <ns1:OldOrigSystemReference xsi:nil="true"/>
 <ns1:StartDateActive>2021-09-15</ns1:StartDateActive>
 <ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:CreationDate>2021-09-15T04:28:02.602Z</ns1:CreationDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:LastUpdateDate>2021-09-15T04:28:05.306Z</ns1:LastUpdateDate>
 <ns1:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns1:LastUpdateLogin>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedByModule>AMS</ns1:CreatedByModule>
 <ns1:PartyId xsi:nil="true"/>
 <ns1:RequestId xsi:nil="true"/>
 </ns5:OriginalSystemReference>
 </ns2:Phone>
 </ns2:Value>
 </ns3:result>
 </ns0:createOrganizationResponse>
 </env:Body>
</env:Envelope>
```

Create or Update an Account with Multiple Phones and Email Addresses

In this use case, we'll create or update an organization account with multiple phones and email addresses.

Operation: **createOrganization**

Request Body

```
<soapenv:Body>
 <typ:createOrganization>
 <typ:organizationParty>
 <org:CreatedByModule>HZ_WS</org:CreatedByModule>
 <org:OrganizationProfile>
 <org:OrganizationName>XXXXXXXXXX</org:OrganizationName>
 <org:CreatedByModule>HZ_WS</org:CreatedByModule>
 </org:OrganizationProfile>
 <org:PartyUsageAssignment>
 <par:PartyUsageCode>CUSTOMER</par:PartyUsageCode>
 <par:CreatedByModule>HZ_WS</par:CreatedByModule>
 </org:PartyUsageAssignment>
 <org:Phone>
 <!--con:PrimaryFlag>false</con:PrimaryFlag-->
```

```
 <con:CreatedByModule>HZ_WS</con:CreatedByModule>
 <con:ContactPointPurpose>BUSINESS</con:ContactPointPurpose>
 <!--con:PrimaryByPurpose>N</con:PrimaryByPurpose-->
 <con:PhoneLineType>GEN</con:PhoneLineType>
 <con:PhoneAreaCode>999</con:PhoneAreaCode>
 <con:PhoneCountryCode>9</con:PhoneCountryCode>
 <con:PhoneNumber>999-9999</con:PhoneNumber>
 <!--con:OverallPrimaryFlag>false</con:OverallPrimaryFlag-->
 </org:Phone>
 <org:Phone>
 <!--con:PrimaryFlag>false</con:PrimaryFlag-->
 <con:CreatedByModule>HZ_WS</con:CreatedByModule>
 <con:ContactPointPurpose>BUSINESS</con:ContactPointPurpose>
 <!--con:PrimaryByPurpose>N</con:PrimaryByPurpose-->
 <con:PhoneLineType>FAX</con:PhoneLineType>
 <con:PhoneAreaCode>999</con:PhoneAreaCode>
 <con:PhoneCountryCode>9</con:PhoneCountryCode>
 <con:PhoneNumber>999-9999</con:PhoneNumber>
 <!--con:OverallPrimaryFlag>false</con:OverallPrimaryFlag-->
 </org:Phone>
 <org:Email>
 <!--con:PrimaryFlag>false</con:PrimaryFlag-->
 <con:CreatedByModule>HZ_WS</con:CreatedByModule>
 <con:ContactPointPurpose>BUSINESS</con:ContactPointPurpose>
 <!--con:PrimaryByPurpose>N</con:PrimaryByPurpose-->
 <con:EmailAddress>XXXXXXXXXX@oracle.com</con:EmailAddress>
 <!--con:OverallPrimaryFlag>false</con:OverallPrimaryFlag-->
 </org:Email>
 <org:Email>
 <!--con:PrimaryFlag>false</con:PrimaryFlag-->
 <con:CreatedByModule>HZ_WS</con:CreatedByModule>
 <con:ContactPointPurpose>BUSINESS</con:ContactPointPurpose>
 <!--con:PrimaryByPurpose>N</con:PrimaryByPurpose-->
 <con:EmailAddress>XXXXXXXXXX@oracle.com</con:EmailAddress>
 <!--con:OverallPrimaryFlag>false</con:OverallPrimaryFlag-->
 </org:Email>
 </typ:organizationParty>
 </typ:createOrganization>
</soapenv:Body>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/types/">
<env:Header>
<wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule//
OrganizationService/mergeOrganizationResponse</wsa:Action>
<wsa:MessageID>urn:uuid:97d7fea1-bb7e-4a21-8d29-73288a59a1a8</wsa:MessageID>
</env:Header>
<env:Body>
 <ns0:mergeOrganizationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/">
 <ns3:result xsi:type="ns2:OrganizationPartyResult" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/organizationService/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule/
types/" xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/
svc/types/" xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/"
 xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance">
 <ns2:Value>
 <ns2:PartyNumber>1003</ns2:PartyNumber>
 <ns2:PartyId>1003</ns2:PartyId>
 <ns2:PartyType>ORGANIZATION</ns2:PartyType>
 <ns2:PartyName>UNITED PARCEL SERVICE, INC</ns2:PartyName>
 <ns2:LastUpdatedBy>1318</ns2:LastUpdatedBy>
```

```
<ns2:ValidatedFlag xsi:nil="true"/>
<ns2:LastUpdateLogin>4081020</ns2:LastUpdateLogin>
<ns2:CreationDate>1997-02-23T12:47:25.0Z</ns2:CreationDate>
<ns2:RequestId>4350529</ns2:RequestId>
<ns2:LastUpdateDate>2007-04-12T21:13:29.0Z</ns2:LastUpdateDate>
<ns2:CreatedBy>1028</ns2:CreatedBy>
<ns2:OrigSystemReference>1003</ns2:OrigSystemReference>
<ns2:HQBranchIndicator>HQ</ns2:HQBranchIndicator>
<ns2:DUNSNumberC>006991681</ns2:DUNSNumberC>
<ns2:SICCode>4215</ns2:SICCode>
<ns2:JgzzFiscalCode>01-83937602</ns2:JgzzFiscalCode>
<ns2:Address1>93 Peachtree Parkway</ns2:Address1>
<ns2:Country>US</ns2:Country>
<ns2:Address3 xsi:nil="true"/>
<ns2:GroupType xsi:nil="true"/>
<ns2:Address2 xsi:nil="true"/>
<ns2:Address4 xsi:nil="true"/>
<ns2:Status>A</ns2:Status>
<ns2:City>Atlanta</ns2:City>
<ns2:PostalCode>30328</ns2:PostalCode>
<ns2:County>Fulton</ns2:County>
<ns2:YearEstablished>1969</ns2:YearEstablished>
<ns2:Province xsi:nil="true"/>
<ns2:State>GA</ns2:State>
<ns2:URL xsi:nil="true"/>
<ns2:AnalysisFy>1996</ns2:AnalysisFy>
<ns2:SICCodeType>1987 SIC</ns2:SICCodeType>
<ns2:EmailAddress xsi:nil="true"/>
<ns2:FiscalYearendMonth>12</ns2:FiscalYearendMonth>
<ns2:EmployeesTotal>25000</ns2:EmployeesTotal>
<ns2:CurrentFiscalYearPotentialRevenueAmount>800000000</ns2:CurrentFiscalYearPotentialRevenueAmount>
<ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
<ns2:GSAIndicatorFlag>false</ns2:GSAIndicatorFlag>
<ns2:CategoryCode>DISTRIBUTION</ns2:CategoryCode>
<ns2:LanguageName xsi:nil="true"/>
<ns2:MissionStatement xsi:nil="true"/>
<ns2:ThirdPartyFlag>false</ns2:ThirdPartyFlag>
<ns2:HomeCountry xsi:nil="true"/>
<ns2:CreatedByModule xsi:nil="true"/>
<ns2:ObjectVersionNumber>10</ns2:ObjectVersionNumber>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:PrimaryPhonePurpose xsi:nil="true"/>
<ns2:PrimaryPhoneContactPointId>3105</ns2:PrimaryPhoneContactPointId>
<ns2:PrimaryPhoneLineType>GEN</ns2:PrimaryPhoneLineType>
<ns2:PrimaryPhoneCountryCode>1</ns2:PrimaryPhoneCountryCode>
<ns2:PrimaryPhoneAreaCode>703</ns2:PrimaryPhoneAreaCode>
<ns2:PrimaryPhoneNumber>8441212</ns2:PrimaryPhoneNumber>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:IdenAddrLocationId>944</ns2:IdenAddrLocationId>
<ns2:PrimaryURLContactPointId xsi:nil="true"/>
<ns2:PrimaryEmailContactPointId xsi:nil="true"/>
<ns2:IdenAddrPartySiteId>1097</ns2:IdenAddrPartySiteId>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PersonSecondLastName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:TradingPartnerIdentifier xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:InternalFlag xsi:nil="true"/>
<ns2:Comments xsi:nil="true"/>
<ns2:CeoName xsi:nil="true"/>
<ns2:PrincipalName xsi:nil="true"/>
<ns2:OrganizationSize>LARGE</ns2:OrganizationSize>
<ns2:PartyUniqueName>UNITED PARCEL SERVICE, INC</ns2:PartyUniqueName>
```

```
 <ns2:SourceSystem xsi:nil="true"/>
 <ns2:SourceSystemReferenceValue xsi:nil="true"/>
 <ns2:SourceSystemUpdateDate xsi:nil="true"/>
 <ns2:PartySite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/">
 <ns1:PartySiteId>300100543382342</ns1:PartySiteId>
 <ns1:PartyId>1003</ns1:PartyId>
 <ns1:LocationId>970</ns1:LocationId>
 <ns1:LastUpdateDate>2021-08-11T17:59:42.25Z</ns1:LastUpdateDate>
 <ns1:PartySiteNumber>CDRM_768917</ns1:PartySiteNumber>
 <ns1:LastUpdatedBy>APPLICATION_IMPLEMENTATION_CONSULTANT</ns1:LastUpdatedBy>
 <ns1:CreationDate>2021-08-11T17:59:40.001Z</ns1:CreationDate>
 <ns1:CreatedBy>APPLICATION_IMPLEMENTATION_CONSULTANT</ns1:CreatedBy>
 <ns1:LastUpdateLogin>C8A8F4A7C1BECE68E053DA0CF10A44AE</ns1:LastUpdateLogin>
 <ns1:RequestId xsi:nil="true"/>
 <ns1:OrigSystem xsi:nil="true"/>
 <ns1:OrigSystemReference>300100543382342</ns1:OrigSystemReference>
 <ns1:StartDateActive>2021-08-11</ns1:StartDateActive>
 <ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
 <ns1:Mailstop xsi:nil="true"/>
 <ns1:IdentifyingAddressFlag>false</ns1:IdentifyingAddressFlag>
 <ns1:Language xsi:nil="true"/>
 <ns1:Status>A</ns1:Status>
 <ns1:PartySiteName xsi:nil="true"/>
 <ns1:Addressee xsi:nil="true"/>
 <ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
 <ns1:GlobalLocationNumber xsi:nil="true"/>
 <ns1:DUNSNumberC xsi:nil="true"/>
 <ns1:Comments xsi:nil="true"/>
 <ns1:PartySiteType xsi:nil="true"/>
 <ns1:PartyNameDba xsi:nil="true"/>
 <ns1:PartyNameDivision xsi:nil="true"/>
 <ns1:PartyNameLegal xsi:nil="true"/>
 <ns1:RelationshipId xsi:nil="true"/>
 <ns1:PartyUsageCode xsi:nil="true"/>
 <ns1:UsageCode>GEOGRAPHY</ns1:UsageCode>
 <ns1:FormattedAddress>1800 Satellite Drive,Distribution Center,CHATTANOOGA, TN 37401</ns1:FormattedAddress>
 <ns1:Country>US</ns1:Country>
 <ns1:Address1>1800 Satellite Drive</ns1:Address1>
 <ns1:Address2>Distribution Center</ns1:Address2>
 <ns1:Address3>Warehouse B</ns1:Address3>
 <ns1:Address4 xsi:nil="true"/>
 <ns1:City>Chattanooga</ns1:City>
 <ns1:PostalCode>37401</ns1:PostalCode>
 <ns1:State>TN</ns1:State>
 <ns1:Province xsi:nil="true"/>
 <ns1:County>Hamilton</ns1:County>
 <ns1:AddressStyle xsi:nil="true"/>
 <ns1:ValidatedFlag xsi:nil="true"/>
 <ns1:AddressLinesPhonetic xsi:nil="true"/>
 <ns1:PostalPlus4Code xsi:nil="true"/>
 <ns1:Position xsi:nil="true"/>
 <ns1:LocationDirections xsi:nil="true"/>
 <ns1:AddressExpirationDate xsi:nil="true"/>
 <ns1:LocationLanguage xsi:nil="true"/>
 <ns1:ValidationStatusCode xsi:nil="true"/>
 <ns1:DateValidated xsi:nil="true"/>
 <ns1:DoNotValidateFlag xsi:nil="true"/>
 <ns1:HouseType xsi:nil="true"/>
 <ns1:FormattedMultilineAddress>1800 Satellite Drive&lt;BR>Distribution Center&lt;BR>CHATTANOOGA, TN 37401</
ns1:FormattedMultilineAddress>
 <ns1:Country1>US</ns1:Country1>
 <ns1:ObjectVersionNumber1>10</ns1:ObjectVersionNumber1>
 <ns1:ContactPreferenceExistFlag>false</ns1:ContactPreferenceExistFlag>
 <ns1:FormattedLocaleAddress xsi:nil="true"/>
 <ns1:CurrencyCode>USD</ns1:CurrencyCode>
 <ns1:CorpCurrencyCode>USD</ns1:CorpCurrencyCode>
```

```
<ns1:CurcyConvRateType>Corporate</ns1:CurcyConvRateType>
<ns1:InternalFlag>false</ns1:InternalFlag>
<ns1:OverallPrimaryFlag>false</ns1:OverallPrimaryFlag>
<ns1:EmailAddress xsi:nil="true"/>
<ns1:Latitude xsi:nil="true"/>
<ns1:Longitude xsi:nil="true"/>
<ns1:PartySiteUse>
<ns1:PartySiteUseId>300100543382343</ns1:PartySiteUseId>
<ns1:BeginDate>2021-08-11</ns1:BeginDate>
<ns1:Comments xsi:nil="true"/>
<ns1:EndDate>4712-12-31</ns1:EndDate>
<ns1:PartySiteId>300100543382342</ns1:PartySiteId>
<ns1:LastUpdateDate>2021-08-11T17:59:42.186Z</ns1:LastUpdateDate>
<ns1:RequestId xsi:nil="true"/>
<ns1:LastUpdatedBy>APPLICATION_IMPLEMENTATION_CONSULTANT</ns1:LastUpdatedBy>
<ns1:CreationDate>2021-08-11T17:59:40.055Z</ns1:CreationDate>
<ns1:CreatedBy>APPLICATION_IMPLEMENTATION_CONSULTANT</ns1:CreatedBy>
<ns1:LastUpdateLogin>C8A8F4A7C1BECE68E053DA0CF10A44AE</ns1:LastUpdateLogin>
<ns1:IntegrationKey>x</ns1:IntegrationKey>
<ns1:SiteUseType>BILL_TO</ns1:SiteUseType>
<ns1:PrimaryPerType>N</ns1:PrimaryPerType>
<ns1:Status>A</ns1:Status>
<ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
<ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
</ns1:PartySiteUse>
</ns2:PartySite>
</ns2:Value>
</ns3:result>
</ns0:mergeOrganizationResponse>
</env:Body>
</env:Envelope>
```

Create Organization Party and change Owner (Account Director)

In this use case, we'll create an organization party and change owner (account director). To perform this, we will create an organization party using createOrganization operation of Organization web service. Find the SalesAccountId using the PartyId of the organization in findSalesAccountOperation of SalesParty web service. Using the SalesAccountId, update the AccountDirectorId in updateSalesAccount operation of SalesParty web service.

1. Create an organization using createOrganization operation of Organization web service

   Operation: **createOrganization**

   Request Body

```
<?xml version="1.0" encoding="UTF-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule/
types/">
 <ns1:createOrganization>
 <ns1:organizationParty xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/">
 <ns2:CreatedByModule>AMS</ns2:CreatedByModule>
 <ns2:PartyUsageAssignment xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/
partyService/">
 <ns3:PartyUsageCode>CUSTOMER</ns3:PartyUsageCode>
 <ns3:CreatedByModule>AMS</ns3:CreatedByModule>
 </ns2:PartyUsageAssignment>
 <ns2:OrganizationProfile>
 <ns2:OrganizationName>Indian AutoComp</ns2:OrganizationName>
```

```
 <ns2:CeoName>Alan</ns2:CeoName>
 <ns2:CreatedByModule>AMS</ns2:CreatedByModule>
 </ns2:OrganizationProfile>
 <ns2:Email xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/">
 <ns4:CreatedByModule>AMS</ns4:CreatedByModule>
 <ns4:EmailAddress>test@oracle.com</ns4:EmailAddress>
 <ns4:EmailFormat>MAILHTML</ns4:EmailFormat>
 <ns4:OwnerTableName>HZ_PARTIES</ns4:OwnerTableName>
 <ns4:OriginalSystemReference xmlns:ns16="http://xmlns.oracle.com/apps/cdm/foundation/parties/
partyService/">
 <ns16:OrigSystem>CSV</ns16:OrigSystem>
 <ns16:OrigSystemReference>TestEmail001</ns16:OrigSystemReference>
 <ns16:OwnerTableName>HZ_CONTACT_POINTS</ns16:OwnerTableName>
 <ns16:CreatedByModule>AMS</ns16:CreatedByModule>
 </ns4:OriginalSystemReference>
 </ns2:Email>
 <ns2:InstantMessaging xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/
contactPointService/">
 <ns5:CreatedByModule>AMS</ns5:CreatedByModule>
 <ns5:InstantMessengerType>YAHOO</ns5:InstantMessengerType>
 <ns5:InstantMessagingAddress>corp@oracle.com</ns5:InstantMessagingAddress>
 <ns5:ContactPointPurpose>BUSINESS</ns5:ContactPointPurpose>
 <ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
 <ns5:OriginalSystemReference xmlns:ns16="http://xmlns.oracle.com/apps/cdm/foundation/parties/
partyService/">
 <ns16:OrigSystem>CSV</ns16:OrigSystem>
 <ns16:OrigSystemReference>TestIM001</ns16:OrigSystemReference>
 <ns16:OwnerTableName>HZ_CONTACT_POINTS</ns16:OwnerTableName>
 <ns16:CreatedByModule>AMS</ns16:CreatedByModule>
 </ns5:OriginalSystemReference>
 </ns2:InstantMessaging>
 <ns2:Phone xmlns:ns49="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/">
 <ns49:OwnerTableName>HZ_PARTIES</ns49:OwnerTableName>
 <ns49:CreatedByModule>AMS</ns49:CreatedByModule>
 <ns49:ContactPointPurpose>BUSINESS</ns49:ContactPointPurpose>
 <ns49:PhoneAreaCode>650</ns49:PhoneAreaCode>
 <ns49:PhoneCountryCode>1</ns49:PhoneCountryCode>
 <ns49:PhoneNumber>6338437</ns49:PhoneNumber>
 <ns49:PhoneExtension>8437</ns49:PhoneExtension>
 <ns49:OriginalSystemReference xmlns:ns50="http://xmlns.oracle.com/apps/cdm/foundation/parties/
partyService/">
 <ns50:OrigSystem>CSV</ns50:OrigSystem>
 <ns50:OrigSystemReference>TestPhone001</ns50:OrigSystemReference>
 <ns50:OwnerTableName>HZ_CONTACT_POINTS</ns50:OwnerTableName>
 <ns50:CreatedByModule>AMS</ns50:CreatedByModule>
 </ns49:OriginalSystemReference>
 </ns2:Phone>
 </ns1:organizationParty>
 </ns1:createOrganization>
</soap:Body>
</soap:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule//
OrganizationService/createOrganizationResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:93009ac9-3278-4131-ada8-a3e40a637182</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:createOrganizationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/">
```

```
 <ns3:result xsi:type="ns2:OrganizationPartyResult" xmlns:ns2="http://xmlns.oracle.com/apps/
cdm/foundation/parties/organizationService/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/
foundation/parties/partyService/" xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/" xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/"
 xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/" xmlns:ns5="http://xmlns.oracle.com/apps/cdm/
foundation/parties/contactPointService/" xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/
relationshipService/" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
 <ns2:Value>
 <ns2:PartyNumber>CDRM_1003763</ns2:PartyNumber>
 <ns2:PartyId>300100573316847</ns2:PartyId>
 <ns2:PartyType>ORGANIZATION</ns2:PartyType>
 <ns2:PartyName>Indian AutoComp</ns2:PartyName>
 <ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
 <ns2:ValidatedFlag xsi:nil="true"/>
 <ns2:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns2:LastUpdateLogin>
 <ns2:CreationDate>2021-09-15T04:27:44.0Z</ns2:CreationDate>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:LastUpdateDate>2021-09-15T04:28:10.287Z</ns2:LastUpdateDate>
 <ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
 <ns2:OrigSystemReference>300100573316847</ns2:OrigSystemReference>
 <ns2:HQBranchIndicator xsi:nil="true"/>
 <ns2:DUNSNumberC xsi:nil="true"/>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:JgzzFiscalCode xsi:nil="true"/>
 <ns2:Address1 xsi:nil="true"/>
 <ns2:Country xsi:nil="true"/>
 <ns2:Address3 xsi:nil="true"/>
 <ns2:GroupType xsi:nil="true"/>
 <ns2:Address2 xsi:nil="true"/>
 <ns2:Address4 xsi:nil="true"/>
 <ns2:Status>A</ns2:Status>
 <ns2:City xsi:nil="true"/>
 <ns2:PostalCode xsi:nil="true"/>
 <ns2:County xsi:nil="true"/>
 <ns2:YearEstablished xsi:nil="true"/>
 <ns2:Province xsi:nil="true"/>
 <ns2:State xsi:nil="true"/>
 <ns2:URL xsi:nil="true"/>
 <ns2:AnalysisFy xsi:nil="true"/>
 <ns2:SICCodeType xsi:nil="true"/>
 <ns2:EmailAddress>test@oracle.com</ns2:EmailAddress>
 <ns2:FiscalYearendMonth xsi:nil="true"/>
 <ns2:EmployeesTotal xsi:nil="true"/>
 <ns2:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
 <ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
 <ns2:GSAIndicatorFlag xsi:nil="true"/>
 <ns2:CategoryCode xsi:nil="true"/>
 <ns2:LanguageName xsi:nil="true"/>
 <ns2:MissionStatement xsi:nil="true"/>
 <ns2:ThirdPartyFlag xsi:nil="true"/>
 <ns2:HomeCountry xsi:nil="true"/>
 <ns2:CreatedByModule>AMS</ns2:CreatedByModule>
 <ns2:ObjectVersionNumber>2</ns2:ObjectVersionNumber>
 <ns2:CertificationLevel xsi:nil="true"/>
 <ns2:CertReasonCode xsi:nil="true"/>
 <ns2:PrimaryPhonePurpose>BUSINESS</ns2:PrimaryPhonePurpose>
 <ns2:PrimaryPhoneContactPointId>300100573316858</ns2:PrimaryPhoneContactPointId>
 <ns2:PrimaryPhoneLineType>GEN</ns2:PrimaryPhoneLineType>
 <ns2:PrimaryPhoneCountryCode>1</ns2:PrimaryPhoneCountryCode>
 <ns2:PrimaryPhoneAreaCode>650</ns2:PrimaryPhoneAreaCode>
 <ns2:PrimaryPhoneNumber>6338437</ns2:PrimaryPhoneNumber>
 <ns2:PreferredContactMethod xsi:nil="true"/>
 <ns2:PrimaryPhoneExtension>8437</ns2:PrimaryPhoneExtension>
 <ns2:IdenAddrLocationId xsi:nil="true"/>
 <ns2:PrimaryURLContactPointId xsi:nil="true"/>
 <ns2:PrimaryEmailContactPointId>300100573316848</ns2:PrimaryEmailContactPointId>
```

```
 <ns2:IdenAddrPartySiteId xsi:nil="true"/>
 <ns2:PreferredName xsi:nil="true"/>
 <ns2:PersonSecondLastName xsi:nil="true"/>
 <ns2:PreferredNameId xsi:nil="true"/>
 <ns2:TradingPartnerIdentifier xsi:nil="true"/>
 <ns2:PreferredContactPersonId xsi:nil="true"/>
 <ns2:PreferredFunctionalCurrency xsi:nil="true"/>
 <ns2:InternalFlag>false</ns2:InternalFlag>
 <ns2:Comments xsi:nil="true"/>
 <ns2:CeoName>Alan</ns2:CeoName>
 <ns2:PrincipalName xsi:nil="true"/>
 <ns2:OrganizationSize xsi:nil="true"/>
 <ns2:PartyUniqueName>Indian AutoComp</ns2:PartyUniqueName>
 <ns2:SourceSystem xsi:nil="true"/>
 <ns2:SourceSystemReferenceValue xsi:nil="true"/>
 <ns2:SourceSystemUpdateDate xsi:nil="true"/>
 <ns2:Email xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/">
 <ns5:ContactPointId>300100573316848</ns5:ContactPointId>
 <ns5:ContactPointType>EMAIL</ns5:ContactPointType>
 <ns5:Status>A</ns5:Status>
 <ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
 <ns5:OwnerTableId>300100573316847</ns5:OwnerTableId>
 <ns5:PrimaryFlag>true</ns5:PrimaryFlag>
 <ns5:OrigSystemReference>300100573316848</ns5:OrigSystemReference>
 <ns5:LastUpdateDate>2021-09-15T04:28:05.572Z</ns5:LastUpdateDate>
 <ns5:LastUpdatedBy>SALES_ADMIN</ns5:LastUpdatedBy>
 <ns5:CreationDate>2021-09-15T04:27:44.058Z</ns5:CreationDate>
 <ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
 <ns5:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns5:LastUpdateLogin>
 <ns5:RequestId xsi:nil="true"/>
 <ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
 <ns5:CreatedByModule>AMS</ns5:CreatedByModule>
 <ns5:ContactPointPurpose xsi:nil="true"/>
 <ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
 <ns5:StartDate>2021-09-15</ns5:StartDate>
 <ns5:EndDate>4712-12-31</ns5:EndDate>
 <ns5:RelationshipId xsi:nil="true"/>
 <ns5:PartyUsageCode xsi:nil="true"/>
 <ns5:OrigSystem xsi:nil="true"/>
 <ns5:EmailFormat>MAILHTML</ns5:EmailFormat>
 <ns5:EmailAddress>test@oracle.com</ns5:EmailAddress>
 <ns5:PartyName>Indian AutoComp</ns5:PartyName>
 <ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
 <ns5:OriginalSystemReference xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns1:OrigSystemReferenceId>300100573316849</ns1:OrigSystemReferenceId>
 <ns1:OrigSystem>CSV</ns1:OrigSystem>
 <ns1:OrigSystemReference>TestEmail001</ns1:OrigSystemReference>
 <ns1:OwnerTableName>HZ_CONTACT_POINTS</ns1:OwnerTableName>
 <ns1:OwnerTableId>300100573316848</ns1:OwnerTableId>
 <ns1:Status>A</ns1:Status>
 <ns1:ReasonCode xsi:nil="true"/>
 <ns1:OldOrigSystemReference xsi:nil="true"/>
 <ns1:StartDateActive>2021-09-15</ns1:StartDateActive>
 <ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:CreationDate>2021-09-15T04:27:44.535Z</ns1:CreationDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:LastUpdateDate>2021-09-15T04:28:05.286Z</ns1:LastUpdateDate>
 <ns1:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns1:LastUpdateLogin>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedByModule>AMS</ns1:CreatedByModule>
 <ns1:PartyId xsi:nil="true"/>
 <ns1:RequestId xsi:nil="true"/>
 </ns5:OriginalSystemReference>
 </ns2:Email>
```

```
 <ns2:InstantMessaging xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
contactPoint/">
 <ns5:ContactPointId>300100573316855</ns5:ContactPointId>
 <ns5:ContactPointType>INSTANT_MESSAGING</ns5:ContactPointType>
 <ns5:Status>A</ns5:Status>
 <ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
 <ns5:OwnerTableId>300100573316847</ns5:OwnerTableId>
 <ns5:PrimaryFlag>true</ns5:PrimaryFlag>
 <ns5:OrigSystemReference>300100573316855</ns5:OrigSystemReference>
 <ns5:LastUpdateDate>2021-09-15T04:28:06.291Z</ns5:LastUpdateDate>
 <ns5:LastUpdatedBy>SALES_ADMIN</ns5:LastUpdatedBy>
 <ns5:CreationDate>2021-09-15T04:27:49.392Z</ns5:CreationDate>
 <ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
 <ns5:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns5:LastUpdateLogin>
 <ns5:RequestId xsi:nil="true"/>
 <ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
 <ns5:CreatedByModule>AMS</ns5:CreatedByModule>
 <ns5:ContactPointPurpose>BUSINESS</ns5:ContactPointPurpose>
 <ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
 <ns5:StartDate>2021-09-15</ns5:StartDate>
 <ns5:EndDate>4712-12-31</ns5:EndDate>
 <ns5:RelationshipId xsi:nil="true"/>
 <ns5:PartyUsageCode xsi:nil="true"/>
 <ns5:OrigSystem xsi:nil="true"/>
 <ns5:InstantMessengerType>YAHOO</ns5:InstantMessengerType>
 <ns5:InstantMessagingAddress>corp@oracle.com</ns5:InstantMessagingAddress>
 <ns5:PartyName>Indian AutoComp</ns5:PartyName>
 <ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
 <ns5:OriginalSystemReference xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns1:OrigSystemReferenceId>300100573316856</ns1:OrigSystemReferenceId>
 <ns1:OrigSystem>CSV</ns1:OrigSystem>
 <ns1:OrigSystemReference>TestIM001</ns1:OrigSystemReference>
 <ns1:OwnerTableName>HZ_CONTACT_POINTS</ns1:OwnerTableName>
 <ns1:OwnerTableId>300100573316855</ns1:OwnerTableId>
 <ns1:Status>A</ns1:Status>
 <ns1:ReasonCode xsi:nil="true"/>
 <ns1:OldOrigSystemReference xsi:nil="true"/>
 <ns1:StartDateActive>2021-09-15</ns1:StartDateActive>
 <ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:CreationDate>2021-09-15T04:27:49.728Z</ns1:CreationDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:LastUpdateDate>2021-09-15T04:28:05.29Z</ns1:LastUpdateDate>
 <ns1:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns1:LastUpdateLogin>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedByModule>AMS</ns1:CreatedByModule>
 <ns1:PartyId xsi:nil="true"/>
 <ns1:RequestId xsi:nil="true"/>
 </ns5:OriginalSystemReference>
 </ns2:InstantMessaging>
 <ns2:OrganizationProfile xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
organization/">
 <ns2:OrganizationProfileId>300100573316847</ns2:OrganizationProfileId>
 <ns2:PartyId>300100573316847</ns2:PartyId>
 <ns2:OrganizationName>Indian AutoComp</ns2:OrganizationName>
 <ns2:EnquiryDUNS xsi:nil="true"/>
 <ns2:CeoName>Alan</ns2:CeoName>
 <ns2:CeoTitle xsi:nil="true"/>
 <ns2:PrincipalName xsi:nil="true"/>
 <ns2:PrincipalTitle xsi:nil="true"/>
 <ns2:LegalStatus xsi:nil="true"/>
 <ns2:ControlYr xsi:nil="true"/>
 <ns2:EmployeesTotal xsi:nil="true"/>
 <ns2:HQBranchIndicator xsi:nil="true"/>
 <ns2:BranchFlag xsi:nil="true"/>
```

```
<ns2:OobInd xsi:nil="true"/>
<ns2:LineOfBusiness xsi:nil="true"/>
<ns2:CongDistCode xsi:nil="true"/>
<ns2:ImportInd xsi:nil="true"/>
<ns2:ExportInd xsi:nil="true"/>
<ns2:LaborSurplusInd xsi:nil="true"/>
<ns2:MinorityOwnedInd xsi:nil="true"/>
<ns2:MinorityOwnedType xsi:nil="true"/>
<ns2:WomanOwnedInd xsi:nil="true"/>
<ns2:Disadv8aInd xsi:nil="true"/>
<ns2:SmallBusInd xsi:nil="true"/>
<ns2:RentOwnInd xsi:nil="true"/>
<ns2:DbRating xsi:nil="true"/>
<ns2:GSAIndicatorFlag xsi:nil="true"/>
<ns2:JgzzFiscalCode xsi:nil="true"/>
<ns2:AnalysisFy xsi:nil="true"/>
<ns2:FiscalYearendMonth xsi:nil="true"/>
<ns2:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
<ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
<ns2:YearEstablished xsi:nil="true"/>
<ns2:MissionStatement xsi:nil="true"/>
<ns2:OrganizationType xsi:nil="true"/>
<ns2:BusinessScope xsi:nil="true"/>
<ns2:CorporationClass xsi:nil="true"/>
<ns2:LocalBusIdenType xsi:nil="true"/>
<ns2:LocalBusIdentifier xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:RegistrationType xsi:nil="true"/>
<ns2:TotalEmployeesText xsi:nil="true"/>
<ns2:TotalEmployeesInd xsi:nil="true"/>
<ns2:TotalEmployeesEstimatedIndicator xsi:nil="true"/>
<ns2:TotalEmployeesMinimumIndicator xsi:nil="true"/>
<ns2:ParentSubInd xsi:nil="true"/>
<ns2:IncorpYear xsi:nil="true"/>
<ns2:LastUpdateDate>2021-09-15T04:28:09.623Z</ns2:LastUpdateDate>
<ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
<ns2:CreationDate>2021-09-15T04:27:52.652Z</ns2:CreationDate>
<ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
<ns2:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns2:LastUpdateLogin>
<ns2:RequestId xsi:nil="true"/>
<ns2:ContentSourceNumber xsi:nil="true"/>
<ns2:EffectiveStartDate>2021-09-15</ns2:EffectiveStartDate>
<ns2:EffectiveEndDate>4712-12-31</ns2:EffectiveEndDate>
<ns2:PublicPrivateOwnershipFlag xsi:nil="true"/>
<ns2:LocalActivityCodeType xsi:nil="true"/>
<ns2:LocalActivityCode xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddress xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressText xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressEstimation xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressMinimum xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:TotalPaymentAmount xsi:nil="true"/>
<ns2:DisplayedDUNSPartyIdentifier xsi:nil="true"/>
<ns2:Status>A</ns2:Status>
<ns2:DUNSNumberC xsi:nil="true"/>
<ns2:CreatedByModule>AMS</ns2:CreatedByModule>
<ns2:BankOrBranchNumber xsi:nil="true"/>
<ns2:BankCode xsi:nil="true"/>
<ns2:BranchCode xsi:nil="true"/>
<ns2:DoNotConfuseWith xsi:nil="true"/>
<ns2:HomeCountry xsi:nil="true"/>
<ns2:GrowthStrategyDescription xsi:nil="true"/>
<ns2:SeblUserKeyLoc xsi:nil="true"/>
<ns2:StockSymbol xsi:nil="true"/>
<ns2:TradingPartnerIdentifier xsi:nil="true"/>
<ns2:OrigSystem xsi:nil="true"/>
```

```
<ns2:OrigSystemReference>300100573316847</ns2:OrigSystemReference>
<ns2:EffectiveSequence>1</ns2:EffectiveSequence>
<ns2:Comments xsi:nil="true"/>
<ns2:EffectiveLatestChange>Y</ns2:EffectiveLatestChange>
<ns2:OrganizationSize xsi:nil="true"/>
<ns2:SuffixOverriddenFlag>false</ns2:SuffixOverriddenFlag>
<ns2:UniqueNameAlias>Indian AutoComp</ns2:UniqueNameAlias>
<ns2:UniqueNameSuffix xsi:nil="true"/>
<ns2:DomesticUltimateDUNSNumberC xsi:nil="true"/>
<ns2:GlobalUltimateDUNSNumberC xsi:nil="true"/>
<ns2:ParentDUNSNumberC xsi:nil="true"/>
<ns2:CorpCurrencyCode>USD</ns2:CorpCurrencyCode>
<ns2:CurcyConvRateType>Corporate</ns2:CurcyConvRateType>
<ns2:CurrencyCode>USD</ns2:CurrencyCode>
<ns2:PartyNumber>CDRM_1003763</ns2:PartyNumber>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredContactName xsi:nil="true"/>
<ns2:PreferredContactEmailAddress xsi:nil="true"/>
<ns2:PreferredContactFormattedPhoneNumber xsi:nil="true"/>
<ns2:PrimaryAddressLine1 xsi:nil="true"/>
<ns2:PrimaryAddressLine2 xsi:nil="true"/>
<ns2:PrimaryAddressLine3 xsi:nil="true"/>
<ns2:PrimaryAddressLine4 xsi:nil="true"/>
<ns2:Alias xsi:nil="true"/>
<ns2:PrimaryAddressCity xsi:nil="true"/>
<ns2:PrimaryAddressCountry xsi:nil="true"/>
<ns2:PrimaryAddressCounty xsi:nil="true"/>
<ns2:PrimaryEmailAddress>test@oracle.com</ns2:PrimaryEmailAddress>
<ns2:PrimaryFormattedPhoneNumber>+1 (650) 633-8437 x8437</ns2:PrimaryFormattedPhoneNumber>
<ns2:IdenAddrLocationId xsi:nil="true"/>
<ns2:IdenAddrPartySiteId xsi:nil="true"/>
<ns2:PrimaryLanguage xsi:nil="true"/>
<ns2:PartyUniqueName>Indian AutoComp</ns2:PartyUniqueName>
<ns2:PrimaryAddressPostalCode xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PrimaryEmailId>300100573316848</ns2:PrimaryEmailId>
<ns2:PrimaryPhoneAreaCode>650</ns2:PrimaryPhoneAreaCode>
<ns2:PrimaryPhoneId>300100573316858</ns2:PrimaryPhoneId>
<ns2:PrimaryPhoneCountryCode>1</ns2:PrimaryPhoneCountryCode>
<ns2:PrimaryPhoneExtension>8437</ns2:PrimaryPhoneExtension>
<ns2:PrimaryPhoneLineType>GEN</ns2:PrimaryPhoneLineType>
<ns2:PrimaryPhoneNumber>6338437</ns2:PrimaryPhoneNumber>
<ns2:PrimaryPhonePurpose>BUSINESS</ns2:PrimaryPhonePurpose>
<ns2:PrimaryWebId xsi:nil="true"/>
<ns2:Pronunciation xsi:nil="true"/>
<ns2:PrimaryAddressProvince xsi:nil="true"/>
<ns2:SICCode xsi:nil="true"/>
<ns2:SICCodeType xsi:nil="true"/>
<ns2:PrimaryAddressState xsi:nil="true"/>
<ns2:PrimaryURL xsi:nil="true"/>
<ns2:ValidatedFlag xsi:nil="true"/>
<ns2:ThirdPartyFlag xsi:nil="true"/>
<ns2:LastUpdateSourceSystem>UNKNOWN</ns2:LastUpdateSourceSystem>
<ns2:LastSourceUpdateDate>2021-09-15T04:28:06.0Z</ns2:LastSourceUpdateDate>
<ns2:DataCloudStatus xsi:nil="true"/>
<ns2:LastEnrichmentDate xsi:nil="true"/>
<ns2:R10_CmnCustObj_Id_R10_CmnCustObj_To_Account xsi:nil="true"/>
<ns2:Lead_Id_R10_LeadAccountRel xsi:nil="true"/>
<ns2:PartnerProfile_Id_R10_PartnerAccountRelationship xsi:nil="true"/>
<ns2:R10_AccountText_c xsi:nil="true"/>
<ns2:R10_AccountNum_c>1234</ns2:R10_AccountNum_c>
<ns2:R10_AccountDate_c xsi:nil="true"/>
```

```
<ns2:Enrollment_Id_R10_EnrollAccountRelationship xsi:nil="true"/>
<ns2:Program_Id_R10_ProgramAccountrelationship xsi:nil="true"/>
<ns2:Opportunity_Id_R10OptyAcntRel xsi:nil="true"/>
<ns2:R10_AccountCheckbox_c>false</ns2:R10_AccountCheckbox_c>
<ns2:R10_AccountFixChList_c xsi:nil="true"/>
<ns2:R10_AccountDynChList_Id_c xsi:nil="true"/>
<ns2:R10_AccountDynChList_c xsi:nil="true"/>
<ns2:R10_AccountCurrency_c xsi:nil="true"/>
<ns2:R10_AccountDateTime_c xsi:nil="true"/>
<ns2:R10_AccountPerc_c xsi:nil="true"/>
<ns2:R10_AccountTextFormula_c>This Record was Created by: SALES_ADMIN</ns2:R10_AccountTextFormula_c>
<ns2:SalesGoal_Id_R10_QMAccountRel xsi:nil="true"/>
<ns2:R10_AccountTCM_Text_c xsi:nil="true"/>
<ns2:R10_AccountTCM_Number_c xsi:nil="true"/>
<ns2:R10_AccountTCM_Date_c xsi:nil="true"/>
<ns2:R10_AccountRecordtype_c xsi:nil="true"/>
<ns2:R10_ACCText_c xsi:nil="true"/>
<ns2:R10_ACCNumber_c xsi:nil="true"/>
<ns2:R10_ACCDate_c xsi:nil="true"/>
<ns2:REL10_AccountType_Toyota_c xsi:nil="true"/>
<ns2:REL10_AnnualRevenue_c xsi:nil="true"/>
<ns2:REL10_CBofTotalFleet_c xsi:nil="true"/>
<ns2:REL10_CompaniesInterest_c xsi:nil="true"/>
<ns2:REL10_CreditLimit_c xsi:nil="true"/>
<ns2:REL10_CustomerNumber_c xsi:nil="true"/>
<ns2:REL10_CustomerSince_c xsi:nil="true"/>
<ns2:REL10_EKAAgreement_c xsi:nil="true"/>
<ns2:REL10_EKAAgreementName_Id_c xsi:nil="true"/>
<ns2:REL10_EKAAgreementName_c xsi:nil="true"/>
<ns2:RE10_EKAExistingSince_c xsi:nil="true"/>
<ns2:REL10_EKAInformation_c xsi:nil="true"/>
<ns2:REL10_EKAIntranet_c xsi:nil="true"/>
<ns2:REL10_EKAManager_c xsi:nil="true"/>
<ns2:REL10_EKAProspectSince_c xsi:nil="true"/>
<ns2:REL10_EKASalesSupport_c xsi:nil="true"/>
<ns2:REL10_EKASuppliers_c xsi:nil="true"/>
<ns2:REL10_ExpiryDateForCurrentAgre_c xsi:nil="true"/>
<ns2:REL10_FiscalYearStartMonth_c xsi:nil="true"/>
<ns2:REL10_FleetSize_c xsi:nil="true"/>
<ns2:REL10_InternationalAccountNumb_c xsi:nil="true"/>
<ns2:REL10_LocalInfo1_c xsi:nil="true"/>
<ns2:REL10_LocalInfo2_c xsi:nil="true"/>
<ns2:REL10_LocalInfo3_c xsi:nil="true"/>
<ns2:Reference_Id_R10_REFAccountRel xsi:nil="true"/>
<ns2:R10_AccountText_M_c xsi:nil="true"/>
<ns2:R10_AccountFixChList_M_c xsi:nil="true"/>
<ns2:R10_Account_DCL_SalesCO_Id_c xsi:nil="true"/>
<ns2:R10_Account_DCL_SalesCO_c xsi:nil="true"/>
<ns2:R10_Account_DCL_Contact_Id_c xsi:nil="true"/>
<ns2:R10_Account_DCL_Contact_c xsi:nil="true"/>
<ns2:AccountIdCF_c xsi:nil="true"/>
<ns2:CustomerSince_c xsi:nil="true"/>
<ns2:CompaniesInterest_c>Used</ns2:CompaniesInterest_c>
<ns2:EKAAgreementCF_Id_c xsi:nil="true"/>
<ns2:EKAAgreementCF_c xsi:nil="true"/>
<ns2:InternationalAccountNumber_Id_c xsi:nil="true"/>
<ns2:InternationalAccountNumber_c xsi:nil="true"/>
<ns2:AnnualBusinessPlanatTSight_c xsi:nil="true"/>
<ns2:CBoftotalfleet_c xsi:nil="true"/>
<ns2:WH_c xsi:nil="true"/>
<ns2:NewBusiness_c>false</ns2:NewBusiness_c>
<ns2:STR_c>false</ns2:STR_c>
<ns2:Rel10_SP_TXT_c xsi:nil="true"/>
<ns2:Deal_Id_R10DealAccountrelationship xsi:nil="true"/>
<ns2:TestPercentage_c xsi:nil="true"/>
<ns2:BudgetFundRequest_Id_R11MDFRequestToAccount1M xsi:nil="true"/>
```

```
<ns2:Claim_Id_R11MDFClaimAccount_Rel xsi:nil="true"/>
<ns2:R11_AccountBP_Text_c xsi:nil="true"/>
<ns2:BusinessPlan_Id_R11_BP_Account_rel xsi:nil="true"/>
<ns2:Budget_Id_R11MDFBudgetToAccount xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_TEXT_c xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_NUM_c xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_FCL_c xsi:nil="true"/>
<ns2:R11_Acct_DATE_c xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_CHKBOX_c>false</ns2:R11_RNOW_ACCT_CHKBOX_c>
<ns2:R11_RNOW_ACCT_DATETIME_c xsi:nil="true"/>
<ns2:Deal_Id_REL11_RELATION_ACCOUNT xsi:nil="true"/>
<ns2:SalesObjective_Id_Upg_BO_Acc_1M xsi:nil="true"/>
<ns2:Atext_c xsi:nil="true"/>
<ns2:Anum_c xsi:nil="true"/>
<ns2:Adate_c xsi:nil="true"/>
<ns2:Acheckbox_c>false</ns2:Acheckbox_c>
<ns2:Apercentage_c xsi:nil="true"/>
<ns2:Adatetime_c xsi:nil="true"/>
<ns2:Acuurency_c xsi:nil="true"/>
<ns2:Afcl_c xsi:nil="true"/>
<ns2:Adcl_Id_c xsi:nil="true"/>
<ns2:Adcl_c xsi:nil="true"/>
<ns2:Product_Id_Product2Account xsi:nil="true"/>
<ns2:PriceBookHeader_Id_PB2Account xsi:nil="true"/>
<ns2:SalesPromotion_Id_Promotion2Account xsi:nil="true"/>
<ns2:R12_GS_0723_CustomObject2_Id_R12_GS_CustomObject2_relationship xsi:nil="true"/>
<ns2:RNOW_TEXT_0724_c xsi:nil="true"/>
<ns2:RNOW_NUM_0724_c xsi:nil="true"/>
<ns2:RNOW_ACCT_FCL_0724_c xsi:nil="true"/>
<ns2:RNOW_ACCT_CHKBOX_0724_c>false</ns2:RNOW_ACCT_CHKBOX_0724_c>
<ns2:RNOW_ACCT_DATA_0724_c xsi:nil="true"/>
<ns2:RNOW_ACCT_DATETIME_0724_c xsi:nil="true"/>
<ns2:SalesTerritory_Id_CDRMSalesTerritoryCustObjAccRel xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Fcl_c xsi:nil="true"/>
<ns2:R12PB8_Zem_AccountToContact_DC_Id_c xsi:nil="true"/>
<ns2:R12PB8_Zem_AccountToContact_DC_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Text_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Number_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Date_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_DateTime_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_CheckBox_c>false</ns2:R12PB8_Zem_Account_CheckBox_c>
<ns2:R12PB8_Zem_Account_Percentage_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_ParentFcl_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_ChildFcl_c xsi:nil="true"/>
<ns2:SalesCountry_c xsi:nil="true"/>
<ns2:SalesRegion_c xsi:nil="true"/>
<ns2:SalesCluster_c xsi:nil="true"/>
<ns2:LogisticsRail_c>Logistics</ns2:LogisticsRail_c>
<ns2:ExternalId_c xsi:nil="true"/>
<ns2:Organization_Id_Account_Account xsi:nil="true"/>
<ns2:Type_c>ZCA_Prospect</ns2:Type_c>
<ns2:Category_c xsi:nil="true"/>
<ns2:ParentExternalId_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_mcl_c xsi:nil="true"/>
<ns2:ResDCL_Id_c xsi:nil="true"/>
<ns2:ResDCL_c xsi:nil="true"/>
<ns2:R1802BIObj_Id_R13_1802_CO_Acccount xsi:nil="true"/>
<ns2:R1802_Text_c xsi:nil="true"/>
<ns2:R1802_Number_c xsi:nil="true"/>
<ns2:R13_COPYMAP_TEXT_c xsi:nil="true"/>
<ns2:R13_COPYMAP_NUMBER_c xsi:nil="true"/>
<ns2:R1802CustObj_Id_R1805COtoAccount xsi:nil="true"/>
<ns2:O365_1810_DCL_Id_c xsi:nil="true"/>
<ns2:O365_1810_DCL_c xsi:nil="true"/>
<ns2:ACCPICKERTEXT_c xsi:nil="true"/>
<ns2:Text_Elastic_c xsi:nil="true"/>
```

```
 <ns2:Number_Elastic_c xsi:nil="true"/>
 <ns2:Date_Elastic_c xsi:nil="true"/>
 <ns2:PARENT1_c xsi:nil="true"/>
 <ns2:PARENT2_c xsi:nil="true"/>
 <ns2:PARENT3_c xsi:nil="true"/>
 <ns2:SON1_c xsi:nil="true"/>
 <ns2:SON2_c xsi:nil="true"/>
 <ns2:SON3_c xsi:nil="true"/>
 <ns2:SON4_c xsi:nil="true"/>
 <ns2:SON5_c xsi:nil="true"/>
 <ns2:SON6_c xsi:nil="true"/>
 <ns2:CHILD1_c xsi:nil="true"/>
 <ns2:CHILD2_c xsi:nil="true"/>
 <ns2:CHILD3_c xsi:nil="true"/>
 <ns2:CHILD4_c xsi:nil="true"/>
 <ns2:Lead_Id_R13_LeadsAccount xsi:nil="true"/>
 <ns2:O365_1904_AccntSimpleTxt_c>This is the default text set in the field</
ns2:O365_1904_AccntSimpleTxt_c>
 <ns2:O365_1904_AccntMultiText_c>Default text in text field of type Multiline text area.Sample text in
 text field of type</ns2:O365_1904_AccntMultiText_c>
 <ns2:O365_1904_AccntNum_c>987684</ns2:O365_1904_AccntNum_c>
 <ns2:O365_1904_AccntDate_c>2019-02-20</ns2:O365_1904_AccntDate_c>
 <ns2:O365_1904_AccntLngTxt_c>SXQgaXMgYSBsb25nIGVzdGFibGlzaGVkIGZhY3QgdGhhdCBhIHJlYWRlciB3aWxsIGJlIGRpc3Ry
YWN0ZWQgYnkgdGhlIHJlYWRhYmxlIGNvbnRlbnQgb2YgYSBwYWdlIHdoZW4gbG9va2luZyBhdCBp
dHMgbGF5b3V0LiBUaGUgcG9pbnQgb2YgdXNpbmcgTG9yZW0gSXBzdW0gaXMgdGhhdCBpdCBoYXMg
YSBtb3JlLW9yLWxlc3Mgbm9ybWFsIGRpc3RyaWJ1dGlvbiBvZiBsZXR0ZXJzLCBhcyBvcHBvc2Vk
IHRvIHVzaW5nICdDb250ZW50IGhlcmUsIGNvbnRlbnQgaGVyZScsIG1ha2luZyBpdCBsb29rIGxp
a2UgcmVhZGFibGUgRW5nbGlzaC4gTWFueSBkZXNrdG9wIHB1Ymxpc2hpbmcgcGFja2FnZXMgYW5k
IHdlYiBwYWdl</ns2:O365_1904_AccntLngTxt_c>
 <ns2:O365_1904_AccntChkBox_c>true</ns2:O365_1904_AccntChkBox_c>
 <ns2:O365_1904_AccntPerc_c>0.45</ns2:O365_1904_AccntPerc_c>
 <ns2:O365_1904_AccntDtTime_c>2019-02-27T02:45:00.0Z</ns2:O365_1904_AccntDtTime_c>
 <ns2:O365_1904_AccntCur_c currencyCode="USD">9878355</ns2:O365_1904_AccntCur_c>
 <ns2:O365_1904_AccntFCL_c>L</ns2:O365_1904_AccntFCL_c>
 <ns2:O365_1904_AccntMCL_c>CEO,CIO,VP</ns2:O365_1904_AccntMCL_c>
 <ns2:O365_1904_AccntChldFCL_c xsi:nil="true"/>
 <ns2:O365_1904_AccntChldMCL_c xsi:nil="true"/>
 <ns2:O365_1904_AccntDCL_Id_c xsi:nil="true"/>
 <ns2:O365_1904_AccntDCL_c xsi:nil="true"/>
 <ns2:R1810SrcCustObj_Id_OneMSalesCustAccount xsi:nil="true"/>
 <ns2:R1810SrcCustObj_Id_SalesCustAccount_1M xsi:nil="true"/>
 <ns2:AUX_DCLServiceRequest1_Id_c xsi:nil="true"/>
 <ns2:AUX_DCLServiceRequest1_c xsi:nil="true"/>
 <ns2:R1904CustomObjectDCL_Id_c xsi:nil="true"/>
 <ns2:R1904CustomObjectDCL_c xsi:nil="true"/>
 <ns2:R1805CustomObj2_Id_CustomtoAccount xsi:nil="true"/>
 <ns2:M2004_CXM_Text_c xsi:nil="true"/>
 <ns2:M2004_CXM_MobileNum_c xsi:nil="true"/>
 <ns2:M2004_CXM_Date_c xsi:nil="true"/>
 <ns2:M2004_CXM_CB_c>false</ns2:M2004_CXM_CB_c>
 <ns2:M2004_CXM_DateTime_c xsi:nil="true"/>
 <ns2:M2004_CXM_Perc_c xsi:nil="true"/>
 <ns2:M2004_CXM_Currency_c xsi:nil="true"/>
 <ns2:M2004_CXM_Fcl_c xsi:nil="true"/>
 <ns2:M2004_CXM_ParentFcl_c xsi:nil="true"/>
 <ns2:M2004_CXM_ChildFcl_c xsi:nil="true"/>
 <ns2:M2004_CXM_DCLContact_Id_c xsi:nil="true"/>
 <ns2:M2004_CXM_DCLContact_c xsi:nil="true"/>
 <ns2:M2004_CXM_DCLOppty_Id_c xsi:nil="true"/>
 <ns2:M2004_CXM_DCLOppty_c xsi:nil="true"/>
 <ns2:Opportunity_Id_M2004_CXM_1ToMOpptyToAccount xsi:nil="true"/>
 <ns2:ConditionallyMandatory_c xsi:nil="true"/>
 <ns2:O365_2004_ACCTEXT_c xsi:nil="true"/>
 <ns2:O365_2004_stdLkup_c xsi:nil="true"/>
 <ns2:O365_2004_CustomLkup_c xsi:nil="true"/>
 <ns2:O365_2004_StdLkUPm1_c xsi:nil="true"/>
```

```
<ns2:M2004_CXM_DCLCusOBJ1_Id_c xsi:nil="true"/>
<ns2:M2004_CXM_DCLCusOBJ1_c xsi:nil="true"/>
<ns2:M2004_CXM_MCL_c xsi:nil="true"/>
<ns2:Account_FCL_MultiSelect_c xsi:nil="true"/>
<ns2:Account_FCL_Parent_c xsi:nil="true"/>
<ns2:Account_FCL_Child_c xsi:nil="true"/>
<ns2:Account_DCL_Driidown_Id_c xsi:nil="true"/>
<ns2:Account_DCL_Driidown_c xsi:nil="true"/>
<ns2:TextAdvExpr_c xsi:nil="true"/>
<ns2:M2101_CXM_Link_c>https://www.oracle.com</ns2:M2101_CXM_Link_c>
<ns2:AAACustomFCL_c xsi:nil="true"/>
<ns2:AAACustomCheckbox_c>false</ns2:AAACustomCheckbox_c>
<ns2:CDA_Text_c xsi:nil="true"/>
<ns2:CDA_Num_c xsi:nil="true"/>
<ns2:CDA_Dat_c xsi:nil="true"/>
<ns2:CDA_CB_c>false</ns2:CDA_CB_c>
<ns2:CDA_Per_c xsi:nil="true"/>
<ns2:CDA_DatTime_c xsi:nil="true"/>
<ns2:CDA_Currency_c xsi:nil="true"/>
<ns2:CDA_FCL_c xsi:nil="true"/>
<ns2:CDA_DCL_Id_c xsi:nil="true"/>
<ns2:CDA_DCL_c xsi:nil="true"/>
<ns2:CDA_CHFCL_c xsi:nil="true"/>
<ns2:CDA_PFCL_c xsi:nil="true"/>
<ns2:CDA_MULFCL_c xsi:nil="true"/>
</ns2:OrganizationProfile>
<ns2:PartyUsageAssignment>
<ns1:PartyUsgAssignmentId>300100573316857</ns1:PartyUsgAssignmentId>
<ns1:PartyId>300100573316847</ns1:PartyId>
<ns1:PartyUsageCode>CUSTOMER</ns1:PartyUsageCode>
<ns1:EffectiveStartDate>2021-09-15</ns1:EffectiveStartDate>
<ns1:EffectiveEndDate>4712-12-31</ns1:EffectiveEndDate>
<ns1:StatusFlag>true</ns1:StatusFlag>
<ns1:Comments xsi:nil="true"/>
<ns1:OwnerTableName xsi:nil="true"/>
<ns1:OwnerTableId xsi:nil="true"/>
<ns1:CreatedByModule>AMS</ns1:CreatedByModule>
<ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:CreationDate>2021-09-15T04:28:01.84Z</ns1:CreationDate>
<ns1:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns1:LastUpdateLogin>
<ns1:LastUpdateDate>2021-09-15T04:28:05.303Z</ns1:LastUpdateDate>
<ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
<ns1:RequestId xsi:nil="true"/>
</ns2:PartyUsageAssignment>
<ns2:Phone xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/">
<ns5:ContactPointId>300100573316858</ns5:ContactPointId>
<ns5:ContactPointType>PHONE</ns5:ContactPointType>
<ns5:Status>A</ns5:Status>
<ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
<ns5:OwnerTableId>300100573316847</ns5:OwnerTableId>
<ns5:PrimaryFlag>true</ns5:PrimaryFlag>
<ns5:OrigSystemReference>300100573316858</ns5:OrigSystemReference>
<ns5:LastUpdateDate>2021-09-15T04:28:10.013Z</ns5:LastUpdateDate>
<ns5:LastUpdatedBy>SALES_ADMIN</ns5:LastUpdatedBy>
<ns5:CreationDate>2021-09-15T04:28:02.552Z</ns5:CreationDate>
<ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
<ns5:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns5:LastUpdateLogin>
<ns5:RequestId xsi:nil="true"/>
<ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
<ns5:CreatedByModule>AMS</ns5:CreatedByModule>
<ns5:ContactPointPurpose>BUSINESS</ns5:ContactPointPurpose>
<ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
<ns5:StartDate>2021-09-15</ns5:StartDate>
<ns5:EndDate>4712-12-31</ns5:EndDate>
<ns5:RelationshipId xsi:nil="true"/>
```

```
 <ns5:PartyUsageCode xsi:nil="true"/>
 <ns5:OrigSystem xsi:nil="true"/>
 <ns5:PhoneCallingCalendar xsi:nil="true"/>
 <ns5:LastContactDtTime xsi:nil="true"/>
 <ns5:PhoneAreaCode>650</ns5:PhoneAreaCode>
 <ns5:PhoneCountryCode>1</ns5:PhoneCountryCode>
 <ns5:PhoneNumber>6338437</ns5:PhoneNumber>
 <ns5:PhoneExtension>8437</ns5:PhoneExtension>
 <ns5:PhoneLineType>GEN</ns5:PhoneLineType>
 <ns5:RawPhoneNumber>1-650-6338437</ns5:RawPhoneNumber>
 <ns5:PagerTypeCode xsi:nil="true"/>
 <ns5:FormattedPhoneNumber>+1 (650) 633-8437 x8437</ns5:FormattedPhoneNumber>
 <ns5:TransposedPhoneNumber>73483360561</ns5:TransposedPhoneNumber>
 <ns5:PartyName>Indian AutoComp</ns5:PartyName>
 <ns5:TimezoneCode xsi:nil="true"/>
 <ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
 <ns5:OriginalSystemReference xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns1:OrigSystemReferenceId>300100573316859</ns1:OrigSystemReferenceId>
 <ns1:OrigSystem>CSV</ns1:OrigSystem>
 <ns1:OrigSystemReference>TestPhone001</ns1:OrigSystemReference>
 <ns1:OwnerTableName>HZ_CONTACT_POINTS</ns1:OwnerTableName>
 <ns1:OwnerTableId>300100573316858</ns1:OwnerTableId>
 <ns1:Status>A</ns1:Status>
 <ns1:ReasonCode xsi:nil="true"/>
 <ns1:OldOrigSystemReference xsi:nil="true"/>
 <ns1:StartDateActive>2021-09-15</ns1:StartDateActive>
 <ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:CreationDate>2021-09-15T04:28:02.602Z</ns1:CreationDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:LastUpdateDate>2021-09-15T04:28:05.306Z</ns1:LastUpdateDate>
 <ns1:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns1:LastUpdateLogin>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedByModule>AMS</ns1:CreatedByModule>
 <ns1:PartyId xsi:nil="true"/>
 <ns1:RequestId xsi:nil="true"/>
 </ns5:OriginalSystemReference>
 </ns2:Phone>
 </ns2:Value>
 </ns3:result>
 </ns0:createOrganizationResponse>
 </env:Body>
</env:Envelope>
```

2. Find the SalesAccountId using the PartyId of the organization in findSalesAccountOperation of SalesParty web service

   Operation: **findSalesAccount**

   Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/types/" xmlns:typ1="http://
xmlns.oracle.com/adf/svc/types/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:findSalesAccount>
 <typ:findCriteria>
 <typ1:fetchStart>0</typ1:fetchStart>
 <typ1:fetchSize>-1</typ1:fetchSize>
 <!--Optional:-->
 <typ1:filter>
 <!--Optional:-->
 <typ1:conjunction>And</typ1:conjunction>
```

```
 <!--1 to 500 repetitions:-->
 <typ1:group>
 <!--Optional:-->
 <typ1:conjunction>And</typ1:conjunction>
 <typ1:upperCaseCompare>false</typ1:upperCaseCompare>
 <!--1 to 500 repetitions:-->
 <typ1:item>
 <!--Optional:-->
 <typ1:conjunction>And</typ1:conjunction>
 <typ1:upperCaseCompare>false</typ1:upperCaseCompare>
 <typ1:attribute>PartyId</typ1:attribute>
 <typ1:operator>=</typ1:operator>
 <!--You have a CHOICE of the next 2 items at this level-->
 <!--0 to 500 repetitions:-->
 <typ1:value>300100573316847</typ1:value>
 </typ1:item>
 </typ1:group>
 <!--0 to 500 repetitions:-->
 </typ1:filter>
 <!--Optional:-->
 <typ1:excludeAttribute>false</typ1:excludeAttribute>
 </typ:findCriteria>
 <typ:findControl>
 <typ1:retrieveAllTranslations>true</typ1:retrieveAllTranslations>
 </typ:findControl>
 </typ:findSalesAccount>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/SalesPartyService/
findSalesAccountResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:2f6b0d2e-c214-4f59-9cba-b7345c22cf50</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:findSalesAccountResponse xmlns:ns0="http://xmlns.oracle.com/apps/crmCommon/salesParties/
salesPartiesService/types/"/>
 </env:Body>
</env:Envelope>
```

3. Using the SalesAccountId, update the AccountDirectorId in updateSalesAccount operation of SalesParty web service.

   Operation: **updateSalesAccount**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/types/" xmlns:sal="http://
xmlns.oracle.com/apps/crmCommon/salesParties/salesPartiesService/" xmlns:org="http://xmlns.oracle.com/
apps/cdm/foundation/parties/organizationService/" xmlns:org1="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/organization/" xmlns:per="http://xmlns.oracle.com/apps/cdm/foundation/
parties/personService/" xmlns:per1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/"
 xmlns:par="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:sour="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/" xmlns:con="http://xmlns.oracle.com/
apps/cdm/foundation/parties/contactPointService/" xmlns:con1="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/contactPoint/" xmlns:par1="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/partySite/" xmlns:rel="http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/"
 xmlns:org2="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/orgContact/" xmlns:rel1="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/relationship/" xmlns:gro="http://xmlns.oracle.com/
```

```
apps/cdm/foundation/parties/groupService/" xmlns:ass="http://xmlns.oracle.com/apps/crmCommon/
assetImport/publicModel/assetImportService/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:updateSalesAccount>
 <typ:salesAccount>
 <!--Optional:-->
 <sal:AccountDirectorId>300000021572353</sal:AccountDirectorId>
 <sal:PartyId>300000024917098</sal:PartyId>
 <sal:SalesAccountId>300000024917102</sal:SalesAccountId>
 </typ:salesAccount>
 </typ:updateSalesAccount>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule//
OrganizationService/createOrganizationResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:93009ac9-3278-4131-ada8-a3e40a637182</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:createOrganizationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/">
 <ns3:result xsi:type="ns2:OrganizationPartyResult" xmlns:ns2="http://xmlns.oracle.com/apps/
cdm/foundation/parties/organizationService/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/
foundation/parties/partyService/" xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/" xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/"
 xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/" xmlns:ns5="http://xmlns.oracle.com/apps/cdm/
foundation/parties/contactPointService/" xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/
relationshipService/" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
 <ns2:Value>
 <ns2:PartyNumber>CDRM_1003763</ns2:PartyNumber>
 <ns2:PartyId>300100573316847</ns2:PartyId>
 <ns2:PartyType>ORGANIZATION</ns2:PartyType>
 <ns2:PartyName>Indian AutoComp</ns2:PartyName>
 <ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
 <ns2:ValidatedFlag xsi:nil="true"/>
 <ns2:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns2:LastUpdateLogin>
 <ns2:CreationDate>2021-09-15T04:27:44.0Z</ns2:CreationDate>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:LastUpdateDate>2021-09-15T04:28:10.287Z</ns2:LastUpdateDate>
 <ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
 <ns2:OrigSystemReference>300100573316847</ns2:OrigSystemReference>
 <ns2:HQBranchIndicator xsi:nil="true"/>
 <ns2:DUNSNumberC xsi:nil="true"/>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:JgzzFiscalCode xsi:nil="true"/>
 <ns2:Address1 xsi:nil="true"/>
 <ns2:Country xsi:nil="true"/>
 <ns2:Address3 xsi:nil="true"/>
 <ns2:GroupType xsi:nil="true"/>
 <ns2:Address2 xsi:nil="true"/>
 <ns2:Address4 xsi:nil="true"/>
 <ns2:Status>A</ns2:Status>
 <ns2:City xsi:nil="true"/>
 <ns2:PostalCode xsi:nil="true"/>
 <ns2:County xsi:nil="true"/>
 <ns2:YearEstablished xsi:nil="true"/>
 <ns2:Province xsi:nil="true"/>
 <ns2:State xsi:nil="true"/>
```

```
<ns2:URL xsi:nil="true"/>
<ns2:AnalysisFy xsi:nil="true"/>
<ns2:SICCodeType xsi:nil="true"/>
<ns2:EmailAddress>test@oracle.com</ns2:EmailAddress>
<ns2:FiscalYearendMonth xsi:nil="true"/>
<ns2:EmployeesTotal xsi:nil="true"/>
<ns2:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
<ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
<ns2:GSAIndicatorFlag xsi:nil="true"/>
<ns2:CategoryCode xsi:nil="true"/>
<ns2:LanguageName xsi:nil="true"/>
<ns2:MissionStatement xsi:nil="true"/>
<ns2:ThirdPartyFlag xsi:nil="true"/>
<ns2:HomeCountry xsi:nil="true"/>
<ns2:CreatedByModule>AMS</ns2:CreatedByModule>
<ns2:ObjectVersionNumber>2</ns2:ObjectVersionNumber>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:PrimaryPhonePurpose>BUSINESS</ns2:PrimaryPhonePurpose>
<ns2:PrimaryPhoneContactPointId>300100573316858</ns2:PrimaryPhoneContactPointId>
<ns2:PrimaryPhoneLineType>GEN</ns2:PrimaryPhoneLineType>
<ns2:PrimaryPhoneCountryCode>1</ns2:PrimaryPhoneCountryCode>
<ns2:PrimaryPhoneAreaCode>650</ns2:PrimaryPhoneAreaCode>
<ns2:PrimaryPhoneNumber>6338437</ns2:PrimaryPhoneNumber>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PrimaryPhoneExtension>8437</ns2:PrimaryPhoneExtension>
<ns2:IdenAddrLocationId xsi:nil="true"/>
<ns2:PrimaryURLContactPointId xsi:nil="true"/>
<ns2:PrimaryEmailContactPointId>300100573316848</ns2:PrimaryEmailContactPointId>
<ns2:IdenAddrPartySiteId xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PersonSecondLastName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:TradingPartnerIdentifier xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:Comments xsi:nil="true"/>
<ns2:CeoName>Alan</ns2:CeoName>
<ns2:PrincipalName xsi:nil="true"/>
<ns2:OrganizationSize xsi:nil="true"/>
<ns2:PartyUniqueName>Indian AutoComp</ns2:PartyUniqueName>
<ns2:SourceSystem xsi:nil="true"/>
<ns2:SourceSystemReferenceValue xsi:nil="true"/>
<ns2:SourceSystemUpdateDate xsi:nil="true"/>
<ns2:Email xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/">
<ns5:ContactPointId>300100573316848</ns5:ContactPointId>
<ns5:ContactPointType>EMAIL</ns5:ContactPointType>
<ns5:Status>A</ns5:Status>
<ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
<ns5:OwnerTableId>300100573316847</ns5:OwnerTableId>
<ns5:PrimaryFlag>true</ns5:PrimaryFlag>
<ns5:OrigSystemReference>300100573316848</ns5:OrigSystemReference>
<ns5:LastUpdateDate>2021-09-15T04:28:05.572Z</ns5:LastUpdateDate>
<ns5:LastUpdatedBy>SALES_ADMIN</ns5:LastUpdatedBy>
<ns5:CreationDate>2021-09-15T04:27:44.058Z</ns5:CreationDate>
<ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
<ns5:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns5:LastUpdateLogin>
<ns5:RequestId xsi:nil="true"/>
<ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
<ns5:CreatedByModule>AMS</ns5:CreatedByModule>
<ns5:ContactPointPurpose xsi:nil="true"/>
<ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
<ns5:StartDate>2021-09-15</ns5:StartDate>
<ns5:EndDate>4712-12-31</ns5:EndDate>
<ns5:RelationshipId xsi:nil="true"/>
```

```
 <ns5:PartyUsageCode xsi:nil="true"/>
 <ns5:OrigSystem xsi:nil="true"/>
 <ns5:EmailFormat>MAILHTML</ns5:EmailFormat>
 <ns5:EmailAddress>test@oracle.com</ns5:EmailAddress>
 <ns5:PartyName>Indian AutoComp</ns5:PartyName>
 <ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
 <ns5:OriginalSystemReference xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns1:OrigSystemReferenceId>300100573316849</ns1:OrigSystemReferenceId>
 <ns1:OrigSystem>CSV</ns1:OrigSystem>
 <ns1:OrigSystemReference>TestEmail001</ns1:OrigSystemReference>
 <ns1:OwnerTableName>HZ_CONTACT_POINTS</ns1:OwnerTableName>
 <ns1:OwnerTableId>300100573316848</ns1:OwnerTableId>
 <ns1:Status>A</ns1:Status>
 <ns1:ReasonCode xsi:nil="true"/>
 <ns1:OldOrigSystemReference xsi:nil="true"/>
 <ns1:StartDateActive>2021-09-15</ns1:StartDateActive>
 <ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:CreationDate>2021-09-15T04:27:44.535Z</ns1:CreationDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:LastUpdateDate>2021-09-15T04:28:05.286Z</ns1:LastUpdateDate>
 <ns1:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns1:LastUpdateLogin>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedByModule>AMS</ns1:CreatedByModule>
 <ns1:PartyId xsi:nil="true"/>
 <ns1:RequestId xsi:nil="true"/>
 </ns5:OriginalSystemReference>
 </ns2:Email>
 <ns2:InstantMessaging xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
contactPoint/">
 <ns5:ContactPointId>300100573316855</ns5:ContactPointId>
 <ns5:ContactPointType>INSTANT_MESSAGING</ns5:ContactPointType>
 <ns5:Status>A</ns5:Status>
 <ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
 <ns5:OwnerTableId>300100573316847</ns5:OwnerTableId>
 <ns5:PrimaryFlag>true</ns5:PrimaryFlag>
 <ns5:OrigSystemReference>300100573316855</ns5:OrigSystemReference>
 <ns5:LastUpdateDate>2021-09-15T04:28:06.291Z</ns5:LastUpdateDate>
 <ns5:LastUpdatedBy>SALES_ADMIN</ns5:LastUpdatedBy>
 <ns5:CreationDate>2021-09-15T04:27:49.392Z</ns5:CreationDate>
 <ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
 <ns5:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns5:LastUpdateLogin>
 <ns5:RequestId xsi:nil="true"/>
 <ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
 <ns5:CreatedByModule>AMS</ns5:CreatedByModule>
 <ns5:ContactPointPurpose>BUSINESS</ns5:ContactPointPurpose>
 <ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
 <ns5:StartDate>2021-09-15</ns5:StartDate>
 <ns5:EndDate>4712-12-31</ns5:EndDate>
 <ns5:RelationshipId xsi:nil="true"/>
 <ns5:PartyUsageCode xsi:nil="true"/>
 <ns5:OrigSystem xsi:nil="true"/>
 <ns5:InstantMessengerType>YAHOO</ns5:InstantMessengerType>
 <ns5:InstantMessagingAddress>corp@oracle.com</ns5:InstantMessagingAddress>
 <ns5:PartyName>Indian AutoComp</ns5:PartyName>
 <ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
 <ns5:OriginalSystemReference xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns1:OrigSystemReferenceId>300100573316856</ns1:OrigSystemReferenceId>
 <ns1:OrigSystem>CSV</ns1:OrigSystem>
 <ns1:OrigSystemReference>TestIM001</ns1:OrigSystemReference>
 <ns1:OwnerTableName>HZ_CONTACT_POINTS</ns1:OwnerTableName>
 <ns1:OwnerTableId>300100573316855</ns1:OwnerTableId>
 <ns1:Status>A</ns1:Status>
 <ns1:ReasonCode xsi:nil="true"/>
```

```
 <ns1:OldOrigSystemReference xsi:nil="true"/>
 <ns1:StartDateActive>2021-09-15</ns1:StartDateActive>
 <ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:CreationDate>2021-09-15T04:27:49.728Z</ns1:CreationDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:LastUpdateDate>2021-09-15T04:28:05.29Z</ns1:LastUpdateDate>
 <ns1:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns1:LastUpdateLogin>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedByModule>AMS</ns1:CreatedByModule>
 <ns1:PartyId xsi:nil="true"/>
 <ns1:RequestId xsi:nil="true"/>
 </ns5:OriginalSystemReference>
 </ns2:InstantMessaging>
 <ns2:OrganizationProfile xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
organization/">
 <ns2:OrganizationProfileId>300100573316847</ns2:OrganizationProfileId>
 <ns2:PartyId>300100573316847</ns2:PartyId>
 <ns2:OrganizationName>Indian AutoComp</ns2:OrganizationName>
 <ns2:EnquiryDUNS xsi:nil="true"/>
 <ns2:CeoName>Alan</ns2:CeoName>
 <ns2:CeoTitle xsi:nil="true"/>
 <ns2:PrincipalName xsi:nil="true"/>
 <ns2:PrincipalTitle xsi:nil="true"/>
 <ns2:LegalStatus xsi:nil="true"/>
 <ns2:ControlYr xsi:nil="true"/>
 <ns2:EmployeesTotal xsi:nil="true"/>
 <ns2:HQBranchIndicator xsi:nil="true"/>
 <ns2:BranchFlag xsi:nil="true"/>
 <ns2:OobInd xsi:nil="true"/>
 <ns2:LineOfBusiness xsi:nil="true"/>
 <ns2:CongDistCode xsi:nil="true"/>
 <ns2:ImportInd xsi:nil="true"/>
 <ns2:ExportInd xsi:nil="true"/>
 <ns2:LaborSurplusInd xsi:nil="true"/>
 <ns2:MinorityOwnedInd xsi:nil="true"/>
 <ns2:MinorityOwnedType xsi:nil="true"/>
 <ns2:WomanOwnedInd xsi:nil="true"/>
 <ns2:Disadv8aInd xsi:nil="true"/>
 <ns2:SmallBusInd xsi:nil="true"/>
 <ns2:RentOwnInd xsi:nil="true"/>
 <ns2:DbRating xsi:nil="true"/>
 <ns2:GSAIndicatorFlag xsi:nil="true"/>
 <ns2:JgzzFiscalCode xsi:nil="true"/>
 <ns2:AnalysisFy xsi:nil="true"/>
 <ns2:FiscalYearendMonth xsi:nil="true"/>
 <ns2:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
 <ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
 <ns2:YearEstablished xsi:nil="true"/>
 <ns2:MissionStatement xsi:nil="true"/>
 <ns2:OrganizationType xsi:nil="true"/>
 <ns2:BusinessScope xsi:nil="true"/>
 <ns2:CorporationClass xsi:nil="true"/>
 <ns2:LocalBusIdenType xsi:nil="true"/>
 <ns2:LocalBusIdentifier xsi:nil="true"/>
 <ns2:PreferredFunctionalCurrency xsi:nil="true"/>
 <ns2:RegistrationType xsi:nil="true"/>
 <ns2:TotalEmployeesText xsi:nil="true"/>
 <ns2:TotalEmployeesInd xsi:nil="true"/>
 <ns2:TotalEmployeesEstimatedIndicator xsi:nil="true"/>
 <ns2:TotalEmployeesMinimumIndicator xsi:nil="true"/>
 <ns2:ParentSubInd xsi:nil="true"/>
 <ns2:IncorpYear xsi:nil="true"/>
 <ns2:LastUpdateDate>2021-09-15T04:28:09.623Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
 <ns2:CreationDate>2021-09-15T04:27:52.652Z</ns2:CreationDate>
```

```
<ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
<ns2:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns2:LastUpdateLogin>
<ns2:RequestId xsi:nil="true"/>
<ns2:ContentSourceNumber xsi:nil="true"/>
<ns2:EffectiveStartDate>2021-09-15</ns2:EffectiveStartDate>
<ns2:EffectiveEndDate>4712-12-31</ns2:EffectiveEndDate>
<ns2:PublicPrivateOwnershipFlag xsi:nil="true"/>
<ns2:LocalActivityCodeType xsi:nil="true"/>
<ns2:LocalActivityCode xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddress xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressText xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressEstimation xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressMinimum xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:TotalPaymentAmount xsi:nil="true"/>
<ns2:DisplayedDUNSPartyIdentifier xsi:nil="true"/>
<ns2:Status>A</ns2:Status>
<ns2:DUNSNumberC xsi:nil="true"/>
<ns2:CreatedByModule>AMS</ns2:CreatedByModule>
<ns2:BankOrBranchNumber xsi:nil="true"/>
<ns2:BankCode xsi:nil="true"/>
<ns2:BranchCode xsi:nil="true"/>
<ns2:DoNotConfuseWith xsi:nil="true"/>
<ns2:HomeCountry xsi:nil="true"/>
<ns2:GrowthStrategyDescription xsi:nil="true"/>
<ns2:SeblUserKeyLoc xsi:nil="true"/>
<ns2:StockSymbol xsi:nil="true"/>
<ns2:TradingPartnerIdentifier xsi:nil="true"/>
<ns2:OrigSystem xsi:nil="true"/>
<ns2:OrigSystemReference>300100573316847</ns2:OrigSystemReference>
<ns2:EffectiveSequence>1</ns2:EffectiveSequence>
<ns2:Comments xsi:nil="true"/>
<ns2:EffectiveLatestChange>Y</ns2:EffectiveLatestChange>
<ns2:OrganizationSize xsi:nil="true"/>
<ns2:SuffixOverriddenFlag>false</ns2:SuffixOverriddenFlag>
<ns2:UniqueNameAlias>Indian AutoComp</ns2:UniqueNameAlias>
<ns2:UniqueNameSuffix xsi:nil="true"/>
<ns2:DomesticUltimateDUNSNumberC xsi:nil="true"/>
<ns2:GlobalUltimateDUNSNumberC xsi:nil="true"/>
<ns2:ParentDUNSNumberC xsi:nil="true"/>
<ns2:CorpCurrencyCode>USD</ns2:CorpCurrencyCode>
<ns2:CurcyConvRateType>Corporate</ns2:CurcyConvRateType>
<ns2:CurrencyCode>USD</ns2:CurrencyCode>
<ns2:PartyNumber>CDRM_1003763</ns2:PartyNumber>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredContactName xsi:nil="true"/>
<ns2:PreferredContactEmailAddress xsi:nil="true"/>
<ns2:PreferredContactFormattedPhoneNumber xsi:nil="true"/>
<ns2:PrimaryAddressLine1 xsi:nil="true"/>
<ns2:PrimaryAddressLine2 xsi:nil="true"/>
<ns2:PrimaryAddressLine3 xsi:nil="true"/>
<ns2:PrimaryAddressLine4 xsi:nil="true"/>
<ns2:Alias xsi:nil="true"/>
<ns2:PrimaryAddressCity xsi:nil="true"/>
<ns2:PrimaryAddressCountry xsi:nil="true"/>
<ns2:PrimaryAddressCounty xsi:nil="true"/>
<ns2:PrimaryEmailAddress>test@oracle.com</ns2:PrimaryEmailAddress>
<ns2:PrimaryFormattedPhoneNumber>+1 (650) 633-8437 x8437</ns2:PrimaryFormattedPhoneNumber>
<ns2:IdenAddrLocationId xsi:nil="true"/>
<ns2:IdenAddrPartySiteId xsi:nil="true"/>
<ns2:PrimaryLanguage xsi:nil="true"/>
<ns2:PartyUniqueName>Indian AutoComp</ns2:PartyUniqueName>
<ns2:PrimaryAddressPostalCode xsi:nil="true"/>
```

```
<ns2:PreferredName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PrimaryEmailId>300100573316848</ns2:PrimaryEmailId>
<ns2:PrimaryPhoneAreaCode>650</ns2:PrimaryPhoneAreaCode>
<ns2:PrimaryPhoneId>300100573316858</ns2:PrimaryPhoneId>
<ns2:PrimaryPhoneCountryCode>1</ns2:PrimaryPhoneCountryCode>
<ns2:PrimaryPhoneExtension>8437</ns2:PrimaryPhoneExtension>
<ns2:PrimaryPhoneLineType>GEN</ns2:PrimaryPhoneLineType>
<ns2:PrimaryPhoneNumber>6338437</ns2:PrimaryPhoneNumber>
<ns2:PrimaryPhonePurpose>BUSINESS</ns2:PrimaryPhonePurpose>
<ns2:PrimaryWebId xsi:nil="true"/>
<ns2:Pronunciation xsi:nil="true"/>
<ns2:PrimaryAddressProvince xsi:nil="true"/>
<ns2:SICCode xsi:nil="true"/>
<ns2:SICCodeType xsi:nil="true"/>
<ns2:PrimaryAddressState xsi:nil="true"/>
<ns2:PrimaryURL xsi:nil="true"/>
<ns2:ValidatedFlag xsi:nil="true"/>
<ns2:ThirdPartyFlag xsi:nil="true"/>
<ns2:LastUpdateSourceSystem>UNKNOWN</ns2:LastUpdateSourceSystem>
<ns2:LastSourceUpdateDate>2021-09-15T04:28:06.0Z</ns2:LastSourceUpdateDate>
<ns2:DataCloudStatus xsi:nil="true"/>
<ns2:LastEnrichmentDate xsi:nil="true"/>
<ns2:R10_CmnCustObj_Id_R10_CmnCustObj_To_Account xsi:nil="true"/>
<ns2:Lead_Id_R10_LeadAccountRel xsi:nil="true"/>
<ns2:PartnerProfile_Id_R10_PartnerAccountRelationship xsi:nil="true"/>
<ns2:R10_AccountText_c xsi:nil="true"/>
<ns2:R10_AccountNum_c>1234</ns2:R10_AccountNum_c>
<ns2:R10_AccountDate_c xsi:nil="true"/>
<ns2:Enrollment_Id_R10_EnrollAccountRelationship xsi:nil="true"/>
<ns2:Program_Id_R10_ProgramAccountrelationship xsi:nil="true"/>
<ns2:Opportunity_Id_R10OptyAcntRel xsi:nil="true"/>
<ns2:R10_AccountCheckbox_c>false</ns2:R10_AccountCheckbox_c>
<ns2:R10_AccountFixChList_c xsi:nil="true"/>
<ns2:R10_AccountDynChList_Id_c xsi:nil="true"/>
<ns2:R10_AccountDynChList_c xsi:nil="true"/>
<ns2:R10_AccountCurrency_c xsi:nil="true"/>
<ns2:R10_AccountDateTime_c xsi:nil="true"/>
<ns2:R10_AccountPerc_c xsi:nil="true"/>
<ns2:R10_AccountTextFormula_c>This Record was Created by: SALES_ADMIN</ns2:R10_AccountTextFormula_c>
<ns2:SalesGoal_Id_R10_QMAccountRel xsi:nil="true"/>
<ns2:R10_AccountTCM_Text_c xsi:nil="true"/>
<ns2:R10_AccountTCM_Number_c xsi:nil="true"/>
<ns2:R10_AccountTCM_Date_c xsi:nil="true"/>
<ns2:R10_AccountRecordtype_c xsi:nil="true"/>
<ns2:R10_ACCText_c xsi:nil="true"/>
<ns2:R10_ACCNumber_c xsi:nil="true"/>
<ns2:R10_ACCDate_c xsi:nil="true"/>
<ns2:REL10_AccountType_Toyota_c xsi:nil="true"/>
<ns2:REL10_AnnualRevenue_c xsi:nil="true"/>
<ns2:REL10_CBofTotalFleet_c xsi:nil="true"/>
<ns2:REL10_CompaniesInterest_c xsi:nil="true"/>
<ns2:REL10_CreditLimit_c xsi:nil="true"/>
<ns2:REL10_CustomerNumber_c xsi:nil="true"/>
<ns2:REL10_CustomerSince_c xsi:nil="true"/>
<ns2:REL10_EKAAgreement_c xsi:nil="true"/>
<ns2:REL10_EKAAgreementName_Id_c xsi:nil="true"/>
<ns2:REL10_EKAAgreementName_c xsi:nil="true"/>
<ns2:RE10_EKAExistingSince_c xsi:nil="true"/>
<ns2:REL10_EKAInformation_c xsi:nil="true"/>
<ns2:REL10_EKAIntranet_c xsi:nil="true"/>
<ns2:REL10_EKAManager_c xsi:nil="true"/>
<ns2:REL10_EKAProspectSince_c xsi:nil="true"/>
<ns2:REL10_EKASalesSupport_c xsi:nil="true"/>
<ns2:REL10_EKASuppliers_c xsi:nil="true"/>
<ns2:REL10_ExpiryDateForCurrentAgre_c xsi:nil="true"/>
```

```
<ns2:REL10_FiscalYearStartMonth_c xsi:nil="true"/>
<ns2:REL10_FleetSize_c xsi:nil="true"/>
<ns2:REL10_InternationalAccountNumb_c xsi:nil="true"/>
<ns2:REL10_LocalInfo1_c xsi:nil="true"/>
<ns2:REL10_LocalInfo2_c xsi:nil="true"/>
<ns2:REL10_LocalInfo3_c xsi:nil="true"/>
<ns2:Reference_Id_R10_REFAccountRel xsi:nil="true"/>
<ns2:R10_AccountText_M_c xsi:nil="true"/>
<ns2:R10_AccountFixChList_M_c xsi:nil="true"/>
<ns2:R10_Account_DCL_SalesCO_Id_c xsi:nil="true"/>
<ns2:R10_Account_DCL_SalesCO_c xsi:nil="true"/>
<ns2:R10_Account_DCL_Contact_Id_c xsi:nil="true"/>
<ns2:R10_Account_DCL_Contact_c xsi:nil="true"/>
<ns2:AccountIdCF_c xsi:nil="true"/>
<ns2:CustomerSince_c xsi:nil="true"/>
<ns2:CompaniesInterest_c>Used</ns2:CompaniesInterest_c>
<ns2:EKAAgreementCF_Id_c xsi:nil="true"/>
<ns2:EKAAgreementCF_c xsi:nil="true"/>
<ns2:InternationalAccountNumber_Id_c xsi:nil="true"/>
<ns2:InternationalAccountNumber_c xsi:nil="true"/>
<ns2:AnnualBusinessPlanatTSight_c xsi:nil="true"/>
<ns2:CBoftotalfleet_c xsi:nil="true"/>
<ns2:WH_c xsi:nil="true"/>
<ns2:NewBusiness_c>false</ns2:NewBusiness_c>
<ns2:STR_c>false</ns2:STR_c>
<ns2:Rel10_SP_TXT_c xsi:nil="true"/>
<ns2:Deal_Id_R10DealAccountrelationship xsi:nil="true"/>
<ns2:TestPercentage_c xsi:nil="true"/>
<ns2:BudgetFundRequest_Id_R11MDFRequestToAccount1M xsi:nil="true"/>
<ns2:Claim_Id_R11MDFClaimAccount_Rel xsi:nil="true"/>
<ns2:R11_AccountBP_Text_c xsi:nil="true"/>
<ns2:BusinessPlan_Id_R11_BP_Account_rel xsi:nil="true"/>
<ns2:Budget_Id_R11MDFBudgetToAccount xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_TEXT_c xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_NUM_c xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_FCL_c xsi:nil="true"/>
<ns2:R11_Acct_DATE_c xsi:nil="true"/>
<ns2:R11_RNOW_ACCT_CHKBOX_c>false</ns2:R11_RNOW_ACCT_CHKBOX_c>
<ns2:R11_RNOW_ACCT_DATETIME_c xsi:nil="true"/>
<ns2:Deal_Id_REL11_RELATION_ACCOUNT xsi:nil="true"/>
<ns2:SalesObjective_Id_Upg_BO_Acc_1M xsi:nil="true"/>
<ns2:Atext_c xsi:nil="true"/>
<ns2:Anum_c xsi:nil="true"/>
<ns2:Adate_c xsi:nil="true"/>
<ns2:Acheckbox_c>false</ns2:Acheckbox_c>
<ns2:Apercentage_c xsi:nil="true"/>
<ns2:Adatetime_c xsi:nil="true"/>
<ns2:Acuurency_c xsi:nil="true"/>
<ns2:Afcl_c xsi:nil="true"/>
<ns2:Adcl_Id_c xsi:nil="true"/>
<ns2:Adcl_c xsi:nil="true"/>
<ns2:Product_Id_Product2Account xsi:nil="true"/>
<ns2:PriceBookHeader_Id_PB2Account xsi:nil="true"/>
<ns2:SalesPromotion_Id_Promotion2Account xsi:nil="true"/>
<ns2:R12_GS_0723_CustomObject2_Id_R12_GS_CustomObject2_relationship xsi:nil="true"/>
<ns2:RNOW_TEXT_0724_c xsi:nil="true"/>
<ns2:RNOW_NUM_0724_c xsi:nil="true"/>
<ns2:RNOW_ACCT_FCL_0724_c xsi:nil="true"/>
<ns2:RNOW_ACCT_CHKBOX_0724_c>false</ns2:RNOW_ACCT_CHKBOX_0724_c>
<ns2:RNOW_ACCT_DATA_0724_c xsi:nil="true"/>
<ns2:RNOW_ACCT_DATETIME_0724_c xsi:nil="true"/>
<ns2:SalesTerritory_Id_CDRMSalesTerritoryCustObjAccRel xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Fcl_c xsi:nil="true"/>
<ns2:R12PB8_Zem_AccountToContact_DC_Id_c xsi:nil="true"/>
<ns2:R12PB8_Zem_AccountToContact_DC_c xsi:nil="true"/>
<ns2:R12PB8_Zem_Account_Text_c xsi:nil="true"/>
```

```
 <ns2:R12PB8_Zem_Account_Number_c xsi:nil="true"/>
 <ns2:R12PB8_Zem_Account_Date_c xsi:nil="true"/>
 <ns2:R12PB8_Zem_Account_DateTime_c xsi:nil="true"/>
 <ns2:R12PB8_Zem_Account_CheckBox_c>false</ns2:R12PB8_Zem_Account_CheckBox_c>
 <ns2:R12PB8_Zem_Account_Percentage_c xsi:nil="true"/>
 <ns2:R12PB8_Zem_Account_ParentFcl_c xsi:nil="true"/>
 <ns2:R12PB8_Zem_Account_ChildFcl_c xsi:nil="true"/>
 <ns2:SalesCountry_c xsi:nil="true"/>
 <ns2:SalesRegion_c xsi:nil="true"/>
 <ns2:SalesCluster_c xsi:nil="true"/>
 <ns2:LogisticsRail_c>Logistics</ns2:LogisticsRail_c>
 <ns2:ExternalId_c xsi:nil="true"/>
 <ns2:Organization_Id_Account_Account xsi:nil="true"/>
 <ns2:Type_c>ZCA_Prospect</ns2:Type_c>
 <ns2:Category_c xsi:nil="true"/>
 <ns2:ParentExternalId_c xsi:nil="true"/>
 <ns2:R12PB8_Zem_Account_mcl_c xsi:nil="true"/>
 <ns2:ResDCL_Id_c xsi:nil="true"/>
 <ns2:ResDCL_c xsi:nil="true"/>
 <ns2:R1802BIObj_Id_R13_1802_CO_Acccount xsi:nil="true"/>
 <ns2:R1802_Text_c xsi:nil="true"/>
 <ns2:R1802_Number_c xsi:nil="true"/>
 <ns2:R13_COPYMAP_TEXT_c xsi:nil="true"/>
 <ns2:R13_COPYMAP_NUMBER_c xsi:nil="true"/>
 <ns2:R1802CustObj_Id_R1805COtoAccount xsi:nil="true"/>
 <ns2:O365_1810_DCL_Id_c xsi:nil="true"/>
 <ns2:O365_1810_DCL_c xsi:nil="true"/>
 <ns2:ACCPICKERTEXT_c xsi:nil="true"/>
 <ns2:Text_Elastic_c xsi:nil="true"/>
 <ns2:Number_Elastic_c xsi:nil="true"/>
 <ns2:Date_Elastic_c xsi:nil="true"/>
 <ns2:PARENT1_c xsi:nil="true"/>
 <ns2:PARENT2_c xsi:nil="true"/>
 <ns2:PARENT3_c xsi:nil="true"/>
 <ns2:SON1_c xsi:nil="true"/>
 <ns2:SON2_c xsi:nil="true"/>
 <ns2:SON3_c xsi:nil="true"/>
 <ns2:SON4_c xsi:nil="true"/>
 <ns2:SON5_c xsi:nil="true"/>
 <ns2:SON6_c xsi:nil="true"/>
 <ns2:CHILD1_c xsi:nil="true"/>
 <ns2:CHILD2_c xsi:nil="true"/>
 <ns2:CHILD3_c xsi:nil="true"/>
 <ns2:CHILD4_c xsi:nil="true"/>
 <ns2:Lead_Id_R13_LeadsAccount xsi:nil="true"/>
 <ns2:O365_1904_AccntSimpleTxt_c>This is the default text set in the field</
ns2:O365_1904_AccntSimpleTxt_c>
 <ns2:O365_1904_AccntMultiText_c>Default text in text field of type Multiline text area.Sample text in
 text field of type</ns2:O365_1904_AccntMultiText_c>
 <ns2:O365_1904_AccntNum_c>987684</ns2:O365_1904_AccntNum_c>
 <ns2:O365_1904_AccntDate_c>2019-02-20</ns2:O365_1904_AccntDate_c>
 <ns2:O365_1904_AccntLngTxt_c>SXQgaXMgYSBsb25nIGVzdGFibGlzaGVkIGZhY3QgdGhhdCBhIHJlYWRlciB3aWxsIGJlIGRpc3Ry
YWN0ZWQgYnkgdGhlIHJlYWRhYmxlIGNvbnRlbnQgb2YgYSBwYWdlIHdoZW4gbG9va2luZyBhdCBp
dHMgbGF5b3V0LiBUaGUgcG9pbnQgb2YgdXNpbmcgTG9yZW0gSXBzdW0gaXMgdGhhdCBpdCBoYXMg
YSBtb3JlLW9yLWxlc3Mgbm9ybWFsIGRpc3RyaWJ1dGlvbiBvZiBsZXR0ZXJzLCBhcyBvcHBvc2Vk
IHRvIHVzaW5nICdDb250ZW50IGhlcmUsIGNvbnRlbnQgaGVyZScsIG1ha2luZyBpdCBsb29rIGxp
a2UgcmVhZGFibGUgRW5nbGlzaC4gTWFueSBkZXNrdG9wIHB1Ymxpc2hpbmcgcGFja2FnZXMgYW5k
IHdlYiBwYWdl</ns2:O365_1904_AccntLngTxt_c>
 <ns2:O365_1904_AccntChkBox_c>true</ns2:O365_1904_AccntChkBox_c>
 <ns2:O365_1904_AccntPerc_c>0.45</ns2:O365_1904_AccntPerc_c>
 <ns2:O365_1904_AccntDtTime_c>2019-02-27T02:45:00.0Z</ns2:O365_1904_AccntDtTime_c>
 <ns2:O365_1904_AccntCur_c currencyCode="USD">9878355</ns2:O365_1904_AccntCur_c>
 <ns2:O365_1904_AccntFCL_c>L</ns2:O365_1904_AccntFCL_c>
 <ns2:O365_1904_AccntMCL_c>CEO,CIO,VP</ns2:O365_1904_AccntMCL_c>
 <ns2:O365_1904_AccntChldFCL_c xsi:nil="true"/>
 <ns2:O365_1904_AccntChldMCL_c xsi:nil="true"/>
```

```
<ns2:O365_1904_AccntDCL_Id_c xsi:nil="true"/>
<ns2:O365_1904_AccntDCL_c xsi:nil="true"/>
<ns2:R1810SrcCustObj_Id_OneMSalesCustAccount xsi:nil="true"/>
<ns2:R1810SrcCustObj_Id_SalesCustAccount_1M xsi:nil="true"/>
<ns2:AUX_DCLServiceRequest1_Id_c xsi:nil="true"/>
<ns2:AUX_DCLServiceRequest1_c xsi:nil="true"/>
<ns2:R1904CustomObjectDCL_Id_c xsi:nil="true"/>
<ns2:R1904CustomObjectDCL_c xsi:nil="true"/>
<ns2:R1805CustomObj2_Id_CustomtoAccount xsi:nil="true"/>
<ns2:M2004_CXM_Text_c xsi:nil="true"/>
<ns2:M2004_CXM_MobileNum_c xsi:nil="true"/>
<ns2:M2004_CXM_Date_c xsi:nil="true"/>
<ns2:M2004_CXM_CB_c>false</ns2:M2004_CXM_CB_c>
<ns2:M2004_CXM_DateTime_c xsi:nil="true"/>
<ns2:M2004_CXM_Perc_c xsi:nil="true"/>
<ns2:M2004_CXM_Currency_c xsi:nil="true"/>
<ns2:M2004_CXM_Fcl_c xsi:nil="true"/>
<ns2:M2004_CXM_ParentFcl_c xsi:nil="true"/>
<ns2:M2004_CXM_ChildFcl_c xsi:nil="true"/>
<ns2:M2004_CXM_DCLContact_Id_c xsi:nil="true"/>
<ns2:M2004_CXM_DCLContact_c xsi:nil="true"/>
<ns2:M2004_CXM_DCLOppty_Id_c xsi:nil="true"/>
<ns2:M2004_CXM_DCLOppty_c xsi:nil="true"/>
<ns2:Opportunity_Id_M2004_CXM_1ToMOpptyToAccount xsi:nil="true"/>
<ns2:ConditionallyMandatory_c xsi:nil="true"/>
<ns2:O365_2004_ACCTEXT_c xsi:nil="true"/>
<ns2:O365_2004_stdLkup_c xsi:nil="true"/>
<ns2:O365_2004_CustomLkup_c xsi:nil="true"/>
<ns2:O365_2004_StdLkUPm1_c xsi:nil="true"/>
<ns2:M2004_CXM_DCLCusOBJ1_Id_c xsi:nil="true"/>
<ns2:M2004_CXM_DCLCusOBJ1_c xsi:nil="true"/>
<ns2:M2004_CXM_MCL_c xsi:nil="true"/>
<ns2:Account_FCL_MultiSelect_c xsi:nil="true"/>
<ns2:Account_FCL_Parent_c xsi:nil="true"/>
<ns2:Account_FCL_Child_c xsi:nil="true"/>
<ns2:Account_DCL_Driidown_Id_c xsi:nil="true"/>
<ns2:Account_DCL_Driidown_c xsi:nil="true"/>
<ns2:TextAdvExpr_c xsi:nil="true"/>
<ns2:M2101_CXM_Link_c>https://www.oracle.com</ns2:M2101_CXM_Link_c>
<ns2:AAACustomFCL_c xsi:nil="true"/>
<ns2:AAACustomCheckbox_c>false</ns2:AAACustomCheckbox_c>
<ns2:CDA_Text_c xsi:nil="true"/>
<ns2:CDA_Num_c xsi:nil="true"/>
<ns2:CDA_Dat_c xsi:nil="true"/>
<ns2:CDA_CB_c>false</ns2:CDA_CB_c>
<ns2:CDA_Per_c xsi:nil="true"/>
<ns2:CDA_DatTime_c xsi:nil="true"/>
<ns2:CDA_Currency_c xsi:nil="true"/>
<ns2:CDA_FCL_c xsi:nil="true"/>
<ns2:CDA_DCL_Id_c xsi:nil="true"/>
<ns2:CDA_DCL_c xsi:nil="true"/>
<ns2:CDA_CHFCL_c xsi:nil="true"/>
<ns2:CDA_PFCL_c xsi:nil="true"/>
<ns2:CDA_MULFCL_c xsi:nil="true"/>
</ns2:OrganizationProfile>
<ns2:PartyUsageAssignment>
<ns1:PartyUsgAssignmentId>300100573316857</ns1:PartyUsgAssignmentId>
<ns1:PartyId>300100573316847</ns1:PartyId>
<ns1:PartyUsageCode>CUSTOMER</ns1:PartyUsageCode>
<ns1:EffectiveStartDate>2021-09-15</ns1:EffectiveStartDate>
<ns1:EffectiveEndDate>4712-12-31</ns1:EffectiveEndDate>
<ns1:StatusFlag>true</ns1:StatusFlag>
<ns1:Comments xsi:nil="true"/>
<ns1:OwnerTableName xsi:nil="true"/>
<ns1:OwnerTableId xsi:nil="true"/>
<ns1:CreatedByModule>AMS</ns1:CreatedByModule>
```

```
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:CreationDate>2021-09-15T04:28:01.84Z</ns1:CreationDate>
 <ns1:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns1:LastUpdateLogin>
 <ns1:LastUpdateDate>2021-09-15T04:28:05.303Z</ns1:LastUpdateDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:RequestId xsi:nil="true"/>
 </ns2:PartyUsageAssignment>
 <ns2:Phone xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/">
 <ns5:ContactPointId>300100573316858</ns5:ContactPointId>
 <ns5:ContactPointType>PHONE</ns5:ContactPointType>
 <ns5:Status>A</ns5:Status>
 <ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
 <ns5:OwnerTableId>300100573316847</ns5:OwnerTableId>
 <ns5:PrimaryFlag>true</ns5:PrimaryFlag>
 <ns5:OrigSystemReference>300100573316858</ns5:OrigSystemReference>
 <ns5:LastUpdateDate>2021-09-15T04:28:10.013Z</ns5:LastUpdateDate>
 <ns5:LastUpdatedBy>SALES_ADMIN</ns5:LastUpdatedBy>
 <ns5:CreationDate>2021-09-15T04:28:02.552Z</ns5:CreationDate>
 <ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
 <ns5:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns5:LastUpdateLogin>
 <ns5:RequestId xsi:nil="true"/>
 <ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
 <ns5:CreatedByModule>AMS</ns5:CreatedByModule>
 <ns5:ContactPointPurpose>BUSINESS</ns5:ContactPointPurpose>
 <ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
 <ns5:StartDate>2021-09-15</ns5:StartDate>
 <ns5:EndDate>4712-12-31</ns5:EndDate>
 <ns5:RelationshipId xsi:nil="true"/>
 <ns5:PartyUsageCode xsi:nil="true"/>
 <ns5:OrigSystem xsi:nil="true"/>
 <ns5:PhoneCallingCalendar xsi:nil="true"/>
 <ns5:LastContactDtTime xsi:nil="true"/>
 <ns5:PhoneAreaCode>650</ns5:PhoneAreaCode>
 <ns5:PhoneCountryCode>1</ns5:PhoneCountryCode>
 <ns5:PhoneNumber>6338437</ns5:PhoneNumber>
 <ns5:PhoneExtension>8437</ns5:PhoneExtension>
 <ns5:PhoneLineType>GEN</ns5:PhoneLineType>
 <ns5:RawPhoneNumber>1-650-6338437</ns5:RawPhoneNumber>
 <ns5:PagerTypeCode xsi:nil="true"/>
 <ns5:FormattedPhoneNumber>+1 (650) 633-8437 x8437</ns5:FormattedPhoneNumber>
 <ns5:TransposedPhoneNumber>73483360561</ns5:TransposedPhoneNumber>
 <ns5:PartyName>Indian AutoComp</ns5:PartyName>
 <ns5:TimezoneCode xsi:nil="true"/>
 <ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
 <ns5:OriginalSystemReference xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns1:OrigSystemReferenceId>300100573316859</ns1:OrigSystemReferenceId>
 <ns1:OrigSystem>CSV</ns1:OrigSystem>
 <ns1:OrigSystemReference>TestPhone001</ns1:OrigSystemReference>
 <ns1:OwnerTableName>HZ_CONTACT_POINTS</ns1:OwnerTableName>
 <ns1:OwnerTableId>300100573316858</ns1:OwnerTableId>
 <ns1:Status>A</ns1:Status>
 <ns1:ReasonCode xsi:nil="true"/>
 <ns1:OldOrigSystemReference xsi:nil="true"/>
 <ns1:StartDateActive>2021-09-15</ns1:StartDateActive>
 <ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:CreationDate>2021-09-15T04:28:02.602Z</ns1:CreationDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:LastUpdateDate>2021-09-15T04:28:05.306Z</ns1:LastUpdateDate>
 <ns1:LastUpdateLogin>C9818FB9F80D2F03E053D711F10AB6EA</ns1:LastUpdateLogin>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedByModule>AMS</ns1:CreatedByModule>
 <ns1:PartyId xsi:nil="true"/>
 <ns1:RequestId xsi:nil="true"/>
```

```
</ns5:OriginalSystemReference>
</ns2:Phone>
</ns2:Value>
</ns3:result>
</ns0:createOrganizationResponse>
</env:Body>
</env:Envelope>
```

Delete Code Assignment for an Organization

In this use case, we'll delete code assignment for an organization.

Operation: **updateOrganization**

Request Body

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body>
 <ns1:updateOrganization xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/types/">
 <ns1:organizationParty xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/">
 <ns2:PartyId>300100547088843</ns2:PartyId>
 <ns2:CodeAssignment xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/">
 <ns3:CodeAssignmentId>300100547088844</ns3:CodeAssignmentId>
 <ns3:Status>I</ns3:Status>
 </ns2:CodeAssignment>
 </ns1:organizationParty>
 </ns1:updateOrganization>
 </soap:Body>
</soap:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule/
OrganizationService/updateOrganizationResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:0ffb941f-fa06-45e4-a399-8fc943a78219</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:updateOrganizationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/">
 <ns3:result xsi:type="ns2:OrganizationPartyResult" xmlns:ns5="http://xmlns.oracle.com/apps/cdm/
foundation/parties/contactPointService/" xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/
relationshipService/" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/"
 xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance" xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/">
 <ns2:Value>
 <ns2:PartyNumber>CDRM_929981</ns2:PartyNumber>
 <ns2:PartyId>300100547088843</ns2:PartyId>
 <ns2:PartyType>ORGANIZATION</ns2:PartyType>
 <ns2:PartyName>TestOrg</ns2:PartyName>
 <ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
 <ns2:ValidatedFlag xsi:nil="true"/>
 <ns2:LastUpdateLogin>CC22A97B5FE9894EE053D711F10A63D1</ns2:LastUpdateLogin>
 <ns2:CreationDate>2021-09-21T08:46:17Z</ns2:CreationDate>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:LastUpdateDate>2021-09-21T08:50:39.69Z</ns2:LastUpdateDate>
```

```
<ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
<ns2:OrigSystemReference>300100547088843</ns2:OrigSystemReference>
<ns2:HQBranchIndicator xsi:nil="true"/>
<ns2:DUNSNumberC xsi:nil="true"/>
<ns2:SICCode xsi:nil="true"/>
<ns2:JgzzFiscalCode xsi:nil="true"/>
<ns2:Address1 xsi:nil="true"/>
<ns2:Country xsi:nil="true"/>
<ns2:Address3 xsi:nil="true"/>
<ns2:GroupType xsi:nil="true"/>
<ns2:Address2 xsi:nil="true"/>
<ns2:Address4 xsi:nil="true"/>
<ns2:Status>A</ns2:Status>
<ns2:City xsi:nil="true"/>
<ns2:PostalCode xsi:nil="true"/>
<ns2:County xsi:nil="true"/>
<ns2:YearEstablished xsi:nil="true"/>
<ns2:Province xsi:nil="true"/>
<ns2:State xsi:nil="true"/>
<ns2:URL xsi:nil="true"/>
<ns2:AnalysisFy xsi:nil="true"/>
<ns2:SICCodeType xsi:nil="true"/>
<ns2:EmailAddress xsi:nil="true"/>
<ns2:FiscalYearendMonth xsi:nil="true"/>
<ns2:EmployeesTotal xsi:nil="true"/>
<ns2:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
<ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
<ns2:GSAIndicatorFlag xsi:nil="true"/>
<ns2:CategoryCode xsi:nil="true"/>
<ns2:LanguageName xsi:nil="true"/>
<ns2:MissionStatement xsi:nil="true"/>
<ns2:ThirdPartyFlag xsi:nil="true"/>
<ns2:HomeCountry xsi:nil="true"/>
<ns2:CreatedByModule>AMS</ns2:CreatedByModule>
<ns2:ObjectVersionNumber>2</ns2:ObjectVersionNumber>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:PrimaryPhonePurpose xsi:nil="true"/>
<ns2:PrimaryPhoneContactPointId xsi:nil="true"/>
<ns2:PrimaryPhoneLineType xsi:nil="true"/>
<ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
<ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns2:PrimaryPhoneNumber xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:IdenAddrLocationId xsi:nil="true"/>
<ns2:PrimaryURLContactPointId xsi:nil="true"/>
<ns2:PrimaryEmailContactPointId xsi:nil="true"/>
<ns2:IdenAddrPartySiteId xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PersonSecondLastName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:TradingPartnerIdentifier xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:Comments xsi:nil="true"/>
<ns2:CeoName>TestCEO</ns2:CeoName>
<ns2:PrincipalName>TestName</ns2:PrincipalName>
<ns2:OrganizationSize>SMALL</ns2:OrganizationSize>
<ns2:PartyUniqueName>TestOrg</ns2:PartyUniqueName>
<ns2:SourceSystem xsi:nil="true"/>
<ns2:SourceSystemReferenceValue xsi:nil="true"/>
<ns2:SourceSystemUpdateDate xsi:nil="true"/>
<ns2:CodeAssignment>
<ns1:CodeAssignmentId>300100547088844</ns1:CodeAssignmentId>
```

```
<ns1:OwnerTableName>HZ_PARTIES</ns1:OwnerTableName>
<ns1:OwnerTableId>300100547088843</ns1:OwnerTableId>
<ns1:ClassCategory>CUSTOMER_CATEGORY</ns1:ClassCategory>
<ns1:ClassCode>BROKER</ns1:ClassCode>
<ns1:PrimaryFlag>true</ns1:PrimaryFlag>
<ns1:StartDateActive>2020-10-10</ns1:StartDateActive>
<ns1:EndDateActive>2020-11-11</ns1:EndDateActive>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:CreationDate>2021-09-21T08:46:17.832Z</ns1:CreationDate>
<ns1:LastUpdateLogin>CC22A97B5FE9894EE053D711F10A63D1</ns1:LastUpdateLogin>
<ns1:LastUpdateDate>2021-09-21T08:50:36Z</ns1:LastUpdateDate>
<ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
<ns1:Status>I</ns1:Status>
<ns1:ObjectVersionNumber>2</ns1:ObjectVersionNumber>
<ns1:CreatedByModule>AMS</ns1:CreatedByModule>
<ns1:Rank>11</ns1:Rank>
<ns1:OwnerTableKey1 xsi:nil="true"/>
<ns1:OwnerTableKey2 xsi:nil="true"/>
<ns1:OwnerTableKey3 xsi:nil="true"/>
<ns1:OwnerTableKey4 xsi:nil="true"/>
<ns1:OwnerTableKey5 xsi:nil="true"/>
<ns1:RequestId xsi:nil="true"/>
</ns2:CodeAssignment>
</ns2:Value>
</ns3:result>
</ns0:updateOrganizationResponse>
</env:Body>
</env:Envelope>
```

Get Organizations with PartySiteNumber

In this use case we'll get organization by PartySiteNumber.

Operation: **findOrganization**

Request Body

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Body
xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/types/">
      <ns1:findOrganization>
          <ns1:findCriteria
xmlns:ns2="http://xmlns.oracle.com/adf/svc/types/">
              <ns2:fetchStart>0</ns2:fetchStart>
              <ns2:fetchSize>-1</ns2:fetchSize>
              <ns2:filter>
                  <ns2:conjunction>And</ns2:conjunction>
                  <ns2:group>
                      <ns2:conjunction>And</ns2:conjunction>
                      <ns2:upperCaseCompare>false</ns2:upperCaseCompare>
                      <ns2:item>
                          <ns2:conjunction>And</ns2:conjunction>
                          <ns2:upperCaseCompare>false</ns2:upperCaseCompare>
                          <ns2:attribute>CodeAssignment</ns2:attribute>
                          <ns2:operator>EXISTS</ns2:operator>
                          <ns2:nested>
                              <ns2:group>
                                  <ns2:item>
```

```
                                        <ns2:upperCaseCompare>false</ns2:upperCaseCompare>
                                        <ns2:attribute>ClassCategory</ns2:attribute>
                                        <ns2:operator>=</ns2:operator>
                                        <ns2:value>FAF_ENTITY_TYPE2</ns2:value>
                                    </ns2:item>
                                    <ns2:item>
                                        <ns2:conjunction>And</ns2:conjunction>
                                        <ns2:upperCaseCompare>false</ns2:upperCaseCompare>
                                        <ns2:attribute>ClassCode</ns2:attribute>
                                        <ns2:operator>=</ns2:operator>
                                        <ns2:value>LENDER</ns2:value>
                                    </ns2:item>
                                </ns2:group>
                            </ns2:nested>
                        </ns2:item>
                    </ns2:group>
                </ns2:filter>
                <ns2:excludeAttribute>false</ns2:excludeAttribute>
            </ns1:findCriteria>
            <ns1:findControl
xmlns:ns3="http://xmlns.oracle.com/adf/svc/types/">
                <ns3:retrieveAllTranslations>false</ns3:retrieveAllTranslations>
            </ns1:findControl>
        </ns1:findOrganization>
    </soap:Body>
</soap:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing">
    <env:Header>
        <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/OrganizationService/findOrganizationResponse</wsa:Action>
        <wsa:MessageID>urn:uuid:f3abac94-3fae-47cb-8dbc-449cb58d3073</wsa:MessageID>
    </env:Header>
    <env:Body>
        <ns0:findOrganizationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/
foundation/parties/organizationService/applicationModule/types/">
            <ns3:result xsi:type="ns2:OrganizationPartyResult" xmlns:ns6="http://
xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/" xmlns:ns9="http://
xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/" xmlns:ns2="http://
xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/" xmlns:tns="http://
xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:ns3="http://xmlns.oracle.com/
apps/cdm/foundation/parties/organizationService/applicationModule/types/"/>
        </ns0:findOrganizationResponse>
    </env:Body>
</env:Envelope>
```

How do I import global location number using SOAP?

Global location number can be imported using Site Level and Site Level ID. Here's a sample payload to import global location number using organizations.

Operation Name: **mergeOrganization**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
 xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/types/" xmlns:org="http://xmlns.oracle.com/apps/cdm/foundation/
parties/organizationService/" xmlns:par="http://xmlns.oracle.com/apps/cdm/foundation/
parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/sourceSystemRef/" xmlns:con="http://xmlns.oracle.com/apps/cdm/foundation/parties/
contactPointService/" xmlns:con1="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/contactPoint/" xmlns:org1="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/organization/" xmlns:par1="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/partySite/" xmlns:rel="http://xmlns.oracle.com/apps/cdm/foundation/parties/
relationshipService/" xmlns:org2="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/orgContact/" xmlns:rel1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
relationship/">
<soapenv:Header/>
<soapenv:Body>
 <typ:mergeOrganization>
  <typ:organizationParty>
   <org:PartyId>1003</org:PartyId>
   <org:PartySite>
    <par:PartySiteId>300100633380462</par:PartySiteId>
    <par:GlobalLocationNumber>0847976000005</par:GlobalLocationNumber>
   </org:PartySite>
  </typ:organizationParty>
 </typ:mergeOrganization>
</soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing">
   <env:Header>
      <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/OrganizationService/mergeOrganizationResponse</wsa:Action>
      <wsa:MessageID>urn:uuid:2a7f3457-5353-43eb-94d3-efc07cccbbf0</wsa:MessageID>
   </env:Header>
   <env:Body>
      <ns0:mergeOrganizationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/
foundation/parties/organizationService/applicationModule/types/">
         <ns3:result xsi:type="ns2:OrganizationPartyResult" xmlns:ns5="http://
xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/" xmlns:ns8="http://
xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/" xmlns:ns2="http://
xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/" xmlns:tns="http://
xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:ns3="http://xmlns.oracle.com/
apps/cdm/foundation/parties/organizationService/applicationModule/types/">
            <ns2:Value>
               <ns2:PartyNumber>1003</ns2:PartyNumber>
               <ns2:PartyId>1003</ns2:PartyId>
               <ns2:PartyType>ORGANIZATION</ns2:PartyType>
               <ns2:PartyName>UNITED PARCEL SERVICE, INC</ns2:PartyName>
               <ns2:LastUpdatedBy>1318</ns2:LastUpdatedBy>
               <ns2:ValidatedFlag xsi:nil="true"/>
               <ns2:LastUpdateLogin>4081020</ns2:LastUpdateLogin>
               <ns2:CreationDate>1997-02-23T12:47:25Z</ns2:CreationDate>
               <ns2:RequestId>4350529</ns2:RequestId>
```

```
                <ns2:LastUpdateDate>2007-04-12T21:13:29Z</ns2:LastUpdateDate>
                <ns2:CreatedBy>1028</ns2:CreatedBy>
                <ns2:OrigSystemReference>1003</ns2:OrigSystemReference>
                <ns2:HQBranchIndicator>HQ</ns2:HQBranchIndicator>
                <ns2:DUNSNumberC>006991681</ns2:DUNSNumberC>
                <ns2:SICCode>4215</ns2:SICCode>
                <ns2:JgzzFiscalCode>01-83937602</ns2:JgzzFiscalCode>
                <ns2:Address1>93 Peachtree Parkway</ns2:Address1>
                <ns2:Country>US</ns2:Country>
                <ns2:Address3 xsi:nil="true"/>
                <ns2:GroupType xsi:nil="true"/>
                <ns2:Address2 xsi:nil="true"/>
                <ns2:Address4 xsi:nil="true"/>
                <ns2:Status>A</ns2:Status>
                <ns2:City>Atlanta</ns2:City>
                <ns2:PostalCode>30328</ns2:PostalCode>
                <ns2:County>Fulton</ns2:County>
                <ns2:YearEstablished>1969</ns2:YearEstablished>
                <ns2:Province xsi:nil="true"/>
                <ns2:State>GA</ns2:State>
                <ns2:URL xsi:nil="true"/>
                <ns2:AnalysisFy>1996</ns2:AnalysisFy>
                <ns2:SICCodeType>1987 SIC</ns2:SICCodeType>
                <ns2:EmailAddress xsi:nil="true"/>
                <ns2:FiscalYearendMonth>12</ns2:FiscalYearendMonth>
                <ns2:EmployeesTotal>25000</ns2:EmployeesTotal>
                <ns2:CurrentFiscalYearPotentialRevenueAmount>800000000</
ns2:CurrentFiscalYearPotentialRevenueAmount>
                <ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
                <ns2:GSAIndicatorFlag>false</ns2:GSAIndicatorFlag>
                <ns2:CategoryCode>DISTRIBUTION</ns2:CategoryCode>
                <ns2:LanguageName xsi:nil="true"/>
                <ns2:MissionStatement xsi:nil="true"/>
                <ns2:ThirdPartyFlag>false</ns2:ThirdPartyFlag>
                <ns2:HomeCountry xsi:nil="true"/>
                <ns2:CreatedByModule xsi:nil="true"/>
                <ns2:ObjectVersionNumber>10</ns2:ObjectVersionNumber>
                <ns2:CertificationLevel xsi:nil="true"/>
                <ns2:CertReasonCode xsi:nil="true"/>
                <ns2:PrimaryPhonePurpose xsi:nil="true"/>
                <ns2:PrimaryPhoneContactPointId>3105</ns2:PrimaryPhoneContactPointId>
                <ns2:PrimaryPhoneLineType>GEN</ns2:PrimaryPhoneLineType>
                <ns2:PrimaryPhoneCountryCode>1</ns2:PrimaryPhoneCountryCode>
                <ns2:PrimaryPhoneAreaCode>703</ns2:PrimaryPhoneAreaCode>
                <ns2:PrimaryPhoneNumber>8441212</ns2:PrimaryPhoneNumber>
                <ns2:PreferredContactMethod xsi:nil="true"/>
                <ns2:PrimaryPhoneExtension xsi:nil="true"/>
                <ns2:IdenAddrLocationId>944</ns2:IdenAddrLocationId>
                <ns2:PrimaryURLContactPointId xsi:nil="true"/>
                <ns2:PrimaryEmailContactPointId xsi:nil="true"/>
                <ns2:IdenAddrPartySiteId>1097</ns2:IdenAddrPartySiteId>
                <ns2:PreferredName xsi:nil="true"/>
                <ns2:PersonSecondLastName xsi:nil="true"/>
                <ns2:PreferredNameId xsi:nil="true"/>
                <ns2:TradingPartnerIdentifier xsi:nil="true"/>
                <ns2:PreferredContactPersonId xsi:nil="true"/>
                <ns2:PreferredFunctionalCurrency xsi:nil="true"/>
                <ns2:InternalFlag xsi:nil="true"/>
                <ns2:Comments xsi:nil="true"/>
                <ns2:CeoName xsi:nil="true"/>
```

```
                <ns2:PrincipalName xsi:nil="true"/>
                <ns2:OrganizationSize>LARGE</ns2:OrganizationSize>
                <ns2:PartyUniqueName>UNITED PARCEL SERVICE, INC</ns2:PartyUniqueName>
                <ns2:SourceSystem xsi:nil="true"/>
                <ns2:SourceSystemReferenceValue xsi:nil="true"/>
                <ns2:SourceSystemUpdateDate xsi:nil="true"/>
                <ns2:PartySite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/
parties/flex/partySite/">
                   <ns1:PartySiteId>300100633380462</ns1:PartySiteId>
                   <ns1:PartyId>1003</ns1:PartyId>
                   <ns1:LocationId>970</ns1:LocationId>
                   <ns1:LastUpdateDate>2025-04-21T14:22:25Z</ns1:LastUpdateDate>
                   <ns1:PartySiteNumber>CDRM_954918</ns1:PartySiteNumber>
                   <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
                   <ns1:CreationDate>2025-04-21T14:18:47.001Z</ns1:CreationDate>
                   <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
                   <ns1:LastUpdateLogin>2BA14A2784364190E063682D060A2131</
ns1:LastUpdateLogin>
                   <ns1:RequestId xsi:nil="true"/>
                   <ns1:OrigSystem xsi:nil="true"/>
                   <ns1:OrigSystemReference>300100633380462</ns1:OrigSystemReference>
                   <ns1:StartDateActive>2025-04-21</ns1:StartDateActive>
                   <ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
                   <ns1:Mailstop xsi:nil="true"/>
                   <ns1:IdentifyingAddressFlag>false</ns1:IdentifyingAddressFlag>
                   <ns1:Language xsi:nil="true"/>
                   <ns1:Status>A</ns1:Status>
                   <ns1:PartySiteName xsi:nil="true"/>
                   <ns1:Addressee xsi:nil="true"/>
                   <ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
                   <ns1:GlobalLocationNumber>0847976000005</ns1:GlobalLocationNumber>
                   <ns1:DUNSNumberC xsi:nil="true"/>
                   <ns1:Comments xsi:nil="true"/>
                   <ns1:PartySiteType xsi:nil="true"/>
                   <ns1:PartyNameDba xsi:nil="true"/>
                   <ns1:PartyNameDivision xsi:nil="true"/>
                   <ns1:PartyNameLegal xsi:nil="true"/>
                   <ns1:RelationshipId xsi:nil="true"/>
                   <ns1:PartyUsageCode xsi:nil="true"/>
                   <ns1:UsageCode xsi:nil="true"/>
                   <ns1:FormattedAddress>1800 Satellite Drive,DISTRIBUTION
 CENTER,CHATTANOOGA, TN 37401</ns1:FormattedAddress>
                   <ns1:Country>US</ns1:Country>
                   <ns1:Address1>1800 Satellite Drive</ns1:Address1>
                   <ns1:Address2>Distribution Center</ns1:Address2>
                   <ns1:Address3>Warehouse B</ns1:Address3>
                   <ns1:Address4 xsi:nil="true"/>
                   <ns1:City>Chattanooga</ns1:City>
                   <ns1:PostalCode>37401</ns1:PostalCode>
                   <ns1:State>TN</ns1:State>
                   <ns1:Province xsi:nil="true"/>
                   <ns1:County>Hamilton</ns1:County>
                   <ns1:AddressStyle xsi:nil="true"/>
                   <ns1:ValidatedFlag xsi:nil="true"/>
                   <ns1:AddressLinesPhonetic xsi:nil="true"/>
                   <ns1:PostalPlus4Code xsi:nil="true"/>
                   <ns1:Position xsi:nil="true"/>
                   <ns1:LocationDirections xsi:nil="true"/>
                   <ns1:AddressExpirationDate xsi:nil="true"/>
                   <ns1:LocationLanguage xsi:nil="true"/>
```

```
                  <ns1:ValidationStatusCode xsi:nil="true"/>
                  <ns1:DateValidated xsi:nil="true"/>
                  <ns1:DoNotValidateFlag xsi:nil="true"/>
                  <ns1:HouseType xsi:nil="true"/>
                  <ns1:FormattedMultilineAddress>1800 Satellite Drive&lt;BR>DISTRIBUTION
 CENTER&lt;BR>CHATTANOOGA, TN 37401</ns1:FormattedMultilineAddress>
                  <ns1:Country1>US</ns1:Country1>
                  <ns1:ObjectVersionNumber1>10</ns1:ObjectVersionNumber1>
                  <ns1:ContactPreferenceExistFlag>false</ns1:ContactPreferenceExistFlag>
                  <ns1:FormattedLocaleAddress xsi:nil="true"/>
                  <ns1:CurrencyCode>USD</ns1:CurrencyCode>
                  <ns1:CorpCurrencyCode>USD</ns1:CorpCurrencyCode>
                  <ns1:CurcyConvRateType>Corporate</ns1:CurcyConvRateType>
                  <ns1:InternalFlag>false</ns1:InternalFlag>
                  <ns1:OverallPrimaryFlag>false</ns1:OverallPrimaryFlag>
                  <ns1:EmailAddress xsi:nil="true"/>
                  <ns1:Latitude xsi:nil="true"/>
                  <ns1:Longitude xsi:nil="true"/>
               </ns2:PartySite>
            </ns2:Value>
         </ns3:result>
      </ns0:mergeOrganizationResponse>
   </env:Body>
</env:Envelope>
```

Update Contact Point of a Contact record Customer

In this use case, we'll update existing contact points for a person and for an organization. Person contact point is updated using mergePerson operation of Person web service and Organization contact point is updated using updateOrganization operation of Organization web service.

Updating contact point of a Person

Operation: **mergePerson**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/types/" xmlns:per="http://
xmlns.oracle.com/apps/cdm/foundation/parties/personService/" xmlns:par="http://xmlns.oracle.com/apps/cdm/
foundation/parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/" xmlns:con="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/"
 xmlns:con1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/" xmlns:par1="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/" xmlns:per1="http://xmlns.oracle.com/apps/
cdm/foundation/parties/flex/person/" xmlns:rel="http://xmlns.oracle.com/apps/cdm/foundation/parties/
relationshipService/" xmlns:org="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/orgContact/"
 xmlns:rel1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/relationship/">
<soapenv:Header/>
 <soapenv:Body>
 <typ:mergePerson>
 <typ:personParty>
 <per:PartyId>300100551395016</per:PartyId>
 <per:Email>
 <con:ContactPointId>300100551395017</con:ContactPointId>
 <con:ContactPointType>EMAIL</con:ContactPointType>
 <con:OwnerTableName>HZ_PARTIES</con:OwnerTableName>
 <con:OwnerTableId>300100551395016</con:OwnerTableId>
 <con:EmailAddress>MMM.NNN@com</con:EmailAddress>
 </per:Email>
 </typ:personParty>
```

```
 </typ:mergePerson>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/
types/">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule//
PersonService/mergePersonResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:81b8a1d2-83b0-488b-b2e2-1431b435c8fc</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:mergePersonResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/
applicationModule/types/">
 <ns1:result xsi:type="ns2:PersonResult" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/personService/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/
applicationModule/types/" xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/" xmlns:ns8="http://
xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/" xmlns:xsi="http://www.w3.org/2001/
XMLSchema-instance">
 <ns2:Value>
 <ns2:PartyId>300100551395016</ns2:PartyId>
 <ns2:PartyNumber>CDRM_968403</ns2:PartyNumber>
 <ns2:PartyName>Randy1 Andy1 E1</ns2:PartyName>
 <ns2:PartyType>PERSON</ns2:PartyType>
 <ns2:ValidatedFlag xsi:nil="true"/>
 <ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
 <ns2:LastUpdateLogin>CB95B496CAAA2F65E0531C5CF00ADC28</ns2:LastUpdateLogin>
 <ns2:CreationDate>2021-09-19T07:04:30.0Z</ns2:CreationDate>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:LastUpdateDate>2021-09-19T07:08:08.2Z</ns2:LastUpdateDate>
 <ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
 <ns2:OrigSystemReference>300100551395016</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:JgzzFiscalCode xsi:nil="true"/>
 <ns2:PersonFirstName>Randy1</ns2:PersonFirstName>
 <ns2:PersonPreNameAdjunct xsi:nil="true"/>
 <ns2:PersonLastName>E1</ns2:PersonLastName>
 <ns2:PersonMiddleName>Andy1</ns2:PersonMiddleName>
 <ns2:PersonTitle xsi:nil="true"/>
 <ns2:PersonNameSuffix xsi:nil="true"/>
 <ns2:PersonPreviousLastName xsi:nil="true"/>
 <ns2:PersonAcademicTitle xsi:nil="true"/>
 <ns2:Country xsi:nil="true"/>
 <ns2:Address2 xsi:nil="true"/>
 <ns2:Address1 xsi:nil="true"/>
 <ns2:Address4 xsi:nil="true"/>
 <ns2:Address3 xsi:nil="true"/>
 <ns2:PostalCode xsi:nil="true"/>
 <ns2:City xsi:nil="true"/>
 <ns2:Province xsi:nil="true"/>
 <ns2:State xsi:nil="true"/>
 <ns2:County xsi:nil="true"/>
 <ns2:Status>A</ns2:Status>
 <ns2:URL xsi:nil="true"/>
 <ns2:SICCodeType xsi:nil="true"/>
 <ns2:EmailAddress>MMM.NNN@com</ns2:EmailAddress>
 <ns2:GSAIndicatorFlag xsi:nil="true"/>
 <ns2:LanguageName xsi:nil="true"/>
 <ns2:MissionStatement xsi:nil="true"/>
 <ns2:CategoryCode xsi:nil="true"/>
 <ns2:ThirdPartyFlag xsi:nil="true"/>
```

```
<ns2:Salutation xsi:nil="true"/>
<ns2:CreatedByModule>AMS</ns2:CreatedByModule>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:PrimaryPhonePurpose xsi:nil="true"/>
<ns2:PrimaryPhoneContactPTId xsi:nil="true"/>
<ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
<ns2:PrimaryPhoneLineType xsi:nil="true"/>
<ns2:PrimaryPhoneNumber xsi:nil="true"/>
<ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:IdenAddrLocationId xsi:nil="true"/>
<ns2:PrimaryEmailContactPTId>300100551395017</ns2:PrimaryEmailContactPTId>
<ns2:IdenAddrPartySiteId xsi:nil="true"/>
<ns2:PersonLastNamePrefix xsi:nil="true"/>
<ns2:PrimaryURLContactPTId xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PersonSecondLastName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:Gender xsi:nil="true"/>
<ns2:MaritalStatus xsi:nil="true"/>
<ns2:Comments xsi:nil="true"/>
<ns2:DateOfBirth xsi:nil="true"/>
<ns2:UserGUID xsi:nil="true"/>
<ns2:PartyUniqueName>Randy1 Andy1 E1</ns2:PartyUniqueName>
<ns2:SourceSystem xsi:nil="true"/>
<ns2:SourceSystemReferenceValue xsi:nil="true"/>
<ns2:SourceSystemUpdateDate xsi:nil="true"/>
<ns2:Email xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/">
<ns5:ContactPointId>300100551395017</ns5:ContactPointId>
<ns5:ContactPointType>EMAIL</ns5:ContactPointType>
<ns5:Status>A</ns5:Status>
<ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
<ns5:OwnerTableId>300100551395016</ns5:OwnerTableId>
<ns5:PrimaryFlag>true</ns5:PrimaryFlag>
<ns5:OrigSystemReference>300100551395017</ns5:OrigSystemReference>
<ns5:LastUpdateDate>2021-09-19T07:08:08.0Z</ns5:LastUpdateDate>
<ns5:LastUpdatedBy>SALES_ADMIN</ns5:LastUpdatedBy>
<ns5:CreationDate>2021-09-19T07:04:30.027Z</ns5:CreationDate>
<ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
<ns5:LastUpdateLogin>CB95B496CAAA2F65E0531C5CF00ADC28</ns5:LastUpdateLogin>
<ns5:RequestId xsi:nil="true"/>
<ns5:ObjectVersionNumber>2</ns5:ObjectVersionNumber>
<ns5:CreatedByModule>AMS</ns5:CreatedByModule>
<ns5:ContactPointPurpose xsi:nil="true"/>
<ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
<ns5:StartDate>2021-09-19</ns5:StartDate>
<ns5:EndDate>4712-12-31</ns5:EndDate>
<ns5:RelationshipId xsi:nil="true"/>
<ns5:PartyUsageCode xsi:nil="true"/>
<ns5:OrigSystem xsi:nil="true"/>
<ns5:EmailFormat/>
<ns5:EmailAddress>MMM.NNN@com</ns5:EmailAddress>
<ns5:PartyName>Randy1 Andy1 E1</ns5:PartyName>
<ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
</ns2:Email>
</ns2:Value>
</ns1:result>
</ns0:mergePersonResponse>
</env:Body>
</env:Envelope>
```

Updating contact point of an Organization

Operation: **updateOrganization**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/types/" xmlns:per="http://
xmlns.oracle.com/apps/cdm/foundation/parties/personService/" xmlns:par="http://xmlns.oracle.com/apps/cdm/
foundation/parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/" xmlns:con="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/"
 xmlns:con1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/" xmlns:par1="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/" xmlns:per1="http://xmlns.oracle.com/apps/
cdm/foundation/parties/flex/person/" xmlns:rel="http://xmlns.oracle.com/apps/cdm/foundation/parties/
relationshipService/" xmlns:org="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/orgContact/"
 xmlns:rel1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/relationship/">
<soapenv:Header/>
<soapenv:Body>
<typ:mergePerson>
<typ:personParty>
<!--Optional:-->
<per:PartyId>300000077548711</per:PartyId>
<per:Email>
<!--Optional:-->
<con:ContactPointId>300000077548892</con:ContactPointId>
<!--Optional:-->
<con:ContactPointType>EMAIL</con:ContactPointType>
<!--Optional:-->
<con:OwnerTableName>HZ_PARTIES</con:OwnerTableName>
<!--Optional:-->
<con:OwnerTableId>300000077548711</con:OwnerTableId>
<con:EmailAddress>MMM.NNN@com</con:EmailAddress>
</per:Email>
</typ:personParty>
</typ:mergePerson>
</soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/types/" xmlns:per="http://
xmlns.oracle.com/apps/cdm/foundation/parties/personService/" xmlns:par="http://xmlns.oracle.com/apps/cdm/
foundation/parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/" xmlns:con="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/"
 xmlns:con1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/" xmlns:par1="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/" xmlns:per1="http://xmlns.oracle.com/apps/
cdm/foundation/parties/flex/person/" xmlns:rel="http://xmlns.oracle.com/apps/cdm/foundation/parties/
relationshipService/" xmlns:org="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/orgContact/"
 xmlns:rel1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/relationship/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:mergePerson>
 <typ:personParty>
 <!--Optional:-->
 <per:PartyId>300000077548711</per:PartyId>
 <per:Email>
 <!--Optional:-->
 <con:ContactPointId>300000077548892</con:ContactPointId>
 <!--Optional:-->
 <con:ContactPointType>EMAIL</con:ContactPointType>
 <!--Optional:-->
 <con:OwnerTableName>HZ_PARTIES</con:OwnerTableName>
 <!--Optional:-->
 <con:OwnerTableId>300000077548711</con:OwnerTableId>
```

```
 <con:EmailAddress>MMM.NNN@com</con:EmailAddress>
 </per:Email>
 </typ:personParty>
 </typ:mergePerson>
 </soapenv:Body>
</soapenv:Envelope>
```

Find Organization using DFF field value

In this use case, we'll find organization using DFF field value with the findOrganization SOAP service of Organization WSDL.

Operation: **findOrganization**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule/types/"
 xmlns:typ1="http://xmlns.oracle.com/adf/svc/types/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:findOrganizationProfile>
 <typ:findCriteria>
 <typ1:fetchStart>0</typ1:fetchStart>
 <typ1:fetchSize>500</typ1:fetchSize>
 <typ1:filter>
 <typ1:conjunction>And</typ1:conjunction>
 <typ1:group>
 <typ1:conjunction>And</typ1:conjunction>
 <typ1:upperCaseCompare>false</typ1:upperCaseCompare>
 <typ1:item>
 <typ1:conjunction>And</typ1:conjunction>
 <typ1:attribute>OrgInformation</typ1:attribute>
 <typ1:nested>
 <typ1:group>
 <typ1:conjunction>And</typ1:conjunction>
 <typ1:upperCaseCompare>false</typ1:upperCaseCompare>
 </typ1:group>
 </typ1:nested>
 </typ1:item>
 </typ1:group>
 </typ1:filter>
 <typ1:excludeAttribute>false</typ1:excludeAttribute>
 </typ:findCriteria>
 <typ:findControl>
 <typ1:retrieveAllTranslations>false</typ1:retrieveAllTranslations>
 </typ:findControl>
 </typ:findOrganizationProfile>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule/
OrganizationService/findOrganizationProfileResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:351c80b0-10f6-4474-87d9-bdaa722c18dc</wsa:MessageID>
 </env:Header>
 <env:Body>
```

```
 <ns0:findOrganizationProfileResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/">
 <ns1:result xsi:type="ns2:OrganizationProfile" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/organization/" xmlns:ns2="http://
xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/" xmlns:xsi="http://www.w3.org/2001/
XMLSchema-instance" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/types/">
 <ns2:OrganizationProfileId>300100019114221</ns2:OrganizationProfileId>
 <ns2:PartyId>300100019114221</ns2:PartyId>
 <ns2:OrganizationName>AvinashTestOrgForRelationship2</ns2:OrganizationName>
 <ns2:EnquiryDUNS xsi:nil="true"/>
 <ns2:CeoName xsi:nil="true"/>
 <ns2:CeoTitle xsi:nil="true"/>
 <ns2:PrincipalName xsi:nil="true"/>
 <ns2:PrincipalTitle xsi:nil="true"/>
 <ns2:LegalStatus xsi:nil="true"/>
 <ns2:ControlYr xsi:nil="true"/>
 <ns2:EmployeesTotal xsi:nil="true"/>
 <ns2:HQBranchIndicator xsi:nil="true"/>
 <ns2:BranchFlag xsi:nil="true"/>
 <ns2:OobInd xsi:nil="true"/>
 <ns2:LineOfBusiness xsi:nil="true"/>
 <ns2:CongDistCode xsi:nil="true"/>
 <ns2:ImportInd xsi:nil="true"/>
 <ns2:ExportInd xsi:nil="true"/>
 <ns2:LaborSurplusInd xsi:nil="true"/>
 <ns2:MinorityOwnedInd xsi:nil="true"/>
 <ns2:MinorityOwnedType xsi:nil="true"/>
 <ns2:WomanOwnedInd xsi:nil="true"/>
 <ns2:Disadv8aInd xsi:nil="true"/>
 <ns2:SmallBusInd xsi:nil="true"/>
 <ns2:RentOwnInd xsi:nil="true"/>
 <ns2:DbRating xsi:nil="true"/>
 <ns2:GSAIndicatorFlag xsi:nil="true"/>
 <ns2:JgzzFiscalCode xsi:nil="true"/>
 <ns2:AnalysisFy xsi:nil="true"/>
 <ns2:FiscalYearendMonth xsi:nil="true"/>
 <ns2:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
 <ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
 <ns2:YearEstablished xsi:nil="true"/>
 <ns2:MissionStatement xsi:nil="true"/>
 <ns2:OrganizationType xsi:nil="true"/>
 <ns2:BusinessScope xsi:nil="true"/>
 <ns2:CorporationClass xsi:nil="true"/>
 <ns2:LocalBusIdenType xsi:nil="true"/>
 <ns2:LocalBusIdentifier xsi:nil="true"/>
 <ns2:PreferredFunctionalCurrency xsi:nil="true"/>
 <ns2:RegistrationType xsi:nil="true"/>
 <ns2:TotalEmployeesText xsi:nil="true"/>
 <ns2:TotalEmployeesInd xsi:nil="true"/>
 <ns2:TotalEmployeesEstimatedIndicator xsi:nil="true"/>
 <ns2:TotalEmployeesMinimumIndicator xsi:nil="true"/>
 <ns2:ParentSubInd xsi:nil="true"/>
 <ns2:IncorpYear xsi:nil="true"/>
 <ns2:LastUpdateDate>2024-06-11T09:44:31.105Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>MHoope</ns2:LastUpdatedBy>
 <ns2:CreationDate>2013-01-09T01:49:11.06Z</ns2:CreationDate>
 <ns2:CreatedBy>DATA_STEWARD_MGR</ns2:CreatedBy>
 <ns2:LastUpdateLogin>1A98D08BC78F4E55E063843F060A753D</ns2:LastUpdateLogin>
 <ns2:RequestId>1612131</ns2:RequestId>
 <ns2:ContentSourceNumber xsi:nil="true"/>
 <ns2:EffectiveStartDate>2013-01-09</ns2:EffectiveStartDate>
 <ns2:EffectiveEndDate>4712-12-31</ns2:EffectiveEndDate>
 <ns2:PublicPrivateOwnershipFlag xsi:nil="true"/>
 <ns2:LocalActivityCodeType xsi:nil="true"/>
 <ns2:LocalActivityCode xsi:nil="true"/>
```

```
<ns2:EmployeesAtPrimaryAddress xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressText xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressEstimation xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressMinimum xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:TotalPaymentAmount xsi:nil="true"/>
<ns2:DisplayedDUNSPartyIdentifier xsi:nil="true"/>
<ns2:Status>A</ns2:Status>
<ns2:BusinessReport xsi:nil="true"/>
<ns2:DUNSNumberC xsi:nil="true"/>
<ns2:CreatedByModule>SALES</ns2:CreatedByModule>
<ns2:BankOrBranchNumber xsi:nil="true"/>
<ns2:BankCode xsi:nil="true"/>
<ns2:BranchCode xsi:nil="true"/>
<ns2:DoNotConfuseWith xsi:nil="true"/>
<ns2:HomeCountry xsi:nil="true"/>
<ns2:GrowthStrategyDescription xsi:nil="true"/>
<ns2:SeblUserKeyLoc xsi:nil="true"/>
<ns2:StockSymbol xsi:nil="true"/>
<ns2:TradingPartnerIdentifier xsi:nil="true"/>
<ns2:OrigSystem xsi:nil="true"/>
<ns2:OrigSystemReference>300100019114221</ns2:OrigSystemReference>
<ns2:EffectiveSequence>1</ns2:EffectiveSequence>
<ns2:Comments xsi:nil="true"/>
<ns2:EffectiveLatestChange>Y</ns2:EffectiveLatestChange>
<ns2:OrganizationSize xsi:nil="true"/>
<ns2:SuffixOverriddenFlag>false</ns2:SuffixOverriddenFlag>
<ns2:UniqueNameAlias>AvinashTestOrgForRelationship2</ns2:UniqueNameAlias>
<ns2:UniqueNameSuffix xsi:nil="true"/>
<ns2:DomesticUltimateDUNSNumberC xsi:nil="true"/>
<ns2:GlobalUltimateDUNSNumberC xsi:nil="true"/>
<ns2:ParentDUNSNumberC xsi:nil="true"/>
<ns2:CorpCurrencyCode>USD</ns2:CorpCurrencyCode>
<ns2:CurcyConvRateType>Corporate</ns2:CurcyConvRateType>
<ns2:CurrencyCode>USD</ns2:CurrencyCode>
<ns2:PartyNumber>CDRM_53640</ns2:PartyNumber>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredContactName xsi:nil="true"/>
<ns2:PreferredContactEmailAddress xsi:nil="true"/>
<ns2:PreferredContactFormattedPhoneNumber xsi:nil="true"/>
<ns2:PrimaryAddressLine1>Test Address</ns2:PrimaryAddressLine1>
<ns2:PrimaryAddressLine2 xsi:nil="true"/>
<ns2:PrimaryAddressLine3 xsi:nil="true"/>
<ns2:PrimaryAddressLine4 xsi:nil="true"/>
<ns2:Alias xsi:nil="true"/>
<ns2:PrimaryAddressCity>Redwood City</ns2:PrimaryAddressCity>
<ns2:PrimaryAddressCountry>US</ns2:PrimaryAddressCountry>
<ns2:PrimaryAddressCounty xsi:nil="true"/>
<ns2:PrimaryEmailAddress xsi:nil="true"/>
<ns2:PrimaryFormattedPhoneNumber xsi:nil="true"/>
<ns2:IdenAddrLocationId>300100019115146</ns2:IdenAddrLocationId>
<ns2:IdenAddrPartySiteId>300100019114223</ns2:IdenAddrPartySiteId>
<ns2:PrimaryLanguage xsi:nil="true"/>
<ns2:PartyUniqueName>AvinashTestOrgForRelationship2</ns2:PartyUniqueName>
<ns2:PrimaryAddressPostalCode>94063</ns2:PrimaryAddressPostalCode>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PrimaryEmailId xsi:nil="true"/>
<ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns2:PrimaryPhoneId xsi:nil="true"/>
<ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:PrimaryPhoneLineType xsi:nil="true"/>
```

```
 <ns2:PrimaryPhoneNumber xsi:nil="true"/>
 <ns2:PrimaryPhonePurpose xsi:nil="true"/>
 <ns2:PrimaryWebId xsi:nil="true"/>
 <ns2:Pronunciation xsi:nil="true"/>
 <ns2:PrimaryAddressProvince xsi:nil="true"/>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:SICCodeType xsi:nil="true"/>
 <ns2:PrimaryAddressState>CA</ns2:PrimaryAddressState>
 <ns2:PrimaryURL xsi:nil="true"/>
 <ns2:ValidatedFlag xsi:nil="true"/>
 <ns2:ThirdPartyFlag xsi:nil="true"/>
 <ns2:LastUpdateSourceSystem>FUSION</ns2:LastUpdateSourceSystem>
 <ns2:LastSourceUpdateDate>2024-06-11T09:44:31Z</ns2:LastSourceUpdateDate>
 <ns2:DataCloudStatus xsi:nil="true"/>
 <ns2:LastEnrichmentDate xsi:nil="true"/>
 <ns2:OrgInformation>
 <ns3:OrganizationProfileId>300100019114221</ns3:OrganizationProfileId>
 <ns3:hzOrgprof1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
 </ns2:OrgInformation>
 <ns2:CustomContact_Id_c xsi:nil="true"/>
 <ns2:CustomContact_c xsi:nil="true"/>
 </ns1:result>
 <ns1:result xsi:type="ns2:OrganizationProfile" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/organization/" xmlns:ns2="http://
xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/" xmlns:xsi="http://www.w3.org/2001/
XMLSchema-instance" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/types/">
 <ns2:OrganizationProfileId>300100019114353</ns2:OrganizationProfileId>
 <ns2:PartyId>300100019114353</ns2:PartyId>
 <ns2:OrganizationName>AvinashTestOrgForRelationship2</ns2:OrganizationName>
 <ns2:EnquiryDUNS xsi:nil="true"/>
 <ns2:CeoName xsi:nil="true"/>
 <ns2:CeoTitle xsi:nil="true"/>
 <ns2:PrincipalName xsi:nil="true"/>
 <ns2:PrincipalTitle xsi:nil="true"/>
 <ns2:LegalStatus xsi:nil="true"/>
 <ns2:ControlYr xsi:nil="true"/>
 <ns2:EmployeesTotal xsi:nil="true"/>
 <ns2:HQBranchIndicator xsi:nil="true"/>
 <ns2:BranchFlag xsi:nil="true"/>
 <ns2:OobInd xsi:nil="true"/>
 <ns2:LineOfBusiness xsi:nil="true"/>
 <ns2:CongDistCode xsi:nil="true"/>
 <ns2:ImportInd xsi:nil="true"/>
 <ns2:ExportInd xsi:nil="true"/>
 <ns2:LaborSurplusInd xsi:nil="true"/>
 <ns2:MinorityOwnedInd xsi:nil="true"/>
 <ns2:MinorityOwnedType xsi:nil="true"/>
 <ns2:WomanOwnedInd xsi:nil="true"/>
 <ns2:Disadv8aInd xsi:nil="true"/>
 <ns2:SmallBusInd xsi:nil="true"/>
 <ns2:RentOwnInd xsi:nil="true"/>
 <ns2:DbRating xsi:nil="true"/>
 <ns2:GSAIndicatorFlag xsi:nil="true"/>
 <ns2:JgzzFiscalCode xsi:nil="true"/>
 <ns2:AnalysisFy xsi:nil="true"/>
 <ns2:FiscalYearendMonth xsi:nil="true"/>
 <ns2:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
 <ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
 <ns2:YearEstablished xsi:nil="true"/>
 <ns2:MissionStatement xsi:nil="true"/>
 <ns2:OrganizationType xsi:nil="true"/>
 <ns2:BusinessScope xsi:nil="true"/>
```

```
<ns2:CorporationClass xsi:nil="true"/>
<ns2:LocalBusIdenType xsi:nil="true"/>
<ns2:LocalBusIdentifier xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:RegistrationType xsi:nil="true"/>
<ns2:TotalEmployeesText xsi:nil="true"/>
<ns2:TotalEmployeesInd xsi:nil="true"/>
<ns2:TotalEmployeesEstimatedIndicator xsi:nil="true"/>
<ns2:TotalEmployeesMinimumIndicator xsi:nil="true"/>
<ns2:ParentSubInd xsi:nil="true"/>
<ns2:IncorpYear xsi:nil="true"/>
<ns2:LastUpdateDate>2013-01-09T01:49:20.423Z</ns2:LastUpdateDate>
<ns2:LastUpdatedBy>DATA_STEWARD_MGR</ns2:LastUpdatedBy>
<ns2:CreationDate>2013-01-09T01:49:20.065Z</ns2:CreationDate>
<ns2:CreatedBy>DATA_STEWARD_MGR</ns2:CreatedBy>
<ns2:LastUpdateLogin>D2D7F7DDB6360AA0E0432720F00A18CB</ns2:LastUpdateLogin>
<ns2:RequestId>1612131</ns2:RequestId>
<ns2:ContentSourceNumber xsi:nil="true"/>
<ns2:EffectiveStartDate>2013-01-09</ns2:EffectiveStartDate>
<ns2:EffectiveEndDate>4712-12-31</ns2:EffectiveEndDate>
<ns2:PublicPrivateOwnershipFlag xsi:nil="true"/>
<ns2:LocalActivityCodeType xsi:nil="true"/>
<ns2:LocalActivityCode xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddress xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressText xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressEstimation xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressMinimum xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:TotalPaymentAmount xsi:nil="true"/>
<ns2:DisplayedDUNSPartyIdentifier xsi:nil="true"/>
<ns2:Status>A</ns2:Status>
<ns2:BusinessReport xsi:nil="true"/>
<ns2:DUNSNumberC xsi:nil="true"/>
<ns2:CreatedByModule>SALES</ns2:CreatedByModule>
<ns2:BankOrBranchNumber xsi:nil="true"/>
<ns2:BankCode xsi:nil="true"/>
<ns2:BranchCode xsi:nil="true"/>
<ns2:DoNotConfuseWith xsi:nil="true"/>
<ns2:HomeCountry xsi:nil="true"/>
<ns2:GrowthStrategyDescription xsi:nil="true"/>
<ns2:SeblUserKeyLoc xsi:nil="true"/>
<ns2:StockSymbol xsi:nil="true"/>
<ns2:TradingPartnerIdentifier xsi:nil="true"/>
<ns2:OrigSystem xsi:nil="true"/>
<ns2:OrigSystemReference>300100019114353</ns2:OrigSystemReference>
<ns2:EffectiveSequence>1</ns2:EffectiveSequence>
<ns2:Comments xsi:nil="true"/>
<ns2:EffectiveLatestChange>Y</ns2:EffectiveLatestChange>
<ns2:OrganizationSize xsi:nil="true"/>
<ns2:SuffixOverriddenFlag>false</ns2:SuffixOverriddenFlag>
<ns2:UniqueNameAlias>AvinashTestOrgForRelationship2</ns2:UniqueNameAlias>
<ns2:UniqueNameSuffix xsi:nil="true"/>
<ns2:DomesticUltimateDUNSNumberC xsi:nil="true"/>
<ns2:GlobalUltimateDUNSNumberC xsi:nil="true"/>
<ns2:ParentDUNSNumberC xsi:nil="true"/>
<ns2:CorpCurrencyCode>USD</ns2:CorpCurrencyCode>
<ns2:CurcyConvRateType>Corporate</ns2:CurcyConvRateType>
<ns2:CurrencyCode>USD</ns2:CurrencyCode>
<ns2:PartyNumber>CDRM_53704</ns2:PartyNumber>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredContactName xsi:nil="true"/>
<ns2:PreferredContactEmailAddress xsi:nil="true"/>
<ns2:PreferredContactFormattedPhoneNumber xsi:nil="true"/>
```

```
 <ns2:PrimaryAddressLine1>Test Address</ns2:PrimaryAddressLine1>
 <ns2:PrimaryAddressLine2 xsi:nil="true"/>
 <ns2:PrimaryAddressLine3 xsi:nil="true"/>
 <ns2:PrimaryAddressLine4 xsi:nil="true"/>
 <ns2:Alias xsi:nil="true"/>
 <ns2:PrimaryAddressCity>Redwood City</ns2:PrimaryAddressCity>
 <ns2:PrimaryAddressCountry>US</ns2:PrimaryAddressCountry>
 <ns2:PrimaryAddressCounty xsi:nil="true"/>
 <ns2:PrimaryEmailAddress xsi:nil="true"/>
 <ns2:PrimaryFormattedPhoneNumber xsi:nil="true"/>
 <ns2:IdenAddrLocationId>300100019114334</ns2:IdenAddrLocationId>
 <ns2:IdenAddrPartySiteId>300100019114354</ns2:IdenAddrPartySiteId>
 <ns2:PrimaryLanguage xsi:nil="true"/>
 <ns2:PartyUniqueName>AvinashTestOrgForRelationship2</ns2:PartyUniqueName>
 <ns2:PrimaryAddressPostalCode>94063</ns2:PrimaryAddressPostalCode>
 <ns2:PreferredName xsi:nil="true"/>
 <ns2:PreferredNameId xsi:nil="true"/>
 <ns2:PrimaryEmailId xsi:nil="true"/>
 <ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
 <ns2:PrimaryPhoneId xsi:nil="true"/>
 <ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
 <ns2:PrimaryPhoneExtension xsi:nil="true"/>
 <ns2:PrimaryPhoneLineType xsi:nil="true"/>
 <ns2:PrimaryPhoneNumber xsi:nil="true"/>
 <ns2:PrimaryPhonePurpose xsi:nil="true"/>
 <ns2:PrimaryWebId xsi:nil="true"/>
 <ns2:Pronunciation xsi:nil="true"/>
 <ns2:PrimaryAddressProvince xsi:nil="true"/>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:SICCodeType xsi:nil="true"/>
 <ns2:PrimaryAddressState>CA</ns2:PrimaryAddressState>
 <ns2:PrimaryURL xsi:nil="true"/>
 <ns2:ValidatedFlag xsi:nil="true"/>
 <ns2:ThirdPartyFlag xsi:nil="true"/>
 <ns2:LastUpdateSourceSystem>FUSION</ns2:LastUpdateSourceSystem>
 <ns2:LastSourceUpdateDate>2013-01-09T01:49:20.423Z</ns2:LastSourceUpdateDate>
 <ns2:DataCloudStatus xsi:nil="true"/>
 <ns2:LastEnrichmentDate xsi:nil="true"/>
 <ns2:OrgInformation>
 <ns3:OrganizationProfileId>300100019114353</ns3:OrganizationProfileId>
 <ns3:hzOrgprof1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
 </ns2:OrgInformation>
 <ns2:CustomContact_Id_c xsi:nil="true"/>
 <ns2:CustomContact_c xsi:nil="true"/>
 </ns1:result>
 <ns1:result xsi:type="ns2:OrganizationProfile" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/organization/" xmlns:ns2="http://
xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/" xmlns:xsi="http://www.w3.org/2001/
XMLSchema-instance" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/types/">
 <ns2:OrganizationProfileId>300100019114233</ns2:OrganizationProfileId>
 <ns2:PartyId>300100019114233</ns2:PartyId>
 <ns2:OrganizationName>AvinashTestOrgForRelationship2</ns2:OrganizationName>
 <ns2:EnquiryDUNS xsi:nil="true"/>
 <ns2:CeoName xsi:nil="true"/>
 <ns2:CeoTitle xsi:nil="true"/>
 <ns2:PrincipalName xsi:nil="true"/>
 <ns2:PrincipalTitle xsi:nil="true"/>
 <ns2:LegalStatus xsi:nil="true"/>
 <ns2:ControlYr xsi:nil="true"/>
 <ns2:EmployeesTotal xsi:nil="true"/>
 <ns2:HQBranchIndicator xsi:nil="true"/>
 <ns2:BranchFlag xsi:nil="true"/>
```

```
<ns2:OobInd xsi:nil="true"/>
<ns2:LineOfBusiness xsi:nil="true"/>
<ns2:CongDistCode xsi:nil="true"/>
<ns2:ImportInd xsi:nil="true"/>
<ns2:ExportInd xsi:nil="true"/>
<ns2:LaborSurplusInd xsi:nil="true"/>
<ns2:MinorityOwnedInd xsi:nil="true"/>
<ns2:MinorityOwnedType xsi:nil="true"/>
<ns2:WomanOwnedInd xsi:nil="true"/>
<ns2:Disadv8aInd xsi:nil="true"/>
<ns2:SmallBusInd xsi:nil="true"/>
<ns2:RentOwnInd xsi:nil="true"/>
<ns2:DbRating xsi:nil="true"/>
<ns2:GSAIndicatorFlag xsi:nil="true"/>
<ns2:JgzzFiscalCode xsi:nil="true"/>
<ns2:AnalysisFy xsi:nil="true"/>
<ns2:FiscalYearendMonth xsi:nil="true"/>
<ns2:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
<ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
<ns2:YearEstablished xsi:nil="true"/>
<ns2:MissionStatement xsi:nil="true"/>
<ns2:OrganizationType xsi:nil="true"/>
<ns2:BusinessScope xsi:nil="true"/>
<ns2:CorporationClass xsi:nil="true"/>
<ns2:LocalBusIdenType xsi:nil="true"/>
<ns2:LocalBusIdentifier xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:RegistrationType xsi:nil="true"/>
<ns2:TotalEmployeesText xsi:nil="true"/>
<ns2:TotalEmployeesInd xsi:nil="true"/>
<ns2:TotalEmployeesEstimatedIndicator xsi:nil="true"/>
<ns2:TotalEmployeesMinimumIndicator xsi:nil="true"/>
<ns2:ParentSubInd xsi:nil="true"/>
<ns2:IncorpYear xsi:nil="true"/>
<ns2:LastUpdateDate>2013-01-09T01:49:12.398Z</ns2:LastUpdateDate>
<ns2:LastUpdatedBy>DATA_STEWARD_MGR</ns2:LastUpdatedBy>
<ns2:CreationDate>2013-01-09T01:49:12.057Z</ns2:CreationDate>
<ns2:CreatedBy>DATA_STEWARD_MGR</ns2:CreatedBy>
<ns2:LastUpdateLogin>D2D8CA75ECBF5962E0432720F00A4204</ns2:LastUpdateLogin>
<ns2:RequestId>1612131</ns2:RequestId>
<ns2:ContentSourceNumber xsi:nil="true"/>
<ns2:EffectiveStartDate>2013-01-09</ns2:EffectiveStartDate>
<ns2:EffectiveEndDate>4712-12-31</ns2:EffectiveEndDate>
<ns2:PublicPrivateOwnershipFlag xsi:nil="true"/>
<ns2:LocalActivityCodeType xsi:nil="true"/>
<ns2:LocalActivityCode xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddress xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressText xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressEstimation xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressMinimum xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:TotalPaymentAmount xsi:nil="true"/>
<ns2:DisplayedDUNSPartyIdentifier xsi:nil="true"/>
<ns2:Status>A</ns2:Status>
<ns2:BusinessReport xsi:nil="true"/>
<ns2:DUNSNumberC xsi:nil="true"/>
<ns2:CreatedByModule>SALES</ns2:CreatedByModule>
<ns2:BankOrBranchNumber xsi:nil="true"/>
<ns2:BankCode xsi:nil="true"/>
<ns2:BranchCode xsi:nil="true"/>
<ns2:DoNotConfuseWith xsi:nil="true"/>
<ns2:HomeCountry xsi:nil="true"/>
<ns2:GrowthStrategyDescription xsi:nil="true"/>
<ns2:SeblUserKeyLoc xsi:nil="true"/>
<ns2:StockSymbol xsi:nil="true"/>
<ns2:TradingPartnerIdentifier xsi:nil="true"/>
```

```
<ns2:OrigSystem xsi:nil="true"/>
<ns2:OrigSystemReference>300100019114233</ns2:OrigSystemReference>
<ns2:EffectiveSequence>1</ns2:EffectiveSequence>
<ns2:Comments xsi:nil="true"/>
<ns2:EffectiveLatestChange>Y</ns2:EffectiveLatestChange>
<ns2:OrganizationSize xsi:nil="true"/>
<ns2:SuffixOverriddenFlag>false</ns2:SuffixOverriddenFlag>
<ns2:UniqueNameAlias>AvinashTestOrgForRelationship2</ns2:UniqueNameAlias>
<ns2:UniqueNameSuffix xsi:nil="true"/>
<ns2:DomesticUltimateDUNSNumberC xsi:nil="true"/>
<ns2:GlobalUltimateDUNSNumberC xsi:nil="true"/>
<ns2:ParentDUNSNumberC xsi:nil="true"/>
<ns2:CorpCurrencyCode>USD</ns2:CorpCurrencyCode>
<ns2:CurcyConvRateType>Corporate</ns2:CurcyConvRateType>
<ns2:CurrencyCode>USD</ns2:CurrencyCode>
<ns2:PartyNumber>CDRM_53645</ns2:PartyNumber>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredContactName xsi:nil="true"/>
<ns2:PreferredContactEmailAddress xsi:nil="true"/>
<ns2:PreferredContactFormattedPhoneNumber xsi:nil="true"/>
<ns2:PrimaryAddressLine1>Test Address</ns2:PrimaryAddressLine1>
<ns2:PrimaryAddressLine2 xsi:nil="true"/>
<ns2:PrimaryAddressLine3 xsi:nil="true"/>
<ns2:PrimaryAddressLine4 xsi:nil="true"/>
<ns2:Alias xsi:nil="true"/>
<ns2:PrimaryAddressCity>Redwood City</ns2:PrimaryAddressCity>
<ns2:PrimaryAddressCountry>US</ns2:PrimaryAddressCountry>
<ns2:PrimaryAddressCounty xsi:nil="true"/>
<ns2:PrimaryEmailAddress xsi:nil="true"/>
<ns2:PrimaryFormattedPhoneNumber xsi:nil="true"/>
<ns2:IdenAddrLocationId>300100019115150</ns2:IdenAddrLocationId>
<ns2:IdenAddrPartySiteId>300100019114238</ns2:IdenAddrPartySiteId>
<ns2:PrimaryLanguage xsi:nil="true"/>
<ns2:PartyUniqueName>AvinashTestOrgForRelationship2</ns2:PartyUniqueName>
<ns2:PrimaryAddressPostalCode>94063</ns2:PrimaryAddressPostalCode>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PrimaryEmailId xsi:nil="true"/>
<ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns2:PrimaryPhoneId xsi:nil="true"/>
<ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:PrimaryPhoneLineType xsi:nil="true"/>
<ns2:PrimaryPhoneNumber xsi:nil="true"/>
<ns2:PrimaryPhonePurpose xsi:nil="true"/>
<ns2:PrimaryWebId xsi:nil="true"/>
<ns2:Pronunciation xsi:nil="true"/>
<ns2:PrimaryAddressProvince xsi:nil="true"/>
<ns2:SICCode xsi:nil="true"/>
<ns2:SICCodeType xsi:nil="true"/>
<ns2:PrimaryAddressState>CA</ns2:PrimaryAddressState>
<ns2:PrimaryURL xsi:nil="true"/>
<ns2:ValidatedFlag xsi:nil="true"/>
<ns2:ThirdPartyFlag xsi:nil="true"/>
<ns2:LastUpdateSourceSystem>FUSION</ns2:LastUpdateSourceSystem>
<ns2:LastSourceUpdateDate>2013-01-09T01:49:12.398Z</ns2:LastSourceUpdateDate>
<ns2:DataCloudStatus xsi:nil="true"/>
<ns2:LastEnrichmentDate xsi:nil="true"/>
<ns2:OrgInformation>
<ns3:OrganizationProfileId>300100019114233</ns3:OrganizationProfileId>
<ns3:hzOrgprof1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
```

```
<ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
</ns2:OrgInformation>
<ns2:CustomContact_Id_c xsi:nil="true"/>
<ns2:CustomContact_c xsi:nil="true"/>
</ns1:result>
.....
<ns1:result xsi:type="ns2:OrganizationProfile" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/organization/" xmlns:ns2="http://
xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/" xmlns:xsi="http://www.w3.org/2001/
XMLSchema-instance" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/types/">
<ns2:OrganizationProfileId>35417</ns2:OrganizationProfileId>
<ns2:PartyId>35417</ns2:PartyId>
<ns2:OrganizationName>Travel Office</ns2:OrganizationName>
<ns2:EnquiryDUNS xsi:nil="true"/>
<ns2:CeoName xsi:nil="true"/>
<ns2:CeoTitle xsi:nil="true"/>
<ns2:PrincipalName xsi:nil="true"/>
<ns2:PrincipalTitle xsi:nil="true"/>
<ns2:LegalStatus xsi:nil="true"/>
<ns2:ControlYr xsi:nil="true"/>
<ns2:EmployeesTotal xsi:nil="true"/>
<ns2:HQBranchIndicator xsi:nil="true"/>
<ns2:BranchFlag xsi:nil="true"/>
<ns2:OobInd xsi:nil="true"/>
<ns2:LineOfBusiness xsi:nil="true"/>
<ns2:CongDistCode xsi:nil="true"/>
<ns2:ImportInd xsi:nil="true"/>
<ns2:ExportInd xsi:nil="true"/>
<ns2:LaborSurplusInd xsi:nil="true"/>
<ns2:MinorityOwnedInd xsi:nil="true"/>
<ns2:MinorityOwnedType xsi:nil="true"/>
<ns2:WomanOwnedInd xsi:nil="true"/>
<ns2:Disadv8aInd xsi:nil="true"/>
<ns2:SmallBusInd xsi:nil="true"/>
<ns2:RentOwnInd xsi:nil="true"/>
<ns2:DbRating xsi:nil="true"/>
<ns2:GSAIndicatorFlag xsi:nil="true"/>
<ns2:JgzzFiscalCode xsi:nil="true"/>
<ns2:AnalysisFy xsi:nil="true"/>
<ns2:FiscalYearendMonth xsi:nil="true"/>
<ns2:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
<ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
<ns2:YearEstablished xsi:nil="true"/>
<ns2:MissionStatement xsi:nil="true"/>
<ns2:OrganizationType xsi:nil="true"/>
<ns2:BusinessScope xsi:nil="true"/>
<ns2:CorporationClass xsi:nil="true"/>
<ns2:LocalBusIdenType xsi:nil="true"/>
<ns2:LocalBusIdentifier xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:RegistrationType xsi:nil="true"/>
<ns2:TotalEmployeesText xsi:nil="true"/>
<ns2:TotalEmployeesInd xsi:nil="true"/>
<ns2:TotalEmployeesEstimatedIndicator xsi:nil="true"/>
<ns2:TotalEmployeesMinimumIndicator xsi:nil="true"/>
<ns2:ParentSubInd xsi:nil="true"/>
<ns2:IncorpYear xsi:nil="true"/>
<ns2:LastUpdateDate>2003-07-16T10:54:09Z</ns2:LastUpdateDate>
<ns2:LastUpdatedBy>1006185</ns2:LastUpdatedBy>
<ns2:CreationDate>2003-07-16T10:54:09Z</ns2:CreationDate>
<ns2:CreatedBy>1006185</ns2:CreatedBy>
<ns2:LastUpdateLogin>2223278</ns2:LastUpdateLogin>
<ns2:RequestId xsi:nil="true"/>
<ns2:ContentSourceNumber xsi:nil="true"/>
<ns2:EffectiveStartDate>2003-07-16</ns2:EffectiveStartDate>
```

```
<ns2:EffectiveEndDate>4712-12-31</ns2:EffectiveEndDate>
<ns2:PublicPrivateOwnershipFlag xsi:nil="true"/>
<ns2:LocalActivityCodeType xsi:nil="true"/>
<ns2:LocalActivityCode xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddress xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressText xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressEstimation xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressMinimum xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:TotalPaymentAmount xsi:nil="true"/>
<ns2:DisplayedDUNSPartyIdentifier xsi:nil="true"/>
<ns2:Status>A</ns2:Status>
<ns2:BusinessReport xsi:nil="true"/>
<ns2:DUNSNumberC xsi:nil="true"/>
<ns2:CreatedByModule>IGS</ns2:CreatedByModule>
<ns2:BankOrBranchNumber xsi:nil="true"/>
<ns2:BankCode xsi:nil="true"/>
<ns2:BranchCode xsi:nil="true"/>
<ns2:DoNotConfuseWith xsi:nil="true"/>
<ns2:HomeCountry xsi:nil="true"/>
<ns2:GrowthStrategyDescription xsi:nil="true"/>
<ns2:SeblUserKeyLoc xsi:nil="true"/>
<ns2:StockSymbol xsi:nil="true"/>
<ns2:TradingPartnerIdentifier xsi:nil="true"/>
<ns2:OrigSystem xsi:nil="true"/>
<ns2:OrigSystemReference>35417</ns2:OrigSystemReference>
<ns2:EffectiveSequence>1</ns2:EffectiveSequence>
<ns2:Comments xsi:nil="true"/>
<ns2:EffectiveLatestChange>Y</ns2:EffectiveLatestChange>
<ns2:OrganizationSize xsi:nil="true"/>
<ns2:SuffixOverriddenFlag>false</ns2:SuffixOverriddenFlag>
<ns2:UniqueNameAlias>Travel Office</ns2:UniqueNameAlias>
<ns2:UniqueNameSuffix xsi:nil="true"/>
<ns2:DomesticUltimateDUNSNumberC xsi:nil="true"/>
<ns2:GlobalUltimateDUNSNumberC xsi:nil="true"/>
<ns2:ParentDUNSNumberC xsi:nil="true"/>
<ns2:CorpCurrencyCode xsi:nil="true"/>
<ns2:CurcyConvRateType xsi:nil="true"/>
<ns2:CurrencyCode xsi:nil="true"/>
<ns2:PartyNumber>TRAVEL</ns2:PartyNumber>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredContactName xsi:nil="true"/>
<ns2:PreferredContactEmailAddress xsi:nil="true"/>
<ns2:PreferredContactFormattedPhoneNumber xsi:nil="true"/>
<ns2:PrimaryAddressLine1 xsi:nil="true"/>
<ns2:PrimaryAddressLine2 xsi:nil="true"/>
<ns2:PrimaryAddressLine3 xsi:nil="true"/>
<ns2:PrimaryAddressLine4 xsi:nil="true"/>
<ns2:Alias xsi:nil="true"/>
<ns2:PrimaryAddressCity xsi:nil="true"/>
<ns2:PrimaryAddressCountry xsi:nil="true"/>
<ns2:PrimaryAddressCounty xsi:nil="true"/>
<ns2:PrimaryEmailAddress xsi:nil="true"/>
<ns2:PrimaryFormattedPhoneNumber xsi:nil="true"/>
<ns2:IdenAddrLocationId xsi:nil="true"/>
<ns2:IdenAddrPartySiteId xsi:nil="true"/>
<ns2:PrimaryLanguage xsi:nil="true"/>
<ns2:PartyUniqueName>Travel Office</ns2:PartyUniqueName>
<ns2:PrimaryAddressPostalCode xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PrimaryEmailId xsi:nil="true"/>
<ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
```

```
 <ns2:PrimaryPhoneId xsi:nil="true"/>
 <ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
 <ns2:PrimaryPhoneExtension xsi:nil="true"/>
 <ns2:PrimaryPhoneLineType xsi:nil="true"/>
 <ns2:PrimaryPhoneNumber xsi:nil="true"/>
 <ns2:PrimaryPhonePurpose xsi:nil="true"/>
 <ns2:PrimaryWebId xsi:nil="true"/>
 <ns2:Pronunciation xsi:nil="true"/>
 <ns2:PrimaryAddressProvince xsi:nil="true"/>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:SICCodeType xsi:nil="true"/>
 <ns2:PrimaryAddressState xsi:nil="true"/>
 <ns2:PrimaryURL xsi:nil="true"/>
 <ns2:ValidatedFlag xsi:nil="true"/>
 <ns2:ThirdPartyFlag xsi:nil="true"/>
 <ns2:LastUpdateSourceSystem>FUSION</ns2:LastUpdateSourceSystem>
 <ns2:LastSourceUpdateDate>2003-07-16T10:54:09Z</ns2:LastSourceUpdateDate>
 <ns2:DataCloudStatus xsi:nil="true"/>
 <ns2:LastEnrichmentDate xsi:nil="true"/>
 <ns2:OrgInformation>
 <ns3:OrganizationProfileId>35417</ns3:OrganizationProfileId>
 <ns3:hzOrgprof1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
 </ns2:OrgInformation>
 <ns2:CustomContact_Id_c xsi:nil="true"/>
 <ns2:CustomContact_c xsi:nil="true"/>
 </ns1:result>
 <ns1:result xsi:type="ns2:OrganizationProfile" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/organization/" xmlns:ns2="http://
xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/" xmlns:xsi="http://www.w3.org/2001/
XMLSchema-instance" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/types/">
 <ns2:OrganizationProfileId>35418</ns2:OrganizationProfileId>
 <ns2:PartyId>35418</ns2:PartyId>
 <ns2:OrganizationName>Financial Administration Department</ns2:OrganizationName>
 <ns2:EnquiryDUNS xsi:nil="true"/>
 <ns2:CeoName xsi:nil="true"/>
 <ns2:CeoTitle xsi:nil="true"/>
 <ns2:PrincipalName xsi:nil="true"/>
 <ns2:PrincipalTitle xsi:nil="true"/>
 <ns2:LegalStatus xsi:nil="true"/>
 <ns2:ControlYr xsi:nil="true"/>
 <ns2:EmployeesTotal xsi:nil="true"/>
 <ns2:HQBranchIndicator xsi:nil="true"/>
 <ns2:BranchFlag xsi:nil="true"/>
 <ns2:OobInd xsi:nil="true"/>
 <ns2:LineOfBusiness xsi:nil="true"/>
 <ns2:CongDistCode xsi:nil="true"/>
 <ns2:ImportInd xsi:nil="true"/>
 <ns2:ExportInd xsi:nil="true"/>
 <ns2:LaborSurplusInd xsi:nil="true"/>
 <ns2:MinorityOwnedInd xsi:nil="true"/>
 <ns2:MinorityOwnedType xsi:nil="true"/>
 <ns2:WomanOwnedInd xsi:nil="true"/>
 <ns2:Disadv8aInd xsi:nil="true"/>
 <ns2:SmallBusInd xsi:nil="true"/>
 <ns2:RentOwnInd xsi:nil="true"/>
 <ns2:DbRating xsi:nil="true"/>
 <ns2:GSAIndicatorFlag xsi:nil="true"/>
 <ns2:JgzzFiscalCode xsi:nil="true"/>
 <ns2:AnalysisFy xsi:nil="true"/>
 <ns2:FiscalYearendMonth xsi:nil="true"/>
 <ns2:CurrentFiscalYearPotentialRevenueAmount xsi:nil="true"/>
 <ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
```

```
<ns2:YearEstablished xsi:nil="true"/>
<ns2:MissionStatement xsi:nil="true"/>
<ns2:OrganizationType xsi:nil="true"/>
<ns2:BusinessScope xsi:nil="true"/>
<ns2:CorporationClass xsi:nil="true"/>
<ns2:LocalBusIdenType xsi:nil="true"/>
<ns2:LocalBusIdentifier xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:RegistrationType xsi:nil="true"/>
<ns2:TotalEmployeesText xsi:nil="true"/>
<ns2:TotalEmployeesInd xsi:nil="true"/>
<ns2:TotalEmployeesEstimatedIndicator xsi:nil="true"/>
<ns2:TotalEmployeesMinimumIndicator xsi:nil="true"/>
<ns2:ParentSubInd xsi:nil="true"/>
<ns2:IncorpYear xsi:nil="true"/>
<ns2:LastUpdateDate>2003-07-16T10:54:18Z</ns2:LastUpdateDate>
<ns2:LastUpdatedBy>1006185</ns2:LastUpdatedBy>
<ns2:CreationDate>2003-07-16T10:54:18Z</ns2:CreationDate>
<ns2:CreatedBy>1006185</ns2:CreatedBy>
<ns2:LastUpdateLogin>2223278</ns2:LastUpdateLogin>
<ns2:RequestId xsi:nil="true"/>
<ns2:ContentSourceNumber xsi:nil="true"/>
<ns2:EffectiveStartDate>2003-07-16</ns2:EffectiveStartDate>
<ns2:EffectiveEndDate>4712-12-31</ns2:EffectiveEndDate>
<ns2:PublicPrivateOwnershipFlag xsi:nil="true"/>
<ns2:LocalActivityCodeType xsi:nil="true"/>
<ns2:LocalActivityCode xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddress xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressText xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressEstimation xsi:nil="true"/>
<ns2:EmployeesAtPrimaryAddressMinimum xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:TotalPaymentAmount xsi:nil="true"/>
<ns2:DisplayedDUNSPartyIdentifier xsi:nil="true"/>
<ns2:Status>A</ns2:Status>
<ns2:BusinessReport xsi:nil="true"/>
<ns2:DUNSNumberC xsi:nil="true"/>
<ns2:CreatedByModule>IGS</ns2:CreatedByModule>
<ns2:BankOrBranchNumber xsi:nil="true"/>
<ns2:BankCode xsi:nil="true"/>
<ns2:BranchCode xsi:nil="true"/>
<ns2:DoNotConfuseWith xsi:nil="true"/>
<ns2:HomeCountry xsi:nil="true"/>
<ns2:GrowthStrategyDescription xsi:nil="true"/>
<ns2:SeblUserKeyLoc xsi:nil="true"/>
<ns2:StockSymbol xsi:nil="true"/>
<ns2:TradingPartnerIdentifier xsi:nil="true"/>
<ns2:OrigSystem xsi:nil="true"/>
<ns2:OrigSystemReference>35418</ns2:OrigSystemReference>
<ns2:EffectiveSequence>1</ns2:EffectiveSequence>
<ns2:Comments xsi:nil="true"/>
<ns2:EffectiveLatestChange>Y</ns2:EffectiveLatestChange>
<ns2:OrganizationSize xsi:nil="true"/>
<ns2:SuffixOverriddenFlag>false</ns2:SuffixOverriddenFlag>
<ns2:UniqueNameAlias>Financial Administration Department</ns2:UniqueNameAlias>
<ns2:UniqueNameSuffix xsi:nil="true"/>
<ns2:DomesticUltimateDUNSNumberC xsi:nil="true"/>
<ns2:GlobalUltimateDUNSNumberC xsi:nil="true"/>
<ns2:ParentDUNSNumberC xsi:nil="true"/>
<ns2:CorpCurrencyCode xsi:nil="true"/>
<ns2:CurcyConvRateType xsi:nil="true"/>
<ns2:CurrencyCode xsi:nil="true"/>
<ns2:PartyNumber>FINANCIALADMIN</ns2:PartyNumber>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
```

```
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredContactName xsi:nil="true"/>
<ns2:PreferredContactEmailAddress xsi:nil="true"/>
<ns2:PreferredContactFormattedPhoneNumber xsi:nil="true"/>
<ns2:PrimaryAddressLine1 xsi:nil="true"/>
<ns2:PrimaryAddressLine2 xsi:nil="true"/>
<ns2:PrimaryAddressLine3 xsi:nil="true"/>
<ns2:PrimaryAddressLine4 xsi:nil="true"/>
<ns2:Alias xsi:nil="true"/>
<ns2:PrimaryAddressCity xsi:nil="true"/>
<ns2:PrimaryAddressCountry xsi:nil="true"/>
<ns2:PrimaryAddressCounty xsi:nil="true"/>
<ns2:PrimaryEmailAddress xsi:nil="true"/>
<ns2:PrimaryFormattedPhoneNumber xsi:nil="true"/>
<ns2:IdenAddrLocationId xsi:nil="true"/>
<ns2:IdenAddrPartySiteId xsi:nil="true"/>
<ns2:PrimaryLanguage xsi:nil="true"/>
<ns2:PartyUniqueName>Financial Administration Department</ns2:PartyUniqueName>
<ns2:PrimaryAddressPostalCode xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PrimaryEmailId xsi:nil="true"/>
<ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns2:PrimaryPhoneId xsi:nil="true"/>
<ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:PrimaryPhoneLineType xsi:nil="true"/>
<ns2:PrimaryPhoneNumber xsi:nil="true"/>
<ns2:PrimaryPhonePurpose xsi:nil="true"/>
<ns2:PrimaryWebId xsi:nil="true"/>
<ns2:Pronunciation xsi:nil="true"/>
<ns2:PrimaryAddressProvince xsi:nil="true"/>
<ns2:SICCode xsi:nil="true"/>
<ns2:SICCodeType xsi:nil="true"/>
<ns2:PrimaryAddressState xsi:nil="true"/>
<ns2:PrimaryURL xsi:nil="true"/>
<ns2:ValidatedFlag xsi:nil="true"/>
<ns2:ThirdPartyFlag xsi:nil="true"/>
<ns2:LastUpdateSourceSystem>FUSION</ns2:LastUpdateSourceSystem>
<ns2:LastSourceUpdateDate>2003-07-16T10:54:18Z</ns2:LastSourceUpdateDate>
<ns2:DataCloudStatus xsi:nil="true"/>
<ns2:LastEnrichmentDate xsi:nil="true"/>
<ns2:OrgInformation>
<ns3:OrganizationProfileId>35418</ns3:OrganizationProfileId>
<ns3:hzOrgprof1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
</ns2:OrgInformation>
<ns2:CustomContact_Id_c xsi:nil="true"/>
<ns2:CustomContact_c xsi:nil="true"/>
</ns1:result>
</ns0:findOrganizationProfileResponse>
</env:Body>
</env:Envelope>
```

Person Web Services Sample Payloads

The following topics describe the sample payloads for PersonService External V2, for different use cases.

For each use case, you can find the person type, the operation involved to invoke the web service, followed by sample payload.

Create a Contact

In this use case, we'll create a contact.

Operation: **createPerson**

Request Body

```
<?xml version="1.0" encoding="UTF-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/
types/">
 <ns1:createPerson>
 <ns1:personParty xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/">
 <ns2:CreatedByModule>AMS</ns2:CreatedByModule>
 <ns2:PersonProfile>
 <ns2:PersonFirstName>Randy1</ns2:PersonFirstName>
 <ns2:PersonMiddleName>Andy1</ns2:PersonMiddleName>
 <ns2:PersonLastName>E1</ns2:PersonLastName>
 <ns2:CreatedByModule>AMS</ns2:CreatedByModule>
 </ns2:PersonProfile>
 <ns2:PartyUsageAssignment xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/">
 <ns3:PartyUsageCode>CUSTOMER</ns3:PartyUsageCode>
 <ns3:CreatedByModule>AMS</ns3:CreatedByModule>
 </ns2:PartyUsageAssignment>
 <ns2:Email xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/">
 <ns4:CreatedByModule>AMS</ns4:CreatedByModule>
 <ns4:EmailAddress>test@oracle.com</ns4:EmailAddress>
 <ns4:OwnerTableName>HZ_PARTIES</ns4:OwnerTableName>
 </ns2:Email>
 <ns2:InstantMessaging xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/">
 <ns5:CreatedByModule>AMS</ns5:CreatedByModule>
 <ns5:InstantMessengerType>YAHOO</ns5:InstantMessengerType>
 <ns5:InstantMessagingAddress>vankadari.mahesh@oracle.com</ns5:InstantMessagingAddress>
 </ns2:InstantMessaging>
 </ns1:personParty>
 </ns1:createPerson>
 </soap:Body>
</soap:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/
types/">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule//
PersonService/createPersonResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:f75d6158-30da-42d3-90e7-07ef9d070ffc</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:createPersonResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/
applicationModule/types/">
 <ns1:result xsi:type="ns2:PersonResult" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/personService/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/
applicationModule/types/" xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/" xmlns:ns8="http://
xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/" xmlns:xsi="http://www.w3.org/2001/
XMLSchema-instance">
```

```
<ns2:Value>
<ns2:PartyId>300100551137328</ns2:PartyId>
<ns2:PartyNumber>CDRM_967434</ns2:PartyNumber>
<ns2:PartyName>Randy1 Andy1 E1</ns2:PartyName>
<ns2:PartyType>PERSON</ns2:PartyType>
<ns2:ValidatedFlag xsi:nil="true"/>
<ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
<ns2:LastUpdateLogin>CC281AE734175500E0531C5CF00A80C2</ns2:LastUpdateLogin>
<ns2:CreationDate>2021-09-17T11:14:52.0Z</ns2:CreationDate>
<ns2:RequestId xsi:nil="true"/>
<ns2:LastUpdateDate>2021-09-17T11:15:03.268Z</ns2:LastUpdateDate>
<ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
<ns2:OrigSystemReference>300100551137328</ns2:OrigSystemReference>
<ns2:SICCode xsi:nil="true"/>
<ns2:JgzzFiscalCode xsi:nil="true"/>
<ns2:PersonFirstName>Randy1</ns2:PersonFirstName>
<ns2:PersonPreNameAdjunct xsi:nil="true"/>
<ns2:PersonLastName>E1</ns2:PersonLastName>
<ns2:PersonMiddleName>Andy1</ns2:PersonMiddleName>
<ns2:PersonTitle xsi:nil="true"/>
<ns2:PersonNameSuffix xsi:nil="true"/>
<ns2:PersonPreviousLastName xsi:nil="true"/>
<ns2:PersonAcademicTitle xsi:nil="true"/>
<ns2:Country xsi:nil="true"/>
<ns2:Address2 xsi:nil="true"/>
<ns2:Address1 xsi:nil="true"/>
<ns2:Address4 xsi:nil="true"/>
<ns2:Address3 xsi:nil="true"/>
<ns2:PostalCode xsi:nil="true"/>
<ns2:City xsi:nil="true"/>
<ns2:Province xsi:nil="true"/>
<ns2:State xsi:nil="true"/>
<ns2:County xsi:nil="true"/>
<ns2:Status>A</ns2:Status>
<ns2:URL xsi:nil="true"/>
<ns2:SICCodeType xsi:nil="true"/>
<ns2:EmailAddress>test@oracle.com</ns2:EmailAddress>
<ns2:GSAIndicatorFlag xsi:nil="true"/>
<ns2:LanguageName xsi:nil="true"/>
<ns2:MissionStatement xsi:nil="true"/>
<ns2:CategoryCode xsi:nil="true"/>
<ns2:ThirdPartyFlag xsi:nil="true"/>
<ns2:Salutation xsi:nil="true"/>
<ns2:CreatedByModule>AMS</ns2:CreatedByModule>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:PrimaryPhonePurpose xsi:nil="true"/>
<ns2:PrimaryPhoneContactPTId xsi:nil="true"/>
<ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
<ns2:PrimaryPhoneLineType xsi:nil="true"/>
<ns2:PrimaryPhoneNumber xsi:nil="true"/>
<ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:IdenAddrLocationId xsi:nil="true"/>
<ns2:PrimaryEmailContactPTId>300100551137329</ns2:PrimaryEmailContactPTId>
<ns2:IdenAddrPartySiteId xsi:nil="true"/>
<ns2:PersonLastNamePrefix xsi:nil="true"/>
<ns2:PrimaryURLContactPTId xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PersonSecondLastName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:Gender xsi:nil="true"/>
```

```
<ns2:MaritalStatus xsi:nil="true"/>
<ns2:Comments xsi:nil="true"/>
<ns2:DateOfBirth xsi:nil="true"/>
<ns2:UserGUID xsi:nil="true"/>
<ns2:PartyUniqueName>Randy1 Andy1 E1</ns2:PartyUniqueName>
<ns2:SourceSystem xsi:nil="true"/>
<ns2:SourceSystemReferenceValue xsi:nil="true"/>
<ns2:SourceSystemUpdateDate xsi:nil="true"/>
<ns2:Email xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/">
<ns5:ContactPointId>300100551137329</ns5:ContactPointId>
<ns5:ContactPointType>EMAIL</ns5:ContactPointType>
<ns5:Status>A</ns5:Status>
<ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
<ns5:OwnerTableId>300100551137328</ns5:OwnerTableId>
<ns5:PrimaryFlag>true</ns5:PrimaryFlag>
<ns5:OrigSystemReference>300100551137329</ns5:OrigSystemReference>
<ns5:LastUpdateDate>2021-09-17T11:15:01.685Z</ns5:LastUpdateDate>
<ns5:LastUpdatedBy>SALES_ADMIN</ns5:LastUpdatedBy>
<ns5:CreationDate>2021-09-17T11:14:52.059Z</ns5:CreationDate>
<ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
<ns5:LastUpdateLogin>CC281AE734175500E0531C5CF00A80C2</ns5:LastUpdateLogin>
<ns5:RequestId xsi:nil="true"/>
<ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
<ns5:CreatedByModule>AMS</ns5:CreatedByModule>
<ns5:ContactPointPurpose xsi:nil="true"/>
<ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
<ns5:StartDate>2021-09-17</ns5:StartDate>
<ns5:EndDate>4712-12-31</ns5:EndDate>
<ns5:RelationshipId xsi:nil="true"/>
<ns5:PartyUsageCode xsi:nil="true"/>
<ns5:OrigSystem xsi:nil="true"/>
<ns5:EmailFormat/>
<ns5:EmailAddress>test@oracle.com</ns5:EmailAddress>
<ns5:PartyName>Randy1 Andy1 E1</ns5:PartyName>
<ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
</ns2:Email>
<ns2:InstantMessaging xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/">
<ns5:ContactPointId>300100551137330</ns5:ContactPointId>
<ns5:ContactPointType>INSTANT_MESSAGING</ns5:ContactPointType>
<ns5:Status>A</ns5:Status>
<ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
<ns5:OwnerTableId>300100551137328</ns5:OwnerTableId>
<ns5:PrimaryFlag>true</ns5:PrimaryFlag>
<ns5:OrigSystemReference>300100551137330</ns5:OrigSystemReference>
<ns5:LastUpdateDate>2021-09-17T11:15:02.361Z</ns5:LastUpdateDate>
<ns5:LastUpdatedBy>SALES_ADMIN</ns5:LastUpdatedBy>
<ns5:CreationDate>2021-09-17T11:14:52.378Z</ns5:CreationDate>
<ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
<ns5:LastUpdateLogin>CC281AE734175500E0531C5CF00A80C2</ns5:LastUpdateLogin>
<ns5:RequestId xsi:nil="true"/>
<ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
<ns5:CreatedByModule>AMS</ns5:CreatedByModule>
<ns5:ContactPointPurpose xsi:nil="true"/>
<ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
<ns5:StartDate>2021-09-17</ns5:StartDate>
<ns5:EndDate>4712-12-31</ns5:EndDate>
<ns5:RelationshipId xsi:nil="true"/>
<ns5:PartyUsageCode xsi:nil="true"/>
<ns5:OrigSystem xsi:nil="true"/>
<ns5:InstantMessengerType>YAHOO</ns5:InstantMessengerType>
<ns5:InstantMessagingAddress>vankadari.mahesh@oracle.com</ns5:InstantMessagingAddress>
<ns5:PartyName>Randy1 Andy1 E1</ns5:PartyName>
<ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
</ns2:InstantMessaging>
<ns2:PersonProfile xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/">
<ns2:PersonProfileId>300100551137328</ns2:PersonProfileId>
```

```
<ns2:PartyId>300100551137328</ns2:PartyId>
<ns2:PersonName>Randy1 Andy1 E1</ns2:PersonName>
<ns2:LastUpdateDate>2021-09-17T11:15:02.428Z</ns2:LastUpdateDate>
<ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
<ns2:CreationDate>2021-09-17T11:14:55.272Z</ns2:CreationDate>
<ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
<ns2:LastUpdateLogin>CC281AE734175500E0531C5CF00A80C2</ns2:LastUpdateLogin>
<ns2:RequestId xsi:nil="true"/>
<ns2:PersonPreNameAdjunct xsi:nil="true"/>
<ns2:PersonFirstName>Randy1</ns2:PersonFirstName>
<ns2:PersonMiddleName>Andy1</ns2:PersonMiddleName>
<ns2:PersonLastName>E1</ns2:PersonLastName>
<ns2:PersonNameSuffix xsi:nil="true"/>
<ns2:PersonTitle xsi:nil="true"/>
<ns2:PersonAcademicTitle xsi:nil="true"/>
<ns2:PersonPreviousLastName xsi:nil="true"/>
<ns2:PersonInitials xsi:nil="true"/>
<ns2:JgzzFiscalCode xsi:nil="true"/>
<ns2:DateOfBirth xsi:nil="true"/>
<ns2:PlaceOfBirth xsi:nil="true"/>
<ns2:DateOfDeath xsi:nil="true"/>
<ns2:Gender xsi:nil="true"/>
<ns2:DeclaredEthnicity xsi:nil="true"/>
<ns2:MaritalStatus xsi:nil="true"/>
<ns2:MaritalStatusEffectiveDate xsi:nil="true"/>
<ns2:PersonalIncomeAmount xsi:nil="true"/>
<ns2:RentOwnInd xsi:nil="true"/>
<ns2:LastKnownGPS xsi:nil="true"/>
<ns2:EffectiveStartDate>2021-09-17</ns2:EffectiveStartDate>
<ns2:EffectiveEndDate>4712-12-31</ns2:EffectiveEndDate>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:Status>A</ns2:Status>
<ns2:CreatedByModule>AMS</ns2:CreatedByModule>
<ns2:DeceasedFlag>false</ns2:DeceasedFlag>
<ns2:Comments xsi:nil="true"/>
<ns2:PersonLastNamePrefix xsi:nil="true"/>
<ns2:PersonSecondLastName xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:OrigSystem xsi:nil="true"/>
<ns2:OrigSystemReference>300100551137328</ns2:OrigSystemReference>
<ns2:EffectiveSequence>1</ns2:EffectiveSequence>
<ns2:HeadOfHouseholdFlag xsi:nil="true"/>
<ns2:HouseholdIncomeAmount xsi:nil="true"/>
<ns2:HouseholdSize xsi:nil="true"/>
<ns2:EffectiveLatestChange>Y</ns2:EffectiveLatestChange>
<ns2:SuffixOverriddenFlag>false</ns2:SuffixOverriddenFlag>
<ns2:UniqueNameSuffix xsi:nil="true"/>
<ns2:CorpCurrencyCode>USD</ns2:CorpCurrencyCode>
<ns2:CurcyConvRateType>Corporate</ns2:CurcyConvRateType>
<ns2:CurrencyCode>USD</ns2:CurrencyCode>
<ns2:PartyNumber>CDRM_967434</ns2:PartyNumber>
<ns2:Salutation xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PrimaryAddressLine1 xsi:nil="true"/>
<ns2:PrimaryAddressLine2 xsi:nil="true"/>
<ns2:PrimaryAddressLine3 xsi:nil="true"/>
<ns2:PrimaryAddressLine4 xsi:nil="true"/>
<ns2:Alias xsi:nil="true"/>
<ns2:PrimaryAddressCity xsi:nil="true"/>
<ns2:PrimaryAddressCountry xsi:nil="true"/>
<ns2:PrimaryAddressCounty xsi:nil="true"/>
<ns2:PrimaryEmailAddress>test@oracle.com</ns2:PrimaryEmailAddress>
<ns2:PrimaryFormattedAddress xsi:nil="true"/>
```

```
<ns2:PrimaryFormattedPhoneNumber xsi:nil="true"/>
<ns2:PrimaryLanguage xsi:nil="true"/>
<ns2:PartyUniqueName>Randy1 Andy1 E1</ns2:PartyUniqueName>
<ns2:PrimaryAddressPostalCode xsi:nil="true"/>
<ns2:PreferredContactEmail xsi:nil="true"/>
<ns2:PreferredContactName xsi:nil="true"/>
<ns2:PreferredContactPhone xsi:nil="true"/>
<ns2:PreferredContactURL xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PrimaryEmailId>300100551137329</ns2:PrimaryEmailId>
<ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns2:PrimaryPhoneId xsi:nil="true"/>
<ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:PrimaryPhoneLineType xsi:nil="true"/>
<ns2:PrimaryPhoneNumber xsi:nil="true"/>
<ns2:PrimaryPhonePurpose xsi:nil="true"/>
<ns2:PrimaryWebId xsi:nil="true"/>
<ns2:Pronunciation xsi:nil="true"/>
<ns2:PrimaryAddressProvince xsi:nil="true"/>
<ns2:PrimaryAddressState xsi:nil="true"/>
<ns2:PrimaryURL xsi:nil="true"/>
<ns2:ValidatedFlag xsi:nil="true"/>
<ns2:PrimaryAddressLatitude xsi:nil="true"/>
<ns2:PrimaryAddressLongitude xsi:nil="true"/>
<ns2:PrimaryAddressLocationId/>
<ns2:FavoriteContactFlag>false</ns2:FavoriteContactFlag>
<ns2:Distance xsi:nil="true"/>
<ns2:SalesAffinityCode xsi:nil="true"/>
<ns2:SalesBuyingRoleCode xsi:nil="true"/>
<ns2:DepartmentCode xsi:nil="true"/>
<ns2:Department xsi:nil="true"/>
<ns2:JobTitleCode xsi:nil="true"/>
<ns2:JobTitle xsi:nil="true"/>
<ns2:DoNotCallFlag>false</ns2:DoNotCallFlag>
<ns2:DoNotContactFlag>false</ns2:DoNotContactFlag>
<ns2:DoNotEmailFlag>false</ns2:DoNotEmailFlag>
<ns2:DoNotMailFlag>false</ns2:DoNotMailFlag>
<ns2:LastContactDate xsi:nil="true"/>
<ns2:PrimaryCustomerId xsi:nil="true"/>
<ns2:PrimaryCustomerRelationshipId xsi:nil="true"/>
<ns2:PrimaryCustomerName/>
<ns2:LastSourceUpdateDate>2021-09-17T11:15:02.0Z</ns2:LastSourceUpdateDate>
<ns2:LastUpdateSourceSystem>UNKNOWN</ns2:LastUpdateSourceSystem>
<ns2:DataCloudStatus xsi:nil="true"/>
<ns2:LastEnrichmentDate xsi:nil="true"/>
</ns2:PersonProfile>
<ns2:PartyUsageAssignment>
<ns3:PartyUsgAssignmentId>300100551137331</ns3:PartyUsgAssignmentId>
<ns3:PartyId>300100551137328</ns3:PartyId>
<ns3:PartyUsageCode>CUSTOMER</ns3:PartyUsageCode>
<ns3:EffectiveStartDate>2021-09-17</ns3:EffectiveStartDate>
<ns3:EffectiveEndDate>4712-12-31</ns3:EffectiveEndDate>
<ns3:StatusFlag>true</ns3:StatusFlag>
<ns3:Comments xsi:nil="true"/>
<ns3:OwnerTableName xsi:nil="true"/>
<ns3:OwnerTableId xsi:nil="true"/>
<ns3:CreatedByModule>AMS</ns3:CreatedByModule>
<ns3:ObjectVersionNumber>1</ns3:ObjectVersionNumber>
<ns3:CreatedBy>SALES_ADMIN</ns3:CreatedBy>
<ns3:CreationDate>2021-09-17T11:15:00.144Z</ns3:CreationDate>
<ns3:LastUpdateLogin>CC281AE734175500E0531C5CF00A80C2</ns3:LastUpdateLogin>
<ns3:LastUpdateDate>2021-09-17T11:15:00.915Z</ns3:LastUpdateDate>
<ns3:LastUpdatedBy>SALES_ADMIN</ns3:LastUpdatedBy>
<ns3:RequestId xsi:nil="true"/>
```

```
    </ns2:PartyUsageAssignment>
    </ns2:Value>
    </ns1:result>
    </ns0:createPersonResponse>
    </env:Body>
   </env:Envelope>
```

Update Customer Contact Point

In this use case we will update a customer contact point

Operation: **mergePerson**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
 xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/
applicationModule/types/" xmlns:per="http://xmlns.oracle.com/apps/cdm/foundation/
parties/personService/" xmlns:par="http://xmlns.oracle.com/apps/cdm/foundation/parties/
partyService/" xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/" xmlns:con="http://xmlns.oracle.com/apps/cdm/foundation/parties/
contactPointService/" xmlns:con1="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/contactPoint/" xmlns:par1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
partySite/" xmlns:per1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/"
 xmlns:rel="http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/"
 xmlns:org="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/orgContact/"
 xmlns:rel1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/relationship/">
   <soapenv:Header/>
   <soapenv:Body>
      <typ:mergePerson>
         <typ:personParty>
            <per:PartyId>300000340253723</per:PartyId>
            <per:Phone>
               <con:ContactPointId>300000340690502</con:ContactPointId>
               <con:PhoneCountryCode>1</con:PhoneCountryCode>
               <con:PhoneNumber>333333</con:PhoneNumber>
               <con:RelationshipId>300000340253725</con:RelationshipId>
            </per:Phone>
         </typ:personParty>
      </typ:mergePerson>
   </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing">
   <env:Header>
      <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/
applicationModule/PersonService/mergePersonResponse</wsa:Action>
      <wsa:MessageID>urn:uuid:dd4c8251-49bc-4368-9534-fc3374d11319</wsa:MessageID>
   </env:Header>
   <env:Body>
      <ns0:mergePersonResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/
parties/personService/applicationModule/types/">
         <ns1:result xsi:type="ns2:PersonResult" xmlns:ns5="http://xmlns.oracle.com/apps/
cdm/foundation/parties/contactPointService/" xmlns:ns8="http://xmlns.oracle.com/apps/
```

```
cdm/foundation/parties/relationshipService/" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/
foundation/parties/personService/" xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/"
 xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/" xmlns:ns3="http://xmlns.oracle.com/
apps/cdm/foundation/parties/partyService/" xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/
applicationModule/types/">
            <ns2:Value>
               <ns2:PartyId>300000340253723</ns2:PartyId>
               <ns2:PartyNumber>Opty_901803</ns2:PartyNumber>
               <ns2:PartyName>ManojToTest1 RelationshipReAssociation</ns2:PartyName>
               <ns2:PartyType>PERSON</ns2:PartyType>
               <ns2:ValidatedFlag xsi:nil="true"/>
               <ns2:LastUpdatedBy>pr@t</ns2:LastUpdatedBy>
               <ns2:LastUpdateLogin>026F302407250B6DE063A658500AFF60</ns2:LastUpdateLogin>
               <ns2:CreationDate>2023-08-21T04:05:21Z</ns2:CreationDate>
               <ns2:RequestId xsi:nil="true"/>
               <ns2:LastUpdateDate>2023-09-08T07:19:27.499Z</ns2:LastUpdateDate>
               <ns2:CreatedBy>pr@t</ns2:CreatedBy>
               <ns2:OrigSystemReference>300000340253723</ns2:OrigSystemReference>
               <ns2:SICCode xsi:nil="true"/>
               <ns2:JgzzFiscalCode xsi:nil="true"/>
               <ns2:PersonFirstName>ManojToTest1</ns2:PersonFirstName>
               <ns2:PersonPreNameAdjunct>MS.</ns2:PersonPreNameAdjunct>
               <ns2:PersonLastName>RelationshipReAssociation</ns2:PersonLastName>
               <ns2:PersonMiddleName xsi:nil="true"/>
               <ns2:PersonTitle xsi:nil="true"/>
               <ns2:PersonNameSuffix xsi:nil="true"/>
               <ns2:PersonPreviousLastName xsi:nil="true"/>
               <ns2:PersonAcademicTitle xsi:nil="true"/>
               <ns2:Country xsi:nil="true"/>
               <ns2:Address2 xsi:nil="true"/>
               <ns2:Address1 xsi:nil="true"/>
               <ns2:Address4 xsi:nil="true"/>
               <ns2:Address3 xsi:nil="true"/>
               <ns2:PostalCode xsi:nil="true"/>
               <ns2:City xsi:nil="true"/>
               <ns2:Province xsi:nil="true"/>
               <ns2:State xsi:nil="true"/>
               <ns2:County xsi:nil="true"/>
               <ns2:Status>A</ns2:Status>
               <ns2:URL xsi:nil="true"/>
               <ns2:SICCodeType xsi:nil="true"/>
               <ns2:EmailAddress xsi:nil="true"/>
               <ns2:GSAIndicatorFlag xsi:nil="true"/>
               <ns2:LanguageName xsi:nil="true"/>
               <ns2:MissionStatement xsi:nil="true"/>
               <ns2:CategoryCode xsi:nil="true"/>
               <ns2:ThirdPartyFlag xsi:nil="true"/>
               <ns2:Salutation xsi:nil="true"/>
               <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
               <ns2:CertReasonCode xsi:nil="true"/>
               <ns2:CertificationLevel xsi:nil="true"/>
               <ns2:PrimaryPhonePurpose xsi:nil="true"/>
               <ns2:PrimaryPhoneContactPTId>300000340690502</ns2:PrimaryPhoneContactPTId>
               <ns2:PrimaryPhoneCountryCode>1</ns2:PrimaryPhoneCountryCode>
               <ns2:PrimaryPhoneLineType>GEN</ns2:PrimaryPhoneLineType>
               <ns2:PrimaryPhoneNumber>333333</ns2:PrimaryPhoneNumber>
               <ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
               <ns2:PreferredContactMethod xsi:nil="true"/>
               <ns2:PrimaryPhoneExtension xsi:nil="true"/>
```

```
                <ns2:IdenAddrLocationId xsi:nil="true"/>
                <ns2:PrimaryEmailContactPTId xsi:nil="true"/>
                <ns2:IdenAddrPartySiteId xsi:nil="true"/>
                <ns2:PersonLastNamePrefix xsi:nil="true"/>
                <ns2:PrimaryURLContactPTId xsi:nil="true"/>
                <ns2:PreferredName xsi:nil="true"/>
                <ns2:PersonSecondLastName xsi:nil="true"/>
                <ns2:PreferredNameId xsi:nil="true"/>
                <ns2:PreferredContactPersonId xsi:nil="true"/>
                <ns2:InternalFlag>false</ns2:InternalFlag>
                <ns2:PreferredFunctionalCurrency xsi:nil="true"/>
                <ns2:Gender xsi:nil="true"/>
                <ns2:MaritalStatus xsi:nil="true"/>
                <ns2:Comments xsi:nil="true"/>
                <ns2:DateOfBirth xsi:nil="true"/>
                <ns2:UserGUID xsi:nil="true"/>
                <ns2:PartyUniqueName>ManojToTest1 RelationshipReAssociation</
ns2:PartyUniqueName>
                <ns2:SourceSystem xsi:nil="true"/>
                <ns2:SourceSystemReferenceValue xsi:nil="true"/>
                <ns2:SourceSystemUpdateDate xsi:nil="true"/>
                <ns2:Phone xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/contactPoint/">
                    <ns5:ContactPointId>300000340690502</ns5:ContactPointId>
                    <ns5:ContactPointType>PHONE</ns5:ContactPointType>
                    <ns5:Status>A</ns5:Status>
                    <ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
                    <ns5:OwnerTableId>300000340253723</ns5:OwnerTableId>
                    <ns5:PrimaryFlag>true</ns5:PrimaryFlag>
                    <ns5:OrigSystemReference>300000340690502</ns5:OrigSystemReference>
                    <ns5:LastUpdateDate>2023-09-08T07:19:27Z</ns5:LastUpdateDate>
                    <ns5:LastUpdatedBy>pr@t</ns5:LastUpdatedBy>
                    <ns5:CreationDate>2023-09-08T07:16:11.001Z</ns5:CreationDate>
                    <ns5:CreatedBy>pr@t</ns5:CreatedBy>
                    <ns5:LastUpdateLogin>026F302407250B6DE063A658500AFF60</
ns5:LastUpdateLogin>
                    <ns5:RequestId xsi:nil="true"/>
                    <ns5:ObjectVersionNumber>2</ns5:ObjectVersionNumber>
                    <ns5:CreatedByModule>TCA_FORM_WRAPPER</ns5:CreatedByModule>
                    <ns5:ContactPointPurpose xsi:nil="true"/>
                    <ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
                    <ns5:StartDate>2023-09-08</ns5:StartDate>
                    <ns5:EndDate>4712-12-31</ns5:EndDate>
                    <ns5:RelationshipId>300000340253725</ns5:RelationshipId>
                    <ns5:PartyUsageCode xsi:nil="true"/>
                    <ns5:OrigSystem xsi:nil="true"/>
                    <ns5:PhoneCallingCalendar xsi:nil="true"/>
                    <ns5:LastContactDtTime xsi:nil="true"/>
                    <ns5:PhoneAreaCode xsi:nil="true"/>
                    <ns5:PhoneCountryCode>1</ns5:PhoneCountryCode>
                    <ns5:PhoneNumber>333333</ns5:PhoneNumber>
                    <ns5:PhoneExtension xsi:nil="true"/>
                    <ns5:PhoneLineType>GEN</ns5:PhoneLineType>
                    <ns5:RawPhoneNumber>1-333333</ns5:RawPhoneNumber>
                    <ns5:PagerTypeCode xsi:nil="true"/>
                    <ns5:FormattedPhoneNumber>+1 333333</ns5:FormattedPhoneNumber>
                    <ns5:TransposedPhoneNumber>3333331</ns5:TransposedPhoneNumber>
                    <ns5:PartyName>ManojToTest1 RelationshipReAssociation</ns5:PartyName>
                    <ns5:TimezoneCode xsi:nil="true"/>
                    <ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
```

```
                </ns2:Phone>
             </ns2:Value>
          </ns1:result>
       </ns0:mergePersonResponse>
    </env:Body>
</env:Envelope>
```

Update a Contact

In this use case, we'll update null value for a contact.

Operation: **processContact**

Request Body

```
<soapenv:Envelope
xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:typ="http://xmlns.oracle.com/apps/crmCommon/salesParties/contactService/types/"
xmlns:con="http://xmlns.oracle.com/apps/crmCommon/salesParties/contactService/"
xmlns:com="http://xmlns.oracle.com/apps/crmCommon/salesParties/commonService/"
xmlns:cus="http://xmlns.oracle.com/apps/custom"
xmlns:not="http://xmlns.oracle.com/apps/crmCommon/notes/noteService"
xmlns:not1="http://xmlns.oracle.com/apps/crmCommon/notes/flex/noteDff/"
xmlns:typ1="http://xmlns.oracle.com/adf/svc/types/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:processContact>
 <typ:changeOperation>Merge</typ:changeOperation>
 <typ:contact>
 <con:PartyId>300100554763260</con:PartyId>
 <con:LastName xsi:nil="true"/>
 </typ:contact>
 </typ:processContact>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/crmCommon/salesParties/contactService/ContactService/
processContactResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:92fccc1f-1f43-4330-9689-96c4f2305918</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:processContactResponse xmlns:ns0="http://xmlns.oracle.com/apps/crmCommon/salesParties/contactService/
types/">
 <ns1:result xsi:type="ns0:DataObjectResult" xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/"
 xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
 xmlns:ns1="http://xmlns.oracle.com/apps/crmCommon/salesParties/contactService/types/">
 <ns0:Value xsi:type="ns5:Contact" xmlns:ns2="http://xmlns.oracle.com/apps/crmCommon/salesParties/
commonService/" xmlns:ns4="http://xmlns.oracle.com/apps/crmCommon/notes/noteService" xmlns:ns5="http://
xmlns.oracle.com/apps/crmCommon/salesParties/contactService/">
 <ns5:PartyId>300100554763260</ns5:PartyId>
 <ns5:PartyNumber>CDRM_957283</ns5:PartyNumber>
 <ns5:SourceSystem xsi:nil="true"/>
 <ns5:SourceSystemReferenceValue xsi:nil="true"/>
 <ns5:AccountPartyId xsi:nil="true"/>
 <ns5:AccountPartyNumber xsi:nil="true"/>
 <ns5:AccountSourceSystem xsi:nil="true"/>
```

```
<ns5:AccountSourceSystemReferenceValue xsi:nil="true"/>
<ns5:AccountName xsi:nil="true"/>
<ns5:FirstName>New Contact</ns5:FirstName>
<ns5:LastName xsi:nil="true"/>
<ns5:LastNamePrefix xsi:nil="true"/>
<ns5:MiddleName xsi:nil="true"/>
<ns5:UniqueNameSuffix xsi:nil="true"/>
<ns5:ContactName>New Contact</ns5:ContactName>
<ns5:PreviousLastName xsi:nil="true"/>
<ns5:SecondLastName xsi:nil="true"/>
<ns5:OwnerPartyId>100010025532672</ns5:OwnerPartyId>
<ns5:OwnerPartyNumber>100010025532672</ns5:OwnerPartyNumber>
<ns5:OwnerEmailAddress>sendmail-test-discard@oracle.com</ns5:OwnerEmailAddress>
<ns5:OwnerName>Gabrielle Lee</ns5:OwnerName>
<ns5:Type>ZCA_CONTACT</ns5:Type>
<ns5:ExistingCustomerFlag>false</ns5:ExistingCustomerFlag>
<ns5:ExistingCustomerFlagLastUpdateDate xsi:nil="true"/>
<ns5:NamedFlag>false</ns5:NamedFlag>
<ns5:LastAssignmentDate xsi:nil="true"/>
<ns5:LastAssignmentDateTime xsi:nil="true"/>
<ns5:AssignmentExceptionFlag>false</ns5:AssignmentExceptionFlag>
<ns5:SalesProfileStatus>ACTIVE</ns5:SalesProfileStatus>
<ns5:TaxpayerIdentificationNumber xsi:nil="true"/>
<ns5:DateOfBirth xsi:nil="true"/>
<ns5:PlaceOfBirth xsi:nil="true"/>
<ns5:DateOfDeath xsi:nil="true"/>
<ns5:DeceasedFlag>false</ns5:DeceasedFlag>
<ns5:Gender xsi:nil="true"/>
<ns5:MaritalStatus xsi:nil="true"/>
<ns5:MaritalStatusEffectiveDate xsi:nil="true"/>
<ns5:DeclaredEthnicity xsi:nil="true"/>
<ns5:PreferredFunctionalCurrency xsi:nil="true"/>
<ns5:PersonalIncomeAmount xsi:nil="true"/>
<ns5:HeadOfHouseholdFlag>false</ns5:HeadOfHouseholdFlag>
<ns5:HouseholdIncomeAmount xsi:nil="true"/>
<ns5:HouseholdSize xsi:nil="true"/>
<ns5:Salutation xsi:nil="true"/>
<ns5:SalutoryIntroduction xsi:nil="true"/>
<ns5:Title xsi:nil="true"/>
<ns5:AcademicTitle xsi:nil="true"/>
<ns5:Initials xsi:nil="true"/>
<ns5:RentOrOwnIndicator xsi:nil="true"/>
<ns5:CertificationLevel xsi:nil="true"/>
<ns5:CertificationReasonCode xsi:nil="true"/>
<ns5:Comments xsi:nil="true"/>
<ns5:PreferredContactMethod xsi:nil="true"/>
<ns5:FavoriteContactFlag>false</ns5:FavoriteContactFlag>
<ns5:Department xsi:nil="true"/>
<ns5:DepartmentCode xsi:nil="true"/>
<ns5:DoNotCallFlag>false</ns5:DoNotCallFlag>
<ns5:DoNotContactFlag>false</ns5:DoNotContactFlag>
<ns5:DoNotEmailFlag>false</ns5:DoNotEmailFlag>
<ns5:DoNotMailFlag>false</ns5:DoNotMailFlag>
<ns5:JobTitle xsi:nil="true"/>
<ns5:JobTitleCode xsi:nil="true"/>
<ns5:LastContactDate xsi:nil="true"/>
<ns5:SalesAffinityCode xsi:nil="true"/>
<ns5:SalesBuyingRoleCode xsi:nil="true"/>
<ns5:CurrencyCode>USD</ns5:CurrencyCode>
<ns5:CurcyConvRateType>Corporate</ns5:CurcyConvRateType>
<ns5:CorpCurrencyCode>USD</ns5:CorpCurrencyCode>
<ns5:DataCloudStatus xsi:nil="true"/>
<ns5:LastEnrichmentDate xsi:nil="true"/>
<ns5:PartyStatus>A</ns5:PartyStatus>
<ns5:CreatedByModule>HZ_WS</ns5:CreatedByModule>
<ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
```

```
<ns5:CreationDate>2022-03-15T12:35:42.531Z</ns5:CreationDate>
<ns5:LastUpdateDate>2022-03-15T12:36:17.001Z</ns5:LastUpdateDate>
<ns5:LastUpdateLogin>D9D7802D972E6937E0531C5CF00AE157</ns5:LastUpdateLogin>
<ns5:LastUpdatedBy>FUSION</ns5:LastUpdatedBy>
<ns5:WorkPhoneCountryCode xsi:nil="true"/>
<ns5:WorkPhoneAreaCode xsi:nil="true"/>
<ns5:WorkPhoneNumber xsi:nil="true"/>
<ns5:WorkPhoneExtension xsi:nil="true"/>
<ns5:FormattedWorkPhoneNumber xsi:nil="true"/>
<ns5:RawWorkPhoneNumber xsi:nil="true"/>
<ns5:MobileCountryCode xsi:nil="true"/>
<ns5:MobileAreaCode xsi:nil="true"/>
<ns5:MobileNumber xsi:nil="true"/>
<ns5:MobileExtension xsi:nil="true"/>
<ns5:FormattedMobileNumber xsi:nil="true"/>
<ns5:RawMobileNumber xsi:nil="true"/>
<ns5:FaxCountryCode xsi:nil="true"/>
<ns5:FaxAreaCode xsi:nil="true"/>
<ns5:FaxNumber xsi:nil="true"/>
<ns5:FaxExtension xsi:nil="true"/>
<ns5:FormattedFaxNumber xsi:nil="true"/>
<ns5:RawFaxNumber xsi:nil="true"/>
<ns5:HomePhoneCountryCode xsi:nil="true"/>
<ns5:HomePhoneAreaCode xsi:nil="true"/>
<ns5:HomePhoneNumber xsi:nil="true"/>
<ns5:FormattedHomePhoneNumber xsi:nil="true"/>
<ns5:RawHomePhoneNumber xsi:nil="true"/>
<ns5:EmailFormat xsi:nil="true"/>
<ns5:EmailAddress xsi:nil="true"/>
<ns5:ClassificationCategory xsi:nil="true"/>
<ns5:ClassificationCode xsi:nil="true"/>
<ns5:ContactIsPrimaryForAccount xsi:nil="true"/>
<ns5:NameSuffix xsi:nil="true"/>
<ns5:ContactUniqueName>New Contact</ns5:ContactUniqueName>
<ns5:RecordSet xsi:nil="true"/>
<ns5:MyBusinessContact xsi:nil="true"/>
<ns5:ContactRole xsi:nil="true"/>
<ns5:RegistrationStatus xsi:nil="true"/>
<ns5:UpdateFlag>true</ns5:UpdateFlag>
<ns5:DeleteFlag>true</ns5:DeleteFlag>
<ns5:AddressNumber xsi:nil="true"/>
<ns5:AddressElementAttribute1 xsi:nil="true"/>
<ns5:AddressElementAttribute2 xsi:nil="true"/>
<ns5:AddressElementAttribute3 xsi:nil="true"/>
<ns5:AddressElementAttribute4 xsi:nil="true"/>
<ns5:AddressElementAttribute5 xsi:nil="true"/>
<ns5:AddressLine1 xsi:nil="true"/>
<ns5:AddressLine2 xsi:nil="true"/>
<ns5:AddressLine3 xsi:nil="true"/>
<ns5:AddressLine4 xsi:nil="true"/>
<ns5:Building xsi:nil="true"/>
<ns5:City xsi:nil="true"/>
<ns5:Country xsi:nil="true"/>
<ns5:County xsi:nil="true"/>
<ns5:FloorNumber xsi:nil="true"/>
<ns5:PostalCode xsi:nil="true"/>
<ns5:PostalPlus4Code xsi:nil="true"/>
<ns5:Province xsi:nil="true"/>
<ns5:State xsi:nil="true"/>
<ns5:Mailstop xsi:nil="true"/>
<ns5:AddressLinesPhonetic xsi:nil="true"/>
<ns5:AddressType xsi:nil="true"/>
<ns5:TimezoneCode xsi:nil="true"/>
</ns0:Value>
</ns1:result>
</ns0:processContactResponse>
```

```
 </env:Body>
</env:Envelope>
```

Create a Person with Multiple Addresses

In this use case, we'll create a person with multiple addresses. This use case requires a person to be created using **createPerson** operation of Person Web Service and then assigning a address to the `PartyId` using **createAddress** operation of Address Web Service.

Operation: **createAddress**

Request Body

```
<soapenv:Envelope xmlns:add="http://xmlns.oracle.com/apps/crmCommon/salesParties/addressService/"
 xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://xmlns.oracle.com/apps/
crmCommon/salesParties/addressService/types/">
 <soapenv:Body>
 <typ:createAddress>
 <typ:address>
 <add:PartyId>300100551137328</add:PartyId>
 <add:CreatedByModule>HZ_WS</add:CreatedByModule>
 <add:PrimaryFlag>true</add:PrimaryFlag>
 <add:Status>A</add:Status>
 <add:Address1>3450 North Triumph Boulevard</add:Address1>
 <add:Address2>Suite 300</add:Address2>
 <add:City>Lehi</add:City>
 <add:Country>US</add:Country>
 <add:PostalCode>84043</add:PostalCode>
 <add:State>Utah</add:State>
 <add:AddressPurpose>
 <add:Purpose>SHIP_TO</add:Purpose>
 </add:AddressPurpose>
 </typ:address>
 </typ:createAddress>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing" xmlns:typ="http://xmlns.oracle.com/apps/crmCommon/salesParties/addressService/types/">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/crmCommon/salesParties/addressService//AddressService/
createAddressResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:4b7ab4f8-68bc-4ff2-826d-3bce0e40c5c3</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:createAddressResponse xmlns:ns0="http://xmlns.oracle.com/apps/crmCommon/salesParties/addressService/
types/">
 <ns2:result xsi:type="ns1:AddressResult" xmlns:ns2="http://xmlns.oracle.com/apps/crmCommon/salesParties/
addressService/types/" xmlns:ns1="http://xmlns.oracle.com/apps/crmCommon/salesParties/addressService/"
 xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
 <ns1:Value>
 <ns1:PartyId>300100551137328</ns1:PartyId>
 <ns1:PartyNumber>CDRM_967434</ns1:PartyNumber>
 <ns1:PartySourceSystem xsi:nil="true"/>
 <ns1:PartySourceSystemReferenceValue xsi:nil="true"/>
 <ns1:AddressId>300100551149826</ns1:AddressId>
 <ns1:AddressNumber>CDRM_784854</ns1:AddressNumber>
 <ns1:Comments xsi:nil="true"/>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
```

```
 <ns1:DoNotMailFlag>false</ns1:DoNotMailFlag>
 <ns1:CorpCurrencyCode>USD</ns1:CorpCurrencyCode>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
 <ns1:CreationDate>2021-09-17T11:42:19.238Z</ns1:CreationDate>
 <ns1:CurcyConvRateType>Corporate</ns1:CurcyConvRateType>
 <ns1:CurrencyCode>USD</ns1:CurrencyCode>
 <ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
 <ns1:FormattedAddress>3450 North Triumph Boulevard,Suite 300,LEHI, UTAH 84043</ns1:FormattedAddress>
 <ns1:FormattedMultilineAddress>3450 North Triumph Boulevard&lt;BR>Suite 300&lt;BR>LEHI, UTAH 84043</
ns1:FormattedMultilineAddress>
 <ns1:LastUpdateDate>2021-09-17T11:42:23.535Z</ns1:LastUpdateDate>
 <ns1:LastUpdateLogin>CB95683771782F55E0531C5CF00AFE56</ns1:LastUpdateLogin>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:LocationId>300100551149827</ns1:LocationId>
 <ns1:Mailstop xsi:nil="true"/>
 <ns1:PrimaryFlag>true</ns1:PrimaryFlag>
 <ns1:StartDateActive>2021-09-17</ns1:StartDateActive>
 <ns1:Status>A</ns1:Status>
 <ns1:AddrElementAttribute1 xsi:nil="true"/>
 <ns1:AddrElementAttribute2 xsi:nil="true"/>
 <ns1:AddrElementAttribute3 xsi:nil="true"/>
 <ns1:AddrElementAttribute4 xsi:nil="true"/>
 <ns1:AddrElementAttribute5 xsi:nil="true"/>
 <ns1:Address1>3450 North Triumph Boulevard</ns1:Address1>
 <ns1:Address2>Suite 300</ns1:Address2>
 <ns1:Address3 xsi:nil="true"/>
 <ns1:Address4 xsi:nil="true"/>
 <ns1:AddressLinesPhonetic xsi:nil="true"/>
 <ns1:Building xsi:nil="true"/>
 <ns1:City>Lehi</ns1:City>
 <ns1:ClliCode xsi:nil="true"/>
 <ns1:Country>US</ns1:Country>
 <ns1:County xsi:nil="true"/>
 <ns1:DateValidated xsi:nil="true"/>
 <ns1:Description xsi:nil="true"/>
 <ns1:FloorNumber xsi:nil="true"/>
 <ns1:HouseType xsi:nil="true"/>
 <ns1:Latitude xsi:nil="true"/>
 <ns1:LocationDirections xsi:nil="true"/>
 <ns1:Longitude xsi:nil="true"/>
 <ns1:PostalCode>84043</ns1:PostalCode>
 <ns1:PostalPlus4Code xsi:nil="true"/>
 <ns1:Province xsi:nil="true"/>
 <ns1:State>Utah</ns1:State>
 <ns1:ValidatedFlag>false</ns1:ValidatedFlag>
 <ns1:ValidationStartDate xsi:nil="true"/>
 <ns1:ValidationStatusCode xsi:nil="true"/>
 <ns1:SourceSystem xsi:nil="true"/>
 <ns1:SourceSystemReferenceValue xsi:nil="true"/>
 <ns1:EffectiveDate xsi:nil="true"/>
 <ns1:AddressPurpose>
 <ns1:AddressPurposeId>300100551149829</ns1:AddressPurposeId>
 <ns1:Purpose>SHIP_TO</ns1:Purpose>
 <ns1:DeleteFlag xsi:nil="true"/>
 </ns1:AddressPurpose>
 </ns1:Value>
 </ns2:result>
 </ns0:createAddressResponse>
 </env:Body>
</env:Envelope>
```

Update Party Number for a Person Party

In this use case, we'll update party number for a person party.

Operation: **updatePerson**

Request Body

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
 <soap:Body xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/
types/">
 <ns1:updatePerson>
 <ns1:personParty xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/">
 <ns2:PartyId>300100551137328</ns2:PartyId>
 <ns2:PersonProfile>
 <ns2:PersonProfileId>300100551137328</ns2:PersonProfileId>
 <ns2:PersonFirstName>Vivek</ns2:PersonFirstName>
 <ns2:PersonLastName>Gokule</ns2:PersonLastName>
 </ns2:PersonProfile>
 </ns1:personParty>
 </ns1:updatePerson>
 </soap:Body>
</soap:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/
types/">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule//
PersonService/updatePersonResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:4d338464-de87-4f03-9940-4f4baa70fa42</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:updatePersonResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/
applicationModule/types/">
 <ns1:result xsi:type="ns2:PersonResult" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/personService/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/
applicationModule/types/" xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/" xmlns:ns8="http://
xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/" xmlns:xsi="http://www.w3.org/2001/
XMLSchema-instance">
 <ns2:Value>
 <ns2:PartyId>300100551137328</ns2:PartyId>
 <ns2:PartyNumber>CDRM_967434</ns2:PartyNumber>
 <ns2:PartyName>Vivek Andy1 Gokule</ns2:PartyName>
 <ns2:PartyType>PERSON</ns2:PartyType>
 <ns2:ValidatedFlag xsi:nil="true"/>
 <ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
 <ns2:LastUpdateLogin>CB958EB8E96D2F5BE0531C5CF00AC347</ns2:LastUpdateLogin>
 <ns2:CreationDate>2021-09-17T11:14:52.0Z</ns2:CreationDate>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:LastUpdateDate>2021-09-17T11:25:51.104Z</ns2:LastUpdateDate>
 <ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
 <ns2:OrigSystemReference>300100551137328</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:JgzzFiscalCode xsi:nil="true"/>
 <ns2:PersonFirstName>Vivek</ns2:PersonFirstName>
 <ns2:PersonPreNameAdjunct xsi:nil="true"/>
 <ns2:PersonLastName>Gokule</ns2:PersonLastName>
```

```
<ns2:PersonMiddleName>Andy1</ns2:PersonMiddleName>
<ns2:PersonTitle xsi:nil="true"/>
<ns2:PersonNameSuffix xsi:nil="true"/>
<ns2:PersonPreviousLastName xsi:nil="true"/>
<ns2:PersonAcademicTitle xsi:nil="true"/>
<ns2:Country xsi:nil="true"/>
<ns2:Address2 xsi:nil="true"/>
<ns2:Address1 xsi:nil="true"/>
<ns2:Address4 xsi:nil="true"/>
<ns2:Address3 xsi:nil="true"/>
<ns2:PostalCode xsi:nil="true"/>
<ns2:City xsi:nil="true"/>
<ns2:Province xsi:nil="true"/>
<ns2:State xsi:nil="true"/>
<ns2:County xsi:nil="true"/>
<ns2:Status>A</ns2:Status>
<ns2:URL xsi:nil="true"/>
<ns2:SICCodeType xsi:nil="true"/>
<ns2:EmailAddress>test@oracle.com</ns2:EmailAddress>
<ns2:GSAIndicatorFlag xsi:nil="true"/>
<ns2:LanguageName xsi:nil="true"/>
<ns2:MissionStatement xsi:nil="true"/>
<ns2:CategoryCode xsi:nil="true"/>
<ns2:ThirdPartyFlag xsi:nil="true"/>
<ns2:Salutation xsi:nil="true"/>
<ns2:CreatedByModule>AMS</ns2:CreatedByModule>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:PrimaryPhonePurpose xsi:nil="true"/>
<ns2:PrimaryPhoneContactPTId xsi:nil="true"/>
<ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
<ns2:PrimaryPhoneLineType xsi:nil="true"/>
<ns2:PrimaryPhoneNumber xsi:nil="true"/>
<ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:IdenAddrLocationId xsi:nil="true"/>
<ns2:PrimaryEmailContactPTId>300100551137329</ns2:PrimaryEmailContactPTId>
<ns2:IdenAddrPartySiteId xsi:nil="true"/>
<ns2:PersonLastNamePrefix xsi:nil="true"/>
<ns2:PrimaryURLContactPTId xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PersonSecondLastName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:Gender xsi:nil="true"/>
<ns2:MaritalStatus xsi:nil="true"/>
<ns2:Comments xsi:nil="true"/>
<ns2:DateOfBirth xsi:nil="true"/>
<ns2:UserGUID xsi:nil="true"/>
<ns2:PartyUniqueName>Vivek Andy1 Gokule</ns2:PartyUniqueName>
<ns2:SourceSystem xsi:nil="true"/>
<ns2:SourceSystemReferenceValue xsi:nil="true"/>
<ns2:SourceSystemUpdateDate xsi:nil="true"/>
<ns2:PersonProfile xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/">
<ns2:PersonProfileId>300100551137328</ns2:PersonProfileId>
<ns2:PartyId>300100551137328</ns2:PartyId>
<ns2:PersonName>Vivek Andy1 Gokule</ns2:PersonName>
<ns2:LastUpdateDate>2021-09-17T11:25:51.001Z</ns2:LastUpdateDate>
<ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
<ns2:CreationDate>2021-09-17T11:14:55.272Z</ns2:CreationDate>
<ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
<ns2:LastUpdateLogin>CB958EB8E96D2F5BE0531C5CF00AC347</ns2:LastUpdateLogin>
<ns2:RequestId xsi:nil="true"/>
```

```
<ns2:PersonPreNameAdjunct xsi:nil="true"/>
<ns2:PersonFirstName>Vivek</ns2:PersonFirstName>
<ns2:PersonMiddleName>Andy1</ns2:PersonMiddleName>
<ns2:PersonLastName>Gokule</ns2:PersonLastName>
<ns2:PersonNameSuffix xsi:nil="true"/>
<ns2:PersonTitle xsi:nil="true"/>
<ns2:PersonAcademicTitle xsi:nil="true"/>
<ns2:PersonPreviousLastName xsi:nil="true"/>
<ns2:PersonInitials xsi:nil="true"/>
<ns2:JgzzFiscalCode xsi:nil="true"/>
<ns2:DateOfBirth xsi:nil="true"/>
<ns2:PlaceOfBirth xsi:nil="true"/>
<ns2:DateOfDeath xsi:nil="true"/>
<ns2:Gender xsi:nil="true"/>
<ns2:DeclaredEthnicity xsi:nil="true"/>
<ns2:MaritalStatus xsi:nil="true"/>
<ns2:MaritalStatusEffectiveDate xsi:nil="true"/>
<ns2:PersonalIncomeAmount xsi:nil="true"/>
<ns2:RentOwnInd xsi:nil="true"/>
<ns2:LastKnownGPS xsi:nil="true"/>
<ns2:EffectiveStartDate>2021-09-17</ns2:EffectiveStartDate>
<ns2:EffectiveEndDate>4712-12-31</ns2:EffectiveEndDate>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:Status>A</ns2:Status>
<ns2:CreatedByModule>AMS</ns2:CreatedByModule>
<ns2:DeceasedFlag>false</ns2:DeceasedFlag>
<ns2:Comments xsi:nil="true"/>
<ns2:PersonLastNamePrefix xsi:nil="true"/>
<ns2:PersonSecondLastName xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:OrigSystem xsi:nil="true"/>
<ns2:OrigSystemReference>300100551137328</ns2:OrigSystemReference>
<ns2:EffectiveSequence>1</ns2:EffectiveSequence>
<ns2:HeadOfHouseholdFlag xsi:nil="true"/>
<ns2:HouseholdIncomeAmount xsi:nil="true"/>
<ns2:HouseholdSize xsi:nil="true"/>
<ns2:EffectiveLatestChange>Y</ns2:EffectiveLatestChange>
<ns2:SuffixOverriddenFlag>false</ns2:SuffixOverriddenFlag>
<ns2:UniqueNameSuffix xsi:nil="true"/>
<ns2:CorpCurrencyCode>USD</ns2:CorpCurrencyCode>
<ns2:CurcyConvRateType>Corporate</ns2:CurcyConvRateType>
<ns2:CurrencyCode>USD</ns2:CurrencyCode>
<ns2:PartyNumber>CDRM_967434</ns2:PartyNumber>
<ns2:Salutation xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PrimaryAddressLine1 xsi:nil="true"/>
<ns2:PrimaryAddressLine2 xsi:nil="true"/>
<ns2:PrimaryAddressLine3 xsi:nil="true"/>
<ns2:PrimaryAddressLine4 xsi:nil="true"/>
<ns2:Alias xsi:nil="true"/>
<ns2:PrimaryAddressCity xsi:nil="true"/>
<ns2:PrimaryAddressCountry xsi:nil="true"/>
<ns2:PrimaryAddressCounty xsi:nil="true"/>
<ns2:PrimaryEmailAddress>test@oracle.com</ns2:PrimaryEmailAddress>
<ns2:PrimaryFormattedAddress xsi:nil="true"/>
<ns2:PrimaryFormattedPhoneNumber xsi:nil="true"/>
<ns2:PrimaryLanguage xsi:nil="true"/>
<ns2:PartyUniqueName>Vivek Andy1 Gokule</ns2:PartyUniqueName>
<ns2:PrimaryAddressPostalCode xsi:nil="true"/>
<ns2:PreferredContactEmail xsi:nil="true"/>
<ns2:PreferredContactName xsi:nil="true"/>
<ns2:PreferredContactPhone xsi:nil="true"/>
<ns2:PreferredContactURL xsi:nil="true"/>
```

```
<ns2:PreferredName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PrimaryEmailId>300100551137329</ns2:PrimaryEmailId>
<ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns2:PrimaryPhoneId xsi:nil="true"/>
<ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:PrimaryPhoneLineType xsi:nil="true"/>
<ns2:PrimaryPhoneNumber xsi:nil="true"/>
<ns2:PrimaryPhonePurpose xsi:nil="true"/>
<ns2:PrimaryWebId xsi:nil="true"/>
<ns2:Pronunciation xsi:nil="true"/>
<ns2:PrimaryAddressProvince xsi:nil="true"/>
<ns2:PrimaryAddressState xsi:nil="true"/>
<ns2:PrimaryURL xsi:nil="true"/>
<ns2:ValidatedFlag xsi:nil="true"/>
<ns2:PrimaryAddressLatitude xsi:nil="true"/>
<ns2:PrimaryAddressLongitude xsi:nil="true"/>
<ns2:PrimaryAddressLocationId/>
<ns2:FavoriteContactFlag>false</ns2:FavoriteContactFlag>
<ns2:Distance xsi:nil="true"/>
<ns2:SalesAffinityCode xsi:nil="true"/>
<ns2:SalesBuyingRoleCode xsi:nil="true"/>
<ns2:DepartmentCode xsi:nil="true"/>
<ns2:Department xsi:nil="true"/>
<ns2:JobTitleCode xsi:nil="true"/>
<ns2:JobTitle xsi:nil="true"/>
<ns2:DoNotCallFlag>false</ns2:DoNotCallFlag>
<ns2:DoNotContactFlag>false</ns2:DoNotContactFlag>
<ns2:DoNotEmailFlag>false</ns2:DoNotEmailFlag>
<ns2:DoNotMailFlag>false</ns2:DoNotMailFlag>
<ns2:LastContactDate xsi:nil="true"/>
<ns2:PrimaryCustomerId xsi:nil="true"/>
<ns2:PrimaryCustomerRelationshipId xsi:nil="true"/>
<ns2:PrimaryCustomerName/>
<ns2:LastSourceUpdateDate>2021-09-17T11:25:51.0Z</ns2:LastSourceUpdateDate>
<ns2:LastUpdateSourceSystem>UNKNOWN</ns2:LastUpdateSourceSystem>
<ns2:DataCloudStatus xsi:nil="true"/>
<ns2:LastEnrichmentDate xsi:nil="true"/>
</ns2:PersonProfile>
</ns2:Value>
</ns1:result>
</ns0:updatePersonResponse>
</env:Body>
</env:Envelope>
```

Update To Date of a Sales Person

In this use case we will update the To Date of a sales person.

Operation: **findResourceSalesrep**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/applicationModule/types/" xmlns:typ1="http://
xmlns.oracle.com/adf/svc/types/">
<soapenv:Header/>
<soapenv:Body>
<typ:findResourceSalesrep>
<typ:findCriteria>
<typ1:fetchStart>0</typ1:fetchStart>
```

```
 <typ1:fetchSize>-1</typ1:fetchSize>
 <typ1:filter>
 <typ1:group>
 <typ1:item>
 <typ1:upperCaseCompare>false</typ1:upperCaseCompare>
 <typ1:attribute>SalesrepNumber</typ1:attribute>
 <typ1:operator>=</typ1:operator>
 <typ1:value>Enter Problem Salesperson Number</typ1:value>
 </typ1:item>
 </typ1:group>
 </typ1:filter>
 </typ:findCriteria>
 <typ:findControl>
 <typ1:retrieveAllTranslations>false</typ1:retrieveAllTranslations>
 </typ:findControl>
 </typ:findResourceSalesrep>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/applicationModule/
SalesPersonService/findResourceSalesrepResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:fb4e7f8a-c63d-4b9e-987d-5ffff3c84cdb</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:findResourceSalesrepResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/resources/
resourceService/applicationModule/types/">
 <ns2:result xsi:type="ns1:ResourceSalesrepResult" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/
resources/resourceService/" xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://
xmlns.oracle.com/adf/svc/types/" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:ns2="http://
xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/applicationModule/types/"/>
 </ns0:findResourceSalesrepResponse>
 </env:Body>
</env:Envelope>
```

Operation: **updateResourceSalesrep**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/applicationModule/types/" xmlns:res="http://
xmlns.oracle.com/apps/cdm/foundation/resources/resourceService/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:updateResourceSalesrep>
 <typ:resourceSalesrep1>
 <res:ResourceSalesrepId>Set RESOURCE_SALESREP_ID(ResourceSalesrepId)</res:ResourceSalesrepId>
 <res:EndDateActive>Set End Date like 2023-12-31</res:EndDateActive>
 </typ:resourceSalesrep1>
 </typ:updateResourceSalesrep>
 </soapenv:Body>
</soapenv:Envelope>
```

Use Merge Person Webservice

In this use case, we'll use merge person web service.

Operation: **mergePerson**

Request Body

```
<S:Envelope xmlns:S="http://schemas.xmlsoap.org/soap/envelope/">
 <S:Body>
 <ns11:mergePerson xmlns:ns10="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/relationship/"
 xmlns:ns11="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/types/"
 xmlns:ns12="http://xmlns.oracle.com/adf/svc/types/" xmlns:ns13="http://xmlns.oracle.com/adf/svc/errors/"
 xmlns:ns14="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/" xmlns:ns15="commonj.sdo"
 xmlns:ns16="http://xmlns.oracle.com/oracleas/schema/oracle-fault-11_0" xmlns:ns2="http://xmlns.oracle.com/
apps/cdm/foundation/parties/partyService/" xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/sourceSystemRef/" xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/"
 xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/" xmlns:ns6="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/" xmlns:ns7="http://xmlns.oracle.com/apps/
cdm/foundation/parties/flex/person/" xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/
relationshipService/" xmlns:ns9="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/orgContact/">
 <ns11:personParty>
 <ns14:PartyId>300100551137328</ns14:PartyId>
 <ns14:PersonProfile xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/">
 <ns14:PartyId>300100551137328</ns14:PartyId>
 <ns14:PersonFirstName>Randy1_FN1</ns14:PersonFirstName>
 <ns14:PersonLastName>SBS_LN1</ns14:PersonLastName>
 </ns14:PersonProfile>
 </ns11:personParty>
 </ns11:mergePerson>
 </S:Body>
</S:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/
types/">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule//
PersonService/mergePersonResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:623a071b-2f86-4cb1-ba0c-a0c24c5ff9a1</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:mergePersonResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/
applicationModule/types/">
 <ns1:result xsi:type="ns2:PersonResult" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/personService/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/
applicationModule/types/" xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/" xmlns:ns8="http://
xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/" xmlns:xsi="http://www.w3.org/2001/
XMLSchema-instance">
 <ns2:Value>
 <ns2:PartyId>300100551137328</ns2:PartyId>
 <ns2:PartyNumber>CDRM_967434</ns2:PartyNumber>
 <ns2:PartyName>Randy1_FN1 Andy1 SBS_LN1</ns2:PartyName>
 <ns2:PartyType>PERSON</ns2:PartyType>
 <ns2:ValidatedFlag xsi:nil="true"/>
 <ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
 <ns2:LastUpdateLogin>CB9568175E9A2F49E0531C5CF00A4E50</ns2:LastUpdateLogin>
 <ns2:CreationDate>2021-09-17T11:14:52.0Z</ns2:CreationDate>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:LastUpdateDate>2021-09-17T11:21:13.183Z</ns2:LastUpdateDate>
 <ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
 <ns2:OrigSystemReference>300100551137328</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:JgzzFiscalCode xsi:nil="true"/>
 <ns2:PersonFirstName>Randy1_FN1</ns2:PersonFirstName>
```

```
<ns2:PersonPreNameAdjunct xsi:nil="true"/>
<ns2:PersonLastName>SBS_LN1</ns2:PersonLastName>
<ns2:PersonMiddleName>Andy1</ns2:PersonMiddleName>
<ns2:PersonTitle xsi:nil="true"/>
<ns2:PersonNameSuffix xsi:nil="true"/>
<ns2:PersonPreviousLastName xsi:nil="true"/>
<ns2:PersonAcademicTitle xsi:nil="true"/>
<ns2:Country xsi:nil="true"/>
<ns2:Address2 xsi:nil="true"/>
<ns2:Address1 xsi:nil="true"/>
<ns2:Address4 xsi:nil="true"/>
<ns2:Address3 xsi:nil="true"/>
<ns2:PostalCode xsi:nil="true"/>
<ns2:City xsi:nil="true"/>
<ns2:Province xsi:nil="true"/>
<ns2:State xsi:nil="true"/>
<ns2:County xsi:nil="true"/>
<ns2:Status>A</ns2:Status>
<ns2:URL xsi:nil="true"/>
<ns2:SICCodeType xsi:nil="true"/>

<ns2:GSAIndicatorFlag xsi:nil="true"/>
<ns2:LanguageName xsi:nil="true"/>
<ns2:MissionStatement xsi:nil="true"/>
<ns2:CategoryCode xsi:nil="true"/>
<ns2:ThirdPartyFlag xsi:nil="true"/>
<ns2:Salutation xsi:nil="true"/>
<ns2:CreatedByModule>AMS</ns2:CreatedByModule>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:PrimaryPhonePurpose xsi:nil="true"/>
<ns2:PrimaryPhoneContactPTId xsi:nil="true"/>
<ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
<ns2:PrimaryPhoneLineType xsi:nil="true"/>
<ns2:PrimaryPhoneNumber xsi:nil="true"/>
<ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:IdenAddrLocationId xsi:nil="true"/>
<ns2:PrimaryEmailContactPTId>300100551137329</ns2:PrimaryEmailContactPTId>
<ns2:IdenAddrPartySiteId xsi:nil="true"/>
<ns2:PersonLastNamePrefix xsi:nil="true"/>
<ns2:PrimaryURLContactPTId xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PersonSecondLastName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:Gender xsi:nil="true"/>
<ns2:MaritalStatus xsi:nil="true"/>
<ns2:Comments xsi:nil="true"/>
<ns2:DateOfBirth xsi:nil="true"/>
<ns2:UserGUID xsi:nil="true"/>
<ns2:PartyUniqueName>Randy1_FN1 Andy1 SBS_LN1</ns2:PartyUniqueName>
<ns2:SourceSystem xsi:nil="true"/>
<ns2:SourceSystemReferenceValue xsi:nil="true"/>
<ns2:SourceSystemUpdateDate xsi:nil="true"/>
<ns2:PersonProfile xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/">
<ns2:PersonProfileId>300100551137328</ns2:PersonProfileId>
<ns2:PartyId>300100551137328</ns2:PartyId>
<ns2:PersonName>Randy1_FN1 Andy1 SBS_LN1</ns2:PersonName>
<ns2:LastUpdateDate>2021-09-17T11:21:13.002Z</ns2:LastUpdateDate>
<ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
<ns2:CreationDate>2021-09-17T11:14:55.272Z</ns2:CreationDate>
<ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
```

```
<ns2:LastUpdateLogin>CB9568175E9A2F49E0531C5CF00A4E50</ns2:LastUpdateLogin>
<ns2:RequestId xsi:nil="true"/>
<ns2:PersonPreNameAdjunct xsi:nil="true"/>
<ns2:PersonFirstName>Randy1_FN1</ns2:PersonFirstName>
<ns2:PersonMiddleName>Andy1</ns2:PersonMiddleName>
<ns2:PersonLastName>SBS_LN1</ns2:PersonLastName>
<ns2:PersonNameSuffix xsi:nil="true"/>
<ns2:PersonTitle xsi:nil="true"/>
<ns2:PersonAcademicTitle xsi:nil="true"/>
<ns2:PersonPreviousLastName xsi:nil="true"/>
<ns2:PersonInitials xsi:nil="true"/>
<ns2:JgzzFiscalCode xsi:nil="true"/>
<ns2:DateOfBirth xsi:nil="true"/>
<ns2:PlaceOfBirth xsi:nil="true"/>
<ns2:DateOfDeath xsi:nil="true"/>
<ns2:Gender xsi:nil="true"/>
<ns2:DeclaredEthnicity xsi:nil="true"/>
<ns2:MaritalStatus xsi:nil="true"/>
<ns2:MaritalStatusEffectiveDate xsi:nil="true"/>
<ns2:PersonalIncomeAmount xsi:nil="true"/>
<ns2:RentOwnInd xsi:nil="true"/>
<ns2:LastKnownGPS xsi:nil="true"/>
<ns2:EffectiveStartDate>2021-09-17</ns2:EffectiveStartDate>
<ns2:EffectiveEndDate>4712-12-31</ns2:EffectiveEndDate>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:Status>A</ns2:Status>
<ns2:CreatedByModule>AMS</ns2:CreatedByModule>
<ns2:DeceasedFlag>false</ns2:DeceasedFlag>
<ns2:Comments xsi:nil="true"/>
<ns2:PersonLastNamePrefix xsi:nil="true"/>
<ns2:PersonSecondLastName xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:OrigSystem xsi:nil="true"/>
<ns2:OrigSystemReference>300100551137328</ns2:OrigSystemReference>
<ns2:EffectiveSequence>1</ns2:EffectiveSequence>
<ns2:HeadOfHouseholdFlag xsi:nil="true"/>
<ns2:HouseholdIncomeAmount xsi:nil="true"/>
<ns2:HouseholdSize xsi:nil="true"/>
<ns2:EffectiveLatestChange>Y</ns2:EffectiveLatestChange>
<ns2:SuffixOverriddenFlag>false</ns2:SuffixOverriddenFlag>
<ns2:UniqueNameSuffix xsi:nil="true"/>
<ns2:CorpCurrencyCode>USD</ns2:CorpCurrencyCode>
<ns2:CurcyConvRateType>Corporate</ns2:CurcyConvRateType>
<ns2:CurrencyCode>USD</ns2:CurrencyCode>
<ns2:PartyNumber>CDRM_967434</ns2:PartyNumber>
<ns2:Salutation xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PrimaryAddressLine1 xsi:nil="true"/>
<ns2:PrimaryAddressLine2 xsi:nil="true"/>
<ns2:PrimaryAddressLine3 xsi:nil="true"/>
<ns2:PrimaryAddressLine4 xsi:nil="true"/>
<ns2:Alias xsi:nil="true"/>
<ns2:PrimaryAddressCity xsi:nil="true"/>
<ns2:PrimaryAddressCountry xsi:nil="true"/>
<ns2:PrimaryAddressCounty xsi:nil="true"/>

<ns2:PrimaryFormattedAddress xsi:nil="true"/>
<ns2:PrimaryFormattedPhoneNumber xsi:nil="true"/>
<ns2:PrimaryLanguage xsi:nil="true"/>
<ns2:PartyUniqueName>Randy1_FN1 Andy1 SBS_LN1</ns2:PartyUniqueName>
<ns2:PrimaryAddressPostalCode xsi:nil="true"/>
<ns2:PreferredContactEmail xsi:nil="true"/>
<ns2:PreferredContactName xsi:nil="true"/>
```

```
<ns2:PreferredContactPhone xsi:nil="true"/>
<ns2:PreferredContactURL xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PrimaryEmailId>300100551137329</ns2:PrimaryEmailId>
<ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns2:PrimaryPhoneId xsi:nil="true"/>
<ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:PrimaryPhoneLineType xsi:nil="true"/>
<ns2:PrimaryPhoneNumber xsi:nil="true"/>
<ns2:PrimaryPhonePurpose xsi:nil="true"/>
<ns2:PrimaryWebId xsi:nil="true"/>
<ns2:Pronunciation xsi:nil="true"/>
<ns2:PrimaryAddressProvince xsi:nil="true"/>
<ns2:PrimaryAddressState xsi:nil="true"/>
<ns2:PrimaryURL xsi:nil="true"/>
<ns2:ValidatedFlag xsi:nil="true"/>
<ns2:PrimaryAddressLatitude xsi:nil="true"/>
<ns2:PrimaryAddressLongitude xsi:nil="true"/>
<ns2:PrimaryAddressLocationId/>
<ns2:FavoriteContactFlag>false</ns2:FavoriteContactFlag>
<ns2:Distance xsi:nil="true"/>
<ns2:SalesAffinityCode xsi:nil="true"/>
<ns2:SalesBuyingRoleCode xsi:nil="true"/>
<ns2:DepartmentCode xsi:nil="true"/>
<ns2:Department xsi:nil="true"/>
<ns2:JobTitleCode xsi:nil="true"/>
<ns2:JobTitle xsi:nil="true"/>
<ns2:DoNotCallFlag>false</ns2:DoNotCallFlag>
<ns2:DoNotContactFlag>false</ns2:DoNotContactFlag>
<ns2:DoNotEmailFlag>false</ns2:DoNotEmailFlag>
<ns2:DoNotMailFlag>false</ns2:DoNotMailFlag>
<ns2:LastContactDate xsi:nil="true"/>
<ns2:PrimaryCustomerId xsi:nil="true"/>
<ns2:PrimaryCustomerRelationshipId xsi:nil="true"/>
<ns2:PrimaryCustomerName/>
<ns2:LastSourceUpdateDate>2021-09-17T11:21:13.0Z</ns2:LastSourceUpdateDate>
<ns2:LastUpdateSourceSystem>UNKNOWN</ns2:LastUpdateSourceSystem>
<ns2:DataCloudStatus xsi:nil="true"/>
<ns2:LastEnrichmentDate xsi:nil="true"/>
</ns2:PersonProfile>
</ns2:Value>
</ns1:result>
</ns0:mergePersonResponse>
</env:Body>
</env:Envelope>
```

Customer Account Web Service Sample Payloads

The following topics describe the sample payloads for CustomerAccountService External V2, for different use cases.

For each use case, you can find the customer account type, the operation involved to invoke the web service, followed by sample payload.

Add a Account Site Contact Phone Number

In this use case, we'll add an account site contact phone number to a customer account.

Following are the steps to add account site contact phone number. This requires interaction between PartiesPerson, SalesPartiesRelationships, and CustomerAccount Web Services.

- Use **createPerson** operation of **Person** service to create a person.

  Operation: **createPerson**

  Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/types/" xmlns:per="http://
xmlns.oracle.com/apps/cdm/foundation/parties/personService/" xmlns:par="http://xmlns.oracle.com/
apps/cdm/foundation/parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/
parties/flex/sourceSystemRef/" xmlns:con="http://xmlns.oracle.com/apps/cdm/foundation/parties/
contactPointService/" xmlns:con1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
contactPoint/" xmlns:par1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/"
 xmlns:per1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/" xmlns:rel="http://
xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/" xmlns:org="http://xmlns.oracle.com/
apps/cdm/foundation/parties/flex/orgContact/" xmlns:rel1="http://xmlns.oracle.com/apps/cdm/foundation/
parties/flex/relationship/">
<soapenv:Header/>
<soapenv:Body>
 <typ:createPerson>
 <typ:personParty>
 <per:CreatedByModule>HZ_WS</per:CreatedByModule>
 <per:PersonProfile>
 <per:PersonFirstName>New Contact</per:PersonFirstName>
 <per:PersonLastName>To test</per:PersonLastName>
 <per:CreatedByModule>HZ_WS</per:CreatedByModule>
 </per:PersonProfile>
 <per:PartyUsageAssignment>
 <par:PartyUsageCode>CONTACT</par:PartyUsageCode>
 <par:CreatedByModule>HZ_WS</par:CreatedByModule>
 </per:PartyUsageAssignment>
 </typ:personParty>
 </typ:createPerson>
</soapenv:Body>
</soapenv:Envelope>
```

  Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/
PersonService/createPersonResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:bbb4dc3a-f116-463c-a789-c1621144a910</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:createPersonResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/
applicationModule/types/">
 <ns1:result xsi:type="ns2:PersonResult" xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/
parties/contactPointService/" xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/
relationshipService/" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/"
 xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/
personService/applicationModule/types/">
 <ns2:Value>
 <ns2:PartyId>300100554998280</ns2:PartyId>
 <ns2:PartyNumber>CDRM_958316</ns2:PartyNumber>
 <ns2:PartyName>New Contact To test</ns2:PartyName>
 <ns2:PartyType>PERSON</ns2:PartyType>
```

```
<ns2:ValidatedFlag xsi:nil="true"/>
<ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
<ns2:LastUpdateLogin>D8A776A829507850E0531C5CF00AFE61</ns2:LastUpdateLogin>
<ns2:CreationDate>2022-03-16T14:08:13Z</ns2:CreationDate>
<ns2:RequestId xsi:nil="true"/>
<ns2:LastUpdateDate>2022-03-16T14:08:14.561Z</ns2:LastUpdateDate>
<ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
<ns2:OrigSystemReference>300100554998280</ns2:OrigSystemReference>
<ns2:SICCode xsi:nil="true"/>
<ns2:JgzzFiscalCode xsi:nil="true"/>
<ns2:PersonFirstName>New Contact</ns2:PersonFirstName>
<ns2:PersonPreNameAdjunct xsi:nil="true"/>
<ns2:PersonLastName>To test</ns2:PersonLastName>
<ns2:PersonMiddleName xsi:nil="true"/>
<ns2:PersonTitle xsi:nil="true"/>
<ns2:PersonNameSuffix xsi:nil="true"/>
<ns2:PersonPreviousLastName xsi:nil="true"/>
<ns2:PersonAcademicTitle xsi:nil="true"/>
<ns2:Country xsi:nil="true"/>
<ns2:Address2 xsi:nil="true"/>
<ns2:Address1 xsi:nil="true"/>
<ns2:Address4 xsi:nil="true"/>
<ns2:Address3 xsi:nil="true"/>
<ns2:PostalCode xsi:nil="true"/>
<ns2:City xsi:nil="true"/>
<ns2:Province xsi:nil="true"/>
<ns2:State xsi:nil="true"/>
<ns2:County xsi:nil="true"/>
<ns2:Status>A</ns2:Status>
<ns2:URL xsi:nil="true"/>
<ns2:SICCodeType xsi:nil="true"/>
<ns2:EmailAddress xsi:nil="true"/>
<ns2:GSAIndicatorFlag xsi:nil="true"/>
<ns2:LanguageName xsi:nil="true"/>
<ns2:MissionStatement xsi:nil="true"/>
<ns2:CategoryCode xsi:nil="true"/>
<ns2:ThirdPartyFlag xsi:nil="true"/>
<ns2:Salutation xsi:nil="true"/>
<ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:PrimaryPhonePurpose xsi:nil="true"/>
<ns2:PrimaryPhoneContactPTId xsi:nil="true"/>
<ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
<ns2:PrimaryPhoneLineType xsi:nil="true"/>
<ns2:PrimaryPhoneNumber xsi:nil="true"/>
<ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:IdenAddrLocationId xsi:nil="true"/>
<ns2:PrimaryEmailContactPTId xsi:nil="true"/>
<ns2:IdenAddrPartySiteId xsi:nil="true"/>
<ns2:PersonLastNamePrefix xsi:nil="true"/>
<ns2:PrimaryURLContactPTId xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PersonSecondLastName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:Gender xsi:nil="true"/>
<ns2:MaritalStatus xsi:nil="true"/>
<ns2:Comments xsi:nil="true"/>
<ns2:DateOfBirth xsi:nil="true"/>
<ns2:UserGUID xsi:nil="true"/>
<ns2:PartyUniqueName>New Contact To test</ns2:PartyUniqueName>
```

```
<ns2:SourceSystem xsi:nil="true"/>
<ns2:SourceSystemReferenceValue xsi:nil="true"/>
<ns2:SourceSystemUpdateDate xsi:nil="true"/>
<ns2:PersonProfile xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/">
<ns2:PersonProfileId>300100554998280</ns2:PersonProfileId>
<ns2:PartyId>300100554998280</ns2:PartyId>
<ns2:PersonName>New Contact To test</ns2:PersonName>
<ns2:LastUpdateDate>2022-03-16T14:08:15.117Z</ns2:LastUpdateDate>
<ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
<ns2:CreationDate>2022-03-16T14:08:13.197Z</ns2:CreationDate>
<ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
<ns2:LastUpdateLogin>D8A776A829507850E0531C5CF00AFE61</ns2:LastUpdateLogin>
<ns2:RequestId xsi:nil="true"/>
<ns2:PersonPreNameAdjunct xsi:nil="true"/>
<ns2:PersonFirstName>New Contact</ns2:PersonFirstName>
<ns2:PersonMiddleName xsi:nil="true"/>
<ns2:PersonLastName>To test</ns2:PersonLastName>
<ns2:PersonNameSuffix xsi:nil="true"/>
<ns2:PersonTitle xsi:nil="true"/>
<ns2:PersonAcademicTitle xsi:nil="true"/>
<ns2:PersonPreviousLastName xsi:nil="true"/>
<ns2:PersonInitials xsi:nil="true"/>
<ns2:JgzzFiscalCode xsi:nil="true"/>
<ns2:DateOfBirth xsi:nil="true"/>
<ns2:PlaceOfBirth xsi:nil="true"/>
<ns2:DateOfDeath xsi:nil="true"/>
<ns2:Gender xsi:nil="true"/>
<ns2:DeclaredEthnicity xsi:nil="true"/>
<ns2:MaritalStatus xsi:nil="true"/>
<ns2:MaritalStatusEffectiveDate xsi:nil="true"/>
<ns2:PersonalIncomeAmount xsi:nil="true"/>
<ns2:RentOwnInd xsi:nil="true"/>
<ns2:LastKnownGPS xsi:nil="true"/>
<ns2:EffectiveStartDate>2022-03-16</ns2:EffectiveStartDate>
<ns2:EffectiveEndDate>4712-12-31</ns2:EffectiveEndDate>
<ns2:InternalFlag>false</ns2:InternalFlag>
<ns2:Status>A</ns2:Status>
<ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
<ns2:DeceasedFlag>false</ns2:DeceasedFlag>
<ns2:Comments xsi:nil="true"/>
<ns2:PersonLastNamePrefix xsi:nil="true"/>
<ns2:PersonSecondLastName xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:OrigSystem xsi:nil="true"/>
<ns2:OrigSystemReference>300100554998280</ns2:OrigSystemReference>
<ns2:EffectiveSequence>1</ns2:EffectiveSequence>
<ns2:HeadOfHouseholdFlag xsi:nil="true"/>
<ns2:HouseholdIncomeAmount xsi:nil="true"/>
<ns2:HouseholdSize xsi:nil="true"/>
<ns2:EffectiveLatestChange>Y</ns2:EffectiveLatestChange>
<ns2:SuffixOverriddenFlag>false</ns2:SuffixOverriddenFlag>
<ns2:UniqueNameSuffix xsi:nil="true"/>
<ns2:CorpCurrencyCode>USD</ns2:CorpCurrencyCode>
<ns2:CurcyConvRateType>Corporate</ns2:CurcyConvRateType>
<ns2:CurrencyCode>USD</ns2:CurrencyCode>
<ns2:PartyNumber>CDRM_958316</ns2:PartyNumber>
<ns2:Salutation xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PrimaryAddressLine1 xsi:nil="true"/>
<ns2:PrimaryAddressLine2 xsi:nil="true"/>
<ns2:PrimaryAddressLine3 xsi:nil="true"/>
<ns2:PrimaryAddressLine4 xsi:nil="true"/>
<ns2:Alias xsi:nil="true"/>
```

```
<ns2:PrimaryAddressCity xsi:nil="true"/>
<ns2:PrimaryAddressCountry xsi:nil="true"/>
<ns2:PrimaryAddressCounty xsi:nil="true"/>
<ns2:PrimaryEmailAddress xsi:nil="true"/>
<ns2:PrimaryFormattedAddress xsi:nil="true"/>
<ns2:PrimaryFormattedPhoneNumber xsi:nil="true"/>
<ns2:PrimaryLanguage xsi:nil="true"/>
<ns2:PartyUniqueName>New Contact To test</ns2:PartyUniqueName>
<ns2:PrimaryAddressPostalCode xsi:nil="true"/>
<ns2:PreferredContactEmail xsi:nil="true"/>
<ns2:PreferredContactName xsi:nil="true"/>
<ns2:PreferredContactPhone xsi:nil="true"/>
<ns2:PreferredContactURL xsi:nil="true"/>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:PrimaryEmailId xsi:nil="true"/>
<ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns2:PrimaryPhoneId xsi:nil="true"/>
<ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:PrimaryPhoneLineType xsi:nil="true"/>
<ns2:PrimaryPhoneNumber xsi:nil="true"/>
<ns2:PrimaryPhonePurpose xsi:nil="true"/>
<ns2:PrimaryWebId xsi:nil="true"/>
<ns2:Pronunciation xsi:nil="true"/>
<ns2:PrimaryAddressProvince xsi:nil="true"/>
<ns2:PrimaryAddressState xsi:nil="true"/>
<ns2:PrimaryURL xsi:nil="true"/>
<ns2:ValidatedFlag xsi:nil="true"/>
<ns2:PrimaryAddressLatitude xsi:nil="true"/>
<ns2:PrimaryAddressLongitude xsi:nil="true"/>
<ns2:PrimaryAddressLocationId/>
<ns2:FavoriteContactFlag>false</ns2:FavoriteContactFlag>
<ns2:Distance xsi:nil="true"/>
<ns2:SalesAffinityCode xsi:nil="true"/>
<ns2:SalesBuyingRoleCode xsi:nil="true"/>
<ns2:DepartmentCode xsi:nil="true"/>
<ns2:Department xsi:nil="true"/>
<ns2:JobTitleCode xsi:nil="true"/>
<ns2:JobTitle xsi:nil="true"/>
<ns2:DoNotCallFlag>false</ns2:DoNotCallFlag>
<ns2:DoNotContactFlag>false</ns2:DoNotContactFlag>
<ns2:DoNotEmailFlag>false</ns2:DoNotEmailFlag>
<ns2:DoNotMailFlag>false</ns2:DoNotMailFlag>
<ns2:LastContactDate xsi:nil="true"/>
<ns2:PrimaryCustomerId xsi:nil="true"/>
<ns2:PrimaryCustomerRelationshipId xsi:nil="true"/>
<ns2:PrimaryCustomerName/>
<ns2:LastSourceUpdateDate>2022-03-16T14:08:15Z</ns2:LastSourceUpdateDate>
<ns2:LastUpdateSourceSystem>UNKNOWN</ns2:LastUpdateSourceSystem>
<ns2:DataCloudStatus xsi:nil="true"/>
<ns2:LastEnrichmentDate xsi:nil="true"/>
</ns2:PersonProfile>
<ns2:PartyUsageAssignment>
<ns3:PartyUsgAssignmentId>300100554998281</ns3:PartyUsgAssignmentId>
<ns3:PartyId>300100554998280</ns3:PartyId>
<ns3:PartyUsageCode>CONTACT</ns3:PartyUsageCode>
<ns3:EffectiveStartDate>2022-03-16</ns3:EffectiveStartDate>
<ns3:EffectiveEndDate>4712-12-31</ns3:EffectiveEndDate>
<ns3:StatusFlag>true</ns3:StatusFlag>
<ns3:Comments xsi:nil="true"/>
<ns3:OwnerTableName xsi:nil="true"/>
<ns3:OwnerTableId xsi:nil="true"/>
<ns3:CreatedByModule>HZ_WS</ns3:CreatedByModule>
<ns3:ObjectVersionNumber>1</ns3:ObjectVersionNumber>
<ns3:CreatedBy>SALES_ADMIN</ns3:CreatedBy>
```

```
 <ns3:CreationDate>2022-03-16T14:08:13.884Z</ns3:CreationDate>
 <ns3:LastUpdateLogin>D8A776A829507850E0531C5CF00AFE61</ns3:LastUpdateLogin>
 <ns3:LastUpdateDate>2022-03-16T14:08:14.473Z</ns3:LastUpdateDate>
 <ns3:LastUpdatedBy>SALES_ADMIN</ns3:LastUpdatedBy>
 <ns3:RequestId xsi:nil="true"/>
 </ns2:PartyUsageAssignment>
 </ns2:Value>
 </ns1:result>
 </ns0:createPersonResponse>
 </env:Body>
</env:Envelope>
```

- With PartyID of the contact, use **createRelationship** operation of **SalesPartiesRelationship** service to create a relationship.

  Operation: **createRelationship**

  Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/crmCommon/salesParties/relationshipService/types/" xmlns:rel="http://
xmlns.oracle.com/apps/crmCommon/salesParties/relationshipService/">
<soapenv:Header/>
 <soapenv:Body>
 <typ:createRelationship>
 <typ:relationship>
 <rel:ObjectPartyId>300100590899610</rel:ObjectPartyId>
 <rel:SubjectPartyId>300100590899622</rel:SubjectPartyId>
 <rel:RelationshipType>CONTACT</rel:RelationshipType>
 <rel:RelationshipCode>CONTACT</rel:RelationshipCode>
 <rel:CreatedByModule>HZ_WS</rel:CreatedByModule>
 <rel:Status>A</rel:Status>
 </typ:relationship>
 </typ:createRelationship>
 </soapenv:Body>
</soapenv:Envelope>
```

  Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/crmCommon/salesParties/relationshipService/
RelationshipService/createRelationshipResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:6e61dcc3-1c7f-4a95-9e39-83ec68c0075c</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:createRelationshipResponse xmlns:ns0="http://xmlns.oracle.com/apps/crmCommon/salesParties/
relationshipService/types/">
 <ns2:result xsi:type="ns1:Relationship" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns1="http://xmlns.oracle.com/apps/crmCommon/salesParties/relationshipService/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance" xmlns:ns2="http://xmlns.oracle.com/apps/crmCommon/salesParties/
relationshipService/types/">
 <ns1:RelationshipSourceSystem xsi:nil="true"/>
 <ns1:RelationshipSourceSystemReferenceValue xsi:nil="true"/>
 <ns1:ObjectPartyId>300100590899610</ns1:ObjectPartyId>
 <ns1:SubjectPartyId>300100590899622</ns1:SubjectPartyId>
 <ns1:RelationshipType>CONTACT</ns1:RelationshipType>
 <ns1:RelationshipCode>CONTACT</ns1:RelationshipCode>
 <ns1:StartDate>2022-03-18</ns1:StartDate>
 <ns1:EndDate>4712-12-31</ns1:EndDate>
 <ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
 <ns1:Comments xsi:nil="true"/>
```

```
 <ns1:Status>A</ns1:Status>
 <ns1:CreatedBy>FUSION</ns1:CreatedBy>
 <ns1:CreationDate>2022-03-18T08:03:11Z</ns1:CreationDate>
 <ns1:LastUpdateDate>2022-03-18T08:03:14.517Z</ns1:LastUpdateDate>
 <ns1:LastUpdateLogin>DA2767E020B9FFEBE053D711F10A1189</ns1:LastUpdateLogin>
 <ns1:LastUpdatedBy>FUSION</ns1:LastUpdatedBy>
 <ns1:SubjectPartyNumber>CDRM_1178570</ns1:SubjectPartyNumber>
 <ns1:SubjectSourceSystem xsi:nil="true"/>
 <ns1:SubjectSourceSystemReferenceValue xsi:nil="true"/>
 <ns1:ObjectSourceSystem xsi:nil="true"/>
 <ns1:ObjectSourceSystemReferenceValue xsi:nil="true"/>
 <ns1:ObjectPartyNumber>CDRM_1178567</ns1:ObjectPartyNumber>
 <ns1:RelationshipEO_R10_Relationship_Perc_c xsi:nil="true"/>
 <ns1:RelationshipEO_R10_Relationship_Text_c xsi:nil="true"/>
 <ns1:RelationshipEO_R10_Relationship_Num_c>3844</ns1:RelationshipEO_R10_Relationship_Num_c>
 <ns1:RelationshipEO_R10_Relationship_Date_c xsi:nil="true"/>
 <ns1:RelationshipEO_ExtnZcmFuseCreateConnectionLayoutURL>/cust/apps/
oracle/apps/customerCenter/infrastructure360/publicUi/fuse/customer/page/
ZcmFuseCreateConnection/ZcmFuseCreateConnection_Layout_c_c1_1539078750356.jsff</
ns1:RelationshipEO_ExtnZcmFuseCreateConnectionLayoutURL>
 <ns1:RelationshipEO_ExtnZcmFuseCreateConnectionLayoutDrivers xsi:nil="true"/>
 <ns1:RelationshipEO_RelServPayload01_c xsi:nil="true"/>
 </ns2:result>
 </ns0:createRelationshipResponse>
 </env:Body>
</env:Envelope>
```

- With the PartyID of the person, use **getPerson** operation of **PartiesPerson** to get RelationshipID.

  Operation: **getPerson**

  ### Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/types/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:getPerson>
 <typ:partyId>300100590899622</typ:partyId>
 </typ:getPerson>
 </soapenv:Body>
</soapenv:Envelope>
```

  ### Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/
PersonService/getPersonResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:cdc52bed-29e2-4f34-be6d-0dd05223edd6</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:getPersonResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/
applicationModule/types/">
 <ns2:result xsi:type="ns1:Person" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/" xmlns:ns3="http://
xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:ns5="http://xmlns.oracle.com/apps/cdm/
foundation/parties/contactPointService/" xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/
relationshipService/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/
foundation/parties/personService/applicationModule/types/">
 <ns1:PartyId>300100590899622</ns1:PartyId>
 <ns1:PartyNumber>CDRM_1178570</ns1:PartyNumber>
```

```
<ns1:PartyName>New Contact1 To test2</ns1:PartyName>
<ns1:PartyType>PERSON</ns1:PartyType>
<ns1:ValidatedFlag xsi:nil="true"/>
<ns1:LastUpdatedBy>FUSION</ns1:LastUpdatedBy>
<ns1:LastUpdateLogin>DA2767E020B9FFEBE053D711F10A1189</ns1:LastUpdateLogin>
<ns1:CreationDate>2022-03-18T07:57:04Z</ns1:CreationDate>
<ns1:RequestId xsi:nil="true"/>
<ns1:LastUpdateDate>2022-03-18T08:03:18.887Z</ns1:LastUpdateDate>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:OrigSystemReference>300100590899622</ns1:OrigSystemReference>
<ns1:SICCode xsi:nil="true"/>
<ns1:JgzzFiscalCode xsi:nil="true"/>
<ns1:PersonFirstName>New Contact1</ns1:PersonFirstName>
<ns1:PersonPreNameAdjunct xsi:nil="true"/>
<ns1:PersonLastName>To test2</ns1:PersonLastName>
<ns1:PersonMiddleName xsi:nil="true"/>
<ns1:PersonTitle xsi:nil="true"/>
<ns1:PersonNameSuffix xsi:nil="true"/>
<ns1:PersonPreviousLastName xsi:nil="true"/>
<ns1:PersonAcademicTitle xsi:nil="true"/>
<ns1:Country xsi:nil="true"/>
<ns1:Address2 xsi:nil="true"/>
<ns1:Address1 xsi:nil="true"/>
<ns1:Address4 xsi:nil="true"/>
<ns1:Address3 xsi:nil="true"/>
<ns1:PostalCode xsi:nil="true"/>
<ns1:City xsi:nil="true"/>
<ns1:Province xsi:nil="true"/>
<ns1:State xsi:nil="true"/>
<ns1:County xsi:nil="true"/>
<ns1:Status>A</ns1:Status>
<ns1:URL xsi:nil="true"/>
<ns1:SICCodeType xsi:nil="true"/>
<ns1:EmailAddress xsi:nil="true"/>
<ns1:GSAIndicatorFlag xsi:nil="true"/>
<ns1:LanguageName xsi:nil="true"/>
<ns1:MissionStatement xsi:nil="true"/>
<ns1:CategoryCode xsi:nil="true"/>
<ns1:ThirdPartyFlag xsi:nil="true"/>
<ns1:Salutation xsi:nil="true"/>
<ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
<ns1:CertReasonCode xsi:nil="true"/>
<ns1:CertificationLevel xsi:nil="true"/>
<ns1:PrimaryPhonePurpose xsi:nil="true"/>
<ns1:PrimaryPhoneContactPTId xsi:nil="true"/>
<ns1:PrimaryPhoneCountryCode xsi:nil="true"/>
<ns1:PrimaryPhoneLineType xsi:nil="true"/>
<ns1:PrimaryPhoneNumber xsi:nil="true"/>
<ns1:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns1:PreferredContactMethod xsi:nil="true"/>
<ns1:PrimaryPhoneExtension xsi:nil="true"/>
<ns1:IdenAddrLocationId xsi:nil="true"/>
<ns1:PrimaryEmailContactPTId xsi:nil="true"/>
<ns1:IdenAddrPartySiteId xsi:nil="true"/>
<ns1:PersonLastNamePrefix xsi:nil="true"/>
<ns1:PrimaryURLContactPTId xsi:nil="true"/>
<ns1:PreferredName xsi:nil="true"/>
<ns1:PersonSecondLastName xsi:nil="true"/>
<ns1:PreferredNameId xsi:nil="true"/>
<ns1:PreferredContactPersonId>300100590899610</ns1:PreferredContactPersonId>
<ns1:InternalFlag>false</ns1:InternalFlag>
<ns1:PreferredFunctionalCurrency xsi:nil="true"/>
<ns1:Gender xsi:nil="true"/>
<ns1:MaritalStatus xsi:nil="true"/>
<ns1:Comments xsi:nil="true"/>
<ns1:DateOfBirth xsi:nil="true"/>
```

```
<ns1:UserGUID xsi:nil="true"/>
<ns1:PartyUniqueName>New Contact1 To test2</ns1:PartyUniqueName>
<ns1:SourceSystem xsi:nil="true"/>
<ns1:SourceSystemReferenceValue xsi:nil="true"/>
<ns1:SourceSystemUpdateDate xsi:nil="true"/>
<ns1:PersonProfile xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/">
<ns1:PersonProfileId>300100590899622</ns1:PersonProfileId>
<ns1:PartyId>300100590899622</ns1:PartyId>
<ns1:PersonName>New Contact1 To test2</ns1:PersonName>
<ns1:LastUpdateDate>2022-03-18T08:03:18.83Z</ns1:LastUpdateDate>
<ns1:LastUpdatedBy>FUSION</ns1:LastUpdatedBy>
<ns1:CreationDate>2022-03-18T07:57:04.105Z</ns1:CreationDate>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:LastUpdateLogin>DA2767E020B9FFEBE053D711F10A1189</ns1:LastUpdateLogin>
<ns1:RequestId xsi:nil="true"/>
<ns1:PersonPreNameAdjunct xsi:nil="true"/>
<ns1:PersonFirstName>New Contact1</ns1:PersonFirstName>
<ns1:PersonMiddleName xsi:nil="true"/>
<ns1:PersonLastName>To test2</ns1:PersonLastName>
<ns1:PersonNameSuffix xsi:nil="true"/>
<ns1:PersonTitle xsi:nil="true"/>
<ns1:PersonAcademicTitle xsi:nil="true"/>
<ns1:PersonPreviousLastName xsi:nil="true"/>
<ns1:PersonInitials xsi:nil="true"/>
<ns1:JgzzFiscalCode xsi:nil="true"/>
<ns1:DateOfBirth xsi:nil="true"/>
<ns1:PlaceOfBirth xsi:nil="true"/>
<ns1:DateOfDeath xsi:nil="true"/>
<ns1:Gender xsi:nil="true"/>
<ns1:DeclaredEthnicity xsi:nil="true"/>
<ns1:MaritalStatus xsi:nil="true"/>
<ns1:MaritalStatusEffectiveDate xsi:nil="true"/>
<ns1:PersonalIncomeAmount xsi:nil="true"/>
<ns1:RentOwnInd xsi:nil="true"/>
<ns1:LastKnownGPS xsi:nil="true"/>
<ns1:EffectiveStartDate>2022-03-18</ns1:EffectiveStartDate>
<ns1:EffectiveEndDate>4712-12-31</ns1:EffectiveEndDate>
<ns1:InternalFlag>false</ns1:InternalFlag>
<ns1:Status>A</ns1:Status>
<ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
<ns1:DeceasedFlag>false</ns1:DeceasedFlag>
<ns1:Comments xsi:nil="true"/>
<ns1:PersonLastNamePrefix xsi:nil="true"/>
<ns1:PersonSecondLastName xsi:nil="true"/>
<ns1:PreferredFunctionalCurrency xsi:nil="true"/>
<ns1:OrigSystem xsi:nil="true"/>
<ns1:OrigSystemReference>300100590899622</ns1:OrigSystemReference>
<ns1:EffectiveSequence>1</ns1:EffectiveSequence>
<ns1:HeadOfHouseholdFlag xsi:nil="true"/>
<ns1:HouseholdIncomeAmount xsi:nil="true"/>
<ns1:HouseholdSize xsi:nil="true"/>
<ns1:EffectiveLatestChange>Y</ns1:EffectiveLatestChange>
<ns1:SuffixOverriddenFlag>false</ns1:SuffixOverriddenFlag>
<ns1:UniqueNameSuffix xsi:nil="true"/>
<ns1:CorpCurrencyCode>USD</ns1:CorpCurrencyCode>
<ns1:CurcyConvRateType>Corporate</ns1:CurcyConvRateType>
<ns1:CurrencyCode>USD</ns1:CurrencyCode>
<ns1:PartyNumber>CDRM_1178570</ns1:PartyNumber>
<ns1:Salutation xsi:nil="true"/>
<ns1:CertReasonCode xsi:nil="true"/>
<ns1:CertificationLevel xsi:nil="true"/>
<ns1:PreferredContactMethod xsi:nil="true"/>
<ns1:PreferredContactPersonId>300100590899610</ns1:PreferredContactPersonId>
<ns1:PrimaryAddressLine1 xsi:nil="true"/>
<ns1:PrimaryAddressLine2 xsi:nil="true"/>
<ns1:PrimaryAddressLine3 xsi:nil="true"/>
```

```
<ns1:PrimaryAddressLine4 xsi:nil="true"/>
<ns1:Alias xsi:nil="true"/>
<ns1:PrimaryAddressCity xsi:nil="true"/>
<ns1:PrimaryAddressCountry xsi:nil="true"/>
<ns1:PrimaryAddressCounty xsi:nil="true"/>
<ns1:PrimaryEmailAddress xsi:nil="true"/>
<ns1:PrimaryFormattedAddress xsi:nil="true"/>
<ns1:PrimaryFormattedPhoneNumber xsi:nil="true"/>
<ns1:PrimaryLanguage xsi:nil="true"/>
<ns1:PartyUniqueName>New Contact1 To test2</ns1:PartyUniqueName>
<ns1:PrimaryAddressPostalCode xsi:nil="true"/>
<ns1:PreferredContactEmail xsi:nil="true"/>
<ns1:PreferredContactName>New Contact To test</ns1:PreferredContactName>
<ns1:PreferredContactPhone xsi:nil="true"/>
<ns1:PreferredContactURL xsi:nil="true"/>
<ns1:PreferredName xsi:nil="true"/>
<ns1:PreferredNameId xsi:nil="true"/>
<ns1:PrimaryEmailId xsi:nil="true"/>
<ns1:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns1:PrimaryPhoneId xsi:nil="true"/>
<ns1:PrimaryPhoneCountryCode xsi:nil="true"/>
<ns1:PrimaryPhoneExtension xsi:nil="true"/>
<ns1:PrimaryPhoneLineType xsi:nil="true"/>
<ns1:PrimaryPhoneNumber xsi:nil="true"/>
<ns1:PrimaryPhonePurpose xsi:nil="true"/>
<ns1:PrimaryWebId xsi:nil="true"/>
<ns1:Pronunciation xsi:nil="true"/>
<ns1:PrimaryAddressProvince xsi:nil="true"/>
<ns1:PrimaryAddressState xsi:nil="true"/>
<ns1:PrimaryURL xsi:nil="true"/>
<ns1:ValidatedFlag xsi:nil="true"/>
<ns1:PrimaryAddressLatitude xsi:nil="true"/>
<ns1:PrimaryAddressLongitude xsi:nil="true"/>
<ns1:PrimaryAddressLocationId/>
<ns1:FavoriteContactFlag>false</ns1:FavoriteContactFlag>
<ns1:Distance xsi:nil="true"/>
<ns1:SalesAffinityCode xsi:nil="true"/>
<ns1:SalesBuyingRoleCode xsi:nil="true"/>
<ns1:DepartmentCode xsi:nil="true"/>
<ns1:Department xsi:nil="true"/>
<ns1:JobTitleCode xsi:nil="true"/>
<ns1:JobTitle xsi:nil="true"/>
<ns1:DoNotCallFlag>false</ns1:DoNotCallFlag>
<ns1:DoNotContactFlag>false</ns1:DoNotContactFlag>
<ns1:DoNotEmailFlag>false</ns1:DoNotEmailFlag>
<ns1:DoNotMailFlag>false</ns1:DoNotMailFlag>
<ns1:LastContactDate xsi:nil="true"/>
<ns1:PrimaryCustomerId xsi:nil="true"/>
<ns1:PrimaryCustomerRelationshipId xsi:nil="true"/>
<ns1:PrimaryCustomerName xsi:nil="true"/>
<ns1:LastSourceUpdateDate>2022-03-18T08:03:18Z</ns1:LastSourceUpdateDate>
<ns1:LastUpdateSourceSystem>UNKNOWN</ns1:LastUpdateSourceSystem>
<ns1:DataCloudStatus xsi:nil="true"/>
<ns1:LastEnrichmentDate xsi:nil="true"/>
<ns1:PersonInformation>
<ns2:PersonProfileId>300100590899622</ns2:PersonProfileId>
<ns2:__FLEX_Context xsi:nil="true"/>
<ns2:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns2:_FLEX_NumOfSegments>0</ns2:_FLEX_NumOfSegments>
</ns1:PersonInformation>
<ns1:R10_ContactText_c xsi:nil="true"/>
<ns1:R10_ContactDateTime_c>2022-03-18T00:00:00Z</ns1:R10_ContactDateTime_c>
<ns1:R10_ContactCurr_c currencyCode="USD">599</ns1:R10_ContactCurr_c>
<ns1:R10_ContactLongTxt_c xsi:nil="true"/>
<ns1:R10_ContactRecordtype_c xsi:nil="true"/>
<ns1:R10_ContactNum_c xsi:nil="true"/>
```

```
<ns1:R10_ContactDate_c xsi:nil="true"/>
<ns1:R10_ContactCheckBox_c>false</ns1:R10_ContactCheckBox_c>
<ns1:R10_ContactPerc_c xsi:nil="true"/>
<ns1:R10_ContactFixChList_c xsi:nil="true"/>
<ns1:R10_ContactDynChList_Id_c xsi:nil="true"/>
<ns1:R10_ContactDynChList_c xsi:nil="true"/>
<ns1:R10_ContactTextFormula_c>This Record was Created by: SALES_ADMIN</ns1:R10_ContactTextFormula_c>
<ns1:Competitor_Id_R10_CMPContactRel xsi:nil="true"/>
<ns1:R10_ContactText_M_c xsi:nil="true"/>
<ns1:R10_ContactFixChList_M_c xsi:nil="true"/>
<ns1:R10_ContactDCLAccount_Id_c xsi:nil="true"/>
<ns1:R10_ContactDCLAccount_c xsi:nil="true"/>
<ns1:Rel10_SP_NUM_c xsi:nil="true"/>
<ns1:R11AccountDCL_Id_c xsi:nil="true"/>
<ns1:R11AccountDCL_c xsi:nil="true"/>
<ns1:R11OptyDCL_Id_c xsi:nil="true"/>
<ns1:R11OptyDCL_c xsi:nil="true"/>
<ns1:R11HHDCL_Id_c xsi:nil="true"/>
<ns1:R11HHDCL_c xsi:nil="true"/>
<ns1:R11_ContactText_BP_c xsi:nil="true"/>
<ns1:BusinessPlan_Id_R11_BP_Contact_rel xsi:nil="true"/>
<ns1:R11_CONT_TEXT_c xsi:nil="true"/>
<ns1:R11_CONT_NUM_c xsi:nil="true"/>
<ns1:R11_CONT_DATE_c xsi:nil="true"/>
<ns1:R11_CONT_DATETIME_c>false</ns1:R11_CONT_DATETIME_c>
<ns1:R11_CONT_CHKBOX_c>false</ns1:R11_CONT_CHKBOX_c>
<ns1:R11_CONT_FCL_c xsi:nil="true"/>
<ns1:PriceBookHeader_Id_PB2C xsi:nil="true"/>
<ns1:Product_Id_P2C xsi:nil="true"/>
<ns1:SalesPromotion_Id_PRO2C xsi:nil="true"/>
<ns1:Deal_Id_REL11_DEALCONTACT xsi:nil="true"/>
<ns1:Atext_c xsi:nil="true"/>
<ns1:Anumber_c xsi:nil="true"/>
<ns1:Adate_c xsi:nil="true"/>
<ns1:Along_c xsi:nil="true"/>
<ns1:Acheckbox_c>false</ns1:Acheckbox_c>
<ns1:Apercentge_c xsi:nil="true"/>
<ns1:Adatetime_c xsi:nil="true"/>
<ns1:Acurrency_c xsi:nil="true"/>
<ns1:Afcl_c xsi:nil="true"/>
<ns1:Adcl_Id_c xsi:nil="true"/>
<ns1:Adcl_c xsi:nil="true"/>
<ns1:RNOW_CONT_TEXT_0724_c xsi:nil="true"/>
<ns1:RNOW_CONT_NUM_0724_c xsi:nil="true"/>
<ns1:RNOW_CONT_DATE_0724_c xsi:nil="true"/>
<ns1:RNOW_CONT_CHKBOX_0724_c>false</ns1:RNOW_CONT_CHKBOX_0724_c>
<ns1:RNOW_CONT_DATEIME_0724_c xsi:nil="true"/>
<ns1:RNOW_CONT_FCL_0724_c xsi:nil="true"/>
<ns1:R12PB8_Zem_ContactToAccount_DC_Id_c xsi:nil="true"/>
<ns1:R12PB8_Zem_ContactToAccount_DC_c xsi:nil="true"/>
<ns1:R12PB8_Zem_Contact_Text_c xsi:nil="true"/>
<ns1:R12PB8_Zem_Contact_Number_c xsi:nil="true"/>
<ns1:R12PB8_Zem_Contact_Date_c xsi:nil="true"/>
<ns1:R12PB8_Zem_Contact_Ltext_c xsi:nil="true"/>
<ns1:R12PB8_Zem_Contact_DateTime_c xsi:nil="true"/>
<ns1:R12PB8_Zem_Contact_Percentage_c xsi:nil="true"/>
<ns1:R12PB8_Zem_Contact_CheckBox_c>false</ns1:R12PB8_Zem_Contact_CheckBox_c>
<ns1:R12PB8_Zem_Contact_ParentFcl_c xsi:nil="true"/>
<ns1:R12PB8_Zem_Contact_ChildFcl_c xsi:nil="true"/>
<ns1:R12PB8_Zem_Contact_mcl_c xsi:nil="true"/>
<ns1:R12PB8_Zem_Contact_mcl2_c xsi:nil="true"/>
<ns1:R131711pb12_00_ContactDate_c xsi:nil="true"/>
<ns1:R131711pb12_00_ContactDateTime_c xsi:nil="true"/>
<ns1:R131711pb12_00_dcl_opty_Id_c xsi:nil="true"/>
<ns1:R131711pb12_00_dcl_opty_c xsi:nil="true"/>
<ns1:R131711pb12_00_dcl_account_Id_c xsi:nil="true"/>
```

```
<ns1:R131711pb12_00_dcl_account_c xsi:nil="true"/>
<ns1:R131711pb12_00_dcl_hh_Id_c xsi:nil="true"/>
<ns1:R131711pb12_00_dcl_hh_c xsi:nil="true"/>
<ns1:R13_COPYMAP_TEXT_c xsi:nil="true"/>
<ns1:R13_COPYMAP_NUMBER_c xsi:nil="true"/>
<ns1:R1810MultiFCL_c xsi:nil="true"/>
<ns1:CONTPICKERTEXT_c xsi:nil="true"/>
<ns1:Text_Contact_Elastic_c xsi:nil="true"/>
<ns1:Number_Contact_Elastic_c xsi:nil="true"/>
<ns1:O365_1904_ConTextMulti_c xsi:nil="true"/>
<ns1:O365_1904_ConTextSimple_c xsi:nil="true"/>
<ns1:O365_1904_ConNum_c xsi:nil="true"/>
<ns1:O365_1904_ConDate_c xsi:nil="true"/>
<ns1:O365_1904_ConLngTxt_c xsi:nil="true"/>
<ns1:O365_1904_ChkBox_c>false</ns1:O365_1904_ChkBox_c>
<ns1:O365_1904_ConPerc_c xsi:nil="true"/>
<ns1:O365_1904_ConDtTime_c xsi:nil="true"/>
<ns1:O365_1904_ConCur_c xsi:nil="true"/>
<ns1:O365_1904_ConParentFCL_c xsi:nil="true"/>
<ns1:O365_1904_ConChildFCL_c xsi:nil="true"/>
<ns1:O365_1904_ConChildMCL_c xsi:nil="true"/>
<ns1:O365_1904_ConMCL_c>5</ns1:O365_1904_ConMCL_c>
<ns1:O365_1904_ConDCL_Id_c xsi:nil="true"/>
<ns1:O365_1904_ConDCL_c xsi:nil="true"/>
<ns1:Contact_To_FCL_Single_c xsi:nil="true"/>
<ns1:AUX_DCLServiceRequest2_Id_c xsi:nil="true"/>
<ns1:AUX_DCLServiceRequest2_c xsi:nil="true"/>
<ns1:CreateUserAccount_c xsi:nil="true"/>
<ns1:VAMUserID_c xsi:nil="true"/>
<ns1:PartnerContactAdmin_c>false</ns1:PartnerContactAdmin_c>
<ns1:FinancialBenefitAdmin_c>false</ns1:FinancialBenefitAdmin_c>
<ns1:ProvisionRoles_c xsi:nil="true"/>
<ns1:Active_c>false</ns1:Active_c>
<ns1:ManageUser_c>false</ns1:ManageUser_c>
<ns1:AutoProvision_c>false</ns1:AutoProvision_c>
<ns1:DisassociateContact_c>false</ns1:DisassociateContact_c>
<ns1:Organization_Id_M2004_CXM_1ToMContact xsi:nil="true"/>
<ns1:M2004_CXM_Text_c xsi:nil="true"/>
<ns1:M2004_CXM_Phone_c xsi:nil="true"/>
<ns1:M2004_CXM_Ltext_c xsi:nil="true"/>
<ns1:M2004_CXM_Date_c xsi:nil="true"/>
<ns1:M2004_CXM_CB_c>false</ns1:M2004_CXM_CB_c>
<ns1:M2004_CXM_Perc_c xsi:nil="true"/>
<ns1:M2004_CXM_DateTime_c xsi:nil="true"/>
<ns1:M2004_CXM_Currency_c xsi:nil="true"/>
<ns1:M2004_CXM_Fcl_c xsi:nil="true"/>
<ns1:M2004_CXM_ParentFcl_c xsi:nil="true"/>
<ns1:M2004_CXM_ChildFcl_c xsi:nil="true"/>
<ns1:M2004_CXM_DCLAccount_Id_c xsi:nil="true"/>
<ns1:M2004_CXM_DCLAccount_c xsi:nil="true"/>
<ns1:M2004_CXM_DCLOppty_Id_c xsi:nil="true"/>
<ns1:M2004_CXM_DCLOppty_c xsi:nil="true"/>
<ns1:Opportunity_Id_M2004_CXM_1ToMOpptyToContact xsi:nil="true"/>
<ns1:ConditionallyMandatory_c/>
<ns1:O365_2004_CNCMCL_c xsi:nil="true"/>
<ns1:M2004_CXM_DCLCusOBJ2_Id_c xsi:nil="true"/>
<ns1:M2004_CXM_DCLCusOBJ2_c xsi:nil="true"/>
<ns1:M2004_CXM_MCL_c xsi:nil="true"/>
<ns1:Contact_FC_MultiSelect_c xsi:nil="true"/>
<ns1:Contact_FCL_Parent_c xsi:nil="true"/>
<ns1:Contact_FCL_Child_c xsi:nil="true"/>
<ns1:TextAdvExpr_c xsi:nil="true"/>
<ns1:AccessGroupCustomObject_Id_AccessGroupCustomRelationship_Contact xsi:nil="true"/>
<ns1:CDA_Text_c xsi:nil="true"/>
<ns1:CDA_Num_c xsi:nil="true"/>
<ns1:CDA_Dat_c xsi:nil="true"/>
```

```
<ns1:CDA_CB_c>false</ns1:CDA_CB_c>
<ns1:CDA_Per_c xsi:nil="true"/>
<ns1:CDA_DatTime_c xsi:nil="true"/>
<ns1:CDA_Currency_c xsi:nil="true"/>
<ns1:CDA_FCL_c xsi:nil="true"/>
<ns1:CDA_DCL_Id_c xsi:nil="true"/>
<ns1:CDA_DCL_c xsi:nil="true"/>
<ns1:CDA_CHFCL_c xsi:nil="true"/>
<ns1:CDA_MULFCL_c xsi:nil="true"/>
<ns1:CDA_PFCL_c xsi:nil="true"/>
<ns1:Lead_Id_Leads_Contact_Relationship xsi:nil="true"/>
<ns1:Person_Id_SelfRef_Con xsi:nil="true"/>
<ns1:ContactDCL_Id_c xsi:nil="true"/>
<ns1:ContactDCL_c xsi:nil="true"/>
<ns1:ContactCustNum_c xsi:nil="true"/>
<ns1:ContactCustDateTime_c xsi:nil="true"/>
<ns1:ContactCustFCL_c xsi:nil="true"/>
<ns1:ContactCustPerc_Rename_c xsi:nil="true"/>
</ns1:PersonProfile>
<ns1:PartyUsageAssignment>
<ns3:PartyUsgAssignmentId>300100590899623</ns3:PartyUsgAssignmentId>
<ns3:PartyId>300100590899622</ns3:PartyId>
<ns3:PartyUsageCode>CONTACT</ns3:PartyUsageCode>
<ns3:EffectiveStartDate>2022-03-18</ns3:EffectiveStartDate>
<ns3:EffectiveEndDate>4712-12-31</ns3:EffectiveEndDate>
<ns3:StatusFlag>true</ns3:StatusFlag>
<ns3:Comments xsi:nil="true"/>
<ns3:OwnerTableName xsi:nil="true"/>
<ns3:OwnerTableId xsi:nil="true"/>
<ns3:CreatedByModule>HZ_WS</ns3:CreatedByModule>
<ns3:ObjectVersionNumber>1</ns3:ObjectVersionNumber>
<ns3:CreatedBy>SALES_ADMIN</ns3:CreatedBy>
<ns3:CreationDate>2022-03-18T07:57:04.413Z</ns3:CreationDate>
<ns3:LastUpdateLogin>DA2788A710A80007E053D711F10AAD66</ns3:LastUpdateLogin>
<ns3:LastUpdateDate>2022-03-18T07:57:04.526Z</ns3:LastUpdateDate>
<ns3:LastUpdatedBy>SALES_ADMIN</ns3:LastUpdatedBy>
<ns3:RequestId xsi:nil="true"/>
</ns1:PartyUsageAssignment>
<ns1:PartyUsageAssignment>
<ns3:PartyUsgAssignmentId>300100590899636</ns3:PartyUsgAssignmentId>
<ns3:PartyId>300100590899622</ns3:PartyId>
<ns3:PartyUsageCode>RELATED_PERSON</ns3:PartyUsageCode>
<ns3:EffectiveStartDate>2022-03-18</ns3:EffectiveStartDate>
<ns3:EffectiveEndDate>4712-12-31</ns3:EffectiveEndDate>
<ns3:StatusFlag>true</ns3:StatusFlag>
<ns3:Comments xsi:nil="true"/>
<ns3:OwnerTableName>HZ_RELATIONSHIPS</ns3:OwnerTableName>
<ns3:OwnerTableId>300100590899635</ns3:OwnerTableId>
<ns3:CreatedByModule>HZ_WS</ns3:CreatedByModule>
<ns3:ObjectVersionNumber>1</ns3:ObjectVersionNumber>
<ns3:CreatedBy>FUSION</ns3:CreatedBy>
<ns3:CreationDate>2022-03-18T08:03:13.402Z</ns3:CreationDate>
<ns3:LastUpdateLogin>DA2767E020B9FFEBE053D711F10A1189</ns3:LastUpdateLogin>
<ns3:LastUpdateDate>2022-03-18T08:03:15.378Z</ns3:LastUpdateDate>
<ns3:LastUpdatedBy>FUSION</ns3:LastUpdatedBy>
<ns3:RequestId xsi:nil="true"/>
</ns1:PartyUsageAssignment>
<ns1:Relationship xmlns:ns10="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/relationship/">
<ns8:RelationshipRecId>300100590899634</ns8:RelationshipRecId>
<ns8:RelationshipId>300100590899635</ns8:RelationshipId>
<ns8:SubjectId>300100590899622</ns8:SubjectId>
<ns8:SubjectType>PERSON</ns8:SubjectType>
<ns8:SubjectTableName>HZ_PARTIES</ns8:SubjectTableName>
<ns8:ObjectId>300100590899610</ns8:ObjectId>
<ns8:ObjectType>PERSON</ns8:ObjectType>
<ns8:ObjectTableName>HZ_PARTIES</ns8:ObjectTableName>
```

```
<ns8:RelationshipCode>CONTACT</ns8:RelationshipCode>
<ns8:RelationshipType>CONTACT</ns8:RelationshipType>
<ns8:Role>PERWITHCONTACT</ns8:Role>
<ns8:Comments xsi:nil="true"/>
<ns8:StartDate>2022-03-18</ns8:StartDate>
<ns8:EndDate>4712-12-31</ns8:EndDate>
<ns8:Status>A</ns8:Status>
<ns8:CreatedBy>FUSION</ns8:CreatedBy>
<ns8:CreationDate>2022-03-18T08:03:11Z</ns8:CreationDate>
<ns8:LastUpdatedBy>FUSION</ns8:LastUpdatedBy>
<ns8:LastUpdateDate>2022-03-18T08:03:14.517Z</ns8:LastUpdateDate>
<ns8:LastUpdateLogin>DA2767E020B9FFEBE053D711F10A1189</ns8:LastUpdateLogin>
<ns8:RequestId xsi:nil="true"/>
<ns8:ObjectVersionNumber>1</ns8:ObjectVersionNumber>
<ns8:CreatedByModule>HZ_WS</ns8:CreatedByModule>
<ns8:AdditionalInformation1 xsi:nil="true"/>
<ns8:AdditionalInformation2 xsi:nil="true"/>
<ns8:AdditionalInformation3 xsi:nil="true"/>
<ns8:AdditionalInformation4 xsi:nil="true"/>
<ns8:AdditionalInformation5 xsi:nil="true"/>
<ns8:AdditionalInformation6 xsi:nil="true"/>
<ns8:AdditionalInformation7 xsi:nil="true"/>
<ns8:AdditionalInformation8 xsi:nil="true"/>
<ns8:AdditionalInformation9 xsi:nil="true"/>
<ns8:AdditionalInformation10 xsi:nil="true"/>
<ns8:AdditionalInformation11 xsi:nil="true"/>
<ns8:AdditionalInformation12 xsi:nil="true"/>
<ns8:AdditionalInformation13 xsi:nil="true"/>
<ns8:AdditionalInformation14 xsi:nil="true"/>
<ns8:AdditionalInformation15 xsi:nil="true"/>
<ns8:AdditionalInformation16 xsi:nil="true"/>
<ns8:AdditionalInformation17 xsi:nil="true"/>
<ns8:AdditionalInformation18 xsi:nil="true"/>
<ns8:AdditionalInformation19 xsi:nil="true"/>
<ns8:AdditionalInformation20 xsi:nil="true"/>
<ns8:AdditionalInformation21 xsi:nil="true"/>
<ns8:AdditionalInformation22 xsi:nil="true"/>
<ns8:AdditionalInformation23 xsi:nil="true"/>
<ns8:AdditionalInformation24 xsi:nil="true"/>
<ns8:AdditionalInformation25 xsi:nil="true"/>
<ns8:AdditionalInformation26 xsi:nil="true"/>
<ns8:AdditionalInformation27 xsi:nil="true"/>
<ns8:AdditionalInformation28 xsi:nil="true"/>
<ns8:AdditionalInformation29 xsi:nil="true"/>
<ns8:AdditionalInformation30 xsi:nil="true"/>
<ns8:DirectionCode>C</ns8:DirectionCode>
<ns8:PercentageOwnership xsi:nil="true"/>
<ns8:ObjectUsageCode xsi:nil="true"/>
<ns8:SubjectUsageCode xsi:nil="true"/>
<ns8:PreferredContactFlag>true</ns8:PreferredContactFlag>
<ns8:ObjectPartyName>New Contact To test</ns8:ObjectPartyName>
<ns8:PartyName>New Contact To test</ns8:PartyName>
<ns8:CurrencyCode>USD</ns8:CurrencyCode>
<ns8:CurcyConvRateType>Corporate</ns8:CurcyConvRateType>
<ns8:CorpCurrencyCode>USD</ns8:CorpCurrencyCode>
<ns8:SubjectEmailAddress xsi:nil="true"/>
<ns8:ObjectEmailAddress xsi:nil="true"/>
<ns8:PrimaryCustomerFlag>false</ns8:PrimaryCustomerFlag>
<ns8:OrganizationContact xmlns:ns9="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
orgContact/">
<ns8:OrgContactId>300100590899638</ns8:OrgContactId>
<ns8:PartyRelationshipId>300100590899635</ns8:PartyRelationshipId>
<ns8:ContactPartyId>300100590899622</ns8:ContactPartyId>
<ns8:PersonFirstName>New Contact1</ns8:PersonFirstName>
<ns8:PersonLastName>To test2</ns8:PersonLastName>
<ns8:ContactName>New Contact1 To test2</ns8:ContactName>
```

```
<ns8:PersonPreNameAdjunct xsi:nil="true"/>
<ns8:PersonMiddleName xsi:nil="true"/>
<ns8:PersonNameSuffix xsi:nil="true"/>
<ns8:PersonPreviousLastName xsi:nil="true"/>
<ns8:PersonAcademicTitle xsi:nil="true"/>
<ns8:Salutation xsi:nil="true"/>
<ns8:PersonLastNamePrefix xsi:nil="true"/>
<ns8:PreferredName xsi:nil="true"/>
<ns8:PersonSecondLastName xsi:nil="true"/>
<ns8:PersonLanguageName xsi:nil="true"/>
<ns8:PersonTitle xsi:nil="true"/>
<ns8:PersonCertificationLevel xsi:nil="true"/>
<ns8:PersonCertReasonCode xsi:nil="true"/>
<ns8:CustomerPartyId>300100590899610</ns8:CustomerPartyId>
<ns8:CustomerUniqueName>New Contact To test</ns8:CustomerUniqueName>
<ns8:CustomerName>New Contact To test</ns8:CustomerName>
<ns8:CustomerPartyNumber>CDRM_1178567</ns8:CustomerPartyNumber>
<ns8:FormattedPhoneNumber xsi:nil="true"/>
<ns8:EmailAddress/>
<ns8:WebUrl/>
<ns8:Comments xsi:nil="true"/>
<ns8:ContactNumber>CDRM_390259</ns8:ContactNumber>
<ns8:DepartmentCode xsi:nil="true"/>
<ns8:Department xsi:nil="true"/>
<ns8:JobTitle xsi:nil="true"/>
<ns8:DecisionMakerFlag>false</ns8:DecisionMakerFlag>
<ns8:JobTitleCode xsi:nil="true"/>
<ns8:ReferenceUseFlag>false</ns8:ReferenceUseFlag>
<ns8:Rank xsi:nil="true"/>
<ns8:LastUpdateDate>2022-03-18T08:03:15.381Z</ns8:LastUpdateDate>
<ns8:LastUpdatedBy>FUSION</ns8:LastUpdatedBy>
<ns8:CreationDate>2022-03-18T08:03:13.59Z</ns8:CreationDate>
<ns8:CreatedBy>FUSION</ns8:CreatedBy>
<ns8:LastUpdateLogin>DA2767E020B9FFEBE053D711F10A1189</ns8:LastUpdateLogin>
<ns8:RequestId xsi:nil="true"/>
<ns8:PartySiteId xsi:nil="true"/>
<ns8:OrigSystemReference>300100590899638</ns8:OrigSystemReference>
<ns8:CreatedByModule>HZ_WS</ns8:CreatedByModule>
<ns8:ObjectVersionNumber>1</ns8:ObjectVersionNumber>
<ns8:PartySiteName xsi:nil="true"/>
<ns8:SalesAffinityCode xsi:nil="true"/>
<ns8:SalesAffinityComments xsi:nil="true"/>
<ns8:SalesBuyingRoleCode xsi:nil="true"/>
<ns8:SalesInfluenceLevelCode xsi:nil="true"/>
<ns8:FormattedAddress xsi:nil="true"/>
<ns8:PreferredContactMethod xsi:nil="true"/>
<ns8:CurrencyCode>USD</ns8:CurrencyCode>
<ns8:CurcyConvRateType>Corporate</ns8:CurcyConvRateType>
<ns8:CorpCurrencyCode>USD</ns8:CorpCurrencyCode>
<ns8:PreferredContactFlag>true</ns8:PreferredContactFlag>
<ns8:ContactFormattedAddress xsi:nil="true"/>
<ns8:ContactFormattedMultilineAddress xsi:nil="true"/>
<ns8:CustomerEmailAddress xsi:nil="true"/>
<ns8:PrimaryCustomerFlag>false</ns8:PrimaryCustomerFlag>
<ns8:OrgContactInformation>
<ns9:OrgContactId>300100590899638</ns9:OrgContactId>
<ns9:hzOrgcont1 xsi:nil="true"/>
<ns9:__FLEX_Context xsi:nil="true"/>
<ns9:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns9:_FLEX_NumOfSegments>1</ns9:_FLEX_NumOfSegments>
</ns8:OrgContactInformation>
<ns8:R10_CustCon_ChkBox_c>false</ns8:R10_CustCon_ChkBox_c>
<ns8:R10_CustCon_FCL_c xsi:nil="true"/>
<ns8:R10_CustCon_DCL_Id_c xsi:nil="true"/>
<ns8:R10_CustCon_DCL_c xsi:nil="true"/>
<ns8:R10_CustCon_Num_c xsi:nil="true"/>
```

```
 <ns8:R10_CustCon_Text_c xsi:nil="true"/>
 <ns8:R10_CustCon_Date_c xsi:nil="true"/>
 <ns8:Campaigns_Id_R10_MKTCamp_MOD_CustContactProfile xsi:nil="true"/>
 <ns8:JOIN_ContactToPersonJoin_Status_Bug26194318>ACTIVE</
ns8:JOIN_ContactToPersonJoin_Status_Bug26194318>
 <ns8:JOIN_ContactToPersonJoin_Rent_Own_Fcl xsi:nil="true"/>
 </ns8:OrganizationContact>
 <ns8:RelationshipInformation>
 <ns10:RelationshipRecId>300100590899634</ns10:RelationshipRecId>
 <ns10:__FLEX_Context xsi:nil="true"/>
 <ns10:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns10:_FLEX_NumOfSegments>0</ns10:_FLEX_NumOfSegments>
 </ns8:RelationshipInformation>
 <ns8:PartyUsageAssignment>
 <ns3:PartyUsgAssignmentId>300100590899637</ns3:PartyUsgAssignmentId>
 <ns3:PartyId>300100590899610</ns3:PartyId>
 <ns3:PartyUsageCode>RELATED_PERSON</ns3:PartyUsageCode>
 <ns3:EffectiveStartDate>2022-03-18</ns3:EffectiveStartDate>
 <ns3:EffectiveEndDate>4712-12-31</ns3:EffectiveEndDate>
 <ns3:StatusFlag>true</ns3:StatusFlag>
 <ns3:Comments xsi:nil="true"/>
 <ns3:OwnerTableName>HZ_RELATIONSHIPS</ns3:OwnerTableName>
 <ns3:OwnerTableId>300100590899635</ns3:OwnerTableId>
 <ns3:CreatedByModule>HZ_WS</ns3:CreatedByModule>
 <ns3:ObjectVersionNumber>1</ns3:ObjectVersionNumber>
 <ns3:CreatedBy>FUSION</ns3:CreatedBy>
 <ns3:CreationDate>2022-03-18T08:03:13.404Z</ns3:CreationDate>
 <ns3:LastUpdateLogin>DA2767E020B9FFEBE053D711F10A1189</ns3:LastUpdateLogin>
 <ns3:LastUpdateDate>2022-03-18T08:03:15.38Z</ns3:LastUpdateDate>
 <ns3:LastUpdatedBy>FUSION</ns3:LastUpdatedBy>
 <ns3:RequestId xsi:nil="true"/>
 </ns8:PartyUsageAssignment>
 <ns8:SubjectPartyUsageAssignment>
 <ns3:PartyUsgAssignmentId>300100590899636</ns3:PartyUsgAssignmentId>
 <ns3:PartyId>300100590899622</ns3:PartyId>
 <ns3:PartyUsageCode>RELATED_PERSON</ns3:PartyUsageCode>
 <ns3:EffectiveStartDate>2022-03-18</ns3:EffectiveStartDate>
 <ns3:EffectiveEndDate>4712-12-31</ns3:EffectiveEndDate>
 <ns3:StatusFlag>true</ns3:StatusFlag>
 <ns3:Comments xsi:nil="true"/>
 <ns3:OwnerTableName>HZ_RELATIONSHIPS</ns3:OwnerTableName>
 <ns3:OwnerTableId>300100590899635</ns3:OwnerTableId>
 <ns3:CreatedByModule>HZ_WS</ns3:CreatedByModule>
 <ns3:ObjectVersionNumber>1</ns3:ObjectVersionNumber>
 <ns3:CreatedBy>FUSION</ns3:CreatedBy>
 <ns3:CreationDate>2022-03-18T08:03:13.402Z</ns3:CreationDate>
 <ns3:LastUpdateLogin>DA2767E020B9FFEBE053D711F10A1189</ns3:LastUpdateLogin>
 <ns3:LastUpdateDate>2022-03-18T08:03:15.378Z</ns3:LastUpdateDate>
 <ns3:LastUpdatedBy>FUSION</ns3:LastUpdatedBy>
 <ns3:RequestId xsi:nil="true"/>
 </ns8:SubjectPartyUsageAssignment>
 <ns8:R10_Relationship_Perc_c xsi:nil="true"/>
 <ns8:R10_Relationship_Text_c xsi:nil="true"/>
 <ns8:R10_Relationship_Num_c>3844</ns8:R10_Relationship_Num_c>
 <ns8:R10_Relationship_Date_c xsi:nil="true"/>
 </ns1:Relationship>
 </ns2:result>
 </ns0:getPersonResponse>
 </env:Body>
</env:Envelope>
```

- With PartyID of new contact and RelationshipID, use **mergePerson** operation of **PartiesPersonService** to create the contact point.

  Operation: **mergePerson**

  Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/types/" xmlns:per="http://
xmlns.oracle.com/apps/cdm/foundation/parties/personService/" xmlns:par="http://xmlns.oracle.com/
apps/cdm/foundation/parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/
parties/flex/sourceSystemRef/" xmlns:con="http://xmlns.oracle.com/apps/cdm/foundation/parties/
contactPointService/" xmlns:con1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
contactPoint/" xmlns:par1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/"
 xmlns:per1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/person/" xmlns:rel="http://
xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/" xmlns:org="http://xmlns.oracle.com/
apps/cdm/foundation/parties/flex/orgContact/" xmlns:rel1="http://xmlns.oracle.com/apps/cdm/foundation/
parties/flex/relationship/">
<soapenv:Header/>
 <soapenv:Body>
 <typ:mergePerson>
 <typ:personParty>
 <per:PartyId>300100590899610</per:PartyId>
 <per:Phone>
 <con:OwnerTableName>HZ_PARTIES</con:OwnerTableName>
 <con:PhoneCountryCode>1</con:PhoneCountryCode>
 <con:PhoneNumber>333333</con:PhoneNumber>
 <con:PhoneLineType>GEN</con:PhoneLineType>
 <con:CreatedByModule>HZ_WS</con:CreatedByModule>
 <con:RelationshipId>300100590899635</con:RelationshipId>
 </per:Phone>
 </typ:personParty>
 </typ:mergePerson>
 </soapenv:Body>
</soapenv:Envelope>
```

  Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/applicationModule/
PersonService/mergePersonResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:b6c360da-0745-4031-985b-88a44c2687e5</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:mergePersonResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/
applicationModule/types/">
 <ns2:result xsi:type="ns1:PersonResult" xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/
parties/contactPointService/" xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/
relationshipService/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/"
 xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/
personService/applicationModule/types/">
 <ns1:Value>
 <ns1:PartyId>300100590899610</ns1:PartyId>
 <ns1:PartyNumber>CDRM_1178567</ns1:PartyNumber>
 <ns1:PartyName>New Contact To test</ns1:PartyName>
 <ns1:PartyType>PERSON</ns1:PartyType>
 <ns1:ValidatedFlag xsi:nil="true"/>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:LastUpdateLogin>DA278D9FC97B000FE053D711F10A951C</ns1:LastUpdateLogin>
```

```
<ns1:CreationDate>2022-03-18T07:51:12Z</ns1:CreationDate>
<ns1:RequestId xsi:nil="true"/>
<ns1:LastUpdateDate>2022-03-18T09:42:10.093Z</ns1:LastUpdateDate>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:OrigSystemReference>300100590899610</ns1:OrigSystemReference>
<ns1:SICCode xsi:nil="true"/>
<ns1:JgzzFiscalCode xsi:nil="true"/>
<ns1:PersonFirstName>New Contact</ns1:PersonFirstName>
<ns1:PersonPreNameAdjunct xsi:nil="true"/>
<ns1:PersonLastName>To test</ns1:PersonLastName>
<ns1:PersonMiddleName xsi:nil="true"/>
<ns1:PersonTitle xsi:nil="true"/>
<ns1:PersonNameSuffix xsi:nil="true"/>
<ns1:PersonPreviousLastName xsi:nil="true"/>
<ns1:PersonAcademicTitle xsi:nil="true"/>
<ns1:Country xsi:nil="true"/>
<ns1:Address2 xsi:nil="true"/>
<ns1:Address1 xsi:nil="true"/>
<ns1:Address4 xsi:nil="true"/>
<ns1:Address3 xsi:nil="true"/>
<ns1:PostalCode xsi:nil="true"/>
<ns1:City xsi:nil="true"/>
<ns1:Province xsi:nil="true"/>
<ns1:State xsi:nil="true"/>
<ns1:County xsi:nil="true"/>
<ns1:Status>A</ns1:Status>
<ns1:URL xsi:nil="true"/>
<ns1:SICCodeType xsi:nil="true"/>
<ns1:EmailAddress xsi:nil="true"/>
<ns1:GSAIndicatorFlag xsi:nil="true"/>
<ns1:LanguageName xsi:nil="true"/>
<ns1:MissionStatement xsi:nil="true"/>
<ns1:CategoryCode xsi:nil="true"/>
<ns1:ThirdPartyFlag xsi:nil="true"/>
<ns1:Salutation xsi:nil="true"/>
<ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
<ns1:CertReasonCode xsi:nil="true"/>
<ns1:CertificationLevel xsi:nil="true"/>
<ns1:PrimaryPhonePurpose xsi:nil="true"/>
<ns1:PrimaryPhoneContactPTId>300100590899657</ns1:PrimaryPhoneContactPTId>
<ns1:PrimaryPhoneCountryCode>1</ns1:PrimaryPhoneCountryCode>
<ns1:PrimaryPhoneLineType>GEN</ns1:PrimaryPhoneLineType>
<ns1:PrimaryPhoneNumber>333333</ns1:PrimaryPhoneNumber>
<ns1:PrimaryPhoneAreaCode xsi:nil="true"/>
<ns1:PreferredContactMethod xsi:nil="true"/>
<ns1:PrimaryPhoneExtension xsi:nil="true"/>
<ns1:IdenAddrLocationId xsi:nil="true"/>
<ns1:PrimaryEmailContactPTId xsi:nil="true"/>
<ns1:IdenAddrPartySiteId xsi:nil="true"/>
<ns1:PersonLastNamePrefix xsi:nil="true"/>
<ns1:PrimaryURLContactPTId xsi:nil="true"/>
<ns1:PreferredName xsi:nil="true"/>
<ns1:PersonSecondLastName xsi:nil="true"/>
<ns1:PreferredNameId xsi:nil="true"/>
<ns1:PreferredContactPersonId>300100590899622</ns1:PreferredContactPersonId>
<ns1:InternalFlag>false</ns1:InternalFlag>
<ns1:PreferredFunctionalCurrency xsi:nil="true"/>
<ns1:Gender xsi:nil="true"/>
<ns1:MaritalStatus xsi:nil="true"/>
<ns1:Comments xsi:nil="true"/>
<ns1:DateOfBirth xsi:nil="true"/>
<ns1:UserGUID xsi:nil="true"/>
<ns1:PartyUniqueName>New Contact To test</ns1:PartyUniqueName>
<ns1:SourceSystem xsi:nil="true"/>
<ns1:SourceSystemReferenceValue xsi:nil="true"/>
<ns1:SourceSystemUpdateDate xsi:nil="true"/>
```

```
<ns1:Phone xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/contactPoint/">
<ns5:ContactPointId>300100590899657</ns5:ContactPointId>
<ns5:ContactPointType>PHONE</ns5:ContactPointType>
<ns5:Status>A</ns5:Status>
<ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
<ns5:OwnerTableId>300100590899610</ns5:OwnerTableId>
<ns5:PrimaryFlag>true</ns5:PrimaryFlag>
<ns5:OrigSystemReference>300100590899657</ns5:OrigSystemReference>
<ns5:LastUpdateDate>2022-03-18T09:42:08.996Z</ns5:LastUpdateDate>
<ns5:LastUpdatedBy>SALES_ADMIN</ns5:LastUpdatedBy>
<ns5:CreationDate>2022-03-18T09:42:05.001Z</ns5:CreationDate>
<ns5:CreatedBy>SALES_ADMIN</ns5:CreatedBy>
<ns5:LastUpdateLogin>DA278D9FC97B000FE053D711F10A951C</ns5:LastUpdateLogin>
<ns5:RequestId xsi:nil="true"/>
<ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
<ns5:CreatedByModule>HZ_WS</ns5:CreatedByModule>
<ns5:ContactPointPurpose xsi:nil="true"/>
<ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
<ns5:StartDate>2022-03-18</ns5:StartDate>
<ns5:EndDate>4712-12-31</ns5:EndDate>
<ns5:RelationshipId>300100590899635</ns5:RelationshipId>
<ns5:PartyUsageCode xsi:nil="true"/>
<ns5:OrigSystem xsi:nil="true"/>
<ns5:PhoneCallingCalendar xsi:nil="true"/>
<ns5:LastContactDtTime xsi:nil="true"/>
<ns5:PhoneAreaCode xsi:nil="true"/>
<ns5:PhoneCountryCode>1</ns5:PhoneCountryCode>
<ns5:PhoneNumber>333333</ns5:PhoneNumber>
<ns5:PhoneExtension xsi:nil="true"/>
<ns5:PhoneLineType>GEN</ns5:PhoneLineType>
<ns5:RawPhoneNumber>1-333333</ns5:RawPhoneNumber>
<ns5:PagerTypeCode xsi:nil="true"/>
<ns5:FormattedPhoneNumber>+1 333333</ns5:FormattedPhoneNumber>
<ns5:TransposedPhoneNumber>3333331</ns5:TransposedPhoneNumber>
<ns5:PartyName>New Contact To test</ns5:PartyName>
<ns5:TimezoneCode xsi:nil="true"/>
<ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
</ns1:Phone>
</ns1:Value>
</ns2:result>
</ns0:mergePersonResponse>
</env:Body>
</env:Envelope>
```

- Use **mergeCustomerAccount** operation of **CustomerAccountService** to associate with customer account.

  Operation: **mergeCustomerAccount**

- **Request Body**

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/
envelope/" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/
customerAccountService/applicationModule/types/" xmlns:cus="http://
xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/"
 xmlns:cus1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContactRole/" xmlns:par="http://xmlns.oracle.com/apps/cdm/foundation/
parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/
parties/flex/sourceSystemRef/" xmlns:cus2="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountContact/" xmlns:cus3="http://xmlns.oracle.com/
apps/cdm/foundation/parties/flex/custAccountRel/" xmlns:cus4="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSiteUse/"
 xmlns:cus5="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/" xmlns:cus6="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/custAccount/">
```

```
<soapenv:Header/>
<soapenv:Body>
<typ:mergeCustomerAccount>
<typ:customerAccount>
<cus:CustomerAccountId>100000000827446</cus:CustomerAccountId>
<cus:PartyId>100000000827584</cus:PartyId>
<cus:CustomerAccountSite>
<cus:CustomerAccountSiteId>300000006374509</cus:CustomerAccountSiteId>
<cus:CustomerAccountId>100000000827446</cus:CustomerAccountId>
<cus:PartySiteId>300000006374510</cus:PartySiteId>
<cus:CustomerAccountContact>
<cus:CustomerAccountId>100000000827446</cus:CustomerAccountId>
<cus:CustomerAccountSiteId>300000006374509</cus:CustomerAccountSiteId>
<cus:PrimaryFlag>false</cus:PrimaryFlag>
<cus:RoleType>CONTACT</cus:RoleType>
<cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
<cus:RelationshipId>300000006370123</cus:RelationshipId>
<cus:CustomerAccountContactRole>
<cus:ResponsibilityType>BILL_TO</cus:ResponsibilityType>
<cus:PrimaryFlag>true</cus:PrimaryFlag>
<cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
</cus:CustomerAccountContactRole>
<!--Zero or more repetitions:-->
</cus:CustomerAccountContact>
</cus:CustomerAccountSite>
</typ:customerAccount>
</typ:mergeCustomerAccount>
</soapenv:Body>
</soapenv:Envelope
```

Response Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/
envelope/" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/
customerAccountService/applicationModule/types/" xmlns:cus="http://
xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/"
 xmlns:cus1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContactRole/" xmlns:par="http://xmlns.oracle.com/apps/cdm/foundation/
parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/
parties/flex/sourceSystemRef/" xmlns:cus2="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountContact/" xmlns:cus3="http://xmlns.oracle.com/
apps/cdm/foundation/parties/flex/custAccountRel/" xmlns:cus4="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSiteUse/"
 xmlns:cus5="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/" xmlns:cus6="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/custAccount/">
   <soapenv:Header/>
   <soapenv:Body>
      <typ:mergeCustomerAccount>
         <typ:customerAccount>
            <cus:CustomerAccountId>100000000827446</cus:CustomerAccountId>
            <cus:PartyId>100000000827584</cus:PartyId>
            <cus:CustomerAccountSite>
               <cus:CustomerAccountSiteId>300000006374509</
cus:CustomerAccountSiteId>
               <cus:CustomerAccountId>100000000827446</cus:CustomerAccountId>
               <cus:PartySiteId>300000006374510</cus:PartySiteId>
               <cus:CustomerAccountContact>
                  <cus:CustomerAccountId>100000000827446</cus:CustomerAccountId>
```

```
                        <cus:CustomerAccountSiteId>300000006374509</
      cus:CustomerAccountSiteId>
                        <cus:PrimaryFlag>false</cus:PrimaryFlag>
                        <cus:RoleType>CONTACT</cus:RoleType>
                        <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
                        <cus:RelationshipId>300000006370123</cus:RelationshipId>
                        <cus:CustomerAccountContactRole>
                           <cus:ResponsibilityType>BILL_TO</cus:ResponsibilityType>
                           <cus:PrimaryFlag>true</cus:PrimaryFlag>
                           <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
                        </cus:CustomerAccountContactRole>
                        <!--Zero or more repetitions:-->
                     </cus:CustomerAccountContact>
                  </cus:CustomerAccountSite>
               </typ:customerAccount>
            </typ:mergeCustomerAccount>
         </soapenv:Body>
      </soapenv:Envelope>
```

How do I add a new role to an existing account contact?

In this use case, we'll add a new role to an existing account.

Operation: **mergeCustomerAccount**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
 xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/
applicationModule/types/" xmlns:cus="http://xmlns.oracle.com/apps/cdm/foundation/parties/
customerAccountService/" xmlns:cus1="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/custAccountContactRole/" xmlns:par="http://xmlns.oracle.com/apps/cdm/foundation/
parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/sourceSystemRef/" xmlns:cus2="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/custAccountContact/" xmlns:cus3="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/custAccountRel/" xmlns:cus4="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/custAccountSiteUse/" xmlns:cus5="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/custAccountSite/" xmlns:cus6="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/custAccount/">
   <soapenv:Header/>
   <soapenv:Body>
      <typ:mergeCustomerAccount>
         <typ:customerAccount>
            <cus:CustomerAccountId>300000120680948</cus:CustomerAccountId>
            <cus:CustomerAccountSite>
               <cus:CustomerAccountSiteId>300000120680900</cus:CustomerAccountSiteId>
               <cus:CustomerAccountId>300000120680948</cus:CustomerAccountId>
               <cus:CustomerAccountContact>
                  <cus:CustomerAccountRoleId>300000292708014</cus:CustomerAccountRoleId>
                  <cus:CustomerAccountId>300000120680948</cus:CustomerAccountId>
                  <cus:CustomerAccountSiteId>300000120680900</cus:CustomerAccountSiteId>
                  <cus:CustomerAccountContactRole>
                     <cus:ResponsibilityId>300000294937731</cus:ResponsibilityId>
                     <cus:CustomerAccountRoleId>300000292708014</
cus:CustomerAccountRoleId>
                     <cus:ResponsibilityType>SHIP_TO</cus:ResponsibilityType>
                  </cus:CustomerAccountContactRole>
```

```
               </cus:CustomerAccountContact>
            </cus:CustomerAccountSite>
         </typ:customerAccount>
      </typ:mergeCustomerAccount>
   </soapenv:Body>
</soapenv:Envelope>

<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing">
   <env:Header>
```

Response Body

```
<wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/
applicationModule/CustomerAccountService/mergeCustomerAccountResponse</wsa:Action>
      <wsa:MessageID>urn:uuid:9663cb78-2fdd-40e7-a08e-00f6cbcc72da</wsa:MessageID>
   </env:Header>
   <env:Body>
      <ns0:mergeCustomerAccountResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/
foundation/parties/customerAccountService/applicationModule/types/">
         <ns0:result xsi:type="ns2:CustomerAccountResult" xmlns:ns4="http://
xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:ns9="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/" xmlns:ns2="http://
xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/" xmlns:tns="http://
xmlns.oracle.com/adf/svc/errors/" xmlns:ns1="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
            <ns2:Value>
               <ns2:CustomerAccountId>300000120680948</ns2:CustomerAccountId>
               <ns2:PartyId>300000120680946</ns2:PartyId>
               <ns2:LastUpdateDate>2023-01-15T03:28:47.224Z</ns2:LastUpdateDate>
               <ns2:AccountNumber>B233007</ns2:AccountNumber>
               <ns2:LastUpdatedBy>pr@t</ns2:LastUpdatedBy>
               <ns2:CreationDate>2020-11-23T08:02:51.588Z</ns2:CreationDate>
               <ns2:CreatedBy>pr@t</ns2:CreatedBy>
               <ns2:LastUpdateLogin>F20B42A788AB175DE053A658500AE3FE</ns2:LastUpdateLogin>
               <ns2:RequestId xsi:nil="true"/>
               <ns2:OrigSystem xsi:nil="true"/>
               <ns2:OrigSystemReference>300000120680948</ns2:OrigSystemReference>
               <ns2:Status>A</ns2:Status>
               <ns2:CustomerType xsi:nil="true"/>
               <ns2:CustomerClassCode xsi:nil="true"/>
               <ns2:TaxCode xsi:nil="true"/>
               <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
               <ns2:TaxRoundingRule xsi:nil="true"/>
               <ns2:CoterminateDayMonth xsi:nil="true"/>
               <ns2:AccountEstablishedDate>2020-11-23</ns2:AccountEstablishedDate>
               <ns2:AccountTerminationDate>4712-12-31</ns2:AccountTerminationDate>
               <ns2:HeldBillExpirationDate xsi:nil="true"/>
               <ns2:HoldBillFlag>false</ns2:HoldBillFlag>
               <ns2:AccountName>ManojSuf</ns2:AccountName>
               <ns2:DepositRefundMethod xsi:nil="true"/>
               <ns2:NpaNumber xsi:nil="true"/>
               <ns2:SourceCode xsi:nil="true"/>
               <ns2:Comments xsi:nil="true"/>
               <ns2:DateTypePreference xsi:nil="true"/>
               <ns2:ArrivalsetsIncludeLinesFlag xsi:nil="true"/>
               <ns2:StatusUpdateDate xsi:nil="true"/>
               <ns2:AutopayFlag xsi:nil="true"/>
               <ns2:LastBatchId xsi:nil="true"/>
               <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
```

```
                <ns2:SellingPartyId xsi:nil="true"/>
                <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSite/">
                    <ns2:CustomerAccountSiteId>300000120680900</ns2:CustomerAccountSiteId>
                    <ns2:CustomerAccountId>300000120680948</ns2:CustomerAccountId>
                    <ns2:PartySiteId>300000120680901</ns2:PartySiteId>
                    <ns2:LastUpdateDate>2023-01-05T08:08:04.876Z</ns2:LastUpdateDate>
                    <ns2:LastUpdatedBy>pr@t</ns2:LastUpdatedBy>
                    <ns2:CreationDate>2020-11-23T07:25:00.083Z</ns2:CreationDate>
                    <ns2:CreatedBy>pr@t</ns2:CreatedBy>
                    <ns2:LastUpdateLogin>EF3DED5365C2C3E4E053B4941B0A1D09</
ns2:LastUpdateLogin>
                    <ns2:RequestId xsi:nil="true"/>
                    <ns2:OrigSystemReference>300000120680900</ns2:OrigSystemReference>
                    <ns2:Status>I</ns2:Status>
                    <ns2:BillToIndicator>N</ns2:BillToIndicator>
                    <ns2:MarketIndicator>N</ns2:MarketIndicator>
                    <ns2:ShipToIndicator>N</ns2:ShipToIndicator>
                    <ns2:CustomerCategoryCode xsi:nil="true"/>
                    <ns2:Language xsi:nil="true"/>
                    <ns2:KeyAccountFlag xsi:nil="true"/>
                    <ns2:TpHeaderId xsi:nil="true"/>
                    <ns2:EceTpLocationCode xsi:nil="true"/>
                    <ns2:TranslatedCustomerName xsi:nil="true"/>
                    <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                    <ns2:SetId>300000000002582</ns2:SetId>
                    <ns2:StartDate>2020-11-23</ns2:StartDate>
                    <ns2:EndDate>4712-12-31</ns2:EndDate>
                    <ns2:SetCode>ENTERPRISE</ns2:SetCode>
                    <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountContact/">
                        <ns2:CustomerAccountRoleId>300000292708014</
ns2:CustomerAccountRoleId>
                        <ns2:CustomerAccountId>300000120680948</ns2:CustomerAccountId>
                        <ns2:CustomerAccountSiteId>300000120680900</
ns2:CustomerAccountSiteId>
                        <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
                        <ns2:RoleType>CONTACT</ns2:RoleType>
                        <ns2:LastUpdateDate>2023-03-30T11:40:01.043Z</ns2:LastUpdateDate>
                        <ns2:SourceCode xsi:nil="true"/>
                        <ns2:LastUpdatedBy>pr@t</ns2:LastUpdatedBy>
                        <ns2:CreationDate>2022-08-17T03:11:13.85Z</ns2:CreationDate>
                        <ns2:CreatedBy>pr@t</ns2:CreatedBy>
                        <ns2:LastUpdateLogin>F77720382AE0A122E053845F500A1D13</
ns2:LastUpdateLogin>
                        <ns2:RequestId xsi:nil="true"/>
                        <ns2:OrigSystemReference>300000292708014</ns2:OrigSystemReference>
                        <ns2:Status>I</ns2:Status>
                        <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                        <ns2:RelationshipId>300000094584808</ns2:RelationshipId>
                        <ns2:ContactPersonId>300000094584806</ns2:ContactPersonId>
                        <ns2:CustomerAccountContactRole xmlns:ns0="http://xmlns.oracle.com/
apps/cdm/foundation/parties/flex/custAccountContactRole/">
                            <ns2:ResponsibilityId>300000294937731</ns2:ResponsibilityId>
                            <ns2:CustomerAccountRoleId>300000292708014</
ns2:CustomerAccountRoleId>
                            <ns2:ResponsibilityType>SHIP_TO</ns2:ResponsibilityType>
                            <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
                            <ns2:CreatedBy>pr@t</ns2:CreatedBy>
                            <ns2:CreationDate>2022-09-09T02:55:38.218Z</ns2:CreationDate>
```

```
                        <ns2:LastUpdateDate>2023-05-29T08:43:53Z</ns2:LastUpdateDate>
                        <ns2:LastUpdatedBy>pr@t</ns2:LastUpdatedBy>
                        <ns2:LastUpdateLogin>FB33D0EE78EE11B1E053A658500A452C</
ns2:LastUpdateLogin>
                        <ns2:RequestId xsi:nil="true"/>
                        <ns2:OrigSystemReference>300000294937731</ns2:OrigSystemReference>
                        <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                        <ns2:StatusCode>A</ns2:StatusCode>
                     </ns2:CustomerAccountContactRole>
                  </ns2:CustomerAccountContact>
               </ns2:CustomerAccountSite>
            </ns2:Value>
         </ns0:result>
      </ns0:mergeCustomerAccountResponse>
   </env:Body>
</env:Envelope>
```

Add a New Site Use to an Existing Customer Site

In this use case, we'll add a new site use to an existing customer site.

Operation: **mergeAccount**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/applicationModule/types/"
 xmlns:cus="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/" xmlns:cus1="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountContactRole/" xmlns:par="http://
xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/
cdm/foundation/parties/flex/sourceSystemRef/" xmlns:cus2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/flex/custAccountContact/" xmlns:cus3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountRel/" xmlns:cus4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSiteUse/"
 xmlns:cus5="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSite/" xmlns:cus6="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/">
<soapenv:Header/>
 <soapenv:Body>
 <typ:mergeCustomerAccount>
 <typ:customerAccount>
 <cus:CustomerAccountId>300100590899663</cus:CustomerAccountId>
 <cus:CustomerAccountSite>
 <cus:CustomerAccountSiteId>300100590899664</cus:CustomerAccountSiteId>
 <cus:SetId>202</cus:SetId>
 <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
 <cus:CustomerAccountSiteUse>
 <cus:SiteUseCode>SHIP_TO</cus:SiteUseCode>
 <cus:Location>CDRM_199390</cus:Location>
 <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
 </cus:CustomerAccountSiteUse>
 </cus:CustomerAccountSite>
 </typ:customerAccount>
 </typ:mergeCustomerAccount>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
```

```
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/applicationModule/
CustomerAccountService/mergeCustomerAccountResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:5fa14092-53c2-4fbd-bb58-37fd39e48349</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:mergeCustomerAccountResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
customerAccountService/applicationModule/types/">
 <ns0:result xsi:type="ns2:CustomerAccountResult" xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/
parties/partyService/" xmlns:ns9="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/"
 xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/" xmlns:tns="http://
xmlns.oracle.com/adf/svc/errors/" xmlns:ns1="http://xmlns.oracle.com/adf/svc/types/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance">
 <ns2:Value>
 <ns2:CustomerAccountId>300100590899663</ns2:CustomerAccountId>
 <ns2:PartyId>1003</ns2:PartyId>
 <ns2:LastUpdateDate>2022-03-18T11:18:31.284Z</ns2:LastUpdateDate>
 <ns2:AccountNumber>CDRM_233288</ns2:AccountNumber>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>2022-03-18T11:18:29.002Z</ns2:CreationDate>
 <ns2:CreatedBy>FUSION</ns2:CreatedBy>
 <ns2:LastUpdateLogin>DA278437F279FFF9E053D711F10A3522</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystem xsi:nil="true"/>
 <ns2:OrigSystemReference>300100590899663</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CustomerType xsi:nil="true"/>
 <ns2:CustomerClassCode xsi:nil="true"/>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:CoterminateDayMonth xsi:nil="true"/>
 <ns2:AccountEstablishedDate>2022-03-18</ns2:AccountEstablishedDate>
 <ns2:AccountTerminationDate>4712-12-31</ns2:AccountTerminationDate>
 <ns2:HeldBillExpirationDate xsi:nil="true"/>
 <ns2:HoldBillFlag>false</ns2:HoldBillFlag>
 <ns2:AccountName xsi:nil="true"/>
 <ns2:DepositRefundMethod xsi:nil="true"/>
 <ns2:NpaNumber xsi:nil="true"/>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:Comments xsi:nil="true"/>
 <ns2:DateTypePreference xsi:nil="true"/>
 <ns2:ArrivalsetsIncludeLinesFlag xsi:nil="true"/>
 <ns2:StatusUpdateDate xsi:nil="true"/>
 <ns2:AutopayFlag xsi:nil="true"/>
 <ns2:LastBatchId xsi:nil="true"/>
 <ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
 <ns2:SellingPartyId xsi:nil="true"/>
 <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/">
 <ns2:CustomerAccountSiteId>300100590899664</ns2:CustomerAccountSiteId>
 <ns2:CustomerAccountId>300100590899663</ns2:CustomerAccountId>
 <ns2:PartySiteId>300100590899661</ns2:PartySiteId>
 <ns2:LastUpdateDate>2022-03-18T11:23:54.278Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>2022-03-18T11:18:29.055Z</ns2:CreationDate>
 <ns2:CreatedBy>FUSION</ns2:CreatedBy>
 <ns2:LastUpdateLogin>DA27851EB6140001E053D711F10A4C92</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>300100590899664</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToIndicator>P</ns2:BillToIndicator>
 <ns2:MarketIndicator>N</ns2:MarketIndicator>
 <ns2:ShipToIndicator>P</ns2:ShipToIndicator>
 <ns2:CustomerCategoryCode xsi:nil="true"/>
 <ns2:Language xsi:nil="true"/>
 <ns2:KeyAccountFlag xsi:nil="true"/>
```

```
 <ns2:TpHeaderId xsi:nil="true"/>
 <ns2:EceTpLocationCode xsi:nil="true"/>
 <ns2:TranslatedCustomerName xsi:nil="true"/>
 <ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
 <ns2:SetId>202</ns2:SetId>
 <ns2:StartDate>2022-03-18</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:SetCode>Vision Corporation 202</ns2:SetCode>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>300100590899666</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>300100590899664</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2022-03-18T11:23:53.096Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>2022-03-18T11:23:53.001Z</ns2:CreationDate>
 <ns2:CreatedBy>FUSION</ns2:CreatedBy>
 <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>CDRM_199390</ns2:Location>
 <ns2:LastUpdateLogin>DA27851EB6140001E053D711F10A4C92</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference>300100590899666</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId xsi:nil="true"/>
 <ns2:GSAIndicator xsi:nil="true"/>
 <ns2:TerritoryId xsi:nil="true"/>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
 <ns2:SetId>202</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>2022-03-18</ns2:StartDate>
 </ns2:CustomerAccountSiteUse>
 </ns2:CustomerAccountSite>
 </ns2:Value>
 </ns0:result>
 </ns0:mergeCustomerAccountResponse>
 </env:Body>
</env:Envelope>
```

Create a Customer Account including Customer Account Site and Customer Account Site Use

In this use case, we'll create a customer account with customer account site and customer account site use. This requires CustomerAccountService to interact with LocationService and OrganizationService. A location is created using createLocation operation of Location service. A PartySite is created using the LocationId value in mergeOrganization

operation of Organization web service. A CustomerAccount is created using the PartySiteID and PartySiteUseId values in mergeCustomerAccount operation of Customer web service.

1. Create a Location using Location Web Service

   Operation: **createLocation**

   Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/locationService/applicationModule/types/"
 xmlns:loc="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/" xmlns:par="http://
xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/
cdm/foundation/parties/flex/sourceSystemRef/" xmlns:loc1="http://xmlns.oracle.com/apps/cdm/foundation/
parties/flex/location/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:createLocation>
 <typ:location>
 <loc:Country>CA</loc:Country>
 <loc:Address1>Lakewood Shores</loc:Address1>
 <loc:City>Redwood</loc:City>
 <loc:PostalCode>78741</loc:PostalCode>
 <loc:State>Ontario</loc:State>
 <loc:CreatedByModule>HZ_WS</loc:CreatedByModule>
 </typ:location>
 </typ:createLocation>
 </soapenv:Body>
</soapenv:Envelope>
```

   Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/
locationService/applicationModule/types/">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/applicationModule//
LocationService/createLocationResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:bfc77568-4b06-465f-9cb6-69adff43c701</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:createLocationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
locationService/applicationModule/types/">
 <ns2:result xsi:type="ns1:LocationResult" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/locationService/applicationModule/types/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/
foundation/parties/locationService/" xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/location/" xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
 <ns1:Value>
 <ns1:LocationId>300100551151963</ns1:LocationId>
 <ns1:LastUpdateDate>2021-09-17T12:15:05.364Z</ns1:LastUpdateDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:CreationDate>2021-09-17T12:15:05.001Z</ns1:CreationDate>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:LastUpdateLogin>CC2A2E41A454828DE0531C5CF00A0CCB</ns1:LastUpdateLogin>
 <ns1:RequestId xsi:nil="true"/>
 <ns1:OrigSystem xsi:nil="true"/>
 <ns1:OrigSystemReference>300100551151963</ns1:OrigSystemReference>
 <ns1:Country>CA</ns1:Country>
 <ns1:Address1>Lakewood Shores</ns1:Address1>
 <ns1:Address2 xsi:nil="true"/>
 <ns1:Address3 xsi:nil="true"/>
```

```
 <ns1:Address4 xsi:nil="true"/>
 <ns1:City>Redwood</ns1:City>
 <ns1:PostalCode>78741</ns1:PostalCode>
 <ns1:State>Ontario</ns1:State>
 <ns1:Province xsi:nil="true"/>
 <ns1:County xsi:nil="true"/>
 <ns1:AddressStyle xsi:nil="true"/>
 <ns1:ValidatedFlag>false</ns1:ValidatedFlag>
 <ns1:AddressLinesPhonetic xsi:nil="true"/>
 <ns1:PostalPlus4Code xsi:nil="true"/>
 <ns1:Position xsi:nil="true"/>
 <ns1:LocationDirections xsi:nil="true"/>
 <ns1:AddressEffectiveDate xsi:nil="true"/>
 <ns1:AddressExpirationDate xsi:nil="true"/>
 <ns1:ClliCode xsi:nil="true"/>
 <ns1:Language xsi:nil="true"/>
 <ns1:ShortDescription xsi:nil="true"/>
 <ns1:Description xsi:nil="true"/>
 <ns1:SalesTaxGeocode xsi:nil="true"/>
 <ns1:SalesTaxInsideCityLimits>1</ns1:SalesTaxInsideCityLimits>
 <ns1:FaLocationId xsi:nil="true"/>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
 <ns1:GeometryStatusCode>DIRTY</ns1:GeometryStatusCode>
 <ns1:ValidationStatusCode xsi:nil="true"/>
 <ns1:DateValidated xsi:nil="true"/>
 <ns1:DoNotValidateFlag xsi:nil="true"/>
 <ns1:Comments xsi:nil="true"/>
 <ns1:HouseType xsi:nil="true"/>
 <ns1:EffectiveDate>2021-09-17</ns1:EffectiveDate>
 <ns1:AddrElementAttribute1 xsi:nil="true"/>
 <ns1:AddrElementAttribute2 xsi:nil="true"/>
 <ns1:AddrElementAttribute3 xsi:nil="true"/>
 <ns1:AddrElementAttribute4 xsi:nil="true"/>
 <ns1:AddrElementAttribute5 xsi:nil="true"/>
 <ns1:Building xsi:nil="true"/>
 <ns1:FloorNumber xsi:nil="true"/>
 <ns1:StatusFlag>true</ns1:StatusFlag>
 <ns1:InternalFlag>false</ns1:InternalFlag>
 <ns1:TimezoneCode xsi:nil="true"/>
 <ns1:Latitude xsi:nil="true"/>
 <ns1:Longitude xsi:nil="true"/>
 <ns1:Distance xsi:nil="true"/>
 </ns1:Value>
 </ns2:result>
 </ns0:createLocationResponse>
 </env:Body>
</env:Envelope>
```

2. Use the LocationId to create a PartySite using Organization Web Service

   Operation: **mergeOrganization**

   Request Body

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
<soap:Body>
 <ns1:mergeOrganization xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/">
 <ns1:organizationParty xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/">
 <ns2:PartyId>1003</ns2:PartyId>
 <ns2:PartySite xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/">
 <ns3:LocationId>300100551151963</ns3:LocationId>
 <ns3:CreatedByModule>HZ_WS</ns3:CreatedByModule>
```

```
 <ns3:PartySiteUse>
 <ns3:SiteUseType>BILL_TO</ns3:SiteUseType>
 <ns3:CreatedByModule>HZ_WS</ns3:CreatedByModule>
 </ns3:PartySiteUse>
 </ns2:PartySite>
 </ns1:organizationParty>
 </ns1:mergeOrganization>
</soap:Body>
</soap:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule//
OrganizationService/mergeOrganizationResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:269a6d88-25b3-464b-902a-d1eb0faeaf46</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:mergeOrganizationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/">
 <ns3:result xsi:type="ns2:OrganizationPartyResult" xmlns:ns2="http://xmlns.oracle.com/apps/
cdm/foundation/parties/organizationService/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/
foundation/parties/partyService/" xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/" xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/"
 xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/" xmlns:ns5="http://xmlns.oracle.com/apps/cdm/
foundation/parties/contactPointService/" xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/
relationshipService/" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
 <ns2:Value>
 <ns2:PartyNumber>1003</ns2:PartyNumber>
 <ns2:PartyId>1003</ns2:PartyId>
 <ns2:PartyType>ORGANIZATION</ns2:PartyType>
 <ns2:PartyName>UNITED PARCEL SERVICE, INC</ns2:PartyName>
 <ns2:LastUpdatedBy>1318</ns2:LastUpdatedBy>
 <ns2:ValidatedFlag xsi:nil="true"/>
 <ns2:LastUpdateLogin>4081020</ns2:LastUpdateLogin>
 <ns2:CreationDate>1997-02-23T12:47:25.0Z</ns2:CreationDate>
 <ns2:RequestId>4350529</ns2:RequestId>
 <ns2:LastUpdateDate>2007-04-12T21:13:29.0Z</ns2:LastUpdateDate>
 <ns2:CreatedBy>1028</ns2:CreatedBy>
 <ns2:OrigSystemReference>1003</ns2:OrigSystemReference>
 <ns2:HQBranchIndicator>HQ</ns2:HQBranchIndicator>
 <ns2:DUNSNumberC>006991681</ns2:DUNSNumberC>
 <ns2:SICCode>4215</ns2:SICCode>
 <ns2:JgzzFiscalCode>01-83937602</ns2:JgzzFiscalCode>
 <ns2:Address1>93 Peachtree Parkway</ns2:Address1>
 <ns2:Country>US</ns2:Country>
 <ns2:Address3 xsi:nil="true"/>
 <ns2:GroupType xsi:nil="true"/>
 <ns2:Address2 xsi:nil="true"/>
 <ns2:Address4 xsi:nil="true"/>
 <ns2:Status>A</ns2:Status>
 <ns2:City>Atlanta</ns2:City>
 <ns2:PostalCode>30328</ns2:PostalCode>
 <ns2:County>Fulton</ns2:County>
 <ns2:YearEstablished>1969</ns2:YearEstablished>
 <ns2:Province xsi:nil="true"/>
 <ns2:State>GA</ns2:State>
 <ns2:URL xsi:nil="true"/>
 <ns2:AnalysisFy>1996</ns2:AnalysisFy>
 <ns2:SICCodeType>1987 SIC</ns2:SICCodeType>
 <ns2:EmailAddress xsi:nil="true"/>
 <ns2:FiscalYearendMonth>12</ns2:FiscalYearendMonth>
 <ns2:EmployeesTotal>25000</ns2:EmployeesTotal>
 <ns2:CurrentFiscalYearPotentialRevenueAmount>800000000</ns2:CurrentFiscalYearPotentialRevenueAmount>
```

```
<ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
<ns2:GSAIndicatorFlag>false</ns2:GSAIndicatorFlag>
<ns2:CategoryCode>DISTRIBUTION</ns2:CategoryCode>
<ns2:LanguageName xsi:nil="true"/>
<ns2:MissionStatement xsi:nil="true"/>
<ns2:ThirdPartyFlag>false</ns2:ThirdPartyFlag>
<ns2:HomeCountry xsi:nil="true"/>
<ns2:CreatedByModule xsi:nil="true"/>
<ns2:ObjectVersionNumber>10</ns2:ObjectVersionNumber>
<ns2:CertificationLevel xsi:nil="true"/>
<ns2:CertReasonCode xsi:nil="true"/>
<ns2:PrimaryPhonePurpose xsi:nil="true"/>
<ns2:PrimaryPhoneContactPointId>3105</ns2:PrimaryPhoneContactPointId>
<ns2:PrimaryPhoneLineType>GEN</ns2:PrimaryPhoneLineType>
<ns2:PrimaryPhoneCountryCode>1</ns2:PrimaryPhoneCountryCode>
<ns2:PrimaryPhoneAreaCode>703</ns2:PrimaryPhoneAreaCode>
<ns2:PrimaryPhoneNumber>8441212</ns2:PrimaryPhoneNumber>
<ns2:PreferredContactMethod xsi:nil="true"/>
<ns2:PrimaryPhoneExtension xsi:nil="true"/>
<ns2:IdenAddrLocationId>944</ns2:IdenAddrLocationId>
<ns2:PrimaryURLContactPointId xsi:nil="true"/>
<ns2:PrimaryEmailContactPointId xsi:nil="true"/>
<ns2:IdenAddrPartySiteId>1097</ns2:IdenAddrPartySiteId>
<ns2:PreferredName xsi:nil="true"/>
<ns2:PersonSecondLastName xsi:nil="true"/>
<ns2:PreferredNameId xsi:nil="true"/>
<ns2:TradingPartnerIdentifier xsi:nil="true"/>
<ns2:PreferredContactPersonId xsi:nil="true"/>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:InternalFlag xsi:nil="true"/>
<ns2:Comments xsi:nil="true"/>
<ns2:CeoName xsi:nil="true"/>
<ns2:PrincipalName xsi:nil="true"/>
<ns2:OrganizationSize>LARGE</ns2:OrganizationSize>
<ns2:PartyUniqueName>UNITED PARCEL SERVICE, INC</ns2:PartyUniqueName>
<ns2:SourceSystem xsi:nil="true"/>
<ns2:SourceSystemReferenceValue xsi:nil="true"/>
<ns2:SourceSystemUpdateDate xsi:nil="true"/>
<ns2:PartySite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/">
<ns1:PartySiteId>300100551151980</ns1:PartySiteId>
<ns1:PartyId>1003</ns1:PartyId>
<ns1:LocationId>300100551151963</ns1:LocationId>
<ns1:LastUpdateDate>2021-09-17T12:17:49.595Z</ns1:LastUpdateDate>
<ns1:PartySiteNumber>CDRM_784855</ns1:PartySiteNumber>
<ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
<ns1:CreationDate>2021-09-17T12:17:31.002Z</ns1:CreationDate>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:LastUpdateLogin>CC2A2E41A457828DE0531C5CF00A0CCB</ns1:LastUpdateLogin>
<ns1:RequestId xsi:nil="true"/>
<ns1:OrigSystem xsi:nil="true"/>
<ns1:OrigSystemReference>300100551151980</ns1:OrigSystemReference>
<ns1:StartDateActive>2021-09-17</ns1:StartDateActive>
<ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
<ns1:Mailstop xsi:nil="true"/>
<ns1:IdentifyingAddressFlag>false</ns1:IdentifyingAddressFlag>
<ns1:Language xsi:nil="true"/>
<ns1:Status>A</ns1:Status>
<ns1:PartySiteName xsi:nil="true"/>
<ns1:Addressee xsi:nil="true"/>
<ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
<ns1:GlobalLocationNumber xsi:nil="true"/>
<ns1:DUNSNumberC xsi:nil="true"/>
<ns1:Comments xsi:nil="true"/>
<ns1:PartySiteType xsi:nil="true"/>
<ns1:PartyNameDba xsi:nil="true"/>
<ns1:PartyNameDivision xsi:nil="true"/>
```

```
 <ns1:PartyNameLegal xsi:nil="true"/>
 <ns1:RelationshipId xsi:nil="true"/>
 <ns1:PartyUsageCode xsi:nil="true"/>
 <ns1:UsageCode>GEOGRAPHY</ns1:UsageCode>
 <ns1:FormattedAddress>Lakewood Shores,REDWOOD 78741,CANADA</ns1:FormattedAddress>
 <ns1:Country>CA</ns1:Country>
 <ns1:Address1>Lakewood Shores</ns1:Address1>
 <ns1:Address2 xsi:nil="true"/>
 <ns1:Address3 xsi:nil="true"/>
 <ns1:Address4 xsi:nil="true"/>
 <ns1:City>Redwood</ns1:City>
 <ns1:PostalCode>78741</ns1:PostalCode>
 <ns1:State>Ontario</ns1:State>
 <ns1:Province xsi:nil="true"/>
 <ns1:County xsi:nil="true"/>
 <ns1:AddressStyle xsi:nil="true"/>
 <ns1:ValidatedFlag>false</ns1:ValidatedFlag>
 <ns1:AddressLinesPhonetic xsi:nil="true"/>
 <ns1:PostalPlus4Code xsi:nil="true"/>
 <ns1:Position xsi:nil="true"/>
 <ns1:LocationDirections xsi:nil="true"/>
 <ns1:AddressExpirationDate xsi:nil="true"/>
 <ns1:LocationLanguage xsi:nil="true"/>
 <ns1:ValidationStatusCode xsi:nil="true"/>
 <ns1:DateValidated xsi:nil="true"/>
 <ns1:DoNotValidateFlag xsi:nil="true"/>
 <ns1:HouseType xsi:nil="true"/>
 <ns1:FormattedMultilineAddress>Lakewood Shores&lt;BR>REDWOOD 78741&lt;BR>CANADA</
ns1:FormattedMultilineAddress>
 <ns1:Country1>CA</ns1:Country1>
 <ns1:ObjectVersionNumber1>10</ns1:ObjectVersionNumber1>
 <ns1:ContactPreferenceExistFlag>false</ns1:ContactPreferenceExistFlag>
 <ns1:FormattedLocaleAddress xsi:nil="true"/>
 <ns1:CurrencyCode>USD</ns1:CurrencyCode>
 <ns1:CorpCurrencyCode>USD</ns1:CorpCurrencyCode>
 <ns1:CurcyConvRateType>Corporate</ns1:CurcyConvRateType>
 <ns1:InternalFlag>false</ns1:InternalFlag>
 <ns1:OverallPrimaryFlag>false</ns1:OverallPrimaryFlag>
 <ns1:EmailAddress xsi:nil="true"/>
 <ns1:Latitude xsi:nil="true"/>
 <ns1:Longitude xsi:nil="true"/>
 <ns1:PartySiteUse>
 <ns1:PartySiteUseId>300100551151981</ns1:PartySiteUseId>
 <ns1:BeginDate>2021-09-17</ns1:BeginDate>
 <ns1:Comments xsi:nil="true"/>
 <ns1:EndDate>4712-12-31</ns1:EndDate>
 <ns1:PartySiteId>300100551151980</ns1:PartySiteId>
 <ns1:LastUpdateDate>2021-09-17T12:17:49.528Z</ns1:LastUpdateDate>
 <ns1:RequestId xsi:nil="true"/>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:CreationDate>2021-09-17T12:17:31.119Z</ns1:CreationDate>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:LastUpdateLogin>CC2A2E41A457828DE0531C5CF00A0CCB</ns1:LastUpdateLogin>
 <ns1:IntegrationKey>x</ns1:IntegrationKey>
 <ns1:SiteUseType>BILL_TO</ns1:SiteUseType>
 <ns1:PrimaryPerType>N</ns1:PrimaryPerType>
 <ns1:Status>A</ns1:Status>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
 </ns1:PartySiteUse>
 </ns2:PartySite>
 </ns2:Value>
 </ns3:result>
 </ns0:mergeOrganizationResponse>
 </env:Body>
```

```
</env:Envelope>
```

3. Use the PartyId and PartySiteID to create a CustomerAccount including CustomerAccountSite and CustomerAccountSiteUse using Customer Web Service

   Operation: **mergeCustomerAccount**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/applicationModule/types/"
 xmlns:cus="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/"
 xmlns:cus1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountContactRole/"
 xmlns:par="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:sour="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/" xmlns:cus2="http://xmlns.oracle.com/
apps/cdm/foundation/parties/flex/custAccountContact/" xmlns:cus3="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountRel/" xmlns:cus4="http://xmlns.oracle.com/apps/cdm/foundation/
parties/flex/custAccountSiteUse/" xmlns:cus5="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/" xmlns:cus6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:mergeCustomerAccount>
 <typ:customerAccount>
 <cus:PartyId>1003</cus:PartyId>
 <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
 <cus:CustomerAccountSite>
 <cus:PartySiteId>300100551151980</cus:PartySiteId>
 <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
 <cus:SetId>202</cus:SetId>
 <cus:CustomerAccountSiteUse>
 <cus:SiteUseCode>BILL_TO</cus:SiteUseCode>
 <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
 </cus:CustomerAccountSiteUse>
 </cus:CustomerAccountSite>
 </typ:customerAccount>
 </typ:mergeCustomerAccount>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/
applicationModule//CustomerAccountService/mergeCustomerAccountResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:2c005876-8aaf-4beb-908c-1280fc988f37</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:mergeCustomerAccountResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
customerAccountService/applicationModule/types/">
 <ns0:result xsi:type="ns2:CustomerAccountResult" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/
foundation/parties/customerAccountService/" xmlns:ns1="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:tns="http://
xmlns.oracle.com/adf/svc/errors/" xmlns:ns9="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccount/" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
 <ns2:Value>
 <ns2:CustomerAccountId>300100552218054</ns2:CustomerAccountId>
 <ns2:PartyId>1003</ns2:PartyId>
 <ns2:LastUpdateDate>2021-09-23T08:34:46.525Z</ns2:LastUpdateDate>
 <ns2:AccountNumber>CDRM_212244</ns2:AccountNumber>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>2021-09-23T08:34:45.001Z</ns2:CreationDate>
 <ns2:CreatedBy>FUSION</ns2:CreatedBy>
 <ns2:LastUpdateLogin>CC5ED8B7411EC35AE0531C5CF00AF259</ns2:LastUpdateLogin>
```

```
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystem xsi:nil="true"/>
 <ns2:OrigSystemReference>300100552218054</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CustomerType xsi:nil="true"/>
 <ns2:CustomerClassCode xsi:nil="true"/>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:CoterminateDayMonth xsi:nil="true"/>
 <ns2:AccountEstablishedDate>2021-09-23</ns2:AccountEstablishedDate>
 <ns2:AccountTerminationDate>4712-12-31</ns2:AccountTerminationDate>
 <ns2:HeldBillExpirationDate xsi:nil="true"/>
 <ns2:HoldBillFlag>false</ns2:HoldBillFlag>
 <ns2:AccountName xsi:nil="true"/>
 <ns2:DepositRefundMethod xsi:nil="true"/>
 <ns2:NpaNumber xsi:nil="true"/>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:Comments xsi:nil="true"/>
 <ns2:DateTypePreference xsi:nil="true"/>
 <ns2:ArrivalsetsIncludeLinesFlag xsi:nil="true"/>
 <ns2:StatusUpdateDate xsi:nil="true"/>
 <ns2:AutopayFlag xsi:nil="true"/>
 <ns2:LastBatchId xsi:nil="true"/>
 <ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
 <ns2:SellingPartyId xsi:nil="true"/>
 <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/">
 <ns2:CustomerAccountSiteId>300100552218055</ns2:CustomerAccountSiteId>
 <ns2:CustomerAccountId>300100552218054</ns2:CustomerAccountId>
 <ns2:PartySiteId>300100551151980</ns2:PartySiteId>
 <ns2:LastUpdateDate>2021-09-23T08:34:46.548Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>2021-09-23T08:34:45.243Z</ns2:CreationDate>
 <ns2:CreatedBy>FUSION</ns2:CreatedBy>
 <ns2:LastUpdateLogin>CC5ED8B7411EC35AE0531C5CF00AF259</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>300100552218055</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToIndicator>P</ns2:BillToIndicator>
 <ns2:MarketIndicator>N</ns2:MarketIndicator>
 <ns2:ShipToIndicator>N</ns2:ShipToIndicator>
 <ns2:CustomerCategoryCode xsi:nil="true"/>
 <ns2:Language xsi:nil="true"/>
 <ns2:KeyAccountFlag xsi:nil="true"/>
 <ns2:TpHeaderId xsi:nil="true"/>
 <ns2:EceTpLocationCode xsi:nil="true"/>
 <ns2:TranslatedCustomerName xsi:nil="true"/>
 <ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
 <ns2:SetId>202</ns2:SetId>
 <ns2:StartDate>2021-09-23</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:SetCode>Vision Corporation 202</ns2:SetCode>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>300100552218056</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>300100552218055</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2021-09-23T08:34:46.585Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>2021-09-23T08:34:45.352Z</ns2:CreationDate>
 <ns2:CreatedBy>FUSION</ns2:CreatedBy>
 <ns2:SiteUseCode>BILL_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>CDRM_187314</ns2:Location>
 <ns2:LastUpdateLogin>CC5ED8B7411EC35AE0531C5CF00AF259</ns2:LastUpdateLogin>
```

```
<ns2:BillToSiteUseId xsi:nil="true"/>
<ns2:OrigSystemReference>300100552218056</ns2:OrigSystemReference>
<ns2:SICCode xsi:nil="true"/>
<ns2:PaymentTermId xsi:nil="true"/>
<ns2:GSAIndicator xsi:nil="true"/>
<ns2:TerritoryId xsi:nil="true"/>
<ns2:RequestId xsi:nil="true"/>
<ns2:TaxReference xsi:nil="true"/>
<ns2:SortPriority xsi:nil="true"/>
<ns2:TaxCode xsi:nil="true"/>
<ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
<ns2:LastAccrueChargeDate xsi:nil="true"/>
<ns2:LastUnaccrueChargeDate xsi:nil="true"/>
<ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
<ns2:TaxHeaderLevelFlag xsi:nil="true"/>
<ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
<ns2:TaxRoundingRule xsi:nil="true"/>
<ns2:TaxClassification xsi:nil="true"/>
<ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
<ns2:SetId>202</ns2:SetId>
<ns2:EndDate>4712-12-31</ns2:EndDate>
<ns2:StartDate>2021-09-23</ns2:StartDate>
</ns2:CustomerAccountSiteUse>
</ns2:CustomerAccountSite>
</ns2:Value>
</ns0:result>
</ns0:mergeCustomerAccountResponse>
</env:Body>
</env:Envelope>
```

Delete Contacts of a Customer Account Site

In this use case, we'll delete contacts of a customer account site.

Operation: **deleteCustomerAccount**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/applicationModule/types/"
 xmlns:cus="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/" xmlns:cus1="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountContactRole/" xmlns:par="http://
xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/
cdm/foundation/parties/flex/sourceSystemRef/" xmlns:cus2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/flex/custAccountContact/" xmlns:cus3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountRel/" xmlns:cus4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSiteUse/"
 xmlns:cus5="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSite/" xmlns:cus6="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:mergeCustomerAccount>
 <typ:customerAccount>
 <cus:CustomerAccountId>300100567424987</cus:CustomerAccountId>
 <cus:CustomerAccountSite><env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/"
 xmlns:wsa="http://www.w3.org/2005/08/addressing">
 <env:Header>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
```

```
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/applicationModule/
CustomerAccountService/mergeCustomerAccountResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:c02f8d42-5cb9-4b6c-b706-321bb1e99673</wsa:MessageID>
 </env:Header> <soapenv:Body>
 <typ:mergeCustomerAccount>
 <typ:customerAccount>
 <cus:CustomerAccountId>300100567424987</cus:CustomerAccountId>
 <cus:CustomerAccountSite>
 <cus:CustomerAccountSiteId>300000016660017</cus:CustomerAccountSiteId>
 <cus:CustomerAccountId>300100567424987</cus:CustomerAccountId>
 <cus:CustomerAccountContact>
 <cus:CustomerAccountRoleId>300000016829429</cus:CustomerAccountRoleId>
 <cus:CustomerAccountId>300100567424987</cus:CustomerAccountId>
 <cus:CustomerAccountSiteId>300000016660017</cus:CustomerAccountSiteId>
 <cus:Status>I</cus:Status>
 <cus:ContactPersonId>300000016829426</cus:ContactPersonId>
 </cus:CustomerAccountContact>
 </cus:CustomerAccountSite>
 </typ:customerAccount>
 </typ:mergeCustomerAccount>
 </soapenv:Body>
</soapenv:Envelope>
```

End Date a Customer Account Site

In this use case, we'll end date a customer account site.

Operation: **updateCustomerAccount**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/applicationModule/
types/"
xmlns:cus="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/"
xmlns:cus1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountContactRole/"
xmlns:par="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/"
xmlns:cus2="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountContact/"
xmlns:cus3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountRel/"
xmlns:cus4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSiteUse/"
xmlns:cus5="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSite/"
xmlns:cus6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:updateCustomerAccount>
 <typ:customerAccount>
 <cus:CustomerAccountId>300100590899663</cus:CustomerAccountId>
 <cus:CustomerAccountSite>
 <cus:CustomerAccountSiteId>300100590899664</cus:CustomerAccountSiteId>
 <cus:EndDate>2023-09-01</cus:EndDate>
 </cus:CustomerAccountSite>
 </typ:customerAccount>
 </typ:updateCustomerAccount>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
```

```
xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/applicationModule/
types/"
xmlns:cus="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/"
xmlns:cus1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountContactRole/"
xmlns:par="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/sourceSystemRef/"
xmlns:cus2="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountContact/"
xmlns:cus3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountRel/"
xmlns:cus4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSiteUse/"
xmlns:cus5="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSite/"
xmlns:cus6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:updateCustomerAccount>
 <typ:customerAccount>
 <cus:CustomerAccountId>300100552218054</cus:CustomerAccountId>
 <cus:CustomerAccountSite>
 <cus:CustomerAccountSiteId>300000968771511</cus:CustomerAccountSiteId>
 <cus:EndDate>2021-09-01</cus:EndDate>
 </cus:CustomerAccountSite>
 </typ:customerAccount>
 </typ:updateCustomerAccount>
 </soapenv:Body>
</soapenv:Envelope>
```

Find Customer Accounts

In this use case, we'll find customer accounts.

Operation: **findCustomerAccount**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/applicationModule/
types/"
xmlns:typ1="http://xmlns.oracle.com/adf/svc/types/">
<soapenv:Header/>
 <soapenv:Body>
 <typ:findCustomerAccount>
 <typ:findCriteria>
 <typ1:fetchStart>0</typ1:fetchStart>
 <typ1:fetchSize>1</typ1:fetchSize>
 <typ1:filter>
 <typ1:conjunction/>
 <typ1:group>
 <typ1:conjunction/>
 <typ1:upperCaseCompare>false</typ1:upperCaseCompare>
 <typ1:item>
 <typ1:conjunction/>
 <typ1:upperCaseCompare>false</typ1:upperCaseCompare>
 <typ1:attribute>PartyId</typ1:attribute>
 <typ1:operator>=</typ1:operator>
 <typ1:value>1002</typ1:value>
 </typ1:item>
 </typ1:group>
 <typ1:nested/>
 </typ1:filter>
 <typ1:excludeAttribute>false</typ1:excludeAttribute>
 </typ:findCriteria>
 <typ:findControl>
```

```
 <typ1:retrieveAllTranslations>false</typ1:retrieveAllTranslations>
 </typ:findControl>
 </typ:findCustomerAccount>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/applicationModule/
CustomerAccountService/findCustomerAccountResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:11ac69e5-29c6-42b4-ac95-e953f23e1677</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:findCustomerAccountResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
customerAccountService/applicationModule/types/">
 <ns0:result xsi:type="ns2:CustomerAccountResult" xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/
parties/partyService/"
xmlns:ns9="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/"
xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/"
xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/"
xmlns:ns1="http://xmlns.oracle.com/adf/svc/types/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
 <ns2:Value>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:PartyId>1002</ns2:PartyId>
 <ns2:LastUpdateDate>2014-01-01T23:07:43Z</ns2:LastUpdateDate>
 <ns2:AccountNumber>1002</ns2:AccountNumber>
 <ns2:LastUpdatedBy>BILLING_MGR_OPERATIONS</ns2:LastUpdatedBy>
 <ns2:CreationDate>1997-02-23T12:42:45Z</ns2:CreationDate>
 <ns2:CreatedBy>1028</ns2:CreatedBy>
 <ns2:LastUpdateLogin>EEF72A4AF9C63AF8E0432620F00AE86B</ns2:LastUpdateLogin>
 <ns2:RequestId>99999</ns2:RequestId>
 <ns2:OrigSystem xsi:nil="true"/>
 <ns2:OrigSystemReference>1002</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CustomerType>R</ns2:CustomerType>
 <ns2:CustomerClassCode>HIGH TECHNOLOGY</ns2:CustomerClassCode>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag>false</ns2:TaxHeaderLevelFlag>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:CoterminateDayMonth xsi:nil="true"/>
 <ns2:AccountEstablishedDate>1997-02-23</ns2:AccountEstablishedDate>
 <ns2:AccountTerminationDate>4712-12-31</ns2:AccountTerminationDate>
 <ns2:HeldBillExpirationDate xsi:nil="true"/>
 <ns2:HoldBillFlag xsi:nil="true"/>
 <ns2:AccountName>Imaging Innovations, Inc.</ns2:AccountName>
 <ns2:DepositRefundMethod xsi:nil="true"/>
 <ns2:NpaNumber xsi:nil="true"/>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:Comments xsi:nil="true"/>
 <ns2:DateTypePreference xsi:nil="true"/>
 <ns2:ArrivalsetsIncludeLinesFlag xsi:nil="true"/>
 <ns2:StatusUpdateDate xsi:nil="true"/>
 <ns2:AutopayFlag xsi:nil="true"/>
 <ns2:LastBatchId xsi:nil="true"/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:SellingPartyId xsi:nil="true"/>
 <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContact/">
 <ns2:CustomerAccountRoleId>6381</ns2:CustomerAccountRoleId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:CustomerAccountSiteId xsi:nil="true"/>
```

```
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:RoleType>CONTACT</ns2:RoleType>
 <ns2:LastUpdateDate>2003-11-04T12:21:41Z</ns2:LastUpdateDate>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:LastUpdatedBy>1318</ns2:LastUpdatedBy>
 <ns2:CreationDate>2003-08-01T18:44:03Z</ns2:CreationDate>
 <ns2:CreatedBy>1004345</ns2:CreatedBy>
 <ns2:LastUpdateLogin>2392141</ns2:LastUpdateLogin>
 <ns2:RequestId>2564034</ns2:RequestId>
 <ns2:OrigSystemReference>6381</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:RelationshipId>8249</ns2:RelationshipId>
 <ns2:ContactPersonId>36475</ns2:ContactPersonId>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>14085</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>6381</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCOUNT_ROLES</ns4:OwnerTableName>
 <ns4:OwnerTableId>6381</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>1004345</ns4:CreatedBy>
 <ns4:CreationDate>2003-08-01T18:44:03Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>1318</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2003-11-04T12:21:41Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>2392141</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>14085</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctContactInformation>
 <ns3:CustAccountRoleId>6381</ns3:CustAccountRoleId>
 <ns3:hzCustacctcont1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
 </ns2:CustAcctContactInformation>
 </ns2:CustomerAccountContact>
 <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContact/">
 <ns2:CustomerAccountRoleId>18794</ns2:CustomerAccountRoleId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:CustomerAccountSiteId xsi:nil="true"/>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:RoleType>CONTACT</ns2:RoleType>
 <ns2:LastUpdateDate>2004-09-13T17:41:33Z</ns2:LastUpdateDate>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:LastUpdatedBy>1001530</ns2:LastUpdatedBy>
 <ns2:CreationDate>2004-09-13T17:41:33Z</ns2:CreationDate>
 <ns2:CreatedBy>1001530</ns2:CreatedBy>
 <ns2:LastUpdateLogin>2835084</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>18794</ns2:OrigSystemReference>
```

```
 <ns2:Status>A</ns2:Status>
 <ns2:CreatedByModule>ASO_CUSTOMER_DATA</ns2:CreatedByModule>
 <ns2:RelationshipId>1185</ns2:RelationshipId>
 <ns2:ContactPersonId>2507</ns2:ContactPersonId>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>16312</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>18794</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCOUNT_ROLES</ns4:OwnerTableName>
 <ns4:OwnerTableId>18794</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2005-05-02</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>1001530</ns4:CreatedBy>
 <ns4:CreationDate>2004-09-13T17:41:33Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>1001530</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2004-09-13T17:41:33Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>2835084</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>ASO_CUSTOMER_DATA</ns4:CreatedByModule>
 <ns4:PartyId xsi:nil="true"/>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>16312</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctContactInformation>
 <ns3:CustAccountRoleId>18794</ns3:CustAccountRoleId>
 <ns3:hzCustacctcont1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
 </ns2:CustAcctContactInformation>
 </ns2:CustomerAccountContact>
 <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContact/">
 <ns2:CustomerAccountRoleId>1018</ns2:CustomerAccountRoleId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:CustomerAccountSiteId xsi:nil="true"/>
 <ns2:PrimaryFlag xsi:nil="true"/>
 <ns2:RoleType>CONTACT</ns2:RoleType>
 <ns2:LastUpdateDate>2003-11-04T12:21:41Z</ns2:LastUpdateDate>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:LastUpdatedBy>1318</ns2:LastUpdatedBy>
 <ns2:CreationDate>1997-02-24T12:40:42Z</ns2:CreationDate>
 <ns2:CreatedBy>1028</ns2:CreatedBy>
 <ns2:LastUpdateLogin>2392141</ns2:LastUpdateLogin>
 <ns2:RequestId>2564034</ns2:RequestId>
 <ns2:OrigSystemReference>1018</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:RelationshipId>1018</ns2:RelationshipId>
 <ns2:ContactPersonId>2454</ns2:ContactPersonId>
 <ns2:CustomerAccountContactRole xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContactRole/">
 <ns2:ResponsibilityId>1089</ns2:ResponsibilityId>
 <ns2:CustomerAccountRoleId>1018</ns2:CustomerAccountRoleId>
 <ns2:ResponsibilityType>BILL_TO</ns2:ResponsibilityType>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
```

```
 <ns2:CreatedBy>1319</ns2:CreatedBy>
 <ns2:CreationDate>1997-08-14T10:22:33Z</ns2:CreationDate>
 <ns2:LastUpdateDate>1997-08-14T10:22:33Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>1319</ns2:LastUpdatedBy>
 <ns2:LastUpdateLogin>188780</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:StatusCode>A</ns2:StatusCode>
 <ns2:CustAcctContactRoleInformation>
 <ns0:ResponsibilityId>1089</ns0:ResponsibilityId>
 <ns0:hzRoleresp1 xsi:nil="true"/>
 <ns0:__FLEX_Context xsi:nil="true"/>
 <ns0:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns0:_FLEX_NumOfSegments>1</ns0:_FLEX_NumOfSegments>
 </ns2:CustAcctContactRoleInformation>
 </ns2:CustomerAccountContactRole>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>14546</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>1018</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCOUNT_ROLES</ns4:OwnerTableName>
 <ns4:OwnerTableId>1018</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>1028</ns4:CreatedBy>
 <ns4:CreationDate>1997-02-24T12:40:42Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>1318</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2003-11-04T12:21:41Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>2392141</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>14546</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctContactInformation>
 <ns3:CustAccountRoleId>1018</ns3:CustAccountRoleId>
 <ns3:hzCustacctcont1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
 </ns2:CustAcctContactInformation>
 </ns2:CustomerAccountContact>
 <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContact/">
 <ns2:CustomerAccountRoleId>4846</ns2:CustomerAccountRoleId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:CustomerAccountSiteId xsi:nil="true"/>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:RoleType>CONTACT</ns2:RoleType>
 <ns2:LastUpdateDate>2003-11-04T12:21:41Z</ns2:LastUpdateDate>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:LastUpdatedBy>1318</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-06-11T07:17:13Z</ns2:CreationDate>
 <ns2:CreatedBy>1001221</ns2:CreatedBy>
```

```
 <ns2:LastUpdateLogin>2392141</ns2:LastUpdateLogin>
 <ns2:RequestId>2564034</ns2:RequestId>
 <ns2:OrigSystemReference>4846</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:RelationshipId>5470</ns2:RelationshipId>
 <ns2:ContactPersonId>7214</ns2:ContactPersonId>
 <ns2:CustomerAccountContactRole xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContactRole/">
 <ns2:ResponsibilityId>2809</ns2:ResponsibilityId>
 <ns2:CustomerAccountRoleId>4846</ns2:CustomerAccountRoleId>
 <ns2:ResponsibilityType>SHIP_TO</ns2:ResponsibilityType>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:CreatedBy>1001221</ns2:CreatedBy>
 <ns2:CreationDate>2002-06-11T07:17:13Z</ns2:CreationDate>
 <ns2:LastUpdateDate>2002-06-11T07:17:13Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>1001221</ns2:LastUpdatedBy>
 <ns2:LastUpdateLogin>1591470</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>2809</ns2:OrigSystemReference>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:StatusCode>A</ns2:StatusCode>
 <ns2:CustAcctContactRoleInformation>
 <ns0:ResponsibilityId>2809</ns0:ResponsibilityId>
 <ns0:hzRoleresp1 xsi:nil="true"/>
 <ns0:__FLEX_Context xsi:nil="true"/>
 <ns0:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns0:_FLEX_NumOfSegments>1</ns0:_FLEX_NumOfSegments>
 </ns2:CustAcctContactRoleInformation>
 </ns2:CustomerAccountContactRole>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>14676</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4846</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCOUNT_ROLES</ns4:OwnerTableName>
 <ns4:OwnerTableId>4846</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>1001221</ns4:CreatedBy>
 <ns4:CreationDate>2002-06-11T07:17:13Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>1318</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2003-11-04T12:21:41Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>2392141</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>14676</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctContactInformation>
 <ns3:CustAccountRoleId>4846</ns3:CustAccountRoleId>
 <ns3:hzCustacctcont1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
 </ns2:CustAcctContactInformation>
```

```
 </ns2:CustomerAccountContact>
 <ns2:CustomerAccountRelationship xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountRel/">
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:RelatedCustomerAccountId>1001</ns2:RelatedCustomerAccountId>
 <ns2:LastUpdateDate>2014-08-07T01:09:12.156Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>IBY_MOAC_USER</ns2:LastUpdatedBy>
 <ns2:CreationDate>2014-08-07T01:08:45.646Z</ns2:CreationDate>
 <ns2:CreatedBy>IBY_MOAC_USER</ns2:CreatedBy>
 <ns2:LastUpdateLogin>00065E8EBB172D34E0535060F00AD305</ns2:LastUpdateLogin>
 <ns2:RelationshipType xsi:nil="true"/>
 <ns2:Comments xsi:nil="true"/>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:CustomerReciprocalFlag>true</ns2:CustomerReciprocalFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToFlag>true</ns2:BillToFlag>
 <ns2:ShipToFlag>true</ns2:ShipToFlag>
 <ns2:StartDate>2014-08-07</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
 <ns2:CustomerAccountRelateId>300100046859026</ns2:CustomerAccountRelateId>
 <ns2:SetId>204</ns2:SetId>
 <ns2:SetCode>Vision Operations 204</ns2:SetCode>
 <ns2:CustAcctRelationshipInformation>
 <ns5:CustAcctRelateId>300100046859026</ns5:CustAcctRelateId>
 <ns5:hzCustacctrel1 xsi:nil="true"/>
 <ns5:__FLEX_Context xsi:nil="true"/>
 <ns5:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns5:_FLEX_NumOfSegments>1</ns5:_FLEX_NumOfSegments>
 </ns2:CustAcctRelationshipInformation>
 </ns2:CustomerAccountRelationship>
 <ns2:CustomerAccountRelationship xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountRel/">
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:RelatedCustomerAccountId>100000015406342</ns2:RelatedCustomerAccountId>
 <ns2:LastUpdateDate>2014-08-07T23:38:27.149Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>BILLING_MGR_OPERATIONS</ns2:LastUpdatedBy>
 <ns2:CreationDate>2014-08-07T23:36:37.565Z</ns2:CreationDate>
 <ns2:CreatedBy>BILLING_MGR_OPERATIONS</ns2:CreatedBy>
 <ns2:LastUpdateLogin>00191058E19A5FCDE0535160F00AB589</ns2:LastUpdateLogin>
 <ns2:RelationshipType xsi:nil="true"/>
 <ns2:Comments xsi:nil="true"/>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:CustomerReciprocalFlag>true</ns2:CustomerReciprocalFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToFlag>true</ns2:BillToFlag>
 <ns2:ShipToFlag>true</ns2:ShipToFlag>
 <ns2:StartDate>2014-08-07</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
 <ns2:CustomerAccountRelateId>300100048492156</ns2:CustomerAccountRelateId>
 <ns2:SetId>204</ns2:SetId>
 <ns2:SetCode>Vision Operations 204</ns2:SetCode>
 <ns2:CustAcctRelationshipInformation>
 <ns5:CustAcctRelateId>300100048492156</ns5:CustAcctRelateId>
 <ns5:hzCustacctrel1 xsi:nil="true"/>
 <ns5:__FLEX_Context xsi:nil="true"/>
 <ns5:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns5:_FLEX_NumOfSegments>1</ns5:_FLEX_NumOfSegments>
 </ns2:CustAcctRelationshipInformation>
 </ns2:CustomerAccountRelationship>
 <ns2:CustomerAccountRelationship xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountRel/">
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:RelatedCustomerAccountId>100000015406879</ns2:RelatedCustomerAccountId>
 <ns2:LastUpdateDate>2014-08-07T23:32:57.083Z</ns2:LastUpdateDate>
```

```
 <ns2:LastUpdatedBy>BILLING_MGR_OPERATIONS</ns2:LastUpdatedBy>
 <ns2:CreationDate>2014-08-07T23:30:43.078Z</ns2:CreationDate>
 <ns2:CreatedBy>BILLING_MGR_OPERATIONS</ns2:CreatedBy>
 <ns2:LastUpdateLogin>00191058E19A5FCDE0535160F00AB589</ns2:LastUpdateLogin>
 <ns2:RelationshipType xsi:nil="true"/>
 <ns2:Comments xsi:nil="true"/>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:CustomerReciprocalFlag>true</ns2:CustomerReciprocalFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToFlag>true</ns2:BillToFlag>
 <ns2:ShipToFlag>true</ns2:ShipToFlag>
 <ns2:StartDate>2014-08-07</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
 <ns2:CustomerAccountRelateId>300100048492131</ns2:CustomerAccountRelateId>
 <ns2:SetId>204</ns2:SetId>
 <ns2:SetCode>Vision Operations 204</ns2:SetCode>
 <ns2:CustAcctRelationshipInformation>
 <ns5:CustAcctRelateId>300100048492131</ns5:CustAcctRelateId>
 <ns5:hzCustacctrel1 xsi:nil="true"/>
 <ns5:__FLEX_Context xsi:nil="true"/>
 <ns5:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns5:_FLEX_NumOfSegments>1</ns5:_FLEX_NumOfSegments>
 </ns2:CustAcctRelationshipInformation>
 </ns2:CustomerAccountRelationship>
 <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/">
 <ns2:CustomerAccountSiteId>1026</ns2:CustomerAccountSiteId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:PartySiteId>1026</ns2:PartySiteId>
 <ns2:LastUpdateDate>2013-08-16T00:15:06.573144Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>BULK_IMPORT</ns2:LastUpdatedBy>
 <ns2:CreationDate>1997-02-23T00:00:00Z</ns2:CreationDate>
 <ns2:CreatedBy>1028</ns2:CreatedBy>
 <ns2:LastUpdateLogin>-1</ns2:LastUpdateLogin>
 <ns2:RequestId>99999</ns2:RequestId>
 <ns2:OrigSystemReference>1026</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToIndicator>P</ns2:BillToIndicator>
 <ns2:MarketIndicator xsi:nil="true"/>
 <ns2:ShipToIndicator>P</ns2:ShipToIndicator>
 <ns2:CustomerCategoryCode xsi:nil="true"/>
 <ns2:Language xsi:nil="true"/>
 <ns2:KeyAccountFlag>false</ns2:KeyAccountFlag>
 <ns2:TpHeaderId xsi:nil="true"/>
 <ns2:EceTpLocationCode xsi:nil="true"/>
 <ns2:TranslatedCustomerName xsi:nil="true"/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:SetId>204</ns2:SetId>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:SetCode>Vision Operations 204</ns2:SetCode>
 <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContact/">
 <ns2:CustomerAccountRoleId>6382</ns2:CustomerAccountRoleId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:CustomerAccountSiteId>1026</ns2:CustomerAccountSiteId>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:RoleType>CONTACT</ns2:RoleType>
 <ns2:LastUpdateDate>2003-08-01T18:47:14Z</ns2:LastUpdateDate>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:LastUpdatedBy>1006717</ns2:LastUpdatedBy>
 <ns2:CreationDate>2003-08-01T18:47:14Z</ns2:CreationDate>
 <ns2:CreatedBy>1006717</ns2:CreatedBy>
 <ns2:LastUpdateLogin>2259440</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
```

```
 <ns2:OrigSystemReference>6382</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CreatedByModule>ASO_CUSTOMER_DATA</ns2:CreatedByModule>
 <ns2:RelationshipId>8249</ns2:RelationshipId>
 <ns2:ContactPersonId>36475</ns2:ContactPersonId>
 <ns2:CustomerAccountContactRole xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContactRole/">
 <ns2:ResponsibilityId>3824</ns2:ResponsibilityId>
 <ns2:CustomerAccountRoleId>6382</ns2:CustomerAccountRoleId>
 <ns2:ResponsibilityType>BILL_TO</ns2:ResponsibilityType>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:CreatedBy>1006717</ns2:CreatedBy>
 <ns2:CreationDate>2003-08-01T18:47:28Z</ns2:CreationDate>
 <ns2:LastUpdateDate>2003-08-01T18:47:28Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>1006717</ns2:LastUpdatedBy>
 <ns2:LastUpdateLogin>2259440</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>3824</ns2:OrigSystemReference>
 <ns2:CreatedByModule>ASO_CUSTOMER_DATA</ns2:CreatedByModule>
 <ns2:StatusCode>A</ns2:StatusCode>
 <ns2:CustAcctContactRoleInformation>
 <ns0:ResponsibilityId>3824</ns0:ResponsibilityId>
 <ns0:hzRoleresp1 xsi:nil="true"/>
 <ns0:__FLEX_Context xsi:nil="true"/>
 <ns0:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns0:_FLEX_NumOfSegments>1</ns0:_FLEX_NumOfSegments>
 </ns2:CustAcctContactRoleInformation>
 </ns2:CustomerAccountContactRole>
 <ns2:CustomerAccountContactRole xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContactRole/">
 <ns2:ResponsibilityId>3823</ns2:ResponsibilityId>
 <ns2:CustomerAccountRoleId>6382</ns2:CustomerAccountRoleId>
 <ns2:ResponsibilityType>SHIP_TO</ns2:ResponsibilityType>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:CreatedBy>1006717</ns2:CreatedBy>
 <ns2:CreationDate>2003-08-01T18:47:14Z</ns2:CreationDate>
 <ns2:LastUpdateDate>2003-08-01T18:47:14Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>1006717</ns2:LastUpdatedBy>
 <ns2:LastUpdateLogin>2259440</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>3823</ns2:OrigSystemReference>
 <ns2:CreatedByModule>ASO_CUSTOMER_DATA</ns2:CreatedByModule>
 <ns2:StatusCode>A</ns2:StatusCode>
 <ns2:CustAcctContactRoleInformation>
 <ns0:ResponsibilityId>3823</ns0:ResponsibilityId>
 <ns0:hzRoleresp1 xsi:nil="true"/>
 <ns0:__FLEX_Context xsi:nil="true"/>
 <ns0:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns0:_FLEX_NumOfSegments>1</ns0:_FLEX_NumOfSegments>
 </ns2:CustAcctContactRoleInformation>
 </ns2:CustomerAccountContactRole>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>14481</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>6382</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCOUNT_ROLES</ns4:OwnerTableName>
 <ns4:OwnerTableId>6382</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>1006717</ns4:CreatedBy>
 <ns4:CreationDate>2003-08-01T18:47:14Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>1006717</ns4:LastUpdatedBy>
```

```
 <ns4:LastUpdateDate>2003-08-01T18:47:14Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>2259440</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>ASO_CUSTOMER_DATA</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>14481</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctContactInformation>
 <ns3:CustAccountRoleId>6382</ns3:CustAccountRoleId>
 <ns3:hzCustacctcont1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
 </ns2:CustAcctContactInformation>
 </ns2:CustomerAccountContact>
 <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContact/">
 <ns2:CustomerAccountRoleId>1108</ns2:CustomerAccountRoleId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:CustomerAccountSiteId>1026</ns2:CustomerAccountSiteId>
 <ns2:PrimaryFlag xsi:nil="true"/>
 <ns2:RoleType>CONTACT</ns2:RoleType>
 <ns2:LastUpdateDate>1998-03-16T17:56:30Z</ns2:LastUpdateDate>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:LastUpdatedBy>1318</ns2:LastUpdatedBy>
 <ns2:CreationDate>1997-05-07T11:19:42Z</ns2:CreationDate>
 <ns2:CreatedBy>1068</ns2:CreatedBy>
 <ns2:LastUpdateLogin>221766</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>1108</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:RelationshipId>1108</ns2:RelationshipId>
 <ns2:ContactPersonId>2491</ns2:ContactPersonId>
 <ns2:CustomerAccountContactRole xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContactRole/">
 <ns2:ResponsibilityId>1172</ns2:ResponsibilityId>
 <ns2:CustomerAccountRoleId>1108</ns2:CustomerAccountRoleId>
 <ns2:ResponsibilityType>SHIP_TO</ns2:ResponsibilityType>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:CreatedBy>1068</ns2:CreatedBy>
 <ns2:CreationDate>1998-02-09T14:08:46Z</ns2:CreationDate>
 <ns2:LastUpdateDate>1998-02-09T14:08:46Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>1068</ns2:LastUpdatedBy>
 <ns2:LastUpdateLogin>215100</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:StatusCode>A</ns2:StatusCode>
 <ns2:CustAcctContactRoleInformation>
 <ns0:ResponsibilityId>1172</ns0:ResponsibilityId>
 <ns0:hzRoleresp1 xsi:nil="true"/>
 <ns0:__FLEX_Context xsi:nil="true"/>
 <ns0:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns0:_FLEX_NumOfSegments>1</ns0:_FLEX_NumOfSegments>
 </ns2:CustAcctContactRoleInformation>
 </ns2:CustomerAccountContactRole>
 <ns2:CustomerAccountContactRole xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContactRole/">
```

```
 <ns2:ResponsibilityId>1171</ns2:ResponsibilityId>
 <ns2:CustomerAccountRoleId>1108</ns2:CustomerAccountRoleId>
 <ns2:ResponsibilityType>BILL_TO</ns2:ResponsibilityType>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:CreatedBy>1068</ns2:CreatedBy>
 <ns2:CreationDate>1998-02-09T14:08:46Z</ns2:CreationDate>
 <ns2:LastUpdateDate>1998-02-09T14:08:46Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>1068</ns2:LastUpdatedBy>
 <ns2:LastUpdateLogin>215100</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:StatusCode>A</ns2:StatusCode>
 <ns2:CustAcctContactRoleInformation>
 <ns0:ResponsibilityId>1171</ns0:ResponsibilityId>
 <ns0:hzRoleresp1 xsi:nil="true"/>
 <ns0:__FLEX_Context xsi:nil="true"/>
 <ns0:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns0:_FLEX_NumOfSegments>1</ns0:_FLEX_NumOfSegments>
 </ns2:CustAcctContactRoleInformation>
 </ns2:CustomerAccountContactRole>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>14572</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>1108</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCOUNT_ROLES</ns4:OwnerTableName>
 <ns4:OwnerTableId>1108</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>1068</ns4:CreatedBy>
 <ns4:CreationDate>1997-05-07T11:19:42Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>1318</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>1998-03-16T17:56:30Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>221766</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>14572</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctContactInformation>
 <ns3:CustAccountRoleId>1108</ns3:CustAccountRoleId>
 <ns3:hzCustacctcont1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
 </ns2:CustAcctContactInformation>
 </ns2:CustomerAccountContact>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>1009</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>1026</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2004-06-17T05:17:49Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>1318</ns2:LastUpdatedBy>
 <ns2:CreationDate>1997-02-23T12:42:45Z</ns2:CreationDate>
 <ns2:CreatedBy>1028</ns2:CreatedBy>
```

```
 <ns2:SiteUseCode>BILL_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Oakdale (OPS)</ns2:Location>
 <ns2:LastUpdateLogin>2670346</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference xsi:nil="true"/>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId xsi:nil="true"/>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId xsi:nil="true"/>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:SetId>204</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>1009</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>1010</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>1026</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2003-06-23T10:27:58Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>1000049</ns2:LastUpdatedBy>
 <ns2:CreationDate>1997-02-23T12:42:59Z</ns2:CreationDate>
 <ns2:CreatedBy>1028</ns2:CreatedBy>
 <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Oakdale (OPS)</ns2:Location>
 <ns2:LastUpdateLogin>2194816</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId>1009</ns2:BillToSiteUseId>
 <ns2:OrigSystemReference xsi:nil="true"/>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId xsi:nil="true"/>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId xsi:nil="true"/>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule xsi:nil="true"/>
```

```
 <ns2:SetId>204</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>1010</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>100100008600893</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>EBIZ</ns4:OrigSystem>
 <ns4:OrigSystemReference>10924</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCT_SITES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>1026</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2013-08-16</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>BULK_IMPORT</ns4:CreatedBy>
 <ns4:CreationDate>2013-08-16T00:15:04.625303Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>BULK_IMPORT</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2013-08-16T00:15:04.625303Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>-1</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>HZ_IMPORT</ns4:CreatedByModule>
 <ns4:PartyId xsi:nil="true"/>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>100100008600893</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>10846</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>1026</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCT_SITES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>1026</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>1028</ns4:CreatedBy>
 <ns4:CreationDate>1997-02-23T00:00:00Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>1318</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2003-07-16T07:15:58Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>2222857</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>10846</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
```

```
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteInformation>
 <ns7:CustAcctSiteId>1026</ns7:CustAcctSiteId>
 <ns7:hzCustacctsite1 xsi:nil="true"/>
 <ns7:omsitename xsi:nil="true"/>
 <ns7:omsitenumber xsi:nil="true"/>
 <ns7:omsitedate xsi:nil="true"/>
 <ns7:__FLEX_Context xsi:nil="true"/>
 <ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns7:_FLEX_NumOfSegments>4</ns7:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteInformation>
 </ns2:CustomerAccountSite>
 <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/">
 <ns2:CustomerAccountSiteId>1027</ns2:CustomerAccountSiteId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:PartySiteId>1027</ns2:PartySiteId>
 <ns2:LastUpdateDate>2004-10-20T10:57:11Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>1318</ns2:LastUpdatedBy>
 <ns2:CreationDate>1997-02-23T00:00:00Z</ns2:CreationDate>
 <ns2:CreatedBy>1028</ns2:CreatedBy>
 <ns2:LastUpdateLogin>-1</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>1027</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToIndicator>Y</ns2:BillToIndicator>
 <ns2:MarketIndicator xsi:nil="true"/>
 <ns2:ShipToIndicator>Y</ns2:ShipToIndicator>
 <ns2:CustomerCategoryCode xsi:nil="true"/>
 <ns2:Language xsi:nil="true"/>
 <ns2:KeyAccountFlag>false</ns2:KeyAccountFlag>
 <ns2:TpHeaderId xsi:nil="true"/>
 <ns2:EceTpLocationCode xsi:nil="true"/>
 <ns2:TranslatedCustomerName xsi:nil="true"/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:SetId>204</ns2:SetId>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:SetCode>Vision Operations 204</ns2:SetCode>
 <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContact/">
 <ns2:CustomerAccountRoleId>1019</ns2:CustomerAccountRoleId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:CustomerAccountSiteId>1027</ns2:CustomerAccountSiteId>
 <ns2:PrimaryFlag xsi:nil="true"/>
 <ns2:RoleType>CONTACT</ns2:RoleType>
 <ns2:LastUpdateDate>1999-06-23T11:14:38Z</ns2:LastUpdateDate>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:LastUpdatedBy>1318</ns2:LastUpdatedBy>
 <ns2:CreationDate>1997-02-24T12:45:50Z</ns2:CreationDate>
 <ns2:CreatedBy>1028</ns2:CreatedBy>
 <ns2:LastUpdateLogin>333093</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>1019</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:RelationshipId>1019</ns2:RelationshipId>
 <ns2:ContactPersonId>2455</ns2:ContactPersonId>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>14547</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>1019</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCOUNT_ROLES</ns4:OwnerTableName>
 <ns4:OwnerTableId>1019</ns4:OwnerTableId>
```

```
<ns4:Status>A</ns4:Status>
<ns4:ReasonCode xsi:nil="true"/>
<ns4:OldOrigSystemReference xsi:nil="true"/>
<ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
<ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
<ns4:CreatedBy>1028</ns4:CreatedBy>
<ns4:CreationDate>1997-02-24T12:45:50Z</ns4:CreationDate>
<ns4:LastUpdatedBy>1318</ns4:LastUpdatedBy>
<ns4:LastUpdateDate>1999-06-23T11:14:38Z</ns4:LastUpdateDate>
<ns4:LastUpdateLogin>333093</ns4:LastUpdateLogin>
<ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
<ns4:CreatedByModule>TCA</ns4:CreatedByModule>
<ns4:PartyId>1002</ns4:PartyId>
<ns4:RequestId xsi:nil="true"/>
<ns4:SourceSystemRefInformation>
<ns8:OrigSystemRefId>14547</ns8:OrigSystemRefId>
<ns8:hzSrcsysref1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
</ns4:SourceSystemRefInformation>
</ns2:OriginalSystemReference>
<ns2:CustAcctContactInformation>
<ns3:CustAccountRoleId>1019</ns3:CustAccountRoleId>
<ns3:hzCustacctcont1 xsi:nil="true"/>
<ns3:__FLEX_Context xsi:nil="true"/>
<ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
</ns2:CustAcctContactInformation>
</ns2:CustomerAccountContact>
<ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
<ns2:SiteUseId>1011</ns2:SiteUseId>
<ns2:CustomerAccountSiteId>1027</ns2:CustomerAccountSiteId>
<ns2:LastUpdateDate>2000-05-24T08:02:22Z</ns2:LastUpdateDate>
<ns2:LastUpdatedBy>1000049</ns2:LastUpdatedBy>
<ns2:CreationDate>1997-02-23T12:45:03Z</ns2:CreationDate>
<ns2:CreatedBy>1028</ns2:CreatedBy>
<ns2:SiteUseCode>BILL_TO</ns2:SiteUseCode>
<ns2:PrimaryFlag>false</ns2:PrimaryFlag>
<ns2:Status>A</ns2:Status>
<ns2:Location>Bristol (OPS)</ns2:Location>
<ns2:LastUpdateLogin>-1</ns2:LastUpdateLogin>
<ns2:BillToSiteUseId xsi:nil="true"/>
<ns2:OrigSystemReference xsi:nil="true"/>
<ns2:SICCode xsi:nil="true"/>
<ns2:PaymentTermId xsi:nil="true"/>
<ns2:GSAIndicator>N</ns2:GSAIndicator>
<ns2:TerritoryId xsi:nil="true"/>
<ns2:RequestId xsi:nil="true"/>
<ns2:TaxReference xsi:nil="true"/>
<ns2:SortPriority xsi:nil="true"/>
<ns2:TaxCode>Exempt</ns2:TaxCode>
<ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
<ns2:LastAccrueChargeDate xsi:nil="true"/>
<ns2:LastUnaccrueChargeDate xsi:nil="true"/>
<ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
<ns2:TaxHeaderLevelFlag xsi:nil="true"/>
<ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
<ns2:TaxRoundingRule xsi:nil="true"/>
<ns2:TaxClassification xsi:nil="true"/>
<ns2:CreatedByModule xsi:nil="true"/>
<ns2:SetId>204</ns2:SetId>
<ns2:EndDate>4712-12-31</ns2:EndDate>
<ns2:StartDate>1951-01-01</ns2:StartDate>
<ns2:CustAcctSiteUseInformation>
```

```
 <ns6:SiteUseId>1011</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>1012</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>1027</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>1999-09-04T11:14:46Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>1318</ns2:LastUpdatedBy>
 <ns2:CreationDate>1997-02-23T12:45:10Z</ns2:CreationDate>
 <ns2:CreatedBy>1028</ns2:CreatedBy>
 <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Bristol (OPS)</ns2:Location>
 <ns2:LastUpdateLogin>352261</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId>1011</ns2:BillToSiteUseId>
 <ns2:OrigSystemReference xsi:nil="true"/>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId xsi:nil="true"/>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId xsi:nil="true"/>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode>Exempt</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:SetId>204</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>1012</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>10847</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>1027</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCT_SITES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>1027</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>1028</ns4:CreatedBy>
 <ns4:CreationDate>1997-02-23T00:00:00Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>1028</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>1997-02-23T00:00:00Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1064</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
```

```
 <ns4:CreatedByModule>TCA</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>10847</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteInformation>
 <ns7:CustAcctSiteId>1027</ns7:CustAcctSiteId>
 <ns7:hzCustacctsite1 xsi:nil="true"/>
 <ns7:omsitename xsi:nil="true"/>
 <ns7:omsitenumber xsi:nil="true"/>
 <ns7:omsitedate xsi:nil="true"/>
 <ns7:__FLEX_Context xsi:nil="true"/>
 <ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns7:_FLEX_NumOfSegments>4</ns7:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteInformation>
 </ns2:CustomerAccountSite>
 <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/">
 <ns2:CustomerAccountSiteId>4270</ns2:CustomerAccountSiteId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:PartySiteId>5666</ns2:PartySiteId>
 <ns2:LastUpdateDate>2002-03-12T07:54:08Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2046</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-03-12T07:52:52Z</ns2:CreationDate>
 <ns2:CreatedBy>2046</ns2:CreatedBy>
 <ns2:LastUpdateLogin>1413781</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>4270</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToIndicator>P</ns2:BillToIndicator>
 <ns2:MarketIndicator xsi:nil="true"/>
 <ns2:ShipToIndicator>P</ns2:ShipToIndicator>
 <ns2:CustomerCategoryCode xsi:nil="true"/>
 <ns2:Language xsi:nil="true"/>
 <ns2:KeyAccountFlag>false</ns2:KeyAccountFlag>
 <ns2:TpHeaderId xsi:nil="true"/>
 <ns2:EceTpLocationCode xsi:nil="true"/>
 <ns2:TranslatedCustomerName xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>626</ns2:SetId>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:SetCode>Vision Industries 626</ns2:SetCode>
 <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContact/">
 <ns2:CustomerAccountRoleId>4616</ns2:CustomerAccountRoleId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:CustomerAccountSiteId>4270</ns2:CustomerAccountSiteId>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:RoleType>CONTACT</ns2:RoleType>
 <ns2:LastUpdateDate>2002-03-12T07:52:53Z</ns2:LastUpdateDate>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:LastUpdatedBy>2046</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-03-12T07:52:53Z</ns2:CreationDate>
 <ns2:CreatedBy>2046</ns2:CreatedBy>
 <ns2:LastUpdateLogin>1413781</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>4616</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
```

```
 <ns2:RelationshipId>5801</ns2:RelationshipId>
 <ns2:ContactPersonId>11088</ns2:ContactPersonId>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>14142</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4616</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCOUNT_ROLES</ns4:OwnerTableName>
 <ns4:OwnerTableId>4616</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2046</ns4:CreatedBy>
 <ns4:CreationDate>2002-03-12T07:52:53Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2046</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-03-12T07:52:53Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1413781</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>14142</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctContactInformation>
 <ns3:CustAccountRoleId>4616</ns3:CustAccountRoleId>
 <ns3:hzCustacctcont1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
 </ns2:CustAcctContactInformation>
 </ns2:CustomerAccountContact>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>4672</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>4270</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2002-11-05T06:18:32Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2046</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-03-12T07:52:52Z</ns2:CreationDate>
 <ns2:CreatedBy>2046</ns2:CreatedBy>
 <ns2:SiteUseCode>BILL_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Bristol</ns2:Location>
 <ns2:LastUpdateLogin>1861745</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference>4672</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId>4</ns2:PaymentTermId>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId>1211</ns2:TerritoryId>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference>UK34231676</ns2:TaxReference>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode>STD</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
```

```
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>626</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>13244</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4672</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>4672</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2046</ns4:CreatedBy>
 <ns4:CreationDate>2002-03-12T07:52:52Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2046</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-11-05T06:18:32Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1861745</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>13244</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>4672</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>4674</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>4270</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2002-11-05T06:18:15Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2046</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-03-12T07:52:53Z</ns2:CreationDate>
 <ns2:CreatedBy>2046</ns2:CreatedBy>
 <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Bristol</ns2:Location>
 <ns2:LastUpdateLogin>1861745</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId>4672</ns2:BillToSiteUseId>
 <ns2:OrigSystemReference>4674</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId>4</ns2:PaymentTermId>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId>1211</ns2:TerritoryId>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference>UK34231676</ns2:TaxReference>
 <ns2:SortPriority xsi:nil="true"/>
```

```
 <ns2:TaxCode>STD</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>626</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>13245</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4674</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>4674</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2046</ns4:CreatedBy>
 <ns4:CreationDate>2002-03-12T07:52:53Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2046</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-11-05T06:18:15Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1861745</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>13245</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>4674</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>11680</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4270</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCT_SITES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>4270</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2046</ns4:CreatedBy>
 <ns4:CreationDate>2002-03-12T07:52:52Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2046</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-03-12T07:54:08Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1413781</ns4:LastUpdateLogin>
```

```
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>11680</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteInformation>
 <ns7:CustAcctSiteId>4270</ns7:CustAcctSiteId>
 <ns7:hzCustacctsite1 xsi:nil="true"/>
 <ns7:omsitename xsi:nil="true"/>
 <ns7:omsitenumber xsi:nil="true"/>
 <ns7:omsitedate xsi:nil="true"/>
 <ns7:__FLEX_Context xsi:nil="true"/>
 <ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns7:_FLEX_NumOfSegments>4</ns7:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteInformation>
 </ns2:CustomerAccountSite>
 <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/">
 <ns2:CustomerAccountSiteId>1509</ns2:CustomerAccountSiteId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:PartySiteId>1509</ns2:PartySiteId>
 <ns2:LastUpdateDate>2002-01-17T05:32:04Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2048</ns2:LastUpdatedBy>
 <ns2:CreationDate>1999-12-03T06:04:17Z</ns2:CreationDate>
 <ns2:CreatedBy>2048</ns2:CreatedBy>
 <ns2:LastUpdateLogin>1251447</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>1509</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToIndicator>P</ns2:BillToIndicator>
 <ns2:MarketIndicator xsi:nil="true"/>
 <ns2:ShipToIndicator>P</ns2:ShipToIndicator>
 <ns2:CustomerCategoryCode xsi:nil="true"/>
 <ns2:Language xsi:nil="true"/>
 <ns2:KeyAccountFlag>false</ns2:KeyAccountFlag>
 <ns2:TpHeaderId xsi:nil="true"/>
 <ns2:EceTpLocationCode xsi:nil="true"/>
 <ns2:TranslatedCustomerName xsi:nil="true"/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:SetId>887</ns2:SetId>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:SetCode>Vision Sweden 887</ns2:SetCode>
 <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContact/">
 <ns2:CustomerAccountRoleId>4327</ns2:CustomerAccountRoleId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:CustomerAccountSiteId>1509</ns2:CustomerAccountSiteId>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:RoleType>CONTACT</ns2:RoleType>
 <ns2:LastUpdateDate>2002-01-17T05:32:04Z</ns2:LastUpdateDate>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:LastUpdatedBy>2048</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-01-17T05:32:04Z</ns2:CreationDate>
 <ns2:CreatedBy>2048</ns2:CreatedBy>
 <ns2:LastUpdateLogin>1251447</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>4327</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
```

```
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:RelationshipId>5522</ns2:RelationshipId>
 <ns2:ContactPersonId>7385</ns2:ContactPersonId>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>14095</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4327</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCOUNT_ROLES</ns4:OwnerTableName>
 <ns4:OwnerTableId>4327</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2048</ns4:CreatedBy>
 <ns4:CreationDate>2002-01-17T05:32:04Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2048</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-01-17T05:32:04Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1251447</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>14095</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctContactInformation>
 <ns3:CustAccountRoleId>4327</ns3:CustAccountRoleId>
 <ns3:hzCustacctcont1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
 </ns2:CustAcctContactInformation>
 </ns2:CustomerAccountContact>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>1571</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>1509</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2002-11-05T06:37:29Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2048</ns2:LastUpdatedBy>
 <ns2:CreationDate>1999-12-03T06:04:17Z</ns2:CreationDate>
 <ns2:CreatedBy>2048</ns2:CreatedBy>
 <ns2:SiteUseCode>BILL_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Malmö</ns2:Location>
 <ns2:LastUpdateLogin>1861761</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference xsi:nil="true"/>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId>4</ns2:PaymentTermId>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId>1193</ns2:TerritoryId>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference>9897676755</ns2:TaxReference>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode>25% moms</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
```

```
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:SetId>887</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>1571</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>3015</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>1509</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2002-11-05T06:37:12Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2048</ns2:LastUpdatedBy>
 <ns2:CreationDate>2000-07-13T00:00:00Z</ns2:CreationDate>
 <ns2:CreatedBy>2048</ns2:CreatedBy>
 <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Malmö</ns2:Location>
 <ns2:LastUpdateLogin>1861761</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId>1571</ns2:BillToSiteUseId>
 <ns2:OrigSystemReference>3015</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId>4</ns2:PaymentTermId>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId>1193</ns2:TerritoryId>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference>9897676755</ns2:TaxReference>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode>25% moms</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:SetId>887</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>12751</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>3015</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>3015</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2048</ns4:CreatedBy>
 <ns4:CreationDate>2000-07-13T00:00:00Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2048</ns4:LastUpdatedBy>
```

```
 <ns4:LastUpdateDate>2002-11-05T06:37:12Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1861761</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>12751</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>3015</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>10782</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>1509</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCT_SITES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>1509</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2048</ns4:CreatedBy>
 <ns4:CreationDate>1999-12-03T06:04:17Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2048</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-01-17T05:32:04Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1251447</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>10782</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteInformation>
 <ns7:CustAcctSiteId>1509</ns7:CustAcctSiteId>
 <ns7:hzCustacctsite1 xsi:nil="true"/>
 <ns7:omsitename xsi:nil="true"/>
 <ns7:omsitenumber xsi:nil="true"/>
 <ns7:omsitedate xsi:nil="true"/>
 <ns7:__FLEX_Context xsi:nil="true"/>
 <ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns7:_FLEX_NumOfSegments>4</ns7:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteInformation>
 </ns2:CustomerAccountSite>
 <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/">
 <ns2:CustomerAccountSiteId>4049</ns2:CustomerAccountSiteId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:PartySiteId>4417</ns2:PartySiteId>
```

```
 <ns2:LastUpdateDate>2002-01-17T05:01:54Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2044</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-01-17T04:59:56Z</ns2:CreationDate>
 <ns2:CreatedBy>2044</ns2:CreatedBy>
 <ns2:LastUpdateLogin>1251699</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>4049</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToIndicator>P</ns2:BillToIndicator>
 <ns2:MarketIndicator xsi:nil="true"/>
 <ns2:ShipToIndicator>P</ns2:ShipToIndicator>
 <ns2:CustomerCategoryCode xsi:nil="true"/>
 <ns2:Language xsi:nil="true"/>
 <ns2:KeyAccountFlag>false</ns2:KeyAccountFlag>
 <ns2:TpHeaderId xsi:nil="true"/>
 <ns2:EceTpLocationCode xsi:nil="true"/>
 <ns2:TranslatedCustomerName xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>888</ns2:SetId>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:SetCode>Vision France - Organ 888</ns2:SetCode>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>4254</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>4049</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2002-01-17T05:00:57Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2044</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-01-17T05:00:57Z</ns2:CreationDate>
 <ns2:CreatedBy>2044</ns2:CreatedBy>
 <ns2:SiteUseCode>DELIVER_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Paris</ns2:Location>
 <ns2:LastUpdateLogin>1251699</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference>4254</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId xsi:nil="true"/>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId xsi:nil="true"/>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>888</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>13296</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4254</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>4254</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
```

```
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2044</ns4:CreatedBy>
 <ns4:CreationDate>2002-01-17T05:00:57Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2044</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-01-17T05:00:57Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1251699</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>13296</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>4254</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>4256</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>4049</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2002-01-17T05:00:57Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2044</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-01-17T05:00:57Z</ns2:CreationDate>
 <ns2:CreatedBy>2044</ns2:CreatedBy>
 <ns2:SiteUseCode>DRAWEE</ns2:SiteUseCode>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Paris</ns2:Location>
 <ns2:LastUpdateLogin>1251699</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference>4256</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId xsi:nil="true"/>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId xsi:nil="true"/>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>888</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>13301</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
```

```
<ns4:OrigSystemReference>4256</ns4:OrigSystemReference>
<ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
<ns4:OwnerTableId>4256</ns4:OwnerTableId>
<ns4:Status>A</ns4:Status>
<ns4:ReasonCode xsi:nil="true"/>
<ns4:OldOrigSystemReference xsi:nil="true"/>
<ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
<ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
<ns4:CreatedBy>2044</ns4:CreatedBy>
<ns4:CreationDate>2002-01-17T05:00:57Z</ns4:CreationDate>
<ns4:LastUpdatedBy>2044</ns4:LastUpdatedBy>
<ns4:LastUpdateDate>2002-01-17T05:00:57Z</ns4:LastUpdateDate>
<ns4:LastUpdateLogin>1251699</ns4:LastUpdateLogin>
<ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
<ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
<ns4:PartyId>1002</ns4:PartyId>
<ns4:RequestId xsi:nil="true"/>
<ns4:SourceSystemRefInformation>
<ns8:OrigSystemRefId>13301</ns8:OrigSystemRefId>
<ns8:hzSrcsysref1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
</ns4:SourceSystemRefInformation>
</ns2:OriginalSystemReference>
<ns2:CustAcctSiteUseInformation>
<ns6:SiteUseId>4256</ns6:SiteUseId>
<ns6:__FLEX_Context xsi:nil="true"/>
<ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
</ns2:CustAcctSiteUseInformation>
</ns2:CustomerAccountSiteUse>
<ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
<ns2:SiteUseId>4252</ns2:SiteUseId>
<ns2:CustomerAccountSiteId>4049</ns2:CustomerAccountSiteId>
<ns2:LastUpdateDate>2002-01-17T05:00:57Z</ns2:LastUpdateDate>
<ns2:LastUpdatedBy>2044</ns2:LastUpdatedBy>
<ns2:CreationDate>2002-01-17T05:00:57Z</ns2:CreationDate>
<ns2:CreatedBy>2044</ns2:CreatedBy>
<ns2:SiteUseCode>DUN</ns2:SiteUseCode>
<ns2:PrimaryFlag>false</ns2:PrimaryFlag>
<ns2:Status>A</ns2:Status>
<ns2:Location>Paris</ns2:Location>
<ns2:LastUpdateLogin>1251699</ns2:LastUpdateLogin>
<ns2:BillToSiteUseId xsi:nil="true"/>
<ns2:OrigSystemReference>4252</ns2:OrigSystemReference>
<ns2:SICCode xsi:nil="true"/>
<ns2:PaymentTermId xsi:nil="true"/>
<ns2:GSAIndicator>N</ns2:GSAIndicator>
<ns2:TerritoryId xsi:nil="true"/>
<ns2:RequestId xsi:nil="true"/>
<ns2:TaxReference xsi:nil="true"/>
<ns2:SortPriority xsi:nil="true"/>
<ns2:TaxCode xsi:nil="true"/>
<ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
<ns2:LastAccrueChargeDate xsi:nil="true"/>
<ns2:LastUnaccrueChargeDate xsi:nil="true"/>
<ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
<ns2:TaxHeaderLevelFlag xsi:nil="true"/>
<ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
<ns2:TaxRoundingRule xsi:nil="true"/>
<ns2:TaxClassification xsi:nil="true"/>
<ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
<ns2:SetId>888</ns2:SetId>
<ns2:EndDate>4712-12-31</ns2:EndDate>
```

```
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>13295</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4252</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>4252</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2044</ns4:CreatedBy>
 <ns4:CreationDate>2002-01-17T05:00:57Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2044</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-01-17T05:00:57Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1251699</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>13295</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>4252</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>4248</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>4049</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2002-11-05T04:13:34Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2044</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-01-17T05:00:56Z</ns2:CreationDate>
 <ns2:CreatedBy>2044</ns2:CreatedBy>
 <ns2:SiteUseCode>BILL_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Paris</ns2:Location>
 <ns2:LastUpdateLogin>1861597</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference>4248</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId>4</ns2:PaymentTermId>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId>1127</ns2:TerritoryId>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference>01234567812</ns2:TaxReference>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode>D19.6</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
```

```
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>888</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>13293</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4248</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>4248</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2044</ns4:CreatedBy>
 <ns4:CreationDate>2002-01-17T05:00:56Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2044</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-11-05T04:13:34Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1861597</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>13293</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>4248</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>12742</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>4049</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2007-01-03T22:06:35Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>-1551</ns2:LastUpdatedBy>
 <ns2:CreationDate>2007-01-03T22:06:35Z</ns2:CreationDate>
 <ns2:CreatedBy>-1551</ns2:CreatedBy>
 <ns2:SiteUseCode>LATE_CHARGE</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>12742</ns2:Location>
 <ns2:LastUpdateLogin>-1551</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference xsi:nil="true"/>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId xsi:nil="true"/>
 <ns2:GSAIndicator xsi:nil="true"/>
 <ns2:TerritoryId xsi:nil="true"/>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
```

```
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>AR_LATE_CHARGE_UPG</ns2:CreatedByModule>
 <ns2:SetId>888</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>12742</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>4250</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>4049</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2004-07-13T02:50:35Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2044</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-01-17T05:00:56Z</ns2:CreationDate>
 <ns2:CreatedBy>2044</ns2:CreatedBy>
 <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Paris</ns2:Location>
 <ns2:LastUpdateLogin>2690713</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId>4248</ns2:BillToSiteUseId>
 <ns2:OrigSystemReference>4250</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId>4</ns2:PaymentTermId>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId>1127</ns2:TerritoryId>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference>01234567812</ns2:TaxReference>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode>D19.6</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>888</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>13294</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4250</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>4250</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2044</ns4:CreatedBy>
```

```
 <ns4:CreationDate>2002-01-17T05:00:56Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2044</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-11-05T04:13:14Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1861597</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>13294</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>4250</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>11688</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4049</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCT_SITES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>4049</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2044</ns4:CreatedBy>
 <ns4:CreationDate>2002-01-17T04:59:56Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2044</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-01-17T05:01:54Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1251699</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>11688</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteInformation>
 <ns7:CustAcctSiteId>4049</ns7:CustAcctSiteId>
 <ns7:hzCustacctsite1 xsi:nil="true"/>
 <ns7:omsitename xsi:nil="true"/>
 <ns7:omsitenumber xsi:nil="true"/>
 <ns7:omsitedate xsi:nil="true"/>
 <ns7:__FLEX_Context xsi:nil="true"/>
 <ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns7:_FLEX_NumOfSegments>4</ns7:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteInformation>
 </ns2:CustomerAccountSite>
 <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/">
 <ns2:CustomerAccountSiteId>4307</ns2:CustomerAccountSiteId>
```

```
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:PartySiteId>5721</ns2:PartySiteId>
 <ns2:LastUpdateDate>2002-03-25T00:24:26Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2047</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-03-24T23:34:14Z</ns2:CreationDate>
 <ns2:CreatedBy>2047</ns2:CreatedBy>
 <ns2:LastUpdateLogin>1419691</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>4307</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToIndicator>P</ns2:BillToIndicator>
 <ns2:MarketIndicator xsi:nil="true"/>
 <ns2:ShipToIndicator>P</ns2:ShipToIndicator>
 <ns2:CustomerCategoryCode xsi:nil="true"/>
 <ns2:Language xsi:nil="true"/>
 <ns2:KeyAccountFlag>false</ns2:KeyAccountFlag>
 <ns2:TpHeaderId xsi:nil="true"/>
 <ns2:EceTpLocationCode xsi:nil="true"/>
 <ns2:TranslatedCustomerName xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>889</ns2:SetId>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:SetCode>Vision Netherlands 889</ns2:SetCode>
 <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContact/">
 <ns2:CustomerAccountRoleId>4672</ns2:CustomerAccountRoleId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:CustomerAccountSiteId>4307</ns2:CustomerAccountSiteId>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:RoleType>CONTACT</ns2:RoleType>
 <ns2:LastUpdateDate>2002-03-24T23:35:17Z</ns2:LastUpdateDate>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:LastUpdatedBy>2047</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-03-24T23:35:17Z</ns2:CreationDate>
 <ns2:CreatedBy>2047</ns2:CreatedBy>
 <ns2:LastUpdateLogin>1419691</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>4672</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:RelationshipId>5839</ns2:RelationshipId>
 <ns2:ContactPersonId>11162</ns2:ContactPersonId>
 <ns2:CustomerAccountContactRole xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContactRole/">
 <ns2:ResponsibilityId>2745</ns2:ResponsibilityId>
 <ns2:CustomerAccountRoleId>4672</ns2:CustomerAccountRoleId>
 <ns2:ResponsibilityType>BILL_TO</ns2:ResponsibilityType>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:CreatedBy>2047</ns2:CreatedBy>
 <ns2:CreationDate>2002-04-25T04:43:42Z</ns2:CreationDate>
 <ns2:LastUpdateDate>2002-04-25T04:44:36Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2047</ns2:LastUpdatedBy>
 <ns2:LastUpdateLogin>1478633</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>2745</ns2:OrigSystemReference>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:StatusCode>A</ns2:StatusCode>
 <ns2:CustAcctContactRoleInformation>
 <ns0:ResponsibilityId>2745</ns0:ResponsibilityId>
 <ns0:hzRoleresp1 xsi:nil="true"/>
 <ns0:__FLEX_Context xsi:nil="true"/>
 <ns0:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns0:_FLEX_NumOfSegments>1</ns0:_FLEX_NumOfSegments>
 </ns2:CustAcctContactRoleInformation>
 </ns2:CustomerAccountContactRole>
```

```
 <ns2:CustomerAccountContactRole xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContactRole/">
 <ns2:ResponsibilityId>2889</ns2:ResponsibilityId>
 <ns2:CustomerAccountRoleId>4672</ns2:CustomerAccountRoleId>
 <ns2:ResponsibilityType>SHIP_TO</ns2:ResponsibilityType>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:CreatedBy>2047</ns2:CreatedBy>
 <ns2:CreationDate>2002-09-26T04:49:15Z</ns2:CreationDate>
 <ns2:LastUpdateDate>2002-09-26T04:49:15Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2047</ns2:LastUpdatedBy>
 <ns2:LastUpdateLogin>1809263</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>2889</ns2:OrigSystemReference>
 <ns2:CreatedByModule>TCA-FORM-WRAPPER</ns2:CreatedByModule>
 <ns2:StatusCode>A</ns2:StatusCode>
 <ns2:CustAcctContactRoleInformation>
 <ns0:ResponsibilityId>2889</ns0:ResponsibilityId>
 <ns0:hzRoleresp1 xsi:nil="true"/>
 <ns0:__FLEX_Context xsi:nil="true"/>
 <ns0:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns0:_FLEX_NumOfSegments>1</ns0:_FLEX_NumOfSegments>
 </ns2:CustAcctContactRoleInformation>
 </ns2:CustomerAccountContactRole>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>14666</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4672</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCOUNT_ROLES</ns4:OwnerTableName>
 <ns4:OwnerTableId>4672</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2047</ns4:CreatedBy>
 <ns4:CreationDate>2002-03-24T23:35:17Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2047</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-03-24T23:35:17Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1419691</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>14666</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctContactInformation>
 <ns3:CustAccountRoleId>4672</ns3:CustAccountRoleId>
 <ns3:hzCustacctcont1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
 </ns2:CustAcctContactInformation>
 </ns2:CustomerAccountContact>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>4740</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>4307</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2002-11-05T04:21:30Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2047</ns2:LastUpdatedBy>
```

```
<ns2:CreationDate>2002-03-24T23:34:37Z</ns2:CreationDate>
<ns2:CreatedBy>2047</ns2:CreatedBy>
<ns2:SiteUseCode>BILL_TO</ns2:SiteUseCode>
<ns2:PrimaryFlag>true</ns2:PrimaryFlag>
<ns2:Status>A</ns2:Status>
<ns2:Location>Maastricht</ns2:Location>
<ns2:LastUpdateLogin>1861599</ns2:LastUpdateLogin>
<ns2:BillToSiteUseId xsi:nil="true"/>
<ns2:OrigSystemReference>4740</ns2:OrigSystemReference>
<ns2:SICCode xsi:nil="true"/>
<ns2:PaymentTermId>1041</ns2:PaymentTermId>
<ns2:GSAIndicator>N</ns2:GSAIndicator>
<ns2:TerritoryId>1231</ns2:TerritoryId>
<ns2:RequestId xsi:nil="true"/>
<ns2:TaxReference xsi:nil="true"/>
<ns2:SortPriority xsi:nil="true"/>
<ns2:TaxCode>Hoog BTW</ns2:TaxCode>
<ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
<ns2:LastAccrueChargeDate xsi:nil="true"/>
<ns2:LastUnaccrueChargeDate xsi:nil="true"/>
<ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
<ns2:TaxHeaderLevelFlag xsi:nil="true"/>
<ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
<ns2:TaxRoundingRule xsi:nil="true"/>
<ns2:TaxClassification xsi:nil="true"/>
<ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
<ns2:SetId>889</ns2:SetId>
<ns2:EndDate>4712-12-31</ns2:EndDate>
<ns2:StartDate>1951-01-01</ns2:StartDate>
<ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
<ns4:OrigSystemReferenceId>13465</ns4:OrigSystemReferenceId>
<ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
<ns4:OrigSystemReference>4740</ns4:OrigSystemReference>
<ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
<ns4:OwnerTableId>4740</ns4:OwnerTableId>
<ns4:Status>A</ns4:Status>
<ns4:ReasonCode xsi:nil="true"/>
<ns4:OldOrigSystemReference xsi:nil="true"/>
<ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
<ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
<ns4:CreatedBy>2047</ns4:CreatedBy>
<ns4:CreationDate>2002-03-24T23:34:37Z</ns4:CreationDate>
<ns4:LastUpdatedBy>2047</ns4:LastUpdatedBy>
<ns4:LastUpdateDate>2002-11-05T04:21:30Z</ns4:LastUpdateDate>
<ns4:LastUpdateLogin>1861599</ns4:LastUpdateLogin>
<ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
<ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
<ns4:PartyId>1002</ns4:PartyId>
<ns4:RequestId xsi:nil="true"/>
<ns4:SourceSystemRefInformation>
<ns8:OrigSystemRefId>13465</ns8:OrigSystemRefId>
<ns8:hzSrcsysref1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
</ns4:SourceSystemRefInformation>
</ns2:OriginalSystemReference>
<ns2:CustAcctSiteUseInformation>
<ns6:SiteUseId>4740</ns6:SiteUseId>
<ns6:__FLEX_Context xsi:nil="true"/>
<ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
</ns2:CustAcctSiteUseInformation>
</ns2:CustomerAccountSiteUse>
```

```
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>4742</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>4307</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2002-11-05T04:20:47Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2047</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-03-24T23:34:37Z</ns2:CreationDate>
 <ns2:CreatedBy>2047</ns2:CreatedBy>
 <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Maastricht</ns2:Location>
 <ns2:LastUpdateLogin>1861599</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId>4740</ns2:BillToSiteUseId>
 <ns2:OrigSystemReference>4742</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId>1041</ns2:PaymentTermId>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId>1231</ns2:TerritoryId>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode>Hoog BTW</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>889</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>13467</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4742</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>4742</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2047</ns4:CreatedBy>
 <ns4:CreationDate>2002-03-24T23:34:37Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2047</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-11-05T04:20:47Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1861599</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>13467</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>4742</ns6:SiteUseId>
```

```
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>11774</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4307</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCT_SITES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>4307</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2047</ns4:CreatedBy>
 <ns4:CreationDate>2002-03-24T23:34:14Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2047</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-03-25T00:24:26Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1419691</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>11774</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteInformation>
 <ns7:CustAcctSiteId>4307</ns7:CustAcctSiteId>
 <ns7:hzCustacctsite1 xsi:nil="true"/>
 <ns7:omsitename xsi:nil="true"/>
 <ns7:omsitenumber xsi:nil="true"/>
 <ns7:omsitedate xsi:nil="true"/>
 <ns7:__FLEX_Context xsi:nil="true"/>
 <ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns7:_FLEX_NumOfSegments>4</ns7:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteInformation>
 </ns2:CustomerAccountSite>
 <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/">
 <ns2:CustomerAccountSiteId>4040</ns2:CustomerAccountSiteId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:PartySiteId>4401</ns2:PartySiteId>
 <ns2:LastUpdateDate>2002-10-13T23:13:27Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2045</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-01-16T23:36:54Z</ns2:CreationDate>
 <ns2:CreatedBy>2045</ns2:CreatedBy>
 <ns2:LastUpdateLogin>1831497</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>4040</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToIndicator>P</ns2:BillToIndicator>
 <ns2:MarketIndicator xsi:nil="true"/>
 <ns2:ShipToIndicator>P</ns2:ShipToIndicator>
 <ns2:CustomerCategoryCode xsi:nil="true"/>
 <ns2:Language xsi:nil="true"/>
 <ns2:KeyAccountFlag>false</ns2:KeyAccountFlag>
 <ns2:TpHeaderId xsi:nil="true"/>
 <ns2:EceTpLocationCode xsi:nil="true"/>
```

```
 <ns2:TranslatedCustomerName xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>911</ns2:SetId>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:SetCode>Vision Germany 911</ns2:SetCode>
 <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContact/">
 <ns2:CustomerAccountRoleId>4307</ns2:CustomerAccountRoleId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:CustomerAccountSiteId>4040</ns2:CustomerAccountSiteId>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:RoleType>CONTACT</ns2:RoleType>
 <ns2:LastUpdateDate>2002-01-16T23:37:47Z</ns2:LastUpdateDate>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:LastUpdatedBy>2045</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-01-16T23:37:47Z</ns2:CreationDate>
 <ns2:CreatedBy>2045</ns2:CreatedBy>
 <ns2:LastUpdateLogin>1251100</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>4307</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:RelationshipId>5512</ns2:RelationshipId>
 <ns2:ContactPersonId>7354</ns2:ContactPersonId>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>13945</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4307</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCOUNT_ROLES</ns4:OwnerTableName>
 <ns4:OwnerTableId>4307</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2045</ns4:CreatedBy>
 <ns4:CreationDate>2002-01-16T23:37:47Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2045</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-01-16T23:37:47Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1251100</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>13945</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctContactInformation>
 <ns3:CustAccountRoleId>4307</ns3:CustAccountRoleId>
 <ns3:hzCustacctcont1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
 </ns2:CustAcctContactInformation>
 </ns2:CustomerAccountContact>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>4206</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>4040</ns2:CustomerAccountSiteId>
```

```
<ns2:LastUpdateDate>2002-11-05T05:51:02Z</ns2:LastUpdateDate>
<ns2:LastUpdatedBy>2045</ns2:LastUpdatedBy>
<ns2:CreationDate>2002-01-16T23:36:54Z</ns2:CreationDate>
<ns2:CreatedBy>2045</ns2:CreatedBy>
<ns2:SiteUseCode>BILL_TO</ns2:SiteUseCode>
<ns2:PrimaryFlag>true</ns2:PrimaryFlag>
<ns2:Status>A</ns2:Status>
<ns2:Location>Kiel</ns2:Location>
<ns2:LastUpdateLogin>1861627</ns2:LastUpdateLogin>
<ns2:BillToSiteUseId xsi:nil="true"/>
<ns2:OrigSystemReference>4206</ns2:OrigSystemReference>
<ns2:SICCode xsi:nil="true"/>
<ns2:PaymentTermId>4</ns2:PaymentTermId>
<ns2:GSAIndicator>N</ns2:GSAIndicator>
<ns2:TerritoryId>1021</ns2:TerritoryId>
<ns2:RequestId xsi:nil="true"/>
<ns2:TaxReference>DE88761643</ns2:TaxReference>
<ns2:SortPriority xsi:nil="true"/>
<ns2:TaxCode>16%</ns2:TaxCode>
<ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
<ns2:LastAccrueChargeDate xsi:nil="true"/>
<ns2:LastUnaccrueChargeDate xsi:nil="true"/>
<ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
<ns2:TaxHeaderLevelFlag xsi:nil="true"/>
<ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
<ns2:TaxRoundingRule xsi:nil="true"/>
<ns2:TaxClassification xsi:nil="true"/>
<ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
<ns2:SetId>911</ns2:SetId>
<ns2:EndDate>4712-12-31</ns2:EndDate>
<ns2:StartDate>1951-01-01</ns2:StartDate>
<ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
<ns4:OrigSystemReferenceId>13109</ns4:OrigSystemReferenceId>
<ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
<ns4:OrigSystemReference>4206</ns4:OrigSystemReference>
<ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
<ns4:OwnerTableId>4206</ns4:OwnerTableId>
<ns4:Status>A</ns4:Status>
<ns4:ReasonCode xsi:nil="true"/>
<ns4:OldOrigSystemReference xsi:nil="true"/>
<ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
<ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
<ns4:CreatedBy>2045</ns4:CreatedBy>
<ns4:CreationDate>2002-01-16T23:36:54Z</ns4:CreationDate>
<ns4:LastUpdatedBy>2045</ns4:LastUpdatedBy>
<ns4:LastUpdateDate>2002-11-05T05:51:02Z</ns4:LastUpdateDate>
<ns4:LastUpdateLogin>1861627</ns4:LastUpdateLogin>
<ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
<ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
<ns4:PartyId>1002</ns4:PartyId>
<ns4:RequestId xsi:nil="true"/>
<ns4:SourceSystemRefInformation>
<ns8:OrigSystemRefId>13109</ns8:OrigSystemRefId>
<ns8:hzSrcsysref1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
</ns4:SourceSystemRefInformation>
</ns2:OriginalSystemReference>
<ns2:CustAcctSiteUseInformation>
<ns6:SiteUseId>4206</ns6:SiteUseId>
<ns6:__FLEX_Context xsi:nil="true"/>
<ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
</ns2:CustAcctSiteUseInformation>
```

```
 </ns2:CustomerAccountSiteUse>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>4208</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>4040</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2002-11-05T05:50:15Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2045</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-01-16T23:36:54Z</ns2:CreationDate>
 <ns2:CreatedBy>2045</ns2:CreatedBy>
 <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Kiel</ns2:Location>
 <ns2:LastUpdateLogin>1861627</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId>4206</ns2:BillToSiteUseId>
 <ns2:OrigSystemReference>4208</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId>4</ns2:PaymentTermId>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId>1021</ns2:TerritoryId>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference>DE88761643</ns2:TaxReference>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode>16%</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>911</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>13111</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4208</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>4208</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2045</ns4:CreatedBy>
 <ns4:CreationDate>2002-01-16T23:36:54Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2045</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-11-05T05:50:15Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1861627</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>13111</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteUseInformation>
```

```
 <ns6:SiteUseId>4208</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>11605</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4040</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCT_SITES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>4040</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2045</ns4:CreatedBy>
 <ns4:CreationDate>2002-01-16T23:36:54Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2045</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-10-13T23:13:27Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1831497</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>11605</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteInformation>
 <ns7:CustAcctSiteId>4040</ns7:CustAcctSiteId>
 <ns7:hzCustacctsite1 xsi:nil="true"/>
 <ns7:omsitename xsi:nil="true"/>
 <ns7:omsitenumber xsi:nil="true"/>
 <ns7:omsitedate xsi:nil="true"/>
 <ns7:__FLEX_Context xsi:nil="true"/>
 <ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns7:_FLEX_NumOfSegments>4</ns7:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteInformation>
 </ns2:CustomerAccountSite>
 <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/">
 <ns2:CustomerAccountSiteId>4572</ns2:CustomerAccountSiteId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:PartySiteId>6367</ns2:PartySiteId>
 <ns2:LastUpdateDate>2002-09-26T05:07:28Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2190</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-09-16T07:13:42Z</ns2:CreationDate>
 <ns2:CreatedBy>2190</ns2:CreatedBy>
 <ns2:LastUpdateLogin>1809291</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>4572</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToIndicator>P</ns2:BillToIndicator>
 <ns2:MarketIndicator xsi:nil="true"/>
 <ns2:ShipToIndicator>P</ns2:ShipToIndicator>
 <ns2:CustomerCategoryCode xsi:nil="true"/>
 <ns2:Language xsi:nil="true"/>
 <ns2:KeyAccountFlag>false</ns2:KeyAccountFlag>
 <ns2:TpHeaderId xsi:nil="true"/>
```

```
 <ns2:EceTpLocationCode xsi:nil="true"/>
 <ns2:TranslatedCustomerName xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>1017</ns2:SetId>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:SetCode>Vision Italy 1017</ns2:SetCode>
 <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContact/">
 <ns2:CustomerAccountRoleId>4913</ns2:CustomerAccountRoleId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:CustomerAccountSiteId>4572</ns2:CustomerAccountSiteId>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:RoleType>CONTACT</ns2:RoleType>
 <ns2:LastUpdateDate>2002-09-16T07:14:09Z</ns2:LastUpdateDate>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:LastUpdatedBy>2190</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-09-16T07:14:09Z</ns2:CreationDate>
 <ns2:CreatedBy>2190</ns2:CreatedBy>
 <ns2:LastUpdateLogin>1802233</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>4913</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:RelationshipId>6198</ns2:RelationshipId>
 <ns2:ContactPersonId>12401</ns2:ContactPersonId>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>13959</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4913</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCOUNT_ROLES</ns4:OwnerTableName>
 <ns4:OwnerTableId>4913</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2190</ns4:CreatedBy>
 <ns4:CreationDate>2002-09-16T07:14:09Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2190</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-09-16T07:14:09Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1802233</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>13959</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctContactInformation>
 <ns3:CustAccountRoleId>4913</ns3:CustAccountRoleId>
 <ns3:hzCustacctcont1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
 </ns2:CustAcctContactInformation>
 </ns2:CustomerAccountContact>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>5134</ns2:SiteUseId>
```

```
 <ns2:CustomerAccountSiteId>4572</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2002-11-05T04:30:52Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2190</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-09-16T07:13:42Z</ns2:CreationDate>
 <ns2:CreatedBy>2190</ns2:CreatedBy>
 <ns2:SiteUseCode>BILL_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>5134</ns2:Location>
 <ns2:LastUpdateLogin>1861605</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference>5134</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId>4</ns2:PaymentTermId>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId>1061</ns2:TerritoryId>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode>IVA20</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>1017</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>13100</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>5134</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>5134</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2190</ns4:CreatedBy>
 <ns4:CreationDate>2002-09-16T07:13:42Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2190</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-11-05T04:30:52Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1861605</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>13100</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>5134</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
```

```
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>6063</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>4572</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2003-02-13T12:11:27Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2190</ns2:LastUpdatedBy>
 <ns2:CreationDate>2003-02-13T12:11:27Z</ns2:CreationDate>
 <ns2:CreatedBy>2190</ns2:CreatedBy>
 <ns2:SiteUseCode>LEGAL</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>6063</ns2:Location>
 <ns2:LastUpdateLogin>1987022</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference>6063</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId xsi:nil="true"/>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId xsi:nil="true"/>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference>01988681225</ns2:TaxReference>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>TCA-FORM-WRAPPER</ns2:CreatedByModule>
 <ns2:SetId>1017</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>13451</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>6063</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>6063</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2190</ns4:CreatedBy>
 <ns4:CreationDate>2003-02-13T12:11:27Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2190</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2003-02-13T12:11:27Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1987022</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA-FORM-WRAPPER</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>13451</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
```

```
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>6063</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>5136</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>4572</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2002-11-05T04:30:35Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2190</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-09-16T07:13:51Z</ns2:CreationDate>
 <ns2:CreatedBy>2190</ns2:CreatedBy>
 <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>5136</ns2:Location>
 <ns2:LastUpdateLogin>1861605</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId>5134</ns2:BillToSiteUseId>
 <ns2:OrigSystemReference>5136</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId>4</ns2:PaymentTermId>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId>1061</ns2:TerritoryId>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode>IVA20</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>1017</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>13102</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>5136</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>5136</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2190</ns4:CreatedBy>
 <ns4:CreationDate>2002-09-16T07:13:51Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2190</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-11-05T04:30:35Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1861605</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>13102</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
```

```
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>5136</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>11341</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4572</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCT_SITES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>4572</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2190</ns4:CreatedBy>
 <ns4:CreationDate>2002-09-16T07:13:42Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2190</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-09-26T05:07:28Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1809291</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>11341</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteInformation>
 <ns7:CustAcctSiteId>4572</ns7:CustAcctSiteId>
 <ns7:hzCustacctsite1 xsi:nil="true"/>
 <ns7:omsitename xsi:nil="true"/>
 <ns7:omsitenumber xsi:nil="true"/>
 <ns7:omsitedate xsi:nil="true"/>
 <ns7:__FLEX_Context xsi:nil="true"/>
 <ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns7:_FLEX_NumOfSegments>4</ns7:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteInformation>
 </ns2:CustomerAccountSite>
 <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/">
 <ns2:CustomerAccountSiteId>1618</ns2:CustomerAccountSiteId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:PartySiteId>1618</ns2:PartySiteId>
 <ns2:LastUpdateDate>2002-10-13T23:55:47Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2189</ns2:LastUpdatedBy>
 <ns2:CreationDate>2000-01-19T17:24:45Z</ns2:CreationDate>
 <ns2:CreatedBy>2189</ns2:CreatedBy>
 <ns2:LastUpdateLogin>1831505</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>1618</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToIndicator>P</ns2:BillToIndicator>
```

```
 <ns2:MarketIndicator xsi:nil="true"/>
 <ns2:ShipToIndicator>P</ns2:ShipToIndicator>
 <ns2:CustomerCategoryCode xsi:nil="true"/>
 <ns2:Language xsi:nil="true"/>
 <ns2:KeyAccountFlag>false</ns2:KeyAccountFlag>
 <ns2:TpHeaderId xsi:nil="true"/>
 <ns2:EceTpLocationCode xsi:nil="true"/>
 <ns2:TranslatedCustomerName xsi:nil="true"/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:SetId>1018</ns2:SetId>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:SetCode>Vision Belgium 1018</ns2:SetCode>
 <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContact/">
 <ns2:CustomerAccountRoleId>4885</ns2:CustomerAccountRoleId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:CustomerAccountSiteId>1618</ns2:CustomerAccountSiteId>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:RoleType>CONTACT</ns2:RoleType>
 <ns2:LastUpdateDate>2002-09-09T01:32:03Z</ns2:LastUpdateDate>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:LastUpdatedBy>2189</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-09-09T01:32:03Z</ns2:CreationDate>
 <ns2:CreatedBy>2189</ns2:CreatedBy>
 <ns2:LastUpdateLogin>1797109</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>4885</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:RelationshipId>6184</ns2:RelationshipId>
 <ns2:ContactPersonId>12339</ns2:ContactPersonId>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>14732</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4885</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCOUNT_ROLES</ns4:OwnerTableName>
 <ns4:OwnerTableId>4885</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2189</ns4:CreatedBy>
 <ns4:CreationDate>2002-09-09T01:32:03Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2189</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-09-09T01:32:03Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1797109</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>14732</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctContactInformation>
 <ns3:CustAccountRoleId>4885</ns3:CustAccountRoleId>
 <ns3:hzCustacctcont1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
```

```
 <ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
 </ns2:CustAcctContactInformation>
 </ns2:CustomerAccountContact>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>1660</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>1618</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2002-11-05T04:26:30Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2189</ns2:LastUpdatedBy>
 <ns2:CreationDate>2000-01-19T17:26:41Z</ns2:CreationDate>
 <ns2:CreatedBy>2189</ns2:CreatedBy>
 <ns2:SiteUseCode>BILL_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Gent</ns2:Location>
 <ns2:LastUpdateLogin>1861602</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference xsi:nil="true"/>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId>4</ns2:PaymentTermId>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId>1067</ns2:TerritoryId>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference>BE123666981</ns2:TaxReference>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode>400SI21</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:SetId>1018</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>1660</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>1661</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>1618</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2002-11-05T04:26:04Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2189</ns2:LastUpdatedBy>
 <ns2:CreationDate>2000-01-19T17:27:26Z</ns2:CreationDate>
 <ns2:CreatedBy>2189</ns2:CreatedBy>
 <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Deinze</ns2:Location>
 <ns2:LastUpdateLogin>1861602</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId>1660</ns2:BillToSiteUseId>
 <ns2:OrigSystemReference xsi:nil="true"/>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId>4</ns2:PaymentTermId>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId>1067</ns2:TerritoryId>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference>BE321321408</ns2:TaxReference>
```

```
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode>400SI21</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:SetId>1018</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>1661</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>10801</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>1618</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCT_SITES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>1618</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2189</ns4:CreatedBy>
 <ns4:CreationDate>2000-01-19T17:24:45Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2189</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-10-13T23:55:47Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1831505</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>10801</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteInformation>
 <ns7:CustAcctSiteId>1618</ns7:CustAcctSiteId>
 <ns7:hzCustacctsite1 xsi:nil="true"/>
 <ns7:omsitename xsi:nil="true"/>
 <ns7:omsitenumber xsi:nil="true"/>
 <ns7:omsitedate xsi:nil="true"/>
 <ns7:__FLEX_Context xsi:nil="true"/>
 <ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns7:_FLEX_NumOfSegments>4</ns7:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteInformation>
 </ns2:CustomerAccountSite>
 <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/">
 <ns2:CustomerAccountSiteId>4000</ns2:CustomerAccountSiteId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:PartySiteId>4341</ns2:PartySiteId>
```

```
 <ns2:LastUpdateDate>2002-10-13T23:13:27Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2045</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-01-08T00:42:57Z</ns2:CreationDate>
 <ns2:CreatedBy>2045</ns2:CreatedBy>
 <ns2:LastUpdateLogin>1831497</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>4000</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToIndicator>Y</ns2:BillToIndicator>
 <ns2:MarketIndicator xsi:nil="true"/>
 <ns2:ShipToIndicator>Y</ns2:ShipToIndicator>
 <ns2:CustomerCategoryCode xsi:nil="true"/>
 <ns2:Language xsi:nil="true"/>
 <ns2:KeyAccountFlag>false</ns2:KeyAccountFlag>
 <ns2:TpHeaderId xsi:nil="true"/>
 <ns2:EceTpLocationCode xsi:nil="true"/>
 <ns2:TranslatedCustomerName xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>911</ns2:SetId>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:SetCode>Vision Germany 911</ns2:SetCode>
 <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountContact/">
 <ns2:CustomerAccountRoleId>4263</ns2:CustomerAccountRoleId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:CustomerAccountSiteId>4000</ns2:CustomerAccountSiteId>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:RoleType>CONTACT</ns2:RoleType>
 <ns2:LastUpdateDate>2002-01-08T00:45:17Z</ns2:LastUpdateDate>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:LastUpdatedBy>2045</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-01-08T00:45:17Z</ns2:CreationDate>
 <ns2:CreatedBy>2045</ns2:CreatedBy>
 <ns2:LastUpdateLogin>1237201</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>4263</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:RelationshipId>5470</ns2:RelationshipId>
 <ns2:ContactPersonId>7214</ns2:ContactPersonId>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>14151</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4263</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCOUNT_ROLES</ns4:OwnerTableName>
 <ns4:OwnerTableId>4263</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2045</ns4:CreatedBy>
 <ns4:CreationDate>2002-01-08T00:45:17Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2045</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-01-08T00:45:17Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1237201</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>14151</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
```

```
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctContactInformation>
 <ns3:CustAccountRoleId>4263</ns3:CustAccountRoleId>
 <ns3:hzCustacctcont1 xsi:nil="true"/>
 <ns3:__FLEX_Context xsi:nil="true"/>
 <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns3:_FLEX_NumOfSegments>1</ns3:_FLEX_NumOfSegments>
 </ns2:CustAcctContactInformation>
 </ns2:CustomerAccountContact>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>4146</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>4000</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2002-01-16T23:35:00Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2045</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-01-08T00:42:57Z</ns2:CreationDate>
 <ns2:CreatedBy>2045</ns2:CreatedBy>
 <ns2:SiteUseCode>BILL_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Flensburg</ns2:Location>
 <ns2:LastUpdateLogin>1251100</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference>4146</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId>4</ns2:PaymentTermId>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId>1167</ns2:TerritoryId>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference>DE45785503</ns2:TaxReference>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode>16%</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>911</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>13260</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4146</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>4146</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2045</ns4:CreatedBy>
 <ns4:CreationDate>2002-01-08T00:42:57Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2045</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-01-16T23:35:00Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1251100</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
```

```
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>13260</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>4146</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>4148</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>4000</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2002-01-16T23:35:00Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>2045</ns2:LastUpdatedBy>
 <ns2:CreationDate>2002-01-08T00:42:57Z</ns2:CreationDate>
 <ns2:CreatedBy>2045</ns2:CreatedBy>
 <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Flensburg</ns2:Location>
 <ns2:LastUpdateLogin>1251100</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId>4146</ns2:BillToSiteUseId>
 <ns2:OrigSystemReference>4148</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId>4</ns2:PaymentTermId>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId>1021</ns2:TerritoryId>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference>DE45785503</ns2:TaxReference>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode>16%</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>TCA_V1_API</ns2:CreatedByModule>
 <ns2:SetId>911</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>13261</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4148</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>4148</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2045</ns4:CreatedBy>
 <ns4:CreationDate>2002-01-08T00:42:57Z</ns4:CreationDate>
```

```
 <ns4:LastUpdatedBy>2045</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-01-16T23:35:00Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1251100</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>13261</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteUseInformation>
 <ns6:SiteUseId>4148</ns6:SiteUseId>
 <ns6:__FLEX_Context xsi:nil="true"/>
 <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteUseInformation>
 </ns2:CustomerAccountSiteUse>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>11613</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>4000</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCT_SITES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>4000</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>2045</ns4:CreatedBy>
 <ns4:CreationDate>2002-01-08T00:42:57Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>2045</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-10-13T23:13:27Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1831497</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA_V1_API</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>11613</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:CustAcctSiteInformation>
 <ns7:CustAcctSiteId>4000</ns7:CustAcctSiteId>
 <ns7:hzCustacctsite1 xsi:nil="true"/>
 <ns7:omsitename xsi:nil="true"/>
 <ns7:omsitenumber xsi:nil="true"/>
 <ns7:omsitedate xsi:nil="true"/>
 <ns7:__FLEX_Context xsi:nil="true"/>
 <ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns7:_FLEX_NumOfSegments>4</ns7:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteInformation>
 </ns2:CustomerAccountSite>
 <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/">
 <ns2:CustomerAccountSiteId>3566</ns2:CustomerAccountSiteId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
```

```
 <ns2:PartySiteId>3533</ns2:PartySiteId>
 <ns2:LastUpdateDate>2001-06-29T12:00:47Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>1000049</ns2:LastUpdatedBy>
 <ns2:CreationDate>2001-06-29T12:00:47Z</ns2:CreationDate>
 <ns2:CreatedBy>1000049</ns2:CreatedBy>
 <ns2:LastUpdateLogin>-1</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>3566</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToIndicator xsi:nil="true"/>
 <ns2:MarketIndicator xsi:nil="true"/>
 <ns2:ShipToIndicator>Y</ns2:ShipToIndicator>
 <ns2:CustomerCategoryCode xsi:nil="true"/>
 <ns2:Language xsi:nil="true"/>
 <ns2:KeyAccountFlag>false</ns2:KeyAccountFlag>
 <ns2:TpHeaderId xsi:nil="true"/>
 <ns2:EceTpLocationCode xsi:nil="true"/>
 <ns2:TranslatedCustomerName xsi:nil="true"/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:SetId>204</ns2:SetId>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:SetCode>Vision Operations 204</ns2:SetCode>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>3664</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>3566</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2001-06-29T12:00:47Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>1000049</ns2:LastUpdatedBy>
 <ns2:CreationDate>2001-06-29T12:00:47Z</ns2:CreationDate>
 <ns2:CreatedBy>1000049</ns2:CreatedBy>
 <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Cincinnati</ns2:Location>
 <ns2:LastUpdateLogin>-1</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId>1009</ns2:BillToSiteUseId>
 <ns2:OrigSystemReference>3664</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId>1000</ns2:PaymentTermId>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId>1005</ns2:TerritoryId>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode>Location</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:SetId>204</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>12882</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>3664</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
 <ns4:OwnerTableId>3664</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
```

```
<ns4:ReasonCode xsi:nil="true"/>
<ns4:OldOrigSystemReference xsi:nil="true"/>
<ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
<ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
<ns4:CreatedBy>1000049</ns4:CreatedBy>
<ns4:CreationDate>2001-06-29T12:00:47Z</ns4:CreationDate>
<ns4:LastUpdatedBy>1000049</ns4:LastUpdatedBy>
<ns4:LastUpdateDate>2001-06-29T12:00:47Z</ns4:LastUpdateDate>
<ns4:LastUpdateLogin>-1</ns4:LastUpdateLogin>
<ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
<ns4:CreatedByModule>TCA</ns4:CreatedByModule>
<ns4:PartyId>1002</ns4:PartyId>
<ns4:RequestId xsi:nil="true"/>
<ns4:SourceSystemRefInformation>
<ns8:OrigSystemRefId>12882</ns8:OrigSystemRefId>
<ns8:hzSrcsysref1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
</ns4:SourceSystemRefInformation>
</ns2:OriginalSystemReference>
<ns2:CustAcctSiteUseInformation>
<ns6:SiteUseId>3664</ns6:SiteUseId>
<ns6:__FLEX_Context xsi:nil="true"/>
<ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
</ns2:CustAcctSiteUseInformation>
</ns2:CustomerAccountSiteUse>
<ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
<ns4:OrigSystemReferenceId>10986</ns4:OrigSystemReferenceId>
<ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
<ns4:OrigSystemReference>3566</ns4:OrigSystemReference>
<ns4:OwnerTableName>HZ_CUST_ACCT_SITES_ALL</ns4:OwnerTableName>
<ns4:OwnerTableId>3566</ns4:OwnerTableId>
<ns4:Status>A</ns4:Status>
<ns4:ReasonCode xsi:nil="true"/>
<ns4:OldOrigSystemReference xsi:nil="true"/>
<ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
<ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
<ns4:CreatedBy>1000049</ns4:CreatedBy>
<ns4:CreationDate>2001-06-29T12:00:47Z</ns4:CreationDate>
<ns4:LastUpdatedBy>1000049</ns4:LastUpdatedBy>
<ns4:LastUpdateDate>2001-06-29T12:00:47Z</ns4:LastUpdateDate>
<ns4:LastUpdateLogin>-1</ns4:LastUpdateLogin>
<ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
<ns4:CreatedByModule>TCA</ns4:CreatedByModule>
<ns4:PartyId>1002</ns4:PartyId>
<ns4:RequestId xsi:nil="true"/>
<ns4:SourceSystemRefInformation>
<ns8:OrigSystemRefId>10986</ns8:OrigSystemRefId>
<ns8:hzSrcsysref1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
</ns4:SourceSystemRefInformation>
</ns2:OriginalSystemReference>
<ns2:CustAcctSiteInformation>
<ns7:CustAcctSiteId>3566</ns7:CustAcctSiteId>
<ns7:hzCustacctsite1 xsi:nil="true"/>
<ns7:omsitename xsi:nil="true"/>
<ns7:omsitenumber xsi:nil="true"/>
<ns7:omsitedate xsi:nil="true"/>
<ns7:__FLEX_Context xsi:nil="true"/>
<ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns7:_FLEX_NumOfSegments>4</ns7:_FLEX_NumOfSegments>
```

```
 </ns2:CustAcctSiteInformation>
 </ns2:CustomerAccountSite>
 <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/">
 <ns2:CustomerAccountSiteId>8205</ns2:CustomerAccountSiteId>
 <ns2:CustomerAccountId>1002</ns2:CustomerAccountId>
 <ns2:PartySiteId>21765</ns2:PartySiteId>
 <ns2:LastUpdateDate>2004-08-24T12:36:20Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>1000049</ns2:LastUpdatedBy>
 <ns2:CreationDate>2004-07-14T08:08:46Z</ns2:CreationDate>
 <ns2:CreatedBy>1068</ns2:CreatedBy>
 <ns2:LastUpdateLogin>-1</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>8205</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToIndicator xsi:nil="true"/>
 <ns2:MarketIndicator xsi:nil="true"/>
 <ns2:ShipToIndicator>Y</ns2:ShipToIndicator>
 <ns2:CustomerCategoryCode xsi:nil="true"/>
 <ns2:Language xsi:nil="true"/>
 <ns2:KeyAccountFlag>false</ns2:KeyAccountFlag>
 <ns2:TpHeaderId xsi:nil="true"/>
 <ns2:EceTpLocationCode xsi:nil="true"/>
 <ns2:TranslatedCustomerName xsi:nil="true"/>
 <ns2:CreatedByModule>TCA-FORM-WRAPPER</ns2:CreatedByModule>
 <ns2:SetId>204</ns2:SetId>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:SetCode>Vision Operations 204</ns2:SetCode>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>9963</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>8205</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2004-09-20T14:32:28Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>1000049</ns2:LastUpdatedBy>
 <ns2:CreationDate>2004-07-14T08:08:49Z</ns2:CreationDate>
 <ns2:CreatedBy>1068</ns2:CreatedBy>
 <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>Buffalo (OPS)</ns2:Location>
 <ns2:LastUpdateLogin>-1</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId>1009</ns2:BillToSiteUseId>
 <ns2:OrigSystemReference>9963</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId>1000</ns2:PaymentTermId>
 <ns2:GSAIndicator>N</ns2:GSAIndicator>
 <ns2:TerritoryId>1005</ns2:TerritoryId>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode>Location</ns2:TaxCode>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>TCA-FORM-WRAPPER</ns2:CreatedByModule>
 <ns2:SetId>204</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>1951-01-01</ns2:StartDate>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
```

```
<ns4:OrigSystemReferenceId>16008</ns4:OrigSystemReferenceId>
<ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
<ns4:OrigSystemReference>9963</ns4:OrigSystemReference>
<ns4:OwnerTableName>HZ_CUST_SITE_USES_ALL</ns4:OwnerTableName>
<ns4:OwnerTableId>9963</ns4:OwnerTableId>
<ns4:Status>A</ns4:Status>
<ns4:ReasonCode xsi:nil="true"/>
<ns4:OldOrigSystemReference xsi:nil="true"/>
<ns4:StartDateActive>2005-05-02</ns4:StartDateActive>
<ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
<ns4:CreatedBy>1068</ns4:CreatedBy>
<ns4:CreationDate>2004-07-14T08:08:49Z</ns4:CreationDate>
<ns4:LastUpdatedBy>1000049</ns4:LastUpdatedBy>
<ns4:LastUpdateDate>2004-09-20T14:32:28Z</ns4:LastUpdateDate>
<ns4:LastUpdateLogin>-1</ns4:LastUpdateLogin>
<ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
<ns4:CreatedByModule>TCA-FORM-WRAPPER</ns4:CreatedByModule>
<ns4:PartyId xsi:nil="true"/>
<ns4:RequestId xsi:nil="true"/>
<ns4:SourceSystemRefInformation>
<ns8:OrigSystemRefId>16008</ns8:OrigSystemRefId>
<ns8:hzSrcsysref1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
</ns4:SourceSystemRefInformation>
</ns2:OriginalSystemReference>
<ns2:CustAcctSiteUseInformation>
<ns6:SiteUseId>9963</ns6:SiteUseId>
<ns6:__FLEX_Context xsi:nil="true"/>
<ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
</ns2:CustAcctSiteUseInformation>
</ns2:CustomerAccountSiteUse>
<ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
<ns4:OrigSystemReferenceId>15793</ns4:OrigSystemReferenceId>
<ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
<ns4:OrigSystemReference>8205</ns4:OrigSystemReference>
<ns4:OwnerTableName>HZ_CUST_ACCT_SITES_ALL</ns4:OwnerTableName>
<ns4:OwnerTableId>8205</ns4:OwnerTableId>
<ns4:Status>A</ns4:Status>
<ns4:ReasonCode xsi:nil="true"/>
<ns4:OldOrigSystemReference xsi:nil="true"/>
<ns4:StartDateActive>2005-05-02</ns4:StartDateActive>
<ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
<ns4:CreatedBy>1068</ns4:CreatedBy>
<ns4:CreationDate>2004-07-14T08:08:46Z</ns4:CreationDate>
<ns4:LastUpdatedBy>1000049</ns4:LastUpdatedBy>
<ns4:LastUpdateDate>2004-08-24T12:36:20Z</ns4:LastUpdateDate>
<ns4:LastUpdateLogin>-1</ns4:LastUpdateLogin>
<ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
<ns4:CreatedByModule>TCA-FORM-WRAPPER</ns4:CreatedByModule>
<ns4:PartyId xsi:nil="true"/>
<ns4:RequestId xsi:nil="true"/>
<ns4:SourceSystemRefInformation>
<ns8:OrigSystemRefId>15793</ns8:OrigSystemRefId>
<ns8:hzSrcsysref1 xsi:nil="true"/>
<ns8:__FLEX_Context xsi:nil="true"/>
<ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
<ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
</ns4:SourceSystemRefInformation>
</ns2:OriginalSystemReference>
<ns2:CustAcctSiteInformation>
<ns7:CustAcctSiteId>8205</ns7:CustAcctSiteId>
<ns7:hzCustacctsite1 xsi:nil="true"/>
```

```
 <ns7:omsitename xsi:nil="true"/>
 <ns7:omsitenumber xsi:nil="true"/>
 <ns7:omsitedate xsi:nil="true"/>
 <ns7:__FLEX_Context xsi:nil="true"/>
 <ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns7:_FLEX_NumOfSegments>4</ns7:_FLEX_NumOfSegments>
 </ns2:CustAcctSiteInformation>
 </ns2:CustomerAccountSite>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>10252</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>UNKNOWN</ns4:OrigSystem>
 <ns4:OrigSystemReference>1002</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCOUNTS</ns4:OwnerTableName>
 <ns4:OwnerTableId>1002</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2004-02-23</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>1028</ns4:CreatedBy>
 <ns4:CreationDate>1997-02-23T12:42:45Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>1000148</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2002-01-23T13:55:25Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>1266212</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>TCA</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId xsi:nil="true"/>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>10252</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
 <ns2:OriginalSystemReference xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/">
 <ns4:OrigSystemReferenceId>100100008600852</ns4:OrigSystemReferenceId>
 <ns4:OrigSystem>EBIZ</ns4:OrigSystem>
 <ns4:OrigSystemReference>108683</ns4:OrigSystemReference>
 <ns4:OwnerTableName>HZ_CUST_ACCOUNTS</ns4:OwnerTableName>
 <ns4:OwnerTableId>1002</ns4:OwnerTableId>
 <ns4:Status>A</ns4:Status>
 <ns4:ReasonCode xsi:nil="true"/>
 <ns4:OldOrigSystemReference xsi:nil="true"/>
 <ns4:StartDateActive>2013-08-16</ns4:StartDateActive>
 <ns4:EndDateActive>4712-12-31</ns4:EndDateActive>
 <ns4:CreatedBy>BULK_IMPORT</ns4:CreatedBy>
 <ns4:CreationDate>2013-08-16T00:14:47.973622Z</ns4:CreationDate>
 <ns4:LastUpdatedBy>BULK_IMPORT</ns4:LastUpdatedBy>
 <ns4:LastUpdateDate>2013-08-16T00:14:47.973622Z</ns4:LastUpdateDate>
 <ns4:LastUpdateLogin>-1</ns4:LastUpdateLogin>
 <ns4:ObjectVersionNumber>1</ns4:ObjectVersionNumber>
 <ns4:CreatedByModule>HZ_IMPORT</ns4:CreatedByModule>
 <ns4:PartyId>1002</ns4:PartyId>
 <ns4:RequestId>99999</ns4:RequestId>
 <ns4:SourceSystemRefInformation>
 <ns8:OrigSystemRefId>100100008600852</ns8:OrigSystemRefId>
 <ns8:hzSrcsysref1 xsi:nil="true"/>
 <ns8:__FLEX_Context xsi:nil="true"/>
 <ns8:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns8:_FLEX_NumOfSegments>1</ns8:_FLEX_NumOfSegments>
 </ns4:SourceSystemRefInformation>
 </ns2:OriginalSystemReference>
```

```
 <ns2:CustAcctInformation>
 <ns9:CustAccountId>1002</ns9:CustAccountId>
 <ns9:hzCustacct1 xsi:nil="true"/>
 <ns9:omaccountname xsi:nil="true"/>
 <ns9:omaccountnumber xsi:nil="true"/>
 <ns9:omaccountopeningdate xsi:nil="true"/>
 <ns9:__FLEX_Context xsi:nil="true"/>
 <ns9:__FLEX_Context_DisplayValue xsi:nil="true"/>
 <ns9:_FLEX_NumOfSegments>4</ns9:_FLEX_NumOfSegments>
 </ns2:CustAcctInformation>
 </ns2:Value>
 </ns0:result>
 </ns0:findCustomerAccountResponse>
 </env:Body>
</env:Envelope>
```

Find a Customer Account Site by Set ID

In this use case, we'll find a customer account site with the set ID.

Operation: **findCustomerAccountSiteUse**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/applicationModule/types/"
 xmlns:typ1="http://xmlns.oracle.com/adf/svc/types/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:findCustomerAccount>
 <typ:findCriteria>
 <typ1:fetchStart>0</typ1:fetchStart>
 <typ1:fetchSize>-1</typ1:fetchSize>
 <typ1:findAttribute>CustomerAccountId</typ1:findAttribute>
 <typ1:findAttribute>CustomerAccountSite</typ1:findAttribute>
 <typ1:childFindCriteria>
 <typ1:fetchStart>0</typ1:fetchStart>
 <typ1:fetchSize>-1</typ1:fetchSize>
 <typ1:childAttrName>CustomerAccountSite</typ1:childAttrName>
 <typ1:childFindCriteria>
 <typ1:fetchStart>0</typ1:fetchStart>
 <typ1:fetchSize>-1</typ1:fetchSize>
 <typ1:childAttrName>CustomerAccountSite</typ1:childAttrName>
 <typ1:filter>
 <typ1:group>
 <typ1:item>
 <typ1:attribute>SetId</typ1:attribute>
 <typ1:operator>=</typ1:operator>
 <typ1:value>999999999999999</typ1:value>
 </typ1:item>
 </typ1:group>
 </typ1:filter>
 </typ1:childFindCriteria>
 </typ1:childFindCriteria>
 <typ1:childFindCriteria>
 <typ1:findAttribute>CustomerAccountSiteId</typ1:findAttribute>
 <typ1:childAttrName>CustomerAccountSite</typ1:childAttrName>
 </typ1:childFindCriteria>
 </typ:findCriteria>
 <typ:findControl>
 <typ1:retrieveAllTranslations>false</typ1:retrieveAllTranslations>
 </typ:findControl>
```

```
    </typ:findCustomerAccount>
    </soapenv:Body>
   </soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing">
   <env:Header>
      <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/
customerAccountService/applicationModule/CustomerAccountService/
findCustomerAccountResponse</wsa:Action>
      <wsa:MessageID>urn:uuid:b63f1a31-748f-4530-ba53-2cc27f0572d4</wsa:MessageID>
   </env:Header>
   <env:Body>
      <ns0:findCustomerAccountResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/
foundation/parties/customerAccountService/applicationModule/types/">
         <ns0:result xsi:type="ns2:CustomerAccountResult" xmlns:ns4="http://
xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:ns10="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/" xmlns:ns11="http://
xmlns.oracle.com/apps/flex/cdm/foundation/parties/custAccountGdf/" xmlns:ns2="http://
xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/" xmlns:tns="http://
xmlns.oracle.com/adf/svc/errors/" xmlns:ns1="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
            <ns2:Value>
               <ns2:CustomerAccountId>2924</ns2:CustomerAccountId>
            </ns2:Value>
            <ns2:Value>
               <ns2:CustomerAccountId>6395</ns2:CustomerAccountId>
               <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSite/" xmlns:ns8="http://xmlns.oracle.com/apps/flex/
cdm/foundation/parties/custAccountSiteGdf/">
                  <ns2:CustomerAccountSiteId>6720</ns2:CustomerAccountSiteId>
               </ns2:CustomerAccountSite>
            </ns2:Value>
            <ns2:Value>
               <ns2:CustomerAccountId>6666</ns2:CustomerAccountId>
               <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSite/" xmlns:ns8="http://xmlns.oracle.com/apps/flex/
cdm/foundation/parties/custAccountSiteGdf/">
                  <ns2:CustomerAccountSiteId>7088</ns2:CustomerAccountSiteId>
               </ns2:CustomerAccountSite>
            </ns2:Value>
            <ns2:Value>
               <ns2:CustomerAccountId>2560</ns2:CustomerAccountId>
               <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSite/" xmlns:ns8="http://xmlns.oracle.com/apps/flex/
cdm/foundation/parties/custAccountSiteGdf/">
                  <ns2:CustomerAccountSiteId>3030</ns2:CustomerAccountSiteId>
               </ns2:CustomerAccountSite>
            </ns2:Value>
            <ns2:Value>
               <ns2:CustomerAccountId>2561</ns2:CustomerAccountId>
               <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSite/" xmlns:ns8="http://xmlns.oracle.com/apps/flex/
cdm/foundation/parties/custAccountSiteGdf/">
                  <ns2:CustomerAccountSiteId>3031</ns2:CustomerAccountSiteId>
               </ns2:CustomerAccountSite>
            </ns2:Value>
            <ns2:Value>
```

```
                <ns2:CustomerAccountId>2562</ns2:CustomerAccountId>
                <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSite/" xmlns:ns8="http://xmlns.oracle.com/apps/flex/
cdm/foundation/parties/custAccountSiteGdf/">
                   <ns2:CustomerAccountSiteId>3032</ns2:CustomerAccountSiteId>
                </ns2:CustomerAccountSite>
                <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSite/" xmlns:ns8="http://xmlns.oracle.com/apps/flex/
cdm/foundation/parties/custAccountSiteGdf/">
                   <ns2:CustomerAccountSiteId>4187</ns2:CustomerAccountSiteId>
                </ns2:CustomerAccountSite>
                <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSite/" xmlns:ns8="http://xmlns.oracle.com/apps/flex/
cdm/foundation/parties/custAccountSiteGdf/">
                   <ns2:CustomerAccountSiteId>4377</ns2:CustomerAccountSiteId>
                </ns2:CustomerAccountSite>
             </ns2:Value>
.....
          </ns0:result>
       </ns0:findCustomerAccountResponse>
    </env:Body>
</env:Envelope>
```

Find Customer Account based on Context Sensitive Flex Fields

This use case explains how to find CustomerAccount based on context sensitive flex fields (DFF).

Operation: **findCustomerAccount**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
 xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/
applicationModule/types/" xmlns:typ1="http://xmlns.oracle.com/adf/svc/types/">
<soapenv:Header/>
<soapenv:Body>
<typ:findCustomerAccount>
<typ:findCriteria>
<typ1:fetchStart>0</typ1:fetchStart>
<typ1:fetchSize>-1</typ1:fetchSize>
<typ1:filter>
<typ1:conjunction>And</typ1:conjunction>
<typ1:group>
<typ1:conjunction>And</typ1:conjunction>
<typ1:upperCaseCompare>false</typ1:upperCaseCompare>
<typ1:item>
<typ1:conjunction>And</typ1:conjunction>
<typ1:attribute>CustAcctInformation</typ1:attribute>
<typ1:nested>
<typ1:group>
<typ1:conjunction>And</typ1:conjunction>
<typ1:upperCaseCompare>false</typ1:upperCaseCompare>
<typ1:item>
<typ1:attribute>__FLEX_Context</typ1:attribute>
<typ1:operator>=</typ1:operator>
<typ1:value>DCMS - PJ</typ1:value>
</typ1:item>
<typ1:item>
```

```
<typ1:conjunction>And</typ1:conjunction>
<typ1:upperCaseCompare>false</typ1:upperCaseCompare>
<typ1:attribute>DiaVencimento</typ1:attribute>
<typ1:operator>=</typ1:operator>
<typ1:value>5</typ1:value>
</typ1:item>
</typ1:group>
</typ1:nested>
</typ1:item>
</typ1:group>
</typ1:filter>
<typ1:findAttribute>AccountName</typ1:findAttribute>
<typ1:findAttribute>AccountNumber</typ1:findAttribute>
<typ1:findAttribute>CustAcctInformation</typ1:findAttribute>
<typ1:excludeAttribute>false</typ1:excludeAttribute>
</typ:findCriteria>
<typ:findControl>
<typ1:retrieveAllTranslations>false</typ1:retrieveAllTranslations>
</typ:findControl>
</typ:findCustomerAccount>
</soapenv:Body>
</soapenv:Envelope>
```

Get an Email Address of the Bill-To Contact

In this use case, we'll retrieve email address from Bill-To Contact using SOAP.

Steps to retrieve the email address of the Bill-To Contact:

1. Run the CustomerAccountService SOAP call
2. Use the ContactPersonId from the response and run a getPerson SOAP call

Step 1: Run the CustomerAccountService SOAP call

Operation: **findCustomerAccount**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
 xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/
applicationModule/types/" xmlns:typ1="http://xmlns.oracle.com/adf/svc/types/">
   <soapenv:Header/>
   <soapenv:Body>
      <typ:findCustomerAccount>
         <typ:findCriteria>
            <typ1:fetchStart>0</typ1:fetchStart>
            <typ1:fetchSize>1</typ1:fetchSize>
            <typ1:filter>
               <typ1:conjunction/>
               <typ1:group>
                  <typ1:conjunction/>
                  <typ1:upperCaseCompare>false</typ1:upperCaseCompare>
                  <typ1:item>
                     <typ1:conjunction/>
                     <typ1:upperCaseCompare>false</typ1:upperCaseCompare>
                     <typ1:attribute>CustomerAccountId</typ1:attribute>
                     <typ1:operator>=</typ1:operator>
```

```
                     <typ1:value>1006</typ1:value>
                  </typ1:item>
               </typ1:group>
               <typ1:nested/>
            </typ1:filter>
            <typ1:excludeAttribute>false</typ1:excludeAttribute>
         </typ:findCriteria>
         <typ:findControl>
            <typ1:retrieveAllTranslations>false</typ1:retrieveAllTranslations>
         </typ:findControl>
      </typ:findCustomerAccount>
   </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing">
   <env:Header>
      <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/
customerAccountService/applicationModule/CustomerAccountService/
findCustomerAccountResponse</wsa:Action>
      <wsa:MessageID>urn:uuid:bd093d4c-54cb-4be0-a418-101c9df07b79</wsa:MessageID>
   </env:Header>
   <env:Body>
      <ns0:findCustomerAccountResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/
foundation/parties/customerAccountService/applicationModule/types/">
         <ns0:result xsi:type="ns2:CustomerAccountResult" xmlns:ns4="http://
xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:ns9="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/" xmlns:ns2="http://
xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/" xmlns:tns="http://
xmlns.oracle.com/adf/svc/errors/" xmlns:ns1="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
            <ns2:Value>
               <ns2:CustomerAccountId>300000189682216</ns2:CustomerAccountId>
               <ns2:PartyId>300000189682193</ns2:PartyId>
               <ns2:LastUpdateDate>2023-02-07T20:19:11.508Z</ns2:LastUpdateDate>
               <ns2:AccountNumber>53008</ns2:AccountNumber>
               <ns2:LastUpdatedBy>sher</ns2:LastUpdatedBy>
               <ns2:CreationDate>2021-01-19T15:03:37.001Z</ns2:CreationDate>
               <ns2:CreatedBy>sher</ns2:CreatedBy>
               <ns2:LastUpdateLogin>F41CCB0A9BFEDD09E053B664500AC5D2</ns2:LastUpdateLogin>
               <ns2:RequestId xsi:nil="true"/>
               <ns2:OrigSystem xsi:nil="true"/>
               <ns2:OrigSystemReference>300000189682216</ns2:OrigSystemReference>
               <ns2:Status>A</ns2:Status>
               <ns2:CustomerType xsi:nil="true"/>
               <ns2:CustomerClassCode xsi:nil="true"/>
               <ns2:TaxCode xsi:nil="true"/>
               <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
               <ns2:TaxRoundingRule xsi:nil="true"/>
               <ns2:CoterminateDayMonth xsi:nil="true"/>
               <ns2:AccountEstablishedDate>2021-01-19</ns2:AccountEstablishedDate>
               <ns2:AccountTerminationDate>4712-12-31</ns2:AccountTerminationDate>
               <ns2:HeldBillExpirationDate xsi:nil="true"/>
               <ns2:HoldBillFlag>false</ns2:HoldBillFlag>
               <ns2:AccountName>ADO_Account_Sub2</ns2:AccountName>
               <ns2:DepositRefundMethod xsi:nil="true"/>
               <ns2:NpaNumber xsi:nil="true"/>
               <ns2:SourceCode xsi:nil="true"/>
```

```
                <ns2:Comments xsi:nil="true"/>
                <ns2:DateTypePreference xsi:nil="true"/>
                <ns2:ArrivalsetsIncludeLinesFlag xsi:nil="true"/>
                <ns2:StatusUpdateDate xsi:nil="true"/>
                <ns2:AutopayFlag xsi:nil="true"/>
                <ns2:LastBatchId xsi:nil="true"/>
                <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                <ns2:SellingPartyId xsi:nil="true"/>
                <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountContact/">
                   <ns2:CustomerAccountRoleId>300000226302357</ns2:CustomerAccountRoleId>
                   <ns2:CustomerAccountId>300000189682216</ns2:CustomerAccountId>
                   <ns2:CustomerAccountSiteId xsi:nil="true"/>
                   <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
                   <ns2:RoleType>CONTACT</ns2:RoleType>
                   <ns2:LastUpdateDate>2023-02-07T20:18:57.17Z</ns2:LastUpdateDate>
                   <ns2:SourceCode xsi:nil="true"/>
                   <ns2:LastUpdatedBy>sher</ns2:LastUpdatedBy>
                   <ns2:CreationDate>2023-02-07T20:17:22.182Z</ns2:CreationDate>
                   <ns2:CreatedBy>sher</ns2:CreatedBy>
                   <ns2:LastUpdateLogin>F41CCB0A9BFEDD09E053B664500AC5D2</
ns2:LastUpdateLogin>
                   <ns2:RequestId xsi:nil="true"/>
                   <ns2:OrigSystemReference>300000226302357</ns2:OrigSystemReference>
                   <ns2:Status>A</ns2:Status>
                   <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                   <ns2:RelationshipId>300000226302355</ns2:RelationshipId>
                   <ns2:ContactPersonId>300000226302353</ns2:ContactPersonId>
                   <ns2:CustAcctContactInformation>
                      <ns3:CustAccountRoleId>300000226302357</ns3:CustAccountRoleId>
                      <ns3:__FLEX_Context xsi:nil="true"/>
                      <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
                      <ns3:_FLEX_NumOfSegments>0</ns3:_FLEX_NumOfSegments>
                   </ns2:CustAcctContactInformation>
                </ns2:CustomerAccountContact>
                <ns2:CustomerAccountContact xmlns:ns3="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountContact/">
                   <ns2:CustomerAccountRoleId>300000189682584</ns2:CustomerAccountRoleId>
                   <ns2:CustomerAccountId>300000189682216</ns2:CustomerAccountId>
                   <ns2:CustomerAccountSiteId xsi:nil="true"/>
                   <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
                   <ns2:RoleType>CONTACT</ns2:RoleType>
                   <ns2:LastUpdateDate>2021-02-03T13:22:18.393Z</ns2:LastUpdateDate>
                   <ns2:SourceCode xsi:nil="true"/>
                   <ns2:LastUpdatedBy>sher</ns2:LastUpdatedBy>
                   <ns2:CreationDate>2021-02-03T13:20:49.437Z</ns2:CreationDate>
                   <ns2:CreatedBy>sher</ns2:CreatedBy>
                   <ns2:LastUpdateLogin>BA537D98D15AAC3EE053B764500AC9AD</
ns2:LastUpdateLogin>
                   <ns2:RequestId xsi:nil="true"/>
                   <ns2:OrigSystemReference>300000189682584</ns2:OrigSystemReference>
                   <ns2:Status>A</ns2:Status>
                   <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                   <ns2:RelationshipId>300000189682582</ns2:RelationshipId>
                   <ns2:ContactPersonId>300000189682580</ns2:ContactPersonId>
                   <ns2:CustomerAccountContactRole xmlns:ns0="http://xmlns.oracle.com/apps/
cdm/foundation/parties/flex/custAccountContactRole/">
                      <ns2:ResponsibilityId>300000189682586</ns2:ResponsibilityId>
                      <ns2:CustomerAccountRoleId>300000189682584</
ns2:CustomerAccountRoleId>
```

```
                     <ns2:ResponsibilityType>BILL_TO</ns2:ResponsibilityType>
                     <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
                     <ns2:CreatedBy>sher</ns2:CreatedBy>
                     <ns2:CreationDate>2021-02-03T13:21:40.373Z</ns2:CreationDate>
                     <ns2:LastUpdateDate>2021-02-03T13:22:18.395Z</ns2:LastUpdateDate>
                     <ns2:LastUpdatedBy>sher</ns2:LastUpdatedBy>
                     <ns2:LastUpdateLogin>BA537D98D15AAC3EE053B764500AC9AD</
ns2:LastUpdateLogin>
                     <ns2:RequestId xsi:nil="true"/>
                     <ns2:OrigSystemReference>300000189682586</ns2:OrigSystemReference>
                     <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                     <ns2:StatusCode>A</ns2:StatusCode>
                     <ns2:CustAcctContactRoleInformation>
                        <ns0:ResponsibilityId>300000189682586</ns0:ResponsibilityId>
                        <ns0:__FLEX_Context xsi:nil="true"/>
                        <ns0:__FLEX_Context_DisplayValue xsi:nil="true"/>
                        <ns0:_FLEX_NumOfSegments>0</ns0:_FLEX_NumOfSegments>
                     </ns2:CustAcctContactRoleInformation>
                  </ns2:CustomerAccountContactRole>
                  <ns2:CustAcctContactInformation>
                     <ns3:CustAccountRoleId>300000189682584</ns3:CustAccountRoleId>
                     <ns3:__FLEX_Context xsi:nil="true"/>
                     <ns3:__FLEX_Context_DisplayValue xsi:nil="true"/>
                     <ns3:_FLEX_NumOfSegments>0</ns3:_FLEX_NumOfSegments>
                  </ns2:CustAcctContactInformation>
               </ns2:CustomerAccountContact>
               <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSite/">
                  <ns2:CustomerAccountSiteId>300000189681433</ns2:CustomerAccountSiteId>
                  <ns2:CustomerAccountId>300000189682216</ns2:CustomerAccountId>
                  <ns2:PartySiteId>300000189681434</ns2:PartySiteId>
                  <ns2:LastUpdateDate>2022-07-20T18:13:49.502Z</ns2:LastUpdateDate>
                  <ns2:LastUpdatedBy>sher</ns2:LastUpdatedBy>
                  <ns2:CreationDate>2021-01-19T19:08:22.363Z</ns2:CreationDate>
                  <ns2:CreatedBy>sher</ns2:CreatedBy>
                  <ns2:LastUpdateLogin>E2CB4490C4D093F0E053B664500AB2AF</
ns2:LastUpdateLogin>
                  <ns2:RequestId xsi:nil="true"/>
                  <ns2:OrigSystemReference>300000189681433</ns2:OrigSystemReference>
                  <ns2:Status>A</ns2:Status>
                  <ns2:BillToIndicator>P</ns2:BillToIndicator>
                  <ns2:MarketIndicator>N</ns2:MarketIndicator>
                  <ns2:ShipToIndicator>P</ns2:ShipToIndicator>
                  <ns2:CustomerCategoryCode xsi:nil="true"/>
                  <ns2:Language xsi:nil="true"/>
                  <ns2:KeyAccountFlag xsi:nil="true"/>
                  <ns2:TpHeaderId xsi:nil="true"/>
                  <ns2:EceTpLocationCode xsi:nil="true"/>
                  <ns2:TranslatedCustomerName xsi:nil="true"/>
                  <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                  <ns2:SetId>300000189822171</ns2:SetId>
                  <ns2:StartDate>2021-01-19</ns2:StartDate>
                  <ns2:EndDate>4712-12-31</ns2:EndDate>
                  <ns2:SetCode>ADO_DEFAULT_SET</ns2:SetCode>
                  <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSiteUse/">
                     <ns2:SiteUseId>300000189681436</ns2:SiteUseId>
                     <ns2:CustomerAccountSiteId>300000189681433</
ns2:CustomerAccountSiteId>
                     <ns2:LastUpdateDate>2021-05-06T12:33:39.72Z</ns2:LastUpdateDate>
```

```
                        <ns2:LastUpdatedBy>sher</ns2:LastUpdatedBy>
                        <ns2:CreationDate>2021-01-19T19:09:55.712Z</ns2:CreationDate>
                        <ns2:CreatedBy>sher</ns2:CreatedBy>
                        <ns2:SiteUseCode>BILL_TO</ns2:SiteUseCode>
                        <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
                        <ns2:Status>A</ns2:Status>
                        <ns2:Location>18006</ns2:Location>
                        <ns2:LastUpdateLogin>C1A66D70FFE98FF8E053B764500A1280</
ns2:LastUpdateLogin>
                        <ns2:BillToSiteUseId xsi:nil="true"/>
                        <ns2:OrigSystemReference>300000189681436</ns2:OrigSystemReference>
                        <ns2:SICCode xsi:nil="true"/>
                        <ns2:PaymentTermId xsi:nil="true"/>
                        <ns2:GSAIndicator xsi:nil="true"/>
                        <ns2:TerritoryId xsi:nil="true"/>
                        <ns2:RequestId xsi:nil="true"/>
                        <ns2:TaxReference xsi:nil="true"/>
                        <ns2:SortPriority xsi:nil="true"/>
                        <ns2:TaxCode xsi:nil="true"/>
                        <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
                        <ns2:LastAccrueChargeDate xsi:nil="true"/>
                        <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
                        <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
                        <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
                        <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
                        <ns2:TaxRoundingRule xsi:nil="true"/>
                        <ns2:TaxClassification xsi:nil="true"/>
                        <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                        <ns2:SetId>300000189822171</ns2:SetId>
                        <ns2:EndDate>4712-12-31</ns2:EndDate>
                        <ns2:StartDate>2021-01-19</ns2:StartDate>
                        <ns2:CustAcctSiteUseInformation>
                           <ns6:SiteUseId>300000189681436</ns6:SiteUseId>
                           <ns6:__FLEX_Context xsi:nil="true"/>
                           <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
                           <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
                        </ns2:CustAcctSiteUseInformation>
                     </ns2:CustomerAccountSiteUse>
                     <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSiteUse/">
                        <ns2:SiteUseId>300000189681437</ns2:SiteUseId>
                        <ns2:CustomerAccountSiteId>300000189681433</
ns2:CustomerAccountSiteId>
                        <ns2:LastUpdateDate>2022-07-20T18:13:49.41Z</ns2:LastUpdateDate>
                        <ns2:LastUpdatedBy>sher</ns2:LastUpdatedBy>
                        <ns2:CreationDate>2021-01-19T19:10:15.476Z</ns2:CreationDate>
                        <ns2:CreatedBy>sher</ns2:CreatedBy>
                        <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
                        <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
                        <ns2:Status>A</ns2:Status>
                        <ns2:Location>18007</ns2:Location>
                        <ns2:LastUpdateLogin>E2CB4490C4D093F0E053B664500AB2AF</
ns2:LastUpdateLogin>
                        <ns2:BillToSiteUseId>300000195025516</ns2:BillToSiteUseId>
                        <ns2:OrigSystemReference>300000189681437</ns2:OrigSystemReference>
                        <ns2:SICCode xsi:nil="true"/>
                        <ns2:PaymentTermId xsi:nil="true"/>
                        <ns2:GSAIndicator xsi:nil="true"/>
                        <ns2:TerritoryId xsi:nil="true"/>
                        <ns2:RequestId xsi:nil="true"/>
```

```
                     <ns2:TaxReference xsi:nil="true"/>
                     <ns2:SortPriority xsi:nil="true"/>
                     <ns2:TaxCode xsi:nil="true"/>
                     <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
                     <ns2:LastAccrueChargeDate xsi:nil="true"/>
                     <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
                     <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
                     <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
                     <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
                     <ns2:TaxRoundingRule xsi:nil="true"/>
                     <ns2:TaxClassification xsi:nil="true"/>
                     <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                     <ns2:SetId>300000189822171</ns2:SetId>
                     <ns2:EndDate>4712-12-31</ns2:EndDate>
                     <ns2:StartDate>2021-01-19</ns2:StartDate>
                     <ns2:CustAcctSiteUseInformation>
                        <ns6:SiteUseId>300000189681437</ns6:SiteUseId>
                        <ns6:__FLEX_Context xsi:nil="true"/>
                        <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
                        <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
                     </ns2:CustAcctSiteUseInformation>
                  </ns2:CustomerAccountSiteUse>
                  <ns2:CustAcctSiteInformation>
                     <ns7:CustAcctSiteId>300000189681433</ns7:CustAcctSiteId>
                     <ns7:__FLEX_Context xsi:nil="true"/>
                     <ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
                     <ns7:_FLEX_NumOfSegments>0</ns7:_FLEX_NumOfSegments>
                  </ns2:CustAcctSiteInformation>
               </ns2:CustomerAccountSite>
               <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSite/">
                  <ns2:CustomerAccountSiteId>300000189682217</ns2:CustomerAccountSiteId>
                  <ns2:CustomerAccountId>300000189682216</ns2:CustomerAccountId>
                  <ns2:PartySiteId>300000189682218</ns2:PartySiteId>
                  <ns2:LastUpdateDate>2021-05-06T12:33:38.777Z</ns2:LastUpdateDate>
                  <ns2:LastUpdatedBy>sher</ns2:LastUpdatedBy>
                  <ns2:CreationDate>2021-01-19T15:03:37.039Z</ns2:CreationDate>
                  <ns2:CreatedBy>sher</ns2:CreatedBy>
                  <ns2:LastUpdateLogin>C1A66D70FFE98FF8E053B764500A1280</
ns2:LastUpdateLogin>
                  <ns2:RequestId xsi:nil="true"/>
                  <ns2:OrigSystemReference>300000189682217</ns2:OrigSystemReference>
                  <ns2:Status>A</ns2:Status>
                  <ns2:BillToIndicator>P</ns2:BillToIndicator>
                  <ns2:MarketIndicator>N</ns2:MarketIndicator>
                  <ns2:ShipToIndicator>P</ns2:ShipToIndicator>
                  <ns2:CustomerCategoryCode xsi:nil="true"/>
                  <ns2:Language xsi:nil="true"/>
                  <ns2:KeyAccountFlag xsi:nil="true"/>
                  <ns2:TpHeaderId xsi:nil="true"/>
                  <ns2:EceTpLocationCode xsi:nil="true"/>
                  <ns2:TranslatedCustomerName xsi:nil="true"/>
                  <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                  <ns2:SetId>300000189822171</ns2:SetId>
                  <ns2:StartDate>2021-01-19</ns2:StartDate>
                  <ns2:EndDate>2021-04-30</ns2:EndDate>
                  <ns2:SetCode>ADO_DEFAULT_SET</ns2:SetCode>
                  <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSiteUse/">
                     <ns2:SiteUseId>300000189681428</ns2:SiteUseId>
```

```
                        <ns2:CustomerAccountSiteId>300000189682217</
ns2:CustomerAccountSiteId>
                        <ns2:LastUpdateDate>2021-05-06T12:33:39.719Z</ns2:LastUpdateDate>
                        <ns2:LastUpdatedBy>sher</ns2:LastUpdatedBy>
                        <ns2:CreationDate>2021-01-19T19:04:43.52Z</ns2:CreationDate>
                        <ns2:CreatedBy>sher</ns2:CreatedBy>
                        <ns2:SiteUseCode>BILL_TO</ns2:SiteUseCode>
                        <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
                        <ns2:Status>A</ns2:Status>
                        <ns2:Location>18004</ns2:Location>
                        <ns2:LastUpdateLogin>C1A66D70FFE98FF8E053B764500A1280</
ns2:LastUpdateLogin>
                        <ns2:BillToSiteUseId xsi:nil="true"/>
                        <ns2:OrigSystemReference>300000189681428</ns2:OrigSystemReference>
                        <ns2:SICCode xsi:nil="true"/>
                        <ns2:PaymentTermId xsi:nil="true"/>
                        <ns2:GSAIndicator xsi:nil="true"/>
                        <ns2:TerritoryId xsi:nil="true"/>
                        <ns2:RequestId xsi:nil="true"/>
                        <ns2:TaxReference xsi:nil="true"/>
                        <ns2:SortPriority xsi:nil="true"/>
                        <ns2:TaxCode xsi:nil="true"/>
                        <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
                        <ns2:LastAccrueChargeDate xsi:nil="true"/>
                        <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
                        <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
                        <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
                        <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
                        <ns2:TaxRoundingRule xsi:nil="true"/>
                        <ns2:TaxClassification xsi:nil="true"/>
                        <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                        <ns2:SetId>300000189822171</ns2:SetId>
                        <ns2:EndDate>2021-04-30</ns2:EndDate>
                        <ns2:StartDate>2021-01-19</ns2:StartDate>
                        <ns2:CustAcctSiteUseInformation>
                           <ns6:SiteUseId>300000189681428</ns6:SiteUseId>
                           <ns6:__FLEX_Context xsi:nil="true"/>
                           <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
                           <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
                        </ns2:CustAcctSiteUseInformation>
                     </ns2:CustomerAccountSiteUse>
                     <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSiteUse/">
                        <ns2:SiteUseId>300000189681429</ns2:SiteUseId>
                        <ns2:CustomerAccountSiteId>300000189682217</
ns2:CustomerAccountSiteId>
                        <ns2:LastUpdateDate>2021-05-06T12:33:39.72Z</ns2:LastUpdateDate>
                        <ns2:LastUpdatedBy>sher</ns2:LastUpdatedBy>
                        <ns2:CreationDate>2021-01-19T19:05:05.431Z</ns2:CreationDate>
                        <ns2:CreatedBy>sher</ns2:CreatedBy>
                        <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
                        <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
                        <ns2:Status>A</ns2:Status>
                        <ns2:Location>18005</ns2:Location>
                        <ns2:LastUpdateLogin>C1A66D70FFE98FF8E053B764500A1280</
ns2:LastUpdateLogin>
                        <ns2:BillToSiteUseId xsi:nil="true"/>
                        <ns2:OrigSystemReference>300000189681429</ns2:OrigSystemReference>
                        <ns2:SICCode xsi:nil="true"/>
                        <ns2:PaymentTermId xsi:nil="true"/>
```

```
                     <ns2:GSAIndicator xsi:nil="true"/>
                     <ns2:TerritoryId xsi:nil="true"/>
                     <ns2:RequestId xsi:nil="true"/>
                     <ns2:TaxReference xsi:nil="true"/>
                     <ns2:SortPriority xsi:nil="true"/>
                     <ns2:TaxCode xsi:nil="true"/>
                     <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
                     <ns2:LastAccrueChargeDate xsi:nil="true"/>
                     <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
                     <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
                     <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
                     <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
                     <ns2:TaxRoundingRule xsi:nil="true"/>
                     <ns2:TaxClassification xsi:nil="true"/>
                     <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                     <ns2:SetId>300000189822171</ns2:SetId>
                     <ns2:EndDate>2021-04-30</ns2:EndDate>
                     <ns2:StartDate>2021-01-19</ns2:StartDate>
                     <ns2:CustAcctSiteUseInformation>
                        <ns6:SiteUseId>300000189681429</ns6:SiteUseId>
                        <ns6:__FLEX_Context xsi:nil="true"/>
                        <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
                        <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
                     </ns2:CustAcctSiteUseInformation>
                  </ns2:CustomerAccountSiteUse>
                  <ns2:CustAcctSiteInformation>
                     <ns7:CustAcctSiteId>300000189682217</ns7:CustAcctSiteId>
                     <ns7:__FLEX_Context xsi:nil="true"/>
                     <ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
                     <ns7:_FLEX_NumOfSegments>0</ns7:_FLEX_NumOfSegments>
                  </ns2:CustAcctSiteInformation>
               </ns2:CustomerAccountSite><ns2:CustomerAccountSite xmlns:ns7="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSite/">
                  <ns2:CustomerAccountSiteId>300000195025513</ns2:CustomerAccountSiteId>
                  <ns2:CustomerAccountId>300000189682216</ns2:CustomerAccountId>
                  <ns2:PartySiteId>300000195025514</ns2:PartySiteId>
                  <ns2:LastUpdateDate>2023-05-30T03:20:10.991Z</ns2:LastUpdateDate>
                  <ns2:LastUpdatedBy>sher</ns2:LastUpdatedBy>
                  <ns2:CreationDate>2021-05-06T12:41:59.398Z</ns2:CreationDate>
                  <ns2:CreatedBy>sher</ns2:CreatedBy>
                  <ns2:LastUpdateLogin>F8152381017C7437E053B764500A4C70</
ns2:LastUpdateLogin>
                  <ns2:RequestId xsi:nil="true"/>
                  <ns2:OrigSystemReference>300000195025513</ns2:OrigSystemReference>
                  <ns2:Status>A</ns2:Status>
                  <ns2:BillToIndicator>Y</ns2:BillToIndicator>
                  <ns2:MarketIndicator>N</ns2:MarketIndicator>
                  <ns2:ShipToIndicator>Y</ns2:ShipToIndicator>
                  <ns2:CustomerCategoryCode xsi:nil="true"/>
                  <ns2:Language xsi:nil="true"/>
                  <ns2:KeyAccountFlag xsi:nil="true"/>
                  <ns2:TpHeaderId xsi:nil="true"/>
                  <ns2:EceTpLocationCode xsi:nil="true"/>
                  <ns2:TranslatedCustomerName xsi:nil="true"/>
                  <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                  <ns2:SetId>300000189822171</ns2:SetId>
                  <ns2:StartDate>2021-05-06</ns2:StartDate>
                  <ns2:EndDate>4712-12-31</ns2:EndDate>
                  <ns2:SetCode>ADO_DEFAULT_SET</ns2:SetCode>
```

```
                  <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSiteUse/">
                     <ns2:SiteUseId>300000195025516</ns2:SiteUseId>
                     <ns2:CustomerAccountSiteId>300000195025513</
ns2:CustomerAccountSiteId>
                     <ns2:LastUpdateDate>2021-05-06T12:44:50.912Z</ns2:LastUpdateDate>
                     <ns2:LastUpdatedBy>sher</ns2:LastUpdatedBy>
                     <ns2:CreationDate>2021-05-06T12:43:06.158Z</ns2:CreationDate>
                     <ns2:CreatedBy>sher</ns2:CreatedBy>
                     <ns2:SiteUseCode>BILL_TO</ns2:SiteUseCode>
                     <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
                     <ns2:Status>A</ns2:Status>
                     <ns2:Location>28004</ns2:Location>
                     <ns2:LastUpdateLogin>C1A66D70FFE98FF8E053B764500A1280</
ns2:LastUpdateLogin>
                     <ns2:BillToSiteUseId xsi:nil="true"/>
                     <ns2:OrigSystemReference>300000195025516</ns2:OrigSystemReference>
                     <ns2:SICCode xsi:nil="true"/>
                     <ns2:PaymentTermId xsi:nil="true"/>
                     <ns2:GSAIndicator xsi:nil="true"/>
                     <ns2:TerritoryId xsi:nil="true"/>
                     <ns2:RequestId xsi:nil="true"/>
                     <ns2:TaxReference xsi:nil="true"/>
                     <ns2:SortPriority xsi:nil="true"/>
                     <ns2:TaxCode xsi:nil="true"/>
                     <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
                     <ns2:LastAccrueChargeDate xsi:nil="true"/>
                     <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
                     <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
                     <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
                     <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
                     <ns2:TaxRoundingRule xsi:nil="true"/>
                     <ns2:TaxClassification xsi:nil="true"/>
                     <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                     <ns2:SetId>300000189822171</ns2:SetId>
                     <ns2:EndDate>4712-12-31</ns2:EndDate>
                     <ns2:StartDate>2021-05-06</ns2:StartDate>
                     <ns2:CustAcctSiteUseInformation>
                        <ns6:SiteUseId>300000195025516</ns6:SiteUseId>
                        <ns6:__FLEX_Context xsi:nil="true"/>
                        <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
                        <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
                     </ns2:CustAcctSiteUseInformation>
                  </ns2:CustomerAccountSiteUse>
                  <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSiteUse/">
                     <ns2:SiteUseId>300000195025517</ns2:SiteUseId>
                     <ns2:CustomerAccountSiteId>300000195025513</
ns2:CustomerAccountSiteId>
                     <ns2:LastUpdateDate>2021-05-06T12:44:50.916Z</ns2:LastUpdateDate>
                     <ns2:LastUpdatedBy>sher</ns2:LastUpdatedBy>
                     <ns2:CreationDate>2021-05-06T12:43:41.349Z</ns2:CreationDate>
                     <ns2:CreatedBy>sher</ns2:CreatedBy>
                     <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
                     <ns2:PrimaryFlag>false</ns2:PrimaryFlag>
                     <ns2:Status>A</ns2:Status>
                     <ns2:Location>28005</ns2:Location>
                     <ns2:LastUpdateLogin>C1A66D70FFE98FF8E053B764500A1280</
ns2:LastUpdateLogin>
                     <ns2:BillToSiteUseId>300000195025516</ns2:BillToSiteUseId>
```

```
                        <ns2:OrigSystemReference>300000195025517</ns2:OrigSystemReference>
                        <ns2:SICCode xsi:nil="true"/>
                        <ns2:PaymentTermId xsi:nil="true"/>
                        <ns2:GSAIndicator xsi:nil="true"/>
                        <ns2:TerritoryId xsi:nil="true"/>
                        <ns2:RequestId xsi:nil="true"/>
                        <ns2:TaxReference xsi:nil="true"/>
                        <ns2:SortPriority xsi:nil="true"/>
                        <ns2:TaxCode xsi:nil="true"/>
                        <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
                        <ns2:LastAccrueChargeDate xsi:nil="true"/>
                        <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
                        <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
                        <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
                        <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
                        <ns2:TaxRoundingRule xsi:nil="true"/>
                        <ns2:TaxClassification xsi:nil="true"/>
                        <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                        <ns2:SetId>300000189822171</ns2:SetId>
                        <ns2:EndDate>4712-12-31</ns2:EndDate>
                        <ns2:StartDate>2021-05-06</ns2:StartDate>
                        <ns2:CustAcctSiteUseInformation>
                           <ns6:SiteUseId>300000195025517</ns6:SiteUseId>
                           <ns6:__FLEX_Context xsi:nil="true"/>
                           <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
                           <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
                        </ns2:CustAcctSiteUseInformation>
                     </ns2:CustomerAccountSiteUse>
                     <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSiteUse/">
                        <ns2:SiteUseId>300000226884066</ns2:SiteUseId>
                        <ns2:CustomerAccountSiteId>300000195025513</
ns2:CustomerAccountSiteId>
                        <ns2:LastUpdateDate>2023-05-30T03:18:33.837Z</ns2:LastUpdateDate>
                        <ns2:LastUpdatedBy>sher</ns2:LastUpdatedBy>
                        <ns2:CreationDate>2023-05-30T03:18:00.474Z</ns2:CreationDate>
                        <ns2:CreatedBy>sher</ns2:CreatedBy>
                        <ns2:SiteUseCode>SOLD_TO</ns2:SiteUseCode>
                        <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
                        <ns2:Status>A</ns2:Status>
                        <ns2:Location>CDRM_53001</ns2:Location>
                        <ns2:LastUpdateLogin>F8152381017C7437E053B764500A4C70</
ns2:LastUpdateLogin>
                        <ns2:BillToSiteUseId xsi:nil="true"/>
                        <ns2:OrigSystemReference>300000226884066</ns2:OrigSystemReference>
                        <ns2:SICCode xsi:nil="true"/>
                        <ns2:PaymentTermId xsi:nil="true"/>
                        <ns2:GSAIndicator xsi:nil="true"/>
                        <ns2:TerritoryId xsi:nil="true"/>
                        <ns2:RequestId xsi:nil="true"/>
                        <ns2:TaxReference xsi:nil="true"/>
                        <ns2:SortPriority xsi:nil="true"/>
                        <ns2:TaxCode xsi:nil="true"/>
                        <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
                        <ns2:LastAccrueChargeDate xsi:nil="true"/>
                        <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
                        <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
                        <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
                        <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
                        <ns2:TaxRoundingRule xsi:nil="true"/>
```

```
                     <ns2:TaxClassification xsi:nil="true"/>
                     <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
                     <ns2:SetId>300000189822171</ns2:SetId>
                     <ns2:EndDate>4712-12-31</ns2:EndDate>
                     <ns2:StartDate>2023-05-30</ns2:StartDate>
                     <ns2:CustAcctSiteUseInformation>
                        <ns6:SiteUseId>300000226884066</ns6:SiteUseId>
                        <ns6:__FLEX_Context xsi:nil="true"/>
                        <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
                        <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
                     </ns2:CustAcctSiteUseInformation>
                  </ns2:CustomerAccountSiteUse>
                  <ns2:CustAcctSiteInformation>
                     <ns7:CustAcctSiteId>300000195025513</ns7:CustAcctSiteId>
                     <ns7:__FLEX_Context xsi:nil="true"/>
                     <ns7:__FLEX_Context_DisplayValue xsi:nil="true"/>
                     <ns7:_FLEX_NumOfSegments>0</ns7:_FLEX_NumOfSegments>
                  </ns2:CustAcctSiteInformation>
               </ns2:CustomerAccountSite>
               <ns2:CustAcctInformation>
                  <ns9:CustAccountId>300000189682216</ns9:CustAccountId>
                  <ns9:aliasOrganizationName xsi:nil="true"/>
                  <ns9:hdFlex xsi:nil="true"/>
                  <ns9:__FLEX_Context xsi:nil="true"/>
                  <ns9:__FLEX_Context_DisplayValue xsi:nil="true"/>
                  <ns9:_FLEX_NumOfSegments>2</ns9:_FLEX_NumOfSegments>
               </ns2:CustAcctInformation>
            </ns2:Value>
         </ns0:result>
      </ns0:findCustomerAccountResponse>
   </env:Body>
</env:Envelope>
```

Step 2: Run a getPerson SOAP call

Use the ContactPersonId and run a getPerson SOAP call.

Operation: **getPerson**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
 xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/
applicationModule/types/">
  <soapenv:Header/>
  <soapenv:Body>
     <typ:getPerson>
        <typ:partyId>300000189682584</typ:partyId>
     </typ:getPerson>
  </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing">
   <env:Header>
      <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/
applicationModule/PersonService/getPersonResponse</wsa:Action>
      <wsa:MessageID>urn:uuid:348f58d4-b520-415f-9870-0f232aa3dc78</wsa:MessageID>
```

```
   </env:Header>
   <env:Body>
      <ns0:getPersonResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/
parties/personService/applicationModule/types/">
         <ns1:result xsi:type="ns2:Person" xmlns:ns0="http://xmlns.oracle.com/adf/svc/
types/" xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/"
 xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/"
 xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/personService/"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:ns1="http://xmlns.oracle.com/
apps/cdm/foundation/parties/personService/applicationModule/types/">
            <ns2:PartyId>300000226302353</ns2:PartyId>
            <ns2:PartyNumber>CDRM_895236</ns2:PartyNumber>
            <ns2:PartyName>Shipping Contact</ns2:PartyName>
            <ns2:PartyType>PERSON</ns2:PartyType>
            <ns2:ValidatedFlag xsi:nil="true"/>
            <ns2:LastUpdatedBy>sher</ns2:LastUpdatedBy>
            <ns2:LastUpdateLogin>F41CCB0A9BFEDD09E053B664500AC5D2</ns2:LastUpdateLogin>
            <ns2:CreationDate>2023-02-07T20:17:19Z</ns2:CreationDate>
            <ns2:RequestId xsi:nil="true"/>
            <ns2:LastUpdateDate>2023-02-07T20:18:58.786Z</ns2:LastUpdateDate>
            <ns2:CreatedBy>sher</ns2:CreatedBy>
            <ns2:OrigSystemReference>300000226302353</ns2:OrigSystemReference>
            <ns2:SICCode xsi:nil="true"/>
            <ns2:JgzzFiscalCode xsi:nil="true"/>
            <ns2:PersonFirstName>Shipping</ns2:PersonFirstName>
            <ns2:PersonPreNameAdjunct xsi:nil="true"/>
            <ns2:PersonLastName>Contact</ns2:PersonLastName>
            <ns2:PersonMiddleName xsi:nil="true"/>
            <ns2:PersonTitle xsi:nil="true"/>
            <ns2:PersonNameSuffix xsi:nil="true"/>
            <ns2:PersonPreviousLastName xsi:nil="true"/>
            <ns2:PersonAcademicTitle xsi:nil="true"/>
            <ns2:Country xsi:nil="true"/>
            <ns2:Address2 xsi:nil="true"/>
            <ns2:Address1 xsi:nil="true"/>
            <ns2:Address4 xsi:nil="true"/>
            <ns2:Address3 xsi:nil="true"/>
            <ns2:PostalCode xsi:nil="true"/>
            <ns2:City xsi:nil="true"/>
            <ns2:Province xsi:nil="true"/>
            <ns2:State xsi:nil="true"/>
            <ns2:County xsi:nil="true"/>
            <ns2:Status>A</ns2:Status>
            <ns2:URL xsi:nil="true"/>
            <ns2:SICCodeType xsi:nil="true"/>
            <ns2:EmailAddress>shipping.contact@ado.com</ns2:EmailAddress>
            <ns2:GSAIndicatorFlag xsi:nil="true"/>
            <ns2:LanguageName xsi:nil="true"/>
            <ns2:MissionStatement xsi:nil="true"/>
            <ns2:CategoryCode xsi:nil="true"/>
            <ns2:ThirdPartyFlag xsi:nil="true"/>
            <ns2:Salutation xsi:nil="true"/>
            <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
            <ns2:CertReasonCode xsi:nil="true"/>
            <ns2:CertificationLevel xsi:nil="true"/>
            <ns2:PrimaryPhonePurpose xsi:nil="true"/>
            <ns2:PrimaryPhoneContactPTId xsi:nil="true"/>
            <ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
            <ns2:PrimaryPhoneLineType xsi:nil="true"/>
```

```
            <ns2:PrimaryPhoneNumber xsi:nil="true"/>
            <ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
            <ns2:PreferredContactMethod xsi:nil="true"/>
            <ns2:PrimaryPhoneExtension xsi:nil="true"/>
            <ns2:IdenAddrLocationId xsi:nil="true"/>
            <ns2:PrimaryEmailContactPTId>300000226302359</ns2:PrimaryEmailContactPTId>
            <ns2:IdenAddrPartySiteId xsi:nil="true"/>
            <ns2:PersonLastNamePrefix xsi:nil="true"/>
            <ns2:PrimaryURLContactPTId xsi:nil="true"/>
            <ns2:PreferredName xsi:nil="true"/>
            <ns2:PersonSecondLastName xsi:nil="true"/>
            <ns2:PreferredNameId xsi:nil="true"/>
            <ns2:PreferredContactPersonId xsi:nil="true"/>
            <ns2:InternalFlag>false</ns2:InternalFlag>
            <ns2:PreferredFunctionalCurrency xsi:nil="true"/>
            <ns2:Gender xsi:nil="true"/>
            <ns2:MaritalStatus xsi:nil="true"/>
            <ns2:Comments xsi:nil="true"/>
            <ns2:DateOfBirth xsi:nil="true"/>
            <ns2:UserGUID xsi:nil="true"/>
            <ns2:PartyUniqueName>Shipping Contact</ns2:PartyUniqueName>
            <ns2:SourceSystem xsi:nil="true"/>
            <ns2:SourceSystemReferenceValue xsi:nil="true"/>
            <ns2:SourceSystemUpdateDate xsi:nil="true"/>
            <ns2:Email xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/contactPoint/">
               <ns5:ContactPointId>300000226302359</ns5:ContactPointId>
               <ns5:ContactPointType>EMAIL</ns5:ContactPointType>
               <ns5:Status>A</ns5:Status>
               <ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
               <ns5:OwnerTableId>300000226302353</ns5:OwnerTableId>
               <ns5:PrimaryFlag>true</ns5:PrimaryFlag>
               <ns5:OrigSystemReference>300000226302359</ns5:OrigSystemReference>
               <ns5:LastUpdateDate>2023-02-07T20:18:58.301Z</ns5:LastUpdateDate>
               <ns5:LastUpdatedBy>sher</ns5:LastUpdatedBy>
               <ns5:CreationDate>2023-02-07T20:18:24.16Z</ns5:CreationDate>
               <ns5:CreatedBy>sher</ns5:CreatedBy>
               <ns5:LastUpdateLogin>F41CCB0A9BFEDD09E053B664500AC5D2</ns5:LastUpdateLogin>
               <ns5:RequestId xsi:nil="true"/>
               <ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
               <ns5:CreatedByModule>TCA_FORM_WRAPPER</ns5:CreatedByModule>
               <ns5:ContactPointPurpose>BUSINESS</ns5:ContactPointPurpose>
               <ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
               <ns5:StartDate>2023-02-07</ns5:StartDate>
               <ns5:EndDate>4712-12-31</ns5:EndDate>
               <ns5:RelationshipId>300000226302355</ns5:RelationshipId>
               <ns5:PartyUsageCode xsi:nil="true"/>
               <ns5:OrigSystem xsi:nil="true"/>
               <ns5:EmailFormat>MAILTEXT</ns5:EmailFormat>
               <ns5:EmailAddress>shipping.contact@ado.com</ns5:EmailAddress>
               <ns5:PartyName>Shipping Contact</ns5:PartyName>
               <ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
               <ns5:EmailInformation>
                  <ns6:ContactPointId>300000226302359</ns6:ContactPointId>
                  <ns6:ContactPointType>EMAIL</ns6:ContactPointType>
                  <ns6:__FLEX_Context xsi:nil="true"/>
                  <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
                  <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
               </ns5:EmailInformation>
            </ns2:Email>
```

```
            <ns2:PersonProfile xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/
parties/flex/person/">
               <ns2:PersonProfileId>300000226302353</ns2:PersonProfileId>
               <ns2:PartyId>300000226302353</ns2:PartyId>
               <ns2:PersonName>Shipping Contact</ns2:PersonName>
               <ns2:LastUpdateDate>2023-02-07T20:18:58.812Z</ns2:LastUpdateDate>
               <ns2:LastUpdatedBy>sher</ns2:LastUpdatedBy>
               <ns2:CreationDate>2023-02-07T20:17:19.957Z</ns2:CreationDate>
               <ns2:CreatedBy>sher</ns2:CreatedBy>
               <ns2:LastUpdateLogin>F41CCB0A9BFEDD09E053B664500AC5D2</ns2:LastUpdateLogin>
               <ns2:RequestId xsi:nil="true"/>
               <ns2:PersonPreNameAdjunct xsi:nil="true"/>
               <ns2:PersonFirstName>Shipping</ns2:PersonFirstName>
               <ns2:PersonMiddleName xsi:nil="true"/>
               <ns2:PersonLastName>Contact</ns2:PersonLastName>
               <ns2:PersonNameSuffix xsi:nil="true"/>
               <ns2:PersonTitle xsi:nil="true"/>
               <ns2:PersonAcademicTitle xsi:nil="true"/>
               <ns2:PersonPreviousLastName xsi:nil="true"/>
               <ns2:PersonInitials xsi:nil="true"/>
               <ns2:JgzzFiscalCode xsi:nil="true"/>
               <ns2:DateOfBirth xsi:nil="true"/>
               <ns2:PlaceOfBirth xsi:nil="true"/>
               <ns2:DateOfDeath xsi:nil="true"/>
               <ns2:Gender xsi:nil="true"/>
               <ns2:DeclaredEthnicity xsi:nil="true"/>
               <ns2:MaritalStatus xsi:nil="true"/>
               <ns2:MaritalStatusEffectiveDate xsi:nil="true"/>
               <ns2:PersonalIncomeAmount xsi:nil="true"/>
               <ns2:RentOwnInd xsi:nil="true"/>
               <ns2:LastKnownGPS xsi:nil="true"/>
               <ns2:EffectiveStartDate>2023-02-07</ns2:EffectiveStartDate>
               <ns2:EffectiveEndDate>4712-12-31</ns2:EffectiveEndDate>
               <ns2:InternalFlag>false</ns2:InternalFlag>
               <ns2:Status>A</ns2:Status>
               <ns2:CreatedByModule>TCA_FORM_WRAPPER</ns2:CreatedByModule>
               <ns2:DeceasedFlag>false</ns2:DeceasedFlag>
               <ns2:Comments xsi:nil="true"/>
               <ns2:PersonLastNamePrefix xsi:nil="true"/>
               <ns2:PersonSecondLastName xsi:nil="true"/>
               <ns2:PreferredFunctionalCurrency xsi:nil="true"/>
               <ns2:OrigSystem xsi:nil="true"/>
               <ns2:OrigSystemReference>300000226302353</ns2:OrigSystemReference>
               <ns2:EffectiveSequence>1</ns2:EffectiveSequence>
               <ns2:HeadOfHouseholdFlag xsi:nil="true"/>
               <ns2:HouseholdIncomeAmount xsi:nil="true"/>
               <ns2:HouseholdSize xsi:nil="true"/>
               <ns2:EffectiveLatestChange>Y</ns2:EffectiveLatestChange>
               <ns2:SuffixOverriddenFlag>false</ns2:SuffixOverriddenFlag>
               <ns2:UniqueNameSuffix xsi:nil="true"/>
               <ns2:CorpCurrencyCode>USD</ns2:CorpCurrencyCode>
               <ns2:CurcyConvRateType>Corporate</ns2:CurcyConvRateType>
               <ns2:CurrencyCode>USD</ns2:CurrencyCode>
               <ns2:PartyNumber>CDRM_895236</ns2:PartyNumber>
               <ns2:Salutation xsi:nil="true"/>
               <ns2:CertReasonCode xsi:nil="true"/>
               <ns2:CertificationLevel xsi:nil="true"/>
               <ns2:PreferredContactMethod xsi:nil="true"/>
               <ns2:PreferredContactPersonId xsi:nil="true"/>
               <ns2:PrimaryAddressLine1 xsi:nil="true"/>
```

```
                <ns2:PrimaryAddressLine2 xsi:nil="true"/>
                <ns2:PrimaryAddressLine3 xsi:nil="true"/>
                <ns2:PrimaryAddressLine4 xsi:nil="true"/>
                <ns2:Alias xsi:nil="true"/>
                <ns2:PrimaryAddressCity xsi:nil="true"/>
                <ns2:PrimaryAddressCountry xsi:nil="true"/>
                <ns2:PrimaryAddressCounty xsi:nil="true"/>
                <ns2:PrimaryEmailAddress>shipping.contact@ado.com</ns2:PrimaryEmailAddress>
                <ns2:PrimaryFormattedAddress xsi:nil="true"/>
                <ns2:PrimaryFormattedPhoneNumber xsi:nil="true"/>
                <ns2:PrimaryLanguage xsi:nil="true"/>
                <ns2:PartyUniqueName>Shipping Contact</ns2:PartyUniqueName>
                <ns2:PrimaryAddressPostalCode xsi:nil="true"/>
                <ns2:PreferredContactEmail xsi:nil="true"/>
                <ns2:PreferredContactName xsi:nil="true"/>
                <ns2:PreferredContactPhone xsi:nil="true"/>
                <ns2:PreferredContactURL xsi:nil="true"/>
                <ns2:PreferredName xsi:nil="true"/>
                <ns2:PreferredNameId xsi:nil="true"/>
                <ns2:PrimaryEmailId>300000226302359</ns2:PrimaryEmailId>
                <ns2:PrimaryPhoneAreaCode xsi:nil="true"/>
                <ns2:PrimaryPhoneId xsi:nil="true"/>
                <ns2:PrimaryPhoneCountryCode xsi:nil="true"/>
                <ns2:PrimaryPhoneExtension xsi:nil="true"/>
                <ns2:PrimaryPhoneLineType xsi:nil="true"/>
                <ns2:PrimaryPhoneNumber xsi:nil="true"/>
                <ns2:PrimaryPhonePurpose xsi:nil="true"/>
                <ns2:PrimaryWebId xsi:nil="true"/>
                <ns2:Pronunciation xsi:nil="true"/>
                <ns2:PrimaryAddressProvince xsi:nil="true"/>
                <ns2:PrimaryAddressState xsi:nil="true"/>
                <ns2:PrimaryURL xsi:nil="true"/>
                <ns2:ValidatedFlag xsi:nil="true"/>
                <ns2:PrimaryAddressLatitude xsi:nil="true"/>
                <ns2:PrimaryAddressLongitude xsi:nil="true"/>
                <ns2:PrimaryAddressLocationId/>
                <ns2:FavoriteContactFlag>false</ns2:FavoriteContactFlag>
                <ns2:Distance xsi:nil="true"/>
                <ns2:SalesAffinityCode xsi:nil="true"/>
                <ns2:SalesBuyingRoleCode xsi:nil="true"/>
                <ns2:DepartmentCode xsi:nil="true"/>
                <ns2:Department xsi:nil="true"/>
                <ns2:JobTitleCode xsi:nil="true"/>
                <ns2:JobTitle xsi:nil="true"/>
                <ns2:DoNotCallFlag>false</ns2:DoNotCallFlag>
                <ns2:DoNotContactFlag>false</ns2:DoNotContactFlag>
                <ns2:DoNotEmailFlag>false</ns2:DoNotEmailFlag>
                <ns2:DoNotMailFlag>false</ns2:DoNotMailFlag>
                <ns2:LastContactDate xsi:nil="true"/>
                <ns2:PrimaryCustomerId>300000189682193</ns2:PrimaryCustomerId>
                <ns2:PrimaryCustomerRelationshipId>300000226302355</
ns2:PrimaryCustomerRelationshipId>
                <ns2:PrimaryCustomerName>ADO_Cust_Sub</ns2:PrimaryCustomerName>
                <ns2:LastSourceUpdateDate>2023-02-07T20:18:58Z</ns2:LastSourceUpdateDate>
                <ns2:LastUpdateSourceSystem>FUSION</ns2:LastUpdateSourceSystem>
                <ns2:DataCloudStatus xsi:nil="true"/>
                <ns2:LastEnrichmentDate xsi:nil="true"/>
                <ns2:PersonInformation>
                   <ns1:PersonProfileId>300000226302353</ns1:PersonProfileId>
                   <ns1:__FLEX_Context xsi:nil="true"/>
```

```
            <ns1:__FLEX_Context_DisplayValue xsi:nil="true"/>
            <ns1:_FLEX_NumOfSegments>0</ns1:_FLEX_NumOfSegments>
         </ns2:PersonInformation>
         <ns2:UITContact_c xsi:nil="true"/>
         <ns2:LongText_c xsi:nil="true"/>
         <ns2:Number_c xsi:nil="true"/>
         <ns2:Organization_Id_Account_Contacts xsi:nil="true"/>
         <ns2:ContactCheckbox_c>false</ns2:ContactCheckbox_c>
         <ns2:Custom_field_for_title_c xsi:nil="true"/>
         <ns2:Number2_c xsi:nil="true"/>
         <ns2:AspireTo_c>BLANK</ns2:AspireTo_c>
         <ns2:WorkPlaceNearestStation_Id_c xsi:nil="true"/>
         <ns2:WorkPlaceNearestStation_c xsi:nil="true"/>
         <ns2:CustomCurrency_c xsi:nil="true"/>
         <ns2:customStatus_c>A</ns2:customStatus_c>
      </ns2:PersonProfile>
      <ns2:PartyUsageAssignment>
         <ns3:PartyUsgAssignmentId>300000226302364</ns3:PartyUsgAssignmentId>
         <ns3:PartyId>300000226302353</ns3:PartyId>
         <ns3:PartyUsageCode>CONTACT</ns3:PartyUsageCode>
         <ns3:EffectiveStartDate>2023-02-07</ns3:EffectiveStartDate>
         <ns3:EffectiveEndDate>4712-12-31</ns3:EffectiveEndDate>
         <ns3:StatusFlag>true</ns3:StatusFlag>
         <ns3:Comments xsi:nil="true"/>
         <ns3:OwnerTableName xsi:nil="true"/>
         <ns3:OwnerTableId xsi:nil="true"/>
         <ns3:CreatedByModule>TCA_FORM_WRAPPER</ns3:CreatedByModule>
         <ns3:ObjectVersionNumber>1</ns3:ObjectVersionNumber>
         <ns3:CreatedBy>sher</ns3:CreatedBy>
         <ns3:CreationDate>2023-02-07T20:18:58.435Z</ns3:CreationDate>
         <ns3:LastUpdateLogin>F41CCB0A9BFEDD09E053B664500AC5D2</ns3:LastUpdateLogin>
         <ns3:LastUpdateDate>2023-02-07T20:18:58.688Z</ns3:LastUpdateDate>
         <ns3:LastUpdatedBy>sher</ns3:LastUpdatedBy>
         <ns3:RequestId xsi:nil="true"/>
      </ns2:PartyUsageAssignment>
      <ns2:PartyUsageAssignment>
         <ns3:PartyUsgAssignmentId>300000226302360</ns3:PartyUsgAssignmentId>
         <ns3:PartyId>300000226302353</ns3:PartyId>
         <ns3:PartyUsageCode>CUSTOMER_CONTACT</ns3:PartyUsageCode>
         <ns3:EffectiveStartDate>2023-02-07</ns3:EffectiveStartDate>
         <ns3:EffectiveEndDate>4712-12-31</ns3:EffectiveEndDate>
         <ns3:StatusFlag>true</ns3:StatusFlag>
         <ns3:Comments xsi:nil="true"/>
         <ns3:OwnerTableName>HZ_RELATIONSHIPS</ns3:OwnerTableName>
         <ns3:OwnerTableId>300000226302355</ns3:OwnerTableId>
         <ns3:CreatedByModule>TCA_FORM_WRAPPER</ns3:CreatedByModule>
         <ns3:ObjectVersionNumber>1</ns3:ObjectVersionNumber>
         <ns3:CreatedBy>sher</ns3:CreatedBy>
         <ns3:CreationDate>2023-02-07T20:18:55.846Z</ns3:CreationDate>
         <ns3:LastUpdateLogin>F41CCB0A9BFEDD09E053B664500AC5D2</ns3:LastUpdateLogin>
         <ns3:LastUpdateDate>2023-02-07T20:18:58.441Z</ns3:LastUpdateDate>
         <ns3:LastUpdatedBy>sher</ns3:LastUpdatedBy>
         <ns3:RequestId xsi:nil="true"/>
      </ns2:PartyUsageAssignment><ns2:PartyUsageAssignment>
         <ns3:PartyUsgAssignmentId>300000226302361</ns3:PartyUsgAssignmentId>
         <ns3:PartyId>300000226302353</ns3:PartyId>
         <ns3:PartyUsageCode>ORG_CONTACT</ns3:PartyUsageCode>
         <ns3:EffectiveStartDate>2023-02-07</ns3:EffectiveStartDate>
         <ns3:EffectiveEndDate>4712-12-31</ns3:EffectiveEndDate>
         <ns3:StatusFlag>true</ns3:StatusFlag>
```

```
                <ns3:Comments xsi:nil="true"/>
                <ns3:OwnerTableName>HZ_RELATIONSHIPS</ns3:OwnerTableName>
                <ns3:OwnerTableId>300000226302355</ns3:OwnerTableId>
                <ns3:CreatedByModule>TCA_FORM_WRAPPER</ns3:CreatedByModule>
                <ns3:ObjectVersionNumber>1</ns3:ObjectVersionNumber>
                <ns3:CreatedBy>sher</ns3:CreatedBy>
                <ns3:CreationDate>2023-02-07T20:18:58.121Z</ns3:CreationDate>
                <ns3:LastUpdateLogin>F41CCB0A9BFEDD09E053B664500AC5D2</ns3:LastUpdateLogin>
                <ns3:LastUpdateDate>2023-02-07T20:18:58.442Z</ns3:LastUpdateDate>
                <ns3:LastUpdatedBy>sher</ns3:LastUpdatedBy>
                <ns3:RequestId xsi:nil="true"/>
            </ns2:PartyUsageAssignment>
            <ns2:Relationship xmlns:ns10="http://xmlns.oracle.com/apps/cdm/foundation/
parties/flex/relationship/">
                <ns8:RelationshipRecId>300000226302354</ns8:RelationshipRecId>
                <ns8:RelationshipId>300000226302355</ns8:RelationshipId>
                <ns8:SubjectId>300000226302353</ns8:SubjectId>
                <ns8:SubjectType>PERSON</ns8:SubjectType>
                <ns8:SubjectTableName>HZ_PARTIES</ns8:SubjectTableName>
                <ns8:ObjectId>300000189682193</ns8:ObjectId>
                <ns8:ObjectType>ORGANIZATION</ns8:ObjectType>
                <ns8:ObjectTableName>HZ_PARTIES</ns8:ObjectTableName>
                <ns8:RelationshipCode>CONTACT_OF</ns8:RelationshipCode>
                <ns8:RelationshipType>CONTACT</ns8:RelationshipType>
                <ns8:Role>CONTACTORG</ns8:Role>
                <ns8:Comments xsi:nil="true"/>
                <ns8:StartDate>2023-02-07</ns8:StartDate>
                <ns8:EndDate>4712-12-31</ns8:EndDate>
                <ns8:Status>A</ns8:Status>
                <ns8:CreatedBy>sher</ns8:CreatedBy>
                <ns8:CreationDate>2023-02-07T20:17:22.127Z</ns8:CreationDate>
                <ns8:LastUpdatedBy>sher</ns8:LastUpdatedBy>
                <ns8:LastUpdateDate>2023-02-07T20:18:58.201Z</ns8:LastUpdateDate>
                <ns8:LastUpdateLogin>F41CCB0A9BFEDD09E053B664500AC5D2</ns8:LastUpdateLogin>
                <ns8:RequestId xsi:nil="true"/>
                <ns8:ObjectVersionNumber>1</ns8:ObjectVersionNumber>
                <ns8:CreatedByModule>TCA_FORM_WRAPPER</ns8:CreatedByModule>
                <ns8:AdditionalInformation1 xsi:nil="true"/>
                <ns8:AdditionalInformation2 xsi:nil="true"/>
                <ns8:AdditionalInformation3 xsi:nil="true"/>
                <ns8:AdditionalInformation4 xsi:nil="true"/>
                <ns8:AdditionalInformation5 xsi:nil="true"/>
                <ns8:AdditionalInformation6 xsi:nil="true"/>
                <ns8:AdditionalInformation7 xsi:nil="true"/>
                <ns8:AdditionalInformation8 xsi:nil="true"/>
                <ns8:AdditionalInformation9 xsi:nil="true"/>
                <ns8:AdditionalInformation10 xsi:nil="true"/>
                <ns8:AdditionalInformation11 xsi:nil="true"/>
                <ns8:AdditionalInformation12 xsi:nil="true"/>
                <ns8:AdditionalInformation13 xsi:nil="true"/>
                <ns8:AdditionalInformation14 xsi:nil="true"/>
                <ns8:AdditionalInformation15 xsi:nil="true"/>
                <ns8:AdditionalInformation16 xsi:nil="true"/>
                <ns8:AdditionalInformation17 xsi:nil="true"/>
                <ns8:AdditionalInformation18 xsi:nil="true"/>
                <ns8:AdditionalInformation19 xsi:nil="true"/>
                <ns8:AdditionalInformation20 xsi:nil="true"/>
                <ns8:AdditionalInformation21 xsi:nil="true"/>
                <ns8:AdditionalInformation22 xsi:nil="true"/>
                <ns8:AdditionalInformation23 xsi:nil="true"/>
```

```
                <ns8:AdditionalInformation24 xsi:nil="true"/>
                <ns8:AdditionalInformation25 xsi:nil="true"/>
                <ns8:AdditionalInformation26 xsi:nil="true"/>
                <ns8:AdditionalInformation27 xsi:nil="true"/>
                <ns8:AdditionalInformation28 xsi:nil="true"/>
                <ns8:AdditionalInformation29 xsi:nil="true"/>
                <ns8:AdditionalInformation30 xsi:nil="true"/>
                <ns8:DirectionCode>P</ns8:DirectionCode>
                <ns8:PercentageOwnership xsi:nil="true"/>
                <ns8:ObjectUsageCode xsi:nil="true"/>
                <ns8:SubjectUsageCode xsi:nil="true"/>
                <ns8:PreferredContactFlag>false</ns8:PreferredContactFlag>
                <ns8:ObjectPartyName>ADO_Cust_Sub</ns8:ObjectPartyName>
                <ns8:PartyName>ADO_Cust_Sub</ns8:PartyName>
                <ns8:CurrencyCode>USD</ns8:CurrencyCode>
                <ns8:CurcyConvRateType>Corporate</ns8:CurcyConvRateType>
                <ns8:CorpCurrencyCode>USD</ns8:CorpCurrencyCode>
                <ns8:PrimaryCustomerFlag>true</ns8:PrimaryCustomerFlag>
                <ns8:SubjectEmailAddress>shipping.contact@ado.com</ns8:SubjectEmailAddress>
                <ns8:ObjectEmailAddress xsi:nil="true"/>
                <ns8:OrganizationContact xmlns:ns9="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/orgContact/">
                    <ns8:OrgContactId>300000226302356</ns8:OrgContactId>
                    <ns8:PartyRelationshipId>300000226302355</ns8:PartyRelationshipId>
                    <ns8:ContactPartyId>300000226302353</ns8:ContactPartyId>
                    <ns8:PersonFirstName>Shipping</ns8:PersonFirstName>
                    <ns8:PersonLastName>Contact</ns8:PersonLastName>
                    <ns8:ContactName>Shipping Contact</ns8:ContactName>
                    <ns8:PersonPreNameAdjunct xsi:nil="true"/>
                    <ns8:PersonMiddleName xsi:nil="true"/>
                    <ns8:PersonNameSuffix xsi:nil="true"/>
                    <ns8:PersonPreviousLastName xsi:nil="true"/>
                    <ns8:PersonAcademicTitle xsi:nil="true"/>
                    <ns8:Salutation xsi:nil="true"/>
                    <ns8:PersonLastNamePrefix xsi:nil="true"/>
                    <ns8:PreferredName xsi:nil="true"/>
                    <ns8:PersonSecondLastName xsi:nil="true"/>
                    <ns8:PersonLanguageName xsi:nil="true"/>
                    <ns8:PersonTitle xsi:nil="true"/>
                    <ns8:PersonCertificationLevel xsi:nil="true"/>
                    <ns8:PersonCertReasonCode xsi:nil="true"/>
                    <ns8:CustomerPartyId>300000189682193</ns8:CustomerPartyId>
                    <ns8:CustomerUniqueName>ADO_Cust_Sub</ns8:CustomerUniqueName>
                    <ns8:CustomerName>ADO_Cust_Sub</ns8:CustomerName>
                    <ns8:CustomerPartyNumber>424148</ns8:CustomerPartyNumber>
                    <ns8:FormattedPhoneNumber xsi:nil="true"/>
                    <ns8:EmailAddress>shipping.contact@ado.com</ns8:EmailAddress>
                    <ns8:WebUrl/>
                    <ns8:Comments xsi:nil="true"/>
                    <ns8:ContactNumber>CDRM_606411</ns8:ContactNumber>
                    <ns8:DepartmentCode xsi:nil="true"/>
                    <ns8:Department xsi:nil="true"/>
                    <ns8:JobTitle xsi:nil="true"/>
                    <ns8:DecisionMakerFlag>false</ns8:DecisionMakerFlag>
                    <ns8:JobTitleCode xsi:nil="true"/>
                    <ns8:ReferenceUseFlag>false</ns8:ReferenceUseFlag>
                    <ns8:Rank xsi:nil="true"/>
                    <ns8:LastUpdateDate>2023-02-07T20:18:55.825Z</ns8:LastUpdateDate>
                    <ns8:LastUpdatedBy>sher</ns8:LastUpdatedBy>
                    <ns8:CreationDate>2023-02-07T20:17:22.158Z</ns8:CreationDate>
```

```
                  <ns8:CreatedBy>sher</ns8:CreatedBy>
                  <ns8:LastUpdateLogin>F41CCB0A9BFEDD09E053B664500AC5D2</
ns8:LastUpdateLogin>
                  <ns8:RequestId xsi:nil="true"/>
                  <ns8:PartySiteId xsi:nil="true"/>
                  <ns8:OrigSystemReference>300000226302356</ns8:OrigSystemReference>
                  <ns8:CreatedByModule>TCA_FORM_WRAPPER</ns8:CreatedByModule>
                  <ns8:ObjectVersionNumber>1</ns8:ObjectVersionNumber>
                  <ns8:PartySiteName xsi:nil="true"/>
                  <ns8:SalesAffinityCode xsi:nil="true"/>
                  <ns8:SalesAffinityComments xsi:nil="true"/>
                  <ns8:SalesBuyingRoleCode xsi:nil="true"/>
                  <ns8:SalesInfluenceLevelCode xsi:nil="true"/>
                  <ns8:FormattedAddress xsi:nil="true"/>
                  <ns8:PreferredContactMethod xsi:nil="true"/>
                  <ns8:CurrencyCode>USD</ns8:CurrencyCode>
                  <ns8:CurcyConvRateType>Corporate</ns8:CurcyConvRateType>
                  <ns8:CorpCurrencyCode>USD</ns8:CorpCurrencyCode>
                  <ns8:PreferredContactFlag>false</ns8:PreferredContactFlag>
                  <ns8:ContactFormattedAddress xsi:nil="true"/>
                  <ns8:ContactFormattedMultilineAddress xsi:nil="true"/>
                  <ns8:CustomerEmailAddress xsi:nil="true"/>
                  <ns8:PrimaryCustomerFlag>true</ns8:PrimaryCustomerFlag>
                  <ns8:OrgContactInformation>
                     <ns9:OrgContactId>300000226302356</ns9:OrgContactId>
                     <ns9:__FLEX_Context xsi:nil="true"/>
                     <ns9:__FLEX_Context_DisplayValue xsi:nil="true"/>
                     <ns9:_FLEX_NumOfSegments>0</ns9:_FLEX_NumOfSegments>
                  </ns8:OrgContactInformation>
                  <ns8:CustomCheckbox_c>false</ns8:CustomCheckbox_c>
               </ns8:OrganizationContact>
               <ns8:RelationshipInformation>
                  <ns10:RelationshipRecId>300000226302354</ns10:RelationshipRecId>
                  <ns10:__FLEX_Context xsi:nil="true"/>
                  <ns10:__FLEX_Context_DisplayValue xsi:nil="true"/>
                  <ns10:_FLEX_NumOfSegments>0</ns10:_FLEX_NumOfSegments>
               </ns8:RelationshipInformation>
               <ns8:Email xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/contactPoint/">
                  <ns5:ContactPointId>300000226302359</ns5:ContactPointId>
                  <ns5:ContactPointType>EMAIL</ns5:ContactPointType>
                  <ns5:Status>A</ns5:Status>
                  <ns5:OwnerTableName>HZ_PARTIES</ns5:OwnerTableName>
                  <ns5:OwnerTableId>300000226302353</ns5:OwnerTableId>
                  <ns5:PrimaryFlag>true</ns5:PrimaryFlag>
                  <ns5:OrigSystemReference>300000226302359</ns5:OrigSystemReference>
                  <ns5:LastUpdateDate>2023-02-07T20:18:58.301Z</ns5:LastUpdateDate>
                  <ns5:LastUpdatedBy>sher</ns5:LastUpdatedBy>
                  <ns5:CreationDate>2023-02-07T20:18:24.16Z</ns5:CreationDate>
                  <ns5:CreatedBy>sher</ns5:CreatedBy>
                  <ns5:LastUpdateLogin>F41CCB0A9BFEDD09E053B664500AC5D2</
ns5:LastUpdateLogin>
                  <ns5:RequestId xsi:nil="true"/>
                  <ns5:ObjectVersionNumber>1</ns5:ObjectVersionNumber>
                  <ns5:CreatedByModule>TCA_FORM_WRAPPER</ns5:CreatedByModule>
                  <ns5:ContactPointPurpose>BUSINESS</ns5:ContactPointPurpose>
                  <ns5:PrimaryByPurpose>N</ns5:PrimaryByPurpose>
                  <ns5:StartDate>2023-02-07</ns5:StartDate>
                  <ns5:EndDate>4712-12-31</ns5:EndDate>
                  <ns5:RelationshipId>300000226302355</ns5:RelationshipId>
```

```
                  <ns5:PartyUsageCode xsi:nil="true"/>
                  <ns5:OrigSystem xsi:nil="true"/>
                  <ns5:EmailFormat>MAILTEXT</ns5:EmailFormat>
                  <ns5:EmailAddress>shipping.contact@ado.com</ns5:EmailAddress>
                  <ns5:PartyName>Shipping Contact</ns5:PartyName>
                  <ns5:OverallPrimaryFlag>true</ns5:OverallPrimaryFlag>
                  <ns5:EmailInformation>
                     <ns6:ContactPointId>300000226302359</ns6:ContactPointId>
                     <ns6:ContactPointType>EMAIL</ns6:ContactPointType>
                     <ns6:__FLEX_Context xsi:nil="true"/>
                     <ns6:__FLEX_Context_DisplayValue xsi:nil="true"/>
                     <ns6:_FLEX_NumOfSegments>0</ns6:_FLEX_NumOfSegments>
                  </ns5:EmailInformation>
               </ns8:Email>
               <ns8:SubjectPartyUsageAssignment>
                  <ns3:PartyUsgAssignmentId>300000226302360</ns3:PartyUsgAssignmentId>
                  <ns3:PartyId>300000226302353</ns3:PartyId>
                  <ns3:PartyUsageCode>CUSTOMER_CONTACT</ns3:PartyUsageCode>
                  <ns3:EffectiveStartDate>2023-02-07</ns3:EffectiveStartDate>
                  <ns3:EffectiveEndDate>4712-12-31</ns3:EffectiveEndDate>
                  <ns3:StatusFlag>true</ns3:StatusFlag>
                  <ns3:Comments xsi:nil="true"/>
                  <ns3:OwnerTableName>HZ_RELATIONSHIPS</ns3:OwnerTableName>
                  <ns3:OwnerTableId>300000226302355</ns3:OwnerTableId>
                  <ns3:CreatedByModule>TCA_FORM_WRAPPER</ns3:CreatedByModule>
                  <ns3:ObjectVersionNumber>1</ns3:ObjectVersionNumber>
                  <ns3:CreatedBy>sher</ns3:CreatedBy>
                  <ns3:CreationDate>2023-02-07T20:18:55.846Z</ns3:CreationDate>
                  <ns3:LastUpdateLogin>F41CCB0A9BFEDD09E053B664500AC5D2</
ns3:LastUpdateLogin>
                  <ns3:LastUpdateDate>2023-02-07T20:18:58.441Z</ns3:LastUpdateDate>
                  <ns3:LastUpdatedBy>sher</ns3:LastUpdatedBy>
                  <ns3:RequestId xsi:nil="true"/>
               </ns8:SubjectPartyUsageAssignment>
               <ns8:SubjectPartyUsageAssignment>
                  <ns3:PartyUsgAssignmentId>300000226302361</ns3:PartyUsgAssignmentId>
                  <ns3:PartyId>300000226302353</ns3:PartyId>
                  <ns3:PartyUsageCode>ORG_CONTACT</ns3:PartyUsageCode>
                  <ns3:EffectiveStartDate>2023-02-07</ns3:EffectiveStartDate>
                  <ns3:EffectiveEndDate>4712-12-31</ns3:EffectiveEndDate>
                  <ns3:StatusFlag>true</ns3:StatusFlag>
                  <ns3:Comments xsi:nil="true"/>
                  <ns3:OwnerTableName>HZ_RELATIONSHIPS</ns3:OwnerTableName>
                  <ns3:OwnerTableId>300000226302355</ns3:OwnerTableId>
                  <ns3:CreatedByModule>TCA_FORM_WRAPPER</ns3:CreatedByModule>
                  <ns3:ObjectVersionNumber>1</ns3:ObjectVersionNumber>
                  <ns3:CreatedBy>sher</ns3:CreatedBy>
                  <ns3:CreationDate>2023-02-07T20:18:58.121Z</ns3:CreationDate>
                  <ns3:LastUpdateLogin>F41CCB0A9BFEDD09E053B664500AC5D2</
ns3:LastUpdateLogin>
                  <ns3:LastUpdateDate>2023-02-07T20:18:58.442Z</ns3:LastUpdateDate>
                  <ns3:LastUpdatedBy>sher</ns3:LastUpdatedBy>
                  <ns3:RequestId xsi:nil="true"/>
               </ns8:SubjectPartyUsageAssignment>
            </ns2:Relationship>
         </ns1:result>
      </ns0:getPersonResponse>
   </env:Body>
</env:Envelope>
```

This will retrieve the email address when there is a single contact for a customer.

Set a Contact as the Primary Contact

In this use case, we'll set a contact as a primary contact.

Operation: **mergeCustomerAccount**

Request Body

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
<soap:Body>
 <ns1:mergeOrganization xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/types/">
 <ns1:organizationParty xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/">
 <ns2:PartyId>1003</ns2:PartyId>
 <ns2:PartySite xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/">
 <ns3:LocationId>970</ns3:LocationId>
 <ns3:CreatedByModule>HZ_WS</ns3:CreatedByModule>
 <ns3:PartySiteUse>
 <ns3:SiteUseType>BILL_TO</ns3:SiteUseType>
 <ns3:CreatedByModule>HZ_WS</ns3:CreatedByModule>
 </ns3:PartySiteUse>
 </ns2:PartySite>
 </ns1:organizationParty>
 </ns1:mergeOrganization>
</soap:Body>
</soap:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/
applicationModule/types/">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule//
OrganizationService/mergeOrganizationResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:dd0b4255-aee8-4b3a-88f3-f79d0ba1c87e</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:mergeOrganizationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
organizationService/applicationModule/types/">
 <ns3:result xsi:type="ns2:OrganizationPartyResult" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/organizationService/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/"
 xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/organizationService/applicationModule/
types/" xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/
svc/types/" xmlns:ns5="http://xmlns.oracle.com/apps/cdm/foundation/parties/contactPointService/"
 xmlns:ns8="http://xmlns.oracle.com/apps/cdm/foundation/parties/relationshipService/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance">
 <ns2:Value>
 <ns2:PartyNumber>1003</ns2:PartyNumber>
 <ns2:PartyId>1003</ns2:PartyId>
 <ns2:PartyType>ORGANIZATION</ns2:PartyType>
 <ns2:PartyName>OrgTest01282013mnb</ns2:PartyName>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:ValidatedFlag xsi:nil="true"/>
 <ns2:LastUpdateLogin>C980E4EBAC122F15E053D711F10A7C94</ns2:LastUpdateLogin>
 <ns2:CreationDate>1997-02-23T12:47:25.0Z</ns2:CreationDate>
 <ns2:RequestId>4350529</ns2:RequestId>
 <ns2:LastUpdateDate>2021-08-19T07:31:34.29Z</ns2:LastUpdateDate>
 <ns2:CreatedBy>1028</ns2:CreatedBy>
```

```
 <ns2:OrigSystemReference>1003</ns2:OrigSystemReference>
 <ns2:HQBranchIndicator>HQ</ns2:HQBranchIndicator>
 <ns2:DUNSNumberC>006991681</ns2:DUNSNumberC>
 <ns2:SICCode>4215</ns2:SICCode>
 <ns2:JgzzFiscalCode>01-83937602</ns2:JgzzFiscalCode>
 <ns2:Address1>93 Peachtree Parkway</ns2:Address1>
 <ns2:Country>US</ns2:Country>
 <ns2:Address3 xsi:nil="true"/>
 <ns2:GroupType xsi:nil="true"/>
 <ns2:Address2 xsi:nil="true"/>
 <ns2:Address4 xsi:nil="true"/>
 <ns2:Status>A</ns2:Status>
 <ns2:City>Atlanta</ns2:City>
 <ns2:PostalCode>30328</ns2:PostalCode>
 <ns2:County>Fulton</ns2:County>
 <ns2:YearEstablished>1969</ns2:YearEstablished>
 <ns2:Province xsi:nil="true"/>
 <ns2:State>GA</ns2:State>
 <ns2:URL xsi:nil="true"/>
 <ns2:AnalysisFy>1996</ns2:AnalysisFy>
 <ns2:SICCodeType>1987 SIC</ns2:SICCodeType>
 <ns2:EmailAddress xsi:nil="true"/>
 <ns2:FiscalYearendMonth>12</ns2:FiscalYearendMonth>
 <ns2:EmployeesTotal>25000</ns2:EmployeesTotal>
 <ns2:CurrentFiscalYearPotentialRevenueAmount currencyCode="USD">800000000</
ns2:CurrentFiscalYearPotentialRevenueAmount>
 <ns2:NextFyPotentialRevenueAmount xsi:nil="true"/>
 <ns2:GSAIndicatorFlag>false</ns2:GSAIndicatorFlag>
 <ns2:CategoryCode>DISTRIBUTION</ns2:CategoryCode>
 <ns2:LanguageName xsi:nil="true"/>
 <ns2:MissionStatement xsi:nil="true"/>
 <ns2:ThirdPartyFlag>false</ns2:ThirdPartyFlag>
 <ns2:HomeCountry xsi:nil="true"/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:ObjectVersionNumber>11</ns2:ObjectVersionNumber>
 <ns2:CertificationLevel xsi:nil="true"/>
 <ns2:CertReasonCode xsi:nil="true"/>
 <ns2:PrimaryPhonePurpose xsi:nil="true"/>
 <ns2:PrimaryPhoneContactPointId>3105</ns2:PrimaryPhoneContactPointId>
 <ns2:PrimaryPhoneLineType>GEN</ns2:PrimaryPhoneLineType>
 <ns2:PrimaryPhoneCountryCode>1</ns2:PrimaryPhoneCountryCode>
 <ns2:PrimaryPhoneAreaCode>703</ns2:PrimaryPhoneAreaCode>
 <ns2:PrimaryPhoneNumber>8441212</ns2:PrimaryPhoneNumber>
 <ns2:PreferredContactMethod xsi:nil="true"/>
 <ns2:PrimaryPhoneExtension xsi:nil="true"/>
 <ns2:IdenAddrLocationId>944</ns2:IdenAddrLocationId>
 <ns2:PrimaryURLContactPointId xsi:nil="true"/>
 <ns2:PrimaryEmailContactPointId xsi:nil="true"/>
 <ns2:IdenAddrPartySiteId>1097</ns2:IdenAddrPartySiteId>
 <ns2:PreferredName xsi:nil="true"/>
 <ns2:PersonSecondLastName xsi:nil="true"/>
 <ns2:PreferredNameId xsi:nil="true"/>
 <ns2:TradingPartnerIdentifier xsi:nil="true"/>
 <ns2:PreferredContactPersonId xsi:nil="true"/>
 <ns2:PreferredFunctionalCurrency>USD</ns2:PreferredFunctionalCurrency>
 <ns2:InternalFlag>false</ns2:InternalFlag>
 <ns2:Comments xsi:nil="true"/>
 <ns2:CeoName xsi:nil="true"/>
 <ns2:PrincipalName xsi:nil="true"/>
 <ns2:OrganizationSize>LARGE</ns2:OrganizationSize>
 <ns2:PartyUniqueName>OrgTest01282013mnb</ns2:PartyUniqueName>
 <ns2:SourceSystem xsi:nil="true"/>
 <ns2:SourceSystemReferenceValue xsi:nil="true"/>
 <ns2:SourceSystemUpdateDate xsi:nil="true"/>
 <ns2:PartySite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/partySite/">
 <ns1:PartySiteId>300100573317048</ns1:PartySiteId>
```

```
<ns1:PartyId>1003</ns1:PartyId>
<ns1:LocationId>970</ns1:LocationId>
<ns1:LastUpdateDate>2021-09-15T04:51:45.547Z</ns1:LastUpdateDate>
<ns1:PartySiteNumber>CDRM_815835</ns1:PartySiteNumber>
<ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
<ns1:CreationDate>2021-09-15T04:51:23.012Z</ns1:CreationDate>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:LastUpdateLogin>C9855F3A3E972F3AE053D711F10A146B</ns1:LastUpdateLogin>
<ns1:RequestId xsi:nil="true"/>
<ns1:OrigSystem xsi:nil="true"/>
<ns1:OrigSystemReference>300100573317048</ns1:OrigSystemReference>
<ns1:StartDateActive>2021-09-15</ns1:StartDateActive>
<ns1:EndDateActive>4712-12-31</ns1:EndDateActive>
<ns1:Mailstop xsi:nil="true"/>
<ns1:IdentifyingAddressFlag>false</ns1:IdentifyingAddressFlag>
<ns1:Language xsi:nil="true"/>
<ns1:Status>A</ns1:Status>
<ns1:PartySiteName xsi:nil="true"/>
<ns1:Addressee xsi:nil="true"/>
<ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
<ns1:GlobalLocationNumber xsi:nil="true"/>
<ns1:DUNSNumberC xsi:nil="true"/>
<ns1:Comments xsi:nil="true"/>
<ns1:PartySiteType xsi:nil="true"/>
<ns1:PartyNameDba xsi:nil="true"/>
<ns1:PartyNameDivision xsi:nil="true"/>
<ns1:PartyNameLegal xsi:nil="true"/>
<ns1:RelationshipId xsi:nil="true"/>
<ns1:PartyUsageCode xsi:nil="true"/>
<ns1:UsageCode>GEOGRAPHY</ns1:UsageCode>
<ns1:FormattedAddress>1800 Satellite Drive,Distribution Center,CHATTANOOGA, TN 37401</ns1:FormattedAddress>
<ns1:Country>US</ns1:Country>
<ns1:Address1>1800 Satellite Drive</ns1:Address1>
<ns1:Address2>Distribution Center</ns1:Address2>
<ns1:Address3>Warehouse B</ns1:Address3>
<ns1:Address4 xsi:nil="true"/>
<ns1:City>Chattanooga</ns1:City>
<ns1:PostalCode>37401</ns1:PostalCode>
<ns1:State>TN</ns1:State>
<ns1:Province xsi:nil="true"/>
<ns1:County>Hamilton</ns1:County>
<ns1:AddressStyle xsi:nil="true"/>
<ns1:ValidatedFlag xsi:nil="true"/>
<ns1:AddressLinesPhonetic xsi:nil="true"/>
<ns1:PostalPlus4Code xsi:nil="true"/>
<ns1:Position xsi:nil="true"/>
<ns1:LocationDirections xsi:nil="true"/>
<ns1:AddressExpirationDate xsi:nil="true"/>
<ns1:LocationLanguage xsi:nil="true"/>
<ns1:ValidationStatusCode xsi:nil="true"/>
<ns1:DateValidated xsi:nil="true"/>
<ns1:DoNotValidateFlag xsi:nil="true"/>
<ns1:HouseType xsi:nil="true"/>
<ns1:FormattedMultilineAddress>1800 Satellite Drive&lt;BR>Distribution Center&lt;BR>CHATTANOOGA, TN 37401</
ns1:FormattedMultilineAddress>
<ns1:Country1>US</ns1:Country1>
<ns1:ObjectVersionNumber1>11</ns1:ObjectVersionNumber1>
<ns1:ContactPreferenceExistFlag>false</ns1:ContactPreferenceExistFlag>
<ns1:FormattedLocaleAddress xsi:nil="true"/>
<ns1:CurrencyCode>USD</ns1:CurrencyCode>
<ns1:CorpCurrencyCode>USD</ns1:CorpCurrencyCode>
<ns1:CurcyConvRateType>Corporate</ns1:CurcyConvRateType>
<ns1:InternalFlag>false</ns1:InternalFlag>
<ns1:OverallPrimaryFlag>false</ns1:OverallPrimaryFlag>
<ns1:EmailAddress xsi:nil="true"/>
<ns1:Latitude xsi:nil="true"/>
```

```
 <ns1:Longitude xsi:nil="true"/>
 <ns1:PartySiteUse>
 <ns1:PartySiteUseId>300100573317049</ns1:PartySiteUseId>
 <ns1:BeginDate>2021-09-15</ns1:BeginDate>
 <ns1:Comments xsi:nil="true"/>
 <ns1:EndDate>4712-12-31</ns1:EndDate>
 <ns1:PartySiteId>300100573317048</ns1:PartySiteId>
 <ns1:LastUpdateDate>2021-09-15T04:51:45.425Z</ns1:LastUpdateDate>
 <ns1:RequestId xsi:nil="true"/>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:CreationDate>2021-09-15T04:51:37.758Z</ns1:CreationDate>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:LastUpdateLogin>C9855F3A3E972F3AE053D711F10A146B</ns1:LastUpdateLogin>
 <ns1:IntegrationKey>x</ns1:IntegrationKey>
 <ns1:SiteUseType>BILL_TO</ns1:SiteUseType>
 <ns1:PrimaryPerType>N</ns1:PrimaryPerType>
 <ns1:Status>A</ns1:Status>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
 </ns1:PartySiteUse>
 <ns1:R10_Addr_Text_c xsi:nil="true"/>
 <ns1:R10_Addr_Curr_c currencyCode="USD">599</ns1:R10_Addr_Curr_c>
 <ns1:R10_Addr_DateTime_c xsi:nil="true"/>
 <ns1:AddressFCL_c xsi:nil="true"/>
 </ns2:PartySite>
 </ns2:Value>
 </ns3:result>
 </ns0:mergeOrganizationResponse>
 </env:Body>
</env:Envelope>
```

Update Account Number

In this use case, we'll update customer account number.

Operation: **mergeCustomerAccount**

Request Body

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"><soap:Header/>
 <soap:Body>
 <ns1:mergeCustomerAccount xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/
customerAccountService/applicationModule/types/">
 <ns1:customerAccount xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/
customerAccountService/">
 <ns2:CustomerAccountId>1001</ns2:CustomerAccountId>
 <ns2:Comments>CDRM_216295</ns2:Comments>
 </ns1:customerAccount>
 </ns1:mergeCustomerAccount>
 </soap:Body>
</soap:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/applicationModule/
CustomerAccountService/mergeCustomerAccountResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:b82a07b9-02c1-4c83-b4f4-1d830cfebeb8</wsa:MessageID>
 </env:Header>
 <env:Body>
```

```
 <ns0:mergeCustomerAccountResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
customerAccountService/applicationModule/types/">
 <ns0:result xsi:type="ns2:CustomerAccountResult" xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/
parties/partyService/" xmlns:ns9="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/"
 xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/" xmlns:tns="http://
xmlns.oracle.com/adf/svc/errors/" xmlns:ns1="http://xmlns.oracle.com/adf/svc/types/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance">
 <ns2:Value>
 <ns2:CustomerAccountId>1001</ns2:CustomerAccountId>
 <ns2:PartyId>1001</ns2:PartyId>
 <ns2:LastUpdateDate>2022-06-17T06:44:13Z</ns2:LastUpdateDate>
 <ns2:AccountNumber>1001</ns2:AccountNumber>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>1997-02-23T12:35:00Z</ns2:CreationDate>
 <ns2:CreatedBy>1028</ns2:CreatedBy>
 <ns2:LastUpdateLogin>E09B467F5B12B206E053025BF00A0C15</ns2:LastUpdateLogin>
 <ns2:RequestId>99999</ns2:RequestId>
 <ns2:OrigSystem xsi:nil="true"/>
 <ns2:OrigSystemReference>1001</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CustomerType>R</ns2:CustomerType>
 <ns2:CustomerClassCode>TELECOM</ns2:CustomerClassCode>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag>false</ns2:TaxHeaderLevelFlag>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:CoterminateDayMonth>1230</ns2:CoterminateDayMonth>
 <ns2:AccountEstablishedDate>1997-02-23</ns2:AccountEstablishedDate>
 <ns2:AccountTerminationDate>4712-12-03</ns2:AccountTerminationDate>
 <ns2:HeldBillExpirationDate xsi:nil="true"/>
 <ns2:HoldBillFlag xsi:nil="true"/>
 <ns2:AccountName>AT&amp;amp;T</ns2:AccountName>
 <ns2:DepositRefundMethod xsi:nil="true"/>
 <ns2:NpaNumber xsi:nil="true"/>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:Comments>CDRM_216295</ns2:Comments>
 <ns2:DateTypePreference xsi:nil="true"/>
 <ns2:ArrivalsetsIncludeLinesFlag xsi:nil="true"/>
 <ns2:StatusUpdateDate xsi:nil="true"/>
 <ns2:AutopayFlag xsi:nil="true"/>
 <ns2:LastBatchId xsi:nil="true"/>
 <ns2:CreatedByModule xsi:nil="true"/>
 <ns2:SellingPartyId xsi:nil="true"/>
 </ns2:Value>
 </ns0:result>
 </ns0:mergeCustomerAccountResponse>
 </env:Body>
</env:Envelope>
```

How do I update bill to site address?

In this use case, we'll update the Bill-To Site address for situations when the ship-to and bill-to address are different.

Operation: **mergeCustomer**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
 xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/
applicationModule/types/" xmlns:cus="http://xmlns.oracle.com/apps/cdm/foundation/parties/
customerAccountService/" xmlns:cus1="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/custAccountContactRole/" xmlns:par="http://xmlns.oracle.com/apps/cdm/foundation/
parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/parties/
```

```
flex/sourceSystemRef/" xmlns:cus2="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/custAccountContact/" xmlns:cus3="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/custAccountRel/" xmlns:cus4="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/custAccountSiteUse/" xmlns:cus5="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/custAccountSite/" xmlns:cus6="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/custAccount/">
   <soapenv:Header/>
   <soapenv:Body>
      <typ:mergeCustomerAccount>
         <typ:customerAccount>
            <cus:CustomerAccountId>6666</cus:CustomerAccountId>
            <cus:CustomerAccountSite>
               <cus:CustomerAccountSiteId>7088</cus:CustomerAccountSiteId>
                  <cus:CustomerAccountSiteUse>
                  <cus:SiteUseId>8237</cus:SiteUseId>
                  <cus:BillToSiteUseId>8236</cus:BillToSiteUseId>
   </cus:CustomerAccountSiteUse>
  </cus:CustomerAccountSite>
  </typ:customerAccount>
      </typ:mergeCustomerAccount>
   </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://
www.w3.org/2005/08/addressing">
   <env:Header>
      <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/
customerAccountService/applicationModule/CustomerAccountService/
mergeCustomerAccountResponse</wsa:Action>
      <wsa:MessageID>urn:uuid:af18c21b-901d-412e-8fbd-f0756132d7f0</wsa:MessageID>
   </env:Header>
   <env:Body>
      <ns0:mergeCustomerAccountResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/
foundation/parties/customerAccountService/applicationModule/types/">
         <ns0:result xsi:type="ns2:CustomerAccountResult" xmlns:ns4="http://
xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:ns10="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/" xmlns:ns11="http://
xmlns.oracle.com/apps/flex/cdm/foundation/parties/custAccountGdf/" xmlns:ns2="http://
xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/" xmlns:tns="http://
xmlns.oracle.com/adf/svc/errors/" xmlns:ns1="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
            <ns2:Value>
               <ns2:CustomerAccountId>6666</ns2:CustomerAccountId>
               <ns2:PartyId>39332</ns2:PartyId>
               <ns2:LastUpdateDate>2003-11-18T12:32:12Z</ns2:LastUpdateDate>
               <ns2:AccountNumber>3500</ns2:AccountNumber>
               <ns2:LastUpdatedBy>1001530</ns2:LastUpdatedBy>
               <ns2:CreationDate>2003-11-18T12:32:12Z</ns2:CreationDate>
               <ns2:CreatedBy>1001530</ns2:CreatedBy>
               <ns2:LastUpdateLogin>2422191</ns2:LastUpdateLogin>
               <ns2:RequestId xsi:nil="true"/>
               <ns2:OrigSystem xsi:nil="true"/>
               <ns2:OrigSystemReference>6666</ns2:OrigSystemReference>
               <ns2:Status>A</ns2:Status>
               <ns2:CustomerType xsi:nil="true"/>
               <ns2:CustomerClassCode xsi:nil="true"/>
               <ns2:TaxCode xsi:nil="true"/>
```

```
                <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
                <ns2:TaxRoundingRule xsi:nil="true"/>
                <ns2:CoterminateDayMonth xsi:nil="true"/>
                <ns2:AccountEstablishedDate>2003-11-18</ns2:AccountEstablishedDate>
                <ns2:AccountTerminationDate>4712-12-31</ns2:AccountTerminationDate>
                <ns2:HeldBillExpirationDate xsi:nil="true"/>
                <ns2:HoldBillFlag>false</ns2:HoldBillFlag>
                <ns2:AccountName>w_cw, Inc.</ns2:AccountName>
                <ns2:DepositRefundMethod xsi:nil="true"/>
                <ns2:NpaNumber xsi:nil="true"/>
                <ns2:SourceCode xsi:nil="true"/>
                <ns2:Comments xsi:nil="true"/>
                <ns2:DateTypePreference xsi:nil="true"/>
                <ns2:ArrivalsetsIncludeLinesFlag xsi:nil="true"/>
                <ns2:StatusUpdateDate xsi:nil="true"/>
                <ns2:AutopayFlag xsi:nil="true"/>
                <ns2:LastBatchId xsi:nil="true"/>
                <ns2:CreatedByModule>ASO_CUSTOMER_DATA</ns2:CreatedByModule>
                <ns2:SellingPartyId xsi:nil="true"/>
                <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSite/" xmlns:ns8="http://xmlns.oracle.com/apps/flex/
cdm/foundation/parties/custAccountSiteGdf/">
                    <ns2:CustomerAccountSiteId>7088</ns2:CustomerAccountSiteId>
                    <ns2:CustomerAccountId>6666</ns2:CustomerAccountId>
                    <ns2:PartySiteId>18255</ns2:PartySiteId>
                    <ns2:LastUpdateDate>2003-11-18T12:32:12Z</ns2:LastUpdateDate>
                    <ns2:LastUpdatedBy>1001530</ns2:LastUpdatedBy>
                    <ns2:CreationDate>2003-11-18T12:32:12Z</ns2:CreationDate>
                    <ns2:CreatedBy>1001530</ns2:CreatedBy>
                    <ns2:LastUpdateLogin>2422191</ns2:LastUpdateLogin>
                    <ns2:RequestId xsi:nil="true"/>
                    <ns2:OrigSystemReference>7088</ns2:OrigSystemReference>
                    <ns2:Status>A</ns2:Status>
                    <ns2:BillToIndicator>Y</ns2:BillToIndicator>
                    <ns2:MarketIndicator xsi:nil="true"/>
                    <ns2:ShipToIndicator>Y</ns2:ShipToIndicator>
                    <ns2:CustomerCategoryCode xsi:nil="true"/>
                    <ns2:Language xsi:nil="true"/>
                    <ns2:KeyAccountFlag xsi:nil="true"/>
                    <ns2:TpHeaderId xsi:nil="true"/>
                    <ns2:EceTpLocationCode xsi:nil="true"/>
                    <ns2:TranslatedCustomerName xsi:nil="true"/>
                    <ns2:CreatedByModule>ASO_CUSTOMER_DATA</ns2:CreatedByModule>
                    <ns2:SetId>204</ns2:SetId>
                    <ns2:StartDate>1951-01-01</ns2:StartDate>
                    <ns2:EndDate>4712-12-31</ns2:EndDate>
                    <ns2:SetCode>Vision Operations 204</ns2:SetCode>
                    <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/
foundation/parties/flex/custAccountSiteUse/">
                        <ns2:SiteUseId>8237</ns2:SiteUseId>
                        <ns2:CustomerAccountSiteId>7088</ns2:CustomerAccountSiteId>
                        <ns2:LastUpdateDate>2004-09-10T11:12:24Z</ns2:LastUpdateDate>
                        <ns2:LastUpdatedBy>1001530</ns2:LastUpdatedBy>
                        <ns2:CreationDate>2003-11-18T12:32:12Z</ns2:CreationDate>
                        <ns2:CreatedBy>1001530</ns2:CreatedBy>
                        <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
                        <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
                        <ns2:Status>A</ns2:Status>
                        <ns2:Location>8237</ns2:Location>
                        <ns2:LastUpdateLogin>2828607</ns2:LastUpdateLogin>
```

```
                        <ns2:BillToSiteUseId>8236</ns2:BillToSiteUseId>
                        <ns2:OrigSystemReference>8237</ns2:OrigSystemReference>
                        <ns2:SICCode xsi:nil="true"/>
                        <ns2:PaymentTermId xsi:nil="true"/>
                        <ns2:GSAIndicator>N</ns2:GSAIndicator>
                        <ns2:TerritoryId xsi:nil="true"/>
                        <ns2:RequestId xsi:nil="true"/>
                        <ns2:TaxReference xsi:nil="true"/>
                        <ns2:SortPriority xsi:nil="true"/>
                        <ns2:TaxCode xsi:nil="true"/>
                        <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
                        <ns2:LastAccrueChargeDate xsi:nil="true"/>
                        <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
                        <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
                        <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
                        <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
                        <ns2:TaxRoundingRule xsi:nil="true"/>
                        <ns2:TaxClassification xsi:nil="true"/>
                        <ns2:CreatedByModule>ASO_CUSTOMER_DATA</ns2:CreatedByModule>
                        <ns2:SetId>204</ns2:SetId>
                        <ns2:EndDate>4712-12-31</ns2:EndDate>
                        <ns2:StartDate>1951-01-01</ns2:StartDate>
                     </ns2:CustomerAccountSiteUse>
                  </ns2:CustomerAccountSite>
               </ns2:Value>
            </ns0:result>
         </ns0:mergeCustomerAccountResponse>
      </env:Body>
</env:Envelope>
```

Update a Customer Descriptive Flexfield

In this use case, we'll update customer account descriptive flexfield.

Operation: **mergeCustomerAccount**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/applicationModule/types/"
 xmlns:cus="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/" xmlns:cus1="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountContactRole/" xmlns:par="http://
xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/
cdm/foundation/parties/flex/sourceSystemRef/" xmlns:cus2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/flex/custAccountContact/" xmlns:cus3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountRel/" xmlns:cus4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSiteUse/"
 xmlns:cus5="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSite/" xmlns:cus6="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:mergeCustomerAccount>
 <typ:customerAccount>
 <cus:PartyId>1003</cus:PartyId>
 <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
 <cus:CustomerAccountSite>
 <cus:PartySiteId>300100555606069</cus:PartySiteId>
 <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
 <cus:SetId>202</cus:SetId>
 <cus:CustomerAccountSiteUse>
 <cus:SiteUseCode>SOLD_TO</cus:SiteUseCode>
```

```
 <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
 </cus:CustomerAccountSiteUse>
 <cus:CustomerAccountSiteUse>
 <cus:SiteUseCode>BILL_TO</cus:SiteUseCode>
 <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
 </cus:CustomerAccountSiteUse>
 <cus:CustomerAccountSiteUse>
 <cus:SiteUseCode>SHIP_TO</cus:SiteUseCode>
 <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
 </cus:CustomerAccountSiteUse>
 </cus:CustomerAccountSite>
 </typ:customerAccount>
 </typ:mergeCustomerAccount>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/applicationModule/
CustomerAccountService/mergeCustomerAccountResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:c02f8d42-5cb9-4b6c-b706-321bb1e99673</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:mergeCustomerAccountResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
customerAccountService/applicationModule/types/">
 <ns0:result xsi:type="ns2:CustomerAccountResult" xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/
parties/partyService/" xmlns:ns9="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/"
 xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/" xmlns:tns="http://
xmlns.oracle.com/adf/svc/errors/" xmlns:ns1="http://xmlns.oracle.com/adf/svc/types/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance">
 <ns2:Value>
 <ns2:CustomerAccountId>300100560117299</ns2:CustomerAccountId>
 <ns2:PartyId>1003</ns2:PartyId>
 <ns2:LastUpdateDate>2021-12-09T04:40:01.525Z</ns2:LastUpdateDate>
 <ns2:AccountNumber>CDRM_216283</ns2:AccountNumber>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>2021-12-09T04:39:59.026Z</ns2:CreationDate>
 <ns2:CreatedBy>FUSION</ns2:CreatedBy>
 <ns2:LastUpdateLogin>D22807D666EC220AE0531C5CF00A1645</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystem xsi:nil="true"/>
 <ns2:OrigSystemReference>300100560117299</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CustomerType xsi:nil="true"/>
 <ns2:CustomerClassCode xsi:nil="true"/>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:CoterminateDayMonth xsi:nil="true"/>
 <ns2:AccountEstablishedDate>2021-12-09</ns2:AccountEstablishedDate>
 <ns2:AccountTerminationDate>4712-12-31</ns2:AccountTerminationDate>
 <ns2:HeldBillExpirationDate xsi:nil="true"/>
 <ns2:HoldBillFlag>false</ns2:HoldBillFlag>
 <ns2:AccountName xsi:nil="true"/>
 <ns2:DepositRefundMethod xsi:nil="true"/>
 <ns2:NpaNumber xsi:nil="true"/>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:Comments xsi:nil="true"/>
 <ns2:DateTypePreference xsi:nil="true"/>
 <ns2:ArrivalsetsIncludeLinesFlag xsi:nil="true"/>
 <ns2:StatusUpdateDate xsi:nil="true"/>
 <ns2:AutopayFlag xsi:nil="true"/>
 <ns2:LastBatchId xsi:nil="true"/>
```

```
 <ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
 <ns2:SellingPartyId xsi:nil="true"/>
 <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/">
 <ns2:CustomerAccountSiteId>300100560117300</ns2:CustomerAccountSiteId>
 <ns2:CustomerAccountId>300100560117299</ns2:CustomerAccountId>
 <ns2:PartySiteId>300100555606069</ns2:PartySiteId>
 <ns2:LastUpdateDate>2021-12-09T04:40:01.601Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>2021-12-09T04:39:59.417Z</ns2:CreationDate>
 <ns2:CreatedBy>FUSION</ns2:CreatedBy>
 <ns2:LastUpdateLogin>D22807D666EC220AE0531C5CF00A1645</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>300100560117300</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToIndicator>P</ns2:BillToIndicator>
 <ns2:MarketIndicator>N</ns2:MarketIndicator>
 <ns2:ShipToIndicator>P</ns2:ShipToIndicator>
 <ns2:CustomerCategoryCode xsi:nil="true"/>
 <ns2:Language xsi:nil="true"/>
 <ns2:KeyAccountFlag xsi:nil="true"/>
 <ns2:TpHeaderId xsi:nil="true"/>
 <ns2:EceTpLocationCode xsi:nil="true"/>
 <ns2:TranslatedCustomerName xsi:nil="true"/>
 <ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
 <ns2:SetId>202</ns2:SetId>
 <ns2:StartDate>2021-12-09</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:SetCode>Vision Corporation 202</ns2:SetCode>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>300100560117301</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>300100560117300</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2021-12-09T04:40:01.61Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>2021-12-09T04:39:59.806Z</ns2:CreationDate>
 <ns2:CreatedBy>FUSION</ns2:CreatedBy>
 <ns2:SiteUseCode>SOLD_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>CDRM_190377</ns2:Location>
 <ns2:LastUpdateLogin>D22807D666EC220AE0531C5CF00A1645</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference>300100560117301</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId xsi:nil="true"/>
 <ns2:GSAIndicator xsi:nil="true"/>
 <ns2:TerritoryId xsi:nil="true"/>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
 <ns2:SetId>202</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>2021-12-09</ns2:StartDate>
 </ns2:CustomerAccountSiteUse>
```

```
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>300100560117302</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>300100560117300</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2021-12-09T04:40:01.794Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>2021-12-09T04:40:00.734Z</ns2:CreationDate>
 <ns2:CreatedBy>FUSION</ns2:CreatedBy>
 <ns2:SiteUseCode>BILL_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>CDRM_190378</ns2:Location>
 <ns2:LastUpdateLogin>D22807D666EC220AE0531C5CF00A1645</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference>300100560117302</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId xsi:nil="true"/>
 <ns2:GSAIndicator xsi:nil="true"/>
 <ns2:TerritoryId xsi:nil="true"/>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
 <ns2:SetId>202</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>2021-12-09</ns2:StartDate>
 </ns2:CustomerAccountSiteUse>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>300100560117303</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>300100560117300</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2021-12-09T04:40:01.834Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>2021-12-09T04:40:00.79Z</ns2:CreationDate>
 <ns2:CreatedBy>FUSION</ns2:CreatedBy>
 <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>CDRM_190379</ns2:Location>
 <ns2:LastUpdateLogin>D22807D666EC220AE0531C5CF00A1645</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference>300100560117303</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId xsi:nil="true"/>
 <ns2:GSAIndicator xsi:nil="true"/>
 <ns2:TerritoryId xsi:nil="true"/>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
```

```
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
 <ns2:SetId>202</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>2021-12-09</ns2:StartDate>
 </ns2:CustomerAccountSiteUse>
 </ns2:CustomerAccountSite>
 </ns2:Value>
 </ns0:result>
 </ns0:mergeCustomerAccountResponse>
 </env:Body>
</env:Envelope>
```

Location Web Service Sample Payloads

The following topics describe the sample payloads for LocationService External V2, for different use cases.

For each use case, you can find the location type, the operation involved to invoke the web service, followed by sample payload.

Create a Location

In this use case, we'll create a location.

Operation: **createLocation**

> **Note:** The *CreatedByModule* attribute is mandatory only for **Create** operation. It is not used in the request of **Update** operation.

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/locationService/applicationModule/types/" xmlns:loc="http://
xmlns.oracle.com/apps/cdm/foundation/parties/locationService/" xmlns:par="http://xmlns.oracle.com/apps/
cdm/foundation/parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/" xmlns:loc1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/location/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:createLocation>
 <typ:location>
 <loc:Country>US</loc:Country>
 <loc:Address1>1 Sample St</loc:Address1>
 <loc:City>Columbia</loc:City>
 <loc:PostalCode>29210</loc:PostalCode>
 <loc:State>South Carolina</loc:State>
 <loc:CreatedByModule>HZ_WS</loc:CreatedByModule>
 </typ:location>
 </typ:createLocation>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing" xmlns:typ="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/
applicationModule/types/">
 <env:Header>
```

```
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/applicationModule//
LocationService/createLocationResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:ba6bc791-87f2-4dd9-b8c1-0afe2091df9c</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:createLocationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/
applicationModule/types/">
 <ns2:result xsi:type="ns1:LocationResult" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/locationService/applicationModule/types/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/
parties/locationService/" xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/location/"
 xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:tns="http://
xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance">
 <ns1:Value>
 <ns1:LocationId>300100545246408</ns1:LocationId>
 <ns1:LastUpdateDate>2021-09-15T12:29:08.184Z</ns1:LastUpdateDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
 <ns1:CreationDate>2021-09-15T12:29:08.001Z</ns1:CreationDate>
 <ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
 <ns1:LastUpdateLogin>CC05D9D2BB1D2B57E053DA0CF10A4106</ns1:LastUpdateLogin>
 <ns1:RequestId xsi:nil="true"/>
 <ns1:OrigSystem xsi:nil="true"/>
 <ns1:OrigSystemReference>300100545246408</ns1:OrigSystemReference>
 <ns1:Country>US</ns1:Country>
 <ns1:Address1>1 Sample St</ns1:Address1>
 <ns1:Address2 xsi:nil="true"/>
 <ns1:Address3 xsi:nil="true"/>
 <ns1:Address4 xsi:nil="true"/>
 <ns1:City>Columbia</ns1:City>
 <ns1:PostalCode>29210</ns1:PostalCode>
 <ns1:State>South Carolina</ns1:State>
 <ns1:Province xsi:nil="true"/>
 <ns1:County xsi:nil="true"/>
 <ns1:AddressStyle xsi:nil="true"/>
 <ns1:ValidatedFlag>false</ns1:ValidatedFlag>
 <ns1:AddressLinesPhonetic xsi:nil="true"/>
 <ns1:PostalPlus4Code xsi:nil="true"/>
 <ns1:Position xsi:nil="true"/>
 <ns1:LocationDirections xsi:nil="true"/>
 <ns1:AddressEffectiveDate xsi:nil="true"/>
 <ns1:AddressExpirationDate xsi:nil="true"/>
 <ns1:CliCode xsi:nil="true"/>
 <ns1:Language xsi:nil="true"/>
 <ns1:ShortDescription xsi:nil="true"/>
 <ns1:Description xsi:nil="true"/>
 <ns1:SalesTaxGeocode xsi:nil="true"/>
 <ns1:SalesTaxInsideCityLimits>1</ns1:SalesTaxInsideCityLimits>
 <ns1:FaLocationId xsi:nil="true"/>
 <ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
 <ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
 <ns1:GeometryStatusCode>DIRTY</ns1:GeometryStatusCode>
 <ns1:ValidationStatusCode xsi:nil="true"/>
 <ns1:DateValidated xsi:nil="true"/>
 <ns1:DoNotValidateFlag xsi:nil="true"/>
 <ns1:Comments xsi:nil="true"/>
 <ns1:HouseType xsi:nil="true"/>
 <ns1:EffectiveDate>2021-09-15</ns1:EffectiveDate>
 <ns1:AddrElementAttribute1 xsi:nil="true"/>
 <ns1:AddrElementAttribute2 xsi:nil="true"/>
 <ns1:AddrElementAttribute3 xsi:nil="true"/>
 <ns1:AddrElementAttribute4 xsi:nil="true"/>
 <ns1:AddrElementAttribute5 xsi:nil="true"/>
 <ns1:Building xsi:nil="true"/>
 <ns1:FloorNumber xsi:nil="true"/>
 <ns1:StatusFlag>true</ns1:StatusFlag>
 <ns1:InternalFlag>false</ns1:InternalFlag>
```

```
 <ns1:TimezoneCode xsi:nil="true"/>
 <ns1:Latitude xsi:nil="true"/>
 <ns1:Longitude xsi:nil="true"/>
 <ns1:Distance xsi:nil="true"/>
 </ns1:Value>
 </ns2:result>
 </ns0:createLocationResponse>
 </env:Body>
</env:Envelope>
```

Update a Location

In this use case, we'll update a location.

Operation: **createLocation**

> **Note:** The *CreatedByModule* attribute is mandatory only for **Create** operation. It is not used in the request of **Update** operation.

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/locationService/applicationModule/types/" xmlns:loc="http://
xmlns.oracle.com/apps/cdm/foundation/parties/locationService/" xmlns:par="http://xmlns.oracle.com/apps/
cdm/foundation/parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/" xmlns:loc1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/location/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:updateLocation>
 <typ:location>
 <loc:LocationId>300100554877557</loc:LocationId>
 <loc:Country>US</loc:Country>
 <loc:Address1>1 Sample St</loc:Address1>
 <loc:City>Columbia</loc:City>
 <loc:PostalCode>29210</loc:PostalCode>
 <loc:State>South Carolina</loc:State>
 </typ:location>
 </typ:updateLocation>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/applicationModule/
LocationService/updateLocationResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:b27aab61-6260-4319-9f2c-3081764c8ac9</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:updateLocationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/
applicationModule/types/">
 <ns2:result xsi:type="ns1:LocationResult" xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/
parties/partyService/" xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/location/"
 xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/
locationService/applicationModule/types/">
 <ns1:Value>
```

```
<ns1:LocationId>300100554877557</ns1:LocationId>
<ns1:LastUpdateDate>2022-03-16T04:59:28Z</ns1:LastUpdateDate>
<ns1:LastUpdatedBy>FUSION</ns1:LastUpdatedBy>
<ns1:CreationDate>2022-03-16T04:57:36.002Z</ns1:CreationDate>
<ns1:CreatedBy>FUSION</ns1:CreatedBy>
<ns1:LastUpdateLogin>D8A75426E57E783EE0531C5CF00A7DC3</ns1:LastUpdateLogin>
<ns1:RequestId xsi:nil="true"/>
<ns1:OrigSystem xsi:nil="true"/>
<ns1:OrigSystemReference>300100554877557</ns1:OrigSystemReference>
<ns1:Country>US</ns1:Country>
<ns1:Address1>1 Sample St</ns1:Address1>
<ns1:Address2 xsi:nil="true"/>
<ns1:Address3 xsi:nil="true"/>
<ns1:Address4 xsi:nil="true"/>
<ns1:City>Columbia</ns1:City>
<ns1:PostalCode>29210</ns1:PostalCode>
<ns1:State>South Carolina</ns1:State>
<ns1:Province xsi:nil="true"/>
<ns1:County xsi:nil="true"/>
<ns1:AddressStyle xsi:nil="true"/>
<ns1:ValidatedFlag>false</ns1:ValidatedFlag>
<ns1:AddressLinesPhonetic xsi:nil="true"/>
<ns1:PostalPlus4Code xsi:nil="true"/>
<ns1:Position xsi:nil="true"/>
<ns1:LocationDirections xsi:nil="true"/>
<ns1:AddressEffectiveDate xsi:nil="true"/>
<ns1:AddressExpirationDate xsi:nil="true"/>
<ns1:CliCode xsi:nil="true"/>
<ns1:Language xsi:nil="true"/>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:Description xsi:nil="true"/>
<ns1:SalesTaxGeocode xsi:nil="true"/>
<ns1:SalesTaxInsideCityLimits>1</ns1:SalesTaxInsideCityLimits>
<ns1:FaLocationId xsi:nil="true"/>
<ns1:ObjectVersionNumber>2</ns1:ObjectVersionNumber>
<ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
<ns1:GeometryStatusCode>DIRTY</ns1:GeometryStatusCode>
<ns1:ValidationStatusCode xsi:nil="true"/>
<ns1:DateValidated xsi:nil="true"/>
<ns1:DoNotValidateFlag xsi:nil="true"/>
<ns1:Comments xsi:nil="true"/>
<ns1:HouseType xsi:nil="true"/>
<ns1:EffectiveDate>2022-03-16</ns1:EffectiveDate>
<ns1:AddrElementAttribute1 xsi:nil="true"/>
<ns1:AddrElementAttribute2 xsi:nil="true"/>
<ns1:AddrElementAttribute3 xsi:nil="true"/>
<ns1:AddrElementAttribute4 xsi:nil="true"/>
<ns1:AddrElementAttribute5 xsi:nil="true"/>
<ns1:Building xsi:nil="true"/>
<ns1:FloorNumber xsi:nil="true"/>
<ns1:StatusFlag>true</ns1:StatusFlag>
<ns1:InternalFlag>false</ns1:InternalFlag>
<ns1:TimezoneCode xsi:nil="true"/>
<ns1:Latitude xsi:nil="true"/>
<ns1:Longitude xsi:nil="true"/>
<ns1:Distance xsi:nil="true"/>
</ns1:Value>
</ns2:result>
</ns0:updateLocationResponse>
</env:Body>
</env:Envelope>
```

Create Multiple Locations

In this use case, we'll create multiple locations.

Operation: **processLocation**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/locationService/applicationModule/types/" xmlns:loc="http://
xmlns.oracle.com/apps/cdm/foundation/parties/locationService/" xmlns:par="http://xmlns.oracle.com/apps/
cdm/foundation/parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/parties/
flex/sourceSystemRef/" xmlns:loc1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/location/"
 xmlns:typ1="http://xmlns.oracle.com/adf/svc/types/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:processLocation>
 <typ:changeOperation>Create</typ:changeOperation>
 <typ:location>
 <loc:Country>US</loc:Country>
 <loc:Address1>Ashburn</loc:Address1>
 <loc:City>Ashburn</loc:City>
 <loc:PostalCode>24370</loc:PostalCode>
 <loc:State>Virginia</loc:State>
 <loc:County>Ashburn</loc:County>
 <loc:CreatedByModule>HZ_WS</loc:CreatedByModule>
 </typ:location>
 <typ:location>
 <loc:Country>CA</loc:Country>
 <loc:Address1>MonteCarlo</loc:Address1>
 <loc:City>MonteCarlo</loc:City>
 <loc:PostalCode>50081</loc:PostalCode>
 <loc:State>Monteque</loc:State>
 <loc:County>CA</loc:County>
 <loc:CreatedByModule>HZ_WS</loc:CreatedByModule>
 </typ:location>
 </typ:processLocation>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/applicationModule/
LocationService/processLocationResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:b15c07e2-378d-4c47-82f0-497cb6900dae</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:processLocationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
locationService/applicationModule/types/">
 <ns2:result xsi:type="ns1:LocationResult" xmlns:ns3="http://xmlns.oracle.com/apps/cdm/foundation/
parties/partyService/" xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/location/"
 xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance" xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/
locationService/applicationModule/types/">
 <ns1:Value>
 <ns1:LocationId>300100546884294</ns1:LocationId>
 <ns1:LastUpdateDate>2021-09-16T10:56:46.078Z</ns1:LastUpdateDate>
 <ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
```

```
<ns1:CreationDate>2021-09-16T10:56:46.001Z</ns1:CreationDate>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:LastUpdateLogin>CC1851A940152C0BE053D711F10A722D</ns1:LastUpdateLogin>
<ns1:RequestId xsi:nil="true"/>
<ns1:OrigSystem xsi:nil="true"/>
<ns1:OrigSystemReference>300100546884294</ns1:OrigSystemReference>
<ns1:Country>US</ns1:Country>
<ns1:Address1>Ashburn</ns1:Address1>
<ns1:Address2 xsi:nil="true"/>
<ns1:Address3 xsi:nil="true"/>
<ns1:Address4 xsi:nil="true"/>
<ns1:City>Ashburn</ns1:City>
<ns1:PostalCode>24370</ns1:PostalCode>
<ns1:State>Virginia</ns1:State>
<ns1:Province xsi:nil="true"/>
<ns1:County>Ashburn</ns1:County>
<ns1:AddressStyle xsi:nil="true"/>
<ns1:ValidatedFlag>false</ns1:ValidatedFlag>
<ns1:AddressLinesPhonetic xsi:nil="true"/>
<ns1:PostalPlus4Code xsi:nil="true"/>
<ns1:Position xsi:nil="true"/>
<ns1:LocationDirections xsi:nil="true"/>
<ns1:AddressEffectiveDate xsi:nil="true"/>
<ns1:AddressExpirationDate xsi:nil="true"/>
<ns1:CliiCode xsi:nil="true"/>
<ns1:Language xsi:nil="true"/>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:Description xsi:nil="true"/>
<ns1:SalesTaxGeocode xsi:nil="true"/>
<ns1:SalesTaxInsideCityLimits>1</ns1:SalesTaxInsideCityLimits>
<ns1:FaLocationId xsi:nil="true"/>
<ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
<ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
<ns1:GeometryStatusCode>DIRTY</ns1:GeometryStatusCode>
<ns1:ValidationStatusCode xsi:nil="true"/>
<ns1:DateValidated xsi:nil="true"/>
<ns1:DoNotValidateFlag xsi:nil="true"/>
<ns1:Comments xsi:nil="true"/>
<ns1:HouseType xsi:nil="true"/>
<ns1:EffectiveDate>2021-09-16</ns1:EffectiveDate>
<ns1:AddrElementAttribute1 xsi:nil="true"/>
<ns1:AddrElementAttribute2 xsi:nil="true"/>
<ns1:AddrElementAttribute3 xsi:nil="true"/>
<ns1:AddrElementAttribute4 xsi:nil="true"/>
<ns1:AddrElementAttribute5 xsi:nil="true"/>
<ns1:Building xsi:nil="true"/>
<ns1:FloorNumber xsi:nil="true"/>
<ns1:StatusFlag>true</ns1:StatusFlag>
<ns1:InternalFlag>false</ns1:InternalFlag>
<ns1:TimezoneCode xsi:nil="true"/>
<ns1:Latitude xsi:nil="true"/>
<ns1:Longitude xsi:nil="true"/>
<ns1:Distance xsi:nil="true"/>
</ns1:Value>
<ns1:Value>
<ns1:LocationId>300100546884295</ns1:LocationId>
<ns1:LastUpdateDate>2021-09-16T10:56:46.09Z</ns1:LastUpdateDate>
<ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
<ns1:CreationDate>2021-09-16T10:56:46.026Z</ns1:CreationDate>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:LastUpdateLogin>CC1851A940152C0BE053D711F10A722D</ns1:LastUpdateLogin>
<ns1:RequestId xsi:nil="true"/>
<ns1:OrigSystem xsi:nil="true"/>
<ns1:OrigSystemReference>300100546884295</ns1:OrigSystemReference>
<ns1:Country>CA</ns1:Country>
<ns1:Address1>MonteCarlo</ns1:Address1>
```

```
<ns1:Address2 xsi:nil="true"/>
<ns1:Address3 xsi:nil="true"/>
<ns1:Address4 xsi:nil="true"/>
<ns1:City>MonteCarlo</ns1:City>
<ns1:PostalCode>50081</ns1:PostalCode>
<ns1:State>Monteque</ns1:State>
<ns1:Province xsi:nil="true"/>
<ns1:County>CA</ns1:County>
<ns1:AddressStyle xsi:nil="true"/>
<ns1:ValidatedFlag>false</ns1:ValidatedFlag>
<ns1:AddressLinesPhonetic xsi:nil="true"/>
<ns1:PostalPlus4Code xsi:nil="true"/>
<ns1:Position xsi:nil="true"/>
<ns1:LocationDirections xsi:nil="true"/>
<ns1:AddressEffectiveDate xsi:nil="true"/>
<ns1:AddressExpirationDate xsi:nil="true"/>
<ns1:CliCode xsi:nil="true"/>
<ns1:Language xsi:nil="true"/>
<ns1:ShortDescription xsi:nil="true"/>
<ns1:Description xsi:nil="true"/>
<ns1:SalesTaxGeocode xsi:nil="true"/>
<ns1:SalesTaxInsideCityLimits>1</ns1:SalesTaxInsideCityLimits>
<ns1:FaLocationId xsi:nil="true"/>
<ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
<ns1:CreatedByModule>HZ_WS</ns1:CreatedByModule>
<ns1:GeometryStatusCode>DIRTY</ns1:GeometryStatusCode>
<ns1:ValidationStatusCode xsi:nil="true"/>
<ns1:DateValidated xsi:nil="true"/>
<ns1:DoNotValidateFlag xsi:nil="true"/>
<ns1:Comments xsi:nil="true"/>
<ns1:HouseType xsi:nil="true"/>
<ns1:EffectiveDate>2021-09-16</ns1:EffectiveDate>
<ns1:AddrElementAttribute1 xsi:nil="true"/>
<ns1:AddrElementAttribute2 xsi:nil="true"/>
<ns1:AddrElementAttribute3 xsi:nil="true"/>
<ns1:AddrElementAttribute4 xsi:nil="true"/>
<ns1:AddrElementAttribute5 xsi:nil="true"/>
<ns1:Building xsi:nil="true"/>
<ns1:FloorNumber xsi:nil="true"/>
<ns1:StatusFlag>true</ns1:StatusFlag>
<ns1:InternalFlag>false</ns1:InternalFlag>
<ns1:TimezoneCode xsi:nil="true"/>
<ns1:Latitude xsi:nil="true"/>
<ns1:Longitude xsi:nil="true"/>
<ns1:Distance xsi:nil="true"/>
</ns1:Value>
</ns2:result>
</ns0:processLocationResponse>
</env:Body>
</env:Envelope>
```

Delete a Location

In this use case, we'll delete a location.

Operation: **deleteLocation**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/locationService/applicationModule/types/" xmlns:loc="http://
xmlns.oracle.com/apps/cdm/foundation/parties/locationService/" xmlns:par="http://xmlns.oracle.com/apps/
```

```
cdm/foundation/parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
sourceSystemRef/" xmlns:loc1="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/location/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:deleteLocation>
 <typ:location>
 <!--Optional:-->
 <loc:LocationId>300100598365517</loc:LocationId>
 </typ:location>
 </typ:deleteLocation>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/applicationModule/
LocationService/deleteLocationResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:6b63481b-5993-4efd-8a91-ca169ffcb702</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:deleteLocationResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/locationService/
applicationModule/types/">
 <ns2:result xsi:type="ns0:MethodResult" xmlns:tns="http://xmlns.oracle.com/adf/svc/errors/"
 xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/" xmlns:ns1="http://xmlns.oracle.com/apps/cdm/foundation/
parties/locationService/" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:ns2="http://
xmlns.oracle.com/apps/cdm/foundation/parties/locationService/applicationModule/types/"/>
 </ns0:deleteLocationResponse>
 </env:Body>
</env:Envelope>
```

Trading Community Customer Account Web Service Sample Payloads

The following topics describe the sample payloads for CustomerAccountService External V2, for different use cases.

For each use case, you can find the customer account type, the operation involved to invoke the web service, followed by sample payload.

Create a Basic Customer Account

In this use case, we'll create basic customer account.

Operation: **createAccount**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/applicationModule/types/"
 xmlns:cus="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/" xmlns:cus1="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountContactRole/" xmlns:par="http://
xmlns.oracle.com/apps/cdm/foundation/parties/partyService/" xmlns:sour="http://xmlns.oracle.com/apps/
cdm/foundation/parties/flex/sourceSystemRef/" xmlns:cus2="http://xmlns.oracle.com/apps/cdm/foundation/
parties/flex/custAccountContact/" xmlns:cus3="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountRel/" xmlns:cus4="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSiteUse/"
```

```
 xmlns:cus5="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccountSite/" xmlns:cus6="http://
xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/">
 <soapenv:Header/>
 <soapenv:Body>
 <typ:mergeCustomerAccount>
 <typ:customerAccount>
 <cus:PartyId>1003</cus:PartyId>
 <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
 <cus:CustomerAccountSite>
 <cus:PartySiteId>300100555606069</cus:PartySiteId>
 <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
 <cus:SetId>202</cus:SetId>
 <cus:CustomerAccountSiteUse>
 <cus:SiteUseCode>SOLD_TO</cus:SiteUseCode>
 <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
 </cus:CustomerAccountSiteUse>
 <cus:CustomerAccountSiteUse>
 <cus:SiteUseCode>BILL_TO</cus:SiteUseCode>
 <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
 </cus:CustomerAccountSiteUse>
 <cus:CustomerAccountSiteUse>
 <cus:SiteUseCode>SHIP_TO</cus:SiteUseCode>
 <cus:CreatedByModule>HZ_WS</cus:CreatedByModule>
 </cus:CustomerAccountSiteUse>
 </cus:CustomerAccountSite>
 </typ:customerAccount>
 </typ:mergeCustomerAccount>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/applicationModule/
CustomerAccountService/mergeCustomerAccountResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:c02f8d42-5cb9-4b6c-b706-321bb1e99673</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:mergeCustomerAccountResponse xmlns:ns0="http://xmlns.oracle.com/apps/cdm/foundation/parties/
customerAccountService/applicationModule/types/">
 <ns0:result xsi:type="ns2:CustomerAccountResult" xmlns:ns4="http://xmlns.oracle.com/apps/cdm/foundation/
parties/partyService/" xmlns:ns9="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/custAccount/"
 xmlns:ns2="http://xmlns.oracle.com/apps/cdm/foundation/parties/customerAccountService/" xmlns:tns="http://
xmlns.oracle.com/adf/svc/errors/" xmlns:ns1="http://xmlns.oracle.com/adf/svc/types/" xmlns:xsi="http://
www.w3.org/2001/XMLSchema-instance">
 <ns2:Value>
 <ns2:CustomerAccountId>300100560117299</ns2:CustomerAccountId>
 <ns2:PartyId>1003</ns2:PartyId>
 <ns2:LastUpdateDate>2021-12-09T04:40:01.525Z</ns2:LastUpdateDate>
 <ns2:AccountNumber>CDRM_216283</ns2:AccountNumber>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>2021-12-09T04:39:59.026Z</ns2:CreationDate>
 <ns2:CreatedBy>FUSION</ns2:CreatedBy>
 <ns2:LastUpdateLogin>D22807D666EC220AE0531C5CF00A1645</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystem xsi:nil="true"/>
 <ns2:OrigSystemReference>300100560117299</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:CustomerType xsi:nil="true"/>
 <ns2:CustomerClassCode xsi:nil="true"/>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:CoterminateDayMonth xsi:nil="true"/>
```

```
 <ns2:AccountEstablishedDate>2021-12-09</ns2:AccountEstablishedDate>
 <ns2:AccountTerminationDate>4712-12-31</ns2:AccountTerminationDate>
 <ns2:HeldBillExpirationDate xsi:nil="true"/>
 <ns2:HoldBillFlag>false</ns2:HoldBillFlag>
 <ns2:AccountName xsi:nil="true"/>
 <ns2:DepositRefundMethod xsi:nil="true"/>
 <ns2:NpaNumber xsi:nil="true"/>
 <ns2:SourceCode xsi:nil="true"/>
 <ns2:Comments xsi:nil="true"/>
 <ns2:DateTypePreference xsi:nil="true"/>
 <ns2:ArrivalsetsIncludeLinesFlag xsi:nil="true"/>
 <ns2:StatusUpdateDate xsi:nil="true"/>
 <ns2:AutopayFlag xsi:nil="true"/>
 <ns2:LastBatchId xsi:nil="true"/>
 <ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
 <ns2:SellingPartyId xsi:nil="true"/>
 <ns2:CustomerAccountSite xmlns:ns7="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSite/">
 <ns2:CustomerAccountSiteId>300100560117300</ns2:CustomerAccountSiteId>
 <ns2:CustomerAccountId>300100560117299</ns2:CustomerAccountId>
 <ns2:PartySiteId>300100555606069</ns2:PartySiteId>
 <ns2:LastUpdateDate>2021-12-09T04:40:01.601Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>2021-12-09T04:39:59.417Z</ns2:CreationDate>
 <ns2:CreatedBy>FUSION</ns2:CreatedBy>
 <ns2:LastUpdateLogin>D22807D666EC220AE0531C5CF00A1645</ns2:LastUpdateLogin>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:OrigSystemReference>300100560117300</ns2:OrigSystemReference>
 <ns2:Status>A</ns2:Status>
 <ns2:BillToIndicator>P</ns2:BillToIndicator>
 <ns2:MarketIndicator>N</ns2:MarketIndicator>
 <ns2:ShipToIndicator>P</ns2:ShipToIndicator>
 <ns2:CustomerCategoryCode xsi:nil="true"/>
 <ns2:Language xsi:nil="true"/>
 <ns2:KeyAccountFlag xsi:nil="true"/>
 <ns2:TpHeaderId xsi:nil="true"/>
 <ns2:EceTpLocationCode xsi:nil="true"/>
 <ns2:TranslatedCustomerName xsi:nil="true"/>
 <ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
 <ns2:SetId>202</ns2:SetId>
 <ns2:StartDate>2021-12-09</ns2:StartDate>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:SetCode>Vision Corporation 202</ns2:SetCode>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>300100560117301</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>300100560117300</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2021-12-09T04:40:01.61Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>2021-12-09T04:39:59.806Z</ns2:CreationDate>
 <ns2:CreatedBy>FUSION</ns2:CreatedBy>
 <ns2:SiteUseCode>SOLD_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>CDRM_190377</ns2:Location>
 <ns2:LastUpdateLogin>D22807D666EC220AE0531C5CF00A1645</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference>300100560117301</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId xsi:nil="true"/>
 <ns2:GSAIndicator xsi:nil="true"/>
 <ns2:TerritoryId xsi:nil="true"/>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode xsi:nil="true"/>
```

```
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
 <ns2:SetId>202</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>2021-12-09</ns2:StartDate>
 </ns2:CustomerAccountSiteUse>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>300100560117302</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>300100560117300</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2021-12-09T04:40:01.794Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>2021-12-09T04:40:00.734Z</ns2:CreationDate>
 <ns2:CreatedBy>FUSION</ns2:CreatedBy>
 <ns2:SiteUseCode>BILL_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>CDRM_190378</ns2:Location>
 <ns2:LastUpdateLogin>D22807D666EC220AE0531C5CF00A1645</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference>300100560117302</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId xsi:nil="true"/>
 <ns2:GSAIndicator xsi:nil="true"/>
 <ns2:TerritoryId xsi:nil="true"/>
 <ns2:RequestId xsi:nil="true"/>
 <ns2:TaxReference xsi:nil="true"/>
 <ns2:SortPriority xsi:nil="true"/>
 <ns2:TaxCode xsi:nil="true"/>
 <ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastAccrueChargeDate xsi:nil="true"/>
 <ns2:LastUnaccrueChargeDate xsi:nil="true"/>
 <ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
 <ns2:TaxHeaderLevelFlag xsi:nil="true"/>
 <ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
 <ns2:TaxRoundingRule xsi:nil="true"/>
 <ns2:TaxClassification xsi:nil="true"/>
 <ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
 <ns2:SetId>202</ns2:SetId>
 <ns2:EndDate>4712-12-31</ns2:EndDate>
 <ns2:StartDate>2021-12-09</ns2:StartDate>
 </ns2:CustomerAccountSiteUse>
 <ns2:CustomerAccountSiteUse xmlns:ns6="http://xmlns.oracle.com/apps/cdm/foundation/parties/flex/
custAccountSiteUse/">
 <ns2:SiteUseId>300100560117303</ns2:SiteUseId>
 <ns2:CustomerAccountSiteId>300100560117300</ns2:CustomerAccountSiteId>
 <ns2:LastUpdateDate>2021-12-09T04:40:01.834Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>FUSION</ns2:LastUpdatedBy>
 <ns2:CreationDate>2021-12-09T04:40:00.79Z</ns2:CreationDate>
 <ns2:CreatedBy>FUSION</ns2:CreatedBy>
 <ns2:SiteUseCode>SHIP_TO</ns2:SiteUseCode>
 <ns2:PrimaryFlag>true</ns2:PrimaryFlag>
 <ns2:Status>A</ns2:Status>
 <ns2:Location>CDRM_190379</ns2:Location>
 <ns2:LastUpdateLogin>D22807D666EC220AE0531C5CF00A1645</ns2:LastUpdateLogin>
 <ns2:BillToSiteUseId xsi:nil="true"/>
 <ns2:OrigSystemReference>300100560117303</ns2:OrigSystemReference>
 <ns2:SICCode xsi:nil="true"/>
 <ns2:PaymentTermId xsi:nil="true"/>
```

```
<ns2:GSAIndicator xsi:nil="true"/>
<ns2:TerritoryId xsi:nil="true"/>
<ns2:RequestId xsi:nil="true"/>
<ns2:TaxReference xsi:nil="true"/>
<ns2:SortPriority xsi:nil="true"/>
<ns2:TaxCode xsi:nil="true"/>
<ns2:SecondLastAccrueChargeDate xsi:nil="true"/>
<ns2:LastAccrueChargeDate xsi:nil="true"/>
<ns2:LastUnaccrueChargeDate xsi:nil="true"/>
<ns2:SecondLastUnaccrueChrgDate xsi:nil="true"/>
<ns2:TaxHeaderLevelFlag xsi:nil="true"/>
<ns2:FinchrgReceivablesTrxId xsi:nil="true"/>
<ns2:TaxRoundingRule xsi:nil="true"/>
<ns2:TaxClassification xsi:nil="true"/>
<ns2:CreatedByModule>HZ_WS</ns2:CreatedByModule>
<ns2:SetId>202</ns2:SetId>
<ns2:EndDate>4712-12-31</ns2:EndDate>
<ns2:StartDate>2021-12-09</ns2:StartDate>
</ns2:CustomerAccountSiteUse>
</ns2:CustomerAccountSite>
</ns2:Value>
</ns0:result>
</ns0:mergeCustomerAccountResponse>
</env:Body>
</env:Envelope>
```

Opportunity Web Service Sample Payloads

Using Recur Frequency Code

In this use case, we'll update an opportunity using recur frequency code.

Update recur frequency code in Opportunity

The `recurstart` date for a revenue line is always the `effectivedate` of the revenue line. When a revenue line is newly created, it copies the effective date of the opportunity. The recur start date will also hold the same value.

So, it is always advised to ensure that the recurEndDate should have a value greater than start date. Alternatively you can provide recur frequency code instead of recur end date.

Operation: **mergeOpportunity**

Request Body

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/" xmlns:typ="http://
xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opportunityService/types/" xmlns:opp="http://
xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opportunityService/" xmlns:rev="http://xmlns.oracle.com/
apps/sales/opptyMgmt/revenues/revenueService/" xmlns:not="http://xmlns.oracle.com/apps/crmCommon/notes/
noteService" xmlns:not1="http://xmlns.oracle.com/apps/crmCommon/notes/flex/noteDff/" xmlns:rev1="http://
xmlns.oracle.com/oracle/apps/sales/opptyMgmt/revenues/revenueService/" xmlns:act="http://xmlns.oracle.com/
apps/crmCommon/activities/activitiesService/">
<soapenv:Header/>
<soapenv:Body>
<typ:mergeOpportunity>
<typ:opportunity>
<opp:OptyId>300100549886876</opp:OptyId>
<opp:ChildRevenue>
<rev:UnitPrice currencyCode="USD">24</rev:UnitPrice>
<rev:InventoryItemId>21301</rev:InventoryItemId>
```

```
 <rev:InventoryOrgId>204</rev:InventoryOrgId>
 <rev:Quantity>1</rev:Quantity>
 <rev:RecurFrequencyCode>MONTHLY</rev:RecurFrequencyCode>
 <rev:RecurTypeCode>PARENTRECUR</rev:RecurTypeCode>
 <rev:RecurNumberPeriods>2</rev:RecurNumberPeriods>
 <rev:ScheduleAction>ADD</rev:ScheduleAction>
 <rev:RecurringRevenue>
 <rev:Quantity>1</rev:Quantity>
 <rev:RevnAmountCurcyCode>USD</rev:RevnAmountCurcyCode>
 <rev:RevnAmount>100</rev:RevnAmount>
 <rev:RecurTypeCode>CHILDRECUR</rev:RecurTypeCode>
 <rev:EffectiveDate>2021-06-24</rev:EffectiveDate>
 </rev:RecurringRevenue>
 </opp:ChildRevenue>
 </typ:opportunity>
 </typ:mergeOpportunity>
 </soapenv:Body>
</soapenv:Envelope>
```

Response Body

```
<env:Envelope xmlns:env="http://schemas.xmlsoap.org/soap/envelope/" xmlns:wsa="http://www.w3.org/2005/08/
addressing">
 <env:Header>
 <wsa:Action>http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opportunityService/
OpportunityService/mergeOpportunityResponse</wsa:Action>
 <wsa:MessageID>urn:uuid:a778a566-e997-4332-aa27-a0abd38c8a4e</wsa:MessageID>
 </env:Header>
 <env:Body>
 <ns0:mergeOpportunityResponse xmlns:ns0="http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/
opportunityService/types/">
 <ns3:result xsi:type="ns2:Opportunity" xmlns:ns0="http://xmlns.oracle.com/adf/svc/types/"
 xmlns:ns1="http://xmlns.oracle.com/apps/sales/opptyMgmt/revenues/revenueService/" xmlns:ns6="http://
xmlns.oracle.com/apps/crmCommon/notes/noteService" xmlns:ns7="http://xmlns.oracle.com/oracle/
apps/sales/opptyMgmt/revenues/revenueService/" xmlns:ns8="http://xmlns.oracle.com/apps/crmCommon/
activities/activitiesService/" xmlns:ns2="http://xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/
opportunityService/" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:ns3="http://
xmlns.oracle.com/apps/sales/opptyMgmt/opportunities/opportunityService/types/">
 <ns2:BudgetAvailableDate xsi:nil="true"/>
 <ns2:BudgetedFlag>false</ns2:BudgetedFlag>
 <ns2:PrimaryOrganizationId>204</ns2:PrimaryOrganizationId>
 <ns2:ChampionFlag>false</ns2:ChampionFlag>
 <ns2:ConflictId>0</ns2:ConflictId>
 <ns2:CreatedBy>SALES_ADMIN</ns2:CreatedBy>
 <ns2:CreationDate>2022-05-26T07:49:33Z</ns2:CreationDate>
 <ns2:CurrencyCode>USD</ns2:CurrencyCode>
 <ns2:OpportunityTypeCode xsi:nil="true"/>
 <ns2:RenewalProcess xsi:nil="true"/>
 <ns2:SalesMethodId>300100549886867</ns2:SalesMethodId>
 <ns2:SalesStageId>300100549886868</ns2:SalesStageId>
 <ns2:CustomerAccountId xsi:nil="true"/>
 <ns2:DealHorizonCode xsi:nil="true"/>
 <ns2:DealHorizonCodeSetId xsi:nil="true"/>
 <ns2:DecisionLevelCode xsi:nil="true"/>
 <ns2:DecisionLevelCodeSetId xsi:nil="true"/>
 <ns2:Description xsi:nil="true"/>
 <ns2:LastUpdateDate>2022-05-31T13:52:03.496Z</ns2:LastUpdateDate>
 <ns2:LastUpdatedBy>SALES_ADMIN</ns2:LastUpdatedBy>
 <ns2:LastUpdateLogin>DF98567ED444E749E053DA0CF10A204E</ns2:LastUpdateLogin>
 <ns2:Name>OP1</ns2:Name>
 <ns2:ObjectVersionNumber>4</ns2:ObjectVersionNumber>
 <ns2:OptyId>300100549886876</ns2:OptyId>
 <ns2:OptyNumber>CDRM_158501</ns2:OptyNumber>
 <ns2:OwnerResourcePartyId>100010025532672</ns2:OwnerResourcePartyId>
 <ns2:PrimaryCompetitorId xsi:nil="true"/>
 <ns2:KeyContactId xsi:nil="true"/>
```

```
<ns2:ReasonWonLostCode xsi:nil="true"/>
<ns2:ReasonWonLostCodeSetId xsi:nil="true"/>
<ns2:RiskLevelCode xsi:nil="true"/>
<ns2:RiskLevelCodeSetId xsi:nil="true"/>
<ns2:StatusCode>OPEN</ns2:StatusCode>
<ns2:StatusCodeSetId>0</ns2:StatusCodeSetId>
<ns2:StrategicLevelCode xsi:nil="true"/>
<ns2:StrategicLevelCodeSetId xsi:nil="true"/>
<ns2:PrimaryRevenueId>300100549886877</ns2:PrimaryRevenueId>
<ns2:TargetPartyId xsi:nil="true"/>
<ns2:UserLastUpdateDate xsi:nil="true"/>
<ns2:TargetPartyName/>
<ns2:DUNSNumber xsi:nil="true"/>
<ns2:SalesMethod>HNARSHA_Orch_SalesMethod</ns2:SalesMethod>
<ns2:SalesMethodEOObjVerNumber>1</ns2:SalesMethodEOObjVerNumber>
<ns2:SalesStage>First_Stage</ns2:SalesStage>
<ns2:DescriptionText xsi:nil="true"/>
<ns2:AverageDaysAtStage>1</ns2:AverageDaysAtStage>
<ns2:MaximumDaysInStage xsi:nil="true"/>
<ns2:PhaseCd>CLOSING</ns2:PhaseCd>
<ns2:QuotaFactor>100</ns2:QuotaFactor>
<ns2:RcmndWinProb>100</ns2:RcmndWinProb>
<ns2:StageStatusCd>OPEN</ns2:StageStatusCd>
<ns2:StgOrder>1</ns2:StgOrder>
<ns2:SalesStageEOObjVerNumber>1</ns2:SalesStageEOObjVerNumber>
<ns2:EffectiveDate>2022-06-15</ns2:EffectiveDate>
<ns2:Revenue currencyCode="USD">100</ns2:Revenue>
<ns2:RevenueType xsi:nil="true"/>
<ns2:RevnId>300100549886877</ns2:RevnId>
<ns2:EmployeesTotal xsi:nil="true"/>
<ns2:CurrentFyPotentialRevenue xsi:nil="true"/>
<ns2:WinProb>100</ns2:WinProb>
<ns2:ObjectVersionNumber1>3</ns2:ObjectVersionNumber1>
<ns2:PrimaryContactPartyName/>
<ns2:PrimaryContactPartyId/>
<ns2:PrimaryContactFormattedPhoneNumber xsi:nil="true"/>
<ns2:PrimaryContactEmailAddress xsi:nil="true"/>
<ns2:AccountNumber xsi:nil="true"/>
<ns2:PartyName/>
<ns2:LocationId/>
<ns2:FormattedAddress xsi:nil="true"/>
<ns2:City xsi:nil="true"/>
<ns2:Country/>
<ns2:PostalCode xsi:nil="true"/>
<ns2:State xsi:nil="true"/>
<ns2:BdgtAmount xsi:nil="true"/>
<ns2:Comments xsi:nil="true"/>
<ns2:PartyName1>Gabrielle Lee</ns2:PartyName1>
<ns2:PrSrcNumber xsi:nil="true"/>
<ns2:DownsideAmount currencyCode="USD">0</ns2:DownsideAmount>
<ns2:UpsideAmount currencyCode="USD">100</ns2:UpsideAmount>
<ns2:EmailAddress>sendmail-test-discard@oracle.com</ns2:EmailAddress>
<ns2:LastAssignedDate xsi:nil="true"/>
<ns2:LookupCategory>OPEN</ns2:LookupCategory>
<ns2:LookupValuesId xsi:nil="true"/>
<ns2:OptyCreationDate>2022-05-26T07:49:33Z</ns2:OptyCreationDate>
<ns2:ExpectAmount currencyCode="USD">100</ns2:ExpectAmount>
<ns2:PreferredFunctionalCurrency xsi:nil="true"/>
<ns2:PartyUniqueName xsi:nil="true"/>
<ns2:PrConRelationshipId xsi:nil="true"/>
<ns2:OptyCreatedBy>SALES_ADMIN</ns2:OptyCreatedBy>
<ns2:CrmConversionRate>1</ns2:CrmConversionRate>
<ns2:CrmRevenue>100</ns2:CrmRevenue>
<ns2:RevnLineSetEnabledFlag>false</ns2:RevnLineSetEnabledFlag>
<ns2:PartyType/>
<ns2:OptyLastUpdateDate>2022-05-31T13:52:03.496Z</ns2:OptyLastUpdateDate>
```

```
<ns2:OptyLastUpdatedBy>SALES_ADMIN</ns2:OptyLastUpdatedBy>
<ns2:SalesChannelCd>ZPM_DIRECT_CHANNEL_TYPES</ns2:SalesChannelCd>
<ns2:LineOfBusinessCode xsi:nil="true"/>
<ns2:PhonePreferenceExistsFlag>false</ns2:PhonePreferenceExistsFlag>
<ns2:PartyUniqueName1 xsi:nil="true"/>
<ns2:PrimaryOrganizationName>Vision Operations</ns2:PrimaryOrganizationName>
<ns2:SalesAccountId xsi:nil="true"/>
<ns2:SalesAccountUniqueName xsi:nil="true"/>
<ns2:ConsumerFirstName xsi:nil="true"/>
<ns2:ConsumerLastName xsi:nil="true"/>
<ns2:PrimaryContactFirstName xsi:nil="true"/>
<ns2:PrimaryContactLastName xsi:nil="true"/>
<ns2:PrimaryPartnerOrgPartyName/>
<ns2:PrimaryPartnerId xsi:nil="true"/>
<ns2:LastAssignedTimestamp xsi:nil="true"/>
<ns2:RegistrationStatus xsi:nil="true"/>
<ns2:RegistrationType xsi:nil="true"/>
<ns2:Registered>NO</ns2:Registered>
<ns2:UpdateFlag>true</ns2:UpdateFlag>
<ns2:DeleteFlag>true</ns2:DeleteFlag>
<ns2:AssetNumber xsi:nil="true"/>
<ns2:AssetId xsi:nil="true"/>
<ns2:AssetProduct xsi:nil="true"/>
<ns2:AssetSerialNumber xsi:nil="true"/>
<ns2:QuotedFlag>true</ns2:QuotedFlag>
<ns2:IBAssetId xsi:nil="true"/>
<ns2:IBAssetNumber/>
<ns2:IBAssetSerialNumber xsi:nil="true"/>
<ns2:TargetPartyPrimaryAddressCountry xsi:nil="true"/>
<ns2:PrimarySubscriptionId xsi:nil="true"/>
<ns2:PrimarySubscriptionNumber/>
<ns2:ChildRevenue>
<ns1:RevnId>300100558753739</ns1:RevnId>
<ns1:TargetPartyId xsi:nil="true"/>
<ns1:CustomerAccountId xsi:nil="true"/>
<ns1:BUOrgId>204</ns1:BUOrgId>
<ns1:Comments xsi:nil="true"/>
<ns1:CommitFlag>false</ns1:CommitFlag>
<ns1:CostAmount currencyCode="USD">0</ns1:CostAmount>
<ns1:ResourcePartyId>100010025532672</ns1:ResourcePartyId>
<ns1:OwnerResourceOrgId xsi:nil="true"/>
<ns1:DownsideAmount currencyCode="USD">0</ns1:DownsideAmount>
<ns1:ExpectAmount currencyCode="USD">100</ns1:ExpectAmount>
<ns1:MarginAmount currencyCode="USD">0</ns1:MarginAmount>
<ns1:OptyId>300100549886876</ns1:OptyId>
<ns1:PriceTypeCode xsi:nil="true"/>
<ns1:UnitPrice currencyCode="USD">24</ns1:UnitPrice>
<ns1:InventoryItemId>21301</ns1:InventoryItemId>
<ns1:InventoryOrgId>204</ns1:InventoryOrgId>
<ns1:Quantity>1</ns1:Quantity>
<ns1:Discount xsi:nil="true"/>
<ns1:NonRecurringRevenue currencyCode="USD">0</ns1:NonRecurringRevenue>
<ns1:RecurRevenue currencyCode="USD">0</ns1:RecurRevenue>
<ns1:UsageRevenue currencyCode="USD">0</ns1:UsageRevenue>
<ns1:RevnAmount currencyCode="USD">100</ns1:RevnAmount>
<ns1:ContractStartDate xsi:nil="true"/>
<ns1:ContractEndDate xsi:nil="true"/>
<ns1:MonthlyRecurringRevenue xsi:nil="true"/>
<ns1:MonthlyUsageRevenue xsi:nil="true"/>
<ns1:RevnAmountCurcyCode>USD</ns1:RevnAmountCurcyCode>
<ns1:TypeCode xsi:nil="true"/>
<ns1:TypeCodeSetId xsi:nil="true"/>
<ns1:SubscriptionId xsi:nil="true"/>
<ns1:SubscriptionLineId xsi:nil="true"/>
<ns1:RevenueTypeCategory xsi:nil="true"/>
<ns1:ExternalRootAssetKey xsi:nil="true"/>
```

```
<ns1:ExternalParentAssetKey xsi:nil="true"/>
<ns1:ExternalAssetKey xsi:nil="true"/>
<ns1:UpsideAmount currencyCode="USD">100</ns1:UpsideAmount>
<ns1:WinProb>100</ns1:WinProb>
<ns1:UOMCode xsi:nil="true"/>
<ns1:ExpectDlvryDate xsi:nil="true"/>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:CreationDate>2022-05-31T13:52:03Z</ns1:CreationDate>
<ns1:ConflictId>0</ns1:ConflictId>
<ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
<ns1:LastUpdateDate>2022-05-31T13:52:03.87Z</ns1:LastUpdateDate>
<ns1:LastUpdateLogin>DF98567ED444E749E053DA0CF10A204E</ns1:LastUpdateLogin>
<ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
<ns1:UserLastUpdateDate xsi:nil="true"/>
<ns1:PartyName/>
<ns1:Description>1" Colonial Molding - Right</ns1:Description>
<ns1:OrganizationId>204</ns1:OrganizationId>
<ns1:PrimaryFlag>false</ns1:PrimaryFlag>
<ns1:Name>OP1</ns1:Name>
<ns1:RevnNumber>CDRM_155484</ns1:RevnNumber>
<ns1:ProdGroupId xsi:nil="true"/>
<ns1:ProdGroupName/>
<ns1:RecurFrequencyCode>MONTHLY</ns1:RecurFrequencyCode>
<ns1:RecurEndDate xsi:nil="true"/>
<ns1:RecurParentRevnId xsi:nil="true"/>
<ns1:RecurNumberPeriods>2</ns1:RecurNumberPeriods>
<ns1:RecurQuantity>1</ns1:RecurQuantity>
<ns1:RecurUnitPrice currencyCode="USD">24</ns1:RecurUnitPrice>
<ns1:AmountAggregatedForScheduleFlag xsi:nil="true"/>
<ns1:ScheduleNonRecurringAmount xsi:nil="true"/>
<ns1:ScheduleRecurringAmount xsi:nil="true"/>
<ns1:ScheduleUsageAmount xsi:nil="true"/>
<ns1:RecurRevnAmount currencyCode="USD">24</ns1:RecurRevnAmount>
<ns1:RecurTypeCode>PARENTRECUR</ns1:RecurTypeCode>
<ns1:RecurStartDate>2022-06-15</ns1:RecurStartDate>
<ns1:SalesCreditTypeCode>QUOTA</ns1:SalesCreditTypeCode>
<ns1:SplitParentRevnId xsi:nil="true"/>
<ns1:SplitPercent>100</ns1:SplitPercent>
<ns1:SplitTypeCode>NONE</ns1:SplitTypeCode>
<ns1:StatusCode>OPEN</ns1:StatusCode>
<ns1:StatusCodeSetId>0</ns1:StatusCodeSetId>
<ns1:EffectiveDate>2022-06-15</ns1:EffectiveDate>
<ns1:CloseReasonCode xsi:nil="true"/>
<ns1:CloseReasonCodeSetId xsi:nil="true"/>
<ns1:PrCmptPartyId xsi:nil="true"/>
<ns1:PartyName1/>
<ns1:RecurPeriodOrEndDateCode>EndAfter</ns1:RecurPeriodOrEndDateCode>
<ns1:ActualCloseDate xsi:nil="true"/>
<ns1:AttachmentEntityName>EGP_SYSTEM_ITEMS</ns1:AttachmentEntityName>
<ns1:PartyName2>Gabrielle Lee</ns1:PartyName2>
<ns1:PrTerritoryVersionId xsi:nil="true"/>
<ns1:ConversionRate>1</ns1:ConversionRate>
<ns1:ConversionRateType>Corporate</ns1:ConversionRateType>
<ns1:OwnerDealExpirationDate xsi:nil="true"/>
<ns1:OwnerDealProtectedDate xsi:nil="true"/>
<ns1:OwnerLockAsgnFlag>false</ns1:OwnerLockAsgnFlag>
<ns1:Name1/>
<ns1:ForecastOverrideCode>CRITERIA</ns1:ForecastOverrideCode>
<ns1:ItemNumber>WD52002</ns1:ItemNumber>
<ns1:ItemNumberInternal>WD52002</ns1:ItemNumberInternal>
<ns1:OptyNumber>CDRM_158501</ns1:OptyNumber>
<ns1:ProductType>Item</ns1:ProductType>
<ns1:NqSplitAllocTypeCode>PROPORTIONAL</ns1:NqSplitAllocTypeCode>
<ns1:RecurDownsideAmount currencyCode="USD">0</ns1:RecurDownsideAmount>
<ns1:RecurUpsideAmount currencyCode="USD">24</ns1:RecurUpsideAmount>
<ns1:CrmCurcyCode>USD</ns1:CrmCurcyCode>
```

```
<ns1:CrmConversionRateType>Corporate</ns1:CrmConversionRateType>
<ns1:CrmConversionRate>1</ns1:CrmConversionRate>
<ns1:OwnerOrgTreeCode xsi:nil="true"/>
<ns1:OwnerOrgTreeStructCode xsi:nil="true"/>
<ns1:RevnCreationDate>2022-05-31T13:52:03Z</ns1:RevnCreationDate>
<ns1:RevnCategoryCode xsi:nil="true"/>
<ns1:OptyLeadId xsi:nil="true"/>
<ns1:SalesChannelCd>ZPM_DIRECT_CHANNEL_TYPES</ns1:SalesChannelCd>
<ns1:PrPartOrgPartyId xsi:nil="true"/>
<ns1:PartEngagementTypeCd xsi:nil="true"/>
<ns1:CreditRcptPartOrgPartyId xsi:nil="true"/>
<ns1:PartOrgPartyId/>
<ns1:PartOrgPartyName/>
<ns1:ParentRevnId xsi:nil="true"/>
<ns1:RevnLineTypeCode>STANDARD_REVN</ns1:RevnLineTypeCode>
<ns1:RevnSequenceNumber xsi:nil="true"/>
<ns1:PrTerritoryUpdatedById xsi:nil="true"/>
<ns1:PrTerritoryUpdatedByPartyName/>
<ns1:PartyUniqueName1 xsi:nil="true"/>
<ns1:SalesAccountId xsi:nil="true"/>
<ns1:SalesAccountUniqueName xsi:nil="true"/>
<ns1:ViewCriteriaIdentifier xsi:nil="true"/>
<ns1:RecurExpectAmount currencyCode="USD">24.00</ns1:RecurExpectAmount>
<ns1:ScheduleAction>NOACTION</ns1:ScheduleAction>
<ns1:AdditionalText1 xsi:nil="true"/>
<ns1:AdditionalText2 xsi:nil="true"/>
<ns1:AdditionalNumber xsi:nil="true"/>
<ns1:AdditionalAmount xsi:nil="true"/>
<ns1:RecurAdditionalNumber xsi:nil="true"/>
<ns1:RecurAdditionalAmount xsi:nil="true"/>
<ns1:ProdGroupModelName xsi:nil="true"/>
<ns1:ProdGroupModelConfigAttributes xsi:nil="true"/>
<ns1:ProdGroupModelFamily xsi:nil="true"/>
<ns1:ProdGroupModelLine xsi:nil="true"/>
<ns1:ProductModelName xsi:nil="true"/>
<ns1:ProductModelConfigAttributes xsi:nil="true"/>
<ns1:ProductModelFamily xsi:nil="true"/>
<ns1:ProductModelLine xsi:nil="true"/>
<ns1:ProductConfigurableFlag xsi:nil="true"/>
<ns1:ProdGroupQuotableFlag xsi:nil="true"/>
<ns1:RecurringRevenue>
<ns1:RevnId>300100558753740</ns1:RevnId>
<ns1:TargetPartyId xsi:nil="true"/>
<ns1:BUOrgId>204</ns1:BUOrgId>
<ns1:CustomerAccountId xsi:nil="true"/>
<ns1:CommitFlag>false</ns1:CommitFlag>
<ns1:Comments xsi:nil="true"/>
<ns1:ResourcePartyId>100010025532672</ns1:ResourcePartyId>
<ns1:CostAmount currencyCode="USD">0</ns1:CostAmount>
<ns1:DownsideAmount currencyCode="USD">0</ns1:DownsideAmount>
<ns1:OwnerResourceOrgId xsi:nil="true"/>
<ns1:ExpectAmount currencyCode="USD">100</ns1:ExpectAmount>
<ns1:EffectiveDate>2021-06-24</ns1:EffectiveDate>
<ns1:OptyId>300100549886876</ns1:OptyId>
<ns1:MarginAmount currencyCode="USD">0</ns1:MarginAmount>
<ns1:InventoryItemId>21301</ns1:InventoryItemId>
<ns1:UnitPrice currencyCode="USD">24</ns1:UnitPrice>
<ns1:Quantity>1</ns1:Quantity>
<ns1:InventoryOrgId>204</ns1:InventoryOrgId>
<ns1:RevnAmountCurcyCode>USD</ns1:RevnAmountCurcyCode>
<ns1:NonRecurringRevenue xsi:nil="true"/>
<ns1:RecurRevenue xsi:nil="true"/>
<ns1:UsageRevenue xsi:nil="true"/>
<ns1:RevnAmount currencyCode="USD">100</ns1:RevnAmount>
<ns1:UpsideAmount currencyCode="USD">100</ns1:UpsideAmount>
<ns1:TypeCode xsi:nil="true"/>
```

```
<ns1:TypeCodeSetId xsi:nil="true"/>
<ns1:PrimaryFlag>false</ns1:PrimaryFlag>
<ns1:WinProb>100</ns1:WinProb>
<ns1:ExpectDlvryDate xsi:nil="true"/>
<ns1:UOMCode xsi:nil="true"/>
<ns1:CreationDate>2022-05-31T13:52:03.268Z</ns1:CreationDate>
<ns1:CreatedBy>SALES_ADMIN</ns1:CreatedBy>
<ns1:LastUpdatedBy>SALES_ADMIN</ns1:LastUpdatedBy>
<ns1:ConflictId>0</ns1:ConflictId>
<ns1:LastUpdateLogin>DF98567ED444E749E053DA0CF10A204E</ns1:LastUpdateLogin>
<ns1:LastUpdateDate>2022-05-31T13:52:04.306Z</ns1:LastUpdateDate>
<ns1:UserLastUpdateDate xsi:nil="true"/>
<ns1:ObjectVersionNumber>1</ns1:ObjectVersionNumber>
<ns1:ProdGroupId xsi:nil="true"/>
<ns1:RevnNumber>CDRM_155485</ns1:RevnNumber>
<ns1:RecurFrequencyCode>NONE</ns1:RecurFrequencyCode>
<ns1:RecurEndDate xsi:nil="true"/>
<ns1:RecurParentRevnId>300100558753739</ns1:RecurParentRevnId>
<ns1:RecurNumberPeriods xsi:nil="true"/>
<ns1:RecurRevnAmount xsi:nil="true"/>
<ns1:RecurQuantity xsi:nil="true"/>
<ns1:RecurTypeCode>CHILDRECUR</ns1:RecurTypeCode>
<ns1:RecurStartDate xsi:nil="true"/>
<ns1:PrCmptPartyId xsi:nil="true"/>
<ns1:SalesCreditTypeCode>QUOTA</ns1:SalesCreditTypeCode>
<ns1:SplitParentRevnId xsi:nil="true"/>
<ns1:SplitPercent>100</ns1:SplitPercent>
<ns1:SplitTypeCode>NONE</ns1:SplitTypeCode>
<ns1:StatusCode>OPEN</ns1:StatusCode>
<ns1:StatusCodeSetId>0</ns1:StatusCodeSetId>
<ns1:ConversionRate>1</ns1:ConversionRate>
<ns1:ConversionRateType>Corporate</ns1:ConversionRateType>
<ns1:ForecastOverrideCode>CRITERIA</ns1:ForecastOverrideCode>
<ns1:SalesAccountId xsi:nil="true"/>
<ns1:AdditionalText1 xsi:nil="true"/>
<ns1:AdditionalText2 xsi:nil="true"/>
<ns1:AdditionalNumber xsi:nil="true"/>
<ns1:AdditionalAmount xsi:nil="true"/>
</ns1:RecurringRevenue>
</ns2:ChildRevenue>
<ns2:OpptyCustText_c>xyz</ns2:OpptyCustText_c>
<ns2:BillToCountry_c>Australia</ns2:BillToCountry_c>
<ns2:BillToState_c>ASDF</ns2:BillToState_c>
<ns2:BillToCity_c>PQRS</ns2:BillToCity_c>
<ns2:BillToZip_c>1234</ns2:BillToZip_c>
<ns2:AccountDCL_Id_c xsi:nil="true"/>
<ns2:AccountDCL_c xsi:nil="true"/>
</ns3:result>
</ns0:mergeOpportunityResponse>
</env:Body>
</env:Envelope>
```

Index

A

apply hold *5582*, *5582*
associate project to contract line *5583*

C

contract payloads *5581*, *6488*, *6576*, *6598*, *6724*, *6731*

F

find active contracts *5596*
find contract *5731*

R

remove hold *6475*, *6476*
reopen contract *6476*, *6476*

U

update active contract *6477*
update line amount *6477*